

TEST REPORT**FCC ID: 2AIZN-X6878****Product: Mobile Phone****Model No.: X6878****Trade Mark: Infinix****Report No.: WSCT-ANAB-R&E251000081A-CBSD****Issued Date: 29 December 2025**

Issued for:

INFINIX MOBILITY LIMITED**FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG**

Issued By:

**World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.
Building A-B,Baoli'an Industrial Park,No.58 and 60,Tangtou Avenue, Shiyan
Street, Bao'an District, Shenzhen City, Guangdong Province, China****TEL: +86-755-26996192****FAX: +86-755-86376605**

Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description	5
3.1. TEST METHODOLOGY OF APPLIED STANDARDS	6
3.2. FACILITIES	6
3.3. ACCREDITATIONS	6
4. MEASUREMENT	7
4.1. END USER DEVICE ADDITIONAL REQUIREMENTS	7
4.2. MEASUREMENT RESULTS EXPLANATION EXAMPLE	7
4.3. TEST CONFIGURATION OF EQUIPMENT UNDER TEST:	7
4.4. MEASUREMENT EQUIPMENT USED	8
4.5. DESCRIPTION OF SUPPORT UNITS	8
4.6. MEASUREMENT RESULT	9
5. Test Setup Photographs	11

Report No.: WSCT-ANAB-R&E251000081A-CBSD Issued Date: 29 December 2025

1. Test Certification

Product:	Mobile Phone
Model No.:	X6878
Trade Mark:	Infinix
Applicant:	INFINIX MOBILITY LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	INFINIX MOBILITY LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Date of Test:	22 September 2025 to 29 December 2025
Applicable Standards:	FCC Part 96.47 FCC KDB 940660 D01 Part 96 CBRS Eqpt V02

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen)Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: _____

Wang Xiang
(Wang Xiang)

Checked By: _____

Chen Xu
(Chen Xu)



Approved By: _____

Qin Shuiquan
(Qin Shuiquan)

Date: _____

29 December 2025



Report No.: WSCT-ANAB-R&E251000081A-CBSD Issued Date: 29 December 2025

2. Test Result Summary

No.	Item	Standard.	Test Case ID	Result
1	End User Device additional requirement.	Part 96.47	Pass	pass

The UUT is an End User Device. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC Part 96.47

FCC KDB 940660 D01 Part 96 CBRS Eqpt v03

WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification

WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines

3. EUT Description

Product Name:	Mobile Phone
Model :	X6878
Trade Mark:	Infinix
Operating Bands	TDD 5G NR Band 77/78
Antenna Type:	Integral Antenna
Antenna gain:	5G NR 77/78: -1.6dBi
Operation Frequency Range:	NR Band77: 3550-3700 MHz(TX), 3550-3700 MHz(RX); NR Band78: 3550-3700 MHz(TX), 3550-3700 MHz(RX);
Operating Voltage:	Adapter1:U900XSA(KT) Input: 100-240V~50/60Hz 2.3A Output: 5.0V---3.0A 15.0W or 5.0-11.0V---8.2A 90.0W MAX or 5.0-20.0V ---4.5A 90.0W MAX Adapter2:U900XSA(CY) Input: 100-240V~50/60Hz 2.3A Output: 5.0V---3.0A 15.0W or 5.0-11.0V---8.2A 90.0W MAX or 5.0-20.0V ---4.5A 90.0W MAX Adapter3:U1000XSA Input: 100-240V~50/60Hz 2.3A Output: 5.0V---3.0A 15.0W or 5.0-11.0V---9.1A MAX or 4.0-20.0V ---5.0A 100.0W MAX Rechargeable Li-ion Polymer Battery :BL-58KX Nominal Voltage: 3.92V Rated Capacity:5850mAh/22.94Wh Typical Capacity:6000mAh/23.52Wh Limited Charge Voltage:4.53V Wireless charger:XMC30 Input: 5.0V---2A 9.0V---2A 14.0V---2.2A Output: 5W/7.5W/10W/30W
Remark:	N/A.

Note: 1. N/A stands for no applicable.

2. The antenna gain is provided by the customer. For any reported data issues caused by the antenna gain, World Standardization Certification&Testing Group (Shenzhen) Co., Ltd assumes no responsibility.

3. This EUT has three adapters, all of which have been tested. The report only shows the worst case scenario, with the worst adapter model being U1000XSA

Report No.: WSCT-ANAB-R&E251000081A-CBSD Issued Date: 29 December 2025

3.1. Test Methodology of Applied Standards

FCC Part 96.47

FCC KDB 940660 D01 Part 96 CBRS Eqpt V02

3.2. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, China** of the **World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

3.3. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:2017.

USA**ANAB - Certificate Number: AT-3951****China****CNAS (Registration Number: L3732)****Canada****ISED (CAB identifier: CN0178)**

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

4. MEASUREMENT

4.1. End User Device additional requirements

FCC Part 96.47

(a) End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

(1) An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

4.2. Measurement Results Explanation Example


For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

1. Setup with frequency 3590-3610MHz and power level 18dBm/MHz;
2. Enable AP service from EPC management
3. Check EUD Tx Frequency and power
4. Disable AP service from EPC management
 - a. Check EUD stops transmission within 10seconds.
5. Setup with frequency 3610-3630MHz and power level 5dBm/MHz;
6. Enable AP service from EPC management
7. Check EUD Tx Frequency and power
8. Disable AP service from EPC management
 - a. Check EUD stops transmission within 10seconds.

4.3. Test Configuration of Equipment Under Test:

Connection Diagram of Test System

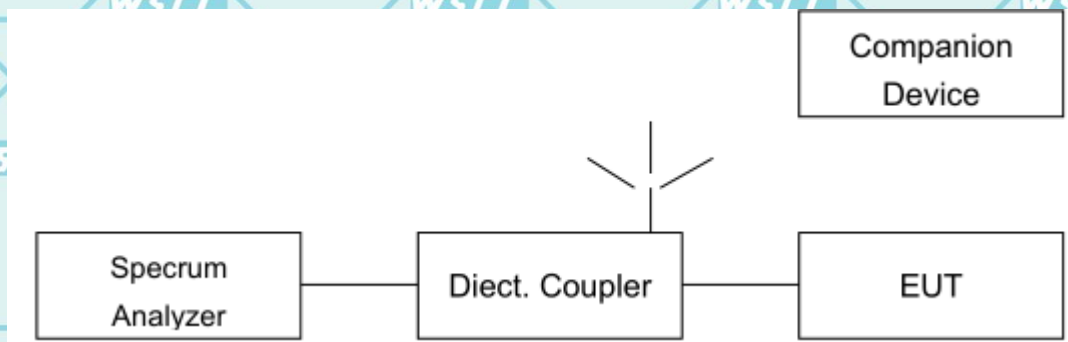

The EUT is an End User Device (EUD) which was connected to a certified Gentek CBSD as the company-ion device to show compliance with Part 96.47 requirement.

4.4. Measurement Equipment Used

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Spectrum Analyzer	keysight	FSU	100114	11/05/2025	11/04/2026
DC Power Supply	Gwinstek	SPS-3611	GEV856725	11/05/2025	11/04/2026
Attenuator	KEYSIGHT	8494B	TH60073522	11/05/2025	11/04/2026
Attenuator	KEYSIGHT	8494B	TH60073536	11/05/2025	11/04/2026
DC Block	Mini-Circuits	BLK-18-S+	5	11/05/2025	11/04/2026
Power Divider	RF-LAMBAD	RFLT2W1G18G	11-JSPF412	11/05/2025	11/04/2026
2WayDivider	Woken	A02056002D	DSU7AMW9S	11/05/2025	11/04/2026

4.5. Description of Support Units

Description	Manufacturer	Model No.	Serial No.
AP	PC i-	FXG-05TX	N/A
5G NR Base station	Baicells	BSC7048A243 (FCC ID: 2AG32BSC7048A243)	120200056822C2B0002
EPC	Gentek	CSB-3230A-GT1	N/A
PC	Lenovo	TP00067A	PF-OGT3MS

4.6. Measurement Result

Setup with frequency 3590-3610MHz and power level 18dBm/MHz

Check EUD Tx Frequency and power




EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.




Setup with frequency 3610-3630MHz and power level 5dBm/MHz

Check EUD Tx Frequency and power

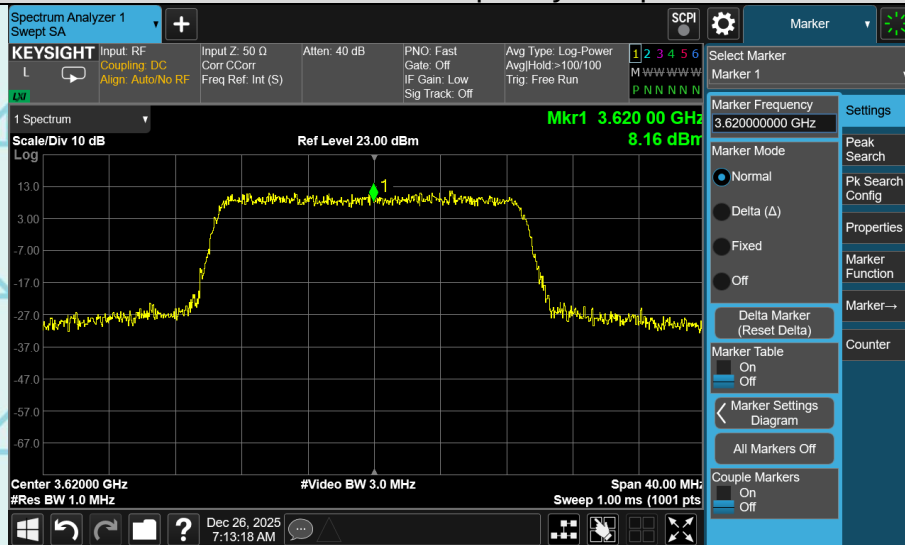

EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.

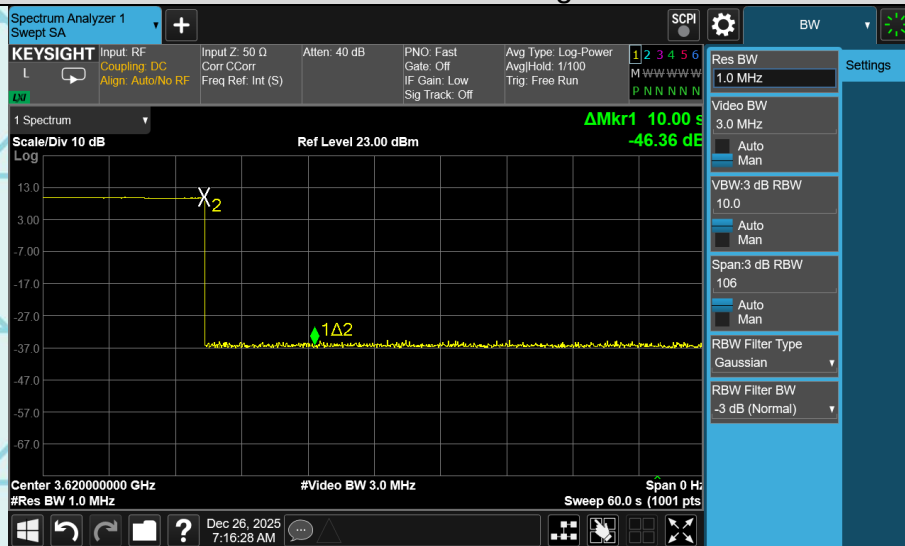

5. Test Setup Photographs

Please refer to Annex "Set Up Photos-CBE" for test setup photos

*******END OF REPORT*******