


Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_01.32.24

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11a CH44 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

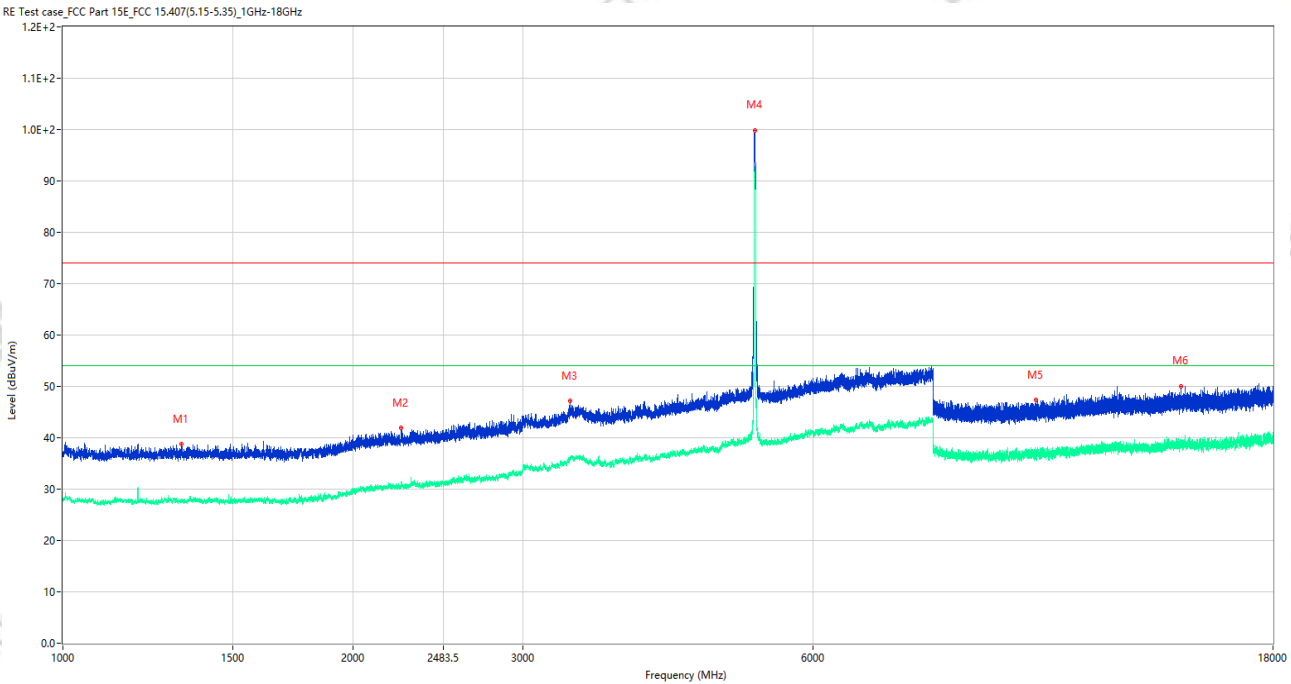


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1326.250	38.74	-15.89	74.0	35.26	Peak	8.00	150	Vertical	Pass
1**	1326.250	27.73	-15.89	54.0	26.27	AV	8.00	150	Vertical	Pass
2	2244.250	41.86	-12.91	74.0	32.14	Peak	118.00	150	Vertical	Pass
2**	2244.250	30.37	-12.91	54.0	23.63	AV	118.00	150	Vertical	Pass
3	3360.500	47.16	-5.75	74.0	26.84	Peak	143.00	150	Vertical	Pass
3**	3360.500	36.24	-5.75	54.0	17.76	AV	143.00	150	Vertical	Pass
4	5221.500	99.86	-2.37	74.0	-25.86	Peak	172.00	150	Vertical	N/A
4**	5221.500	92.63	-2.37	54.0	-38.63	AV	172.00	150	Vertical	N/A
5	10218.250	47.45	-3.01	74.0	26.55	Peak	216.00	150	Vertical	Pass
5**	10218.250	36.38	-3.01	54.0	17.62	AV	216.00	150	Vertical	Pass
6	14441.550	50.09	-2.99	74.0	23.91	Peak	176.00	150	Vertical	Pass
6**	14441.550	39.15	-2.99	54.0	14.85	AV	176.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298
Test Time: 2026-02-07_01.37.04

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11a CH44 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

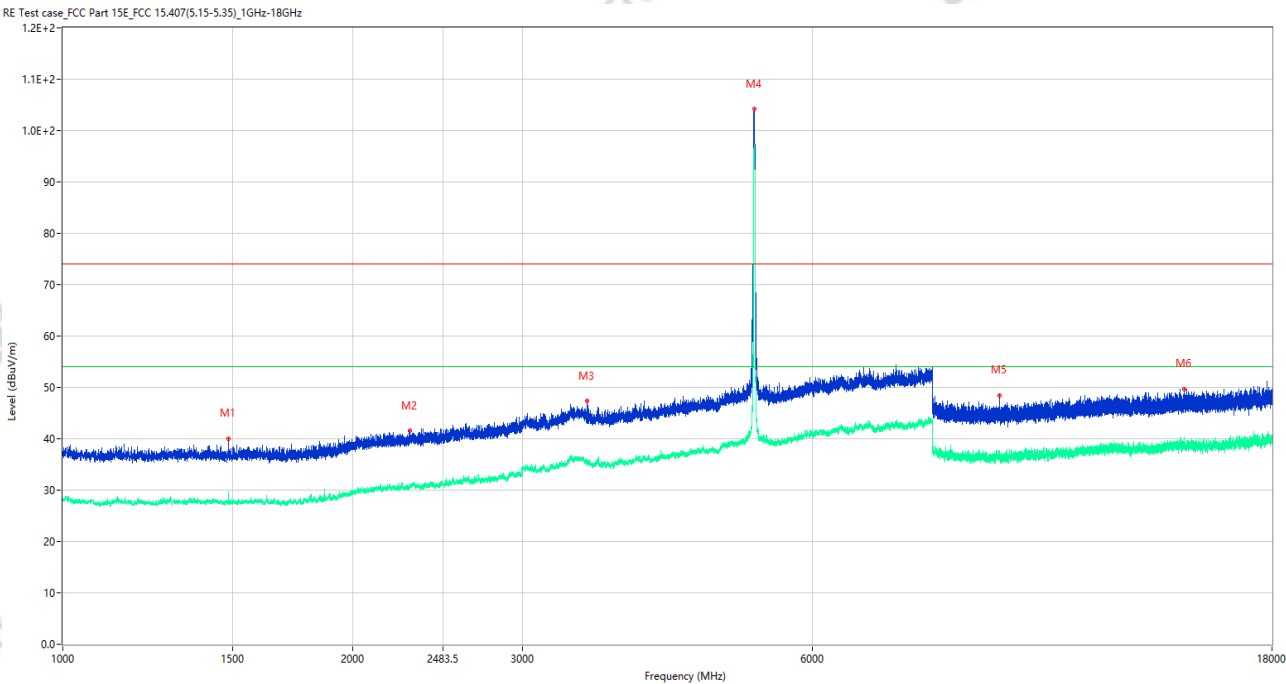


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1484.750	40.05	-16.27	74.0	33.95	Peak	148.00	150	Horizontal	Pass
1**	1484.750	28.52	-16.27	54.0	25.48	AV	148.00	150	Horizontal	Pass
2	2290.750	41.52	-13.10	74.0	32.48	Peak	135.00	150	Horizontal	Pass
2**	2290.750	30.79	-13.10	54.0	23.21	AV	135.00	150	Horizontal	Pass
3	3503.000	47.33	-6.15	74.0	26.67	Peak	360.00	150	Horizontal	Pass
3**	3503.000	35.48	-6.15	54.0	18.52	AV	360.00	150	Horizontal	Pass
4	5222.500	104.18	-2.36	74.0	-30.18	Peak	129.00	150	Horizontal	N/A
4**	5222.500	96.28	-2.36	54.0	-42.28	AV	129.00	150	Horizontal	N/A
5	9380.112	48.48	-4.60	74.0	25.52	Peak	360.00	150	Horizontal	Pass
5**	9380.112	37.09	-4.60	54.0	16.91	AV	360.00	150	Horizontal	Pass
6	14585.925	49.66	-2.42	74.0	24.34	Peak	210.00	150	Horizontal	Pass
6**	14585.925	39.09	-2.42	54.0	14.91	AV	210.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_01:55:09

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11n20 CH44 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

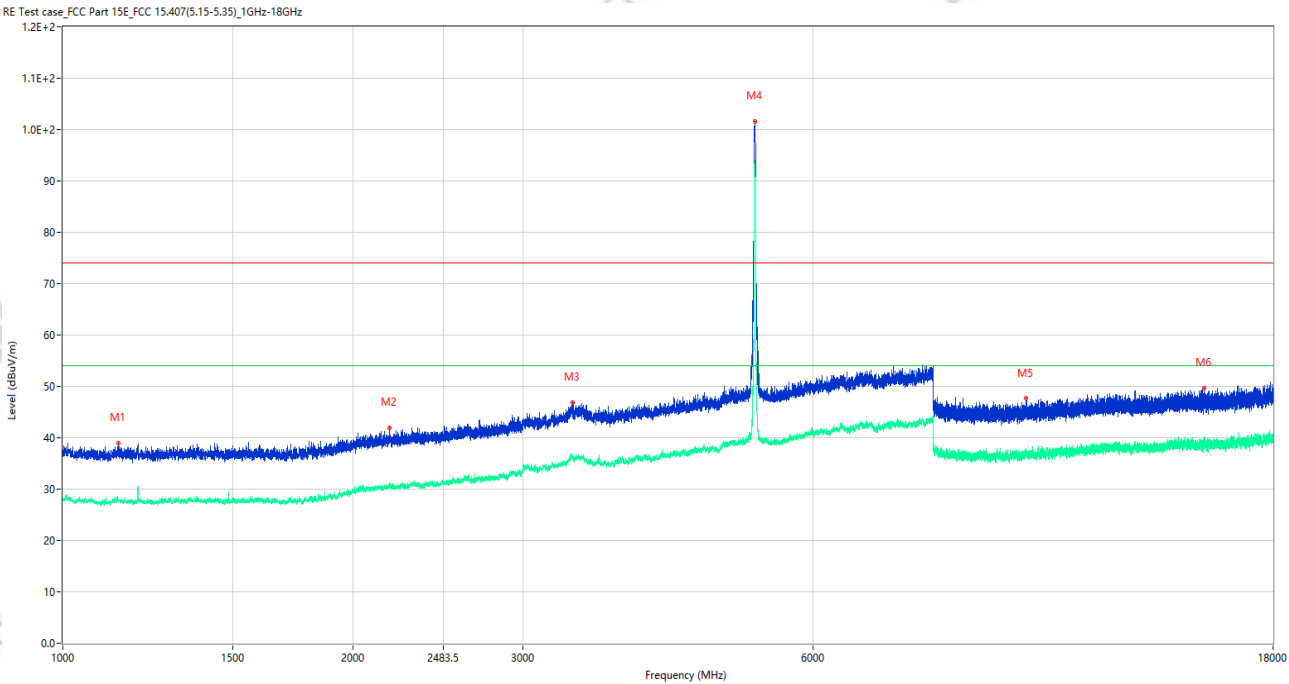


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1142.000	38.97	-15.57	74.0	35.03	Peak	247.00	150	Vertical	Pass
1**	1142.000	27.90	-15.57	54.0	26.10	AV	247.00	150	Vertical	Pass
2	2183.000	41.95	-13.04	74.0	32.05	Peak	252.00	150	Vertical	Pass
2**	2183.000	30.49	-13.04	54.0	23.51	AV	252.00	150	Vertical	Pass
3	3376.000	46.92	-4.87	74.0	27.08	Peak	313.00	150	Vertical	Pass
3**	3376.000	36.62	-4.87	54.0	17.38	AV	313.00	150	Vertical	Pass
4	5221.500	101.62	-2.37	74.0	-27.62	Peak	214.00	150	Vertical	N/A
4**	5221.500	93.80	-2.37	54.0	-39.80	AV	214.00	150	Vertical	N/A
5	9983.362	47.65	-3.69	74.0	26.35	Peak	169.00	150	Vertical	Pass
5**	9983.362	36.81	-3.69	54.0	17.19	AV	169.00	150	Vertical	Pass
6	15263.175	49.70	-1.05	74.0	24.30	Peak	1.00	150	Vertical	Pass
6**	15263.175	38.97	-1.05	54.0	15.03	AV	1.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_01.43.03

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11n20 CH44 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

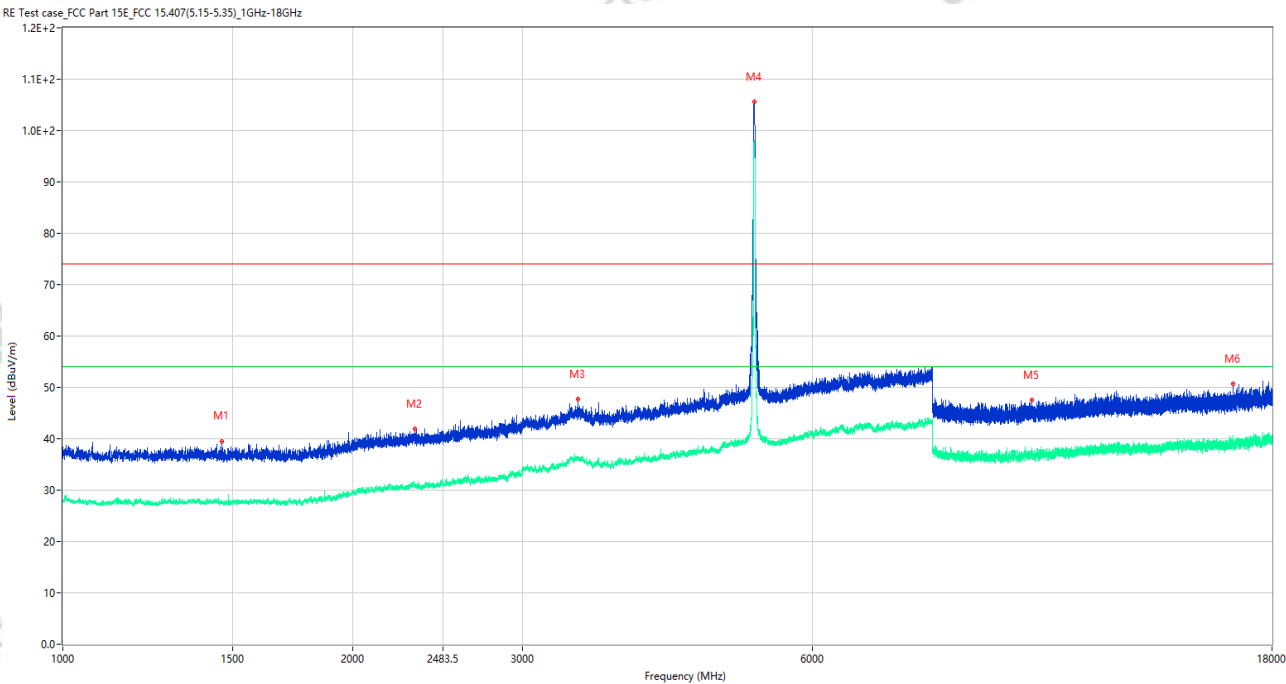


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1462.000	39.51	-16.22	74.0	34.49	Peak	209.00	150	Horizontal	Pass
1**	1462.000	27.52	-16.22	54.0	26.48	AV	209.00	150	Horizontal	Pass
2	2319.250	41.88	-12.38	74.0	32.12	Peak	0.00	150	Horizontal	Pass
2**	2319.250	30.67	-12.38	54.0	23.33	AV	0.00	150	Horizontal	Pass
3	3423.000	47.66	-4.91	74.0	26.34	Peak	21.00	150	Horizontal	Pass
3**	3423.000	36.12	-4.91	54.0	17.88	AV	21.00	150	Horizontal	Pass
4	5218.500	105.54	-2.37	74.0	-31.54	Peak	50.00	150	Horizontal	N/A
4**	5218.500	97.85	-2.37	54.0	-43.85	AV	50.00	150	Horizontal	N/A
5	10134.887	47.50	-3.91	74.0	26.50	Peak	167.00	150	Horizontal	Pass
5**	10134.887	36.61	-3.91	54.0	17.39	AV	167.00	150	Horizontal	Pass
6	16390.875	50.70	-1.31	74.0	23.30	Peak	360.00	150	Horizontal	Pass
6**	16390.875	38.86	-1.31	54.0	15.14	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_02.11.42

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11n40 CH46 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

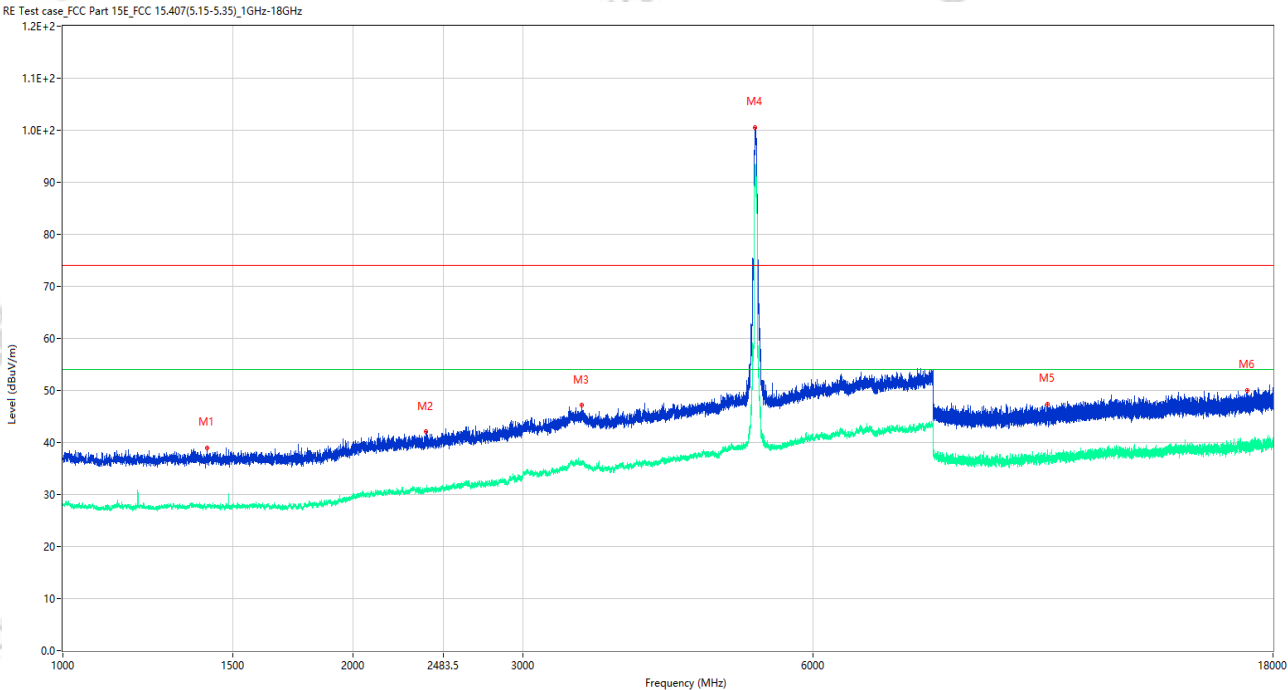


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1410.250	39.01	-15.98	74.0	34.99	Peak	72.00	150	Vertical	Pass
1**	1410.250	27.55	-15.98	54.0	26.45	AV	72.00	150	Vertical	Pass
2	2377.750	42.03	-11.89	74.0	31.97	Peak	150.00	150	Vertical	Pass
2**	2377.750	30.59	-11.89	54.0	23.41	AV	150.00	150	Vertical	Pass
3	3456.500	47.13	-4.90	74.0	26.87	Peak	141.00	150	Vertical	Pass
3**	3456.500	35.92	-4.90	54.0	18.08	AV	141.00	150	Vertical	Pass
4	5227.500	100.53	-2.32	74.0	-26.53	Peak	209.00	150	Vertical	N/A
4**	5227.500	93.09	-2.32	54.0	-39.09	AV	209.00	150	Vertical	N/A
5	10496.125	47.43	-3.26	74.0	26.57	Peak	145.00	150	Vertical	Pass
5**	10496.125	37.71	-3.26	54.0	16.29	AV	145.00	150	Vertical	Pass
6	16932.938	50.01	-1.08	74.0	23.99	Peak	142.00	150	Vertical	Pass
6**	16932.938	39.39	-1.08	54.0	14.61	AV	142.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_02.17.39

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11n40 CH46 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

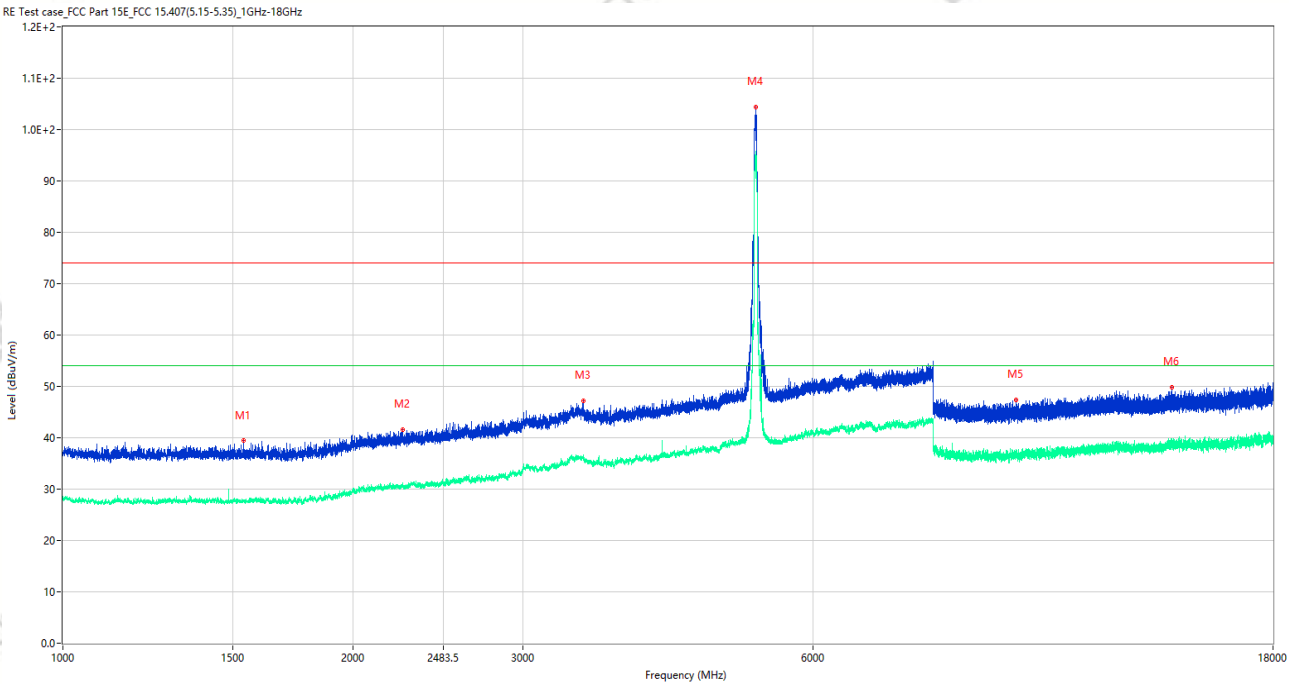


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1539.250	39.39	-16.06	74.0	34.61	Peak	0.00	150	Horizontal	Pass
1**	1539.250	27.87	-16.06	54.0	26.13	AV	0.00	150	Horizontal	Pass
2	2251.250	41.60	-12.92	74.0	32.40	Peak	300.00	150	Horizontal	Pass
2**	2251.250	30.62	-12.92	54.0	23.38	AV	300.00	150	Horizontal	Pass
3	3467.500	47.15	-5.28	74.0	26.85	Peak	1.00	150	Horizontal	Pass
3**	3467.500	36.03	-5.28	54.0	17.97	AV	1.00	150	Horizontal	Pass
4	5233.500	104.46	-2.32	74.0	-30.46	Peak	51.00	150	Horizontal	N/A
4**	5233.500	95.12	-2.32	54.0	-41.12	AV	51.00	150	Horizontal	N/A
5	9744.201	47.40	-3.96	74.0	26.60	Peak	241.00	150	Horizontal	Pass
5**	9744.201	37.19	-3.96	54.0	16.81	AV	241.00	150	Horizontal	Pass
6	14142.300	49.87	-1.11	74.0	24.13	Peak	11.00	150	Horizontal	Pass
6**	14142.300	38.71	-1.11	54.0	15.29	AV	11.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_02.48.24

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11ac80 CH42 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

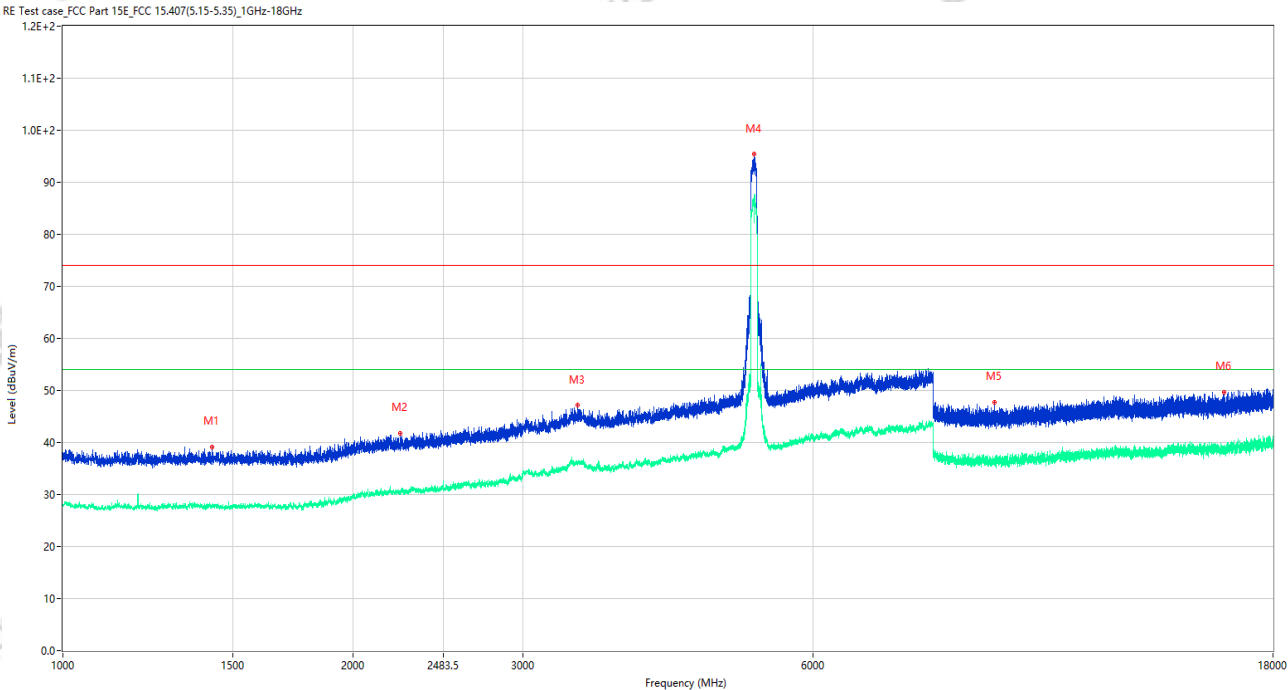


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1429.500	39.16	-15.99	74.0	34.84	Peak	161.00	150	Vertical	Pass
1**	1429.500	28.15	-15.99	54.0	25.85	AV	161.00	150	Vertical	Pass
2	2240.500	41.67	-13.00	74.0	32.33	Peak	115.00	150	Vertical	Pass
2**	2240.500	30.43	-13.00	54.0	23.57	AV	115.00	150	Vertical	Pass
3	3422.500	47.13	-4.90	74.0	26.87	Peak	4.00	150	Vertical	Pass
3**	3422.500	36.11	-4.90	54.0	17.89	AV	4.00	150	Vertical	Pass
4	5214.000	95.41	-2.35	74.0	-21.41	Peak	50.00	150	Vertical	N/A
4**	5214.000	86.27	-2.35	54.0	-32.27	AV	50.00	150	Vertical	N/A
5	9264.213	47.72	-5.31	74.0	26.28	Peak	144.00	150	Vertical	Pass
5**	9264.213	36.42	-5.31	54.0	17.58	AV	144.00	150	Vertical	Pass
6	16020.750	49.72	-2.33	74.0	24.28	Peak	246.00	150	Vertical	Pass
6**	16020.750	38.44	-2.33	54.0	15.56	AV	246.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_02.53.06

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11ac80 CH42 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

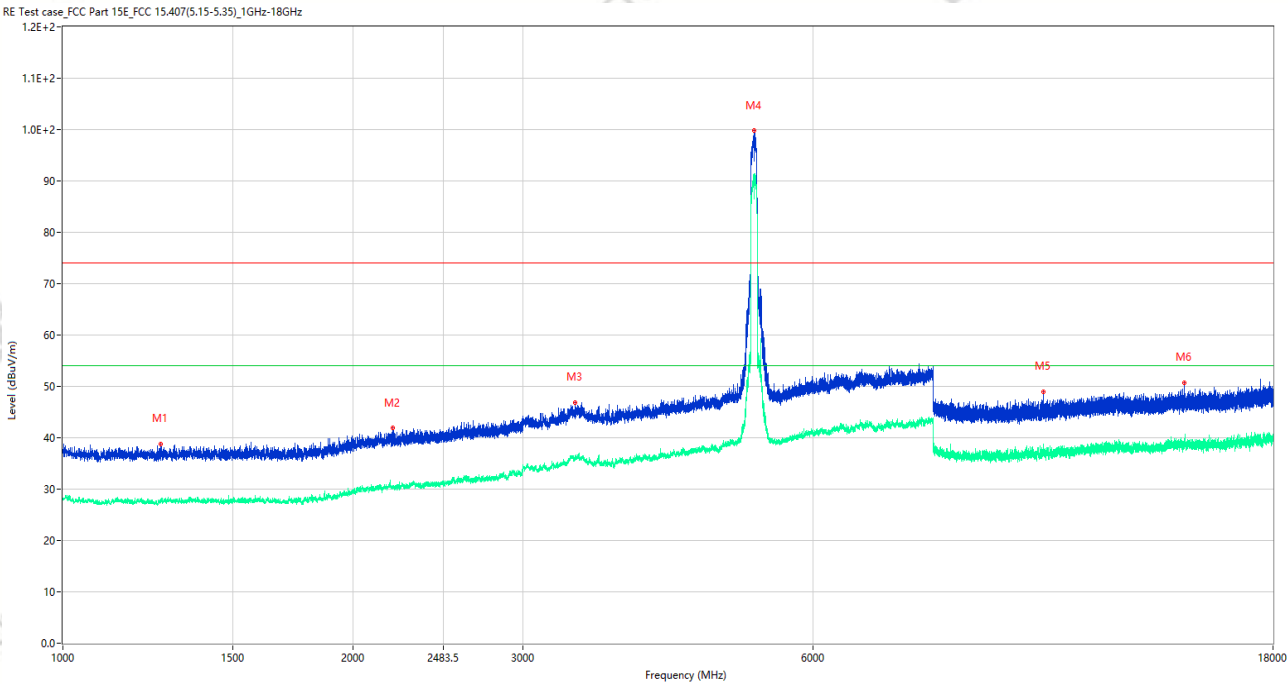


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1264.000	38.78	-16.00	74.0	35.22	Peak	286.00	150	Horizontal	Pass
1**	1264.000	27.46	-16.00	54.0	26.54	AV	286.00	150	Horizontal	Pass
2	2200.250	41.91	-13.32	74.0	32.09	Peak	355.00	150	Horizontal	Pass
2**	2200.250	30.25	-13.32	54.0	23.75	AV	355.00	150	Horizontal	Pass
3	3401.500	46.90	-5.60	74.0	27.10	Peak	360.00	150	Horizontal	Pass
3**	3401.500	36.22	-5.60	54.0	17.78	AV	360.00	150	Horizontal	Pass
4	5216.000	99.76	-2.32	74.0	-25.76	Peak	52.00	150	Horizontal	N/A
4**	5216.000	90.67	-2.32	54.0	-36.67	AV	52.00	150	Horizontal	N/A
5	10410.150	48.95	-3.24	74.0	25.05	Peak	28.00	150	Horizontal	Pass
5**	10410.150	37.79	-3.24	54.0	16.21	AV	28.00	150	Horizontal	Pass
6	14551.800	50.70	-2.67	74.0	23.30	Peak	178.00	150	Horizontal	Pass
6**	14551.800	38.59	-2.67	54.0	15.41	AV	178.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_03.01.58

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal working Link(5G WIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

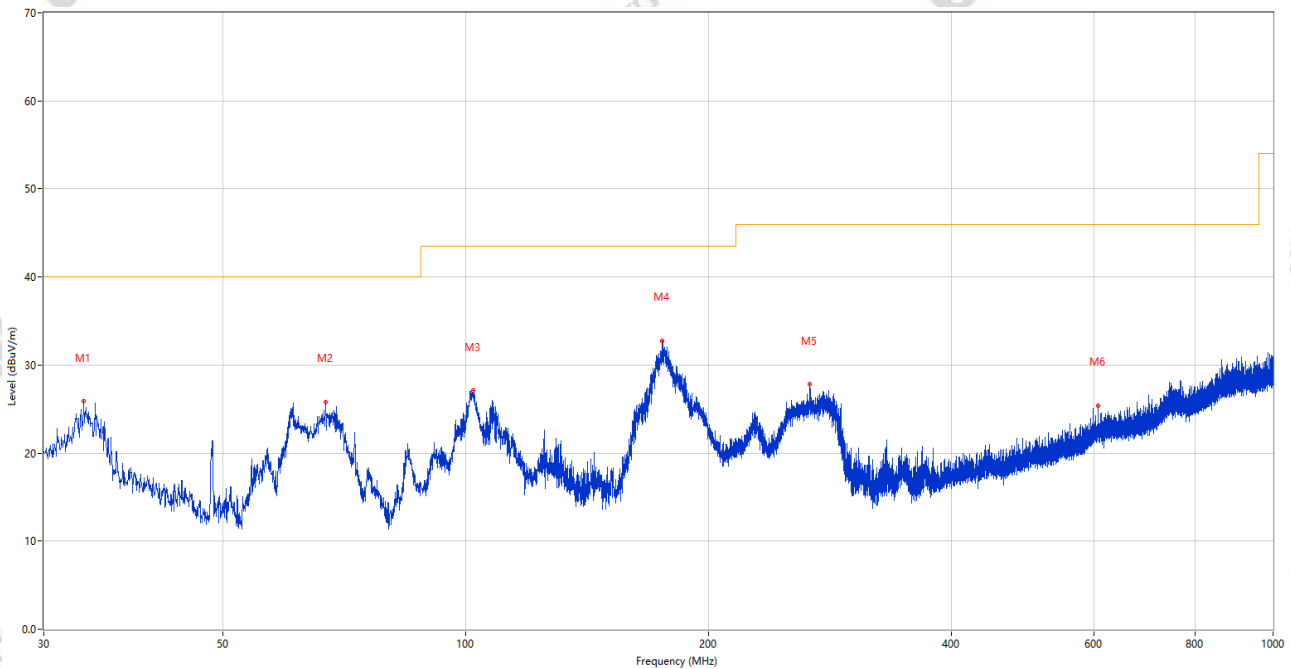


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.638	25.85	-28.23	40.0	14.15	Peak	56.00	100	Vertical	Pass
2	67.103	25.82	-28.03	40.0	14.18	Peak	148.00	100	Vertical	Pass
3	102.071	27.07	-26.10	43.5	16.43	Peak	243.00	100	Vertical	Pass
4	175.209	32.73	-28.24	43.5	10.77	Peak	170.00	200	Vertical	Pass
5	266.971	27.80	-24.09	46.0	18.20	Peak	360.00	200	Vertical	Pass
6	607.344	25.42	-14.77	46.0	20.58	Peak	231.00	100	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_02:58:56

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal working Link(5G WIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

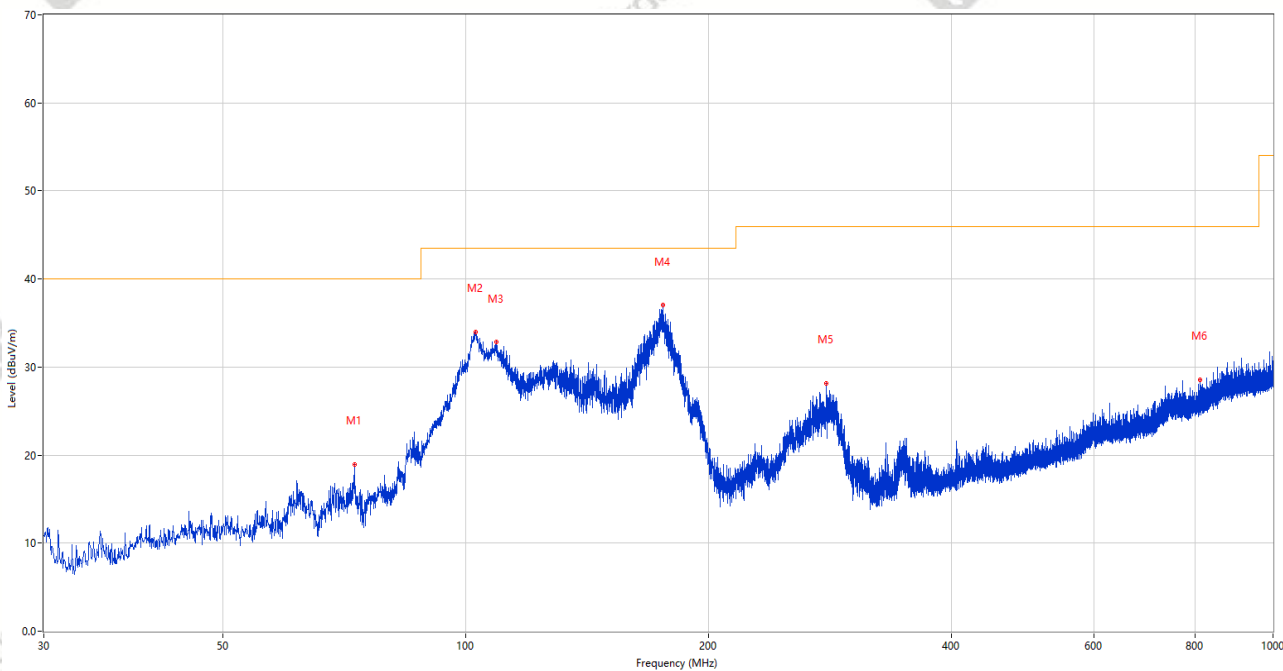


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	72.729	18.91	-29.88	40.0	21.09	Peak	29.00	100	Horizontal	Pass
2	102.799	34.02	-26.13	43.5	9.48	Peak	165.00	200	Horizontal	Pass
3	109.007	32.85	-26.52	43.5	10.65	Peak	165.00	200	Horizontal	Pass
4	175.355	37.00	-28.24	43.5	6.50	Peak	120.00	100	Horizontal	Pass
5	279.872	28.15	-23.72	46.0	17.85	Peak	276.00	200	Horizontal	Pass
6	811.383	28.55	-11.48	46.0	17.45	Peak	308.00	100	Horizontal	Pass

Test Result

Project Number: P-CC26010298
Test Time: 2026-02-07_04.53.33

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11a CH60 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

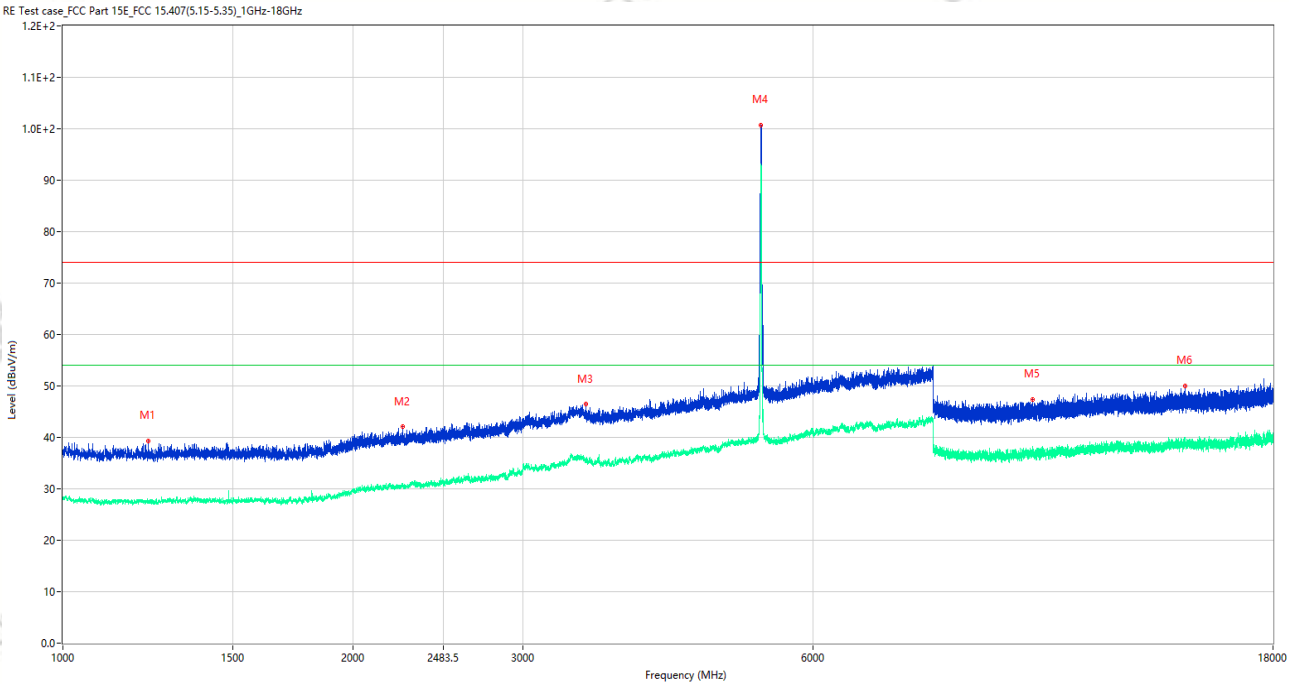


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1225.750	39.31	-15.99	74.0	34.69	Peak	120.00	150	Vertical	Pass
1**	1225.750	27.42	-15.99	54.0	26.58	AV	120.00	150	Vertical	Pass
2	2251.250	42.08	-12.92	74.0	31.92	Peak	74.00	150	Vertical	Pass
2**	2251.250	30.86	-12.92	54.0	23.14	AV	74.00	150	Vertical	Pass
3	3485.000	46.44	-6.07	74.0	27.56	Peak	296.00	150	Vertical	Pass
3**	3485.000	35.18	-6.07	54.0	18.82	AV	296.00	150	Vertical	Pass
4	5298.500	100.77	-2.03	74.0	-26.77	Peak	196.00	150	Vertical	N/A
4**	5298.500	92.68	-2.03	54.0	-38.68	AV	196.00	150	Vertical	N/A
5	10139.875	47.41	-4.06	74.0	26.59	Peak	215.00	150	Vertical	Pass
5**	10139.875	37.07	-4.06	54.0	16.93	AV	215.00	150	Vertical	Pass
6	14592.750	50.01	-2.06	74.0	23.99	Peak	347.00	150	Vertical	Pass
6**	14592.750	39.85	-2.06	54.0	14.15	AV	347.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_04.58.05

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11a CH60 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

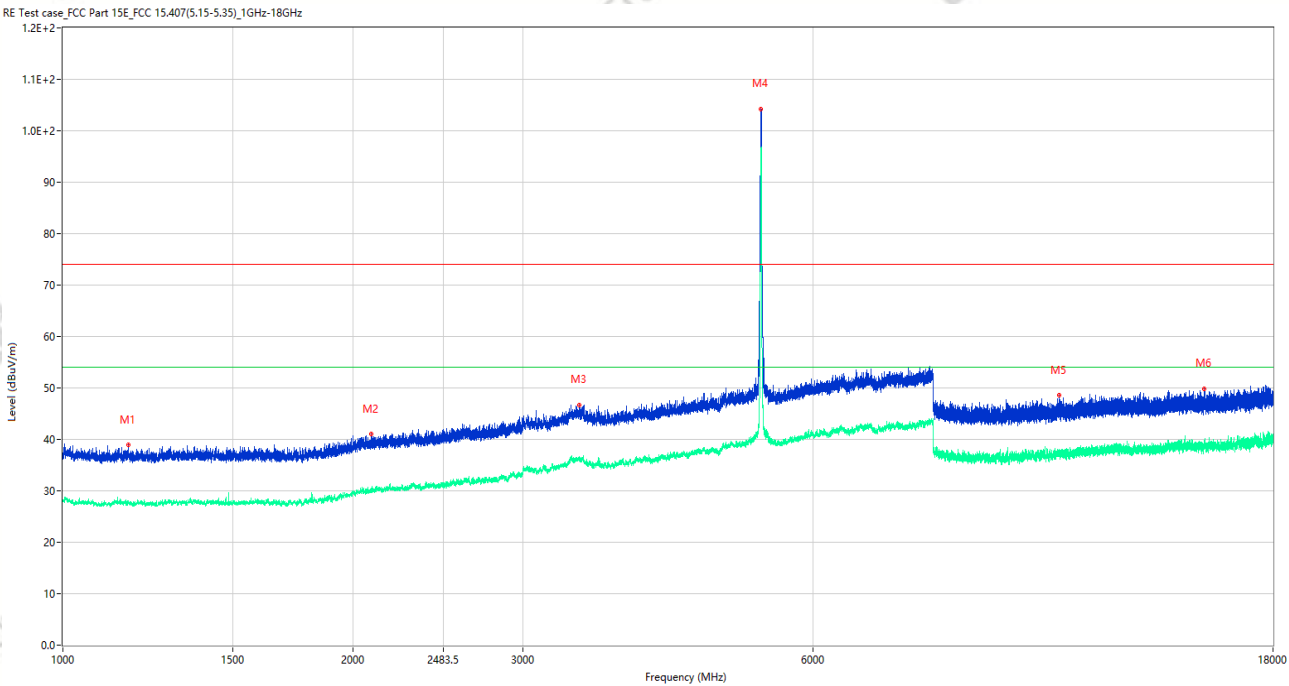


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1169.000	38.87	-15.50	74.0	35.13	Peak	360.00	150	Horizontal	Pass
1**	1169.000	27.71	-15.50	54.0	26.29	AV	360.00	150	Horizontal	Pass
2	2088.750	40.97	-13.68	74.0	33.03	Peak	340.00	150	Horizontal	Pass
2**	2088.750	30.58	-13.68	54.0	23.42	AV	340.00	150	Horizontal	Pass
3	3429.500	46.69	-5.02	74.0	27.31	Peak	0.00	150	Horizontal	Pass
3**	3429.500	36.12	-5.02	54.0	17.88	AV	0.00	150	Horizontal	Pass
4	5297.500	104.27	-2.03	74.0	-30.27	Peak	51.00	150	Horizontal	N/A
4**	5297.500	96.40	-2.03	54.0	-42.40	AV	51.00	150	Horizontal	N/A
5	10811.050	48.55	-3.13	74.0	25.45	Peak	240.00	150	Horizontal	Pass
5**	10811.050	37.43	-3.13	54.0	16.57	AV	240.00	150	Horizontal	Pass
6	15284.700	49.80	-1.80	74.0	24.20	Peak	150.00	150	Horizontal	Pass
6**	15284.700	38.37	-1.80	54.0	15.63	AV	150.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_05.14.44

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11n20 CH60 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

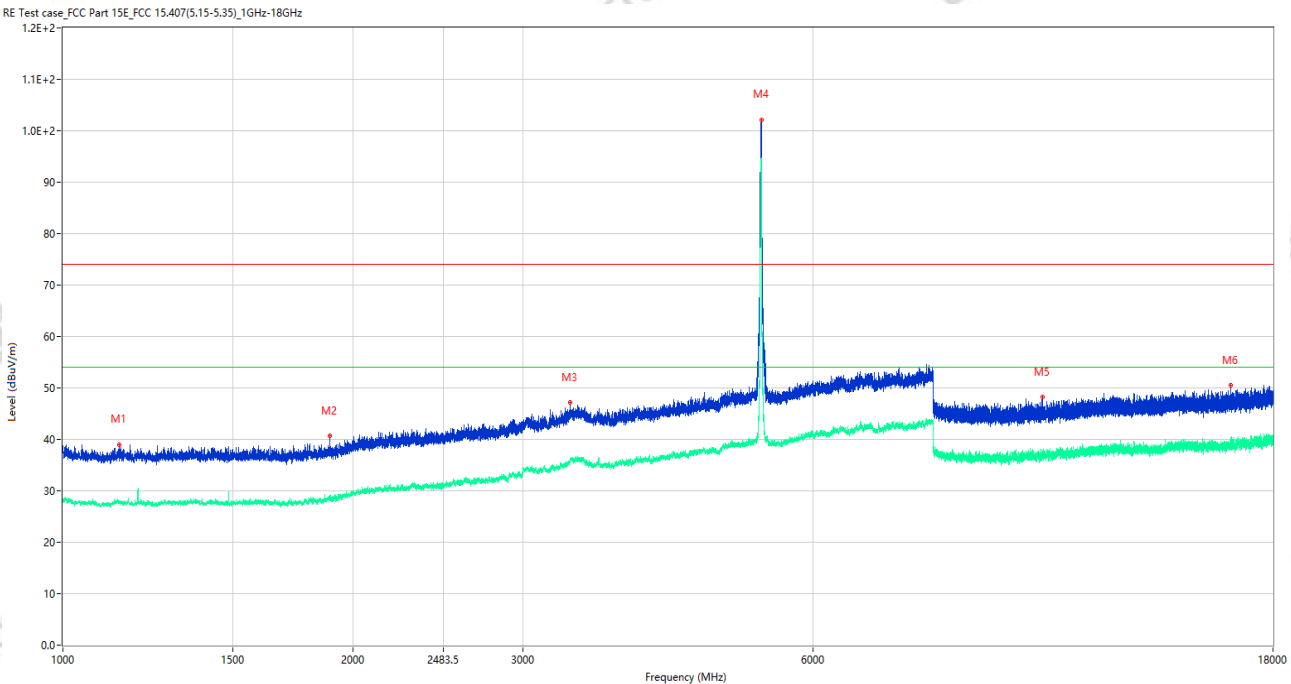


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1144.500	39.01	-15.61	74.0	34.99	Peak	215.00	150	Vertical	Pass
1**	1144.500	28.08	-15.61	54.0	25.92	AV	215.00	150	Vertical	Pass
2	1893.000	40.68	-15.41	74.0	33.32	Peak	315.00	150	Vertical	Pass
2**	1893.000	28.38	-15.41	54.0	25.62	AV	315.00	150	Vertical	Pass
3	3357.500	47.13	-6.08	74.0	26.87	Peak	267.00	150	Vertical	Pass
3**	3357.500	35.70	-6.08	54.0	18.30	AV	267.00	150	Vertical	Pass
4	5302.500	102.14	-2.04	74.0	-28.14	Peak	51.00	150	Vertical	N/A
4**	5302.500	94.16	-2.04	54.0	-40.16	AV	51.00	150	Vertical	N/A
5	10390.438	48.20	-3.36	74.0	25.80	Peak	240.00	150	Vertical	Pass
5**	10390.438	36.89	-3.36	54.0	17.11	AV	240.00	150	Vertical	Pass
6	16287.188	50.45	-1.38	74.0	23.55	Peak	360.00	150	Vertical	Pass
6**	16287.188	40.14	-1.38	54.0	13.86	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_05.08.16

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11n20 CH60 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

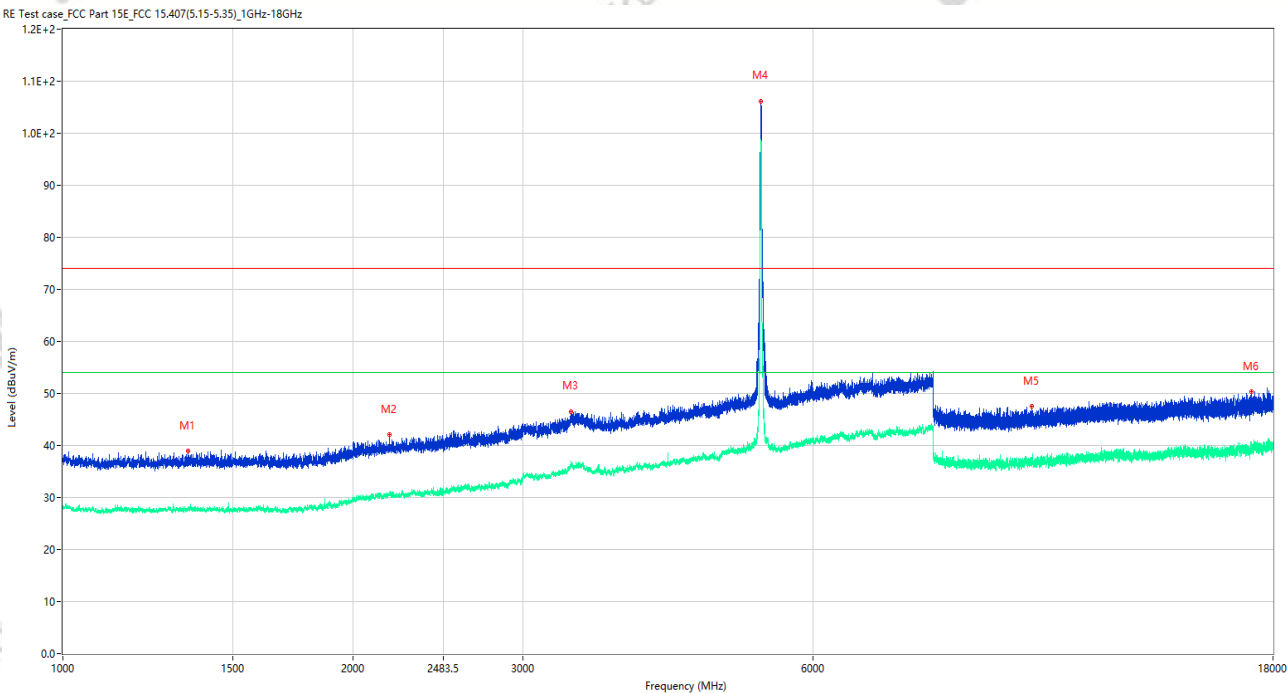


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1348.500	38.89	-16.01	74.0	35.11	Peak	360.00	150	Horizontal	Pass
1**	1348.500	28.13	-16.01	54.0	25.87	AV	360.00	150	Horizontal	Pass
2	2180.500	42.09	-12.94	74.0	31.91	Peak	360.00	150	Horizontal	Pass
2**	2180.500	30.59	-12.94	54.0	23.41	AV	360.00	150	Horizontal	Pass
3	3365.500	46.52	-5.13	74.0	27.48	Peak	0.00	150	Horizontal	Pass
3**	3365.500	36.80	-5.13	54.0	17.20	AV	0.00	150	Horizontal	Pass
4	5297.500	106.19	-2.03	74.0	-32.19	Peak	129.00	150	Horizontal	N/A
4**	5297.500	98.05	-2.03	54.0	-44.05	AV	129.00	150	Horizontal	N/A
5	10110.662	47.47	-3.93	74.0	26.53	Peak	12.00	150	Horizontal	Pass
5**	10110.662	36.64	-3.93	54.0	17.36	AV	12.00	150	Horizontal	Pass
6	17087.550	50.34	-0.79	74.0	23.66	Peak	184.00	150	Horizontal	Pass
6**	17087.550	40.10	-0.79	54.0	13.90	AV	184.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_05.22.50

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11n40 CH54 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

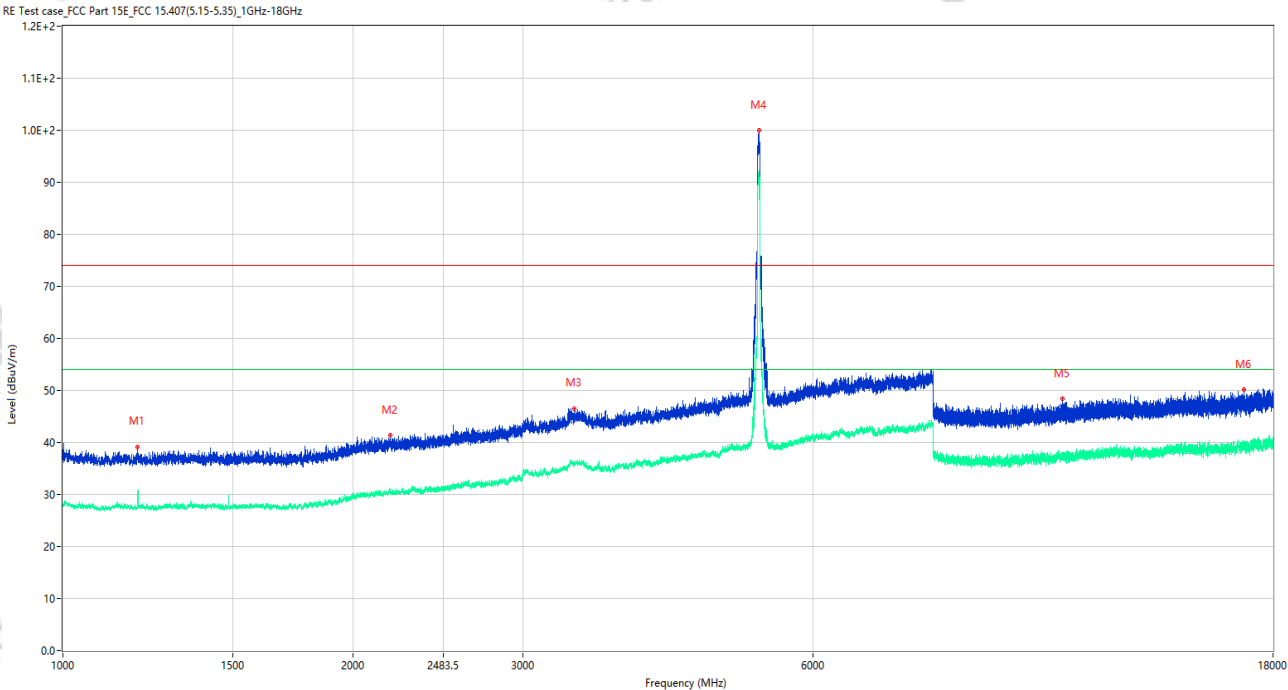


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.750	39.18	-15.74	74.0	34.82	Peak	3.00	150	Vertical	Pass
1**	1195.750	29.18	-15.74	54.0	24.82	AV	3.00	150	Vertical	Pass
2	2184.000	41.37	-13.08	74.0	32.63	Peak	360.00	150	Vertical	Pass
2**	2184.000	30.54	-13.08	54.0	23.46	AV	360.00	150	Vertical	Pass
3	3394.500	46.57	-5.85	74.0	27.43	Peak	109.00	150	Vertical	Pass
3**	3394.500	35.87	-5.85	54.0	18.13	AV	109.00	150	Vertical	Pass
4	5271.500	99.93	-2.43	74.0	-25.93	Peak	200.00	150	Vertical	N/A
4**	5271.500	91.59	-2.43	54.0	-37.59	AV	200.00	150	Vertical	N/A
5	10881.112	48.37	-3.23	74.0	25.63	Peak	332.00	150	Vertical	Pass
5**	10881.112	37.65	-3.23	54.0	16.35	AV	332.00	150	Vertical	Pass
6	16784.099	50.16	-1.41	74.0	23.84	Peak	82.00	150	Vertical	Pass
6**	16784.099	39.38	-1.41	54.0	14.62	AV	82.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_05.27.18

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11n40 CH54 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

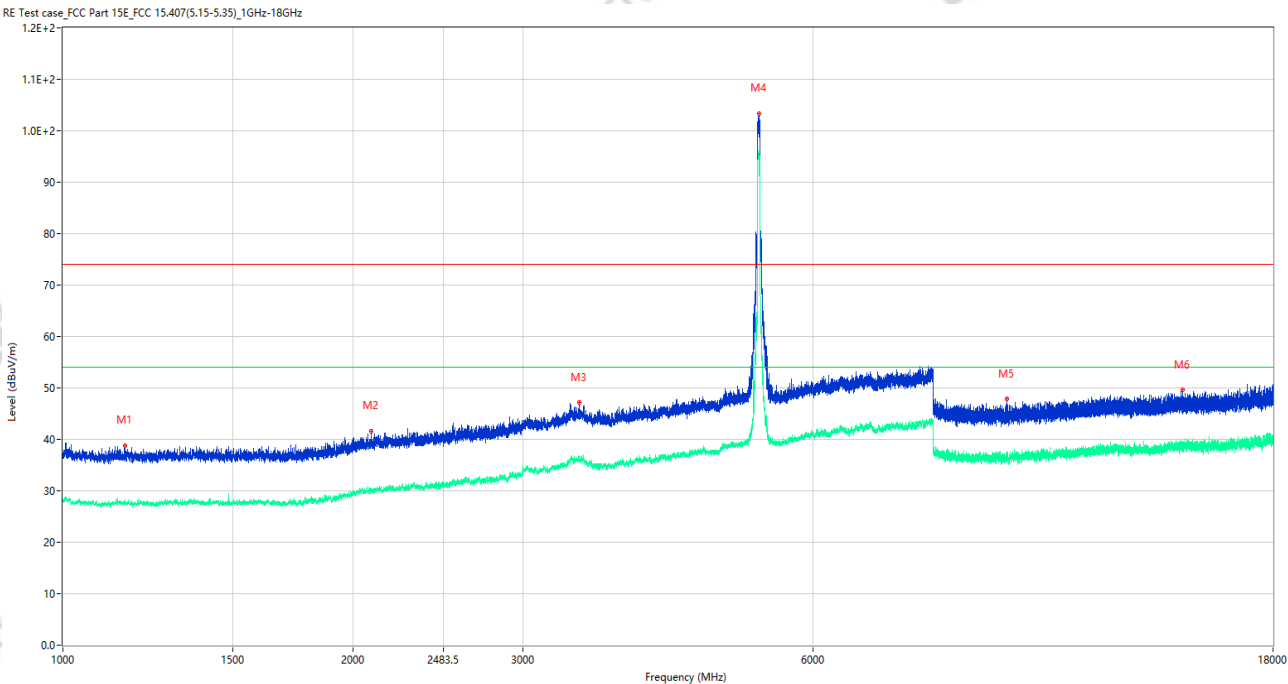


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1159.000	38.85	-15.52	74.0	35.15	Peak	161.00	150	Horizontal	Pass
1**	1159.000	27.96	-15.52	54.0	26.04	AV	161.00	150	Horizontal	Pass
2	2089.250	41.65	-13.68	74.0	32.35	Peak	360.00	150	Horizontal	Pass
2**	2089.250	30.17	-13.68	54.0	23.83	AV	360.00	150	Horizontal	Pass
3	3431.000	47.19	-5.03	74.0	26.81	Peak	337.00	150	Horizontal	Pass
3**	3431.000	36.18	-5.03	54.0	17.82	AV	337.00	150	Horizontal	Pass
4	5277.000	103.41	-2.37	74.0	-29.41	Peak	127.00	150	Horizontal	N/A
4**	5277.000	94.99	-2.37	54.0	-40.99	AV	127.00	150	Horizontal	N/A
5	9525.224	47.84	-2.99	74.0	26.16	Peak	264.00	150	Horizontal	Pass
5**	9525.224	36.62	-2.99	54.0	17.38	AV	264.00	150	Horizontal	Pass
6	14500.612	49.60	-2.24	74.0	24.40	Peak	0.00	150	Horizontal	Pass
6**	14500.612	38.65	-2.24	54.0	15.35	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_05.42.26

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11ac80 CH58 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

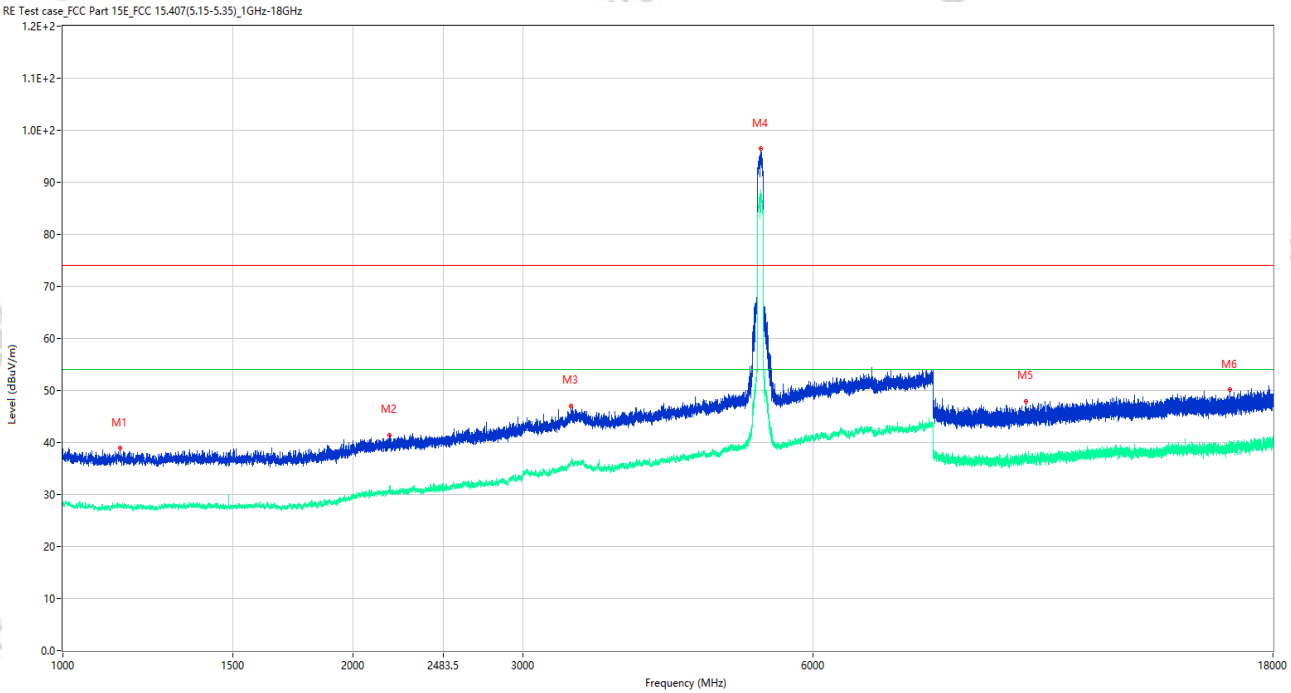

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1146.750	38.93	-15.66	74.0	35.07	Peak	336.00	150	Vertical	Pass
1**	1146.750	27.98	-15.66	54.0	26.02	AV	336.00	150	Vertical	Pass
2	2181.500	41.48	-12.96	74.0	32.52	Peak	257.00	150	Vertical	Pass
2**	2181.500	30.78	-12.96	54.0	23.22	AV	257.00	150	Vertical	Pass
3	3367.000	47.03	-5.05	74.0	26.97	Peak	119.00	150	Vertical	Pass
3**	3367.000	36.24	-5.05	54.0	17.76	AV	119.00	150	Vertical	Pass
4	5296.000	96.44	-2.00	74.0	-22.44	Peak	199.00	150	Vertical	N/A
4**	5296.000	88.25	-2.00	54.0	-34.25	AV	199.00	150	Vertical	N/A
5	9981.938	47.92	-3.67	74.0	26.08	Peak	360.00	150	Vertical	Pass
5**	9981.938	37.07	-3.67	54.0	16.93	AV	360.00	150	Vertical	Pass
6	16238.363	50.15	-1.19	74.0	23.85	Peak	360.00	150	Vertical	Pass
6**	16238.363	38.97	-1.19	54.0	15.03	AV	360.00	150	Vertical	Pass


Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_05.47.25

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11ac80 CH58 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

RE Test case FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

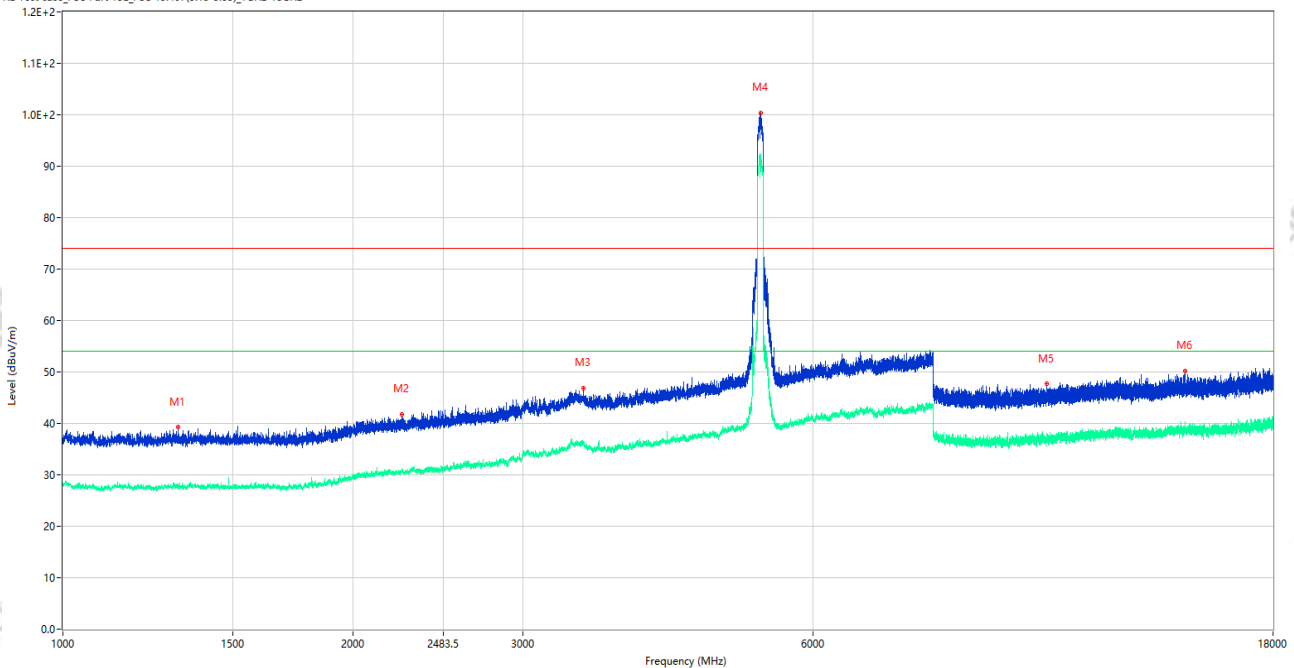

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1315.750	39.24	-15.88	74.0	34.76	Peak	50.00	150	Horizontal	Pass
1**	1315.750	27.25	-15.88	54.0	26.75	AV	50.00	150	Horizontal	Pass
2	2245.250	41.81	-12.84	74.0	32.19	Peak	23.00	150	Horizontal	Pass
2**	2245.250	30.71	-12.84	54.0	23.29	AV	23.00	150	Horizontal	Pass
3	3465.000	46.88	-5.10	74.0	27.12	Peak	101.00	150	Horizontal	Pass
3**	3465.000	35.93	-5.10	54.0	18.07	AV	101.00	150	Horizontal	Pass
4	5296.500	100.37	-2.01	74.0	-26.37	Peak	51.00	150	Horizontal	N/A
4**	5296.500	91.25	-2.01	54.0	-37.25	AV	51.00	150	Horizontal	N/A
5	10493.275	47.71	-3.23	74.0	26.29	Peak	52.00	150	Horizontal	Pass
5**	10493.275	37.91	-3.23	54.0	16.09	AV	52.00	150	Horizontal	Pass
6	14591.175	50.19	-2.11	74.0	23.81	Peak	14.00	150	Horizontal	Pass
6**	14591.175	39.94	-2.11	54.0	14.06	AV	14.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_09.02.52

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: X6895

Humidity (%RH): 55

Sample Number: CC26010335-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6GWIFI 11a CH116 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Siyuan

Remark: 适配器:A02+数据线:A11 ANT12

RE Test case FCC Part 15E FCC 15.407(5.47-5.725)_1GHz-18GHz

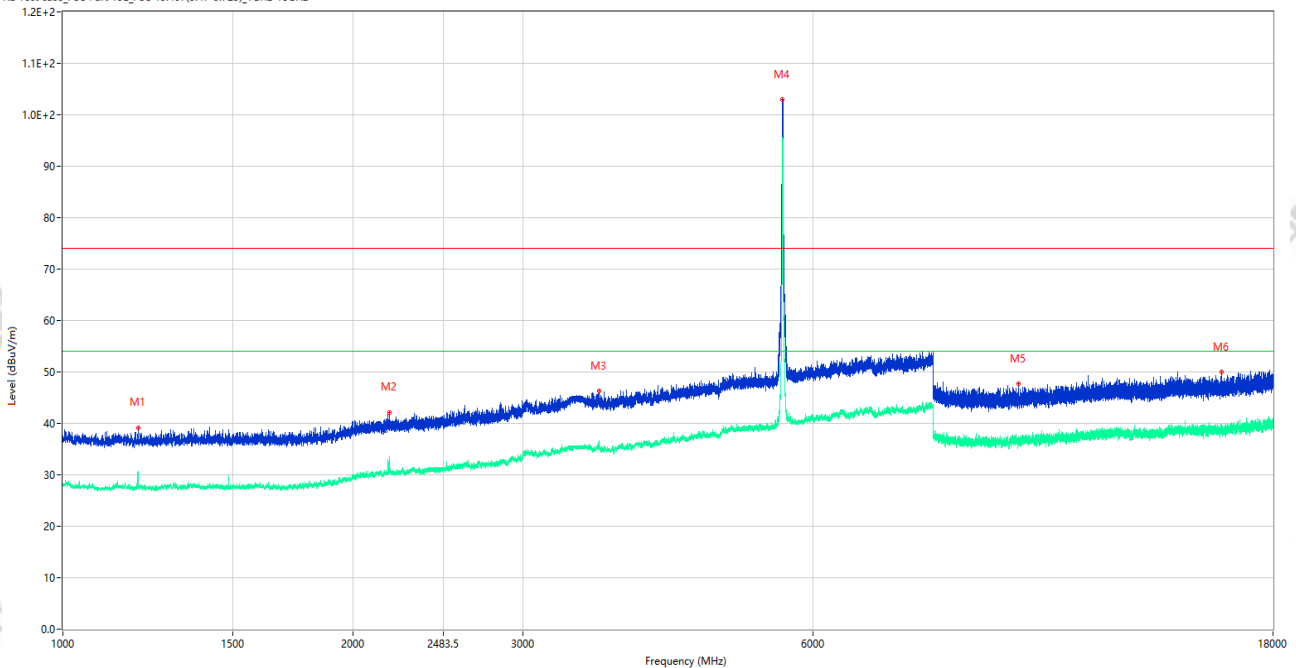


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.250	39.18	-15.72	74.0	34.82	Peak	7.00	150	Vertical	Pass
1**	1196.250	30.78	-15.72	54.0	23.22	AV	7.00	150	Vertical	Pass
2	2181.750	42.10	-12.98	74.0	31.90	Peak	98.00	150	Vertical	Pass
2**	2181.750	32.69	-12.98	54.0	21.31	AV	98.00	150	Vertical	Pass
3	3597.500	46.26	-5.10	74.0	27.74	Peak	60.00	150	Vertical	Pass
3**	3597.500	36.09	-5.10	54.0	17.91	AV	60.00	150	Vertical	Pass
4	5578.000	102.95	-2.89	74.0	-28.95	Peak	31.00	150	Vertical	N/A
4**	5578.000	95.09	-2.89	54.0	-41.09	AV	31.00	150	Vertical	N/A
5	9802.387	47.66	-3.56	74.0	26.34	Peak	2.00	150	Vertical	Pass
5**	9802.387	36.76	-3.56	54.0	17.24	AV	2.00	150	Vertical	Pass
6	15936.487	49.96	-2.25	74.0	24.04	Peak	149.00	150	Vertical	Pass
6**	15936.487	39.01	-2.25	54.0	14.99	AV	149.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_08.56.15

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11a CH116 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

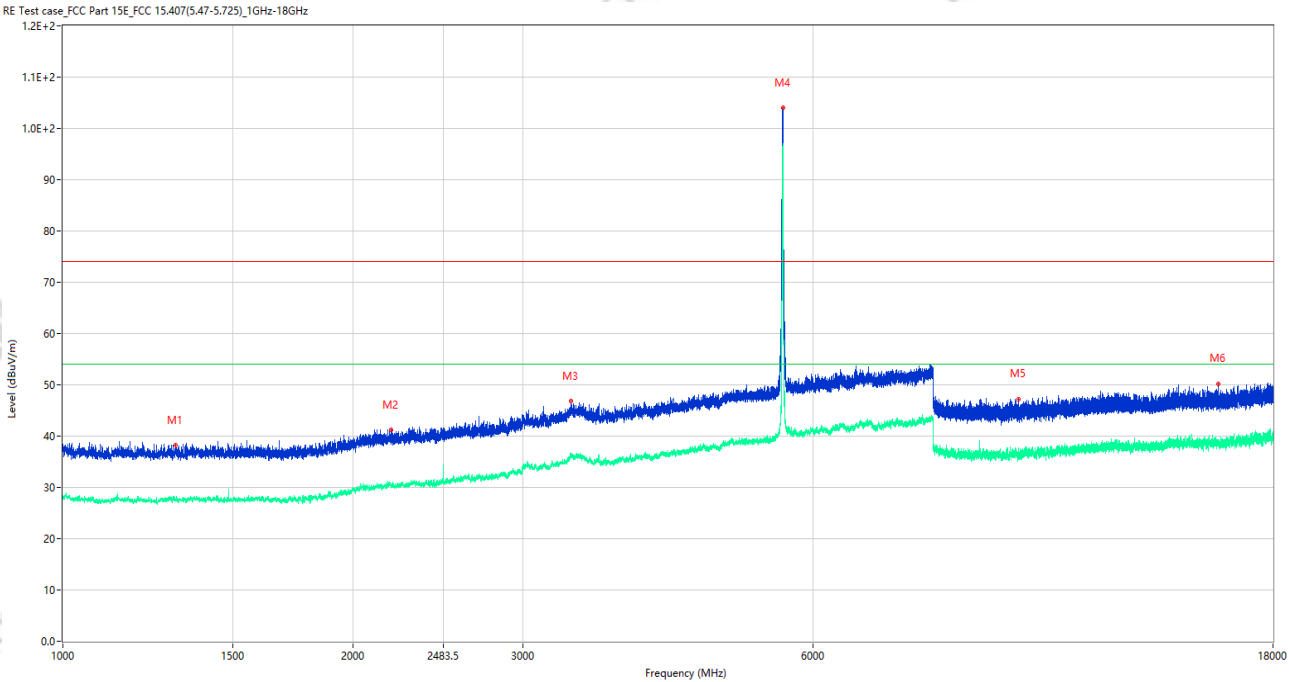

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1308.500	38.31	-15.69	74.0	35.69	Peak	4.00	150	Horizontal	Pass
1**	1308.500	27.68	-15.69	54.0	26.32	AV	4.00	150	Horizontal	Pass
2	2191.750	41.20	-13.37	74.0	32.80	Peak	54.00	150	Horizontal	Pass
2**	2191.750	30.19	-13.37	54.0	23.81	AV	54.00	150	Horizontal	Pass
3	3368.500	46.83	-4.93	74.0	27.17	Peak	259.00	150	Horizontal	Pass
3**	3368.500	36.08	-4.93	54.0	17.92	AV	259.00	150	Horizontal	Pass
4	5582.000	104.02	-2.85	74.0	-30.02	Peak	131.00	150	Horizontal	N/A
4**	5582.000	96.29	-2.85	54.0	-42.29	AV	131.00	150	Horizontal	N/A
5	9802.387	47.22	-3.56	74.0	26.78	Peak	9.00	150	Horizontal	Pass
5**	9802.387	36.37	-3.56	54.0	17.63	AV	9.00	150	Horizontal	Pass
6	15808.125	50.20	-1.69	74.0	23.80	Peak	359.00	150	Horizontal	Pass
6**	15808.125	38.55	-1.69	54.0	15.45	AV	359.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_09.41.09

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: X6895

Humidity (%RH): 55

Sample Number: CC26010335-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6GWIFI 11n20 CH116 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Siyuan

Remark: 适配器:A02+数据线:A11 ANT12

RE Test case FCC Part 15E FCC 15.407(5.47-5.725)_1GHz-18GHz

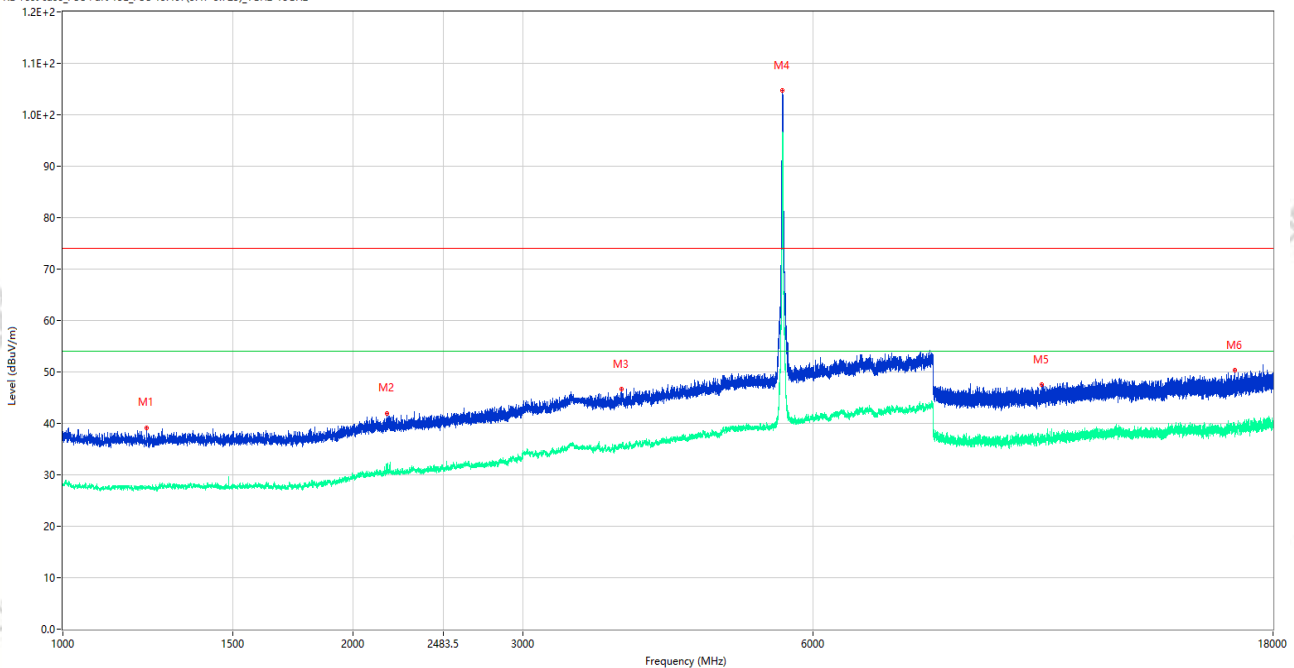

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1222.250	39.13	-15.99	74.0	34.87	Peak	44.00	150	Vertical	Pass
1**	1222.250	27.37	-15.99	54.0	26.63	AV	44.00	150	Vertical	Pass
2	2168.000	41.97	-13.06	74.0	32.03	Peak	49.00	150	Vertical	Pass
2**	2168.000	32.02	-13.06	54.0	21.98	AV	49.00	150	Vertical	Pass
3	3798.500	46.71	-4.78	74.0	27.29	Peak	94.00	150	Vertical	Pass
3**	3798.500	35.57	-4.78	54.0	18.43	AV	94.00	150	Vertical	Pass
4	5581.000	104.69	-2.85	74.0	-30.69	Peak	34.00	150	Vertical	N/A
4**	5581.000	95.92	-2.85	54.0	-41.92	AV	34.00	150	Vertical	N/A
5	10369.063	47.47	-3.33	74.0	26.53	Peak	74.00	150	Vertical	Pass
5**	10369.063	36.90	-3.33	54.0	17.10	AV	74.00	150	Vertical	Pass
6	16423.949	50.30	-1.90	74.0	23.70	Peak	314.00	150	Vertical	Pass
6**	16423.949	38.21	-1.90	54.0	15.79	AV	314.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_09.49.53

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: X6895

Humidity (%RH): 55

Sample Number: CC26010335-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6GWIFI 11n20 CH116 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Siyuan

Remark: 适配器:A02+数据线:A11 ANT12

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

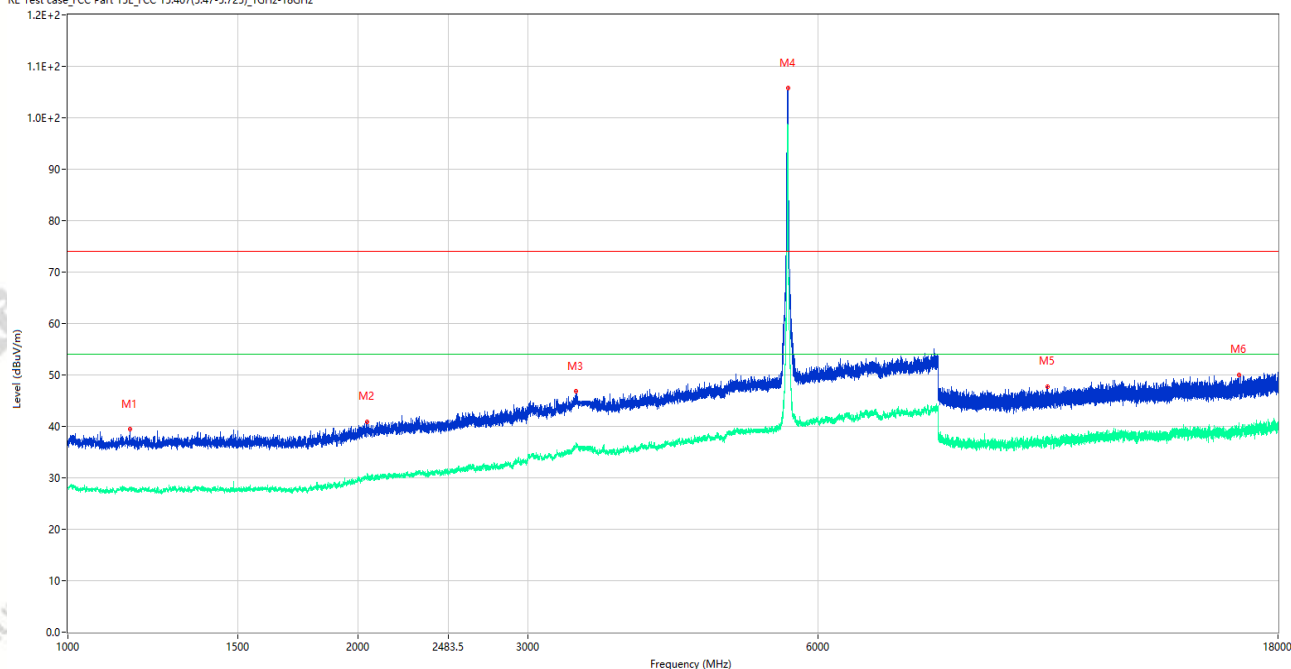


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1160.500	39.41	-15.49	74.0	34.59	Peak	113.00	150	Horizontal	Pass
1**	1160.500	28.24	-15.49	54.0	25.76	AV	113.00	150	Horizontal	Pass
2	2043.250	40.89	-13.36	74.0	33.11	Peak	80.00	150	Horizontal	Pass
2**	2043.250	30.45	-13.36	54.0	23.55	AV	80.00	150	Horizontal	Pass
3	3365.000	46.81	-5.19	74.0	27.19	Peak	260.00	150	Horizontal	Pass
3**	3365.000	36.24	-5.19	54.0	17.76	AV	260.00	150	Horizontal	Pass
4	5582.000	105.78	-2.85	74.0	-31.78	Peak	41.00	150	Horizontal	N/A
4**	5582.000	98.51	-2.85	54.0	-44.51	AV	41.00	150	Horizontal	N/A
5	10379.513	47.79	-3.40	74.0	26.21	Peak	240.00	150	Horizontal	Pass
5**	10379.513	37.47	-3.40	54.0	16.53	AV	240.00	150	Horizontal	Pass
6	16399.012	50.05	-1.44	74.0	23.95	Peak	210.00	150	Horizontal	Pass
6**	16399.012	39.68	-1.44	54.0	14.32	AV	210.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_10.47.04

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11n40 CH118 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

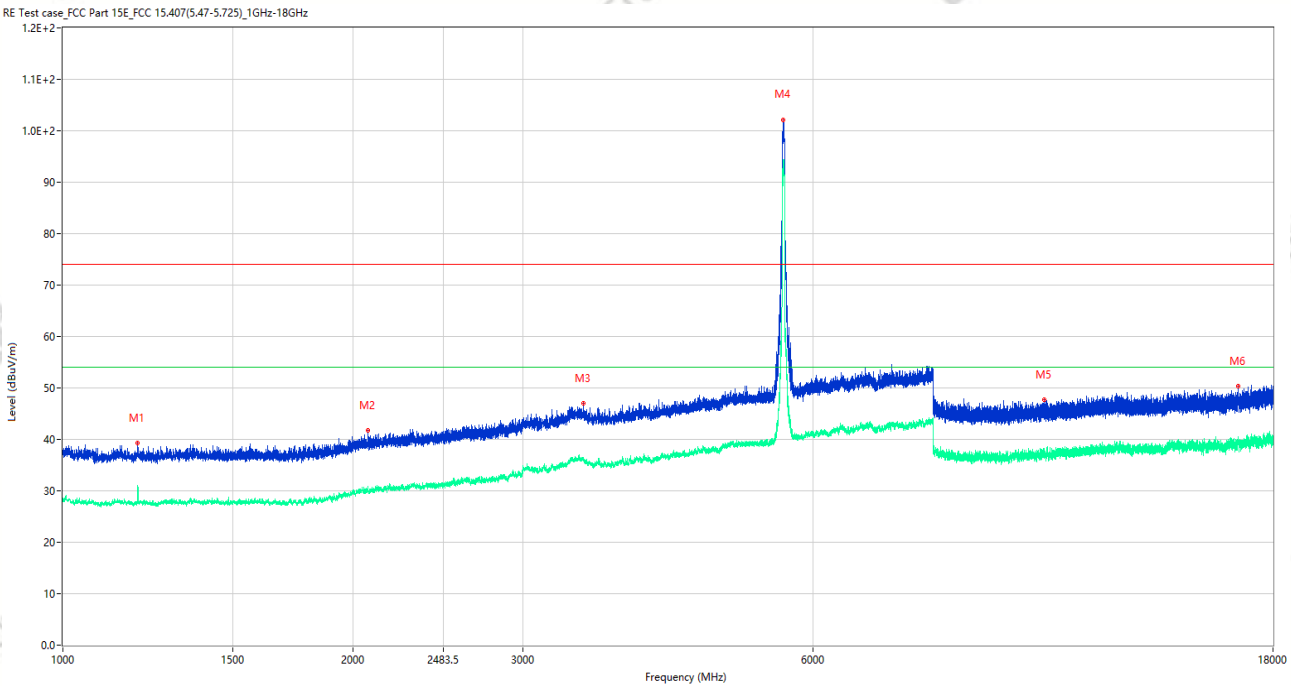


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.750	39.26	-15.74	74.0	34.74	Peak	0.00	150	Vertical	Pass
1**	1195.750	30.29	-15.74	54.0	23.71	AV	0.00	150	Vertical	Pass
2	2071.750	41.72	-13.74	74.0	32.28	Peak	0.00	150	Vertical	Pass
2**	2071.750	30.46	-13.74	54.0	23.54	AV	0.00	150	Vertical	Pass
3	3469.500	46.93	-5.48	74.0	27.07	Peak	33.00	150	Vertical	Pass
3**	3469.500	35.90	-5.48	54.0	18.10	AV	33.00	150	Vertical	Pass
4	5586.500	102.12	-2.81	74.0	-28.12	Peak	51.00	150	Vertical	N/A
4**	5586.500	94.43	-2.81	54.0	-40.43	AV	51.00	150	Vertical	N/A
5	10417.512	47.64	-3.44	74.0	26.36	Peak	121.00	150	Vertical	Pass
5**	10417.512	37.36	-3.44	54.0	16.64	AV	121.00	150	Vertical	Pass
6	16570.162	50.27	-0.86	74.0	23.73	Peak	210.00	150	Vertical	Pass
6**	16570.162	40.07	-0.86	54.0	13.93	AV	210.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_10.52.35

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11n40 CH118 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

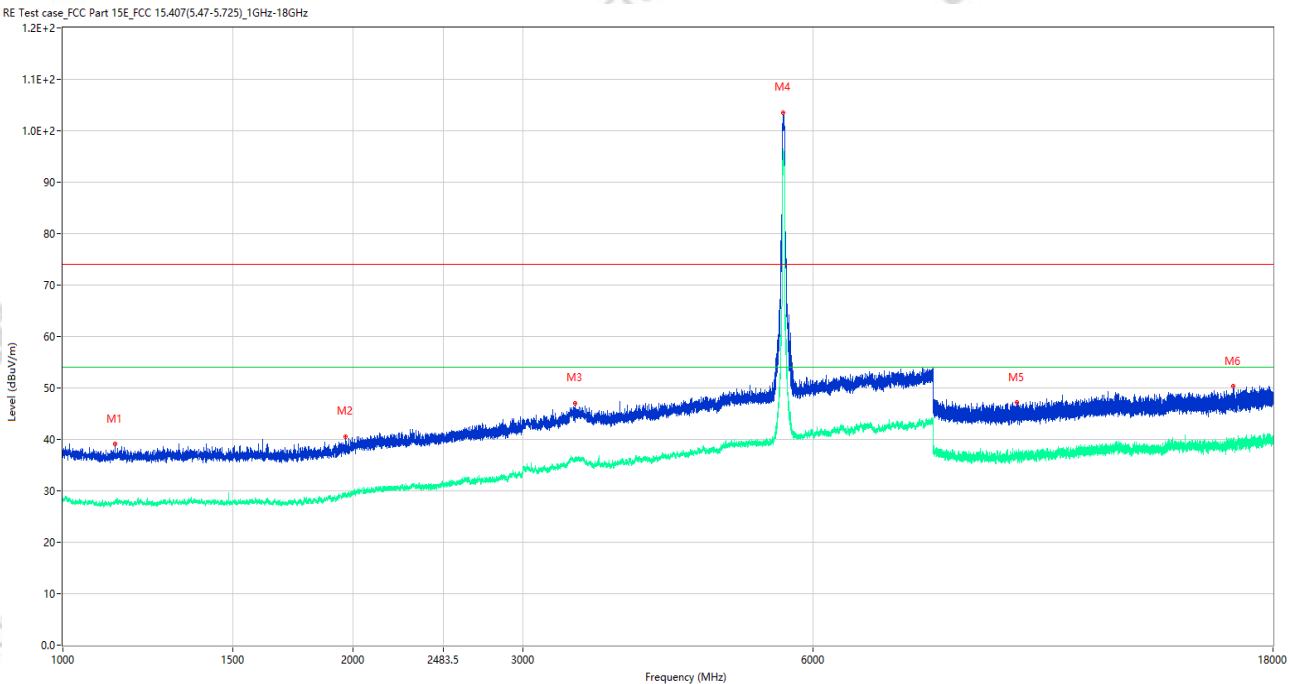


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1133.250	39.12	-15.56	74.0	34.88	Peak	114.00	150	Horizontal	Pass
1**	1133.250	27.89	-15.56	54.0	26.11	AV	114.00	150	Horizontal	Pass
2	1963.750	40.49	-14.99	74.0	33.51	Peak	197.00	150	Horizontal	Pass
2**	1963.750	29.04	-14.99	54.0	24.96	AV	197.00	150	Horizontal	Pass
3	3399.500	47.05	-5.69	74.0	26.95	Peak	53.00	150	Horizontal	Pass
3**	3399.500	35.74	-5.69	54.0	18.26	AV	53.00	150	Horizontal	Pass
4	5587.000	103.55	-2.83	74.0	-29.55	Peak	144.00	150	Horizontal	N/A
4**	5587.000	95.94	-2.83	54.0	-41.94	AV	144.00	150	Horizontal	N/A
5	9770.087	47.20	-3.46	74.0	26.80	Peak	360.00	150	Horizontal	Pass
5**	9770.087	36.82	-3.46	54.0	17.18	AV	360.00	150	Horizontal	Pass
6	16372.500	50.30	-1.74	74.0	23.70	Peak	313.00	150	Horizontal	Pass
6**	16372.500	39.50	-1.74	54.0	14.50	AV	313.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298
Test Time: 2026-02-07_12.56.59

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11ac80 CH122 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

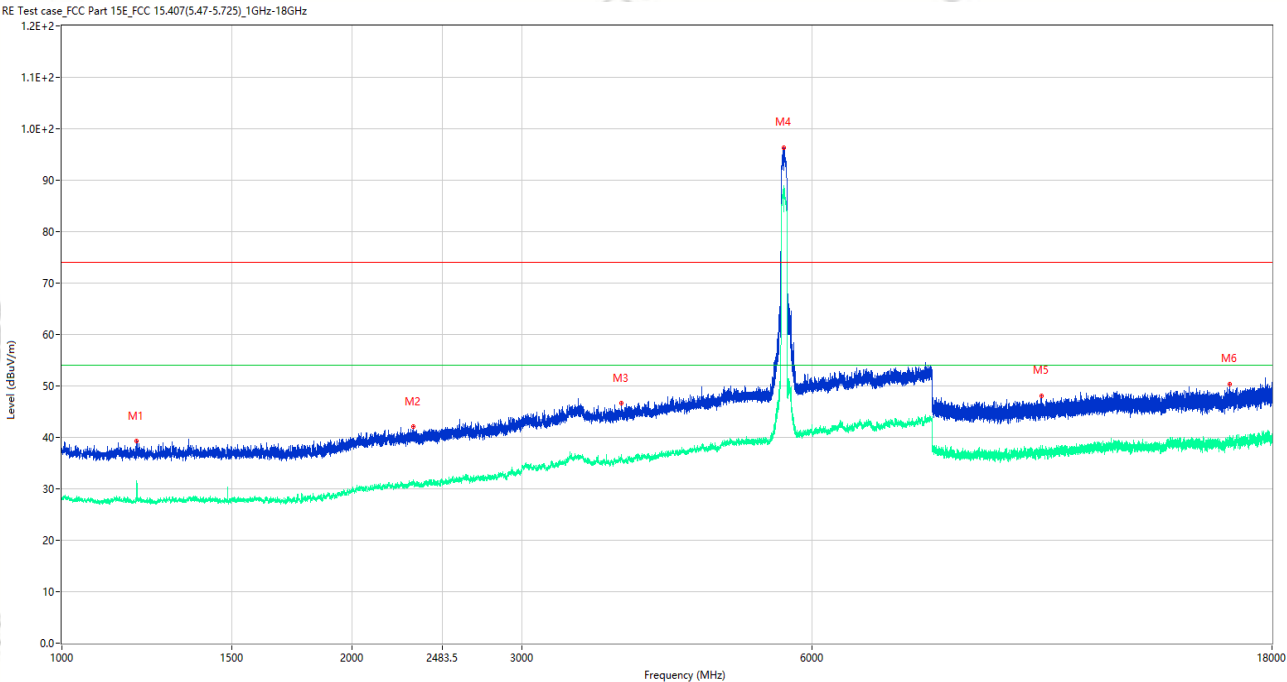

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.500	39.24	-15.75	74.0	34.76	Peak	27.00	150	Vertical	Pass
1**	1195.500	28.87	-15.75	54.0	25.13	AV	27.00	150	Vertical	Pass
2	2312.750	42.04	-12.41	74.0	31.96	Peak	92.00	150	Vertical	Pass
2**	2312.750	31.37	-12.41	54.0	22.63	AV	92.00	150	Vertical	Pass
3	3802.000	46.67	-4.53	74.0	27.33	Peak	360.00	150	Vertical	Pass
3**	3802.000	35.64	-4.53	54.0	18.36	AV	360.00	150	Vertical	Pass
4	5605.500	96.35	-2.69	74.0	-22.35	Peak	41.00	150	Vertical	N/A
4**	5605.500	88.32	-2.69	54.0	-34.32	AV	41.00	150	Vertical	N/A
5	10388.775	48.08	-3.34	74.0	25.92	Peak	51.00	150	Vertical	Pass
5**	10388.775	36.74	-3.34	54.0	17.26	AV	51.00	150	Vertical	Pass
6	16284.826	50.37	-1.44	74.0	23.63	Peak	243.00	150	Vertical	Pass
6**	16284.826	39.58	-1.44	54.0	14.42	AV	243.00	150	Vertical	Pass


Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_13.01.13

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11ac80 CH122 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

RE Test case FCC Part 15E FCC 15.407(5.47-5.725)_1GHz-18GHz

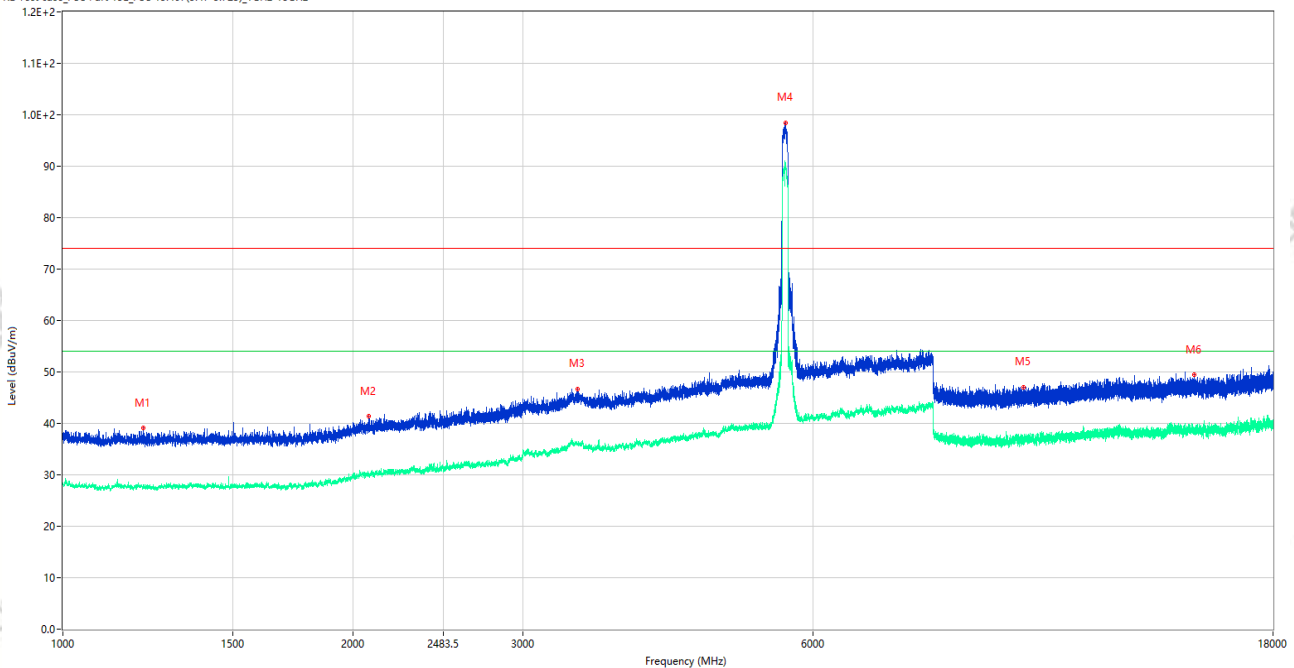


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1212.250	39.09	-15.89	74.0	34.91	Peak	352.00	150	Horizontal	Pass
1**	1212.250	27.80	-15.89	54.0	26.20	AV	352.00	150	Horizontal	Pass
2	2076.000	41.35	-13.75	74.0	32.65	Peak	354.00	150	Horizontal	Pass
2**	2076.000	30.21	-13.75	54.0	23.79	AV	354.00	150	Horizontal	Pass
3	3422.000	46.67	-4.91	74.0	27.33	Peak	138.00	150	Horizontal	Pass
3**	3422.000	36.22	-4.91	54.0	17.78	AV	138.00	150	Horizontal	Pass
4	5619.000	98.49	-2.32	74.0	-24.49	Peak	138.00	150	Horizontal	N/A
4**	5619.000	90.12	-2.32	54.0	-36.12	AV	138.00	150	Horizontal	N/A
5	9923.512	46.94	-4.22	74.0	27.06	Peak	335.00	150	Horizontal	Pass
5**	9923.512	36.65	-4.22	54.0	17.35	AV	335.00	150	Horizontal	Pass
6	14925.338	49.54	-1.66	74.0	24.46	Peak	280.00	150	Horizontal	Pass
6**	14925.338	38.48	-1.66	54.0	15.52	AV	280.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_13.18.11

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11a CH157 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

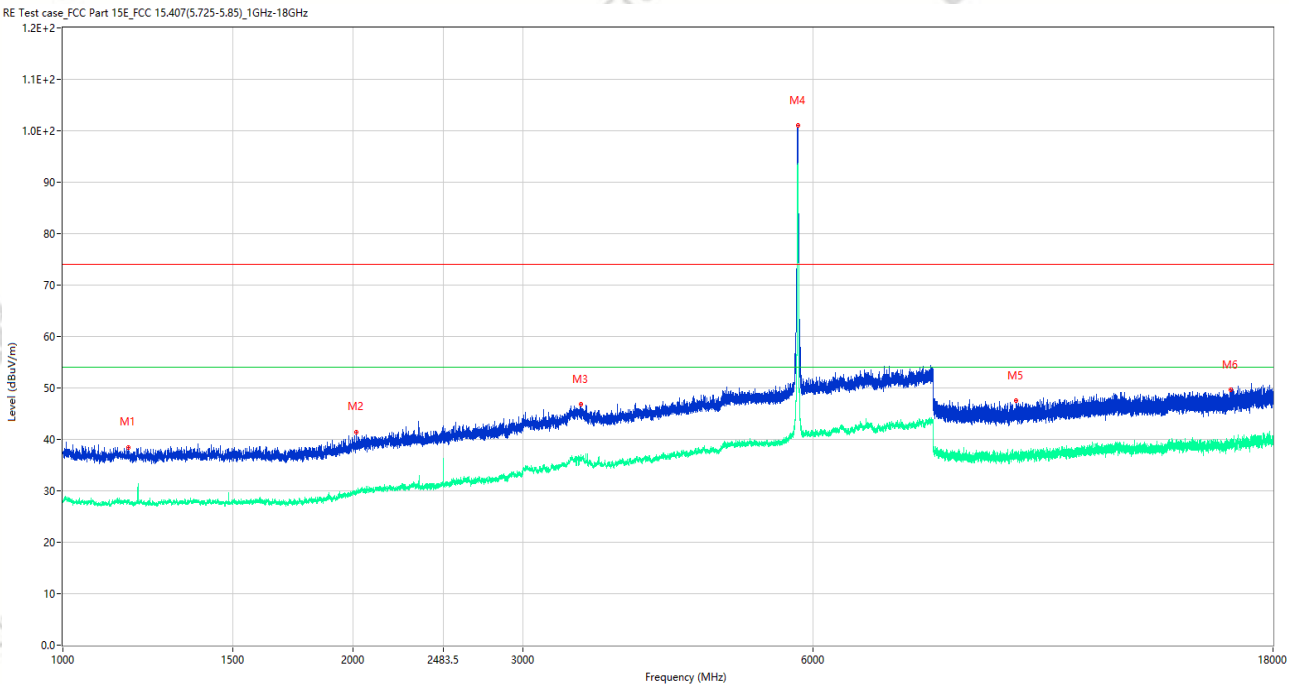


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1170.250	38.35	-15.52	74.0	35.65	Peak	0.00	150	Vertical	Pass
1**	1170.250	27.88	-15.52	54.0	26.12	AV	0.00	150	Vertical	Pass
2	2014.250	41.43	-14.23	74.0	32.57	Peak	0.00	150	Vertical	Pass
2**	2014.250	29.50	-14.23	54.0	24.50	AV	0.00	150	Vertical	Pass
3	3443.000	46.78	-5.29	74.0	27.22	Peak	130.00	150	Vertical	Pass
3**	3443.000	35.99	-5.29	54.0	18.01	AV	130.00	150	Vertical	Pass
4	5784.000	101.00	-1.54	74.0	-27.00	Peak	29.00	150	Vertical	N/A
4**	5784.000	93.42	-1.54	54.0	-39.42	AV	29.00	150	Vertical	N/A
5	9740.162	47.46	-3.95	74.0	26.54	Peak	51.00	150	Vertical	Pass
5**	9740.162	37.32	-3.95	54.0	16.68	AV	51.00	150	Vertical	Pass
6	16282.988	49.62	-1.51	74.0	24.38	Peak	243.00	150	Vertical	Pass
6**	16282.988	39.51	-1.51	54.0	14.49	AV	243.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_13.12.32

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11a CH157 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

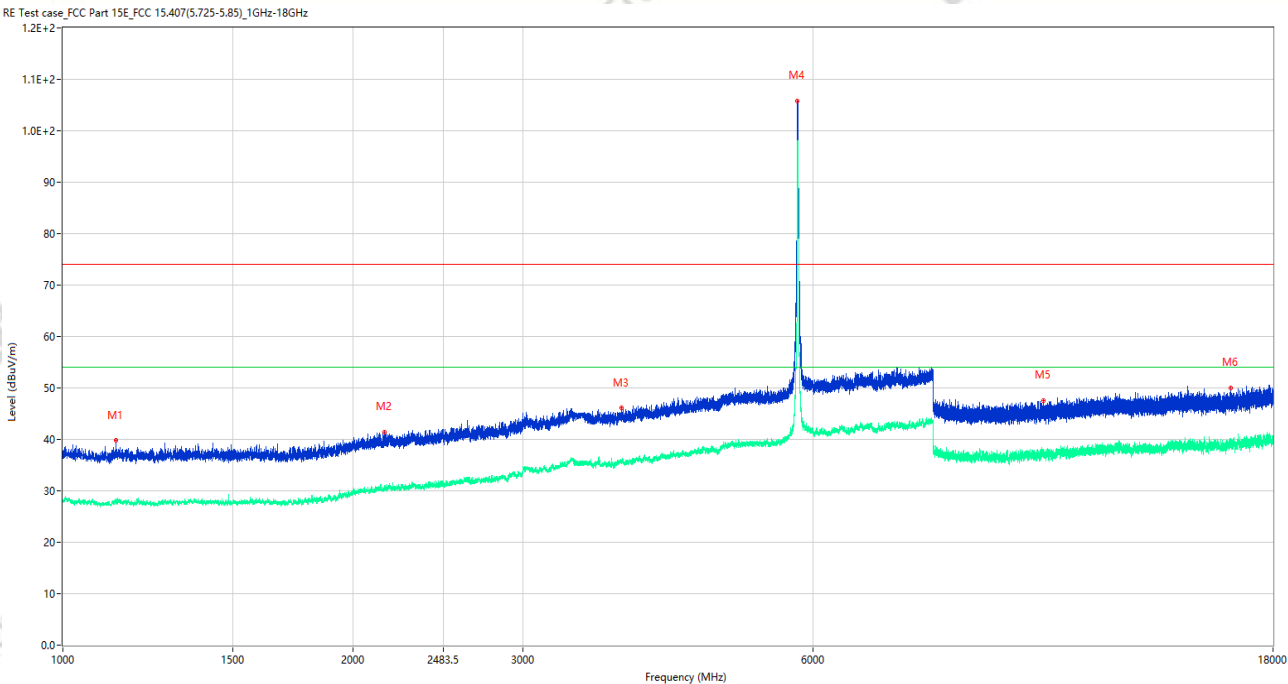


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1136.000	39.82	-15.53	74.0	34.18	Peak	354.00	150	Horizontal	Pass
1**	1136.000	27.77	-15.53	54.0	26.23	AV	354.00	150	Horizontal	Pass
2	2155.500	41.42	-13.49	74.0	32.58	Peak	159.00	150	Horizontal	Pass
2**	2155.500	30.43	-13.49	54.0	23.57	AV	159.00	150	Horizontal	Pass
3	3794.500	46.20	-5.12	74.0	27.80	Peak	51.00	150	Horizontal	Pass
3**	3794.500	35.69	-5.12	54.0	18.31	AV	51.00	150	Horizontal	Pass
4	5783.000	105.83	-1.53	74.0	-31.83	Peak	5.00	150	Horizontal	N/A
4**	5783.000	97.94	-1.53	54.0	-43.94	AV	5.00	150	Horizontal	N/A
5	10403.025	47.60	-3.40	74.0	26.40	Peak	240.00	150	Horizontal	Pass
5**	10403.025	37.07	-3.40	54.0	16.93	AV	240.00	150	Horizontal	Pass
6	16285.875	49.91	-1.43	74.0	24.09	Peak	11.00	150	Horizontal	Pass
6**	16285.875	39.75	-1.43	54.0	14.25	AV	11.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_13.48.28

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11n20 CH157 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

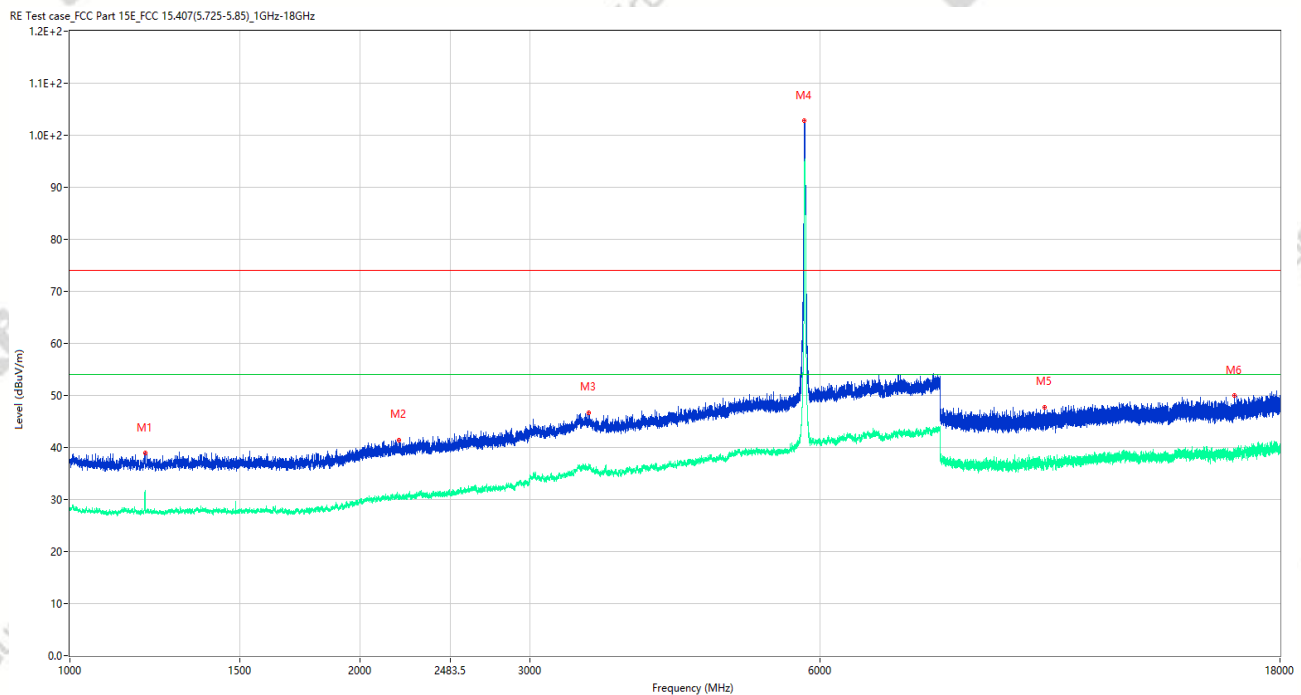


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.500	38.92	-15.71	74.0	35.08	Peak	19.00	150	Vertical	Pass
1**	1196.500	30.41	-15.71	54.0	23.59	AV	19.00	150	Vertical	Pass
2	2196.500	41.37	-13.31	74.0	32.63	Peak	340.00	150	Vertical	Pass
2**	2196.500	30.29	-13.31	54.0	23.71	AV	340.00	150	Vertical	Pass
3	3456.500	46.70	-4.90	74.0	27.30	Peak	204.00	150	Vertical	Pass
3**	3456.500	36.50	-4.90	54.0	17.50	AV	204.00	150	Vertical	Pass
4	5783.500	102.78	-1.54	74.0	-28.78	Peak	44.00	150	Vertical	N/A
4**	5783.500	94.57	-1.54	54.0	-40.57	AV	44.00	150	Vertical	N/A
5	10258.388	47.76	-3.19	74.0	26.24	Peak	0.00	150	Vertical	Pass
5**	10258.388	36.87	-3.19	54.0	17.13	AV	0.00	150	Vertical	Pass
6	16144.912	49.92	-1.32	74.0	24.08	Peak	38.00	150	Vertical	Pass
6**	16144.912	39.19	-1.32	54.0	14.81	AV	38.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_13.55.00

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11n20 CH157 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

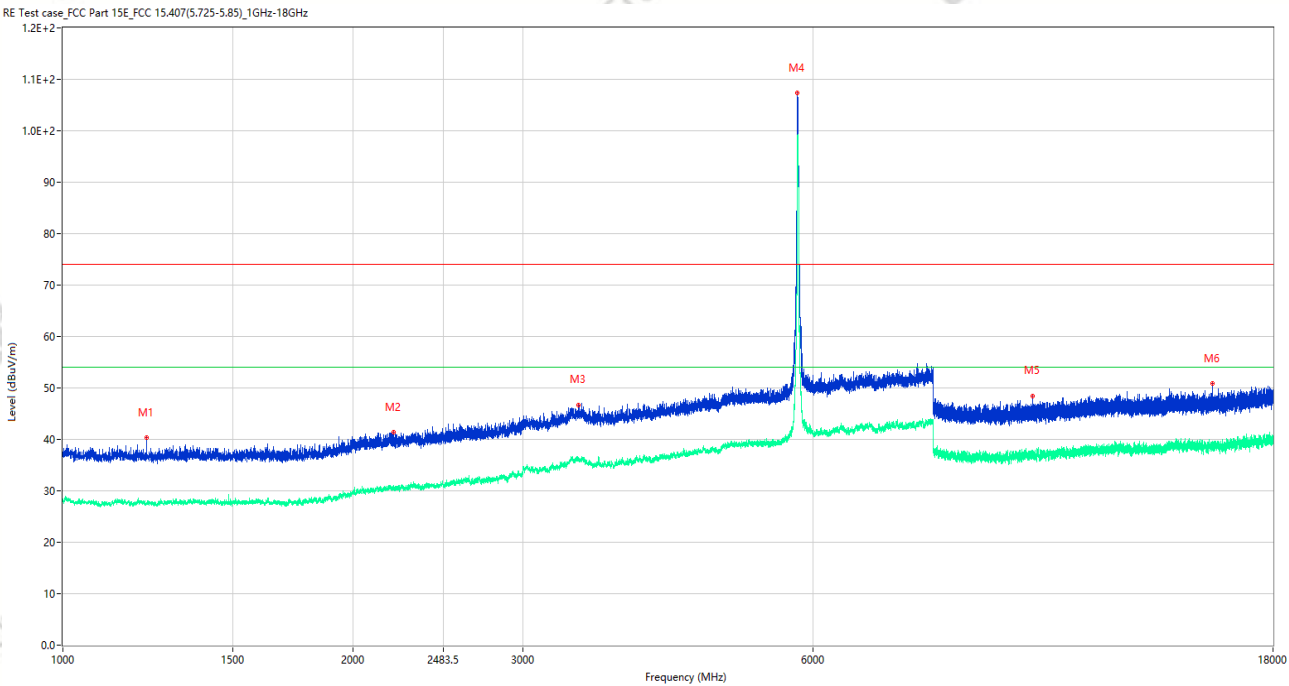


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1221.250	40.32	-15.99	74.0	33.68	Peak	0.00	150	Horizontal	Pass
1**	1221.250	27.66	-15.99	54.0	26.34	AV	0.00	150	Horizontal	Pass
2	2202.000	41.36	-13.34	74.0	32.64	Peak	358.00	150	Horizontal	Pass
2**	2202.000	30.68	-13.34	54.0	23.32	AV	358.00	150	Horizontal	Pass
3	3429.000	46.72	-5.01	74.0	27.28	Peak	271.00	150	Horizontal	Pass
3**	3429.000	36.05	-5.01	54.0	17.95	AV	271.00	150	Horizontal	Pass
4	5783.000	104.18	-1.53	74.0	-30.18	Peak	329.00	150	Horizontal	N/A
4**	5783.000	96.22	-1.53	54.0	-42.22	AV	329.00	150	Horizontal	N/A
5	10130.850	48.43	-3.87	74.0	25.57	Peak	288.00	150	Horizontal	Pass
5**	10130.850	37.45	-3.87	54.0	16.55	AV	288.00	150	Horizontal	Pass
6	15567.412	50.85	-2.63	74.0	23.15	Peak	360.00	150	Horizontal	Pass
6**	15567.412	38.39	-2.63	54.0	15.61	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_14.18.40

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11n40 CH159 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

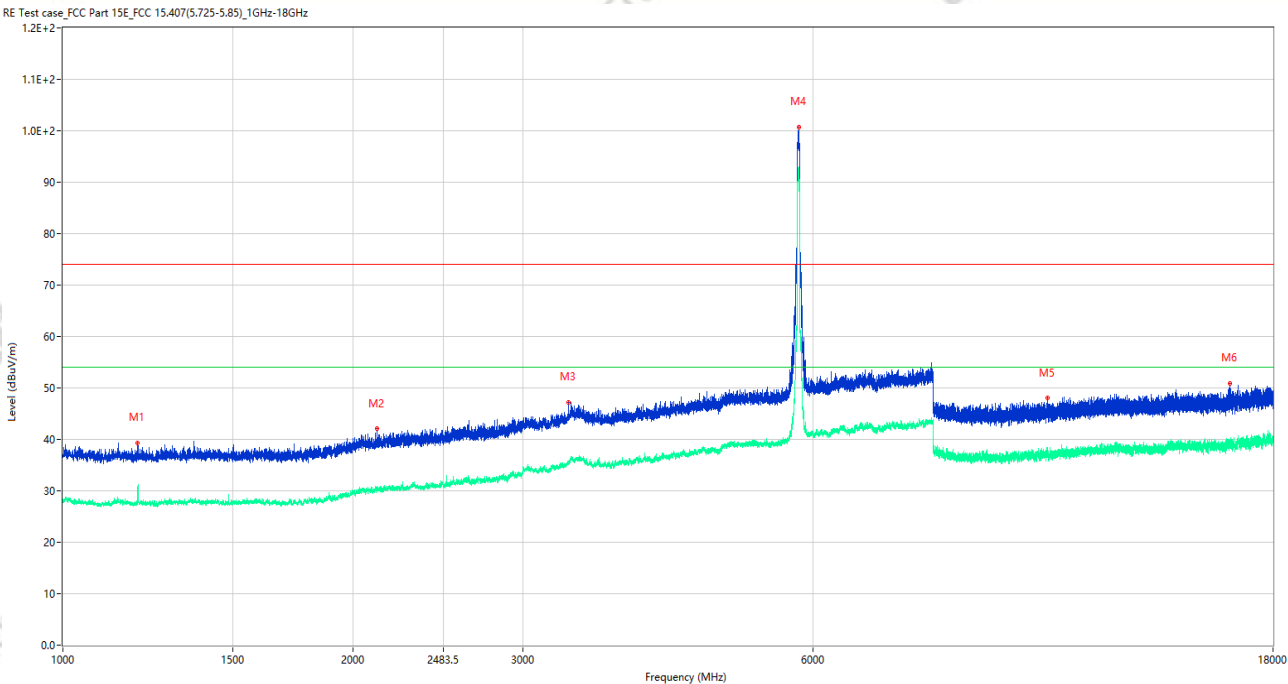

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.000	39.25	-15.73	74.0	34.75	Peak	199.00	150	Vertical	Pass
1**	1196.000	30.66	-15.73	54.0	23.34	AV	199.00	150	Vertical	Pass
2	2116.250	42.09	-13.47	74.0	31.91	Peak	145.00	150	Vertical	Pass
2**	2116.250	30.80	-13.47	54.0	23.20	AV	145.00	150	Vertical	Pass
3	3345.500	47.27	-6.16	74.0	26.73	Peak	1.00	150	Vertical	Pass
3**	3345.500	35.52	-6.16	54.0	18.48	AV	1.00	150	Vertical	Pass
4	5796.500	100.71	-1.41	74.0	-26.71	Peak	35.00	150	Vertical	N/A
4**	5796.500	91.12	-1.41	54.0	-37.12	AV	35.00	150	Vertical	N/A
5	10505.862	48.10	-3.31	74.0	25.90	Peak	332.00	150	Vertical	Pass
5**	10505.862	37.42	-3.31	54.0	16.58	AV	332.00	150	Vertical	Pass
6	16250.174	50.92	-1.47	74.0	23.08	Peak	176.00	150	Vertical	Pass
6**	16250.174	39.40	-1.47	54.0	14.60	AV	176.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_14.13.42

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: X6895

Humidity (%RH): 55

Sample Number: CC26010335-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8GWIFI 11n40 CH159 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Siyuan

Remark: 适配器:A02+数据线:A11 ANT12

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

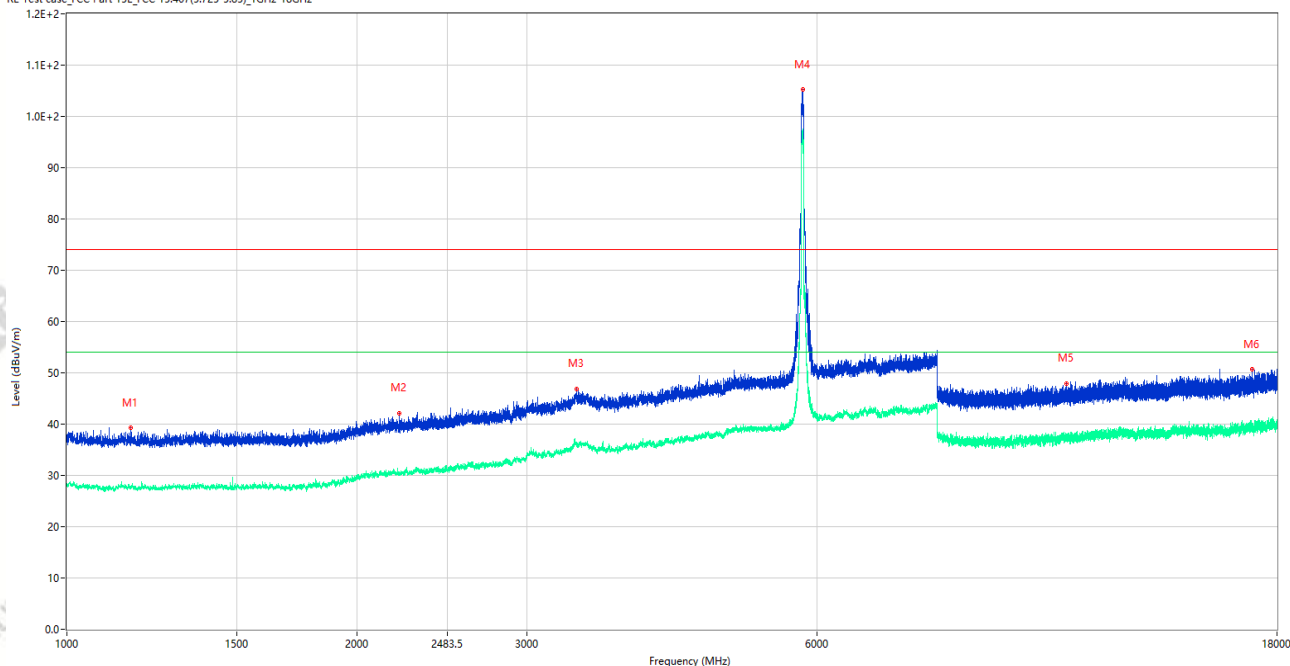

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1165.750	39.24	-15.45	74.0	34.76	Peak	112.00	150	Horizontal	Pass
1**	1165.750	27.50	-15.45	54.0	26.50	AV	112.00	150	Horizontal	Pass
2	2210.750	42.07	-13.28	74.0	31.93	Peak	235.00	150	Horizontal	Pass
2**	2210.750	30.48	-13.28	54.0	23.52	AV	235.00	150	Horizontal	Pass
3	3377.000	46.88	-4.92	74.0	27.12	Peak	223.00	150	Horizontal	Pass
3**	3377.000	36.11	-4.92	54.0	17.89	AV	223.00	150	Horizontal	Pass
4	5796.500	105.18	-1.41	74.0	-31.18	Peak	26.00	150	Horizontal	N/A
4**	5796.500	96.78	-1.41	54.0	-42.78	AV	26.00	150	Horizontal	N/A
5	10888.713	47.93	-3.39	74.0	26.07	Peak	75.00	150	Horizontal	Pass
5**	10888.713	36.92	-3.39	54.0	17.08	AV	75.00	150	Horizontal	Pass
6	16958.401	50.62	-0.83	74.0	23.38	Peak	72.00	150	Horizontal	Pass
6**	16958.401	38.77	-0.83	54.0	15.23	AV	72.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_14.24.43

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: X6895

Humidity (%RH): 55

Sample Number: CC26010335-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8GWIFI 11ac80 CH155 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Siyuan

Remark: 适配器:A02+数据线:A11 ANT12

RE Test case FCC Part 15E FCC 15.407(5.725-5.85)_1GHz-18GHz

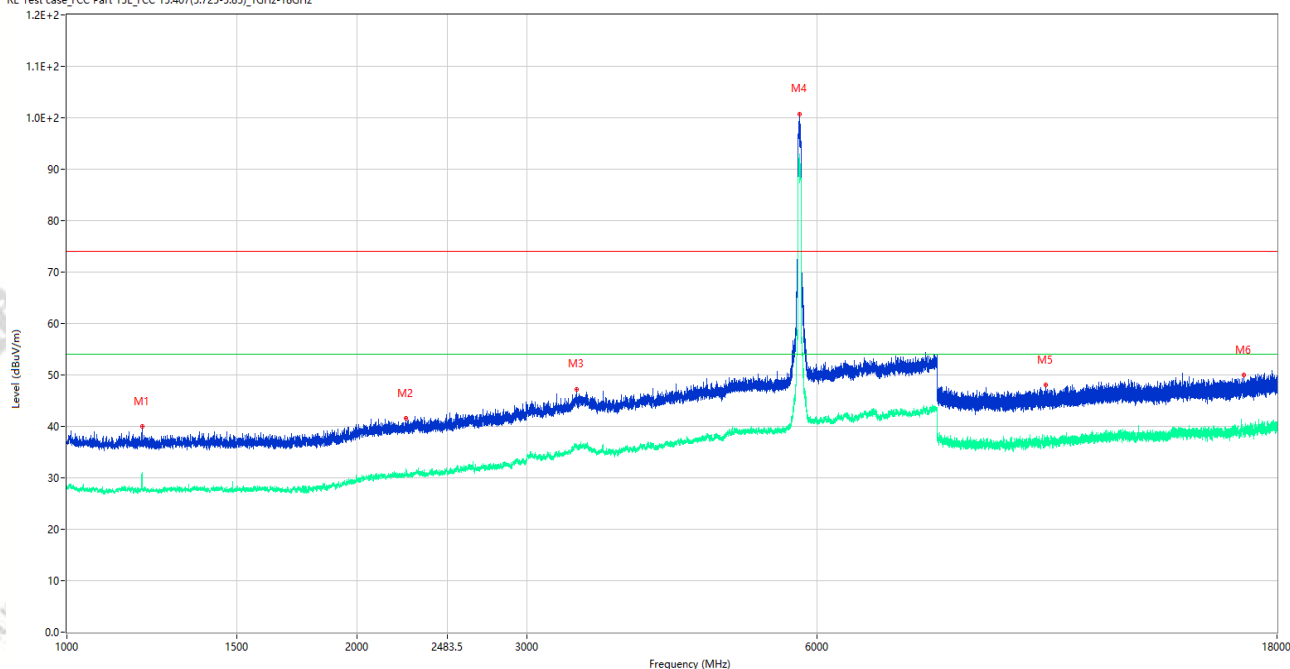


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.250	39.93	-15.72	74.0	34.07	Peak	21.00	150	Vertical	Pass
1**	1196.250	31.10	-15.72	54.0	22.90	AV	21.00	150	Vertical	Pass
2	2246.250	41.53	-12.83	74.0	32.47	Peak	120.00	150	Vertical	Pass
2**	2246.250	30.77	-12.83	54.0	23.23	AV	120.00	150	Vertical	Pass
3	3377.000	47.20	-4.92	74.0	26.80	Peak	110.00	150	Vertical	Pass
3**	3377.000	35.92	-4.92	54.0	18.08	AV	110.00	150	Vertical	Pass
4	5752.500	100.77	-2.10	74.0	-26.77	Peak	31.00	150	Vertical	N/A
4**	5752.500	92.87	-2.10	54.0	-38.87	AV	31.00	150	Vertical	N/A
5	10360.988	48.04	-3.12	74.0	25.96	Peak	286.00	150	Vertical	Pass
5**	10360.988	37.31	-3.12	54.0	16.69	AV	286.00	150	Vertical	Pass
6	16644.712	50.06	-1.16	74.0	23.94	Peak	243.00	150	Vertical	Pass
6**	16644.712	39.60	-1.16	54.0	14.40	AV	243.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_14.30.30

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11ac80 CH155 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

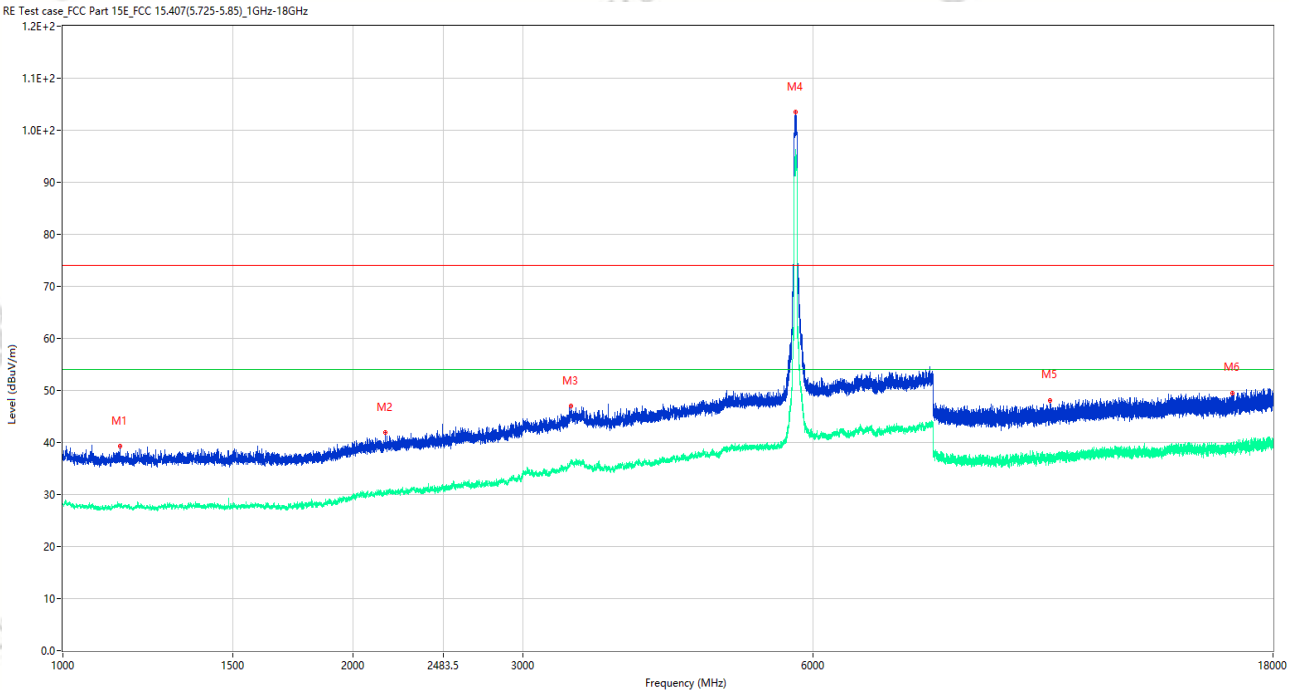

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1147.250	39.23	-15.67	74.0	34.77	Peak	358.00	150	Horizontal	Pass
1**	1147.250	27.59	-15.67	54.0	26.41	AV	358.00	150	Horizontal	Pass
2	2160.000	41.92	-13.35	74.0	32.08	Peak	28.00	150	Horizontal	Pass
2**	2160.000	30.27	-13.35	54.0	23.73	AV	28.00	150	Horizontal	Pass
3	3363.500	47.01	-5.35	74.0	26.99	Peak	92.00	150	Horizontal	Pass
3**	3363.500	36.49	-5.35	54.0	17.51	AV	92.00	150	Horizontal	Pass
4	5756.500	103.47	-2.04	74.0	-29.47	Peak	9.00	150	Horizontal	N/A
4**	5756.500	95.44	-2.04	54.0	-41.44	AV	9.00	150	Horizontal	N/A
5	10567.375	48.11	-3.29	74.0	25.89	Peak	74.00	150	Horizontal	Pass
5**	10567.375	37.05	-3.29	54.0	16.95	AV	74.00	150	Horizontal	Pass
6	16346.512	49.48	-1.19	74.0	24.52	Peak	175.00	150	Horizontal	Pass
6**	16346.512	38.61	-1.19	54.0	15.39	AV	175.00	150	Horizontal	Pass