

**Meas1.Head Right cheek GSM 850 Ch190 ANT2**

Date: 2026/2/1

Communication System Band: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2.08

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.941$  S/m;  $\epsilon_r = 41.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22°C Liquid Temperature: 21.2°C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch190/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.592 W/kg

**Ch190/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.59 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.776 W/kg

**SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.227 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 47.5%

Maximum value of SAR (measured) = 0.582 W/kg

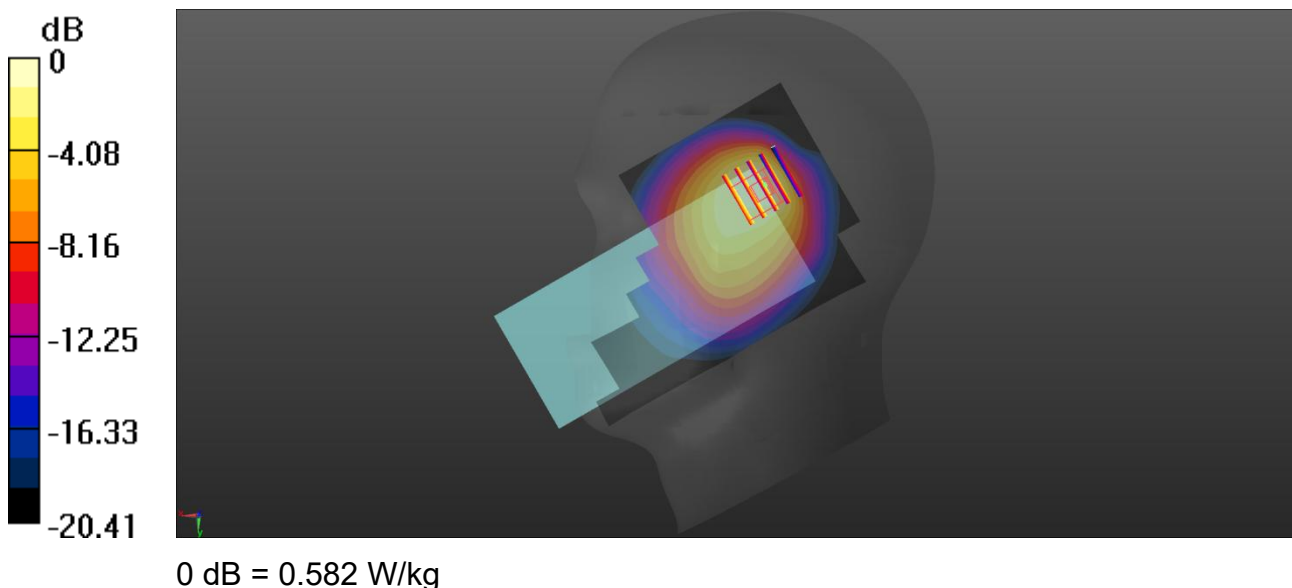

## Meas2.Body-worn&Hotspot Back side 10mm GSM 850 Ch190 ANT2

Date: 2026/2/1

Communication System Band: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2.08

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.941$  S/m;  $\epsilon_r = 41.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch190/Area Scan (71x131x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.237 W/kg

**Ch190/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.729 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.285 W/kg

**SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.105 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.218 W/kg

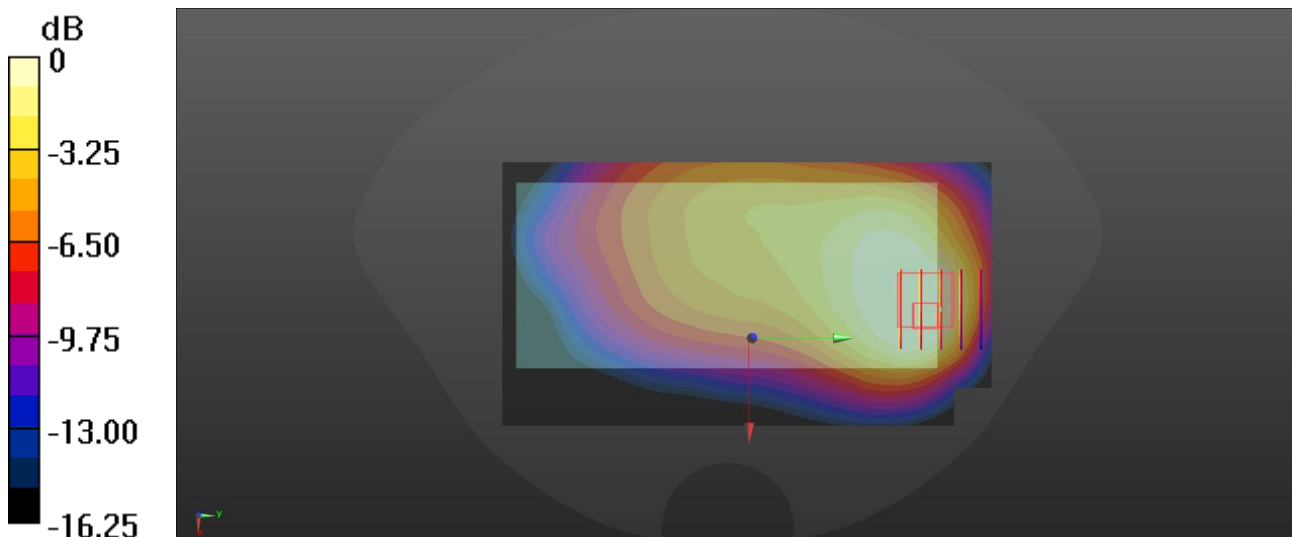

0 dB = 0.218 W/kg

## Meas3.Head Right tilt GSM 1900 Ch661 ANT2

Date: 2026/2/2

Communication System Band: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.443$  S/m;  $\epsilon_r = 39.37$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch661/Area Scan (81x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.516 W/kg

**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 6.608 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.619 W/kg

**SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.124 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 0.516 W/kg

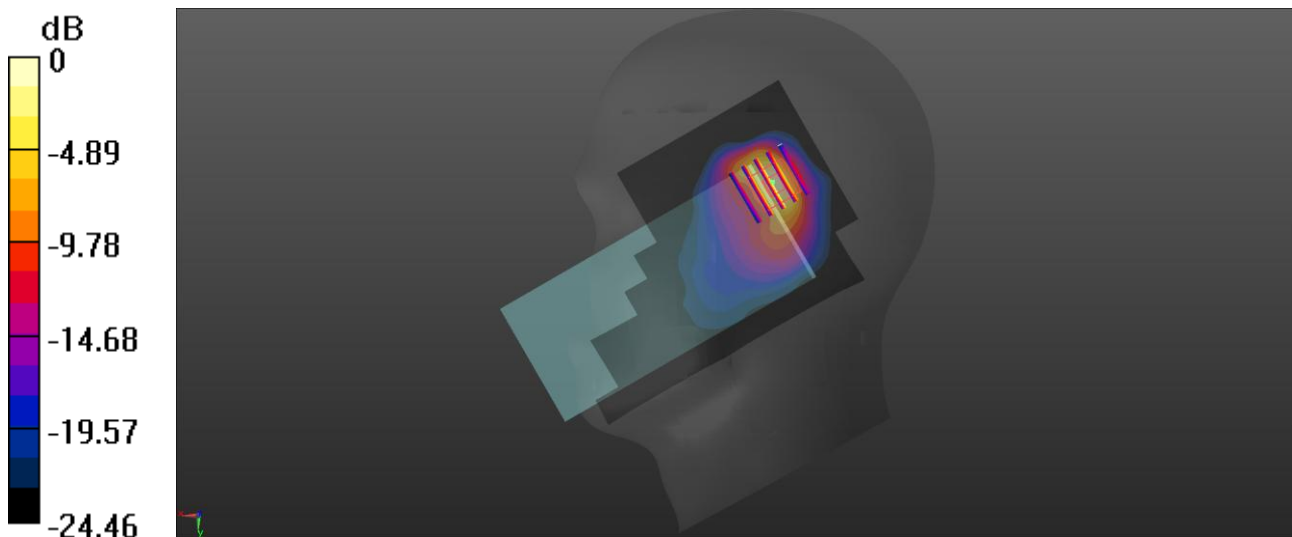

0 dB = 0.516 W/kg

## Meas4.Body-worn&Hotspot Top side 10mm GSM 1900 Ch661 ANT2

Date: 2026/2/2

Communication System Band: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1: 4.15

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.443$  S/m;  $\epsilon_r = 39.37$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch661/Area Scan (51x101x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.191 W/kg

**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 5.629 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.248 W/kg

**SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.061 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

Maximum value of SAR (measured) = 0.202 W/kg

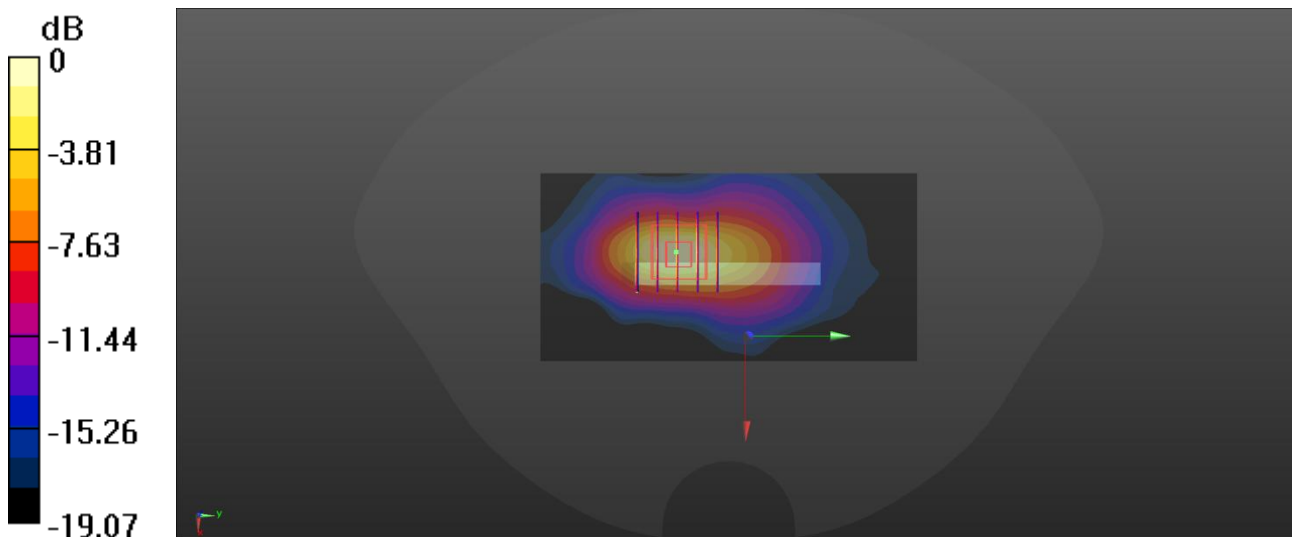

0 dB = 0.202 W/kg

## Meas5.Head Right tilt WCDMA B2 Ch9400 ANT2

Date: 2026/2/2

Communication System Band: II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.443$  S/m;  $\epsilon_r = 39.37$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch9400/Area Scan (81x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.793 W/kg

**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.873 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.204 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 0.854 W/kg

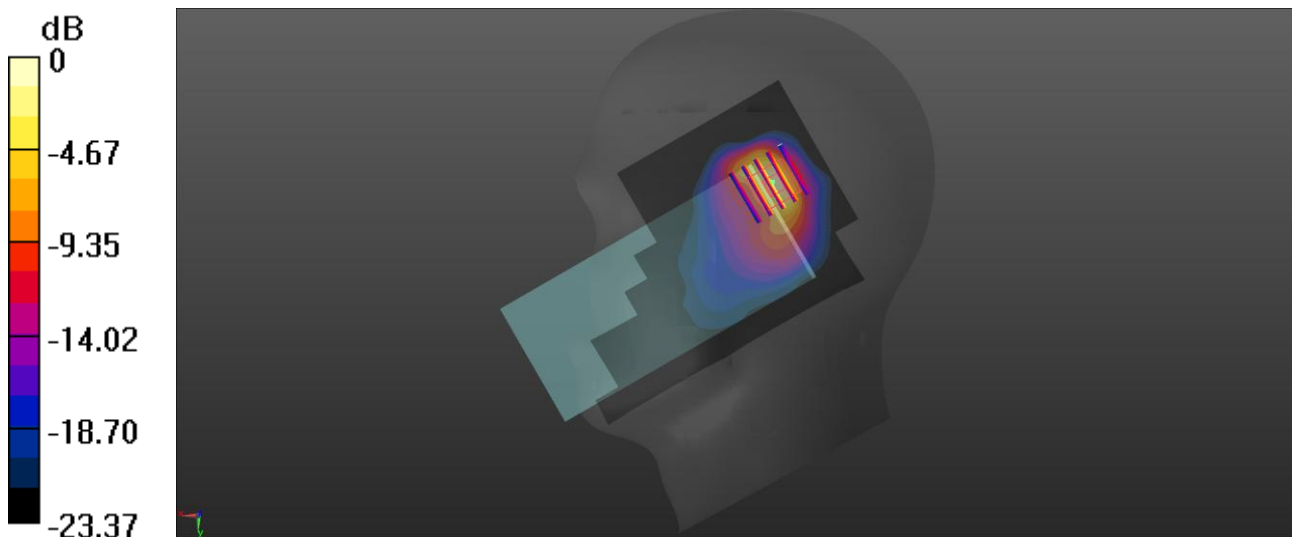

0 dB = 0.854 W/kg

## Meas6.Body-worn&Hotspot Top side 10mm WCDMA B2 Ch9400 ANT2

Date: 2026/2/2

Communication System Band: II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.443$  S/m;  $\epsilon_r = 39.37$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch9400/Area Scan (51x101x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.300 W/kg

**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 5.937 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.374 W/kg

**SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.090 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 0.303 W/kg

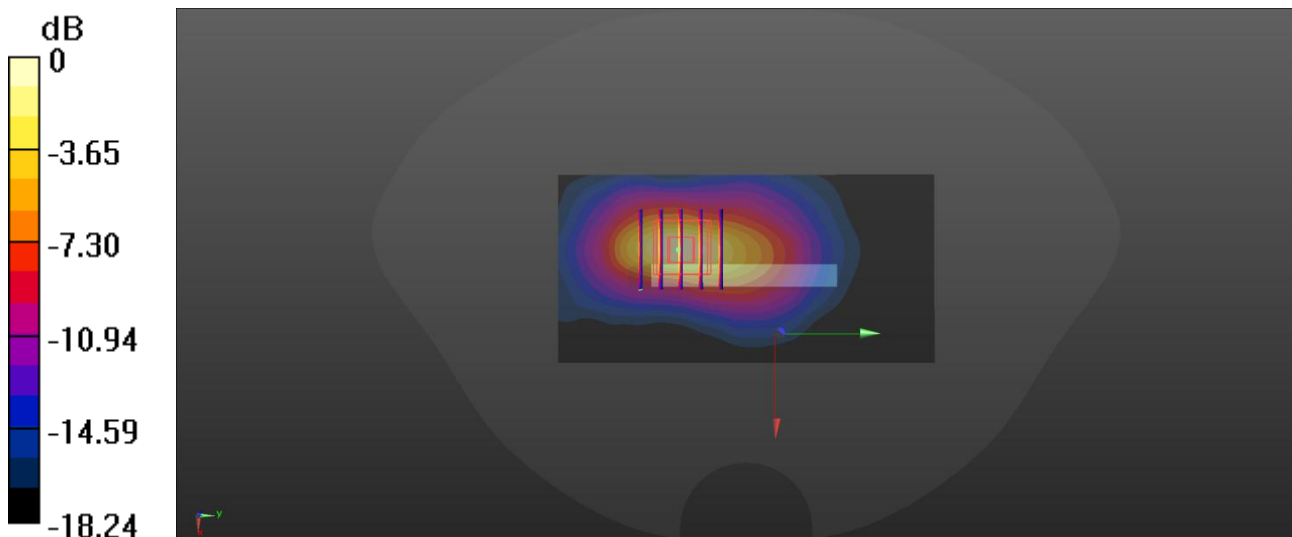

0 dB = 0.303 W/kg

## Meas7.Head Right tilt WCDMA B4 Ch1413 ANT2

Date: 2026/2/1

Communication System Band: IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.343$  S/m;  $\epsilon_r = 39.569$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch1413/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.696 W/kg

**Ch1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.946 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.910 W/kg

**SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.184 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 0.759 W/kg

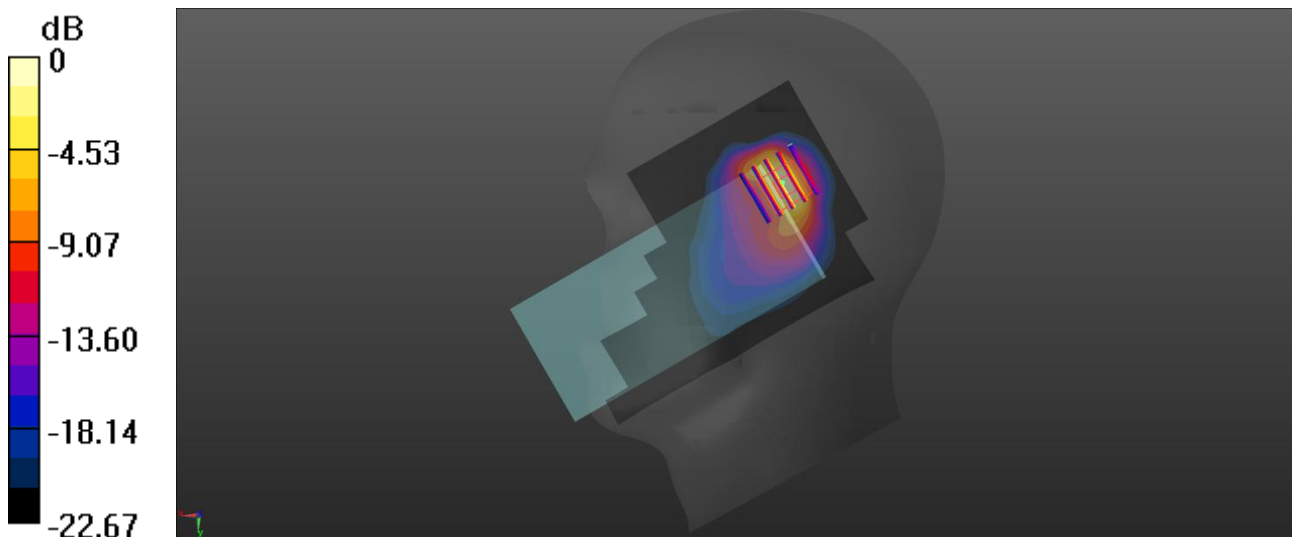

0 dB = 0.759 W/kg

## Meas8.Body-worn&Hotspot Top side 10mm WCDMA B4 Ch1413 ANT2

Date: 2026/2/1

Communication System Band: IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.343$  S/m;  $\epsilon_r = 39.569$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch1413/Area Scan (51x101x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.228 W/kg

**Ch1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 4.779 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.281 W/kg

**SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.068 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 0.227 W/kg

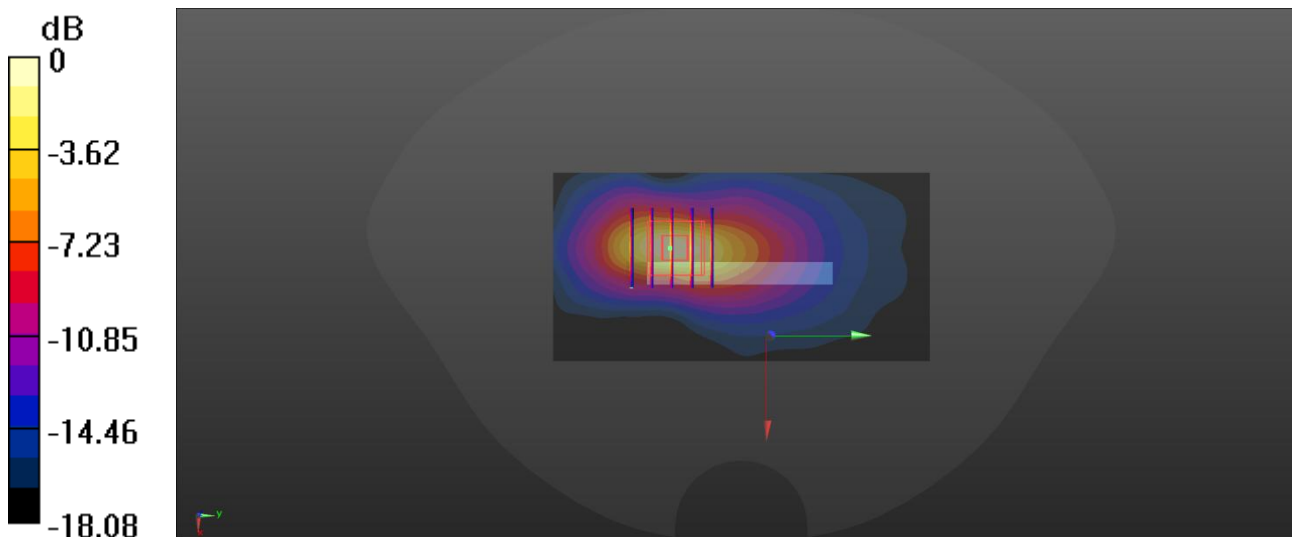

0 dB = 0.227 W/kg

## Meas9.Head Right cheek WCDMA B5 Ch4182 ANT2

Date: 2026/2/1

Communication System Band: V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.941$  S/m;  $\epsilon_r = 41.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch4182/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.667 W/kg

**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.18 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.272 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 44.1%

Maximum value of SAR (measured) = 0.785 W/kg

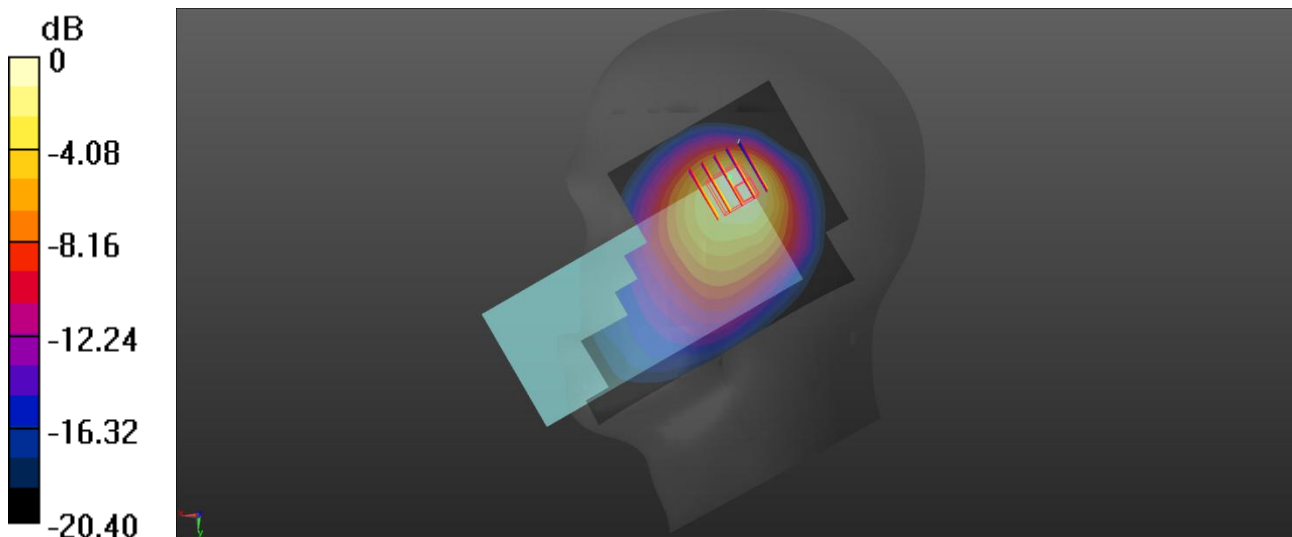

0 dB = 0.785 W/kg

## Meas10.Body-worn&Hotspot Back side 10mm WCDMA B5 Ch4182 ANT2

Date: 2026/2/1

Communication System Band: V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.941$  S/m;  $\epsilon_r = 41.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch4182/Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.237 W/kg

**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.814 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.282 W/kg

**SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.101 W/kg**

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 0.220 W/kg

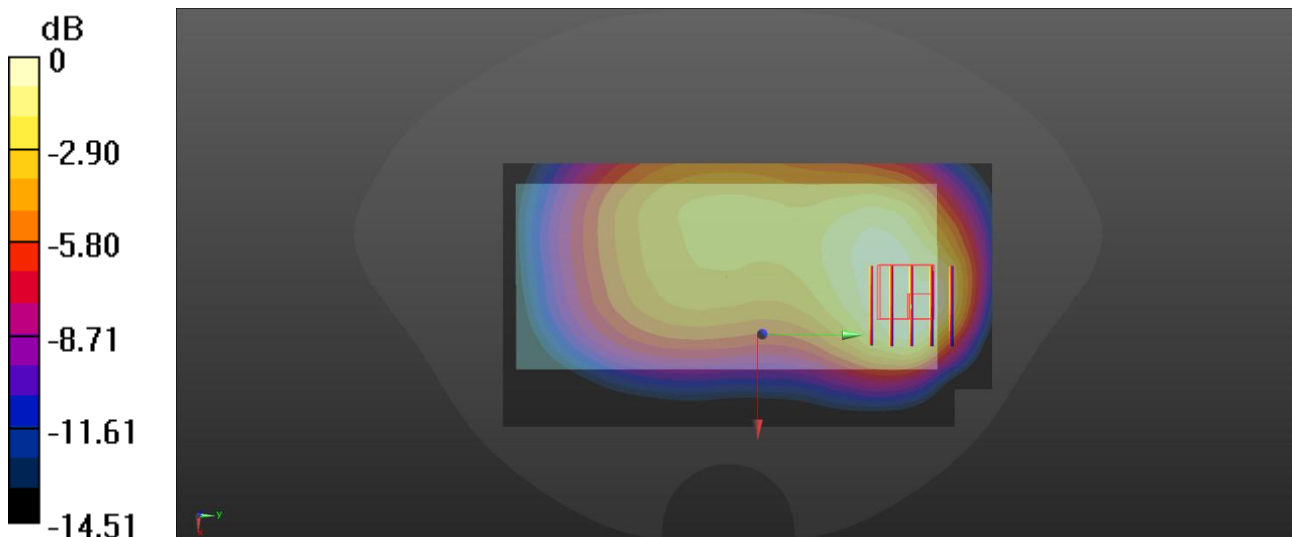

0 dB = 0.220 W/kg

## Meas11.Head Right tilt LTE B2 Ch18900 ANT2

Date: 2026/2/2

Communication System Band: Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.443$  S/m;  $\epsilon_r = 39.37$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch18900/Area Scan (81x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.02 W/kg

**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 9.390 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.254 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 49%

Maximum value of SAR (measured) = 1.02 W/kg

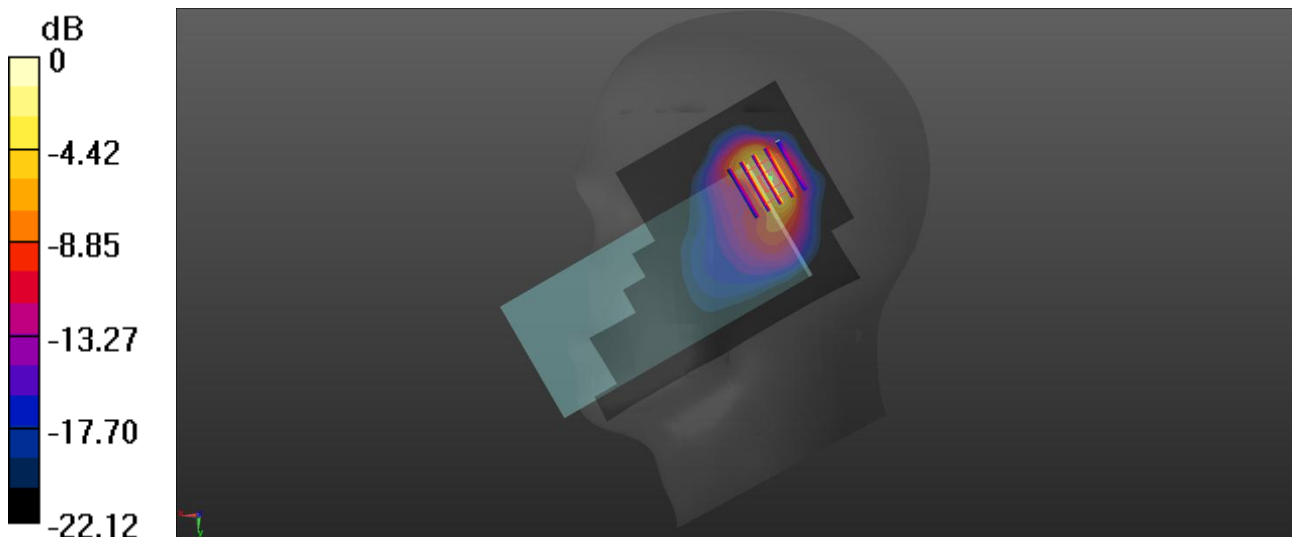

0 dB = 1.02 W/kg

## Meas12.Body-worn&Hotspot Top side 10mm LTE B2 Ch18900 ANT2

Date: 2026/2/2

Communication System Band: Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.443$  S/m;  $\epsilon_r = 39.37$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch18900/Area Scan (51x101x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.355 W/kg

**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 7.304 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.441 W/kg

**SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.110 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 0.358 W/kg

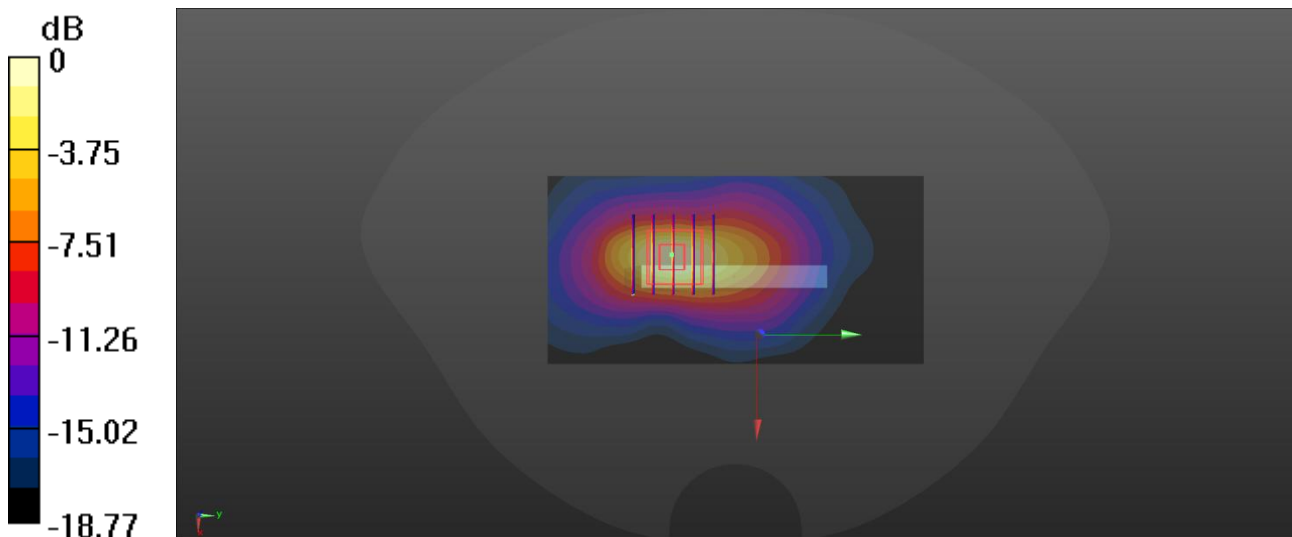

0 dB = 0.358 W/kg

## Meas13.Head Right tilt LTE B4 Ch20175 ANT2

Date: 2026/2/1

Communication System Band: Band 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.343$  S/m;  $\epsilon_r = 39.569$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch20175/Area Scan (81x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.776 W/kg

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.581 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.932 W/kg

**SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.193 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 0.780 W/kg

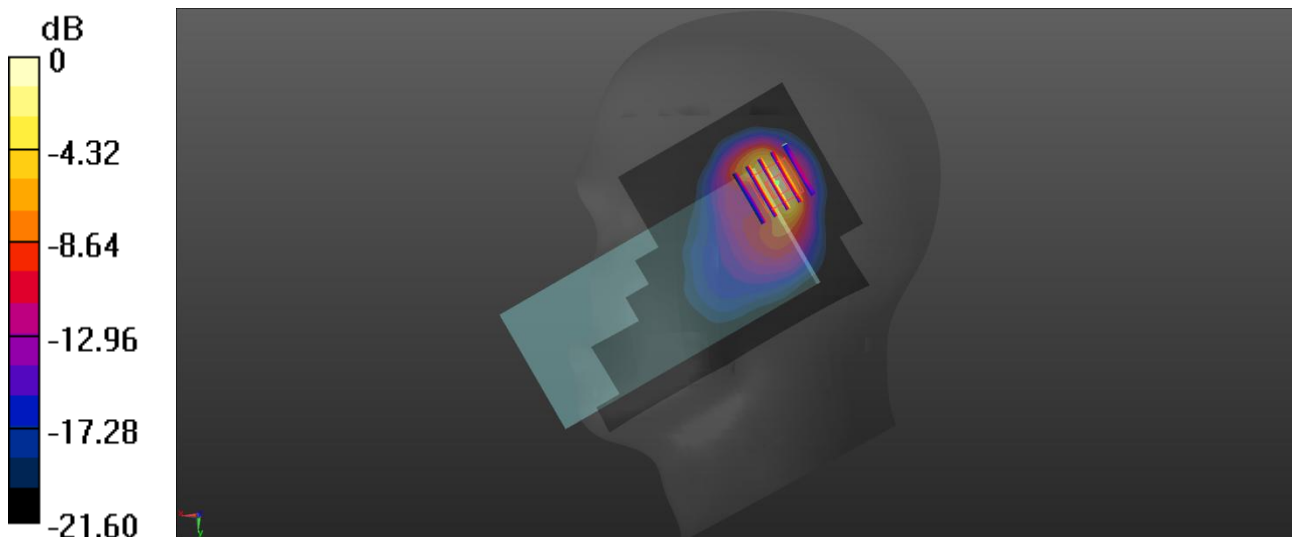

0 dB = 0.780 W/kg

## Meas14.Body-worn&Hotspot Top side 10mm LTE B4 Ch20175 ANT2

Date: 2026/2/1

Communication System Band: Band 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.343$  S/m;  $\epsilon_r = 39.569$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch20175/Area Scan (51x101x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.240 W/kg

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 5.625 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.300 W/kg

**SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.073 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 0.243 W/kg

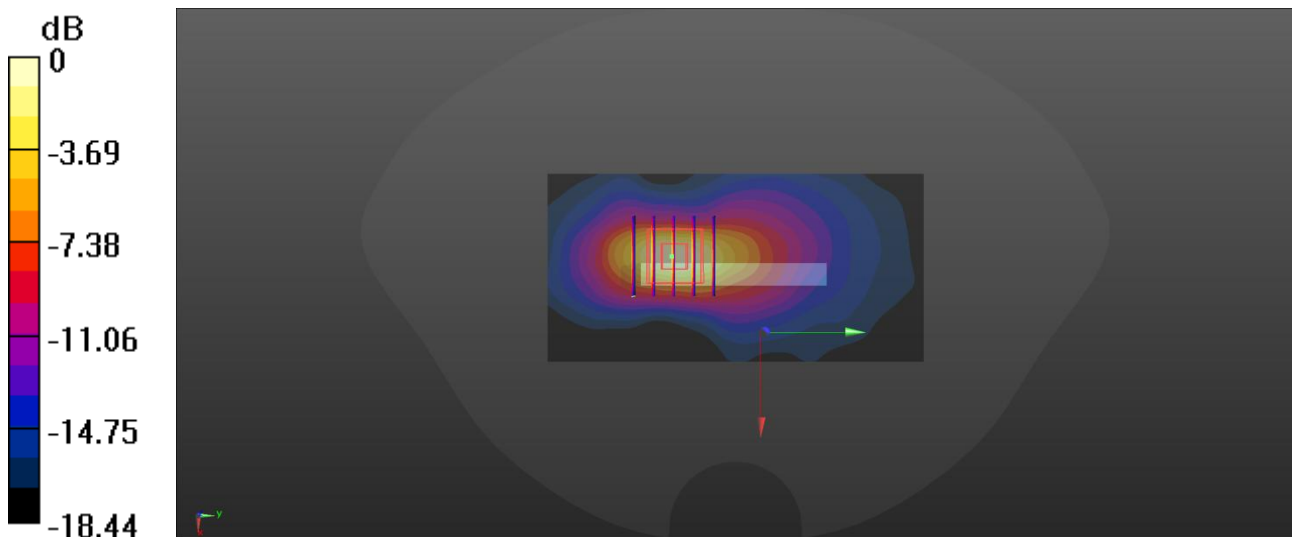

0 dB = 0.243 W/kg

## Meas15.Head Right cheek LTE B5 Ch20525 ANT2

Date: 2026/2/1

Communication System Band: Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.941$  S/m;  $\epsilon_r = 41.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch20525/Area Scan (81x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.666 W/kg

**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 16.27 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.00 W/kg

**SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.293 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.5%

Maximum value of SAR (measured) = 0.760 W/kg

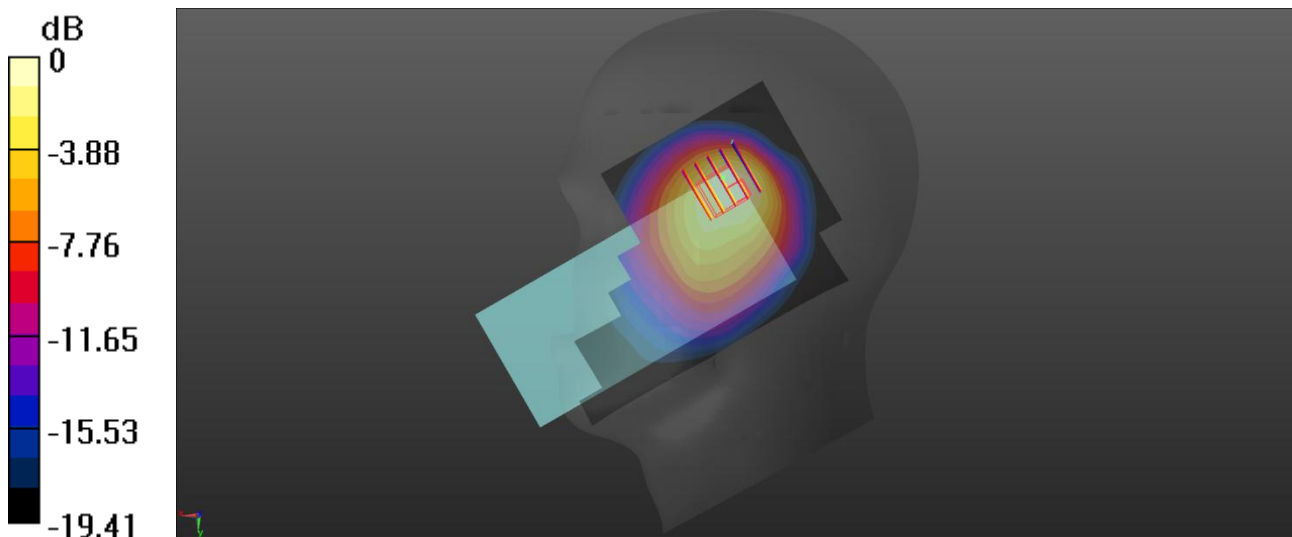

0 dB = 0.760 W/kg

## Meas16.Body-worn&Hotspot Back side 10mm LTE B5 Ch20525 ANT2

Date: 2026/2/1

Communication System Band: Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.941$  S/m;  $\epsilon_r = 41.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch20525/Area Scan (71x131x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.318 W/kg

**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 9.298 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.318 W/kg

**SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.115 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 0.242 W/kg

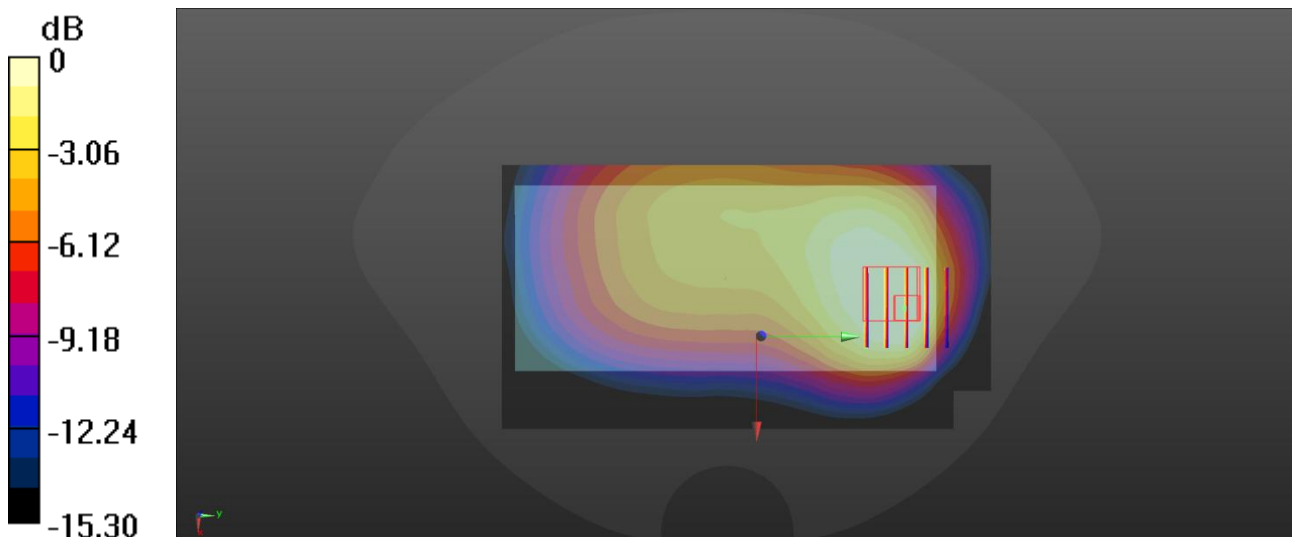

0 dB = 0.242 W/kg

## Meas17.Head Right tilt LTE B7 Ch21100 ANT2

Date: 2026/2/4

Communication System Band: Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.903$  S/m;  $\epsilon_r = 38.614$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch21100/Area Scan (91x151x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 0.904 W/kg

**Ch21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 1.996 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.188 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 39.9%

Maximum value of SAR (measured) = 0.880 W/kg

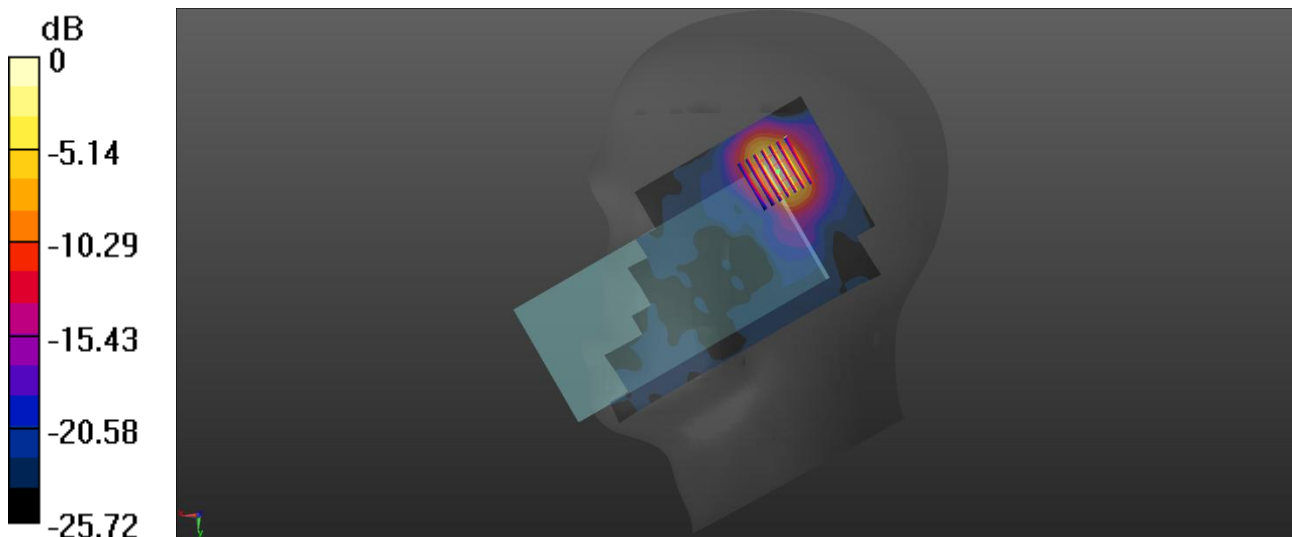

0 dB = 0.880 W/kg

## Meas18.Body-worn&Hotspot Top side 10mm LTE B7 Ch21100 ANT2

Date: 2026/2/4

Communication System Band: Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.903$  S/m;  $\epsilon_r = 38.614$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch21100/Area Scan (61x121x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 0.475 W/kg

**Ch21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 1.585 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.557 W/kg

**SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.110 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 0.439 W/kg

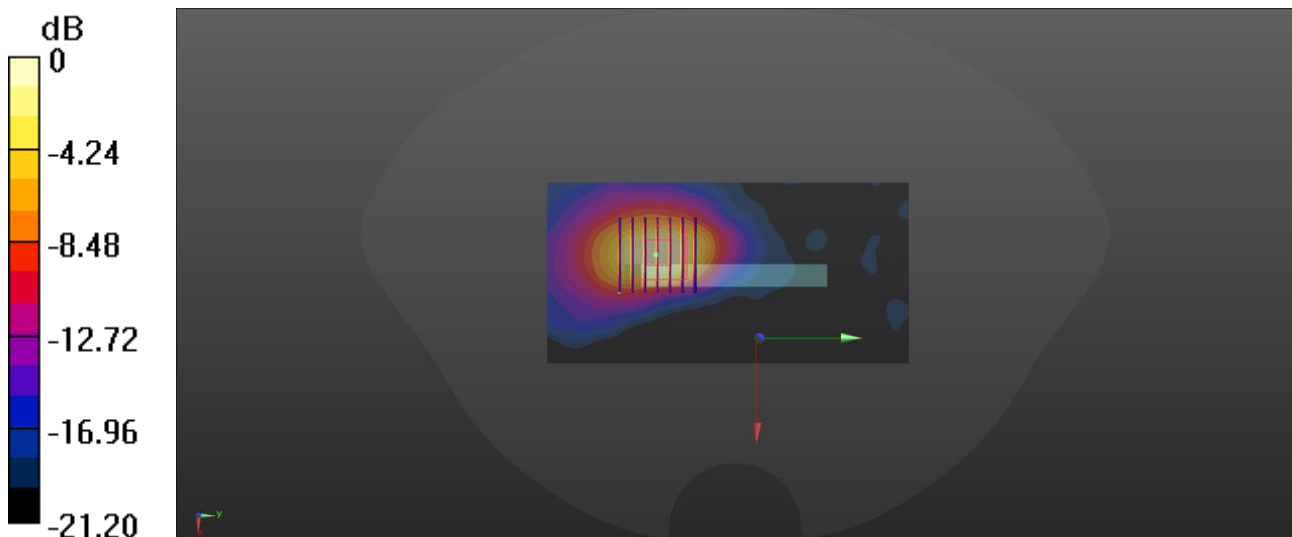

0 dB = 0.439 W/kg

## Meas19.Head Right tilt LTE B41 Ch40640 ANT2

Date: 2026/2/4

Communication System Band: Band 41; Frequency: 2595 MHz; Duty Cycle: 1: 1.58

Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.972$  S/m;  $\epsilon_r = 38.742$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch40640/Area Scan (91x151x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 0.832 W/kg

**Ch40640/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 2.739 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.188 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 0.817 W/kg

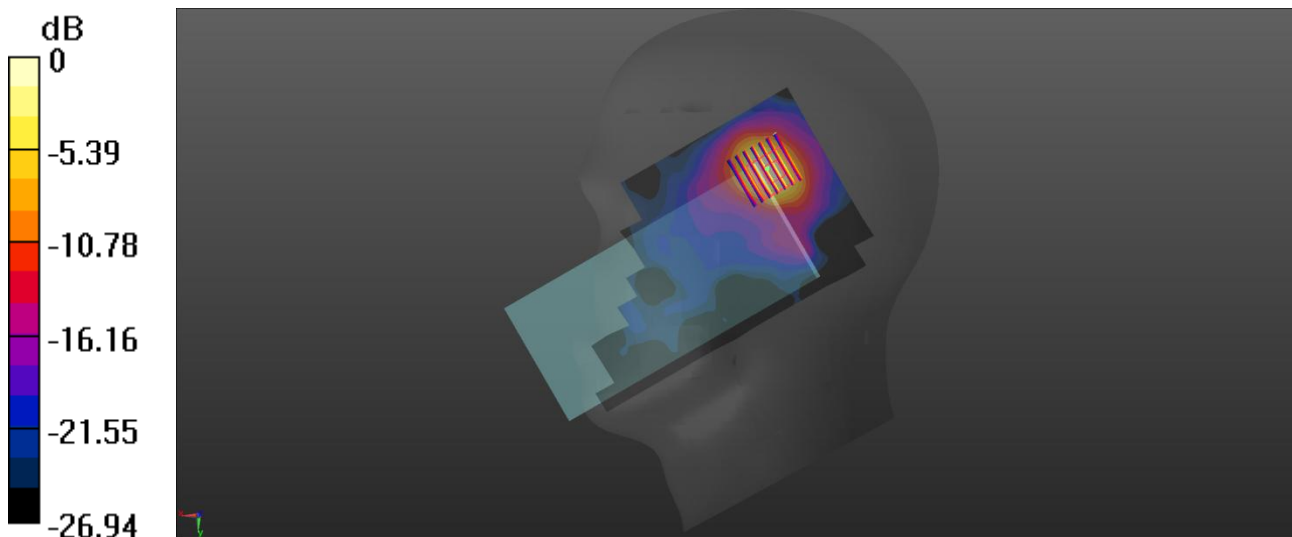

0 dB = 0.817 W/kg

## Meas20.Body-worn&Hotspot Top side 10mm LTE B41 Ch40640 ANT2

Date: 2026/2/4

Communication System Band: Band 41; Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.972$  S/m;  $\epsilon_r = 38.742$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch40640/Area Scan (61x121x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 0.474 W/kg

**Ch40640/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 0.5150 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.594 W/kg

**SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.114 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 46%

Maximum value of SAR (measured) = 0.465 W/kg

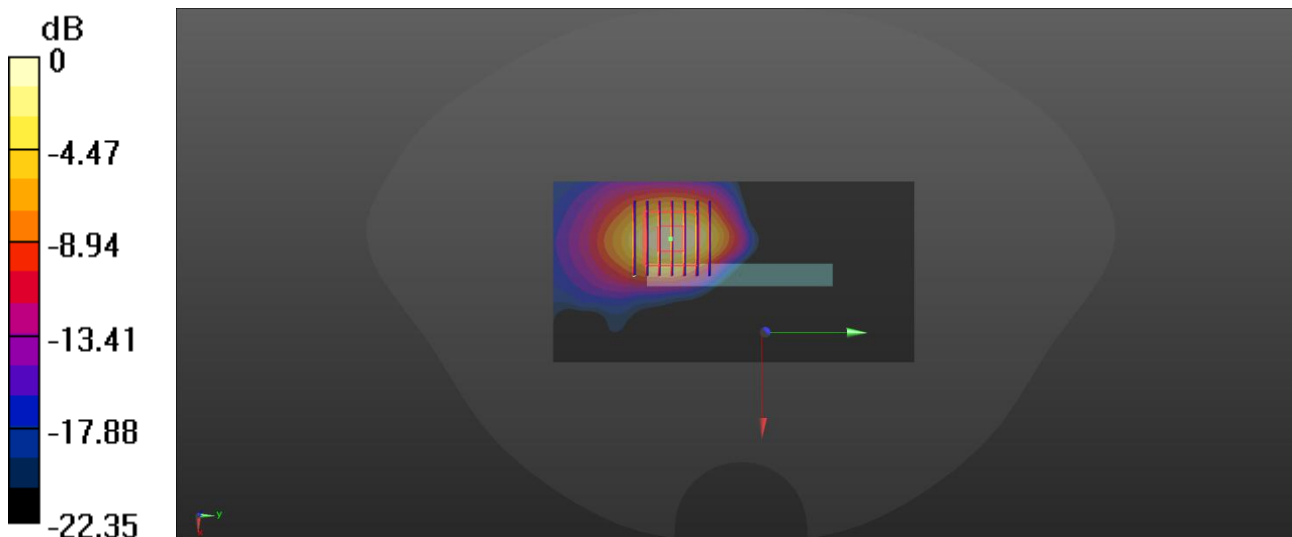

0 dB = 0.465 W/kg

## Meas21.Head Left cheek WLAN 2.4G Ch6 ANT12

Date: 2026/2/3

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.825$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch6/Area Scan (91x151x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 1.01 W/kg

**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 10.79 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.603 W/kg; SAR(10 g) = 0.299 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.950 W/kg

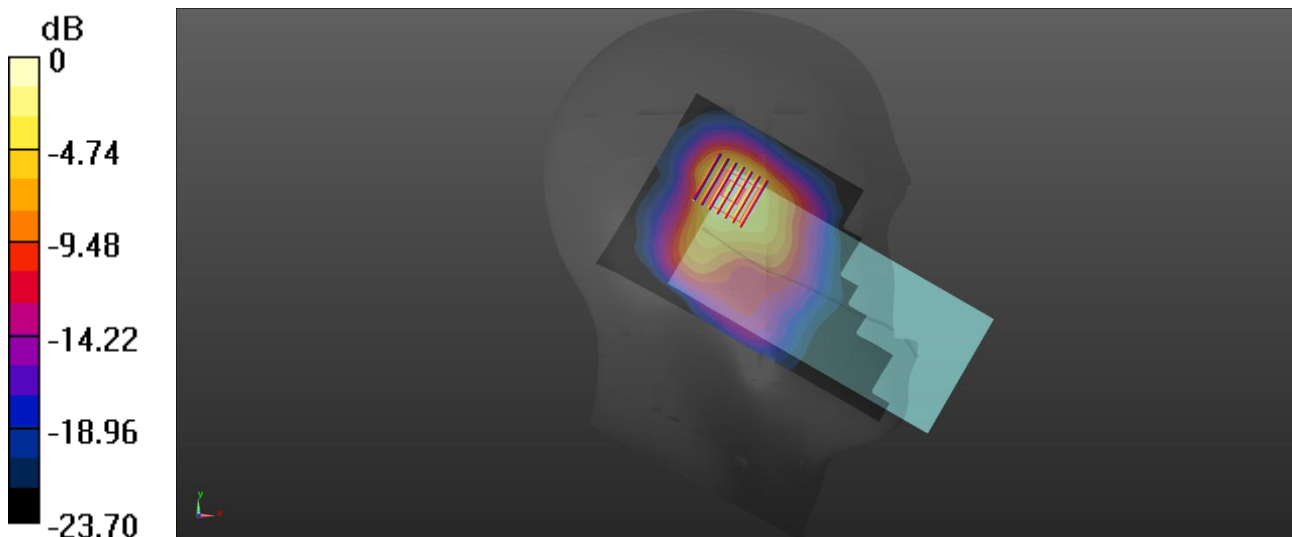

0 dB = 0.950 W/kg

## Meas22.Body-worn&Hotspot Back side 10mm WLAN 2.4G Ch6 ANT13

Date: 2026/2/3

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.825$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch6/Area Scan (91x161x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.465 W/kg

**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.698 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.611 W/kg

**SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.140 W/kg**

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 41.5%

Maximum value of SAR (measured) = 0.452 W/kg

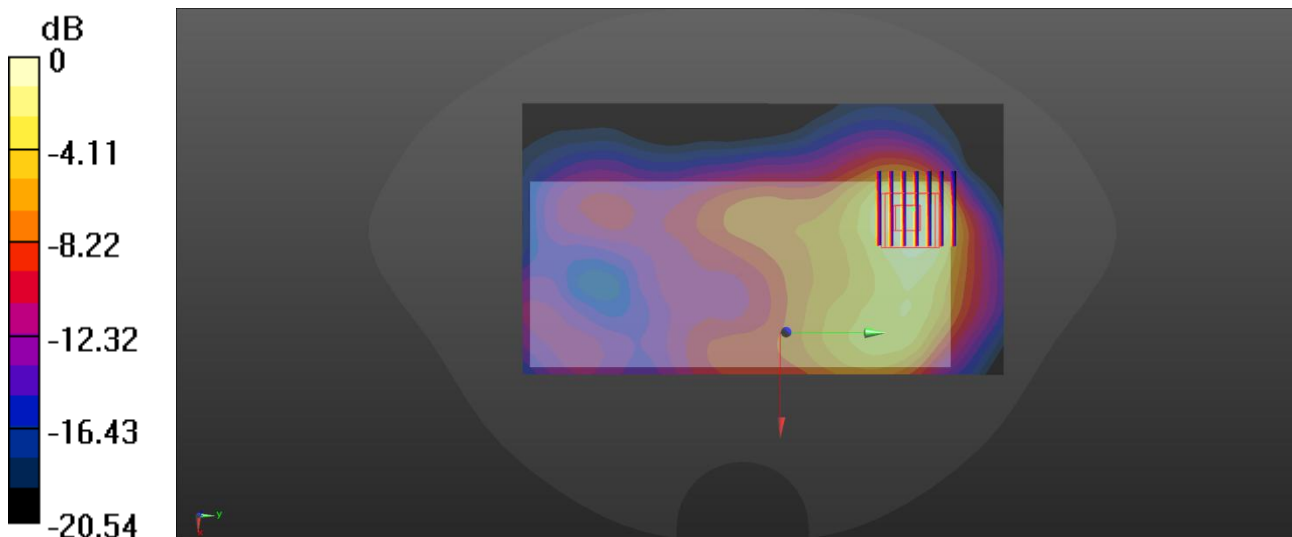

0 dB = 0.452 W/kg

## Meas23.Head Left cheek WLAN 5.2G Ch38 ANT14

Date: 2026/2/5

Communication System Band: WLAN(n)40Mhz; Frequency: 5190 MHz;Duty Cycle: 1:1.05

Medium parameters used:  $f = 5190$  MHz;  $\sigma = 4.561$  S/m;  $\epsilon_r = 35.525$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Ambient Temperature:22.2°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5, 5, 5); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch38/Area Scan (101x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.698 W/kg

**Ch38/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.384 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.107 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.680 W/kg

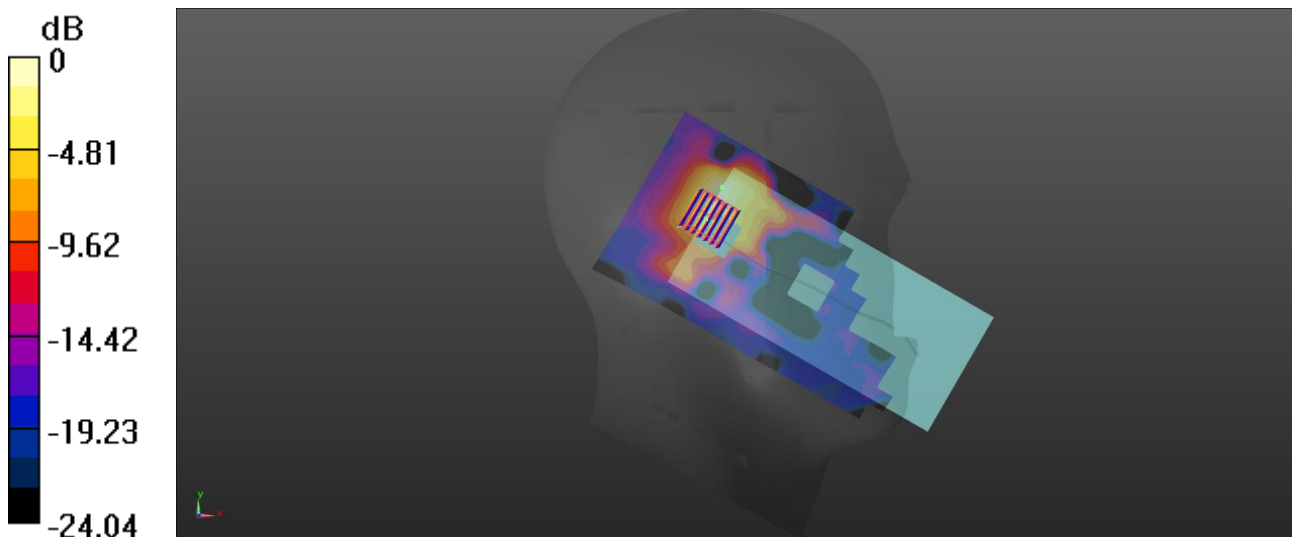

0 dB = 0.680 W/kg

## Meas24.Head Right tilt WLAN 5.3G Ch52 ANT14

Date: 2026/2/5

Communication System Band: WLAN(n)20Mhz; Frequency: 5260 MHz;Duty Cycle: 1: 1.03

Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.628$  S/m;  $\epsilon_r = 35.581$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature:22.2°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.85, 4.85, 4.85); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch52/Area Scan (101x191x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.662 W/kg

**Ch52/Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 7.796 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.096 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 0.676 W/kg

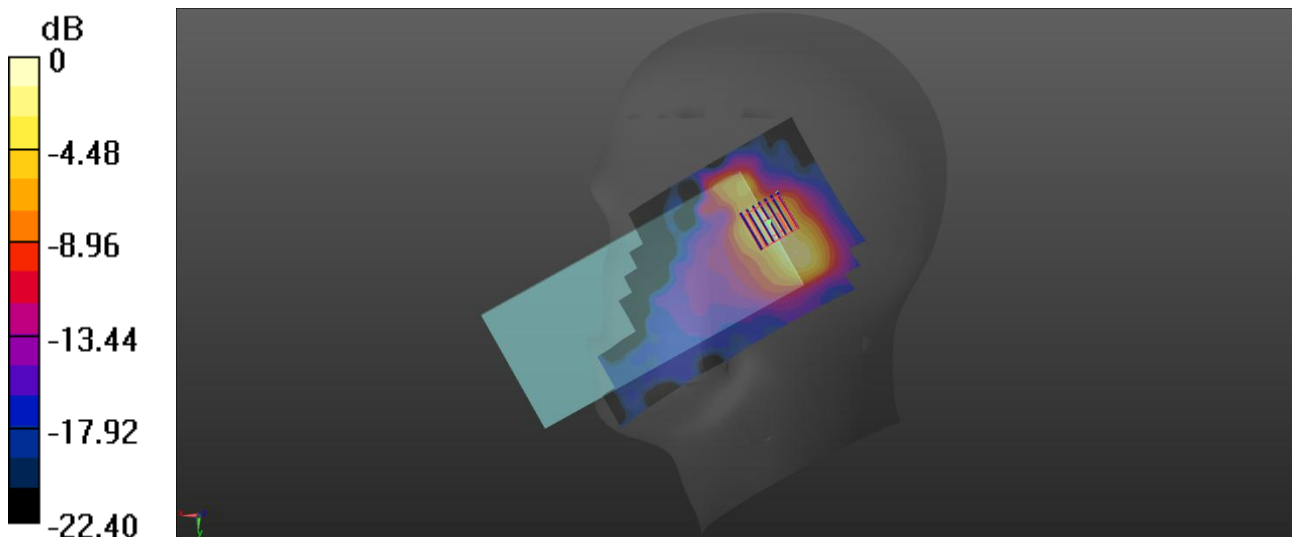

0 dB = 0.676 W/kg

## Meas25.Head Left tilt WLAN 5.6G Ch116 ANT14

Date: 2026/2/5

Communication System Band: WLAN(ac) 20Mhz; Frequency: 5580 MHz; Duty Cycle: 1: 1.03

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.963$  S/m;  $\epsilon_r = 34.92$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.39, 4.39, 4.39); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch116/Area Scan (101x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.873 W/kg

**Ch116/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.866 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.60 W/kg

**SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.122 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 0.952 W/kg

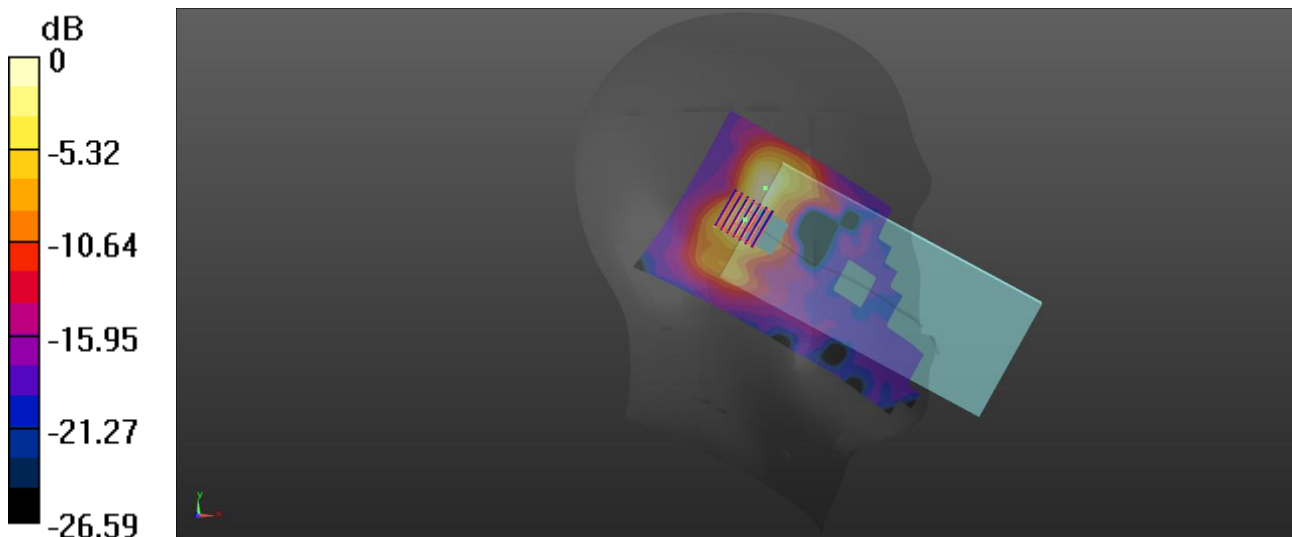

0 dB = 0.952 W/kg

## Meas26.Head Right tilt WLAN 5.8G Ch165 ANT14

Date: 2026/2/6

Communication System Band: WLAN(n)20Mhz; Frequency: 5825 MHz;Duty Cycle: 1: 1.03

Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.216$  S/m;  $\epsilon_r = 34.442$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature:21.9°C Liquid Temperature:20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.41, 4.41, 4.41); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch165/Area Scan (101x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.979 W/kg

**Ch165/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.595 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.102 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 0.880 W/kg

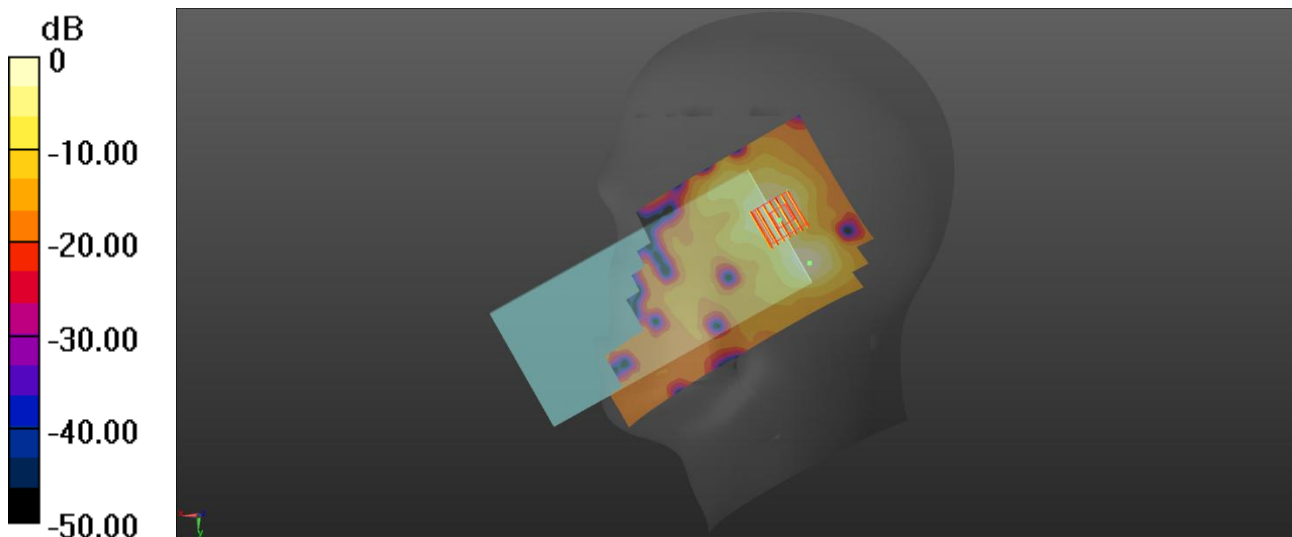

0 dB = 0.880 W/kg

## Meas27.Body-worn&Hotspot Back side 10mm WLAN 5.2G Ch38 ANT14

Date: 2026/2/5

Communication System Band: WLAN(n)40Mhz; Frequency: 5190 MHz;Duty Cycle: 1: 1.05

Medium parameters used:  $f = 5190$  MHz;  $\sigma = 4.561$  S/m;  $\epsilon_r = 35.525$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.2°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5, 5, 5); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch38/Area Scan (101x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.648 W/kg

**Ch38/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.177 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.113 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 0.684 W/kg

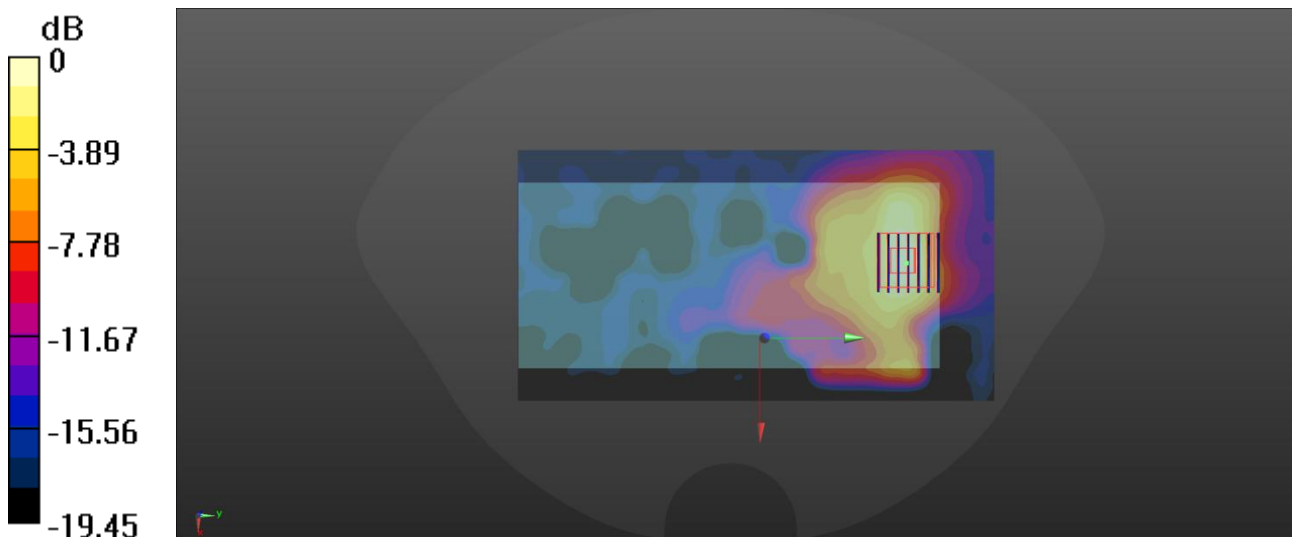

0 dB = 0.684 W/kg

## Meas28.Body-worn&Hotspot Back side 10mm WLAN 5.3G Ch52 ANT14

Date: 2026/2/5

Communication System Band: WLAN(n)40Mhz; Frequency: 5260 MHz;Duty Cycle: 1: 1.03

Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.628$  S/m;  $\epsilon_r = 35.581$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.2°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.85, 4.85, 4.85); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch52/Area Scan (101x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.748 W/kg

**Ch52/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.8840 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.126 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 0.729 W/kg

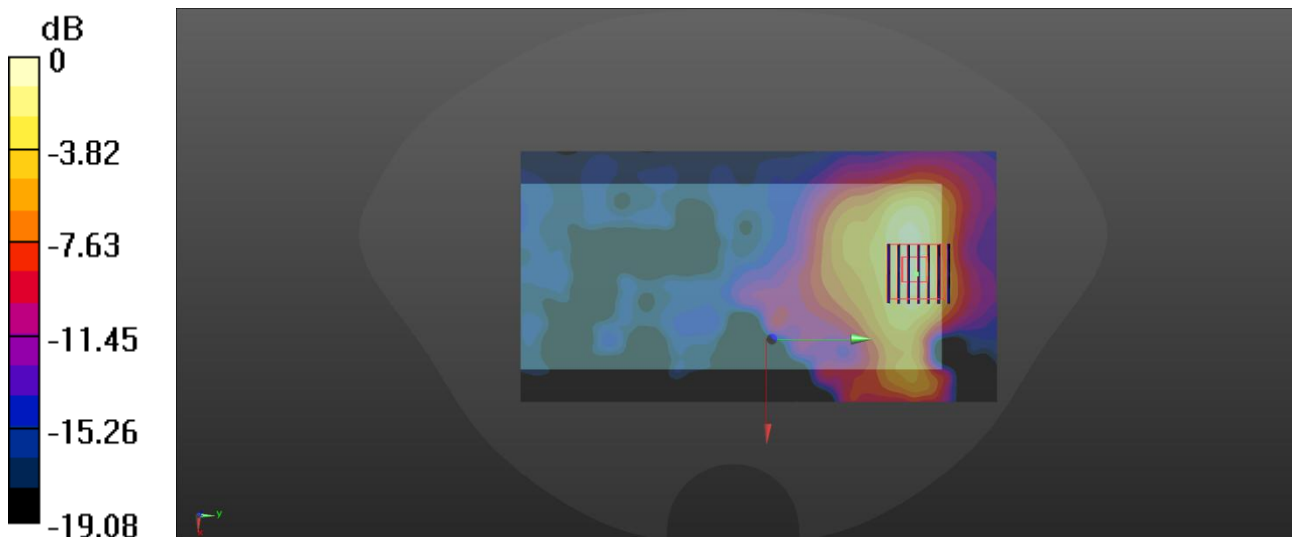

0 dB = 0.729 W/kg

## Meas29.Body-worn&Hotspot Back side 10mm WLAN 5.6G Ch116 ANT14

Date: 2026/2/5

Communication System Band: WLAN(ac) 20Mhz; Frequency: 5580 MHz;Duty Cycle: 1: 1.03

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.963$  S/m;  $\epsilon_r = 34.92$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.2°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.39, 4.39, 4.39); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch116/Area Scan (101x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.714 W/kg

**Ch116/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.342 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.115 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.681 W/kg

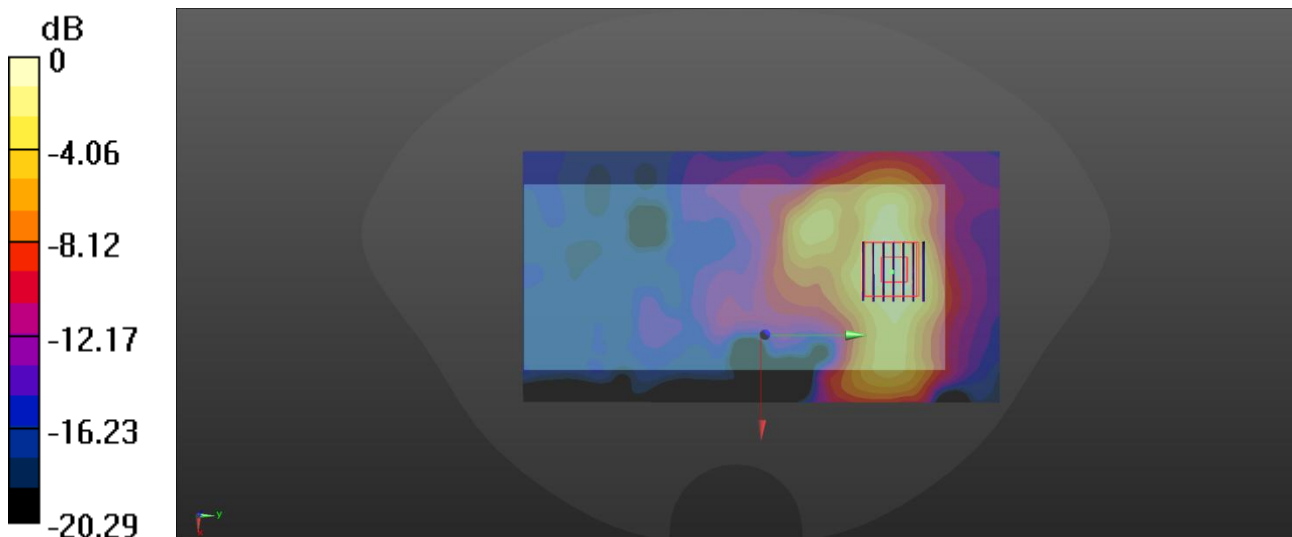

0 dB = 0.681 W/kg

## Meas30.Body-worn&Hotspot Back side 10mm WLAN 5.8G Ch165 ANT14

Date: 2026/2/6

Communication System Band: WLAN(n)20Mhz; Frequency: 5825 MHz;Duty Cycle: 1: 1.03

Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.216$  S/m;  $\epsilon_r = 34.442$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:21.9°C Liquid Temperature:20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.41, 4.41, 4.41); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch165/Area Scan (101x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.538 W/kg

**Ch165/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.6970 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.093 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 47.4%

Maximum value of SAR (measured) = 0.588 W/kg

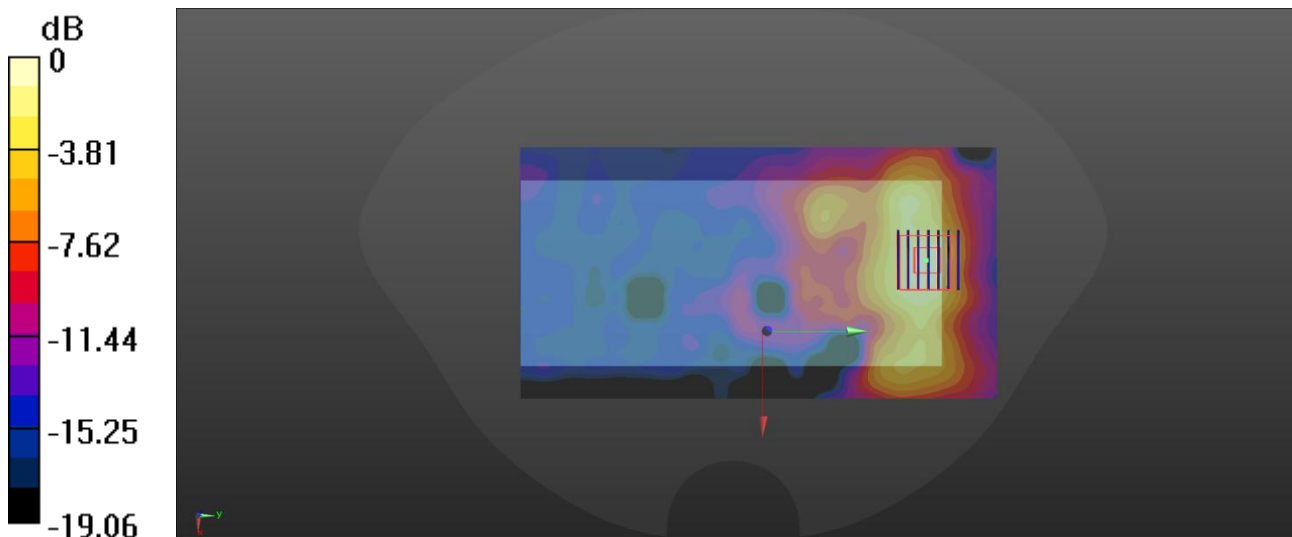

0 dB = 0.588 W/kg

## Meas31.Head Left cheek BT Ch0 ANT12

Date: 2026/2/3

Communication System Band: BT; Frequency: 2402 MHz; Duty Cycle: 1: 1.73

Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.79$  S/m;  $\epsilon_r = 38.877$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch0/Area Scan (91x151x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 0.211 W/kg

**Ch0/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 4.210 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.251 W/kg

**SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.061 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 0.197 W/kg

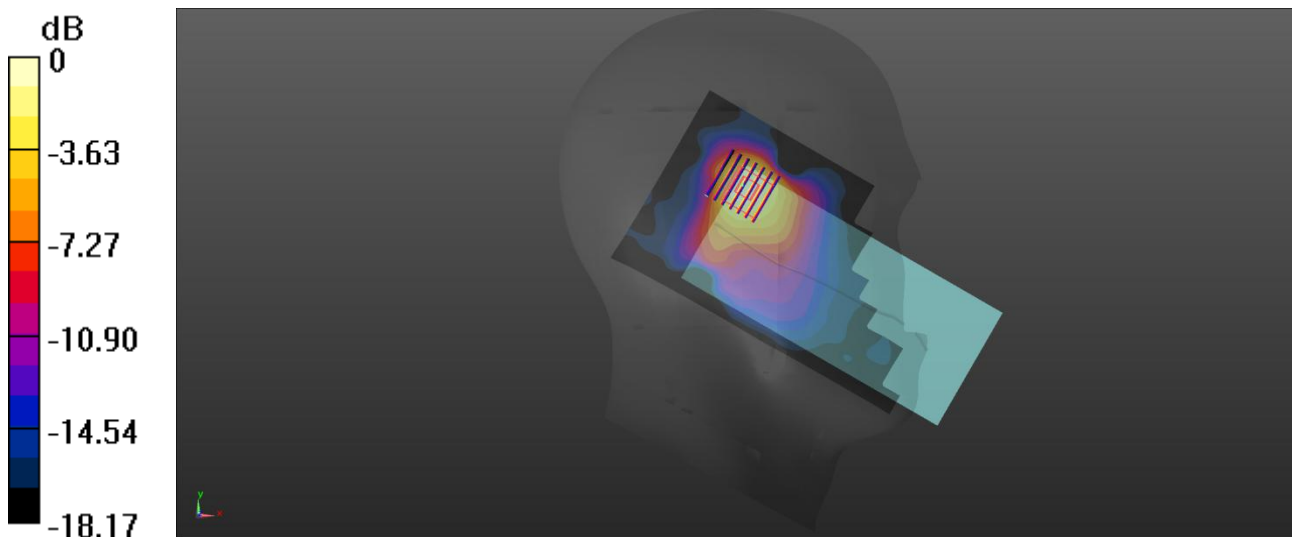

0 dB = 0.197 W/kg

## Meas32.Body-worn&Hotspot Back side 10mm BT Ch0 ANT12

Date: 2026/2/3

Communication System Band: BT; Frequency: 2402 MHz; Duty Cycle: 1: 1.73

Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.79$  S/m;  $\epsilon_r = 38.877$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch0/Area Scan (91x161x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 0.0863 W/kg

**Ch0/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 0.8740 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.105 W/kg

**SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.025 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 41%

Maximum value of SAR (measured) = 0.0788 W/kg

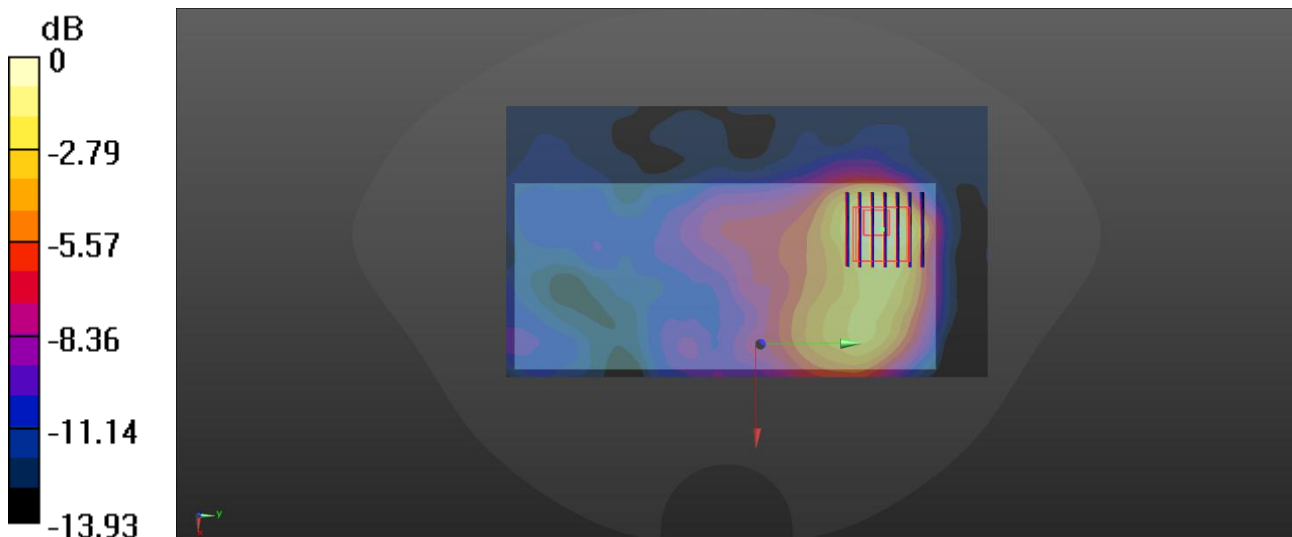

0 dB = 0.0788 W/kg