


Main Antenna: Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_10.17.31

EUT Name:	Mobile Phone	Temp.(°C):	20.1
Model Number:	X6895B	Humidity (%RH):	45
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH6 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器:A04 数据线:A08 ANT12

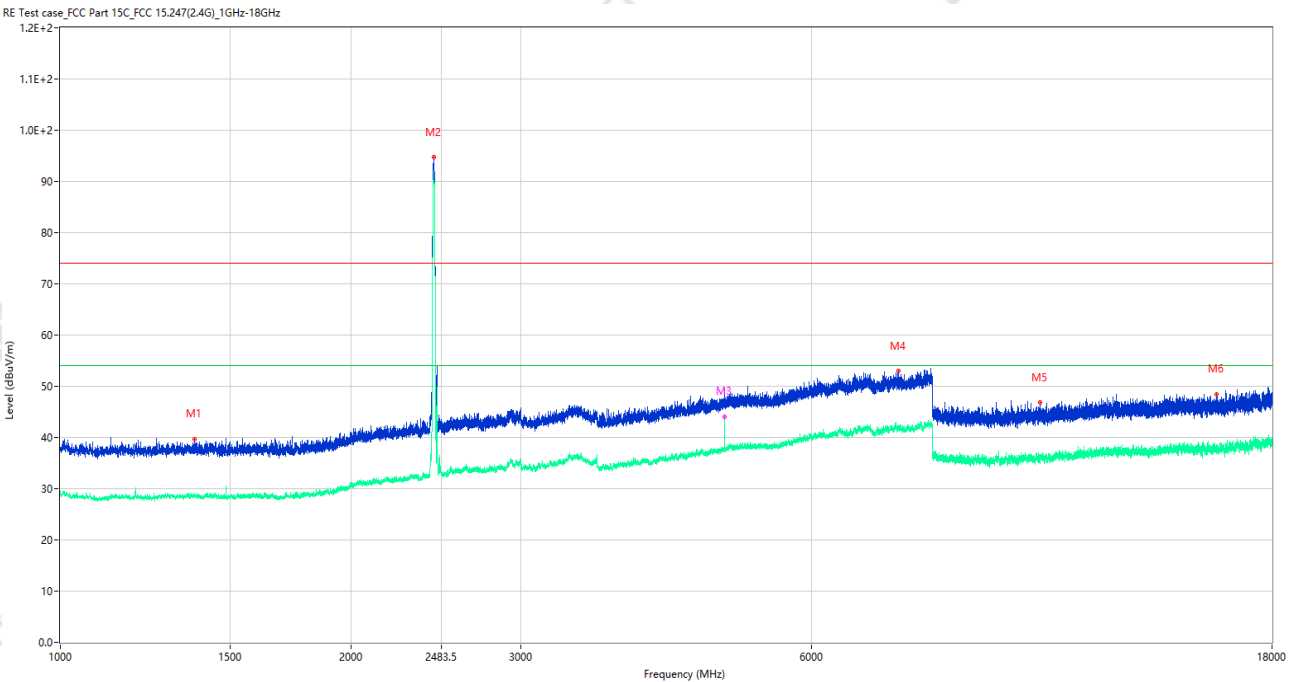

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1376.750	39.59	-16.00	74.0	34.41	Peak	360.00	150	Vertical	Pass
1**	1376.750	28.62	-16.00	54.0	25.38	AV	360.00	150	Vertical	Pass
2	2438.250	94.67	-12.38	74.0	-20.67	Peak	135.00	150	Vertical	N/A
2**	2438.250	91.82	-12.38	54.0	-37.82	AV	135.00	150	Vertical	N/A
3	4874.500	49.17	-2.25	74.0	24.83	Peak	0.00	150	Vertical	Pass
3**	4874.500	44.04	-2.25	54.0	9.96	AV	0.00	150	Vertical	Pass
4	7377.500	52.91	0.92	74.0	21.09	Peak	25.00	150	Vertical	Pass
4**	7377.500	41.60	0.92	54.0	12.40	AV	25.00	150	Vertical	Pass
5	10359.000	46.82	-3.17	74.0	27.18	Peak	178.00	150	Vertical	Pass
5**	10359.000	35.59	-3.17	54.0	18.41	AV	178.00	150	Vertical	Pass
6	15758.500	48.47	-1.97	74.0	25.53	Peak	89.00	150	Vertical	Pass
6**	15758.500	37.98	-1.97	54.0	16.02	AV	89.00	150	Vertical	Pass


Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_10.24.20

EUT Name:	Mobile Phone	Temp.(°C):	20.1
Model Number:	X6895B	Humidity (%RH):	45
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH6 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器:A04 数据线:A08 ANT12

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

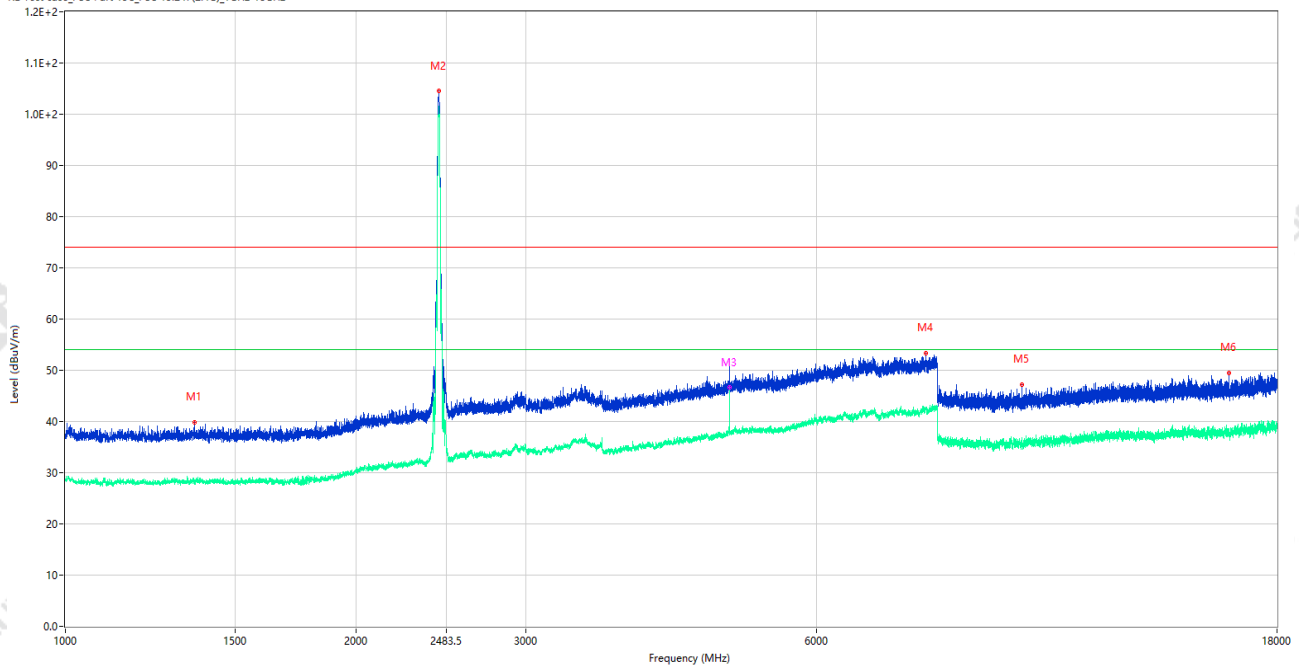

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1361.250	39.87	-15.83	74.0	34.13	Peak	140.00	150	Horizontal	Pass
1**	1361.250	28.58	-15.83	54.0	25.42	AV	140.00	150	Horizontal	Pass
2	2438.250	104.54	-12.38	74.0	-30.54	Peak	240.00	150	Horizontal	N/A
2**	2438.250	101.64	-12.38	54.0	-47.64	AV	240.00	150	Horizontal	N/A
3	4874.500	50.53	-2.25	74.0	23.47	Peak	51.00	150	Horizontal	Pass
3**	4874.500	46.69	-2.25	54.0	7.31	AV	51.00	150	Horizontal	Pass
4	7783.500	53.39	1.49	74.0	20.61	Peak	246.00	150	Horizontal	Pass
4**	7783.500	42.42	1.49	54.0	11.58	AV	246.00	150	Horizontal	Pass
5	9795.500	47.22	-3.45	74.0	26.78	Peak	66.00	150	Horizontal	Pass
5**	9795.500	35.40	-3.45	54.0	18.60	AV	66.00	150	Horizontal	Pass
6	16056.001	49.44	-1.57	74.0	24.56	Peak	39.00	150	Horizontal	Pass
6**	16056.001	37.93	-1.57	54.0	16.07	AV	39.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_20.41.59

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH6 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

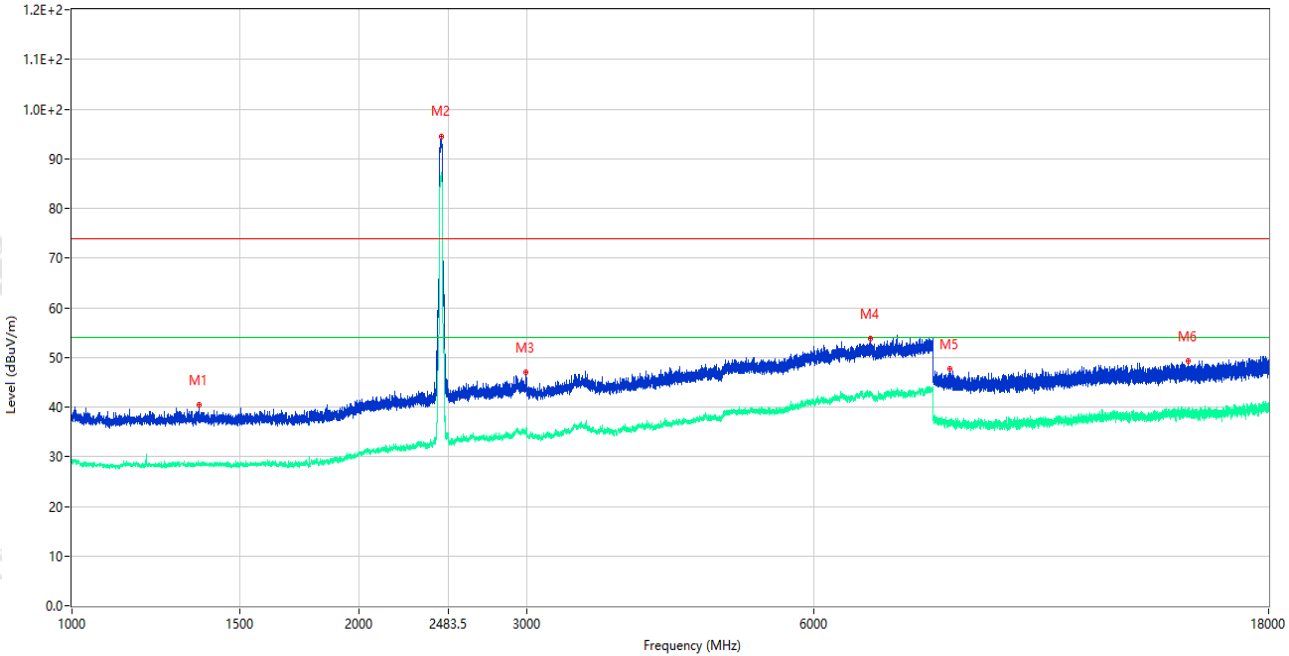

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1358.750	40.39	-15.86	74.0	33.61	Peak	196.00	150	Vertical	Pass
1**	1358.750	28.49	-15.86	54.0	25.51	AV	196.00	150	Vertical	Pass
2	2440.250	94.55	-12.37	74.0	-20.55	Peak	90.00	150	Vertical	N/A
2**	2440.250	86.75	-12.37	54.0	-32.75	AV	90.00	150	Vertical	N/A
3	2994.250	47.08	-8.93	74.0	26.92	Peak	68.00	150	Vertical	Pass
3**	2994.250	35.32	-8.93	54.0	18.68	AV	68.00	150	Vertical	Pass
4	6886.500	53.84	0.62	74.0	20.16	Peak	143.00	150	Vertical	Pass
4**	6886.500	42.38	0.62	54.0	11.62	AV	143.00	150	Vertical	Pass
5	8339.000	47.68	-4.79	74.0	26.32	Peak	360.00	150	Vertical	Pass
5**	8339.000	36.46	-4.79	54.0	17.54	AV	360.00	150	Vertical	Pass
6	14817.000	49.31	-0.05	74.0	24.69	Peak	359.00	150	Vertical	Pass
6**	14817.000	38.21	-0.05	54.0	15.79	AV	359.00	150	Vertical	Pass


Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_20.36.41

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH6 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

RE Test case FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

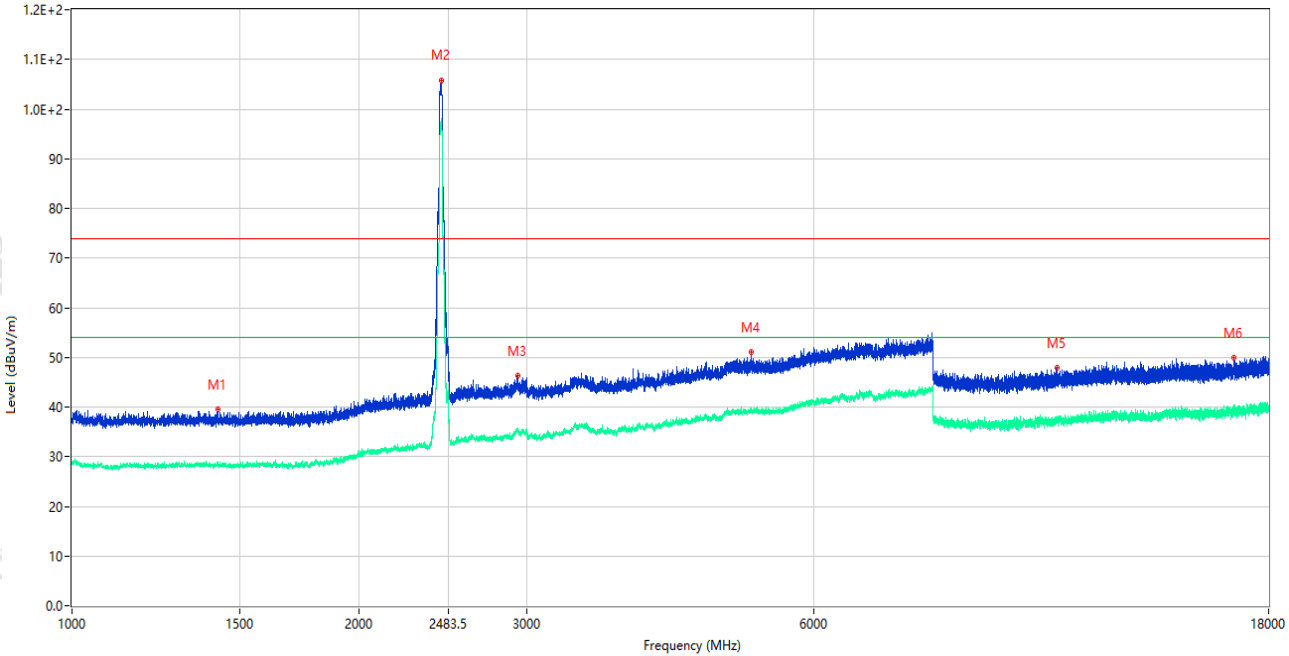

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1421.750	39.57	-15.95	74.0	34.43	Peak	200.00	150	Horizontal	Pass
1**	1421.750	28.38	-15.95	54.0	25.62	AV	200.00	150	Horizontal	Pass
2	2438.500	105.87	-12.37	74.0	-31.87	Peak	23.00	150	Horizontal	N/A
2**	2438.500	97.76	-12.37	54.0	-43.76	AV	23.00	150	Horizontal	N/A
3	2932.500	46.31	-7.99	74.0	27.69	Peak	360.00	150	Horizontal	Pass
3**	2932.500	35.29	-7.99	54.0	18.71	AV	360.00	150	Horizontal	Pass
4	5157.000	50.99	-2.05	74.0	23.01	Peak	77.00	150	Horizontal	Pass
4**	5157.000	39.45	-2.05	54.0	14.55	AV	77.00	150	Horizontal	Pass
5	10810.500	47.99	-3.17	74.0	26.01	Peak	176.00	150	Horizontal	Pass
5**	10810.500	37.14	-3.17	54.0	16.86	AV	176.00	150	Horizontal	Pass
6	16563.500	49.87	-1.12	74.0	24.13	Peak	292.00	150	Horizontal	Pass
6**	16563.500	39.39	-1.12	54.0	14.61	AV	292.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_20.48.13

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH6 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

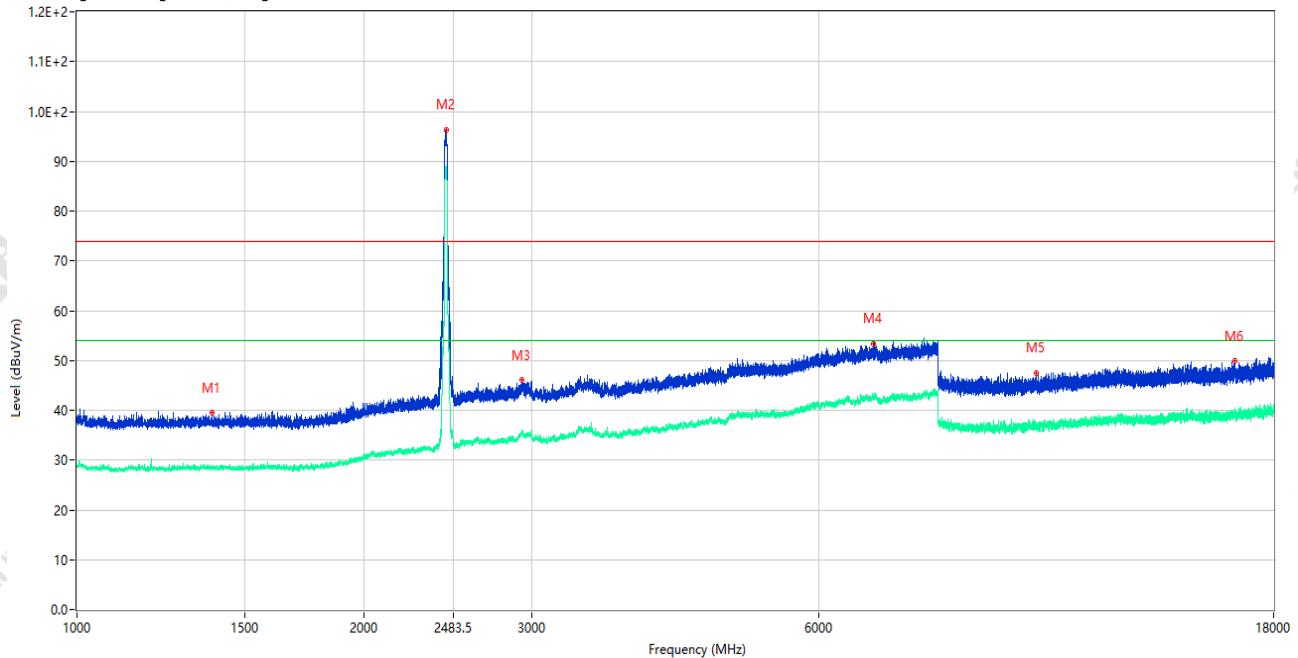

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1385.750	39.62	-16.00	74.0	34.38	Peak	2.00	150	Vertical	Pass
1**	1385.750	28.39	-16.00	54.0	25.61	AV	2.00	150	Vertical	Pass
2	2439.500	96.38	-12.37	74.0	-22.38	Peak	166.00	150	Vertical	N/A
2**	2439.500	88.45	-12.37	54.0	-34.45	AV	166.00	150	Vertical	N/A
3	2926.750	46.15	-8.11	74.0	27.85	Peak	360.00	150	Vertical	Pass
3**	2926.750	35.47	-8.11	54.0	18.53	AV	360.00	150	Vertical	Pass
4	6846.500	53.42	0.73	74.0	20.58	Peak	149.00	150	Vertical	Pass
4**	6846.500	42.28	0.73	54.0	11.72	AV	149.00	150	Vertical	Pass
5	10135.500	47.55	-3.92	74.0	26.45	Peak	322.00	150	Vertical	Pass
5**	10135.500	37.05	-3.92	54.0	16.95	AV	322.00	150	Vertical	Pass
6	16388.500	49.99	-1.43	74.0	24.01	Peak	60.00	150	Vertical	Pass
6**	16388.500	39.00	-1.43	54.0	15.00	AV	60.00	150	Vertical	Pass


Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_20.52.47

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH6 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

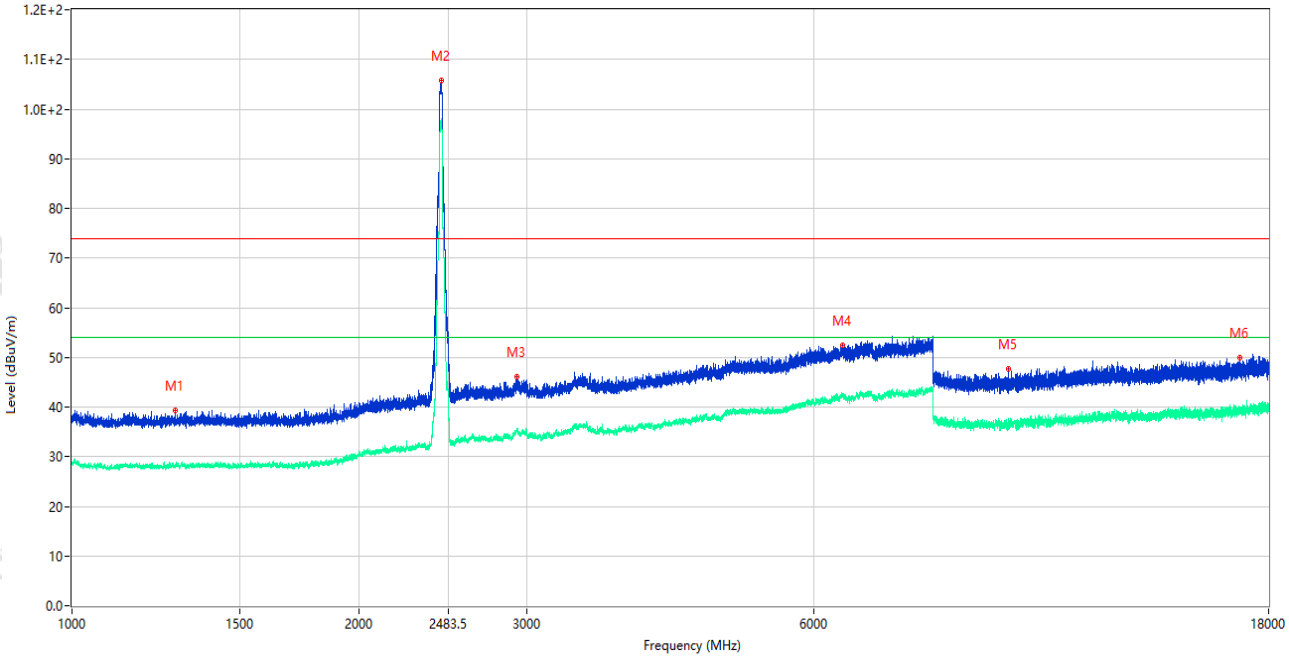


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1282.250	39.26	-15.94	74.0	34.74	Peak	0.00	150	Horizontal	Pass
1**	1282.250	27.95	-15.94	54.0	26.05	AV	0.00	150	Horizontal	Pass
2	2438.250	105.78	-12.38	74.0	-31.78	Peak	304.00	150	Horizontal	N/A
2**	2438.250	97.90	-12.38	54.0	-43.90	AV	304.00	150	Horizontal	N/A
3	2929.250	46.09	-7.95	74.0	27.91	Peak	145.00	150	Horizontal	Pass
3**	2929.250	35.69	-7.95	54.0	18.31	AV	145.00	150	Horizontal	Pass
4	6433.000	52.40	0.09	74.0	21.60	Peak	320.00	150	Horizontal	Pass
4**	6433.000	41.95	0.09	54.0	12.05	AV	320.00	150	Horizontal	Pass
5	9606.000	47.71	-3.24	74.0	26.29	Peak	154.00	150	Horizontal	Pass
5**	9606.000	36.60	-3.24	54.0	17.40	AV	154.00	150	Horizontal	Pass
6	16805.500	49.99	-1.29	74.0	24.01	Peak	0.00	150	Horizontal	Pass
6**	16805.500	39.57	-1.29	54.0	14.43	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_21.35.24

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	Normal working Link(2.4G WIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

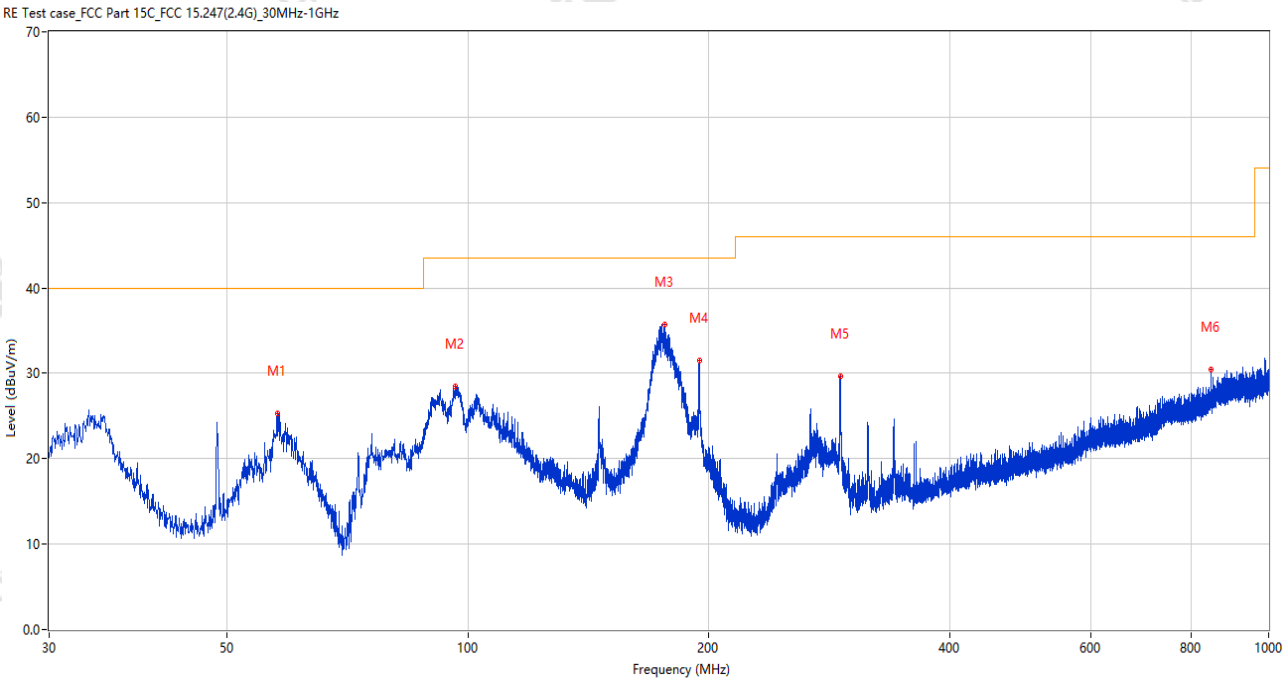


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	57.936	25.26	-25.64	40.0	14.74	Peak	360.00	100	Vertical	Pass
2	96.590	28.50	-26.43	43.5	15.00	Peak	98.00	100	Vertical	Pass
3	176.324	35.69	-28.17	43.5	7.81	Peak	227.00	200	Vertical	Pass
4	194.512	31.45	-25.64	43.5	12.05	Peak	282.00	200	Vertical	Pass
5	291.706	29.63	-23.20	46.0	16.37	Peak	54.00	100	Vertical	Pass
6	847.710	30.41	-10.51	46.0	15.59	Peak	0.00	200	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_21.47.24

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	Normal working Link(2.4G WIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

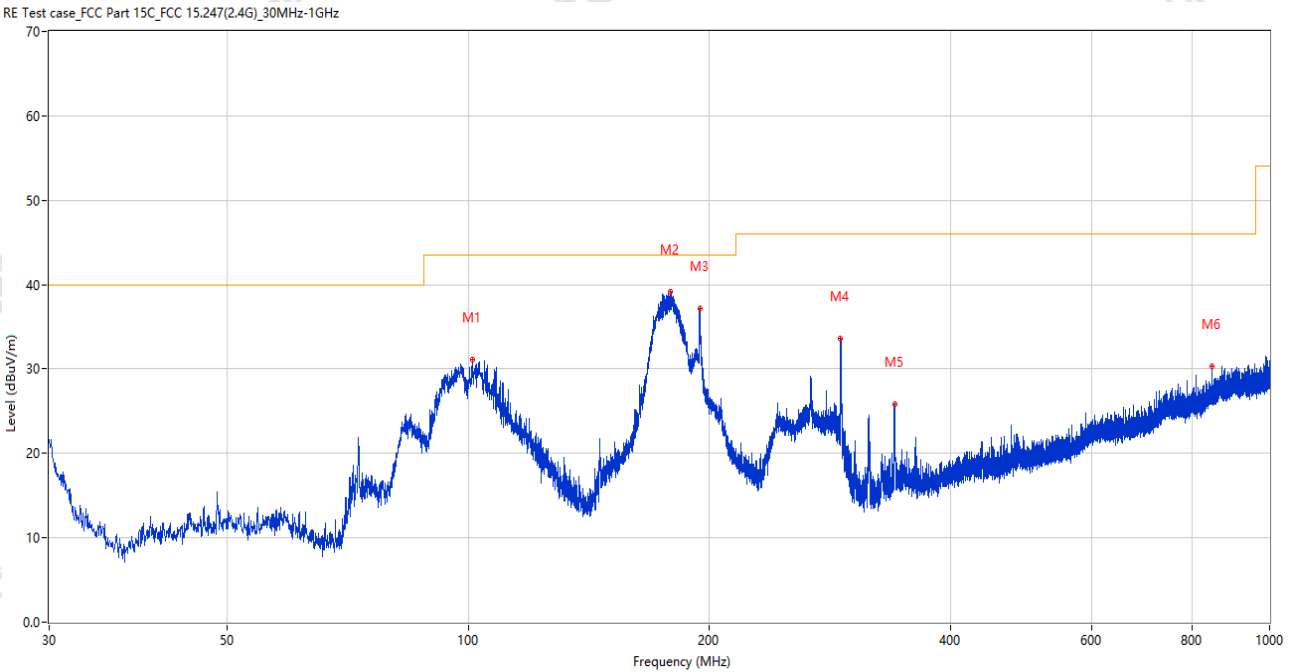


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	101.246	31.13	-26.10	43.5	12.37	Peak	289.00	200	Horizontal	Pass
2	178.507	39.19	-27.95	43.5	4.31	Peak	81.00	100	Horizontal	Pass
3	194.512	37.19	-25.64	43.5	6.31	Peak	360.00	200	Horizontal	Pass
4	291.658	33.64	-23.20	46.0	12.36	Peak	81.00	100	Horizontal	Pass
5	340.303	25.90	-21.90	46.0	20.10	Peak	252.00	100	Horizontal	Pass
6	847.710	30.29	-10.51	46.0	15.71	Peak	357.00	200	Horizontal	Pass

Aux. Antenna: Test Result

Project Number: P-CC26010282
Test Time: 2026-02-04_21.28.10

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH6 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13

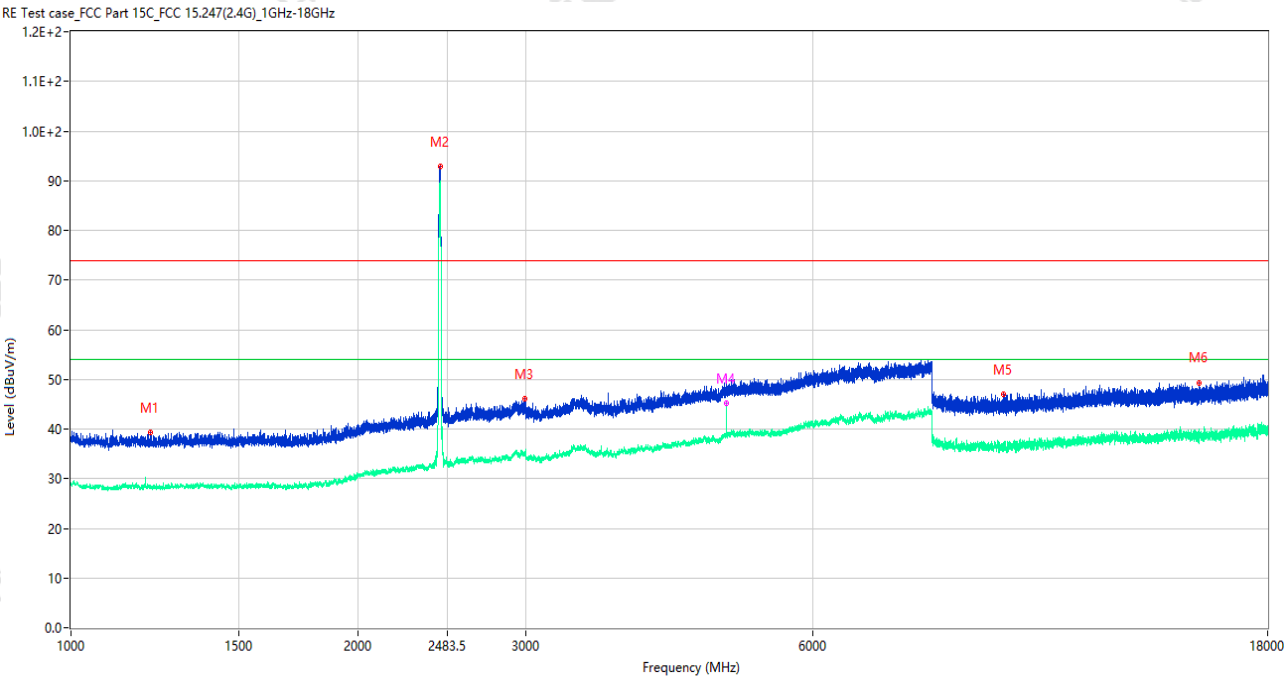

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1210.500	39.39	-15.87	74.0	34.61	Peak	207.00	150	Vertical	Pass
1**	1210.500	28.64	-15.87	54.0	25.36	AV	207.00	150	Vertical	Pass
2	2438.250	92.86	-12.38	74.0	-18.86	Peak	262.00	150	Vertical	N/A
2**	2438.250	89.98	-12.38	54.0	-35.98	AV	262.00	150	Vertical	Fail
3	2996.000	46.16	-8.83	74.0	27.84	Peak	194.00	150	Vertical	Pass
3**	2996.000	35.27	-8.83	54.0	18.73	AV	194.00	150	Vertical	Pass
4	4874.500	49.57	-2.25	74.0	24.43	Peak	360.00	150	Vertical	Pass
4**	4874.500	45.13	-2.25	54.0	8.87	AV	360.00	150	Vertical	Pass
5	9508.000	47.01	-3.43	74.0	26.99	Peak	10.00	150	Vertical	Pass
5**	9508.000	36.03	-3.43	54.0	17.97	AV	10.00	150	Vertical	Pass
6	15267.500	49.36	-1.05	74.0	24.64	Peak	0.00	150	Vertical	Pass
6**	15267.500	38.90	-1.05	54.0	15.10	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_21.24.41

EUT Name: Mobile Phone

Temp.(°C): 23.1

Model Number: X6895B

Humidity (%RH): 51

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11b CH6 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A04+数据线: A08
ANT13

RE Test case FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

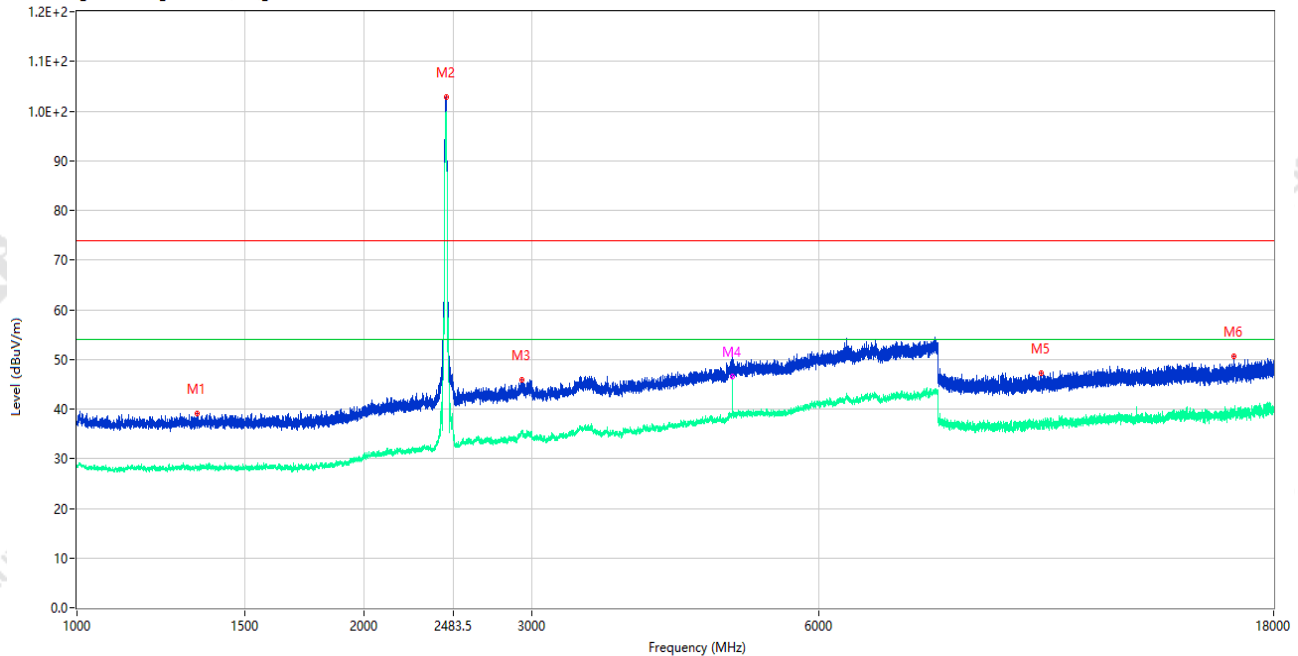


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1337.250	39.11	-16.05	74.0	34.89	Peak	329.00	150	Horizontal	Pass
1**	1337.250	28.29	-16.05	54.0	25.71	AV	329.00	150	Horizontal	Pass
2	2438.250	102.74	-12.38	74.0	-28.74	Peak	159.00	150	Horizontal	N/A
2**	2438.250	99.89	-12.38	54.0	-45.89	AV	159.00	150	Horizontal	Fail
3	2932.000	45.89	-7.97	74.0	28.11	Peak	177.00	150	Horizontal	Pass
3**	2932.000	35.78	-7.97	54.0	18.22	AV	177.00	150	Horizontal	Pass
4	4874.500	50.23	-2.25	74.0	23.77	Peak	340.00	150	Horizontal	Pass
4**	4874.500	46.49	-2.25	54.0	7.51	AV	340.00	150	Horizontal	Pass
5	10278.500	47.18	-3.34	74.0	26.82	Peak	205.00	150	Horizontal	Pass
5**	10278.500	36.78	-3.34	54.0	17.22	AV	205.00	150	Horizontal	Pass
6	16350.000	50.60	-1.04	74.0	23.40	Peak	349.00	150	Horizontal	Pass
6**	16350.000	39.36	-1.04	54.0	14.64	AV	349.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_21.12.46

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH6 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13

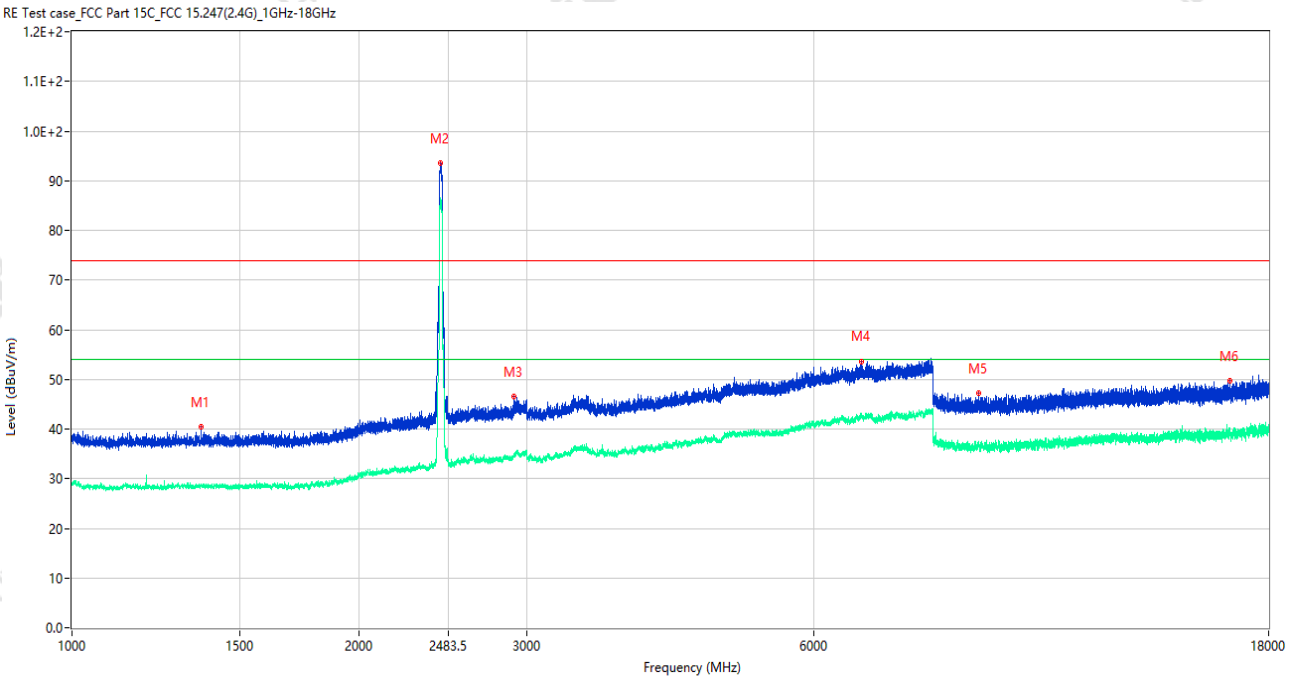

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1366.500	40.52	-15.86	74.0	33.48	Peak	166.00	150	Vertical	Pass
1**	1366.500	28.73	-15.86	54.0	25.27	AV	166.00	150	Vertical	Pass
2	2435.000	93.55	-12.30	74.0	-19.55	Peak	66.00	150	Vertical	N/A
2**	2435.000	85.76	-12.30	54.0	-31.76	AV	66.00	150	Vertical	N/A
3	2904.750	46.58	-9.51	74.0	27.42	Peak	357.00	150	Vertical	Pass
3**	2904.750	34.54	-9.51	54.0	19.46	AV	357.00	150	Vertical	Pass
4	6730.500	53.52	0.70	74.0	20.48	Peak	87.00	150	Vertical	Pass
4**	6730.500	42.51	0.70	54.0	11.49	AV	87.00	150	Vertical	Pass
5	8944.000	47.18	-4.50	74.0	26.82	Peak	11.00	150	Vertical	Pass
5**	8944.000	36.60	-4.50	54.0	17.40	AV	11.00	150	Vertical	Pass
6	16397.500	49.79	-1.33	74.0	24.21	Peak	236.00	150	Vertical	Pass
6**	16397.500	40.14	-1.33	54.0	13.86	AV	236.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_21.16.20

EUT Name: Mobile Phone

Temp.(°C): 23.1

Model Number: X6895B

Humidity (%RH): 51

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11g CH6 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A04+数据线: A08
ANT13

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

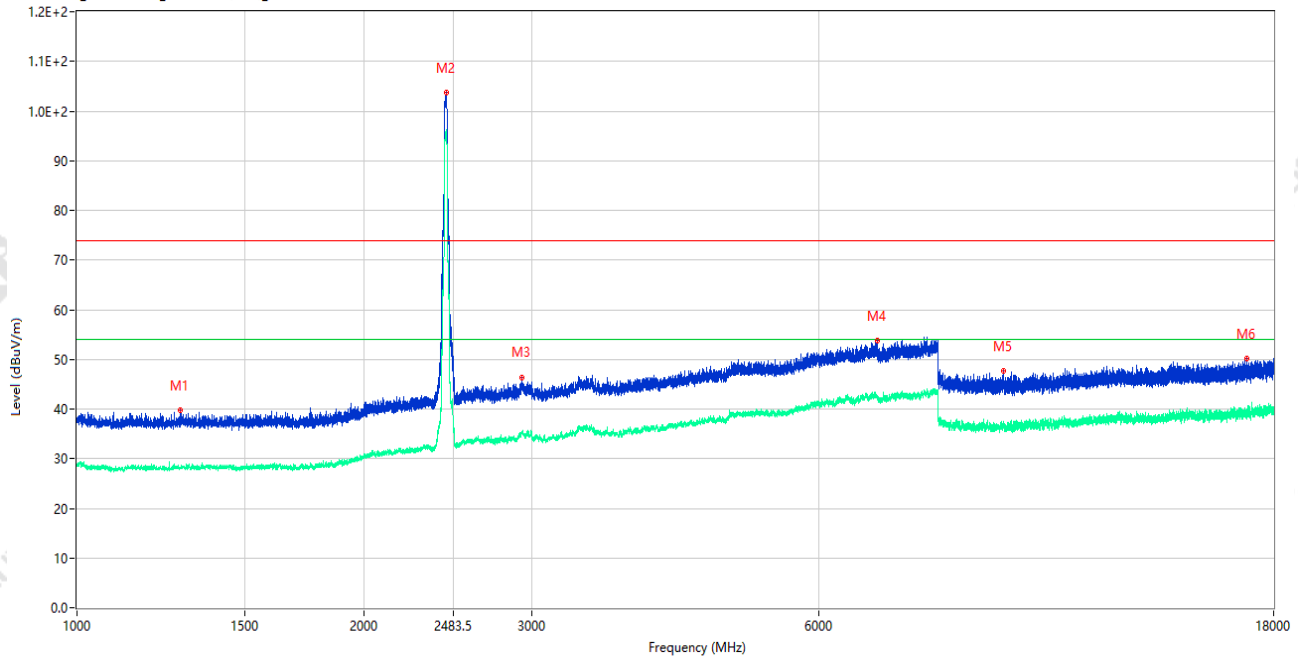

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.250	39.81	-15.93	74.0	34.19	Peak	268.00	150	Horizontal	Pass
1**	1284.250	28.15	-15.93	54.0	25.85	AV	268.00	150	Horizontal	Pass
2	2439.250	103.63	-12.37	74.0	-29.63	Peak	162.00	150	Horizontal	N/A
2**	2439.250	95.74	-12.37	54.0	-41.74	AV	162.00	150	Horizontal	N/A
3	2930.500	46.43	-7.95	74.0	27.57	Peak	242.00	150	Horizontal	Pass
3**	2930.500	35.42	-7.95	54.0	18.58	AV	242.00	150	Horizontal	Pass
4	6912.000	53.85	0.14	74.0	20.15	Peak	357.00	150	Horizontal	Pass
4**	6912.000	41.87	0.14	54.0	12.13	AV	357.00	150	Horizontal	Pass
5	9378.000	47.63	-4.65	74.0	26.37	Peak	10.00	150	Horizontal	Pass
5**	9378.000	36.18	-4.65	54.0	17.82	AV	10.00	150	Horizontal	Pass
6	16890.500	50.09	-0.49	74.0	23.91	Peak	351.00	150	Horizontal	Pass
6**	16890.500	39.53	-0.49	54.0	14.47	AV	351.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_21.08.50

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH6 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

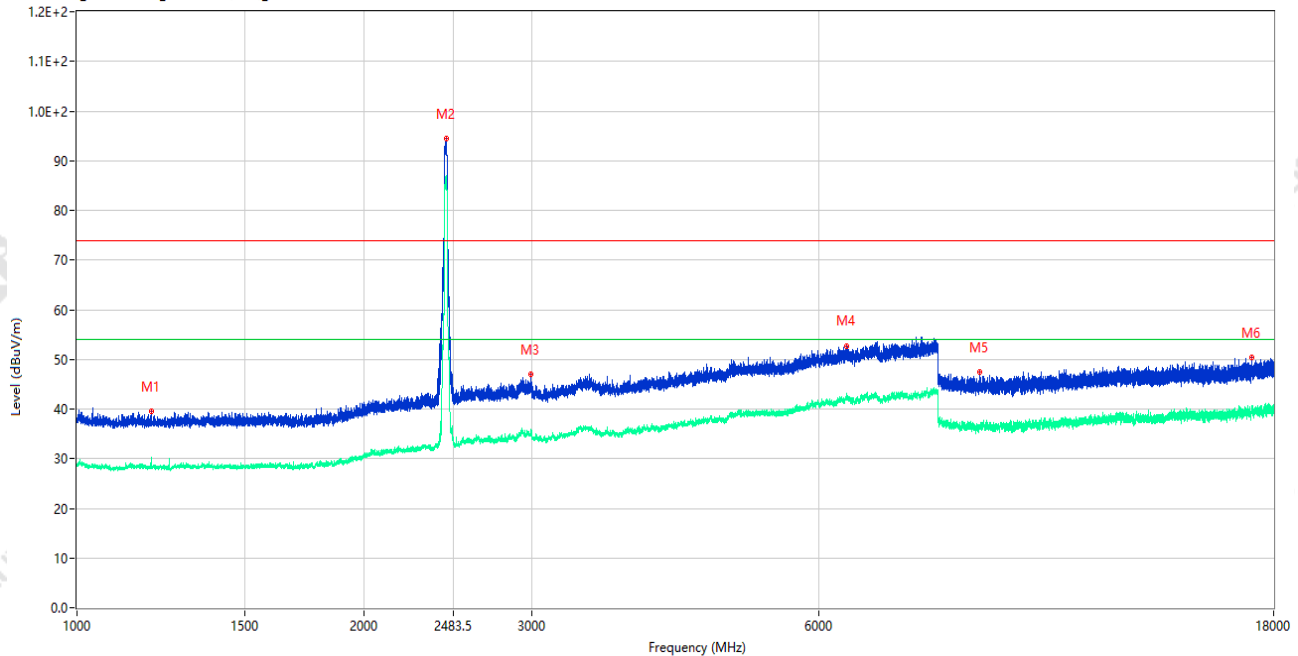


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.750	39.62	-15.74	74.0	34.38	Peak	207.00	150	Vertical	Pass
1**	1195.750	29.42	-15.74	54.0	24.58	AV	207.00	150	Vertical	Pass
2	2438.500	94.52	-12.37	74.0	-20.52	Peak	306.00	150	Vertical	N/A
2**	2438.500	86.74	-12.37	54.0	-32.74	AV	306.00	150	Vertical	N/A
3	2995.750	46.93	-8.85	74.0	27.07	Peak	133.00	150	Vertical	Pass
3**	2995.750	35.72	-8.85	54.0	18.28	AV	133.00	150	Vertical	Pass
4	6417.000	52.74	0.17	74.0	21.26	Peak	82.00	150	Vertical	Pass
4**	6417.000	42.28	0.17	54.0	11.72	AV	82.00	150	Vertical	Pass
5	8854.000	47.43	-4.80	74.0	26.57	Peak	217.00	150	Vertical	Pass
5**	8854.000	36.83	-4.80	54.0	17.17	AV	217.00	150	Vertical	Pass
6	17093.000	50.43	-0.65	74.0	23.57	Peak	217.00	150	Vertical	Pass
6**	17093.000	39.84	-0.65	54.0	14.16	AV	217.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_21.04.41

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH6 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13

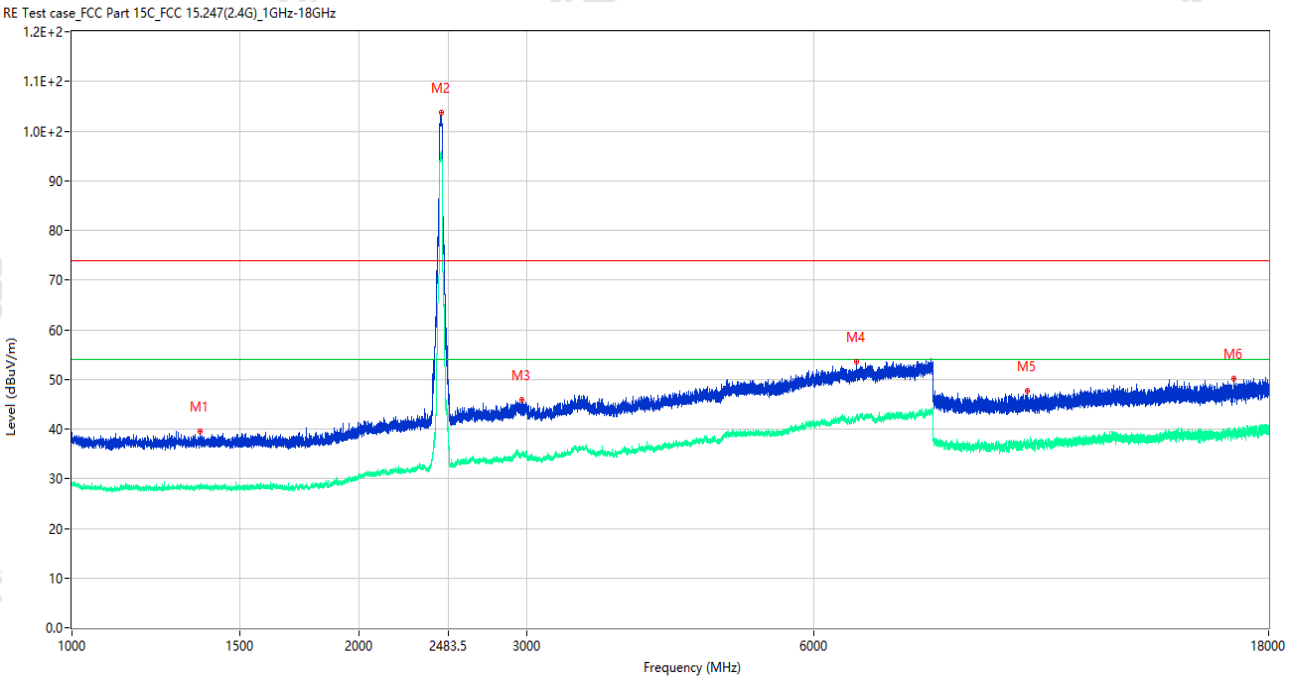

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1364.250	39.55	-15.85	74.0	34.45	Peak	245.00	150	Horizontal	Pass
1**	1364.250	28.02	-15.85	54.0	25.98	AV	245.00	150	Horizontal	Pass
2	2438.250	103.73	-12.38	74.0	-29.73	Peak	167.00	150	Horizontal	N/A
2**	2438.250	95.95	-12.38	54.0	-41.95	AV	167.00	150	Horizontal	N/A
3	2963.500	45.78	-8.64	74.0	28.22	Peak	1.00	150	Horizontal	Pass
3**	2963.500	34.59	-8.64	54.0	19.41	AV	1.00	150	Horizontal	Pass
4	6649.000	53.50	0.25	74.0	20.50	Peak	90.00	150	Horizontal	Pass
4**	6649.000	42.23	0.25	54.0	11.77	AV	90.00	150	Horizontal	Pass
5	10052.500	47.63	-3.98	74.0	26.37	Peak	8.00	150	Horizontal	Pass
5**	10052.500	36.65	-3.98	54.0	17.35	AV	8.00	150	Horizontal	Pass
6	16569.000	50.09	-0.91	74.0	23.91	Peak	8.00	150	Horizontal	Pass
6**	16569.000	39.83	-0.91	54.0	14.17	AV	8.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_21.31.52

EUT Name: Mobile Phone

Temp.(°C): 23.1

Model Number: X6895B

Humidity (%RH): 51

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: Normal working Link(2.4G WIFI)


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A04+数据线: A08
ANT13

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

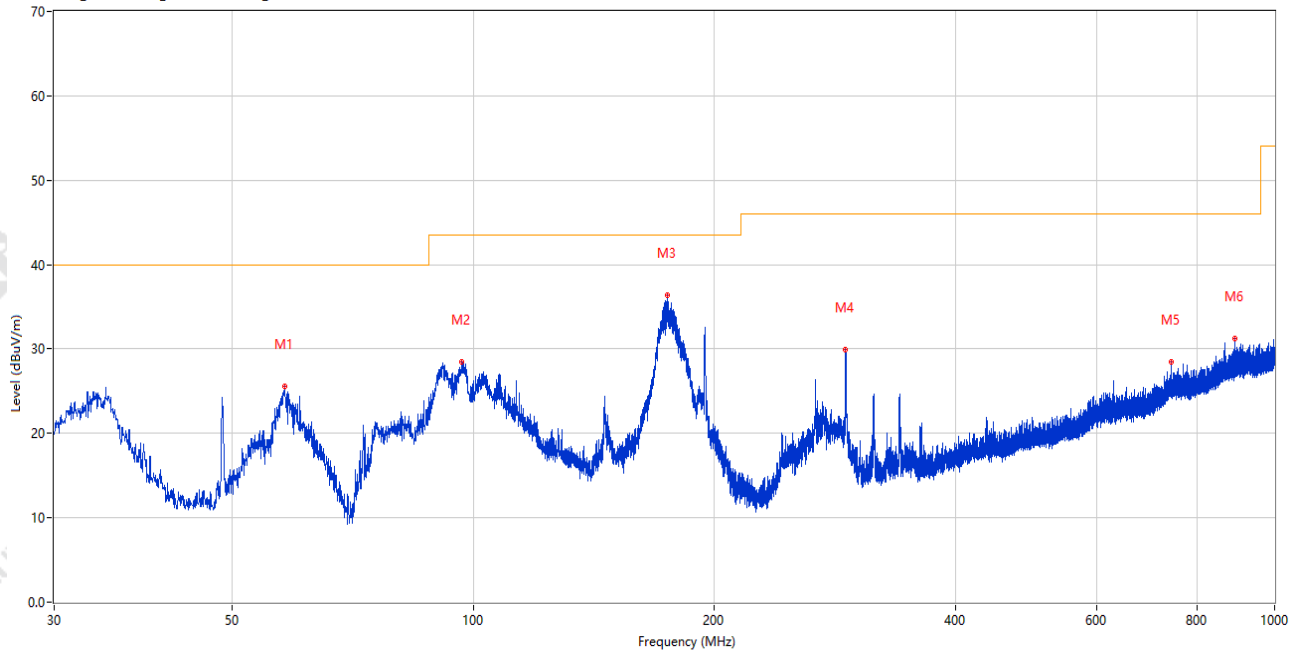

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	58.130	25.63	-25.66	40.0	14.37	Peak	349.00	100	Vertical	Pass
2	96.736	28.53	-26.40	43.5	14.97	Peak	89.00	100	Vertical	Pass
3	174.918	36.39	-28.23	43.5	7.11	Peak	217.00	200	Vertical	Pass
4	291.658	29.98	-23.20	46.0	16.02	Peak	47.00	100	Vertical	Pass
5	742.562	28.47	-11.98	46.0	17.53	Peak	343.00	200	Vertical	Pass
6	891.214	31.23	-9.69	46.0	14.77	Peak	296.00	200	Vertical	Pass


Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_21.44.43

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	Normal working Link(2.4G WIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

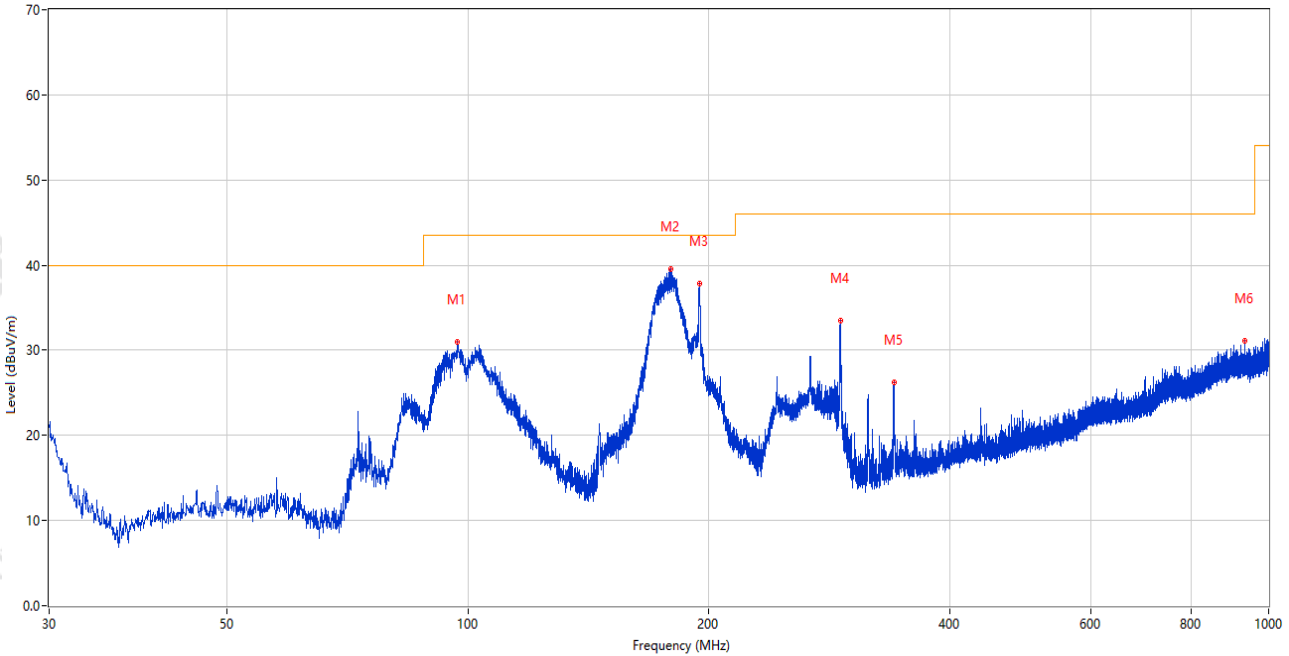

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	97.124	31.01	-26.34	43.5	12.49	Peak	223.00	200	Horizontal	Pass
2	178.992	39.50	-27.89	43.5	4.00	Peak	83.00	100	Horizontal	Pass
3	194.512	37.88	-25.64	43.5	5.62	Peak	360.00	200	Horizontal	Pass
4	291.706	33.45	-23.20	46.0	12.55	Peak	83.00	100	Horizontal	Pass
5	340.303	26.25	-21.90	46.0	19.75	Peak	71.00	100	Horizontal	Pass
6	932.537	31.06	-8.83	46.0	14.94	Peak	344.00	200	Horizontal	Pass