


Test Result

Project Number: P-CC26010282
Test Time: 2026-02-03_11.20.43

EUT Name:	Mobile Phone	Temp.(oC):	22.7
Model Name:	X6895B	Humidity (%RH):	45
Sample Number:	CC26010326-001-S09	Pressure (kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	normal working mode(5G WIFI LINK)
Test Site:	CE Lab	Test Voltage:	AC 120V/60Hz
Test Engineer:	Xu Ying	Remark:	适配器: A04 数据线: A08

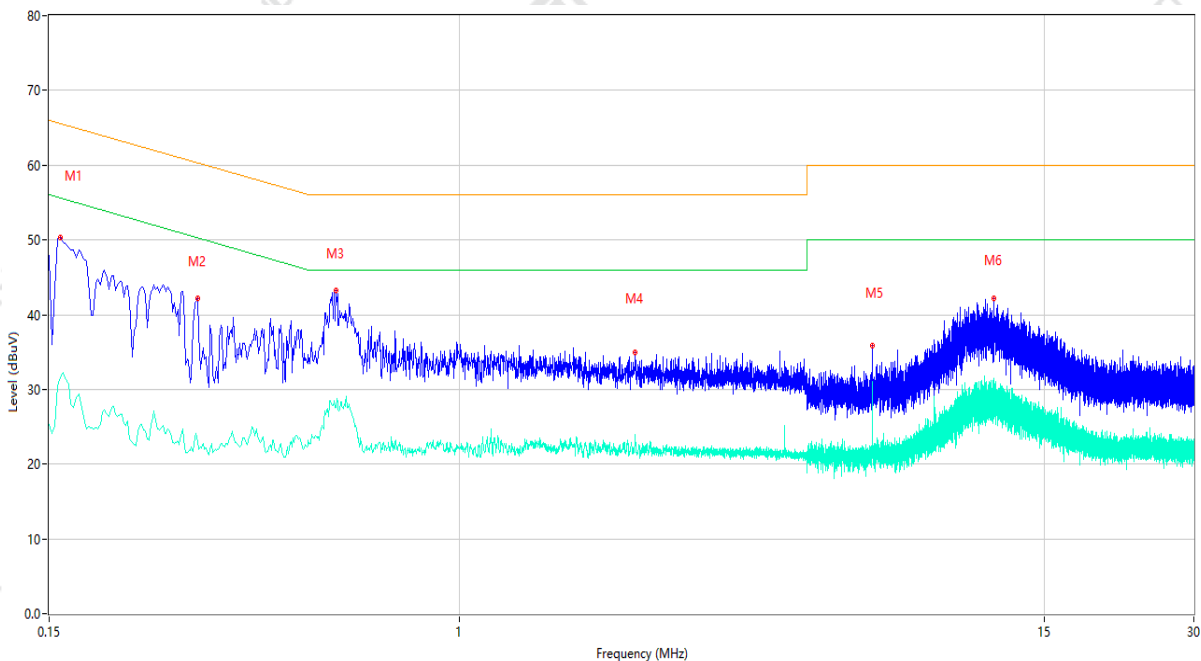


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.158	50.30	10.06	65.57	15.27	Peak	L	Pass
1**	0.158	31.71	10.06	55.57	23.86	AV	L	Pass
2	0.298	42.18	10.12	60.30	18.12	Peak	L	Pass
2**	0.298	23.09	10.12	50.30	27.21	AV	L	Pass
3	0.566	43.20	10.18	56.00	12.80	Peak	L	Pass
3**	0.566	27.63	10.18	46.00	18.37	AV	L	Pass
4	2.262	34.89	10.36	56.00	21.11	Peak	L	Pass
4**	2.262	23.41	10.36	46.00	22.59	AV	L	Pass
5	6.774	35.78	10.69	60.00	24.22	Peak	L	Pass
5**	6.774	28.63	10.69	50.00	21.37	AV	L	Pass
6	11.914	42.25	11.03	60.00	17.75	Peak	L	Pass
6**	11.914	28.23	11.03	50.00	21.77	AV	L	Pass

Test Result

Project Number: P-CC26010282
Test Time: 2026-02-03_11.17.11

EUT Name:	Mobile Phone	Temp.(oC):	22.7
Model Name:	X6895B	Humidity (%RH):	45
Sample Number:	CC26010326-001-S09	Pressure (kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	normal working mode(5G WIFI LINK)
Test Site:	CE Lab	Test Voltage:	AC 120V/60Hz
Test Engineer:	Xu Ying	Remark:	适配器: A04 数据线: A08

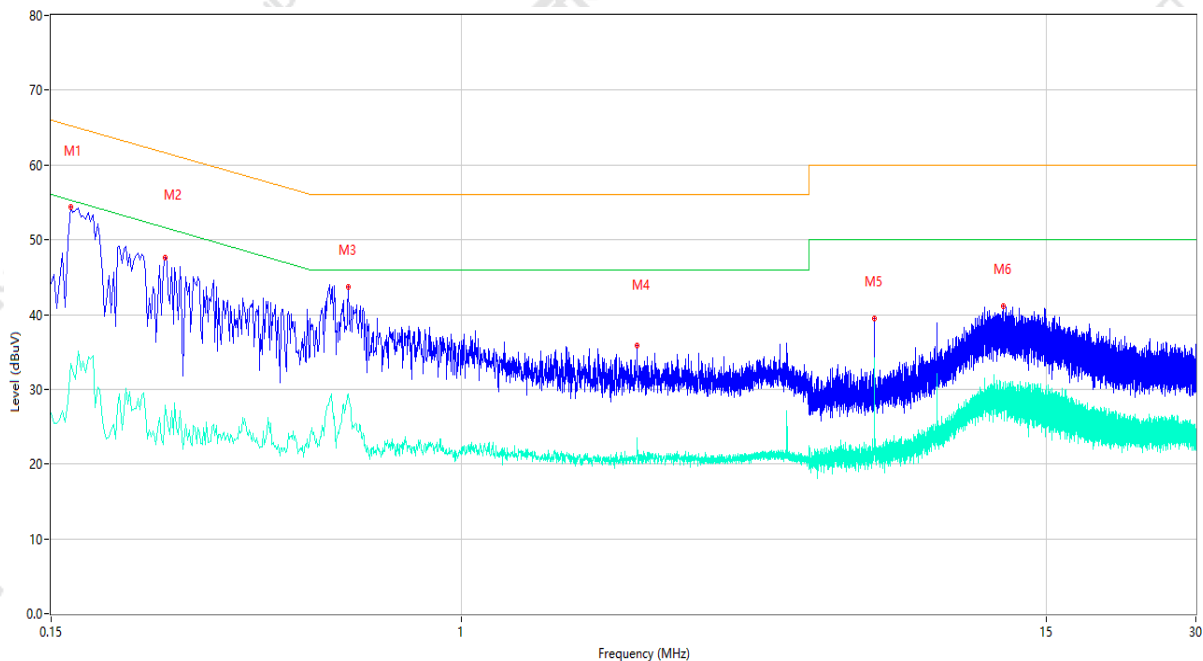

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.164	54.36	10.15	65.26	10.90	Peak	N	Pass
1**	0.164	33.37	10.15	55.26	21.89	AV	N	Pass
2	0.254	47.58	10.15	61.63	14.05	Peak	N	Pass
2**	0.254	27.94	10.15	51.63	23.69	AV	N	Pass
3	0.594	43.63	10.19	56.00	12.37	Peak	N	Pass
3**	0.594	29.39	10.19	46.00	16.61	AV	N	Pass
4	2.258	35.87	10.26	56.00	20.13	Peak	N	Pass
4**	2.258	23.32	10.26	46.00	22.68	AV	N	Pass
5	6.780	39.41	10.60	60.00	20.59	Peak	N	Pass
5**	6.780	34.17	10.60	50.00	15.83	AV	N	Pass
6	12.292	41.10	11.03	60.00	18.90	Peak	N	Pass
6**	12.292	28.92	11.03	50.00	21.08	AV	N	Pass