


## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_04.23.37

|                |                    |                 |                            |
|----------------|--------------------|-----------------|----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                       |
| Model Number:  | X6895B             | Humidity (%RH): | 52                         |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                        |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.2G WIFI 11a CH44 P=15    |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz               |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12 |

RE Test case\_FCC Part 15E FCC 15.407(5.15-5.35)\_1GHz-18GHz

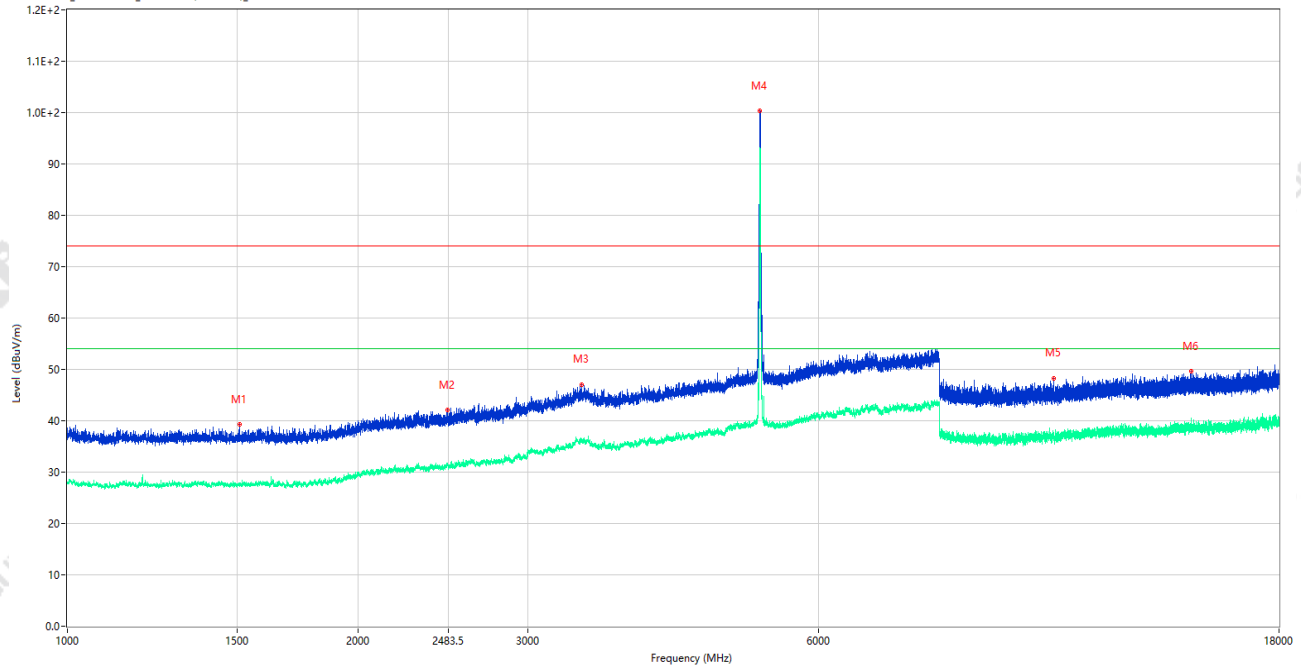

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1507.250        | 39.23            | -16.03      | 74.0           | 34.77       | Peak     | 82.00          | 150         | Vertical | Pass    |
| 1** | 1507.250        | 27.41            | -16.03      | 54.0           | 26.59       | AV       | 82.00          | 150         | Vertical | Pass    |
| 2   | 2476.000        | 42.07            | -11.06      | 74.0           | 31.93       | Peak     | 227.00         | 150         | Vertical | Pass    |
| 2** | 2476.000        | 31.24            | -11.06      | 54.0           | 22.76       | AV       | 227.00         | 150         | Vertical | Pass    |
| 3   | 3412.500        | 47.08            | -5.28       | 74.0           | 26.92       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 3** | 3412.500        | 36.02            | -5.28       | 54.0           | 17.98       | AV       | 0.00           | 150         | Vertical | Pass    |
| 4   | 5217.500        | 100.32           | -2.36       | 74.0           | -26.32      | Peak     | 70.00          | 150         | Vertical | N/A     |
| 4** | 5217.500        | 92.51            | -2.36       | 54.0           | -38.51      | AV       | 70.00          | 150         | Vertical | N/A     |
| 5   | 10520.112       | 48.17            | -3.44       | 74.0           | 25.83       | Peak     | 46.00          | 150         | Vertical | Pass    |
| 5** | 10520.112       | 36.81            | -3.44       | 54.0           | 17.19       | AV       | 46.00          | 150         | Vertical | Pass    |
| 6   | 14599.838       | 49.63            | -2.48       | 74.0           | 24.37       | Peak     | 117.00         | 150         | Vertical | Pass    |
| 6** | 14599.838       | 38.72            | -2.48       | 54.0           | 15.28       | AV       | 117.00         | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_04.18.14

EUT Name: Mobile Phone

Temp.(°C): 22.8

Model Number: X6895B

Humidity (%RH): 52

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Siyuan

Remark: 适配器: A04+数据线: A08  
ANT12

RE Test case\_FCC Part 15E\_FCC 15.407(5.15-5.35)\_1GHz-18GHz

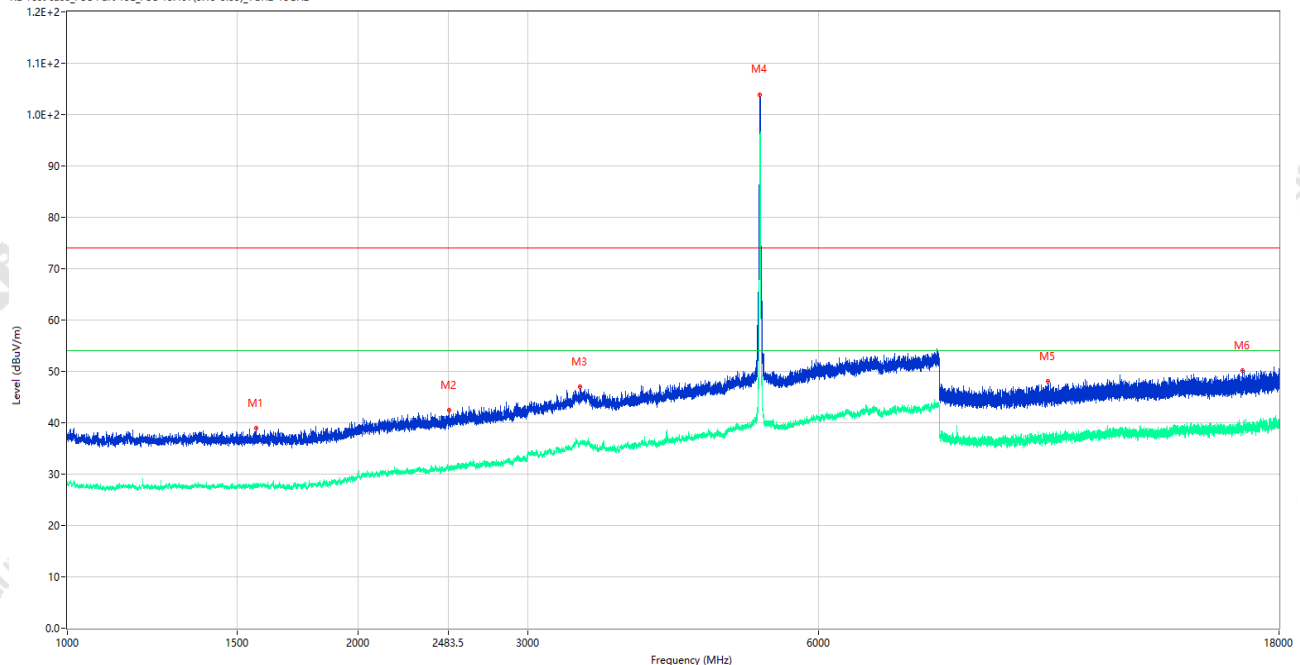


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1570.500        | 38.94            | -16.06      | 74.0           | 35.06       | Peak     | 96.00          | 150         | Horizontal | Pass    |
| 1** | 1570.500        | 28.00            | -16.06      | 54.0           | 26.00       | AV       | 96.00          | 150         | Horizontal | Pass    |
| 2   | 2485.500        | 42.45            | -11.54      | 74.0           | 31.55       | Peak     | 225.00         | 150         | Horizontal | Pass    |
| 2** | 2485.500        | 31.04            | -11.54      | 54.0           | 22.96       | AV       | 225.00         | 150         | Horizontal | Pass    |
| 3   | 3396.500        | 46.94            | -5.83       | 74.0           | 27.06       | Peak     | 345.00         | 150         | Horizontal | Pass    |
| 3** | 3396.500        | 35.82            | -5.83       | 54.0           | 18.18       | AV       | 345.00         | 150         | Horizontal | Pass    |
| 4   | 5218.500        | 103.90           | -2.37       | 74.0           | -29.90      | Peak     | 59.00          | 150         | Horizontal | N/A     |
| 4** | 5218.500        | 96.06            | -2.37       | 54.0           | -42.06      | AV       | 59.00          | 150         | Horizontal | N/A     |
| 5   | 10363.837       | 48.02            | -3.17       | 74.0           | 25.98       | Peak     | 192.00         | 150         | Horizontal | Pass    |
| 5** | 10363.837       | 37.30            | -3.17       | 54.0           | 16.70       | AV       | 192.00         | 150         | Horizontal | Pass    |
| 6   | 16502.699       | 50.10            | -1.89       | 74.0           | 23.90       | Peak     | 360.00         | 150         | Horizontal | Pass    |
| 6** | 16502.699       | 38.84            | -1.89       | 54.0           | 15.16       | AV       | 360.00         | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_04.34.59

|                |                    |                 |                             |
|----------------|--------------------|-----------------|-----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                        |
| Model Number:  | X6895B             | Humidity (%RH): | 52                          |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                         |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.2G WIFI 11n20 CH44 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12  |

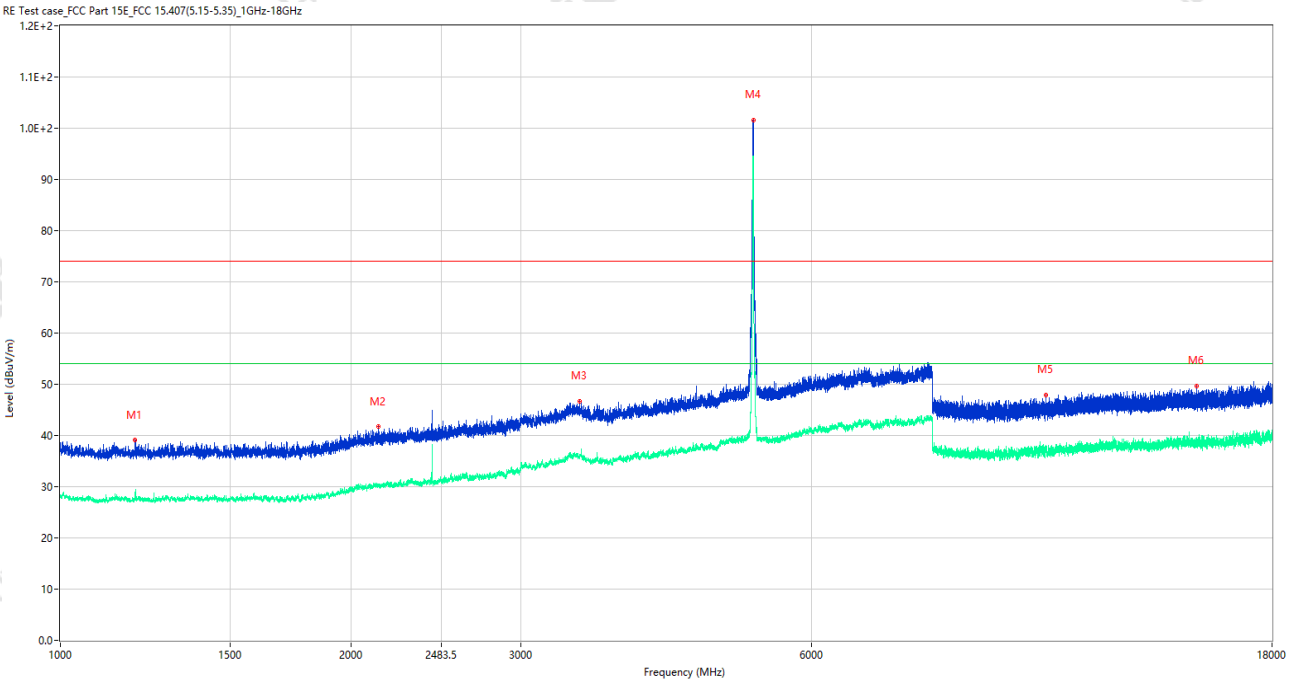


| No. | Frequency<br>(MHz) | Results<br>(dBuV/m) | Factor<br>(dB) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Table<br>(Degree) | Height<br>(cm) | Antenna  | Verdict |
|-----|--------------------|---------------------|----------------|-------------------|----------------|----------|-------------------|----------------|----------|---------|
| 1   | 1195.750           | 39.09               | -15.74         | 74.0              | 34.91          | Peak     | 254.00            | 150            | Vertical | Pass    |
| 1** | 1195.750           | 28.81               | -15.74         | 54.0              | 25.19          | AV       | 254.00            | 150            | Vertical | Pass    |
| 2   | 2135.250           | 41.69               | -13.48         | 74.0              | 32.31          | Peak     | 184.00            | 150            | Vertical | Pass    |
| 2** | 2135.250           | 30.30               | -13.48         | 54.0              | 23.70          | AV       | 184.00            | 150            | Vertical | Pass    |
| 3   | 3454.500           | 46.68               | -4.92          | 74.0              | 27.32          | Peak     | 29.00             | 150            | Vertical | Pass    |
| 3** | 3454.500           | 35.88               | -4.92          | 54.0              | 18.12          | AV       | 29.00             | 150            | Vertical | Pass    |
| 4   | 5221.500           | 101.61              | -2.37          | 74.0              | -27.61         | Peak     | 58.00             | 150            | Vertical | N/A     |
| 4** | 5221.500           | 94.63               | -2.37          | 54.0              | -40.63         | AV       | 58.00             | 150            | Vertical | N/A     |
| 5   | 10498.025          | 47.90               | -3.11          | 74.0              | 26.10          | Peak     | 0.00              | 150            | Vertical | Pass    |
| 5** | 10498.025          | 37.16               | -3.11          | 54.0              | 16.84          | AV       | 0.00              | 150            | Vertical | Pass    |
| 6   | 15040.050          | 49.65               | -2.09          | 74.0              | 24.35          | Peak     | 252.00            | 150            | Vertical | Pass    |
| 6** | 15040.050          | 39.07               | -2.09          | 54.0              | 14.93          | AV       | 252.00            | 150            | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_04.39.25

|                |                    |                 |                             |
|----------------|--------------------|-----------------|-----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                        |
| Model Number:  | X6895B             | Humidity (%RH): | 52                          |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                         |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.2G WIFI 11n20 CH44 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12  |

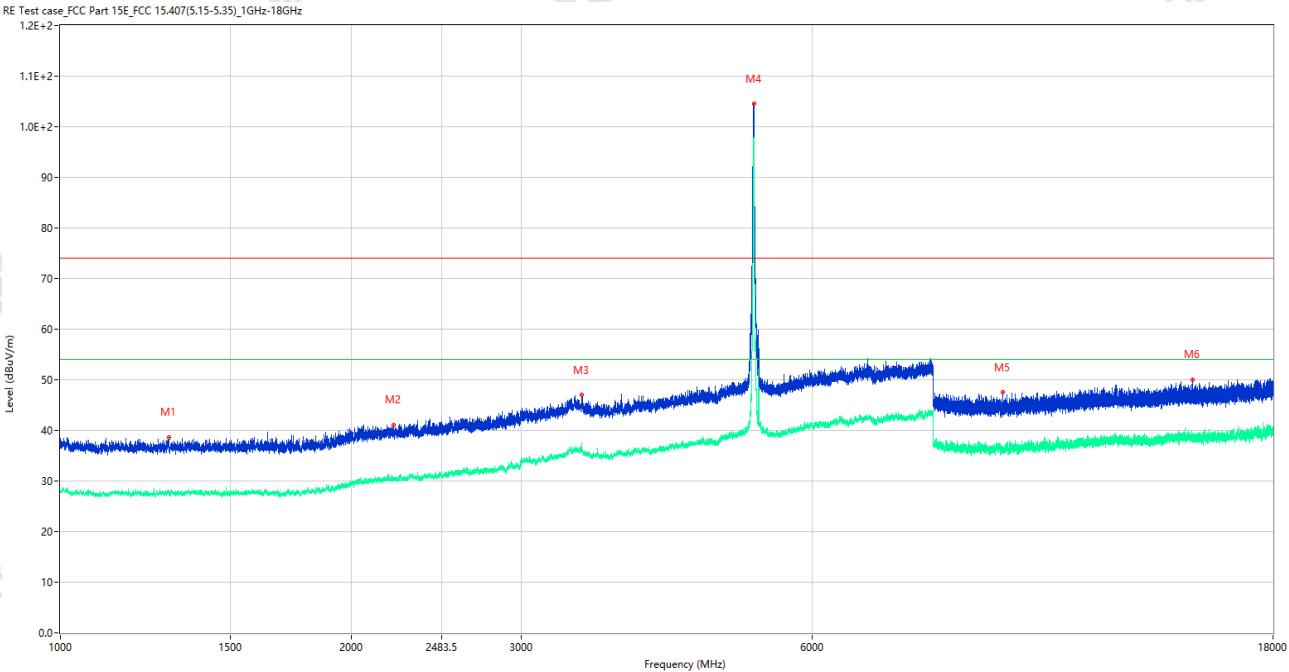

| No. | Frequency<br>(MHz) | Results<br>(dBuV/m) | Factor<br>(dB) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Table<br>(Degree) | Height<br>(cm) | Antenna    | Verdict |
|-----|--------------------|---------------------|----------------|-------------------|----------------|----------|-------------------|----------------|------------|---------|
| 1   | 1296.250           | 38.60               | -15.68         | 74.0              | 35.40          | Peak     | 321.00            | 150            | Horizontal | Pass    |
| 1** | 1296.250           | 27.45               | -15.68         | 54.0              | 26.55          | AV       | 321.00            | 150            | Horizontal | Pass    |
| 2   | 2212.000           | 41.09               | -13.24         | 74.0              | 32.91          | Peak     | 129.00            | 150            | Horizontal | Pass    |
| 2** | 2212.000           | 30.44               | -13.24         | 54.0              | 23.56          | AV       | 129.00            | 150            | Horizontal | Pass    |
| 3   | 3464.500           | 46.95               | -5.08          | 74.0              | 27.05          | Peak     | 150.00            | 150            | Horizontal | Pass    |
| 3** | 3464.500           | 36.18               | -5.08          | 54.0              | 17.82          | AV       | 150.00            | 150            | Horizontal | Pass    |
| 4   | 5221.500           | 104.54              | -2.37          | 74.0              | -30.54         | Peak     | 129.00            | 150            | Horizontal | N/A     |
| 4** | 5221.500           | 97.85               | -2.37          | 54.0              | -43.85         | AV       | 129.00            | 150            | Horizontal | N/A     |
| 5   | 9453.500           | 47.54               | -4.33          | 74.0              | 26.46          | Peak     | 52.00             | 150            | Horizontal | Pass    |
| 5** | 9453.500           | 35.89               | -4.33          | 54.0              | 18.11          | AV       | 52.00             | 150            | Horizontal | Pass    |
| 6   | 14852.888          | 50.03               | -0.79          | 74.0              | 23.97          | Peak     | 348.00            | 150            | Horizontal | Pass    |
| 6** | 14852.888          | 38.42               | -0.79          | 54.0              | 15.58          | AV       | 348.00            | 150            | Horizontal | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_05.04.41

EUT Name: Mobile Phone

Temp.(°C): 22.8

Model Number: X6895B

Humidity (%RH): 52

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n40 CH38 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Siyuan

Remark: 适配器: A04+数据线: A08  
ANT12

RE Test case\_FCC Part 15E\_FCC 15.407(5.15-5.35)\_1GHz-18GHz

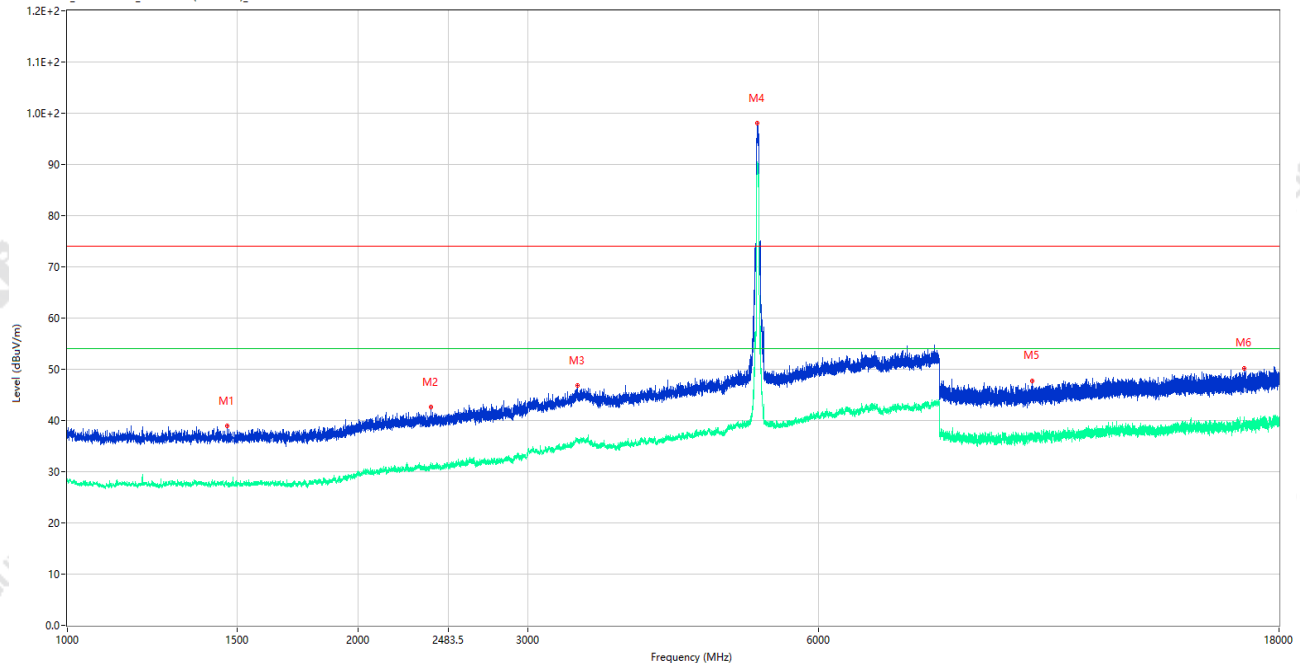


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1465.000        | 38.95            | -16.22      | 74.0           | 35.05       | Peak     | 2.00           | 150         | Vertical | Pass    |
| 1** | 1465.000        | 27.46            | -16.22      | 54.0           | 26.54       | AV       | 2.00           | 150         | Vertical | Pass    |
| 2   | 2381.750        | 42.56            | -12.00      | 74.0           | 31.44       | Peak     | 291.00         | 150         | Vertical | Pass    |
| 2** | 2381.750        | 30.96            | -12.00      | 54.0           | 23.04       | AV       | 291.00         | 150         | Vertical | Pass    |
| 3   | 3374.000        | 46.80            | -4.80       | 74.0           | 27.20       | Peak     | 51.00          | 150         | Vertical | Pass    |
| 3** | 3374.000        | 36.12            | -4.80       | 54.0           | 17.88       | AV       | 51.00          | 150         | Vertical | Pass    |
| 4   | 5187.000        | 98.07            | -2.35       | 74.0           | -24.07      | Peak     | 70.00          | 150         | Vertical | N/A     |
| 4** | 5187.000        | 89.74            | -2.35       | 54.0           | -35.74      | AV       | 70.00          | 150         | Vertical | N/A     |
| 5   | 9991.675        | 47.74            | -3.77       | 74.0           | 26.26       | Peak     | 26.00          | 150         | Vertical | Pass    |
| 5** | 9991.675        | 37.20            | -3.77       | 54.0           | 16.80       | AV       | 26.00          | 150         | Vertical | Pass    |
| 6   | 16567.537       | 50.19            | -1.00       | 74.0           | 23.81       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 6** | 16567.537       | 39.73            | -1.00       | 54.0           | 14.27       | AV       | 0.00           | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_04.58.10

|                |                    |                 |                             |
|----------------|--------------------|-----------------|-----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                        |
| Model Number:  | X6895B             | Humidity (%RH): | 52                          |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                         |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.2G WIFI 11n40 CH38 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12  |

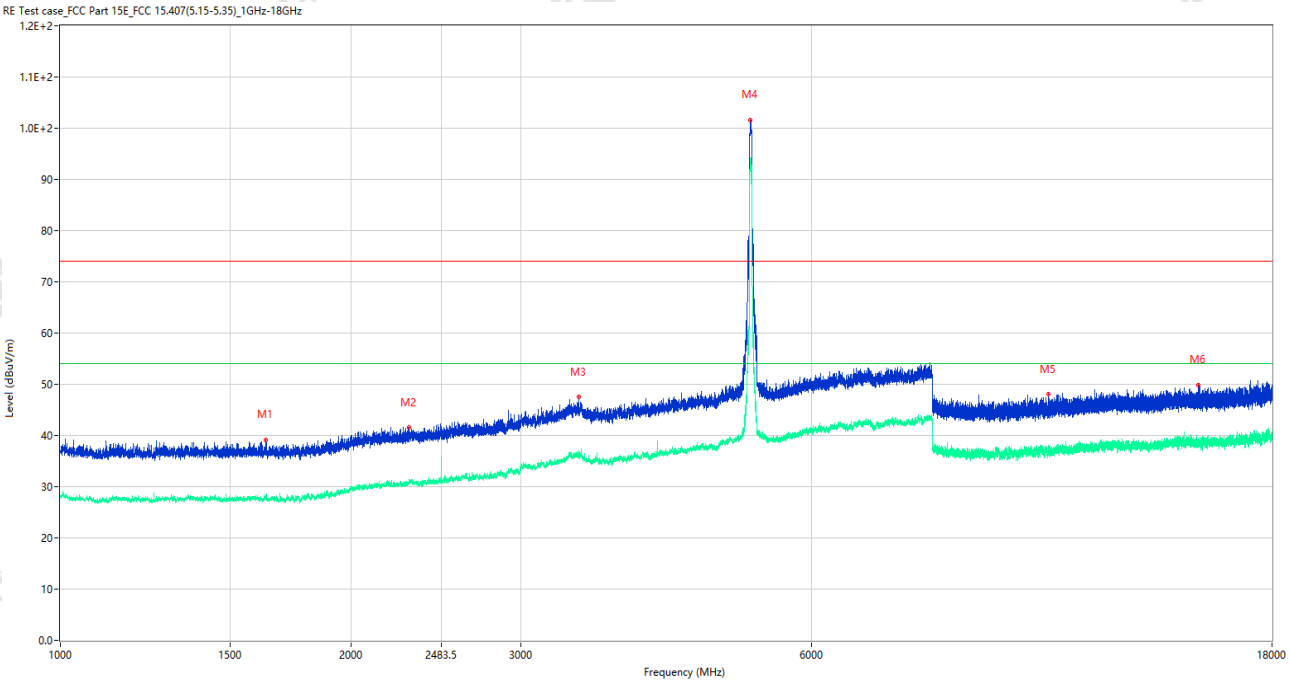

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1631.250        | 39.14            | -16.06      | 74.0           | 34.86       | Peak     | 21.00          | 150         | Horizontal | Pass    |
| 1** | 1631.250        | 27.87            | -16.06      | 54.0           | 26.13       | AV       | 21.00          | 150         | Horizontal | Pass    |
| 2   | 2296.750        | 41.59            | -13.21      | 74.0           | 32.41       | Peak     | 360.00         | 150         | Horizontal | Pass    |
| 2** | 2296.750        | 30.83            | -13.21      | 54.0           | 23.17       | AV       | 360.00         | 150         | Horizontal | Pass    |
| 3   | 3443.500        | 47.52            | -5.27       | 74.0           | 26.48       | Peak     | 259.00         | 150         | Horizontal | Pass    |
| 3** | 3443.500        | 36.87            | -5.27       | 54.0           | 17.13       | AV       | 259.00         | 150         | Horizontal | Pass    |
| 4   | 5188.000        | 101.60           | -2.32       | 74.0           | -27.60      | Peak     | 111.00         | 150         | Horizontal | N/A     |
| 4** | 5188.000        | 94.20            | -2.32       | 54.0           | -40.20      | AV       | 111.00         | 150         | Horizontal | N/A     |
| 5   | 10565.474       | 48.00            | -3.21       | 74.0           | 26.00       | Peak     | 360.00         | 150         | Horizontal | Pass    |
| 5** | 10565.474       | 37.53            | -3.21       | 54.0           | 16.47       | AV       | 360.00         | 150         | Horizontal | Pass    |
| 6   | 15085.463       | 49.85            | -1.79       | 74.0           | 24.15       | Peak     | 184.00         | 150         | Horizontal | Pass    |
| 6** | 15085.463       | 38.59            | -1.79       | 54.0           | 15.41       | AV       | 184.00         | 150         | Horizontal | Pass    |


## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_05.32.04

|                |                    |                 |                            |
|----------------|--------------------|-----------------|----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                       |
| Model Number:  | X6895B             | Humidity (%RH): | 52                         |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                        |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.2G WIFI 11ac80 CH42 P=16 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz               |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12 |

RE Test case\_FCC Part 15E FCC 15.407(5.15-5.35)\_1GHz-18GHz

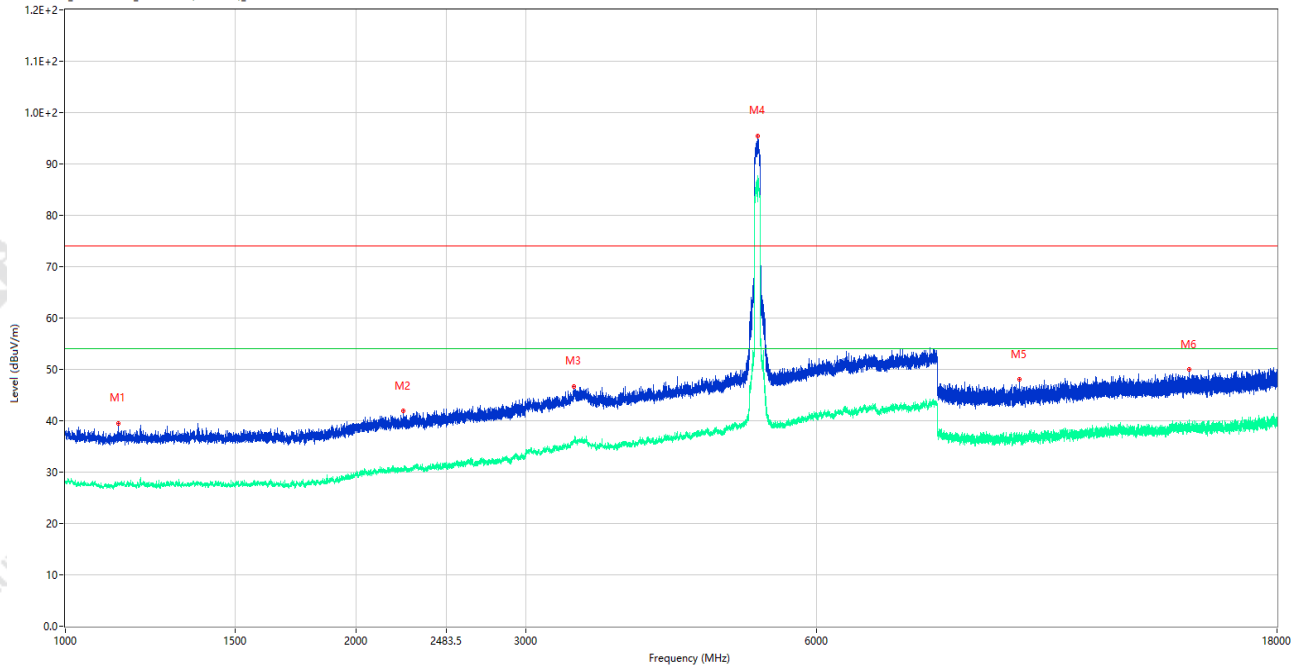


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1134.750        | 39.50            | -15.54      | 74.0           | 34.50       | Peak     | 359.00         | 150         | Vertical | Pass    |
| 1** | 1134.750        | 27.72            | -15.54      | 54.0           | 26.28       | AV       | 359.00         | 150         | Vertical | Pass    |
| 2   | 2238.000        | 41.90            | -13.05      | 74.0           | 32.10       | Peak     | 126.00         | 150         | Vertical | Pass    |
| 2** | 2238.000        | 30.30            | -13.05      | 54.0           | 23.70       | AV       | 126.00         | 150         | Vertical | Pass    |
| 3   | 3366.000        | 46.69            | -5.08       | 74.0           | 27.31       | Peak     | 34.00          | 150         | Vertical | Pass    |
| 3** | 3366.000        | 36.03            | -5.08       | 54.0           | 17.97       | AV       | 34.00          | 150         | Vertical | Pass    |
| 4   | 5215.500        | 95.51            | -2.32       | 74.0           | -21.51      | Peak     | 65.00          | 150         | Vertical | N/A     |
| 4** | 5215.500        | 86.06            | -2.32       | 54.0           | -32.06      | AV       | 65.00          | 150         | Vertical | N/A     |
| 5   | 9730.187        | 48.02            | -4.25       | 74.0           | 25.98       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 5** | 9730.187        | 36.62            | -4.25       | 54.0           | 17.38       | AV       | 360.00         | 150         | Vertical | Pass    |
| 6   | 14599.838       | 49.93            | -2.48       | 74.0           | 24.07       | Peak     | 74.00          | 150         | Vertical | Pass    |
| 6** | 14599.838       | 38.61            | -2.48       | 54.0           | 15.39       | AV       | 74.00          | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_05.36.24

|                |                    |                 |                            |
|----------------|--------------------|-----------------|----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                       |
| Model Number:  | X6895B             | Humidity (%RH): | 52                         |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                        |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.2G WIFI 11ac80 CH42 P=16 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz               |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12 |

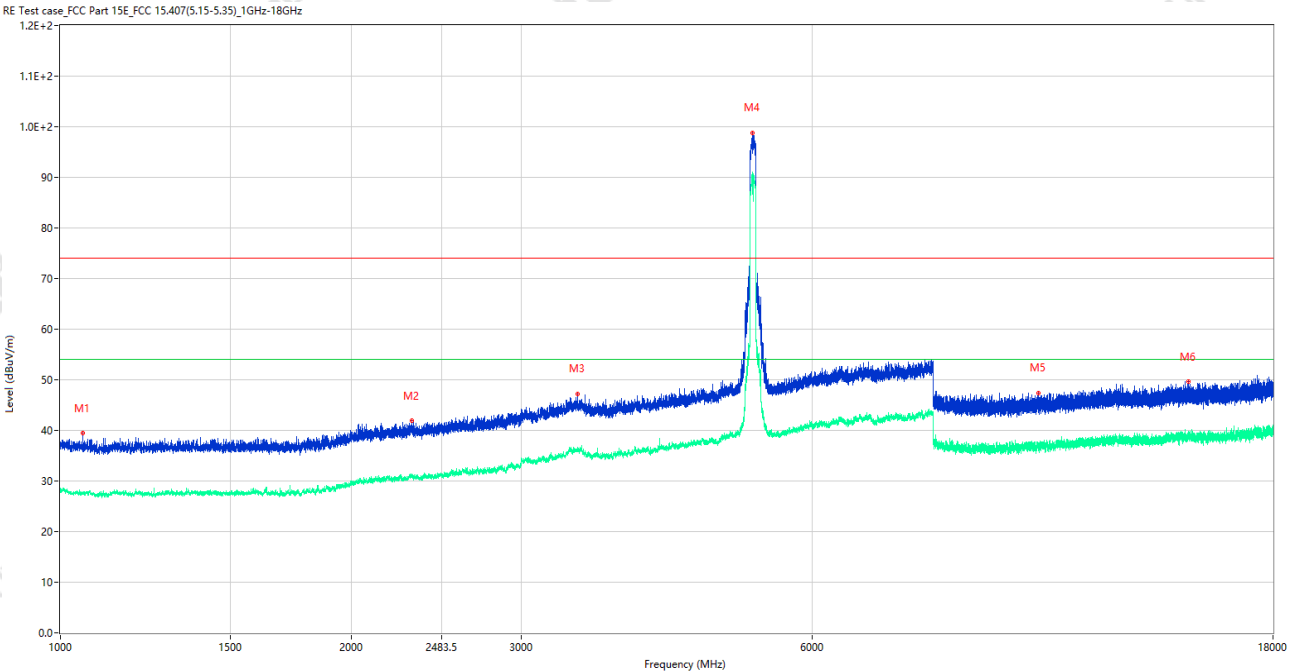


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1055.000        | 39.43            | -15.38      | 74.0           | 34.57       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 1** | 1055.000        | 27.80            | -15.38      | 54.0           | 26.20       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 2   | 2309.000        | 41.87            | -12.52      | 74.0           | 32.13       | Peak     | 334.00         | 150         | Horizontal | Pass    |
| 2** | 2309.000        | 31.05            | -12.52      | 54.0           | 22.95       | AV       | 334.00         | 150         | Horizontal | Pass    |
| 3   | 3429.500        | 47.26            | -5.02       | 74.0           | 26.74       | Peak     | 14.00          | 150         | Horizontal | Pass    |
| 3** | 3429.500        | 35.99            | -5.02       | 54.0           | 18.01       | AV       | 14.00          | 150         | Horizontal | Pass    |
| 4   | 5203.500        | 98.82            | -2.39       | 74.0           | -24.82      | Peak     | 52.00          | 150         | Horizontal | N/A     |
| 4** | 5203.500        | 90.56            | -2.39       | 54.0           | -36.56      | AV       | 52.00          | 150         | Horizontal | N/A     |
| 5   | 10281.187       | 47.42            | -3.47       | 74.0           | 26.58       | Peak     | 74.00          | 150         | Horizontal | Pass    |
| 5** | 10281.187       | 37.02            | -3.47       | 54.0           | 16.98       | AV       | 74.00          | 150         | Horizontal | Pass    |
| 6   | 14725.049       | 49.65            | -1.64       | 74.0           | 24.35       | Peak     | 1.00           | 150         | Horizontal | Pass    |
| 6** | 14725.049       | 38.83            | -1.64       | 54.0           | 15.17       | AV       | 1.00           | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_05.44.15

|                |                    |                 |                                |
|----------------|--------------------|-----------------|--------------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                           |
| Model Number:  | X6895B             | Humidity (%RH): | 52                             |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                            |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | Normal working Link(5.2G WIFI) |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                   |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12     |

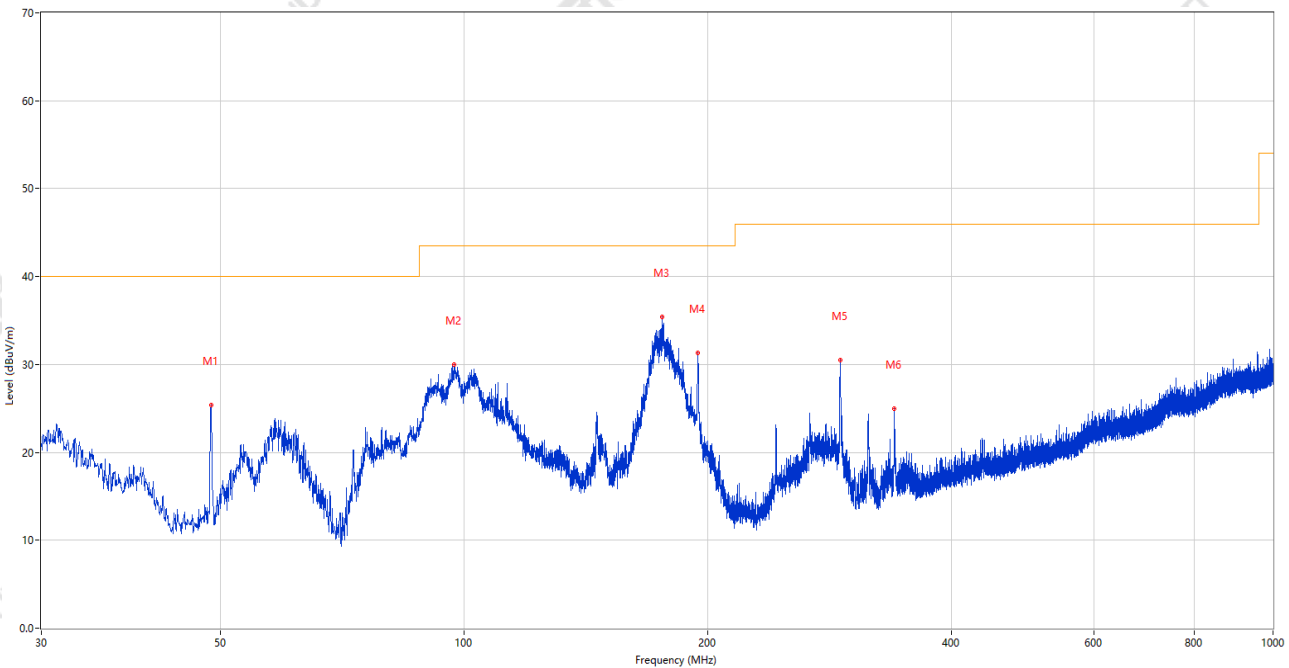


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 48.624          | 25.39            | -24.50      | 40.0           | 14.61       | Peak     | 0.00           | 100         | Vertical | Pass    |
| 2   | 97.270          | 29.95            | -26.32      | 43.5           | 13.55       | Peak     | 56.00          | 100         | Vertical | Pass    |
| 3   | 175.694         | 35.41            | -28.22      | 43.5           | 8.09        | Peak     | 214.00         | 200         | Vertical | Pass    |
| 4   | 194.464         | 31.28            | -25.65      | 43.5           | 12.22       | Peak     | 262.00         | 100         | Vertical | Pass    |
| 5   | 291.609         | 30.53            | -23.20      | 46.0           | 15.47       | Peak     | 255.00         | 200         | Vertical | Pass    |
| 6   | 340.206         | 24.94            | -21.90      | 46.0           | 21.06       | Peak     | 119.00         | 100         | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_05.40.48

|                |                    |                 |                                |
|----------------|--------------------|-----------------|--------------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                           |
| Model Number:  | X6895B             | Humidity (%RH): | 52                             |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                            |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | Normal working Link(5.2G WIFI) |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                   |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12     |

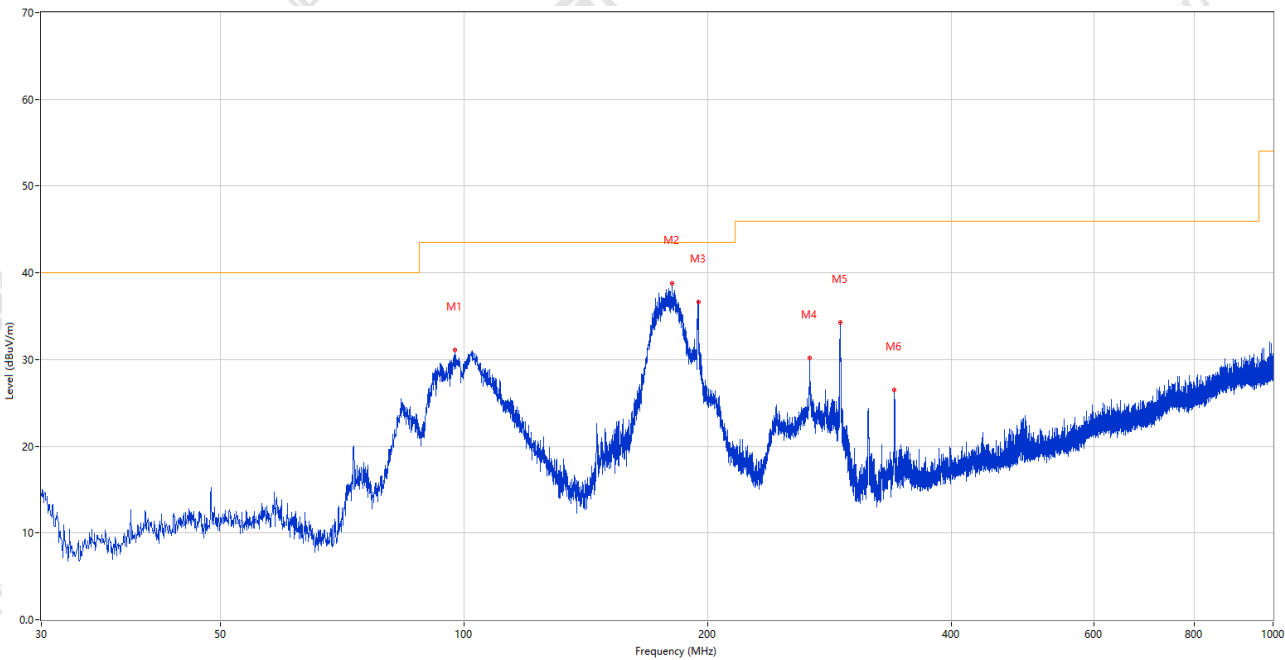

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 97.367          | 31.12            | -26.31      | 43.5           | 12.38       | Peak     | 207.00         | 200         | Horizontal | Pass    |
| 2   | 180.884         | 38.78            | -27.71      | 43.5           | 4.72        | Peak     | 9.00           | 200         | Horizontal | Pass    |
| 3   | 194.706         | 36.63            | -25.62      | 43.5           | 6.87        | Peak     | 42.00          | 100         | Horizontal | Pass    |
| 4   | 267.359         | 30.22            | -24.08      | 46.0           | 15.78       | Peak     | 78.00          | 100         | Horizontal | Pass    |
| 5   | 291.609         | 34.29            | -23.20      | 46.0           | 11.71       | Peak     | 72.00          | 100         | Horizontal | Pass    |
| 6   | 340.158         | 26.48            | -21.90      | 46.0           | 19.52       | Peak     | 248.00         | 100         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_07.14.04

EUT Name: Mobile Phone

Temp.(°C): 22.8

Model Number: X6895B

Humidity (%RH): 52

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Siyuan

Remark: 适配器: A04+数据线: A08  
ANT12

RE Test case\_FCC Part 15E FCC 15.407(5.15-5.35)\_1GHz-18GHz

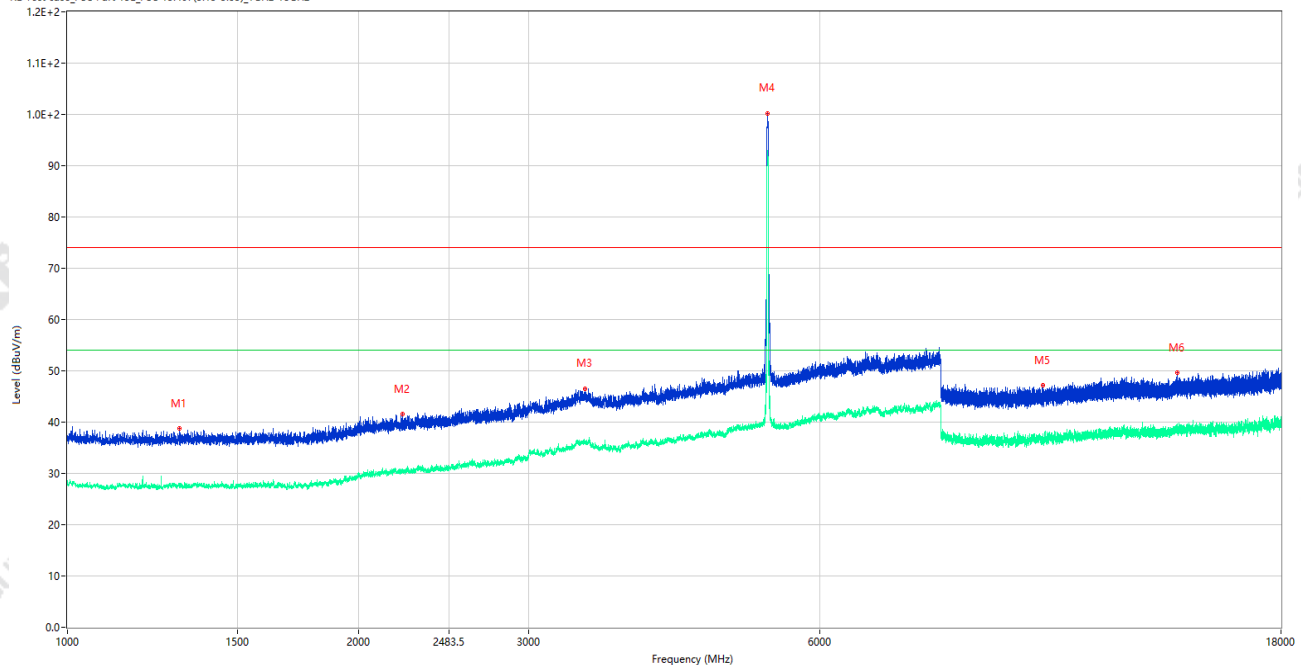


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1305.750        | 38.71            | -15.61      | 74.0           | 35.29       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 1** | 1305.750        | 27.79            | -15.61      | 54.0           | 26.21       | AV       | 0.00           | 150         | Vertical | Pass    |
| 2   | 2220.500        | 41.56            | -13.08      | 74.0           | 32.44       | Peak     | 29.00          | 150         | Vertical | Pass    |
| 2** | 2220.500        | 30.21            | -13.08      | 54.0           | 23.79       | AV       | 29.00          | 150         | Vertical | Pass    |
| 3   | 3431.000        | 46.53            | -5.03       | 74.0           | 27.47       | Peak     | 4.00           | 150         | Vertical | Pass    |
| 3** | 3431.000        | 35.85            | -5.03       | 54.0           | 18.15       | AV       | 4.00           | 150         | Vertical | Pass    |
| 4   | 5299.000        | 100.20           | -2.01       | 74.0           | -26.20      | Peak     | 170.00         | 150         | Vertical | N/A     |
| 4** | 5299.000        | 92.58            | -2.01       | 54.0           | -38.58      | AV       | 170.00         | 150         | Vertical | N/A     |
| 5   | 10207.799       | 47.22            | -3.13       | 74.0           | 26.78       | Peak     | 28.00          | 150         | Vertical | Pass    |
| 5** | 10207.799       | 36.28            | -3.13       | 54.0           | 17.72       | AV       | 28.00          | 150         | Vertical | Pass    |
| 6   | 14053.313       | 49.63            | -1.79       | 74.0           | 24.37       | Peak     | 246.00         | 150         | Vertical | Pass    |
| 6** | 14053.313       | 38.47            | -1.79       | 54.0           | 15.53       | AV       | 246.00         | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_07.09.15

|                |                    |                 |                            |
|----------------|--------------------|-----------------|----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                       |
| Model Number:  | X6895B             | Humidity (%RH): | 52                         |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                        |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.3G WIFI 11a CH60 P=15    |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz               |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12 |

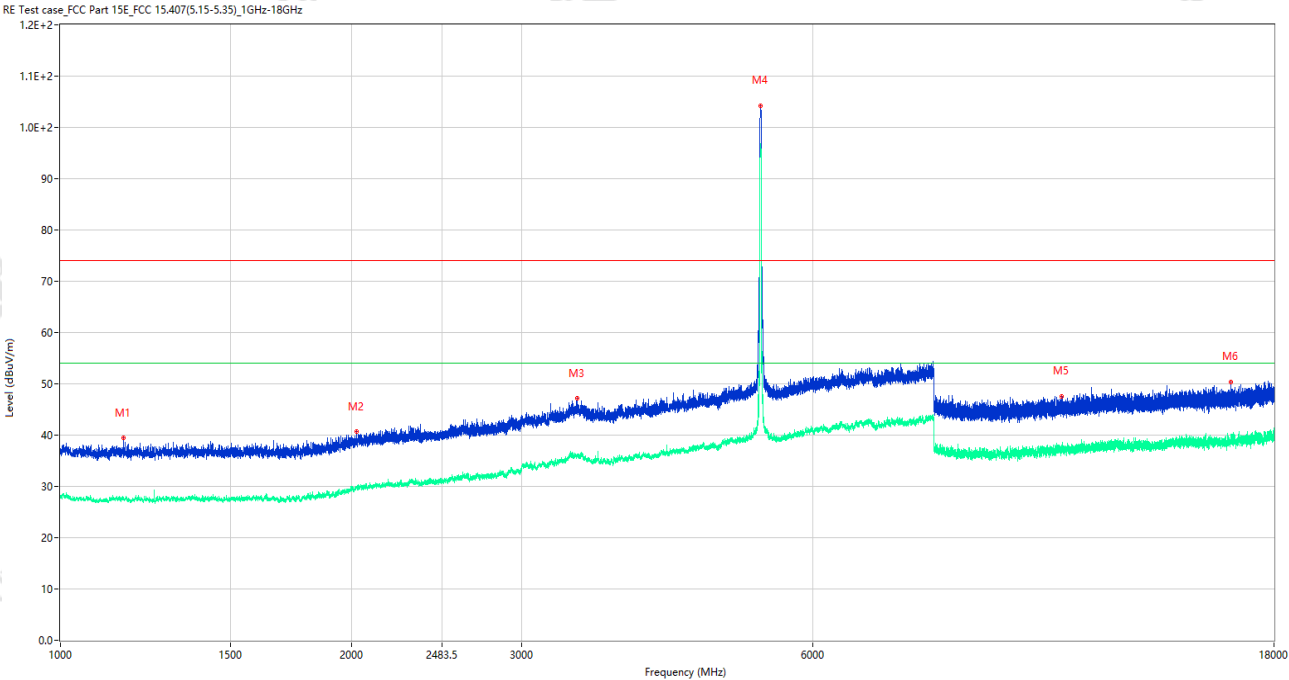


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1161.750        | 39.48            | -15.47      | 74.0           | 34.52       | Peak     | 355.00         | 150         | Horizontal | Pass    |
| 1** | 1161.750        | 27.56            | -15.47      | 54.0           | 26.44       | AV       | 355.00         | 150         | Horizontal | Pass    |
| 2   | 2024.250        | 40.68            | -14.00      | 74.0           | 33.32       | Peak     | 238.00         | 150         | Horizontal | Pass    |
| 2** | 2024.250        | 29.70            | -14.00      | 54.0           | 24.30       | AV       | 238.00         | 150         | Horizontal | Pass    |
| 3   | 3426.500        | 47.14            | -4.93       | 74.0           | 26.86       | Peak     | 349.00         | 150         | Horizontal | Pass    |
| 3** | 3426.500        | 36.32            | -4.93       | 54.0           | 17.68       | AV       | 349.00         | 150         | Horizontal | Pass    |
| 4   | 5298.000        | 104.26           | -2.04       | 74.0           | -30.26      | Peak     | 52.00          | 150         | Horizontal | N/A     |
| 4** | 5298.000        | 96.63            | -2.04       | 54.0           | -42.63      | AV       | 52.00          | 150         | Horizontal | N/A     |
| 5   | 10853.325       | 47.61            | -3.41       | 74.0           | 26.39       | Peak     | 240.00         | 150         | Horizontal | Pass    |
| 5** | 10853.325       | 37.18            | -3.41       | 54.0           | 16.82       | AV       | 240.00         | 150         | Horizontal | Pass    |
| 6   | 16250.174       | 50.40            | -1.47       | 74.0           | 23.60       | Peak     | 211.00         | 150         | Horizontal | Pass    |
| 6** | 16250.174       | 38.59            | -1.47       | 54.0           | 15.41       | AV       | 211.00         | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_07.24.00

|                |                    |                 |                             |
|----------------|--------------------|-----------------|-----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                        |
| Model Number:  | X6895B             | Humidity (%RH): | 52                          |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                         |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.3G WIFI 11n20 CH60 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12  |

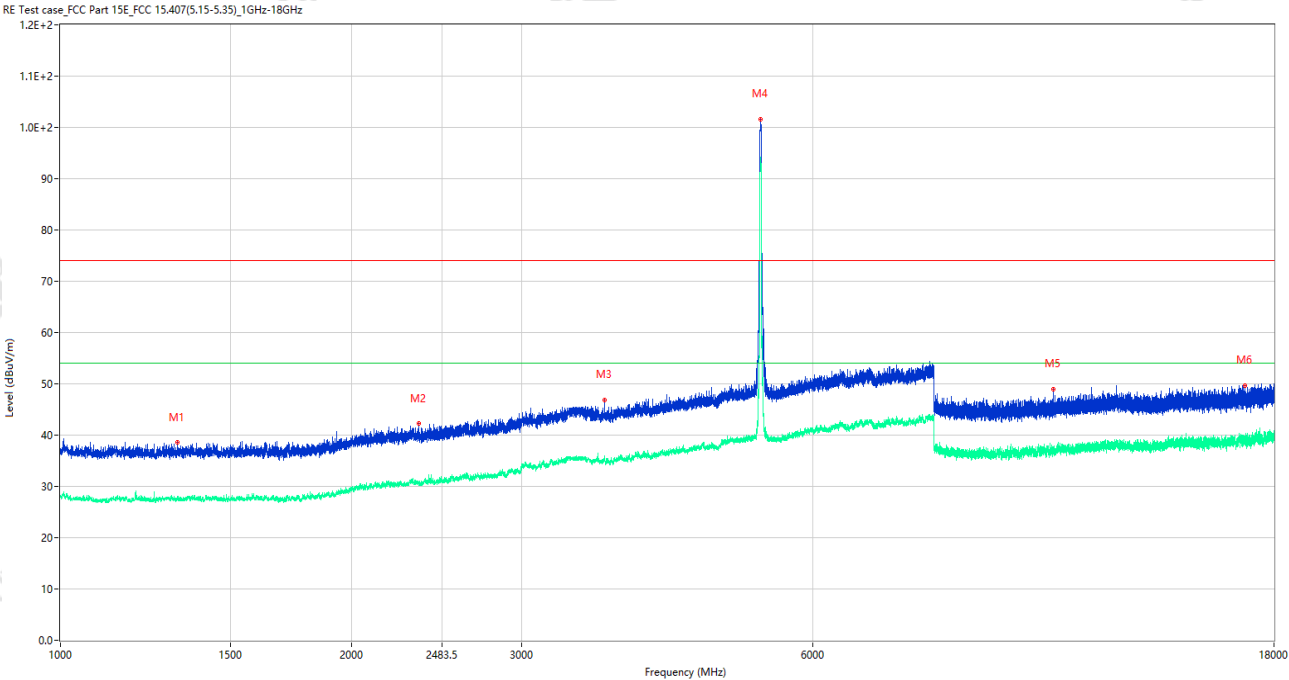


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1321.750        | 38.52            | -15.88      | 74.0           | 35.48       | Peak     | 140.00         | 150         | Vertical | Pass    |
| 1** | 1321.750        | 27.89            | -15.88      | 54.0           | 26.11       | AV       | 140.00         | 150         | Vertical | Pass    |
| 2   | 2346.000        | 42.30            | -12.12      | 74.0           | 31.70       | Peak     | 116.00         | 150         | Vertical | Pass    |
| 2** | 2346.000        | 30.51            | -12.12      | 54.0           | 23.49       | AV       | 116.00         | 150         | Vertical | Pass    |
| 3   | 3655.500        | 46.83            | -5.30       | 74.0           | 27.17       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 3** | 3655.500        | 35.11            | -5.30       | 54.0           | 18.89       | AV       | 360.00         | 150         | Vertical | Pass    |
| 4   | 5301.000        | 101.60           | -2.07       | 74.0           | -27.60      | Peak     | 62.00          | 150         | Vertical | N/A     |
| 4** | 5301.000        | 93.59            | -2.07       | 54.0           | -39.59      | AV       | 62.00          | 150         | Vertical | N/A     |
| 5   | 10639.813       | 48.99            | -3.84       | 74.0           | 25.01       | Peak     | 74.00          | 150         | Vertical | Pass    |
| 5** | 10639.813       | 37.45            | -3.84       | 54.0           | 16.55       | AV       | 74.00          | 150         | Vertical | Pass    |
| 6   | 16809.301       | 49.72            | -1.53       | 74.0           | 24.28       | Peak     | 345.00         | 150         | Vertical | Pass    |
| 6** | 16809.301       | 39.31            | -1.53       | 54.0           | 14.69       | AV       | 345.00         | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_07.27.25

|                |                    |                 |                             |
|----------------|--------------------|-----------------|-----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                        |
| Model Number:  | X6895B             | Humidity (%RH): | 52                          |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                         |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.3G WIFI 11n20 CH60 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12  |

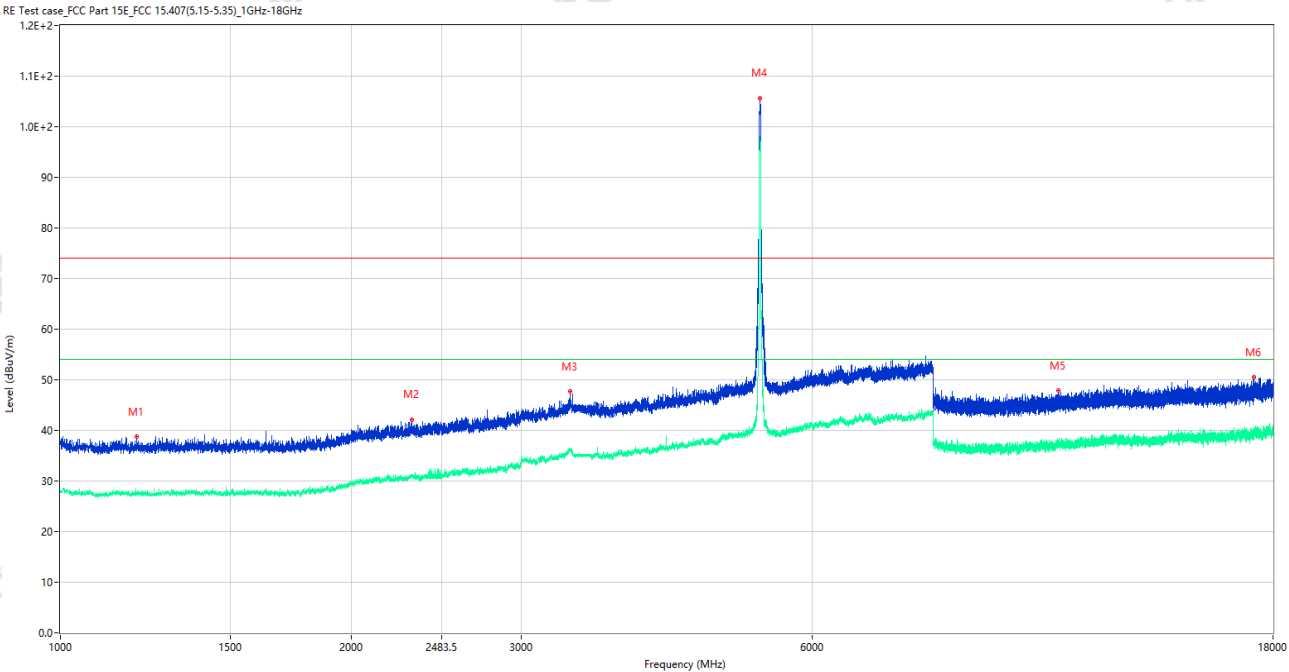


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1200.250        | 38.80            | -15.74      | 74.0           | 35.20       | Peak     | 358.00         | 150         | Horizontal | Pass    |
| 1** | 1200.250        | 27.67            | -15.74      | 54.0           | 26.33       | AV       | 358.00         | 150         | Horizontal | Pass    |
| 2   | 2313.250        | 42.17            | -12.43      | 74.0           | 31.83       | Peak     | 235.00         | 150         | Horizontal | Pass    |
| 2** | 2313.250        | 30.98            | -12.43      | 54.0           | 23.02       | AV       | 235.00         | 150         | Horizontal | Pass    |
| 3   | 3368.500        | 47.78            | -4.93       | 74.0           | 26.22       | Peak     | 45.00          | 150         | Horizontal | Pass    |
| 3** | 3368.500        | 36.27            | -4.93       | 54.0           | 17.73       | AV       | 45.00          | 150         | Horizontal | Pass    |
| 4   | 5302.500        | 105.66           | -2.04       | 74.0           | -31.66      | Peak     | 145.00         | 150         | Horizontal | N/A     |
| 4** | 5302.500        | 97.59            | -2.04       | 54.0           | -43.59      | AV       | 145.00         | 150         | Horizontal | N/A     |
| 5   | 10785.637       | 47.89            | -3.04       | 74.0           | 26.11       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 5** | 10785.637       | 37.24            | -3.04       | 54.0           | 16.76       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 6   | 17188.350       | 50.58            | 0.16        | 74.0           | 23.42       | Peak     | 346.00         | 150         | Horizontal | Pass    |
| 6** | 17188.350       | 39.96            | 0.16        | 54.0           | 14.04       | AV       | 346.00         | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_08.17.17

|                |                    |                 |                             |
|----------------|--------------------|-----------------|-----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                        |
| Model Number:  | X6895B             | Humidity (%RH): | 52                          |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                         |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.3G WIFI 11n40 CH54 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                |
| Test Engineer: | Zhang Zhongqiu     | Remark:         | 适配器: A04+数据线: A08<br>ANT12  |

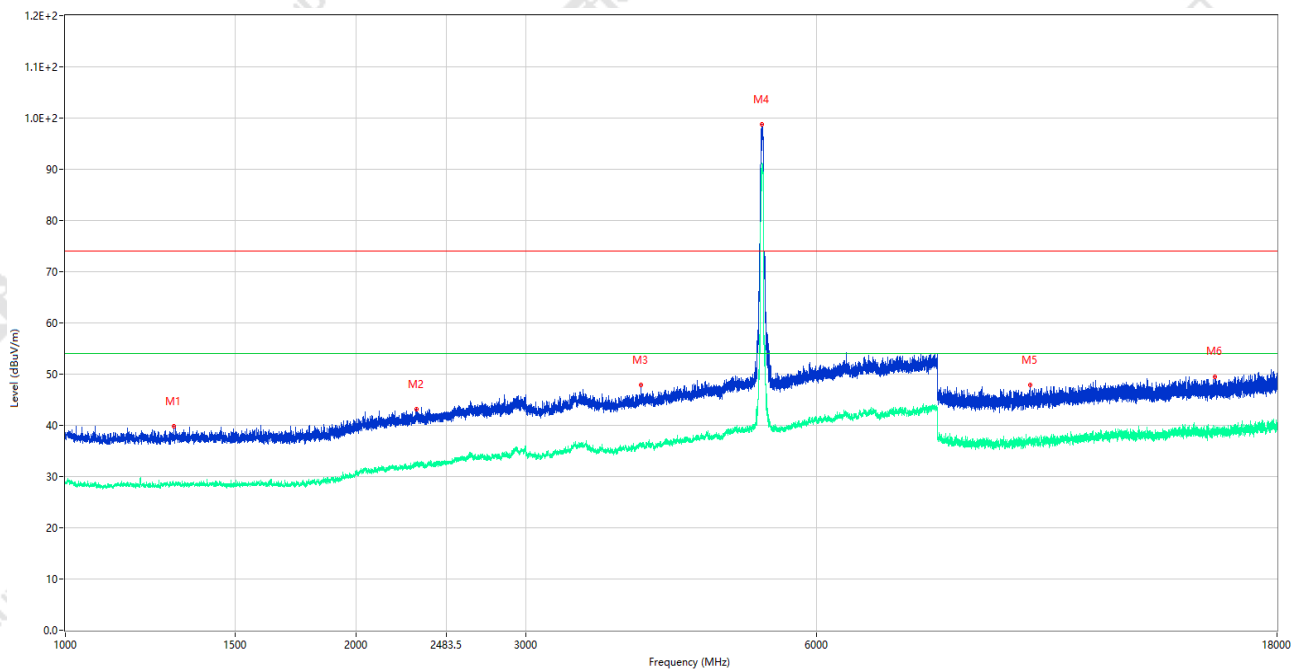

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1294.500        | 39.75            | -15.74      | 74.0           | 34.25       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 1** | 1294.500        | 28.31            | -15.74      | 54.0           | 25.69       | AV       | 360.00         | 150         | Vertical | Pass    |
| 2   | 2311.500        | 43.12            | -12.45      | 74.0           | 30.88       | Peak     | 1.00           | 150         | Vertical | Pass    |
| 2** | 2311.500        | 32.56            | -12.45      | 54.0           | 21.44       | AV       | 1.00           | 150         | Vertical | Pass    |
| 3   | 3950.500        | 47.89            | -4.35       | 74.0           | 26.11       | Peak     | 150.00         | 150         | Vertical | Pass    |
| 3** | 3950.500        | 36.04            | -4.35       | 54.0           | 17.96       | AV       | 150.00         | 150         | Vertical | Pass    |
| 4   | 5272.000        | 98.71            | -2.42       | 74.0           | -24.71      | Peak     | 60.00          | 150         | Vertical | N/A     |
| 4** | 5272.000        | 90.94            | -2.42       | 54.0           | -36.94      | AV       | 60.00          | 150         | Vertical | N/A     |
| 5   | 9984.000        | 47.87            | -3.70       | 74.0           | 26.13       | Peak     | 9.00           | 150         | Vertical | Pass    |
| 5** | 9984.000        | 36.59            | -3.70       | 54.0           | 17.41       | AV       | 9.00           | 150         | Vertical | Pass    |
| 6   | 15506.000       | 49.45            | -2.14       | 74.0           | 24.55       | Peak     | 1.00           | 150         | Vertical | Pass    |
| 6** | 15506.000       | 38.76            | -2.14       | 54.0           | 15.24       | AV       | 1.00           | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_08.12.55

EUT Name: Mobile Phone

Temp.(°C): 22.8

Model Number: X6895B

Humidity (%RH): 52

Sample Number: CC26010326-001-S09

Pressure(kPa): 101


Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n40 CH54 P=16.5

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

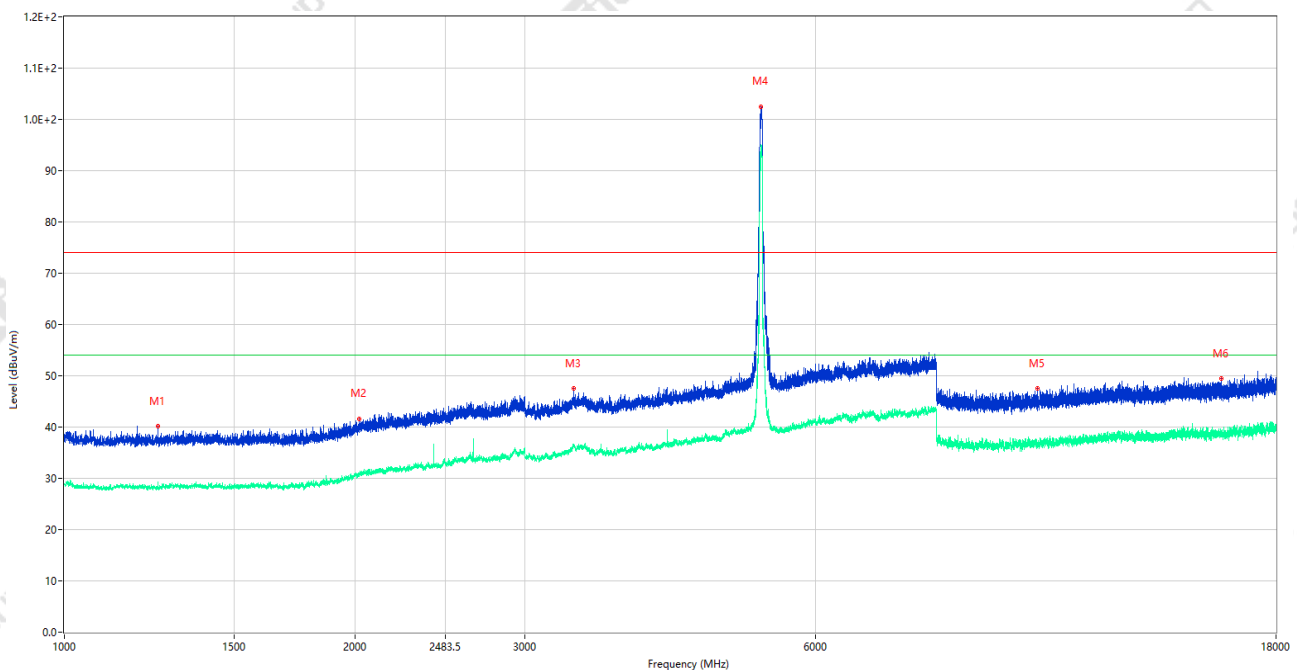Remark: 适配器: A04+数据线: A08  
ANT12

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1250.000        | 40.10            | -16.17      | 74.0           | 33.90       | Peak     | 6.00           | 150         | Horizontal | Pass    |
| 1** | 1250.000        | 28.80            | -16.17      | 54.0           | 25.20       | AV       | 6.00           | 150         | Horizontal | Pass    |
| 2   | 2021.750        | 41.54            | -14.11      | 74.0           | 32.46       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 2** | 2021.750        | 30.42            | -14.11      | 54.0           | 23.58       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 3   | 3369.000        | 47.47            | -4.90       | 74.0           | 26.53       | Peak     | 360.00         | 150         | Horizontal | Pass    |
| 3** | 3369.000        | 36.62            | -4.90       | 54.0           | 17.38       | AV       | 360.00         | 150         | Horizontal | Pass    |
| 4   | 5272.500        | 102.46           | -2.42       | 74.0           | -28.46      | Peak     | 160.00         | 150         | Horizontal | N/A     |
| 4** | 5272.500        | 95.14            | -2.42       | 54.0           | -41.14      | AV       | 160.00         | 150         | Horizontal | N/A     |
| 5   | 10197.500       | 47.54            | -3.46       | 74.0           | 26.46       | Peak     | 360.00         | 150         | Horizontal | Pass    |
| 5** | 10197.500       | 36.60            | -3.46       | 54.0           | 17.40       | AV       | 360.00         | 150         | Horizontal | Pass    |
| 6   | 15805.000       | 49.47            | -1.63       | 74.0           | 24.53       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 6** | 15805.000       | 38.89            | -1.63       | 54.0           | 15.11       | AV       | 0.00           | 150         | Horizontal | Pass    |


## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_08.27.30

|                |                    |                 |                            |
|----------------|--------------------|-----------------|----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                       |
| Model Number:  | X6895B             | Humidity (%RH): | 52                         |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                        |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.3G WIFI 11ac80 CH58 P=16 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz               |
| Test Engineer: | Zhang Zhongqiu     | Remark:         | 适配器: A04+数据线: A08<br>ANT12 |

RE Test case\_FCC Part 15E FCC 15.407(5.15-5.35)\_1GHz-18GHz

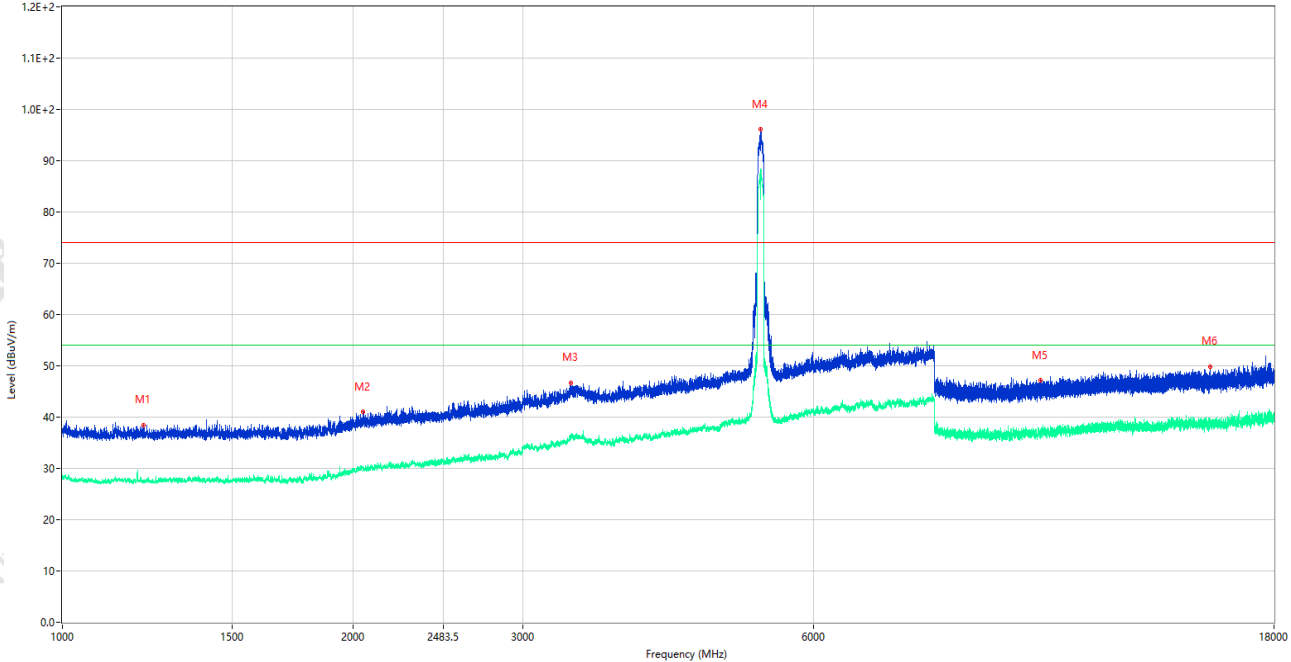


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1212.500        | 38.42            | -15.90      | 74.0           | 35.58       | Peak     | 348.00         | 150         | Vertical | Pass    |
| 1** | 1212.500        | 27.37            | -15.90      | 54.0           | 26.63       | AV       | 348.00         | 150         | Vertical | Pass    |
| 2   | 2049.500        | 40.98            | -13.62      | 74.0           | 33.02       | Peak     | 178.00         | 150         | Vertical | Pass    |
| 2** | 2049.500        | 29.80            | -13.62      | 54.0           | 24.20       | AV       | 178.00         | 150         | Vertical | Pass    |
| 3   | 3363.000        | 46.71            | -5.43       | 74.0           | 27.29       | Peak     | 108.00         | 150         | Vertical | Pass    |
| 3** | 3363.000        | 36.20            | -5.43       | 54.0           | 17.80       | AV       | 108.00         | 150         | Vertical | Pass    |
| 4   | 5283.000        | 96.08            | -2.20       | 74.0           | -22.08      | Peak     | 58.00          | 150         | Vertical | N/A     |
| 4** | 5283.000        | 86.62            | -2.20       | 54.0           | -32.62      | AV       | 58.00          | 150         | Vertical | N/A     |
| 5   | 10307.075       | 47.18            | -3.47       | 74.0           | 26.82       | Peak     | 332.00         | 150         | Vertical | Pass    |
| 5** | 10307.075       | 36.03            | -3.47       | 54.0           | 17.97       | AV       | 332.00         | 150         | Vertical | Pass    |
| 6   | 15450.338       | 49.77            | -1.94       | 74.0           | 24.23       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 6** | 15450.338       | 38.82            | -1.94       | 54.0           | 15.18       | AV       | 360.00         | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_08.32.10

|                |                    |                 |                            |
|----------------|--------------------|-----------------|----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                       |
| Model Number:  | X6895B             | Humidity (%RH): | 52                         |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                        |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.3G WIFI 11ac80 CH58 P=16 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz               |
| Test Engineer: | Zhang Zhongqiu     | Remark:         | 适配器: A04+数据线: A08<br>ANT12 |

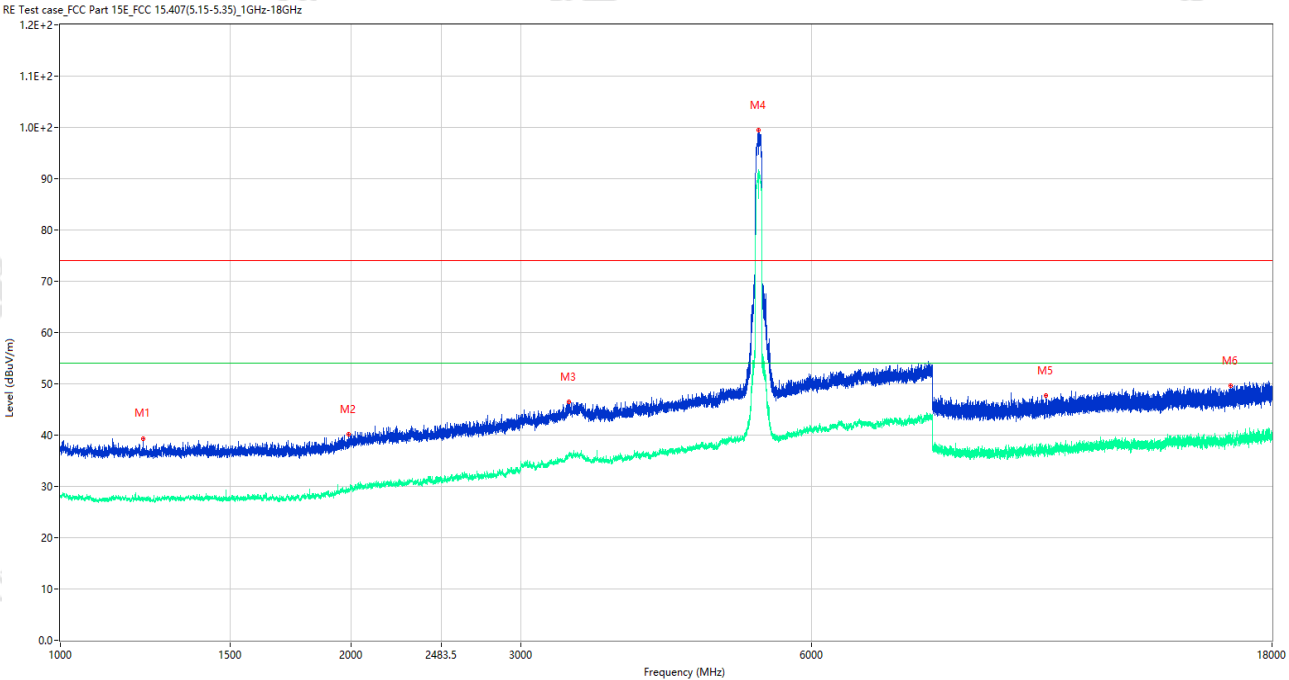

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1218.750        | 39.38            | -15.96      | 74.0           | 34.62       | Peak     | 237.00         | 150         | Horizontal | Pass    |
| 1** | 1218.750        | 27.01            | -15.96      | 54.0           | 26.99       | AV       | 237.00         | 150         | Horizontal | Pass    |
| 2   | 1987.000        | 40.15            | -14.80      | 74.0           | 33.85       | Peak     | 142.00         | 150         | Horizontal | Pass    |
| 2** | 1987.000        | 29.52            | -14.80      | 54.0           | 24.48       | AV       | 142.00         | 150         | Horizontal | Pass    |
| 3   | 3366.500        | 46.48            | -5.05       | 74.0           | 27.52       | Peak     | 11.00          | 150         | Horizontal | Pass    |
| 3** | 3366.500        | 36.45            | -5.05       | 54.0           | 17.55       | AV       | 11.00          | 150         | Horizontal | Pass    |
| 4   | 5283.000        | 99.46            | -2.20       | 74.0           | -25.46      | Peak     | 59.00          | 150         | Horizontal | N/A     |
| 4** | 5283.000        | 90.63            | -2.20       | 54.0           | -36.63      | AV       | 59.00          | 150         | Horizontal | N/A     |
| 5   | 10503.725       | 47.75            | -3.35       | 74.0           | 26.25       | Peak     | 2.00           | 150         | Horizontal | Pass    |
| 5** | 10503.725       | 37.11            | -3.35       | 54.0           | 16.89       | AV       | 2.00           | 150         | Horizontal | Pass    |
| 6   | 16297.425       | 49.58            | -1.47       | 74.0           | 24.42       | Peak     | 117.00         | 150         | Horizontal | Pass    |
| 6** | 16297.425       | 39.12            | -1.47       | 54.0           | 14.88       | AV       | 117.00         | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_09.47.22

EUT Name: Mobile Phone

Temp.(°C): 22.8

Model Number: X6895B

Humidity (%RH): 52

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A04+数据线: A08  
ANT12

RE Test case\_FCC Part 15E FCC 15.407(5.47-5.725)\_1GHz-18GHz

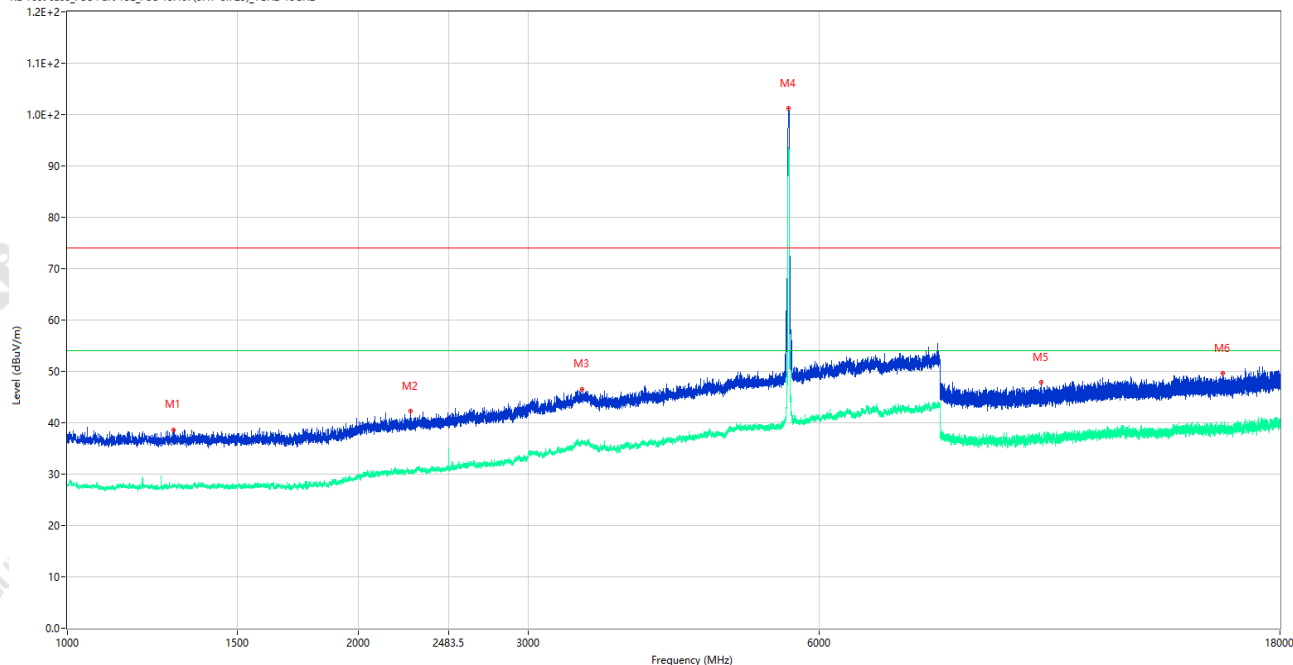


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1288.500        | 38.60            | -15.92      | 74.0           | 35.40       | Peak     | 98.00          | 150         | Vertical | Pass    |
| 1** | 1288.500        | 27.52            | -15.92      | 54.0           | 26.48       | AV       | 98.00          | 150         | Vertical | Pass    |
| 2   | 2265.250        | 42.23            | -13.23      | 74.0           | 31.77       | Peak     | 332.00         | 150         | Vertical | Pass    |
| 2** | 2265.250        | 30.58            | -13.23      | 54.0           | 23.42       | AV       | 332.00         | 150         | Vertical | Pass    |
| 3   | 3408.000        | 46.56            | -5.34       | 74.0           | 27.44       | Peak     | 12.00          | 150         | Vertical | Pass    |
| 3** | 3408.000        | 36.39            | -5.34       | 54.0           | 17.61       | AV       | 12.00          | 150         | Vertical | Pass    |
| 4   | 5578.500        | 101.15           | -2.88       | 74.0           | -27.15      | Peak     | 52.00          | 150         | Vertical | N/A     |
| 4** | 5578.500        | 93.75            | -2.88       | 54.0           | -39.75      | AV       | 52.00          | 150         | Vertical | N/A     |
| 5   | 10198.062       | 47.83            | -3.48       | 74.0           | 26.17       | Peak     | 332.00         | 150         | Vertical | Pass    |
| 5** | 10198.062       | 36.21            | -3.48       | 54.0           | 17.79       | AV       | 332.00         | 150         | Vertical | Pass    |
| 6   | 15711.263       | 49.62            | -1.81       | 74.0           | 24.38       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 6** | 15711.263       | 38.79            | -1.81       | 54.0           | 15.21       | AV       | 360.00         | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_09.41.24

|                |                    |                 |                            |
|----------------|--------------------|-----------------|----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 22.8                       |
| Model Number:  | X6895B             | Humidity (%RH): | 52                         |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                        |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.6G WIFI 11a CH116 P=15   |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz               |
| Test Engineer: | Zhang Zhongqiu     | Remark:         | 适配器: A04+数据线: A08<br>ANT12 |

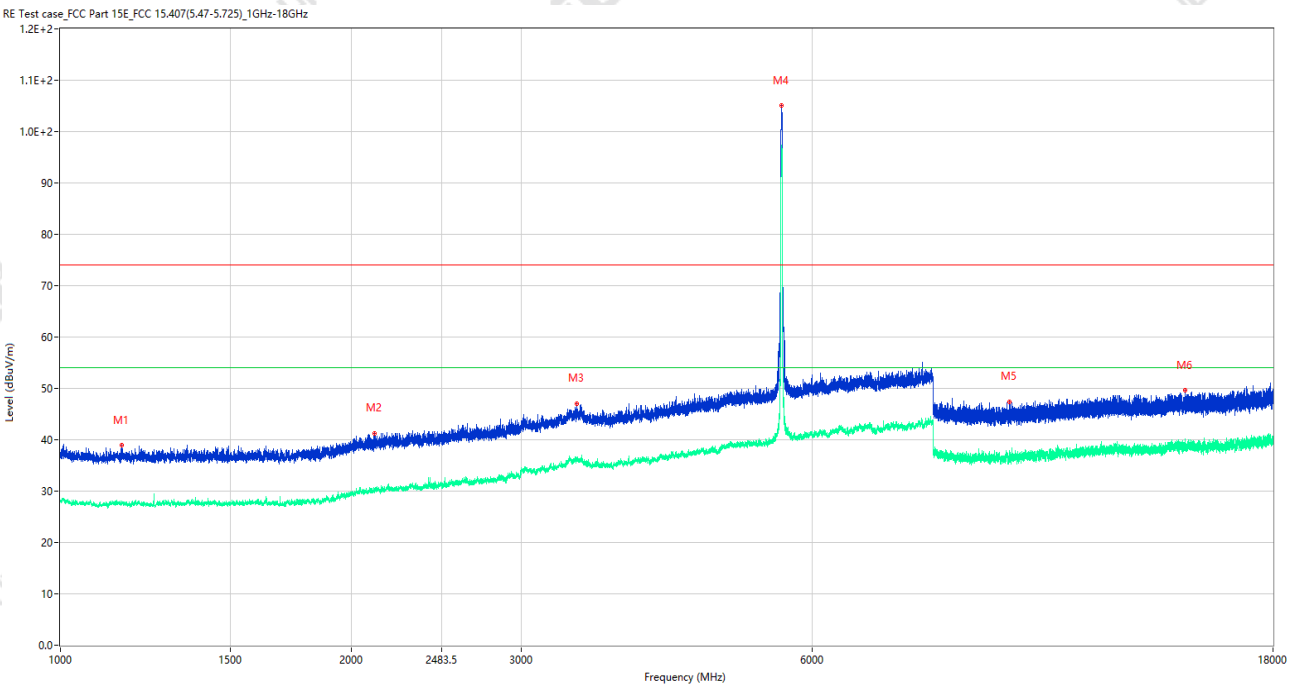

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1157.250        | 38.89            | -15.56      | 74.0           | 35.11       | Peak     | 299.00         | 150         | Horizontal | Pass    |
| 1** | 1157.250        | 27.43            | -15.56      | 54.0           | 26.57       | AV       | 299.00         | 150         | Horizontal | Pass    |
| 2   | 2114.500        | 41.22            | -13.55      | 74.0           | 32.78       | Peak     | 265.00         | 150         | Horizontal | Pass    |
| 2** | 2114.500        | 30.09            | -13.55      | 54.0           | 23.91       | AV       | 265.00         | 150         | Horizontal | Pass    |
| 3   | 3421.500        | 47.08            | -4.93       | 74.0           | 26.92       | Peak     | 11.00          | 150         | Horizontal | Pass    |
| 3** | 3421.500        | 35.97            | -4.93       | 54.0           | 18.03       | AV       | 11.00          | 150         | Horizontal | Pass    |
| 4   | 5579.000        | 105.08           | -2.87       | 74.0           | -31.08      | Peak     | 58.00          | 150         | Horizontal | N/A     |
| 4** | 5579.000        | 97.27            | -2.87       | 54.0           | -43.27      | AV       | 58.00          | 150         | Horizontal | N/A     |
| 5   | 9612.862        | 47.35            | -3.25       | 74.0           | 26.65       | Peak     | 355.00         | 150         | Horizontal | Pass    |
| 5** | 9612.862        | 37.28            | -3.25       | 54.0           | 16.72       | AV       | 355.00         | 150         | Horizontal | Pass    |
| 6   | 14591.438       | 49.57            | -2.08       | 74.0           | 24.43       | Peak     | 221.00         | 150         | Horizontal | Pass    |
| 6** | 14591.438       | 39.75            | -2.08       | 54.0           | 14.25       | AV       | 221.00         | 150         | Horizontal | Pass    |


## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_20.55.42

|                |                    |                 |                              |
|----------------|--------------------|-----------------|------------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.1                         |
| Model Number:  | X6895B             | Humidity (%RH): | 51                           |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                          |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.6G WIFI 11n20 CH116 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                 |
| Test Engineer: | Liu Yabo           | Remark:         | 适配器: A04+数据线: A08<br>ANT12   |

RE Test case\_FCC Part 15E\_FCC 15.407(5.47-5.725)\_1GHz-18GHz

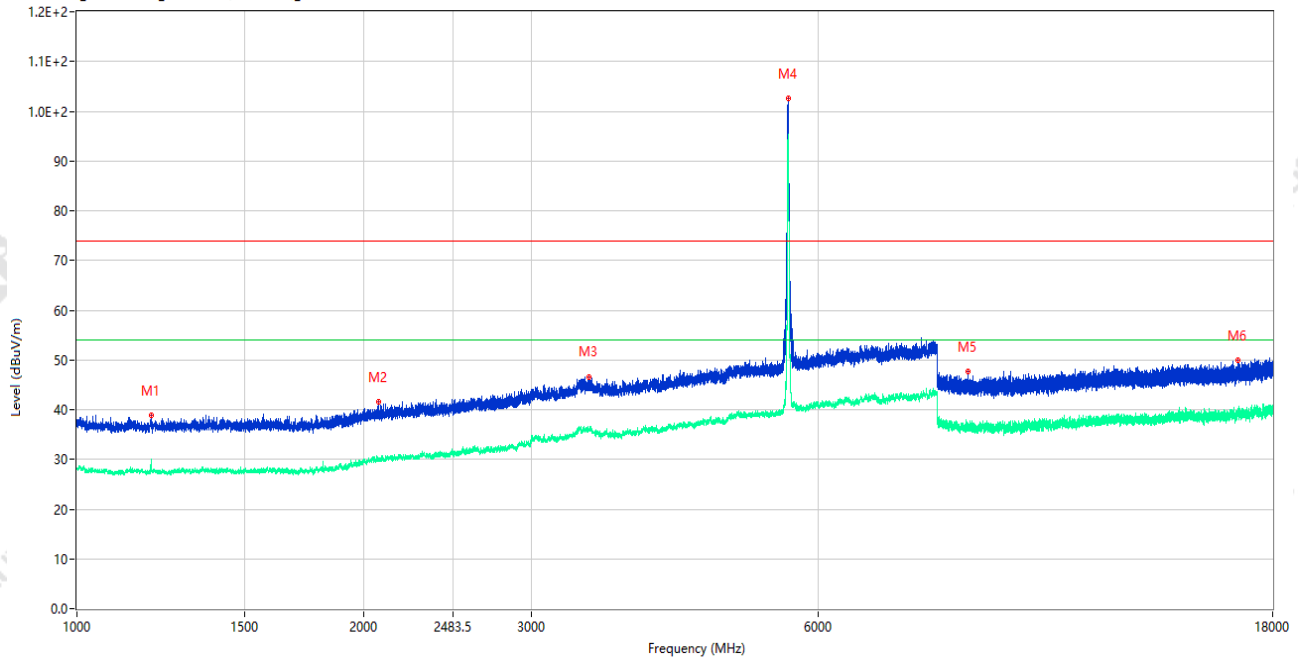

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1196.250        | 38.88            | -15.72      | 74.0           | 35.12       | Peak     | 16.00          | 150         | Vertical | Pass    |
| 1** | 1196.250        | 29.92            | -15.72      | 54.0           | 24.08       | AV       | 16.00          | 150         | Vertical | Pass    |
| 2   | 2075.250        | 41.61            | -13.77      | 74.0           | 32.39       | Peak     | 227.00         | 150         | Vertical | Pass    |
| 2** | 2075.250        | 29.78            | -13.77      | 54.0           | 24.22       | AV       | 227.00         | 150         | Vertical | Pass    |
| 3   | 3451.500        | 46.67            | -4.96       | 74.0           | 27.33       | Peak     | 1.00           | 150         | Vertical | Pass    |
| 3** | 3451.500        | 35.82            | -4.96       | 54.0           | 18.18       | AV       | 1.00           | 150         | Vertical | Pass    |
| 4   | 5578.500        | 102.57           | -2.88       | 74.0           | -28.57      | Peak     | 163.00         | 150         | Vertical | N/A     |
| 4** | 5578.500        | 95.02            | -2.88       | 54.0           | -41.02      | AV       | 163.00         | 150         | Vertical | N/A     |
| 5   | 8617.975        | 47.71            | -5.40       | 74.0           | 26.29       | Peak     | 143.00         | 150         | Vertical | Pass    |
| 5** | 8617.975        | 36.36            | -5.40       | 54.0           | 17.64       | AV       | 143.00         | 150         | Vertical | Pass    |
| 6   | 16559.400       | 49.85            | -0.96       | 74.0           | 24.15       | Peak     | 107.00         | 150         | Vertical | Pass    |
| 6** | 16559.400       | 39.79            | -0.96       | 54.0           | 14.21       | AV       | 107.00         | 150         | Vertical | Pass    |


## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_20.50.43

|                |                    |                 |                              |
|----------------|--------------------|-----------------|------------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.1                         |
| Model Number:  | X6895B             | Humidity (%RH): | 51                           |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                          |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.6G WIFI 11n20 CH116 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                 |
| Test Engineer: | Liu Yabo           | Remark:         | 适配器: A04+数据线: A08<br>ANT12   |

RE Test case\_FCC Part 15E\_FCC 15.407(5.47-5.725)\_1GHz-18GHz

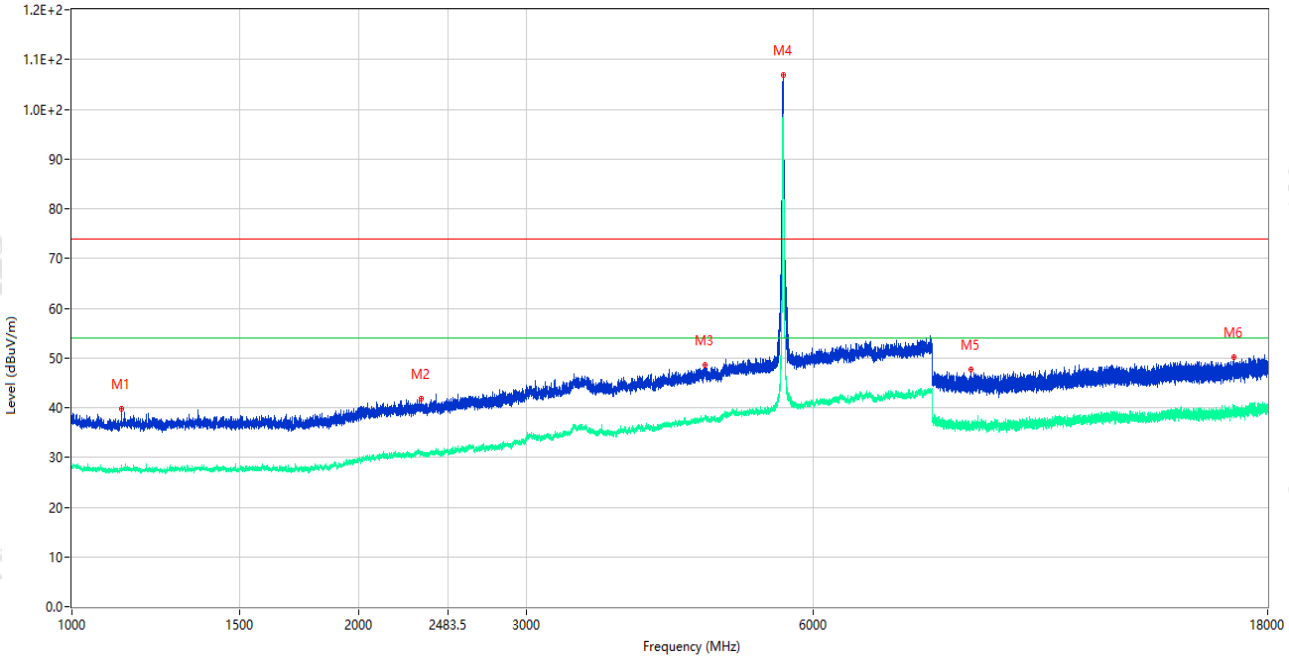


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1127.000        | 39.67            | -15.61      | 74.0           | 34.33       | Peak     | 359.00         | 150         | Horizontal | Pass    |
| 1** | 1127.000        | 27.46            | -15.61      | 54.0           | 26.54       | AV       | 359.00         | 150         | Horizontal | Pass    |
| 2   | 2325.500        | 41.76            | -12.18      | 74.0           | 32.24       | Peak     | 256.00         | 150         | Horizontal | Pass    |
| 2** | 2325.500        | 30.71            | -12.18      | 54.0           | 23.29       | AV       | 256.00         | 150         | Horizontal | Pass    |
| 3   | 4617.000        | 48.67            | -3.06       | 74.0           | 25.33       | Peak     | 360.00         | 150         | Horizontal | Pass    |
| 3** | 4617.000        | 37.84            | -3.06       | 54.0           | 16.16       | AV       | 360.00         | 150         | Horizontal | Pass    |
| 4   | 5581.000        | 106.80           | -2.85       | 74.0           | -32.80      | Peak     | 11.00          | 150         | Horizontal | N/A     |
| 4** | 5581.000        | 98.92            | -2.85       | 54.0           | -44.92      | AV       | 11.00          | 150         | Horizontal | N/A     |
| 5   | 8789.687        | 47.65            | -5.19       | 74.0           | 26.35       | Peak     | 334.00         | 150         | Horizontal | Pass    |
| 5** | 8789.687        | 35.90            | -5.19       | 54.0           | 18.10       | AV       | 334.00         | 150         | Horizontal | Pass    |
| 6   | 16572.261       | 50.13            | -0.74       | 74.0           | 23.87       | Peak     | 278.00         | 150         | Horizontal | Pass    |
| 6** | 16572.261       | 39.88            | -0.74       | 54.0           | 14.12       | AV       | 278.00         | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_21.05.43

|                |                    |                 |                              |
|----------------|--------------------|-----------------|------------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.1                         |
| Model Number:  | X6895B             | Humidity (%RH): | 51                           |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                          |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.6G WIFI 11n40 CH118 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                 |
| Test Engineer: | Liu Yabo           | Remark:         | 适配器: A04+数据线: A08<br>ANT12   |

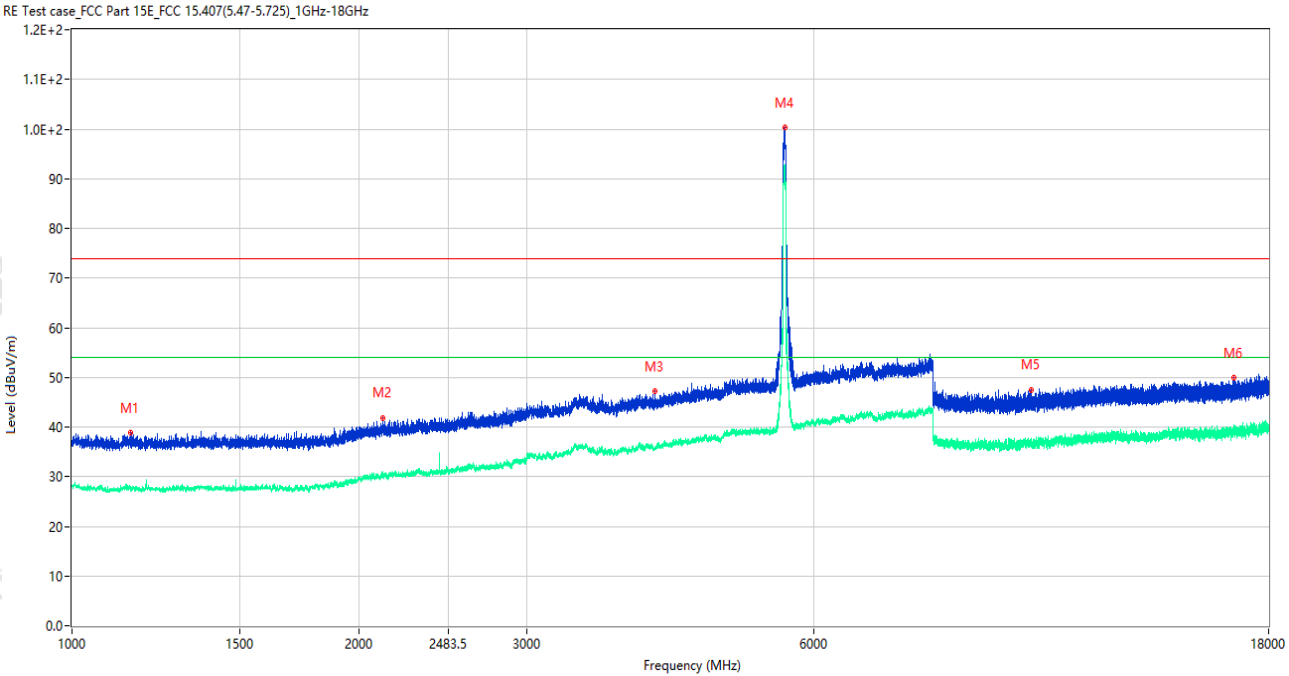


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1151.750        | 38.77            | -15.65      | 74.0           | 35.23       | Peak     | 59.00          | 150         | Vertical | Pass    |
| 1** | 1151.750        | 27.64            | -15.65      | 54.0           | 26.36       | AV       | 59.00          | 150         | Vertical | Pass    |
| 2   | 2119.750        | 41.90            | -13.40      | 74.0           | 32.10       | Peak     | 307.00         | 150         | Vertical | Pass    |
| 2** | 2119.750        | 30.31            | -13.40      | 54.0           | 23.69       | AV       | 307.00         | 150         | Vertical | Pass    |
| 3   | 4088.000        | 47.14            | -5.00       | 74.0           | 26.86       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 3** | 4088.000        | 35.43            | -5.00       | 54.0           | 18.57       | AV       | 360.00         | 150         | Vertical | Pass    |
| 4   | 5592.000        | 100.39           | -2.80       | 74.0           | -26.39      | Peak     | 224.00         | 150         | Vertical | N/A     |
| 4** | 5592.000        | 92.72            | -2.80       | 54.0           | -38.72      | AV       | 224.00         | 150         | Vertical | N/A     |
| 5   | 10140.112       | 47.56            | -4.07       | 74.0           | 26.44       | Peak     | 96.00          | 150         | Vertical | Pass    |
| 5** | 10140.112       | 36.75            | -4.07       | 54.0           | 17.25       | AV       | 96.00          | 150         | Vertical | Pass    |
| 6   | 16557.563       | 49.85            | -0.91       | 74.0           | 24.15       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 6** | 16557.563       | 39.84            | -0.91       | 54.0           | 14.16       | AV       | 360.00         | 150         | Vertical | Pass    |

# Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_22.18.13

|                |                    |                 |                              |
|----------------|--------------------|-----------------|------------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.1                         |
| Model Number:  | X6895B             | Humidity (%RH): | 51                           |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                          |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.6G WIFI 11n40 CH118 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                 |
| Test Engineer: | Liu Yabo           | Remark:         | 适配器: A04+数据线: A08<br>ANT12   |

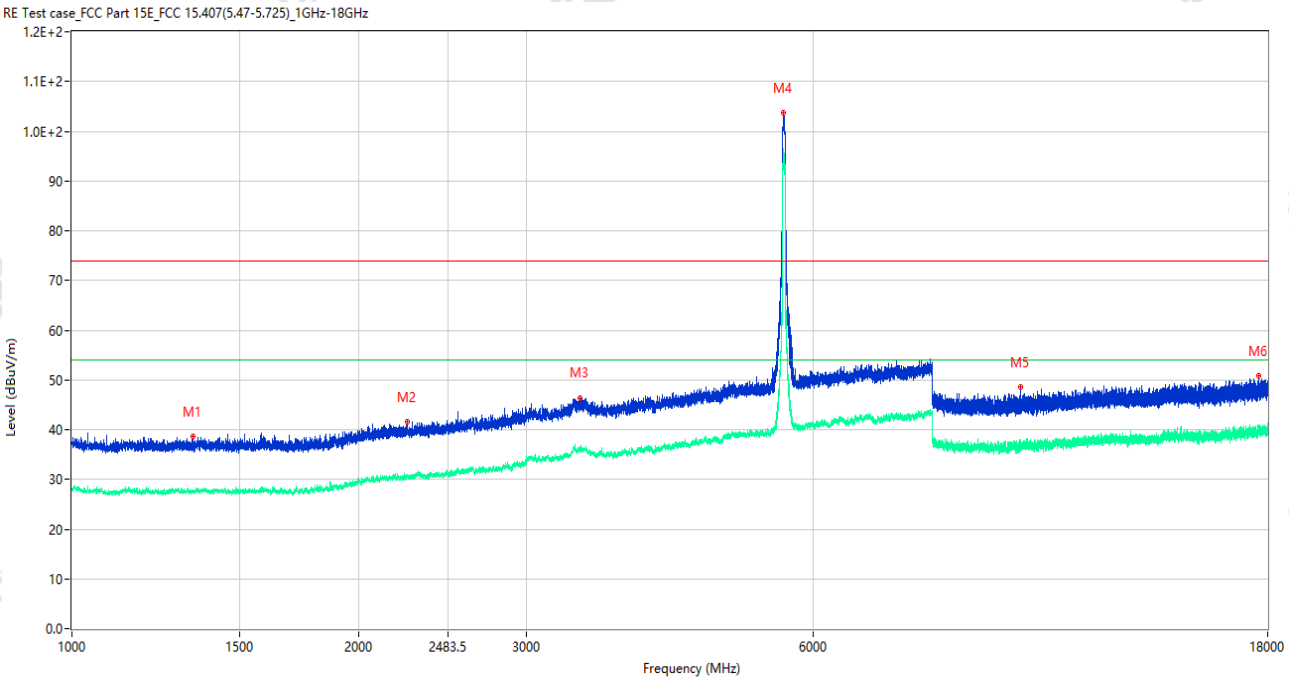


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1339.750        | 38.58            | -16.06      | 74.0           | 35.42       | Peak     | 138.00         | 150         | Horizontal | Pass    |
| 1** | 1339.750        | 27.44            | -16.06      | 54.0           | 26.56       | AV       | 138.00         | 150         | Horizontal | Pass    |
| 2   | 2249.500        | 41.47            | -12.89      | 74.0           | 32.53       | Peak     | 360.00         | 150         | Horizontal | Pass    |
| 2** | 2249.500        | 30.60            | -12.89      | 54.0           | 23.40       | AV       | 360.00         | 150         | Horizontal | Pass    |
| 3   | 3411.000        | 46.42            | -5.30       | 74.0           | 27.58       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 3** | 3411.000        | 35.82            | -5.30       | 54.0           | 18.18       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 4   | 5587.000        | 103.67           | -2.83       | 74.0           | -29.67      | Peak     | 48.00          | 150         | Horizontal | N/A     |
| 4** | 5587.000        | 96.00            | -2.83       | 54.0           | -42.00      | AV       | 48.00          | 150         | Horizontal | N/A     |
| 5   | 9898.812        | 48.50            | -4.37       | 74.0           | 25.50       | Peak     | 237.00         | 150         | Horizontal | Pass    |
| 5** | 9898.812        | 36.87            | -4.37       | 54.0           | 17.13       | AV       | 237.00         | 150         | Horizontal | Pass    |
| 6   | 17626.724       | 50.81            | 0.19        | 74.0           | 23.19       | Peak     | 15.00          | 150         | Horizontal | Pass    |
| 6** | 17626.724       | 40.20            | 0.19        | 54.0           | 13.80       | AV       | 15.00          | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_21.42.59

|                |                    |                 |                             |
|----------------|--------------------|-----------------|-----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.1                        |
| Model Number:  | X6895B             | Humidity (%RH): | 51                          |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                         |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.6G WIFI 11ac80 CH122 P=16 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                |
| Test Engineer: | Liu Yabo           | Remark:         | 适配器: A04+数据线: A08<br>ANT12  |

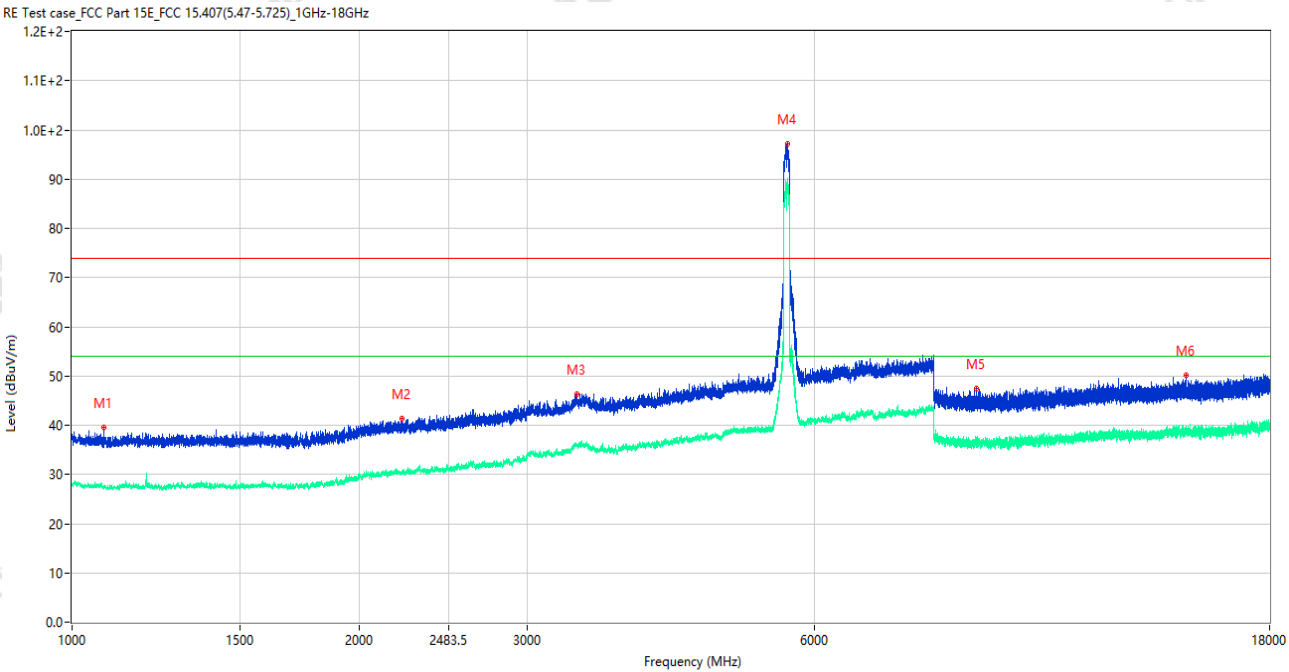


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1080.250        | 39.56            | -15.58      | 74.0           | 34.44       | Peak     | 20.00          | 150         | Vertical | Pass    |
| 1** | 1080.250        | 27.59            | -15.58      | 54.0           | 26.41       | AV       | 20.00          | 150         | Vertical | Pass    |
| 2   | 2219.250        | 41.25            | -13.07      | 74.0           | 32.75       | Peak     | 117.00         | 150         | Vertical | Pass    |
| 2** | 2219.250        | 30.28            | -13.07      | 54.0           | 23.72       | AV       | 117.00         | 150         | Vertical | Pass    |
| 3   | 3378.500        | 46.40            | -5.02       | 74.0           | 27.60       | Peak     | 64.00          | 150         | Vertical | Pass    |
| 3** | 3378.500        | 35.91            | -5.02       | 54.0           | 18.09       | AV       | 64.00          | 150         | Vertical | Pass    |
| 4   | 5623.000        | 97.15            | -2.34       | 74.0           | -23.15      | Peak     | 193.00         | 150         | Vertical | N/A     |
| 4** | 5623.000        | 89.88            | -2.34       | 54.0           | -35.88      | AV       | 193.00         | 150         | Vertical | N/A     |
| 5   | 8871.862        | 47.39            | -4.58       | 74.0           | 26.61       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 5** | 8871.862        | 37.09            | -4.58       | 54.0           | 16.91       | AV       | 360.00         | 150         | Vertical | Pass    |
| 6   | 14707.987       | 50.08            | -2.16       | 74.0           | 23.92       | Peak     | 10.00          | 150         | Vertical | Pass    |
| 6** | 14707.987       | 38.76            | -2.16       | 54.0           | 15.24       | AV       | 10.00          | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-05\_21.34.09

|                |                    |                 |                             |
|----------------|--------------------|-----------------|-----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.1                        |
| Model Number:  | X6895B             | Humidity (%RH): | 51                          |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                         |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.6G WIFI 11ac80 CH122 P=16 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                |
| Test Engineer: | Liu Yabo           | Remark:         | 适配器: A04+数据线: A08<br>ANT12  |

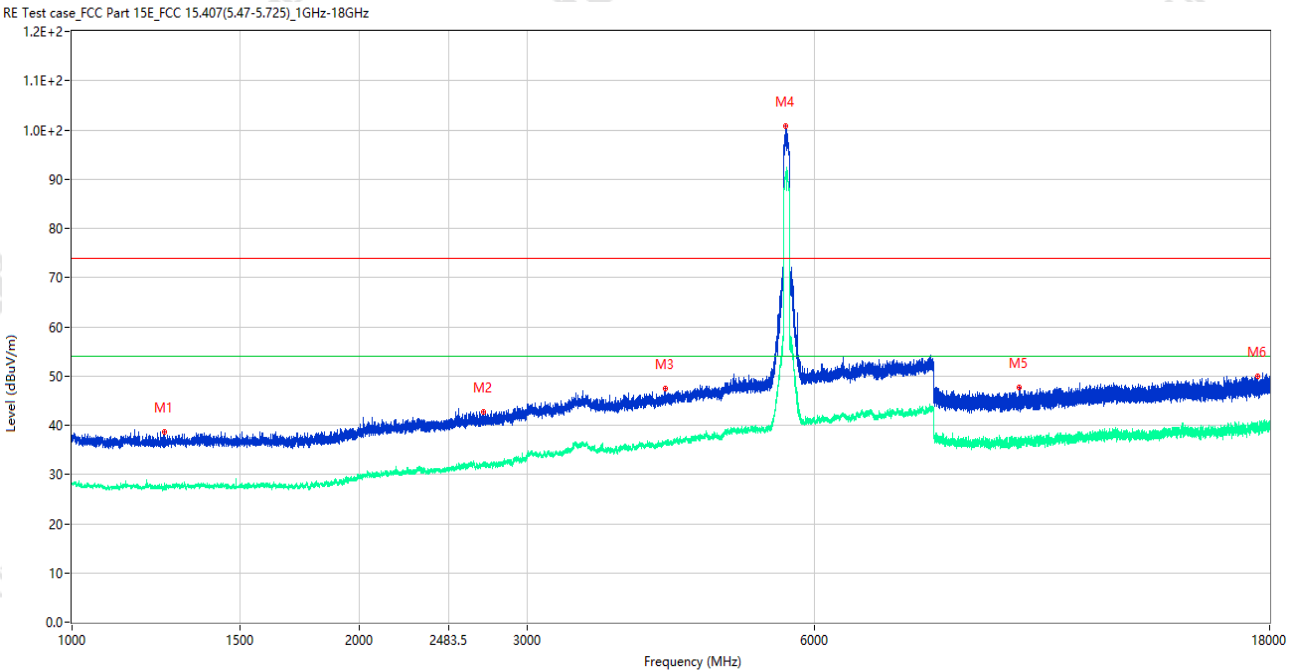


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1250.250        | 38.72            | -16.18      | 74.0           | 35.28       | Peak     | 233.00         | 150         | Horizontal | Pass    |
| 1** | 1250.250        | 27.85            | -16.18      | 54.0           | 26.15       | AV       | 233.00         | 150         | Horizontal | Pass    |
| 2   | 2696.750        | 42.75            | -10.58      | 74.0           | 31.25       | Peak     | 78.00          | 150         | Horizontal | Pass    |
| 2** | 2696.750        | 32.07            | -10.58      | 54.0           | 21.93       | AV       | 78.00          | 150         | Horizontal | Pass    |
| 3   | 4185.500        | 47.53            | -3.90       | 74.0           | 26.47       | Peak     | 215.00         | 150         | Horizontal | Pass    |
| 3** | 4185.500        | 36.53            | -3.90       | 54.0           | 17.47       | AV       | 215.00         | 150         | Horizontal | Pass    |
| 4   | 5603.500        | 100.85           | -2.77       | 74.0           | -26.85      | Peak     | 37.00          | 150         | Horizontal | N/A     |
| 4** | 5603.500        | 90.86            | -2.77       | 54.0           | -36.86      | AV       | 37.00          | 150         | Horizontal | N/A     |
| 5   | 9838.488        | 47.63            | -3.88       | 74.0           | 26.37       | Peak     | 98.00          | 150         | Horizontal | Pass    |
| 5** | 9838.488        | 36.27            | -3.88       | 54.0           | 17.73       | AV       | 98.00          | 150         | Horizontal | Pass    |
| 6   | 17477.626       | 49.85            | 0.21        | 74.0           | 24.15       | Peak     | 347.00         | 150         | Horizontal | Pass    |
| 6** | 17477.626       | 39.48            | 0.21        | 54.0           | 14.52       | AV       | 347.00         | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-06\_00.12.22

|                |                    |                 |                            |
|----------------|--------------------|-----------------|----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.2                       |
| Model Number:  | X6895B             | Humidity (%RH): | 53                         |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                        |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.8G WIFI 11a CH157 P=15   |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz               |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12 |

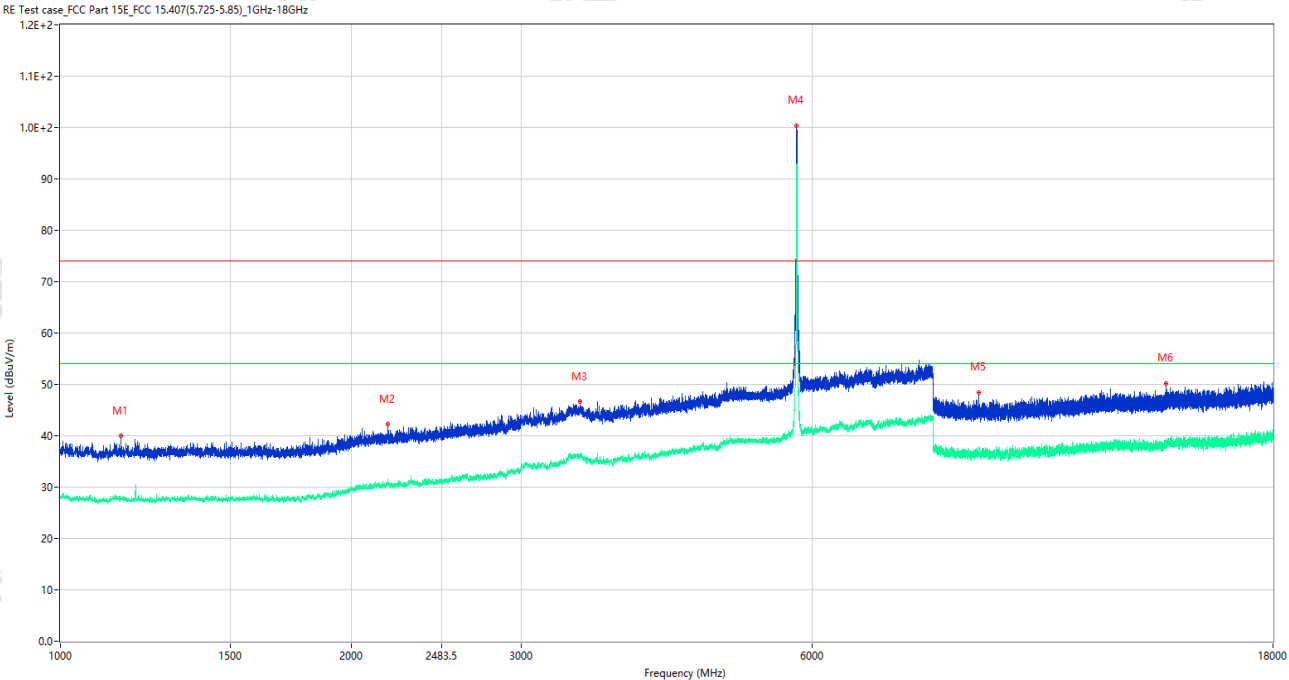

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1155.750        | 39.93            | -15.61      | 74.0           | 34.07       | Peak     | 256.00         | 150         | Vertical | Pass    |
| 1** | 1155.750        | 27.50            | -15.61      | 54.0           | 26.50       | AV       | 256.00         | 150         | Vertical | Pass    |
| 2   | 2184.250        | 42.27            | -13.09      | 74.0           | 31.73       | Peak     | 344.00         | 150         | Vertical | Pass    |
| 2** | 2184.250        | 30.86            | -13.09      | 54.0           | 23.24       | AV       | 344.00         | 150         | Vertical | Pass    |
| 3   | 3453.500        | 46.62            | -4.96       | 74.0           | 27.38       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 3** | 3453.500        | 36.44            | -4.96       | 54.0           | 17.56       | AV       | 360.00         | 150         | Vertical | Pass    |
| 4   | 5781.000        | 100.43           | -1.53       | 74.0           | -26.43      | Peak     | 42.00          | 150         | Vertical | N/A     |
| 4** | 5781.000        | 91.90            | -1.53       | 54.0           | -37.90      | AV       | 42.00          | 150         | Vertical | N/A     |
| 5   | 8933.613        | 48.46            | -4.22       | 74.0           | 25.54       | Peak     | 99.00          | 150         | Vertical | Pass    |
| 5** | 8933.613        | 36.75            | -4.22       | 54.0           | 17.25       | AV       | 99.00          | 150         | Vertical | Pass    |
| 6   | 13953.988       | 50.19            | -2.08       | 74.0           | 23.81       | Peak     | 277.00         | 150         | Vertical | Pass    |
| 6** | 13953.988       | 39.11            | -2.08       | 54.0           | 14.89       | AV       | 277.00         | 150         | Vertical | Pass    |


## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-06\_00.02.29

|                |                    |                 |                            |
|----------------|--------------------|-----------------|----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.2                       |
| Model Number:  | X6895B             | Humidity (%RH): | 53                         |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                        |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.8G WIFI 11a CH157 P=15   |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz               |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12 |

RE Test case\_FCC Part 15E\_FCC 15.407(5.725-5.85)\_1GHz-18GHz

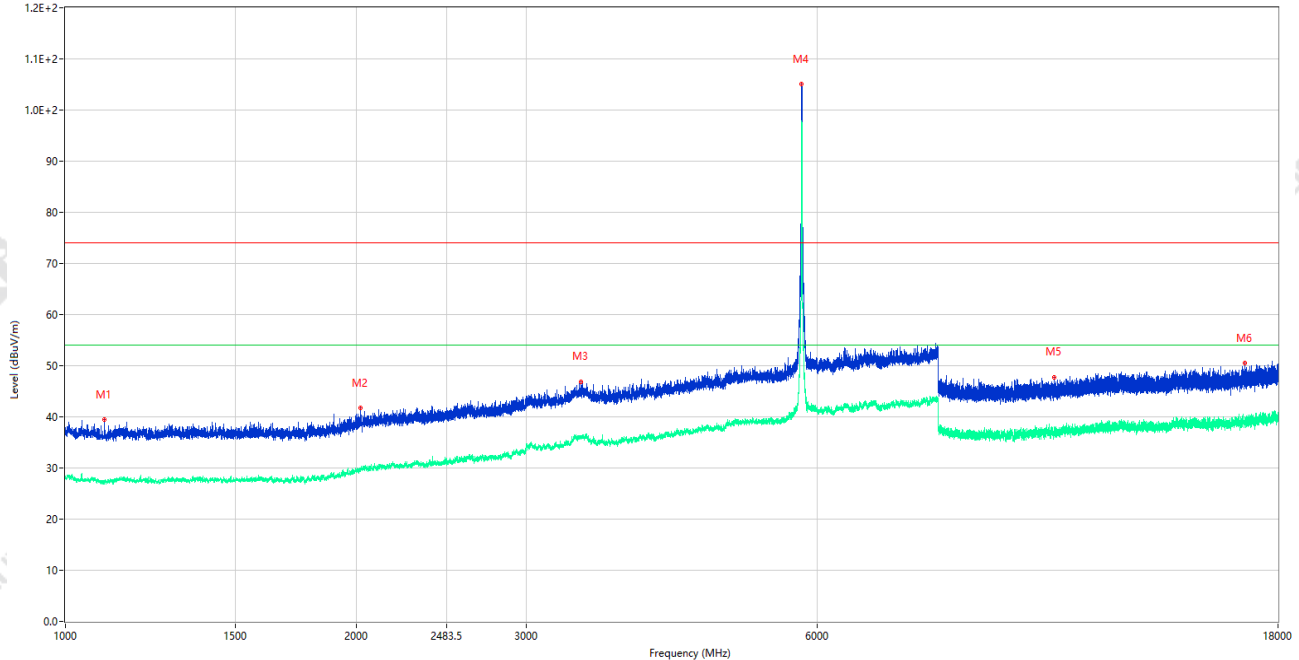

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1097.750        | 39.44            | -15.74      | 74.0           | 34.56       | Peak     | 353.00         | 150         | Horizontal | Pass    |
| 1** | 1097.750        | 27.61            | -15.74      | 54.0           | 26.39       | AV       | 353.00         | 150         | Horizontal | Pass    |
| 2   | 2020.250        | 41.73            | -14.15      | 74.0           | 32.27       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 2** | 2020.250        | 29.48            | -14.15      | 54.0           | 24.52       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 3   | 3414.000        | 46.89            | -5.27       | 74.0           | 27.11       | Peak     | 360.00         | 150         | Horizontal | Pass    |
| 3** | 3414.000        | 36.18            | -5.27       | 54.0           | 17.82       | AV       | 360.00         | 150         | Horizontal | Pass    |
| 4   | 5784.500        | 105.02           | -1.54       | 74.0           | -31.02      | Peak     | 40.00          | 150         | Horizontal | N/A     |
| 4** | 5784.500        | 97.45            | -1.54       | 54.0           | -43.45      | AV       | 40.00          | 150         | Horizontal | N/A     |
| 5   | 10562.625       | 47.73            | -3.27       | 74.0           | 26.27       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 5** | 10562.625       | 37.68            | -3.27       | 54.0           | 16.32       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 6   | 16648.653       | 50.48            | -1.38       | 74.0           | 23.52       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 6** | 16648.653       | 39.09            | -1.38       | 54.0           | 14.91       | AV       | 0.00           | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-06\_00.18.06

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: X6895B

Humidity (%RH): 53

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11n20 CH157 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Siyuan

Remark: 适配器: A04+数据线: A08  
ANT12

RE Test case\_FCC Part 15E\_FCC 15.407(5.725-5.85)\_1GHz-18GHz

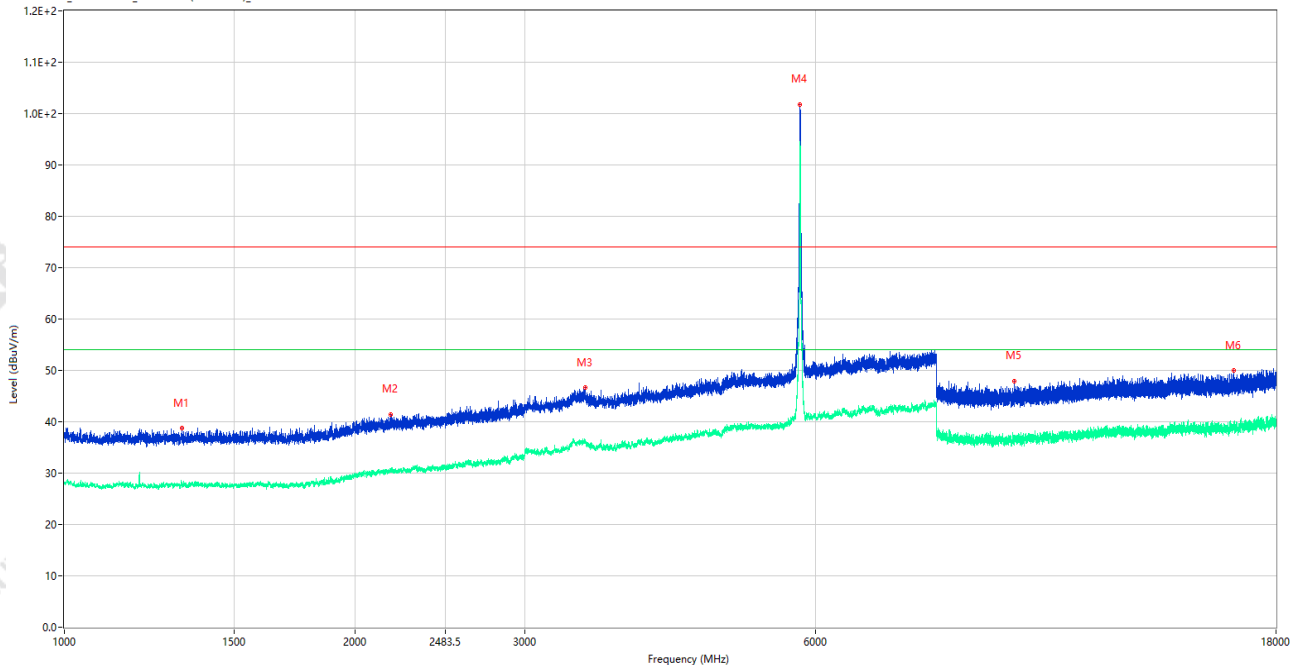


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1323.250        | 38.73            | -15.87      | 74.0           | 35.27       | Peak     | 237.00         | 150         | Vertical | Pass    |
| 1** | 1323.250        | 27.91            | -15.87      | 54.0           | 26.09       | AV       | 237.00         | 150         | Vertical | Pass    |
| 2   | 2177.500        | 41.49            | -12.85      | 74.0           | 32.53       | Peak     | 172.00         | 150         | Vertical | Pass    |
| 2** | 2177.500        | 30.18            | -12.85      | 54.0           | 23.82       | AV       | 172.00         | 150         | Vertical | Pass    |
| 3   | 3467.000        | 46.60            | -5.24       | 74.0           | 27.40       | Peak     | 154.00         | 150         | Vertical | Pass    |
| 3** | 3467.000        | 36.19            | -5.24       | 54.0           | 17.81       | AV       | 154.00         | 150         | Vertical | Pass    |
| 4   | 5783.000        | 101.81           | -1.53       | 74.0           | -27.81      | Peak     | 44.00          | 150         | Vertical | N/A     |
| 4** | 5783.000        | 93.60            | -1.53       | 54.0           | -39.60      | AV       | 44.00          | 150         | Vertical | N/A     |
| 5   | 9643.500        | 47.93            | -3.35       | 74.0           | 26.07       | Peak     | 98.00          | 150         | Vertical | Pass    |
| 5** | 9643.500        | 36.38            | -3.35       | 54.0           | 17.62       | AV       | 98.00          | 150         | Vertical | Pass    |
| 6   | 16288.238       | 49.95            | -1.46       | 74.0           | 24.05       | Peak     | 143.00         | 150         | Vertical | Pass    |
| 6** | 16288.238       | 39.25            | -1.46       | 54.0           | 14.75       | AV       | 143.00         | 150         | Vertical | Pass    |

# Test Result

Project Number: P-CC26010282

Test Time: 2026-02-06\_00.26.36

|                |                    |                 |                              |
|----------------|--------------------|-----------------|------------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.2                         |
| Model Number:  | X6895B             | Humidity (%RH): | 53                           |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                          |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.8G WIFI 11n20 CH157 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                 |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12   |

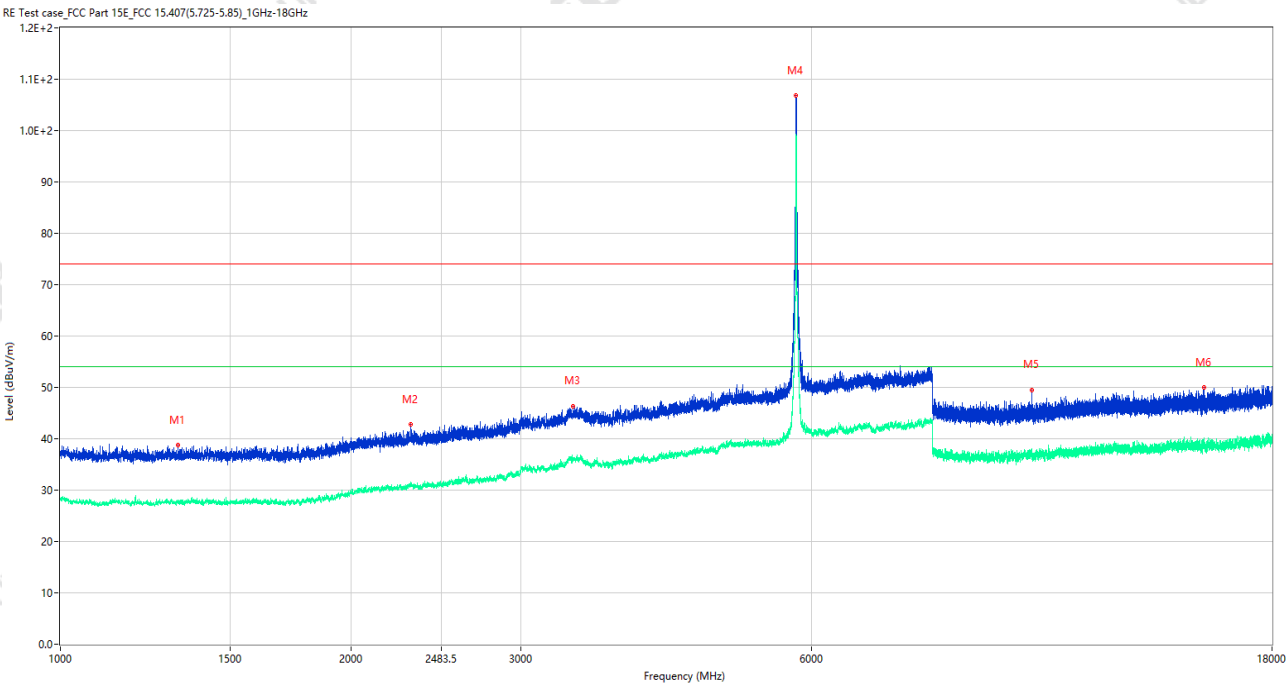


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1323.500        | 38.76            | -15.87      | 74.0           | 35.24       | Peak     | 141.00         | 150         | Horizontal | Pass    |
| 1** | 1323.500        | 27.45            | -15.87      | 54.0           | 26.55       | AV       | 141.00         | 150         | Horizontal | Pass    |
| 2   | 2305.500        | 42.77            | -12.70      | 74.0           | 31.23       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 2** | 2305.500        | 31.12            | -12.70      | 54.0           | 22.88       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 3   | 3395.000        | 46.36            | -5.85       | 74.0           | 27.64       | Peak     | 180.00         | 150         | Horizontal | Pass    |
| 3** | 3395.000        | 35.77            | -5.85       | 54.0           | 18.23       | AV       | 180.00         | 150         | Horizontal | Pass    |
| 4   | 5784.000        | 106.77           | -1.54       | 74.0           | -32.77      | Peak     | 40.00          | 150         | Horizontal | N/A     |
| 4** | 5784.000        | 98.97            | -1.54       | 54.0           | -44.97      | AV       | 40.00          | 150         | Horizontal | N/A     |
| 5   | 10147.713       | 49.48            | -4.31       | 74.0           | 24.52       | Peak     | 7.00           | 150         | Horizontal | Pass    |
| 5** | 10147.713       | 37.00            | -4.31       | 54.0           | 17.00       | AV       | 7.00           | 150         | Horizontal | Pass    |
| 6   | 15304.912       | 49.97            | -1.83       | 74.0           | 24.03       | Peak     | 40.00          | 150         | Horizontal | Pass    |
| 6** | 15304.912       | 39.16            | -1.83       | 54.0           | 14.84       | AV       | 40.00          | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-06\_00.37.59

|                |                    |                 |                              |
|----------------|--------------------|-----------------|------------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.2                         |
| Model Number:  | X6895B             | Humidity (%RH): | 53                           |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                          |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.8G WIFI 11n40 CH159 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                 |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12   |

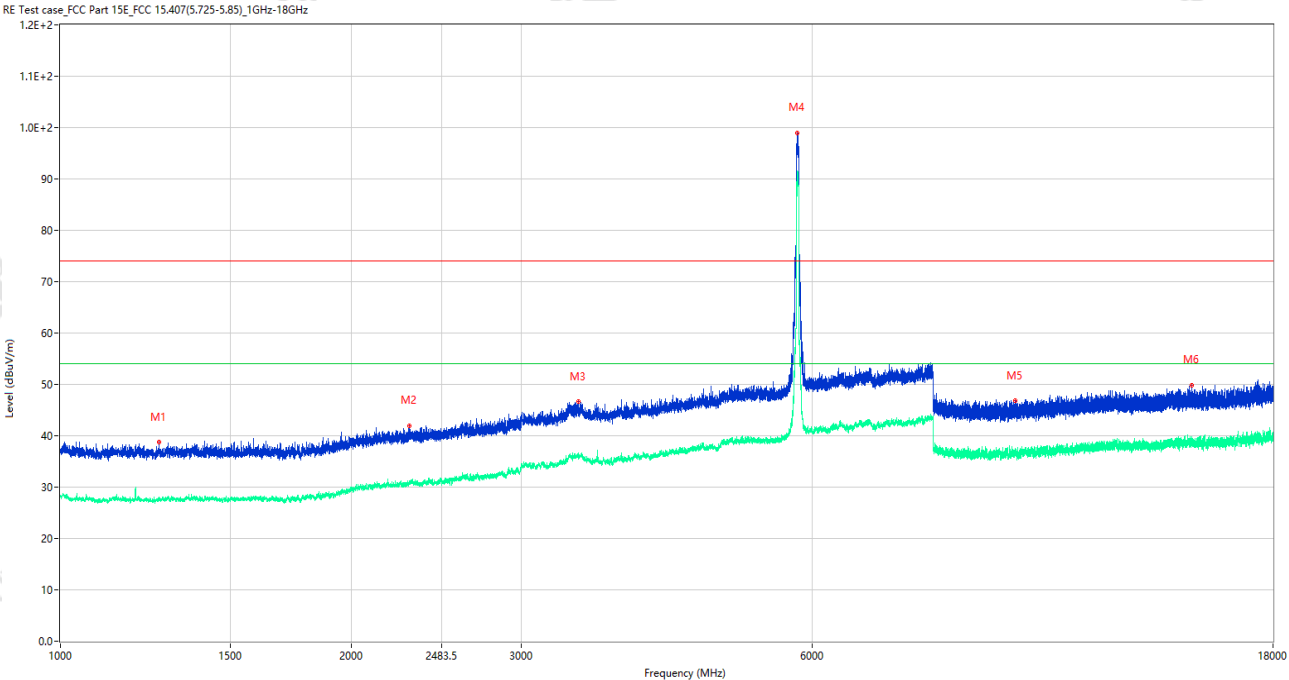


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1265.750        | 38.70            | -15.95      | 74.0           | 35.30       | Peak     | 176.00         | 150         | Vertical | Pass    |
| 1** | 1265.750        | 27.57            | -15.95      | 54.0           | 26.43       | AV       | 176.00         | 150         | Vertical | Pass    |
| 2   | 2298.750        | 42.00            | -13.14      | 74.0           | 32.00       | Peak     | 220.00         | 150         | Vertical | Pass    |
| 2** | 2298.750        | 30.88            | -13.14      | 54.0           | 23.22       | AV       | 220.00         | 150         | Vertical | Pass    |
| 3   | 3437.000        | 46.60            | -5.26       | 74.0           | 27.40       | Peak     | 260.00         | 150         | Vertical | Pass    |
| 3** | 3437.000        | 36.62            | -5.26       | 54.0           | 17.38       | AV       | 260.00         | 150         | Vertical | Pass    |
| 4   | 5796.500        | 98.99            | -1.41       | 74.0           | -24.99      | Peak     | 40.00          | 150         | Vertical | N/A     |
| 4** | 5796.500        | 91.11            | -1.41       | 54.0           | -37.11      | AV       | 40.00          | 150         | Vertical | N/A     |
| 5   | 9732.563        | 46.93            | -4.06       | 74.0           | 27.07       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 5** | 9732.563        | 37.00            | -4.06       | 54.0           | 17.00       | AV       | 0.00           | 150         | Vertical | Pass    |
| 6   | 14839.238       | 49.88            | -0.22       | 74.0           | 24.12       | Peak     | 106.00         | 150         | Vertical | Pass    |
| 6** | 14839.238       | 39.08            | -0.22       | 54.0           | 14.92       | AV       | 106.00         | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-06\_00.32.14

|                |                    |                 |                              |
|----------------|--------------------|-----------------|------------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.2                         |
| Model Number:  | X6895B             | Humidity (%RH): | 53                           |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                          |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.8G WIFI 11n40 CH159 P=16.5 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                 |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12   |

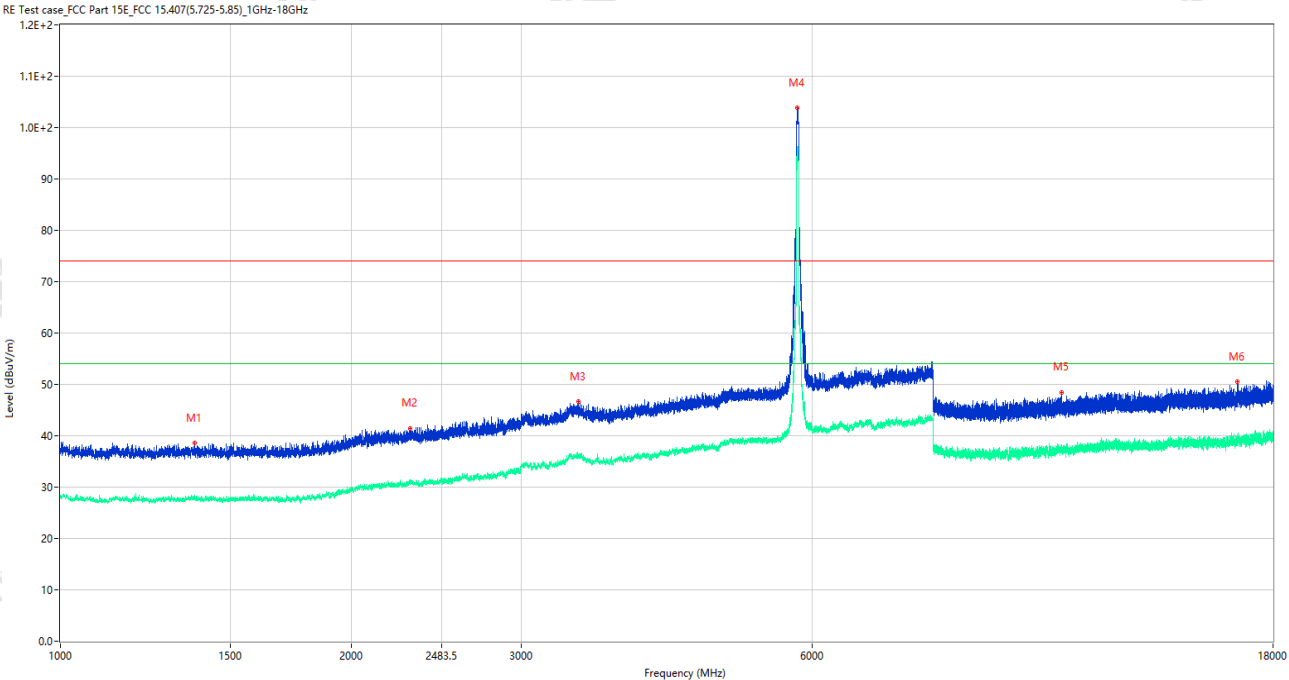

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1376.500        | 38.57            | -15.99      | 74.0           | 35.43       | Peak     | 14.00          | 150         | Horizontal | Pass    |
| 1** | 1376.500        | 27.71            | -15.99      | 54.0           | 26.29       | AV       | 14.00          | 150         | Horizontal | Pass    |
| 2   | 2302.000        | 41.49            | -12.93      | 74.0           | 32.53       | Peak     | 232.00         | 150         | Horizontal | Pass    |
| 2** | 2302.000        | 30.82            | -12.93      | 54.0           | 23.28       | AV       | 232.00         | 150         | Horizontal | Pass    |
| 3   | 3441.000        | 46.66            | -5.30       | 74.0           | 27.34       | Peak     | 20.00          | 150         | Horizontal | Pass    |
| 3** | 3441.000        | 35.91            | -5.30       | 54.0           | 18.09       | AV       | 20.00          | 150         | Horizontal | Pass    |
| 4   | 5796.500        | 103.79           | -1.41       | 74.0           | -29.79      | Peak     | 44.00          | 150         | Horizontal | N/A     |
| 4** | 5796.500        | 95.91            | -1.41       | 54.0           | -41.91      | AV       | 44.00          | 150         | Horizontal | N/A     |
| 5   | 10868.763       | 48.35            | -3.26       | 74.0           | 25.65       | Peak     | 76.00          | 150         | Horizontal | Pass    |
| 5** | 10868.763       | 37.53            | -3.26       | 54.0           | 16.49       | AV       | 76.00          | 150         | Horizontal | Pass    |
| 6   | 16537.088       | 50.50            | -1.71       | 74.0           | 23.50       | Peak     | 211.00         | 150         | Horizontal | Pass    |
| 6** | 16537.088       | 38.90            | -1.71       | 54.0           | 15.10       | AV       | 211.00         | 150         | Horizontal | Pass    |


## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-06\_00.53.27

|                |                    |                 |                             |
|----------------|--------------------|-----------------|-----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.2                        |
| Model Number:  | X6895B             | Humidity (%RH): | 53                          |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                         |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.8G WIFI 11ac80 CH155 P=16 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12  |

RE Test case\_FCC Part 15E\_FCC 15.407(5.725-5.85)\_1GHz-18GHz

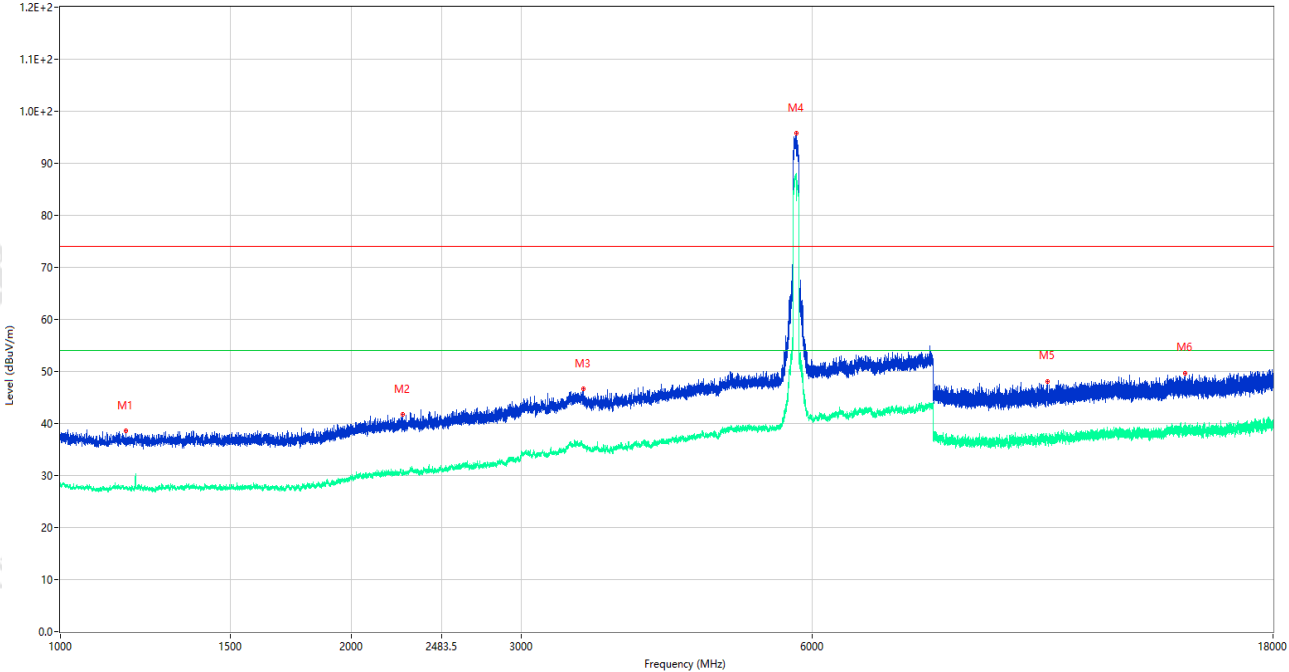


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1168.250        | 38.58            | -15.48      | 74.0           | 35.42       | Peak     | 163.00         | 150         | Vertical | Pass    |
| 1** | 1168.250        | 27.68            | -15.48      | 54.0           | 26.32       | AV       | 163.00         | 150         | Vertical | Pass    |
| 2   | 2261.750        | 41.69            | -13.26      | 74.0           | 32.31       | Peak     | 90.00          | 150         | Vertical | Pass    |
| 2** | 2261.750        | 30.49            | -13.26      | 54.0           | 23.53       | AV       | 90.00          | 150         | Vertical | Pass    |
| 3   | 3476.000        | 46.61            | -6.10       | 74.0           | 27.39       | Peak     | 2.00           | 150         | Vertical | Pass    |
| 3** | 3476.000        | 35.26            | -6.10       | 54.0           | 18.74       | AV       | 2.00           | 150         | Vertical | Pass    |
| 4   | 5779.000        | 95.73            | -1.52       | 74.0           | -21.73      | Peak     | 40.00          | 150         | Vertical | N/A     |
| 4** | 5779.000        | 87.95            | -1.52       | 54.0           | -33.95      | AV       | 40.00          | 150         | Vertical | N/A     |
| 5   | 10535.363       | 48.10            | -3.52       | 74.0           | 25.90       | Peak     | 7.00           | 150         | Vertical | Pass    |
| 5** | 10535.363       | 36.95            | -3.52       | 54.0           | 17.05       | AV       | 7.00           | 150         | Vertical | Pass    |
| 6   | 14590.913       | 49.61            | -2.13       | 74.0           | 24.39       | Peak     | 43.00          | 150         | Vertical | Pass    |
| 6** | 14590.913       | 39.15            | -2.13       | 54.0           | 14.85       | AV       | 43.00          | 150         | Vertical | Pass    |

## Test Result

Project Number: P-CC26010282

Test Time: 2026-02-06\_00.56.40

|                |                    |                 |                             |
|----------------|--------------------|-----------------|-----------------------------|
| EUT Name:      | Mobile Phone       | Temp.(°C):      | 23.2                        |
| Model Number:  | X6895B             | Humidity (%RH): | 53                          |
| Sample Number: | CC26010326-001-S09 | Pressure(kPa):  | 101                         |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.8G WIFI 11ac80 CH155 P=16 |
| Test Site:     | 966#2              | Test Voltage:   | AC 120V/60Hz                |
| Test Engineer: | Zhang Siyuan       | Remark:         | 适配器: A04+数据线: A08<br>ANT12  |

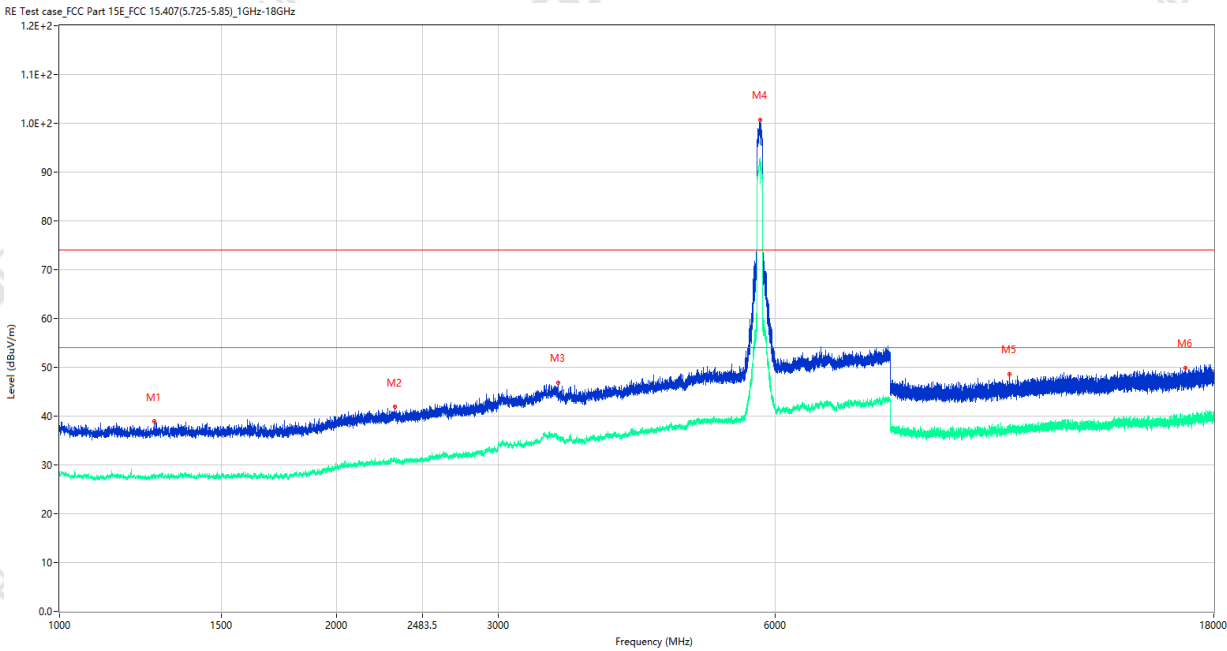

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1268.750        | 38.90            | -15.91      | 74.0           | 35.10       | Peak     | 160.00         | 150         | Horizontal | Pass    |
| 1** | 1268.750        | 27.45            | -15.91      | 54.0           | 26.55       | AV       | 160.00         | 150         | Horizontal | Pass    |
| 2   | 2314.750        | 41.90            | -12.43      | 74.0           | 32.10       | Peak     | 4.00           | 150         | Horizontal | Pass    |
| 2** | 2314.750        | 31.02            | -12.43      | 54.0           | 22.98       | AV       | 4.00           | 150         | Horizontal | Pass    |
| 3   | 3487.000        | 46.87            | -5.99       | 74.0           | 27.13       | Peak     | 349.00         | 150         | Horizontal | Pass    |
| 3** | 3487.000        | 35.19            | -5.99       | 54.0           | 18.81       | AV       | 349.00         | 150         | Horizontal | Pass    |
| 4   | 5781.000        | 100.77           | -1.53       | 74.0           | -26.77      | Peak     | 42.00          | 150         | Horizontal | N/A     |
| 4** | 5781.000        | 91.96            | -1.53       | 54.0           | -37.96      | AV       | 42.00          | 150         | Horizontal | N/A     |
| 5   | 10794.188       | 48.64            | -3.21       | 74.0           | 25.36       | Peak     | 75.00          | 150         | Horizontal | Pass    |
| 5** | 10794.188       | 37.22            | -3.21       | 54.0           | 16.78       | AV       | 75.00          | 150         | Horizontal | Pass    |
| 6   | 16776.225       | 49.88            | -1.29       | 74.0           | 24.12       | Peak     | 278.00         | 150         | Horizontal | Pass    |
| 6** | 16776.225       | 39.41            | -1.29       | 54.0           | 14.59       | AV       | 278.00         | 150         | Horizontal | Pass    |