

Report No.: WSCT-ANAB-R&E260400031A-BT Issued Date: 29 April 2026

Above 1GHz


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

GFSK

Low channel: 2402MHz

Horizontal:

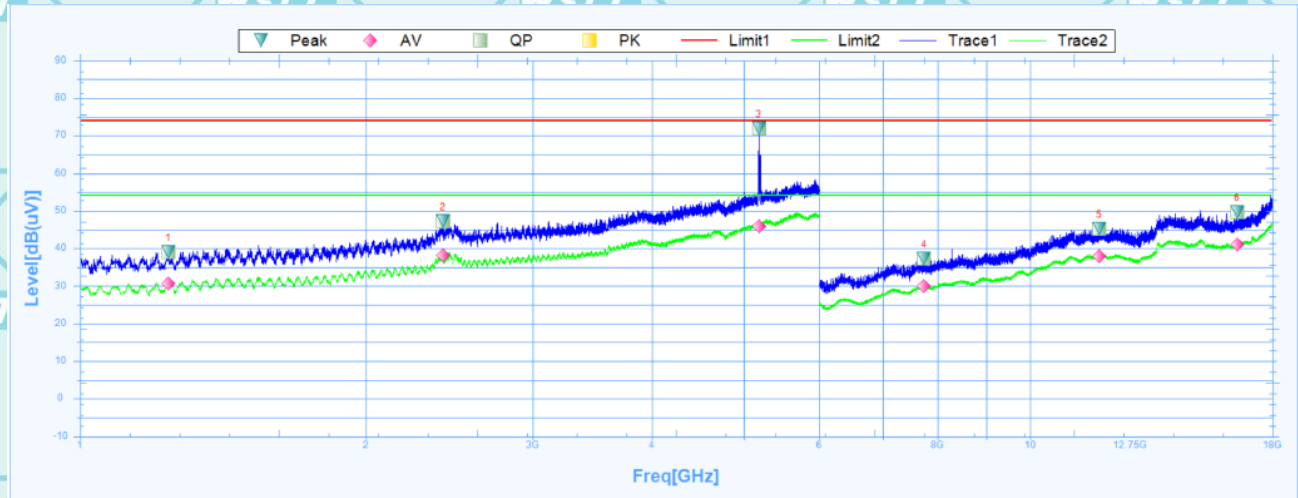


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1238.7500	39.1	24.54	14.56	74	-34.9	359.5	Horizontal	PK	Pass
1	1238.7500	30.66	24.54	6.12	54	-23.34	359.5	Horizontal	AV	Pass
2	2410.6250	47.15	27.3	19.85	74	-26.85	356.2	Horizontal	PK	Pass
2	2410.6250	38.21	27.3	10.91	54	-15.79	356.2	Horizontal	AV	Pass
3	5185.0000	71.86	31.75	40.11	74	-2.14	-0.1	Horizontal	PK	Pass
3	5185.0000	45.93	31.75	14.18	54	-8.07	-0.1	Horizontal	AV	Pass
4	7740.0000	37.25	7.96	29.29	74	-36.75	59	Horizontal	PK	Pass
4	7740.0000	30.02	7.96	22.06	54	-23.98	59	Horizontal	AV	Pass
5	11829.0000	45.23	16.3	28.93	74	-28.77	90.2	Horizontal	PK	Pass
5	11829.0000	37.86	16.3	21.56	54	-16.14	90.2	Horizontal	AV	Pass
6	16527.0000	49.57	18.86	30.71	74	-24.43	231.2	Horizontal	PK	Pass
6	16527.0000	41.04	18.86	22.18	54	-12.96	231.2	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260400031A-BT Issued Date: 29 April 2026

Vertical:

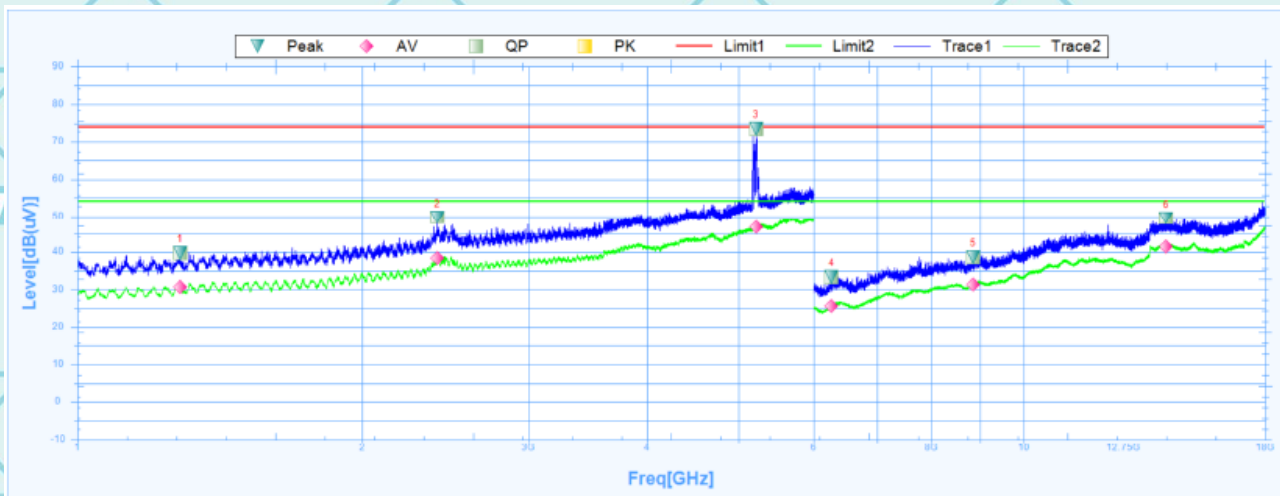


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1283.7500	39.72	24.69	15.03	74	-34.28	349.8	Vertical	PK	Pass
1	1283.7500	30.68	24.69	5.99	54	-23.32	349.8	Vertical	AV	Pass
2	2401.8750	49.73	27.27	22.46	74	-24.27	0	Vertical	PK	Pass
2	2401.8750	38.39	27.27	11.12	54	-15.61	0	Vertical	AV	Pass
3	5218.1250	73.5	31.77	41.73	74	-0.5	0	Vertical	PK	Pass
3	5218.1250	46.8	31.77	15.03	54	-7.2	0	Vertical	AV	Pass
4	6270.0000	33.39	4.21	29.18	74	-40.61	130.8	Vertical	PK	Pass
4	6270.0000	25.63	4.21	21.42	54	-28.37	130.8	Vertical	AV	Pass
5	8847.0000	38.52	9.62	28.9	74	-35.48	262.3	Vertical	PK	Pass
5	8847.0000	31.39	9.62	21.77	54	-22.61	262.3	Vertical	AV	Pass
6	14149.5000	49.43	18.98	30.45	74	-24.57	248	Vertical	PK	Pass
6	14149.5000	41.5	18.98	22.52	54	-12.5	248	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260400031A-BT Issued Date: 29 April 2026

Middle channel: 2441MHz
Horizontal:

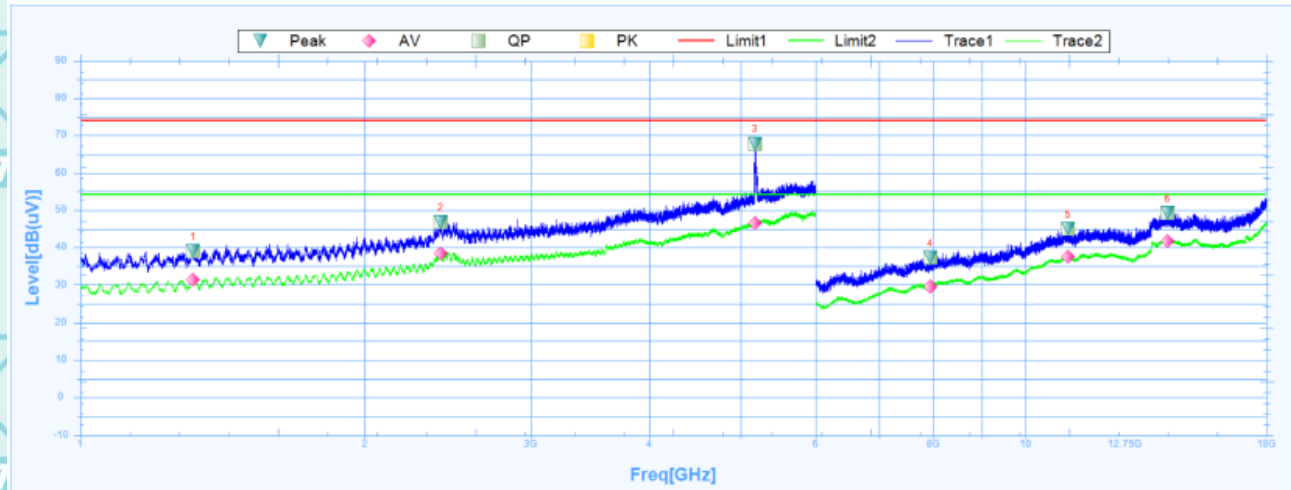


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1315.6250	39.04	24.8	14.24	74	-34.96	0	Horizontal	PK	Pass
1	1315.6250	31.23	24.8	6.43	54	-22.77	0	Horizontal	AV	Pass
2	2406.8750	46.75	27.28	19.47	74	-27.25	224.5	Horizontal	PK	Pass
2	2406.8750	38.3	27.28	11.02	54	-15.7	224.5	Horizontal	AV	Pass
3	5177.5000	67.87	31.74	36.13	74	-6.13	0	Horizontal	PK	Pass
3	5177.5000	46.47	31.74	14.73	54	-7.53	0	Horizontal	AV	Pass
4	7933.5000	37.2	8.08	29.12	74	-36.8	360	Horizontal	PK	Pass
4	7933.5000	29.59	8.08	21.51	54	-24.41	360	Horizontal	AV	Pass
5	11100.0000	45.03	15.87	29.16	74	-28.97	305.3	Horizontal	PK	Pass
5	11100.0000	37.61	15.87	21.74	54	-16.39	305.3	Horizontal	AV	Pass
6	14143.5000	49.23	18.98	30.25	74	-24.77	19.1	Horizontal	PK	Pass
6	14143.5000	41.75	18.98	22.77	54	-12.25	19.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260400031A-BT Issued Date: 29 April 2026

Vertical:

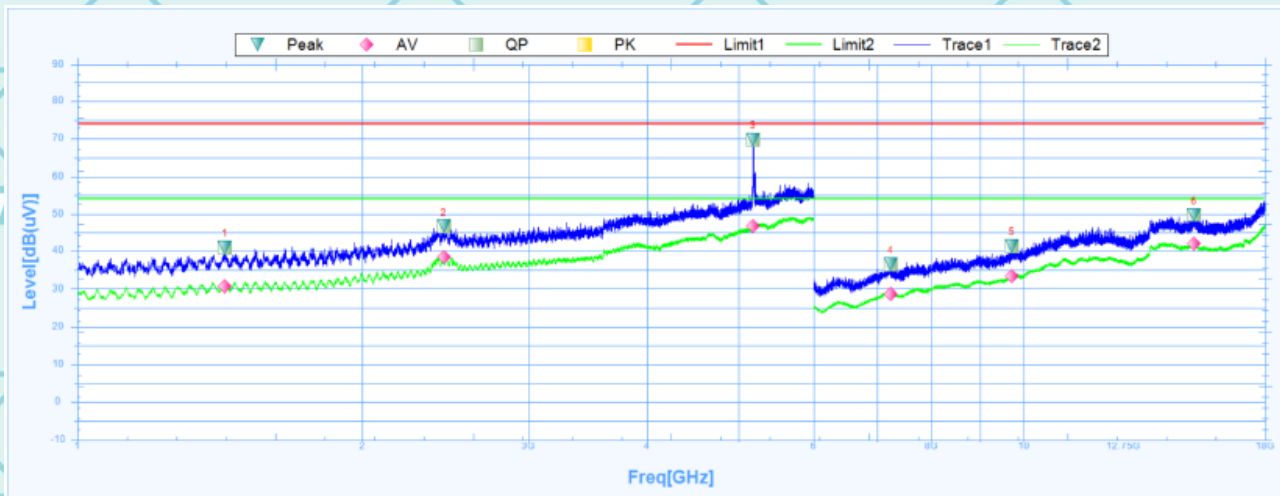


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1431.8750	40.78	25.07	15.71	74	-33.22	243.6	Vertical	PK	Pass
1	1431.8750	30.74	25.07	5.67	54	-23.26	243.6	Vertical	AV	Pass
2	2438.7500	46.6	27.39	19.21	74	-27.4	28.5	Vertical	PK	Pass
2	2438.7500	38.3	27.39	10.91	54	-15.7	28.5	Vertical	AV	Pass
3	5181.2500	69.84	31.74	38.1	74	-4.16	217.3	Vertical	PK	Pass
3	5181.2500	46.58	31.74	14.84	54	-7.42	217.3	Vertical	AV	Pass
4	7234.5000	36.49	6.96	29.53	74	-37.51	360.1	Vertical	PK	Pass
4	7234.5000	28.57	6.96	21.61	54	-25.43	360.1	Vertical	AV	Pass
5	9723.0000	41.19	11.69	29.5	74	-32.81	0.5	Vertical	PK	Pass
5	9723.0000	33.38	11.69	21.69	54	-20.62	0.5	Vertical	AV	Pass
6	15138.0000	49.55	19.62	29.93	74	-24.45	360.1	Vertical	PK	Pass
6	15138.0000	41.87	19.62	22.25	54	-12.13	360.1	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260400031A-BT Issued Date: 29 April 2026

High channel: 2480MHz
Horizontal:

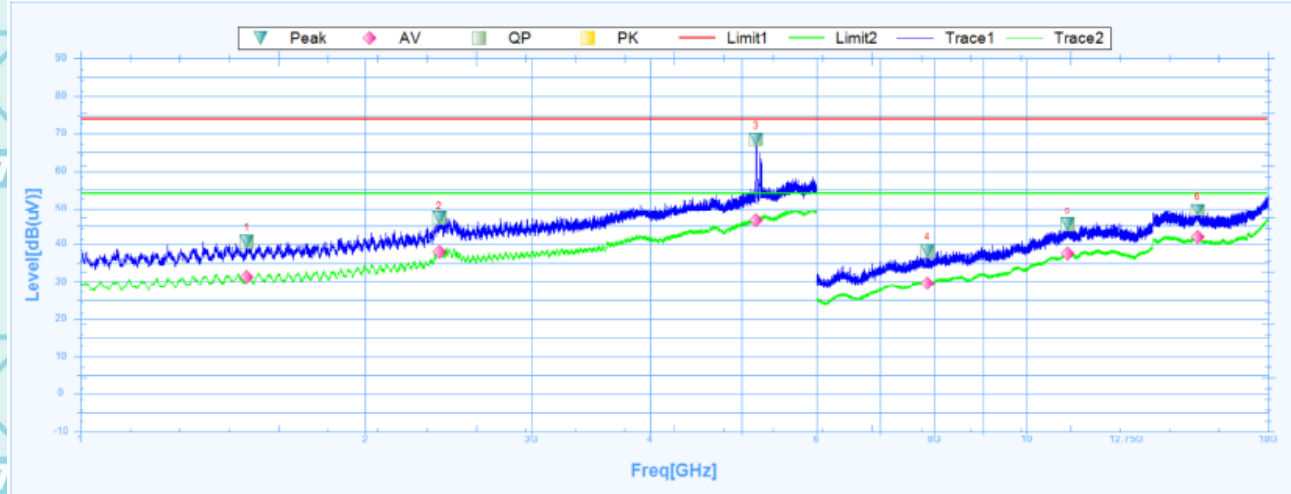


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1500.0000	40.57	25	15.57	74	-33.43	359	Horizontal	PK	Pass
1	1500.0000	31.37	25	6.37	54	-22.63	359	Horizontal	AV	Pass
2	2395.6250	47.08	27.25	19.83	74	-26.92	45.1	Horizontal	PK	Pass
2	2395.6250	38.05	27.25	10.8	54	-15.95	45.1	Horizontal	AV	Pass
3	5181.2500	68.4	31.74	36.66	74	-5.6	100.2	Horizontal	PK	Pass
3	5181.2500	46.36	31.74	14.62	54	-7.64	100.2	Horizontal	AV	Pass
4	7858.5000	38.23	8.01	30.22	74	-35.77	129.6	Horizontal	PK	Pass
4	7858.5000	29.65	8.01	21.64	54	-24.35	129.6	Horizontal	AV	Pass
5	11049.0000	45.25	15.78	29.47	74	-28.75	12	Horizontal	PK	Pass
5	11049.0000	37.48	15.78	21.7	54	-16.52	12	Horizontal	AV	Pass
6	15159.0000	49.42	19.46	29.96	74	-24.58	354.5	Horizontal	PK	Pass
6	15159.0000	42.01	19.46	22.55	54	-11.99	354.5	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260400031A-BT Issued Date: 29 April 2026

Vertical:

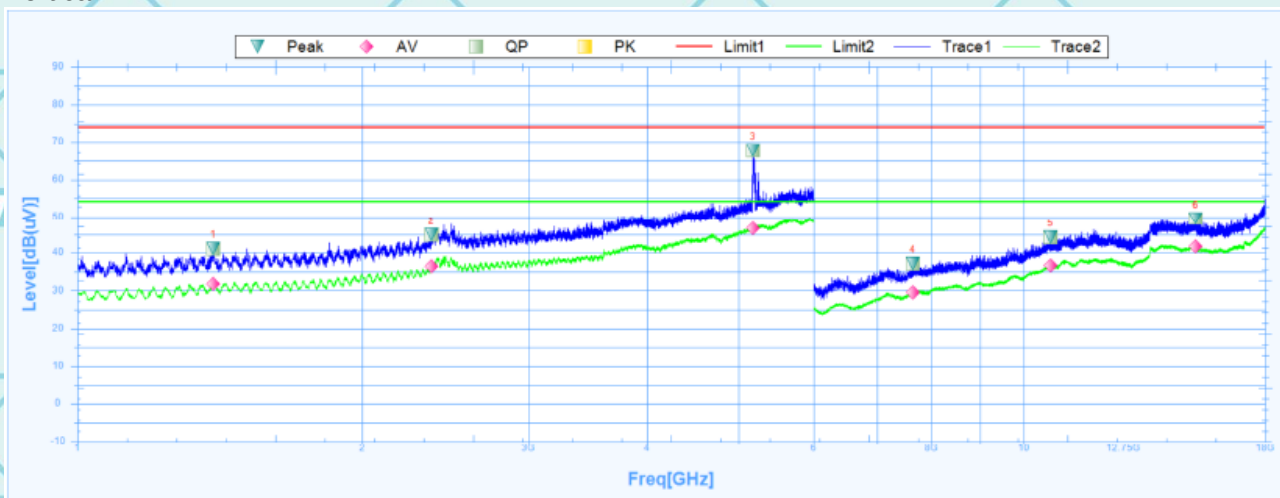

Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1391.8750	41.03	25.07	15.96	74	-32.97	281.8	Vertical	PK	Pass
1	1391.8750	31.69	25.07	6.62	54	-22.31	281.8	Vertical	AV	Pass
2	2367.5000	44.71	27.15	17.56	74	-29.29	127.5	Vertical	PK	Pass
2	2367.5000	36.46	27.15	9.31	54	-17.54	127.5	Vertical	AV	Pass
3	5180.0000	67.82	31.74	36.08	74	-6.18	302.1	Vertical	PK	Pass
3	5180.0000	46.54	31.74	14.8	54	-7.46	302.1	Vertical	AV	Pass
4	7636.5000	37.09	7.95	29.14	74	-36.91	201.3	Vertical	PK	Pass
4	7636.5000	29.66	7.95	21.71	54	-24.34	201.3	Vertical	AV	Pass
5	10675.5000	44.08	14.57	29.51	74	-29.92	147.4	Vertical	PK	Pass
5	10675.5000	36.58	14.57	22.01	54	-17.42	147.4	Vertical	AV	Pass
6	15204.0000	49.4	19.12	30.28	74	-24.6	8.7	Vertical	PK	Pass
6	15204.0000	41.63	19.12	22.51	54	-12.37	8.7	Vertical	AV	Pass

Note:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
- EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

Report No.: WSCT-ANAB-R&E260400031A-BT Issued Date: 29 April 2026


6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below


GFSK

Low channel

Horizontal:

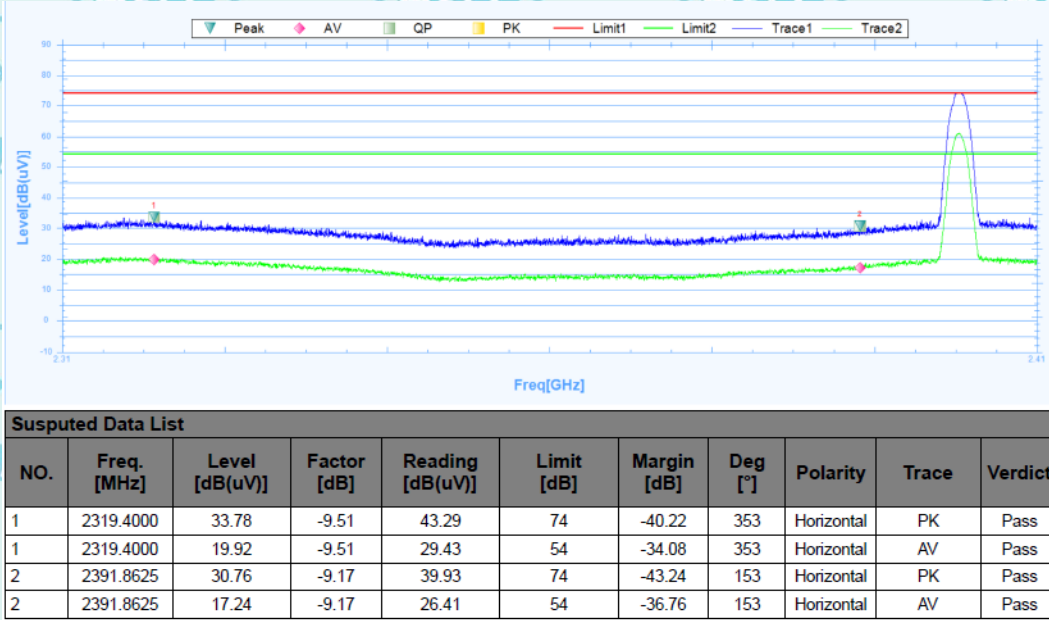


Vertical:

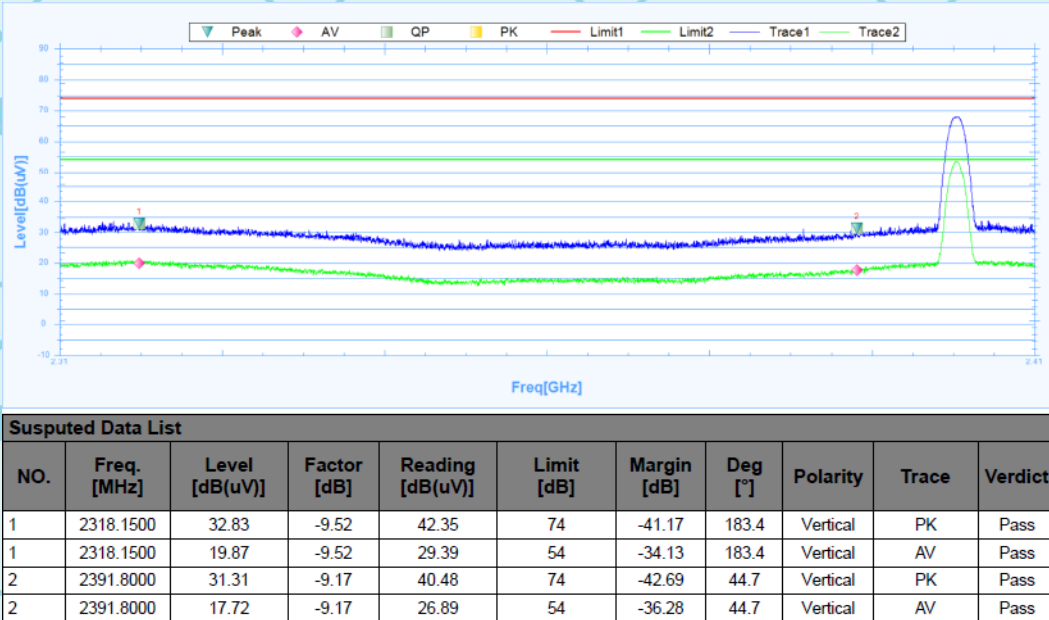


Report No.: WSCT-ANAB-R&E260400031A-BT Issued Date: 29 April 2026

High channel
Horizontal:

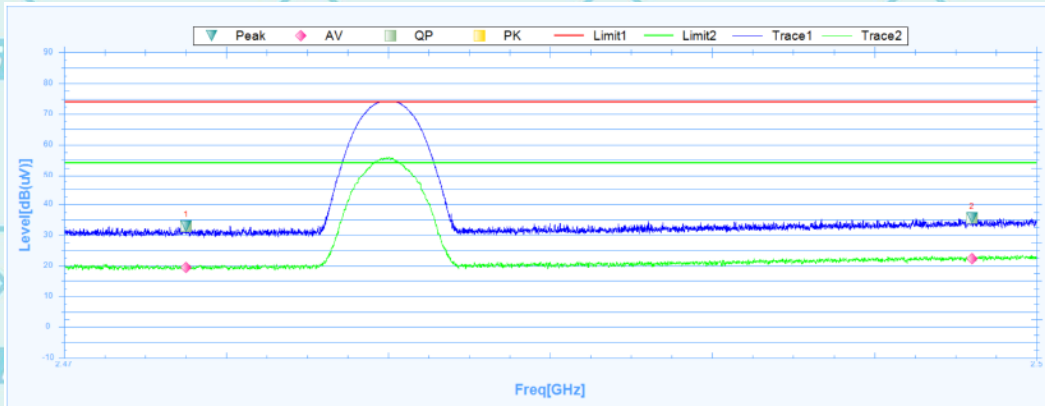

Susputed Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2473.7650	32.86	-8.67	41.53	74	-41.14	84.8	Horizontal	PK	Pass
1	2473.7650	19.45	-8.67	28.12	54	-34.55	84.8	Horizontal	AV	Pass
2	2498.0125	35.48	-8.52	44	74	-38.52	185.2	Horizontal	PK	Pass
2	2498.0125	22.36	-8.52	30.88	54	-31.64	185.2	Horizontal	AV	Pass

Vertical:

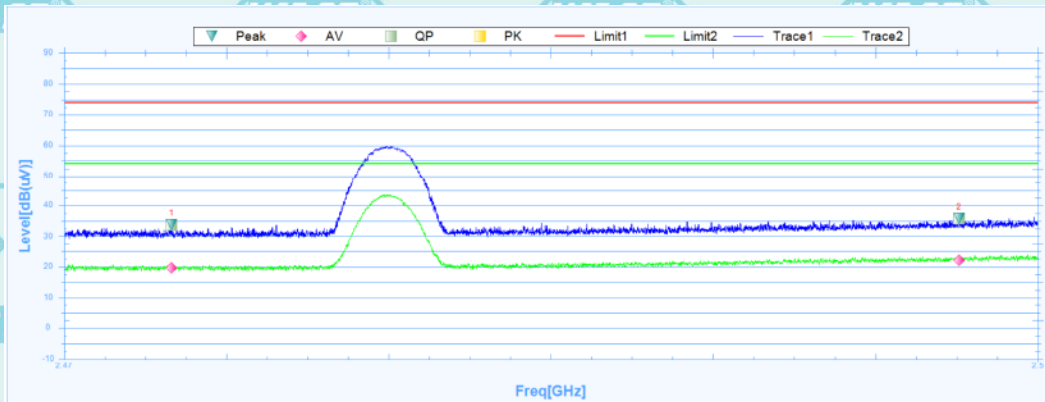

Susputed Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2473.3113	33.79	-8.68	42.47	74	-40.21	11.4	Vertical	PK	Pass
1	2473.3113	19.55	-8.68	28.23	54	-34.45	11.4	Vertical	AV	Pass
2	2497.5775	35.83	-8.53	44.36	74	-38.17	249.2	Vertical	PK	Pass
2	2497.5775	22.06	-8.53	30.59	54	-31.94	249.2	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz
 Reading level (dBμV) = Receiver reading
 Corr. Factor (dB) = Attenuation factor + Cable loss
 Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)
 Limit (dBμV) = Limit stated in standard
 Margin (dB) = Level (dBμV) – Limits (dBμV)

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******