




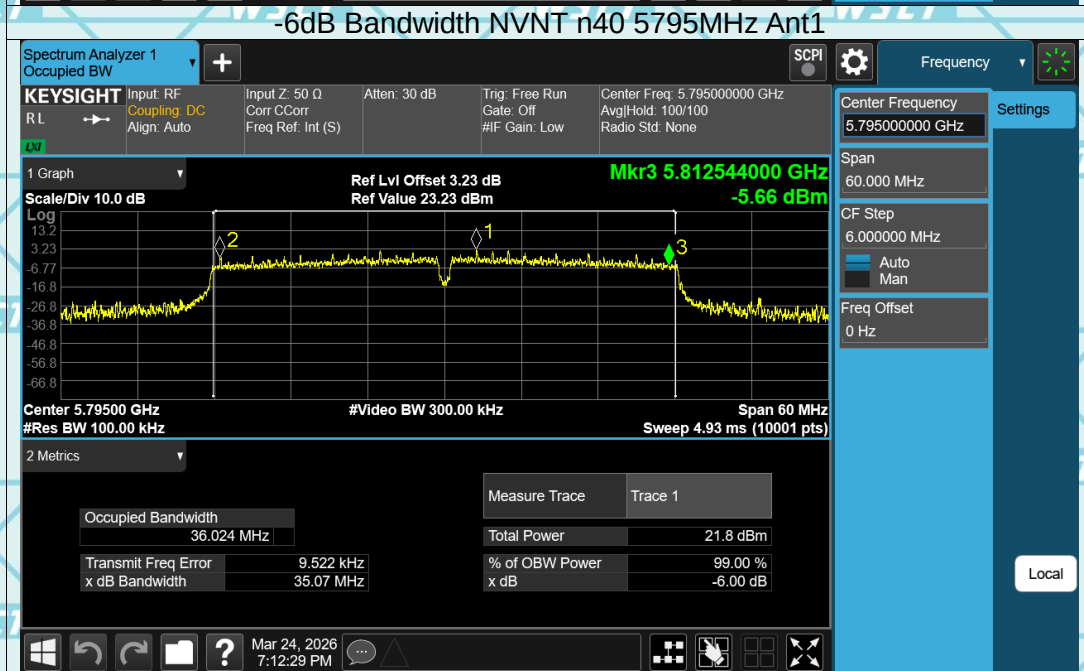
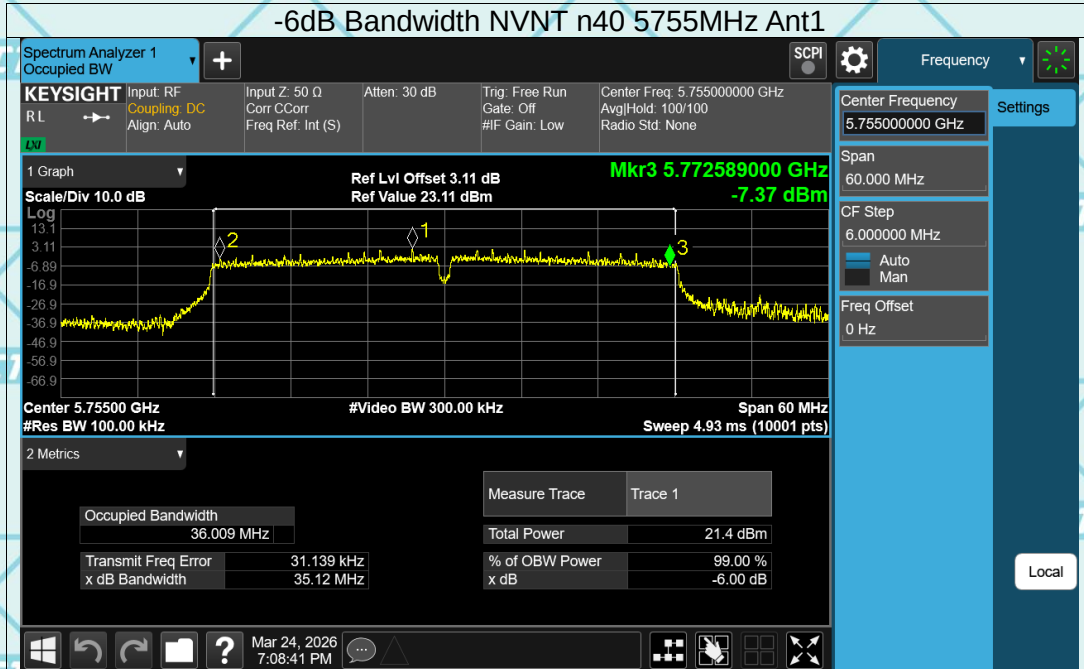
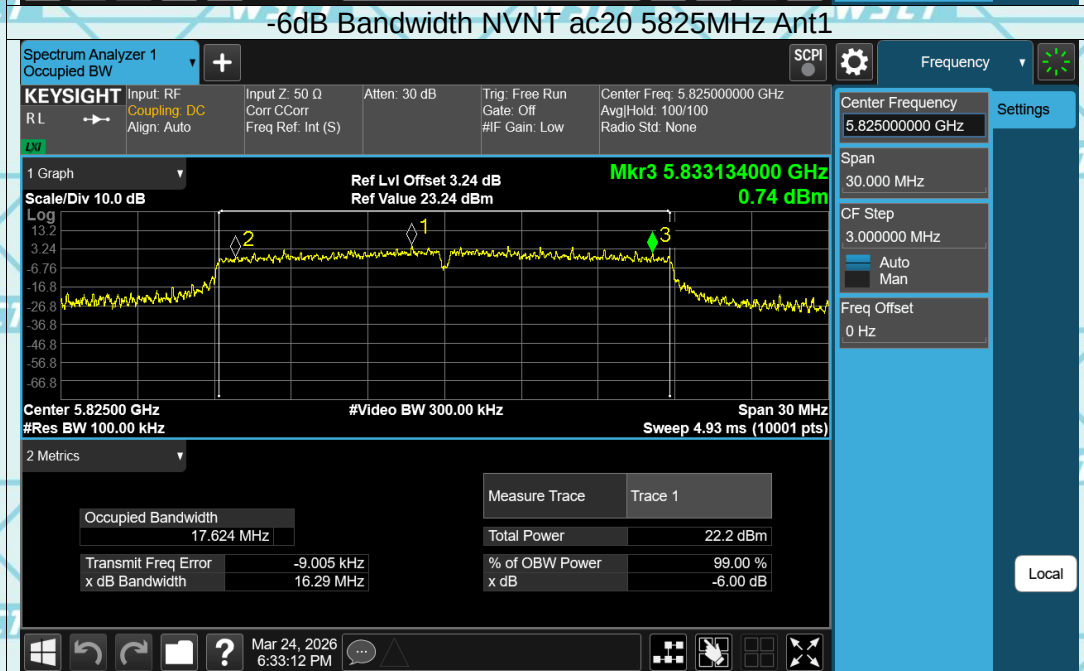
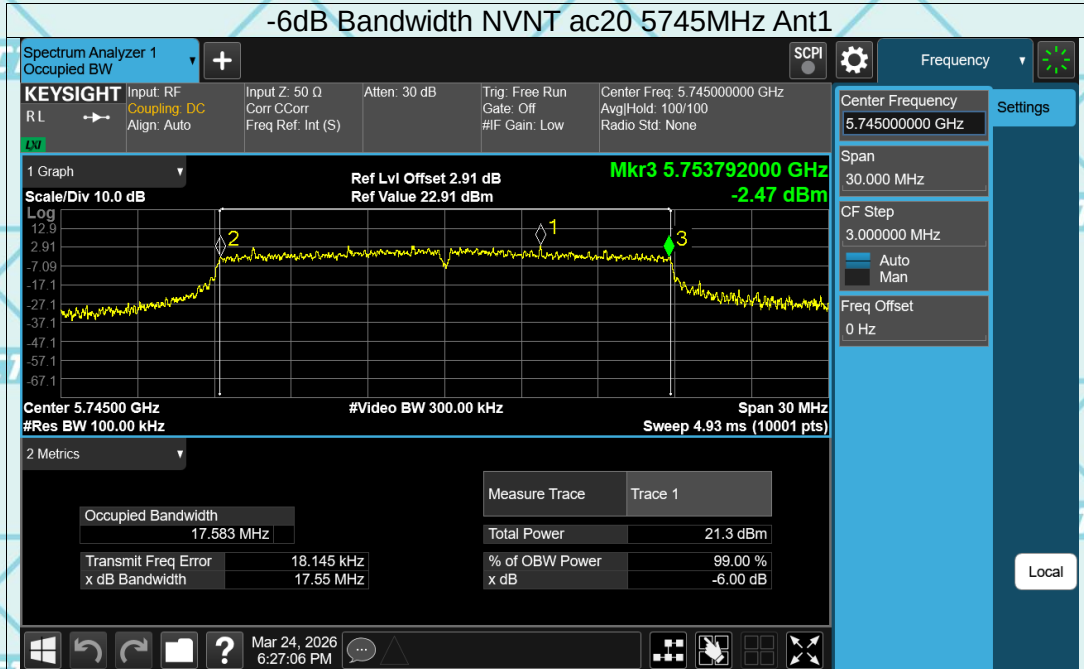
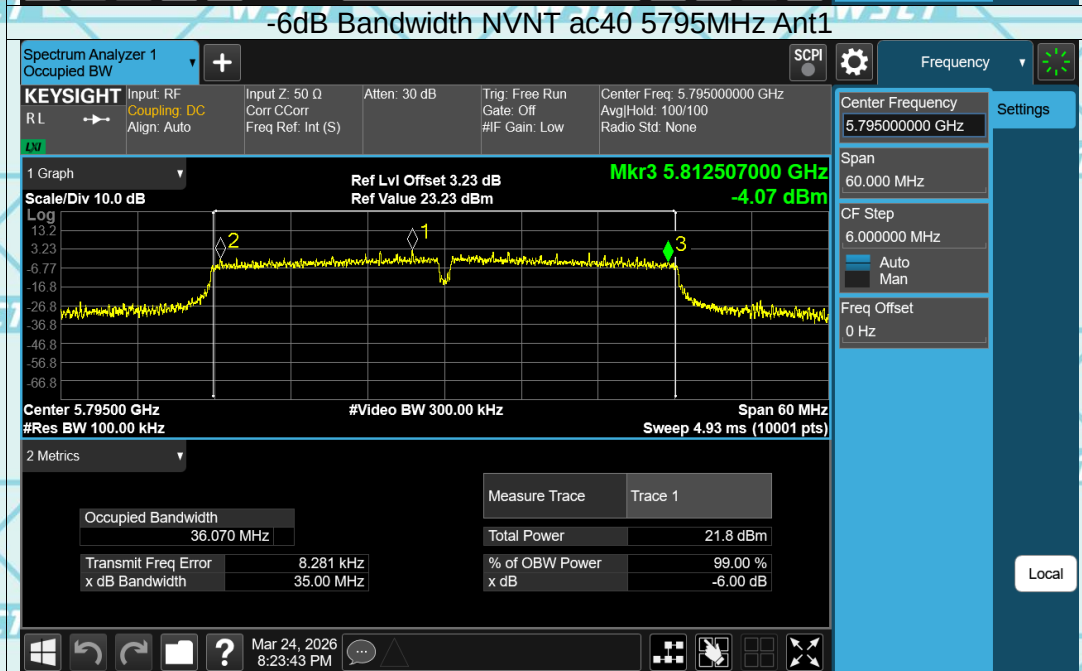



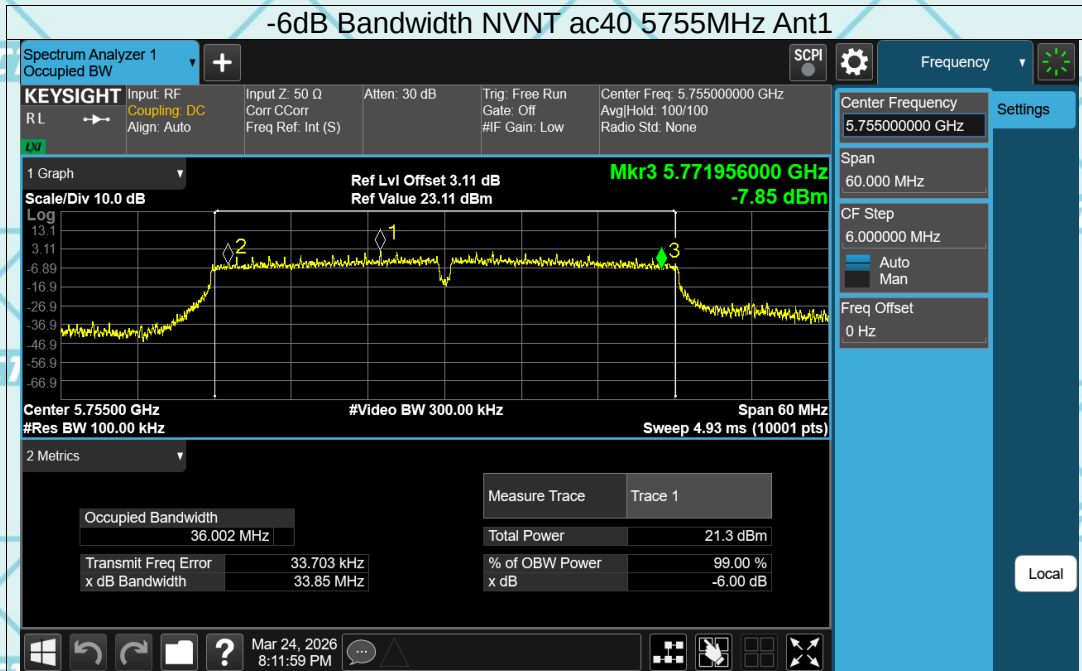


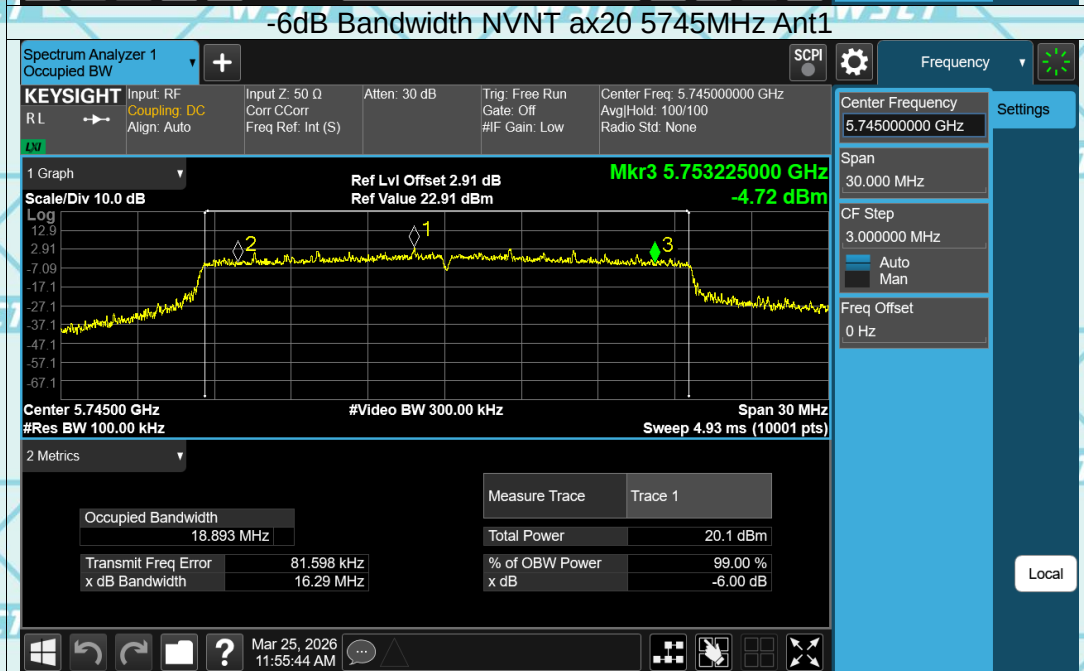

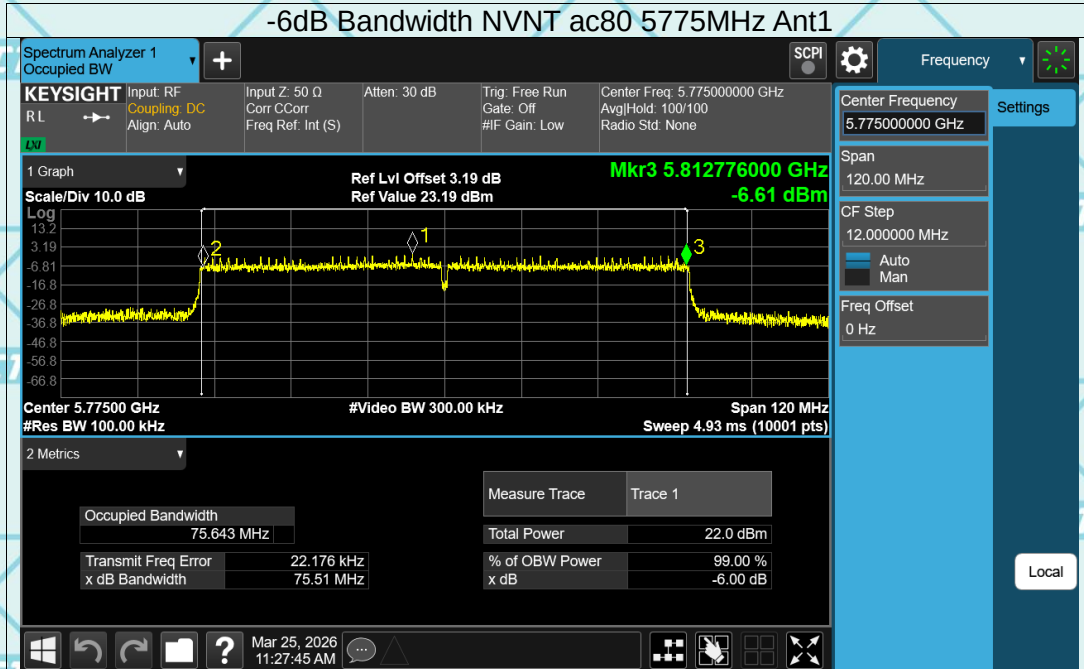

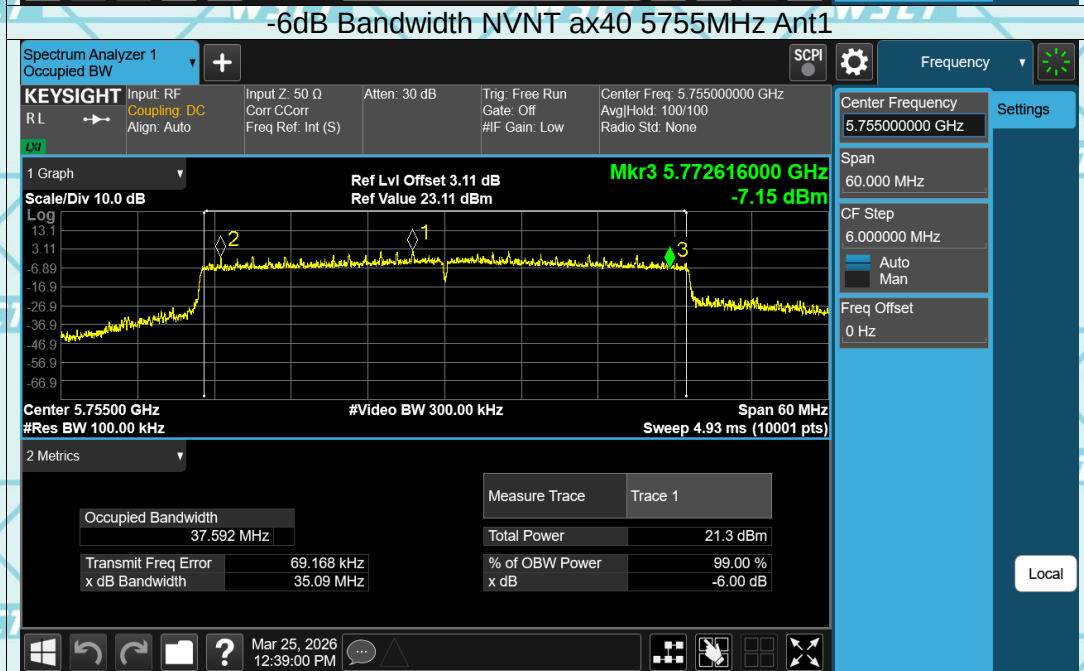

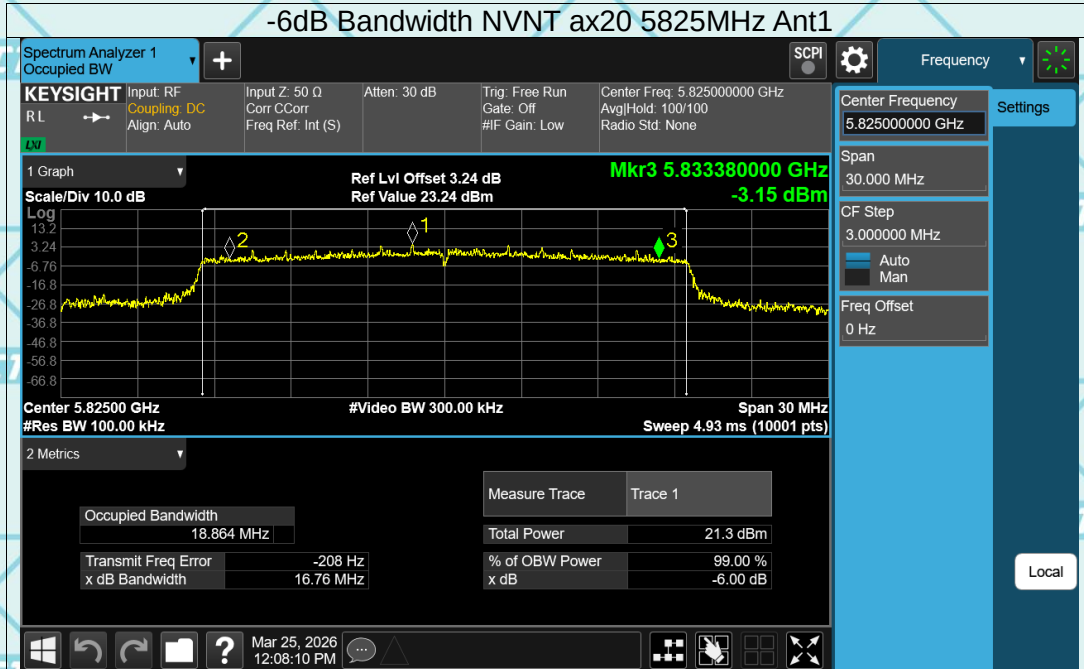

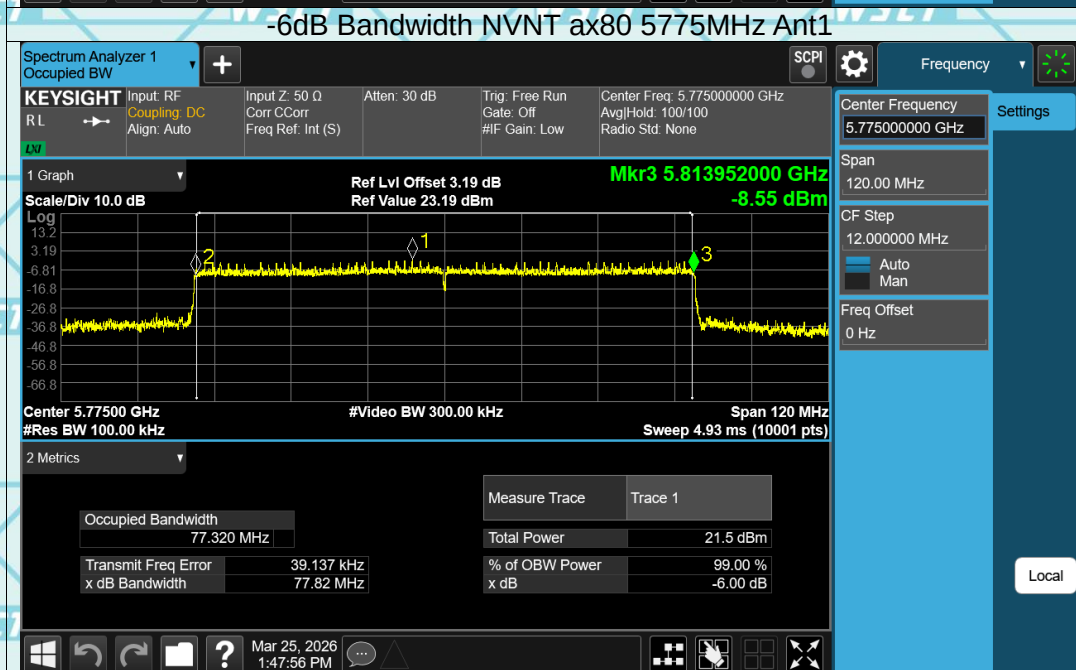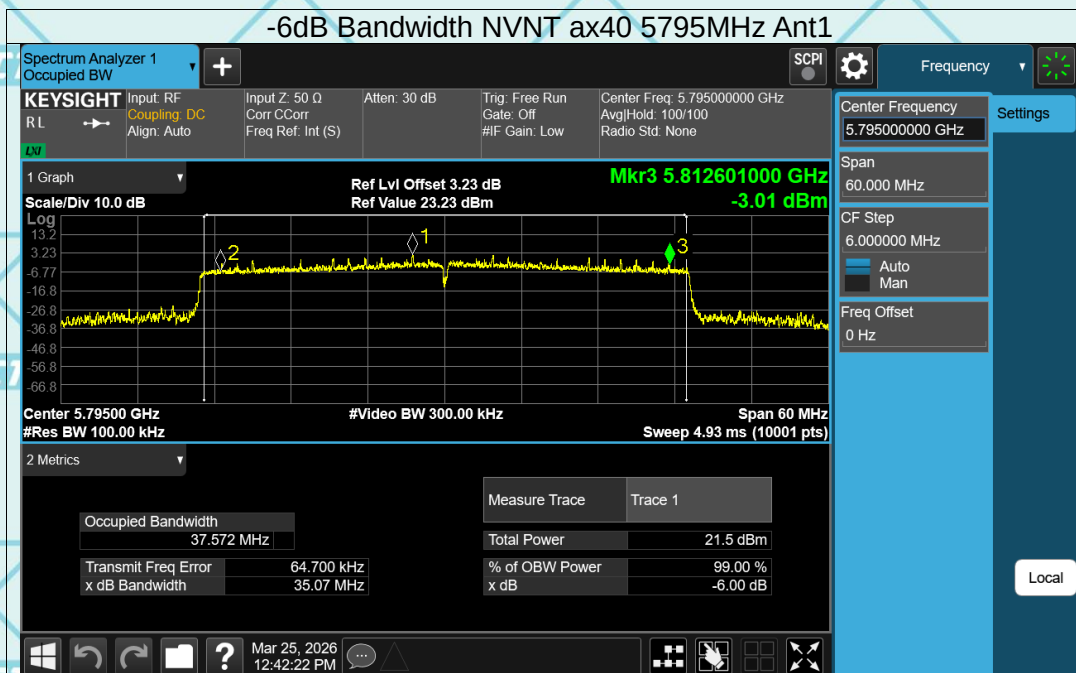

Report No.: WSCT-ANAB-R&E260400031A-Wi-Fi2 Issued: 29 April 2026

7.5 6.3. MAXIMUM CONDUCTED OUTPUT POWER

Product	: EUT-Sample	Test Mode	: See Section 3.4
Test Item	: Average Power	Temperature	: 25 °C
Test Voltage	: DC 3.92V	Humidity	: 56%RH
Test Result	: PASS		

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	16.34	0.29	16.63	24	Pass
a	5240	15.26	0.29	15.55	24	Pass
a	5260	15.66	0.29	15.95	24	Pass
a	5320	14.9	0.29	15.19	24	Pass
a	5500	14.86	0.29	15.15	24	Pass
a	5700	14.99	0.29	15.28	24	Pass
a	5745	15.99	0.29	16.28	30	Pass
a	5825	16.32	0.29	16.61	30	Pass
n20	5180	16.13	0.31	16.44	24	Pass
n20	5240	15.47	0.31	15.78	24	Pass
n20	5260	15.78	0.31	16.09	24	Pass
n20	5320	14.54	0.31	14.85	24	Pass
n20	5500	14.83	0.31	15.14	24	Pass
n20	5700	14.85	0.31	15.16	24	Pass
n20	5745	15.81	0.31	16.12	30	Pass
n20	5825	16.41	0.31	16.72	30	Pass
n40	5190	14.9	0.6	15.5	24	Pass
n40	5230	14.56	0.6	15.16	24	Pass
n40	5270	14.28	0.6	14.88	24	Pass
n40	5310	13.72	0.6	14.32	24	Pass
n40	5510	13.34	0.6	13.94	24	Pass
n40	5670	13.52	0.6	14.12	24	Pass
n40	5755	14.67	0.6	15.27	30	Pass
n40	5795	14.93	0.6	15.53	30	Pass
ac20	5180	15.81	0.31	16.12	24	Pass
ac20	5240	14.67	0.31	14.98	24	Pass
ac20	5260	15.17	0.31	15.48	24	Pass
ac20	5320	14.31	0.31	14.62	24	Pass
ac20	5500	14.22	0.31	14.53	24	Pass
ac20	5700	14.16	0.31	14.47	24	Pass
ac20	5745	15.3	0.31	15.61	30	Pass
ac20	5825	15.47	0.31	15.78	30	Pass
ac40	5190	14.49	0.59	15.08	24	Pass
ac40	5230	14.48	0.6	15.08	24	Pass
ac40	5270	14.22	0.59	14.81	24	Pass
ac40	5310	13.79	0.59	14.38	24	Pass
ac40	5510	13.31	0.59	13.9	24	Pass
ac40	5670	13.57	0.6	14.17	24	Pass
ac40	5755	15.19	0.6	15.79	30	Pass
ac40	5795	15.09	0.6	15.69	30	Pass
ac80	5210	13.34	0	13.34	24	Pass
ac80	5290	12.88	0	12.88	24	Pass
ac80	5530	12.24	0	12.24	24	Pass
ac80	5610	12.24	0.16	12.4	24	Pass
ac80	5775	13.88	0.87	14.75	30	Pass
ax20	5180	14.51	0.39	14.9	24	Pass
ax20	5240	13.64	0.4	14.04	24	Pass
ax20	5260	14.16	0.4	14.56	24	Pass
ax20	5320	12.97	0.39	13.36	24	Pass
ax20	5500	13.15	0.39	13.54	24	Pass
ax20	5700	12.85	0.39	13.24	24	Pass
ax20	5745	13.64	0.39	14.03	30	Pass
ax20	5825	14.96	0.4	15.36	30	Pass
ax40	5190	14.31	0.71	15.02	24	Pass
ax40	5230	13.83	0.98	14.81	24	Pass
ax40	5270	13.69	0.71	14.4	24	Pass
ax40	5310	13.01	0.71	13.72	24	Pass

Report No.: WSCT-ANAB-R&E260400031A-Wi-Fi2 Issued: 29 April 2026

ax40	5510	12.88	0.72	13.6	24	Pass
ax40	5670	13.19	0.72	13.91	24	Pass
ax40	5755	14.34	0.71	15.05	30	Pass
ax40	5795	14.84	0.72	15.56	30	Pass
ax80	5210	12.96	3.01	15.97	24	Pass
ax80	5290	12.48	1.23	13.71	24	Pass
ax80	5530	12.31	1.02	13.33	24	Pass
ax80	5610	12.06	1.84	13.9	24	Pass
ax80	5775	13.75	1.23	14.98	30	Pass
ax160	5250	11.58	1.22	12.8	24	Pass
ax160	5570	11.49	1.91	13.4	24	Pass



