




PSD NVNT ac40 5270MHz Ant1

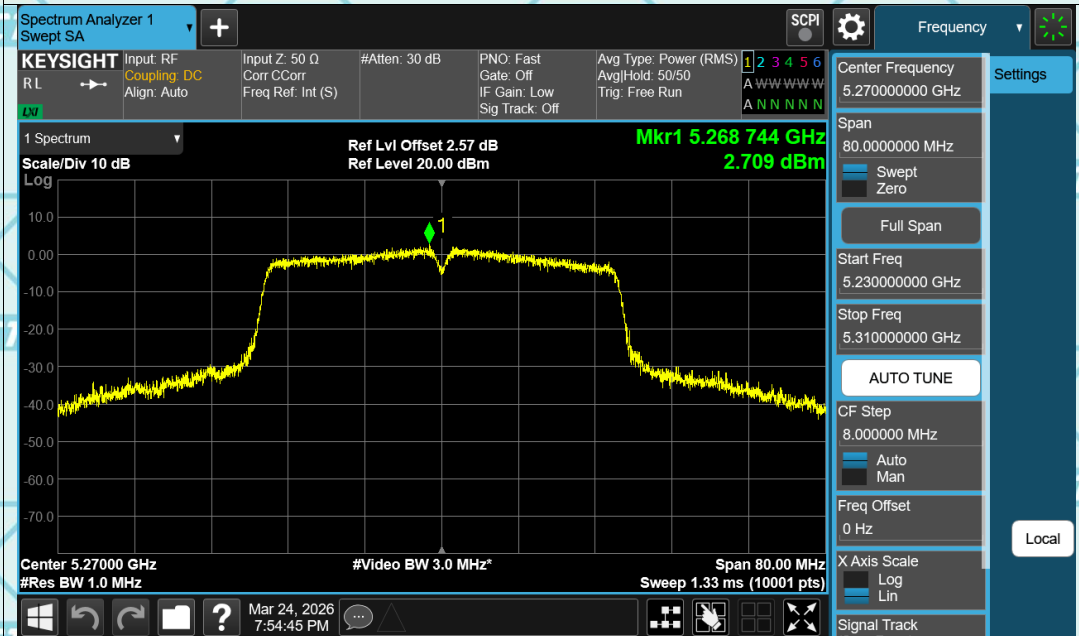


PSD NVNT ac40 5310MHz Ant1

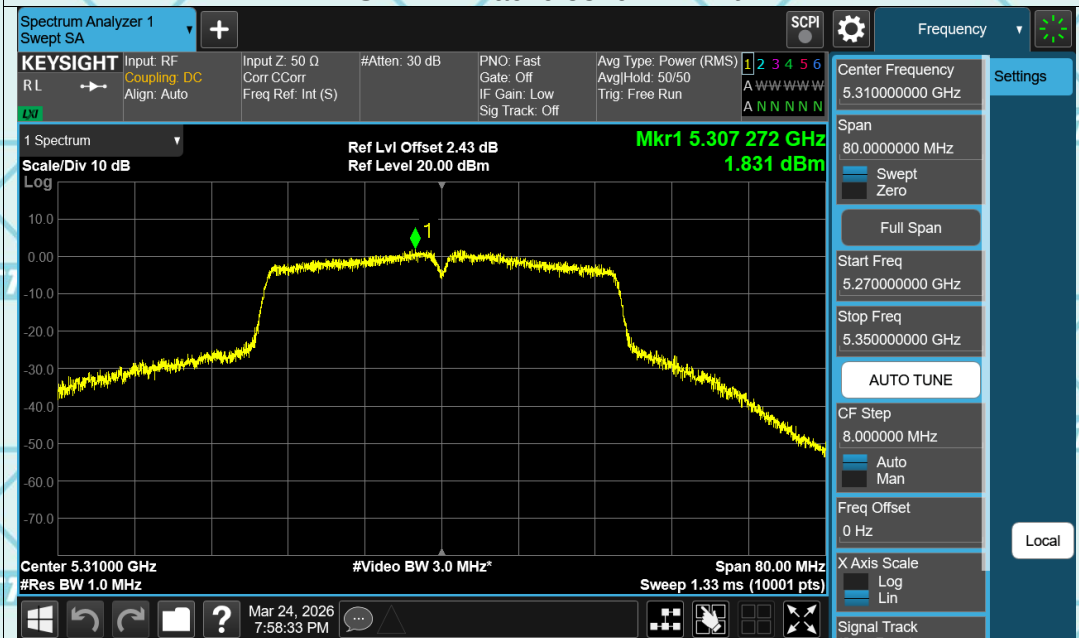


PSD NVNT ac40 5510MHz Ant1

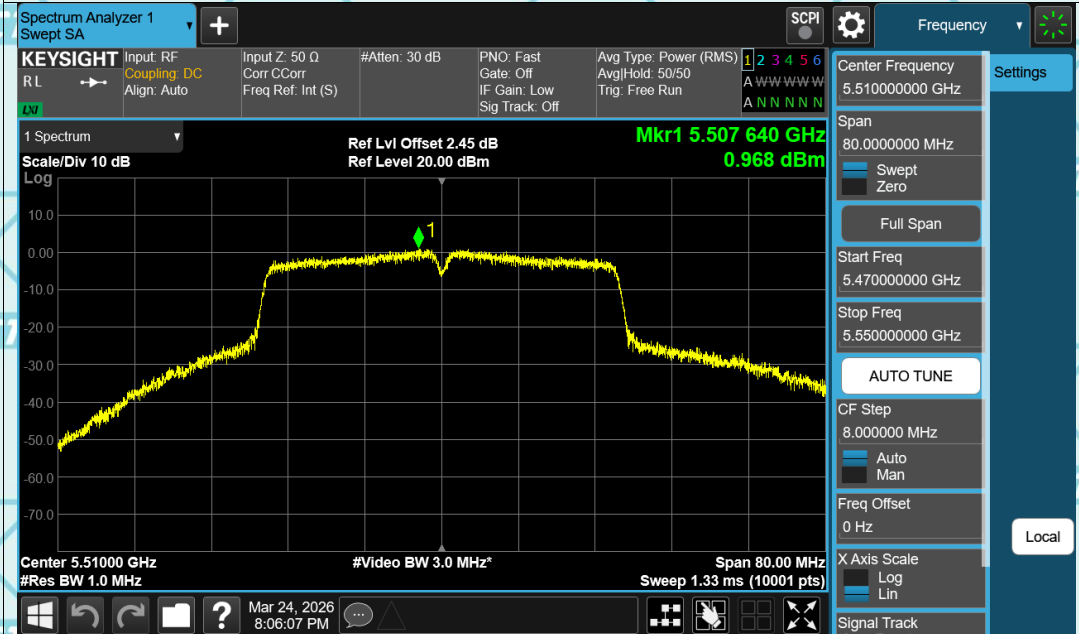


PSD NVNT ac40 5670MHz Ant1


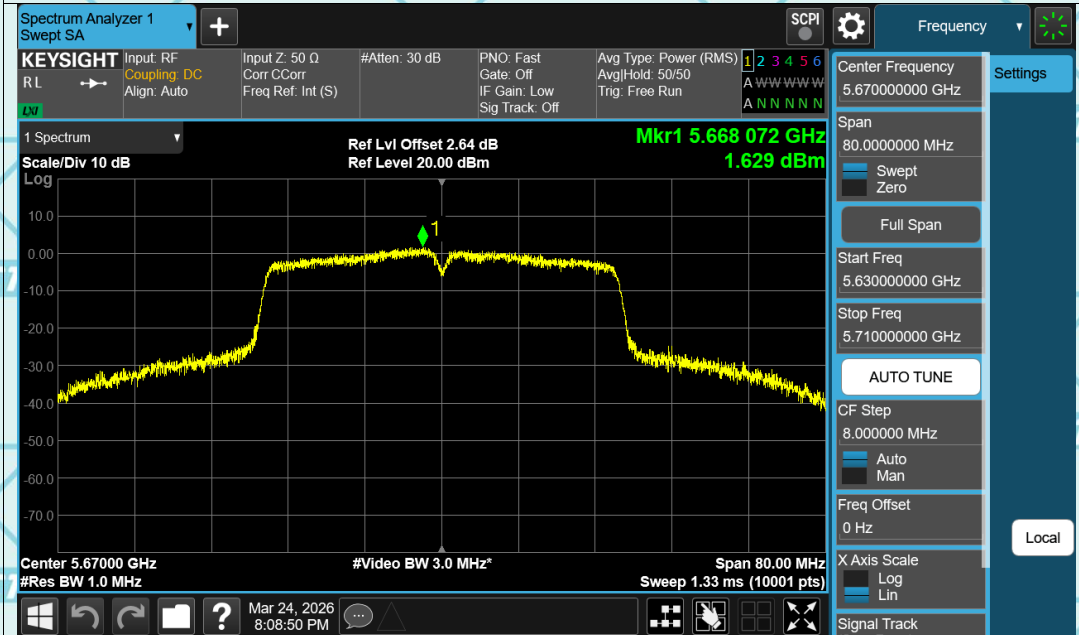


PSD NVNT ac40 5755MHz Ant1

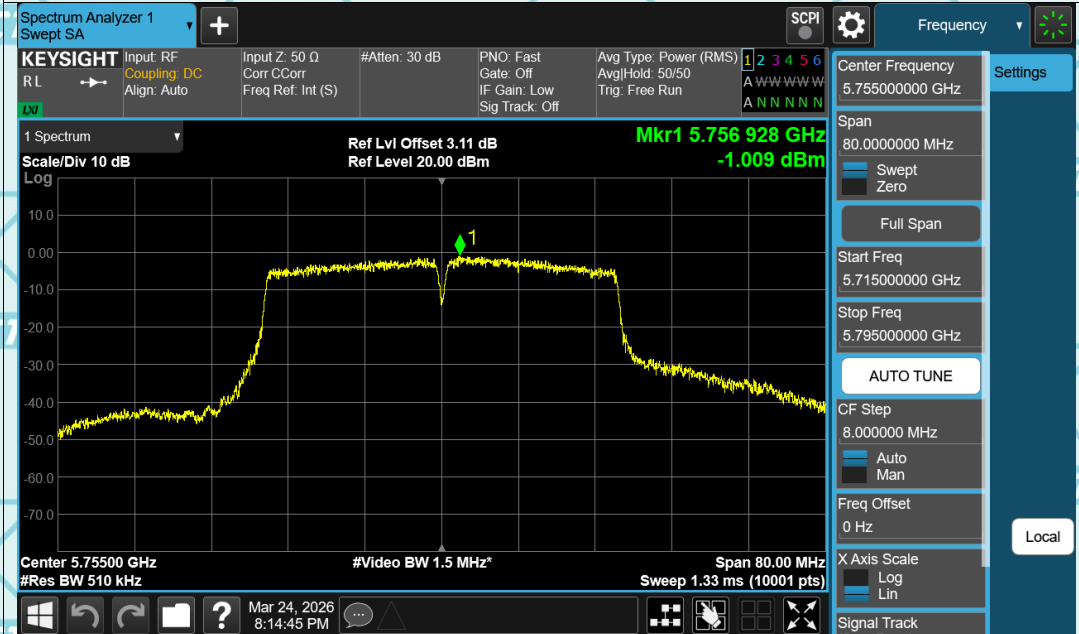


PSD NVNT ac40 5795MHz Ant1

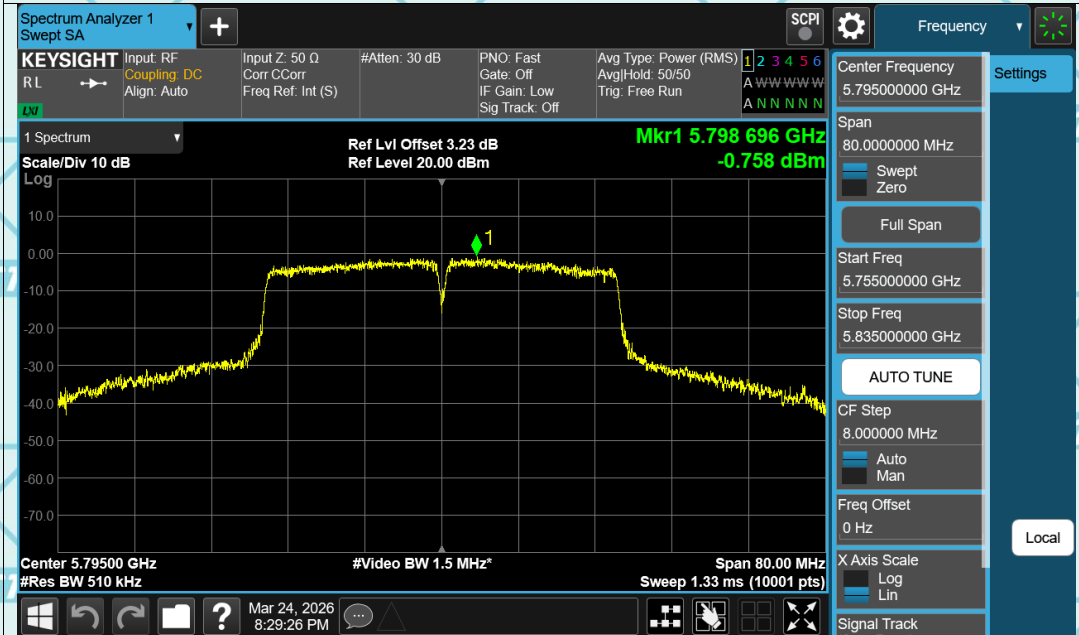


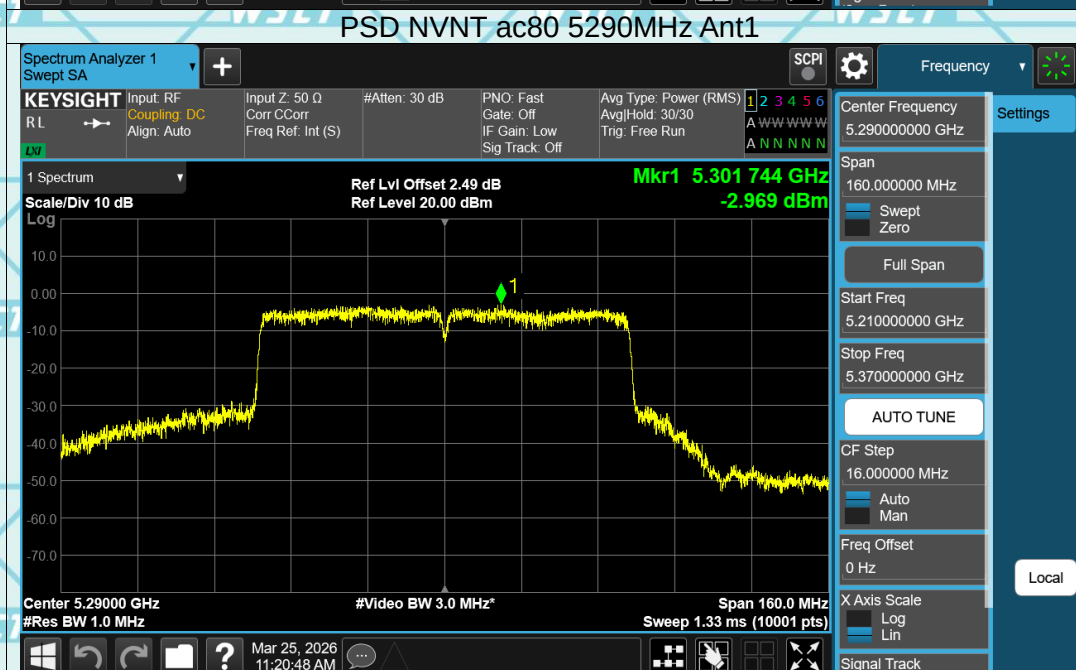
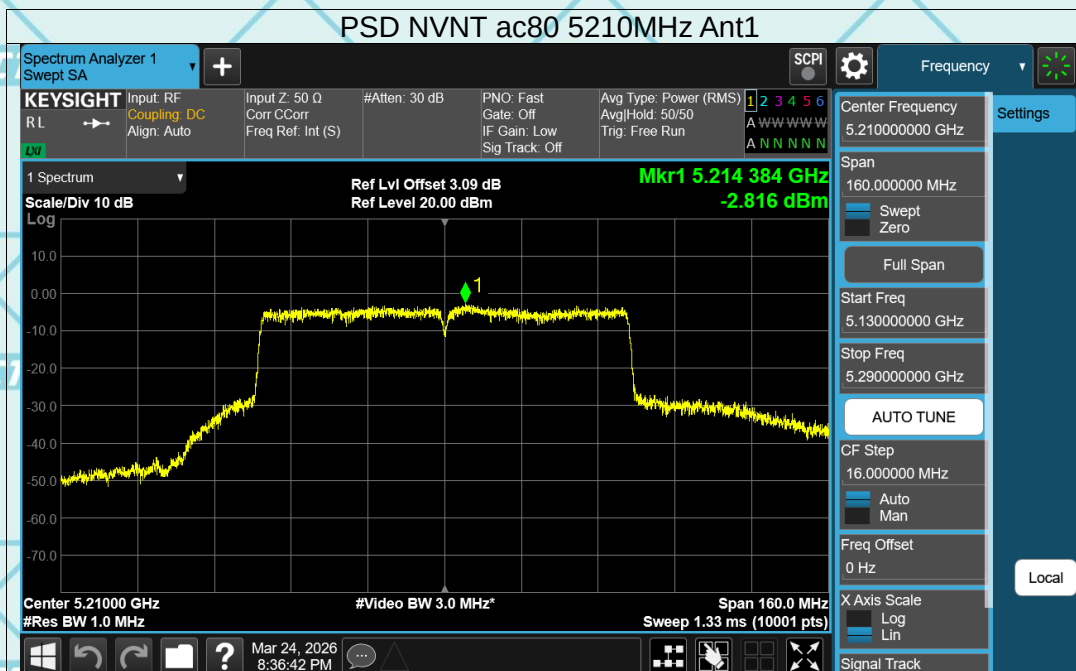




PSD NVNT ac80 5530MHz Ant1

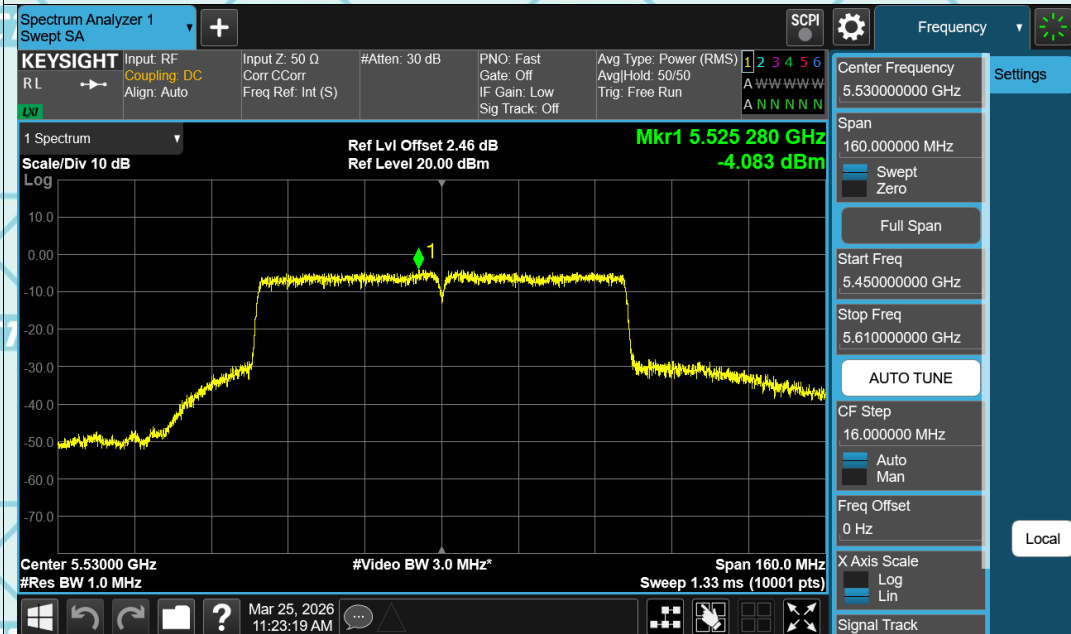



PSD NVNT ac80 5610MHz Ant1

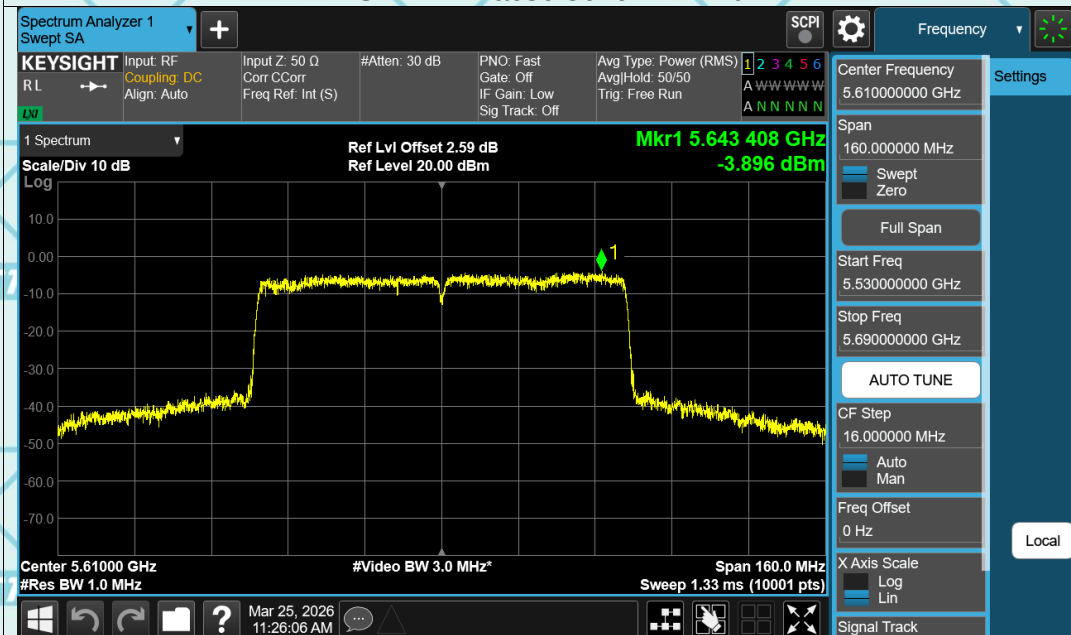

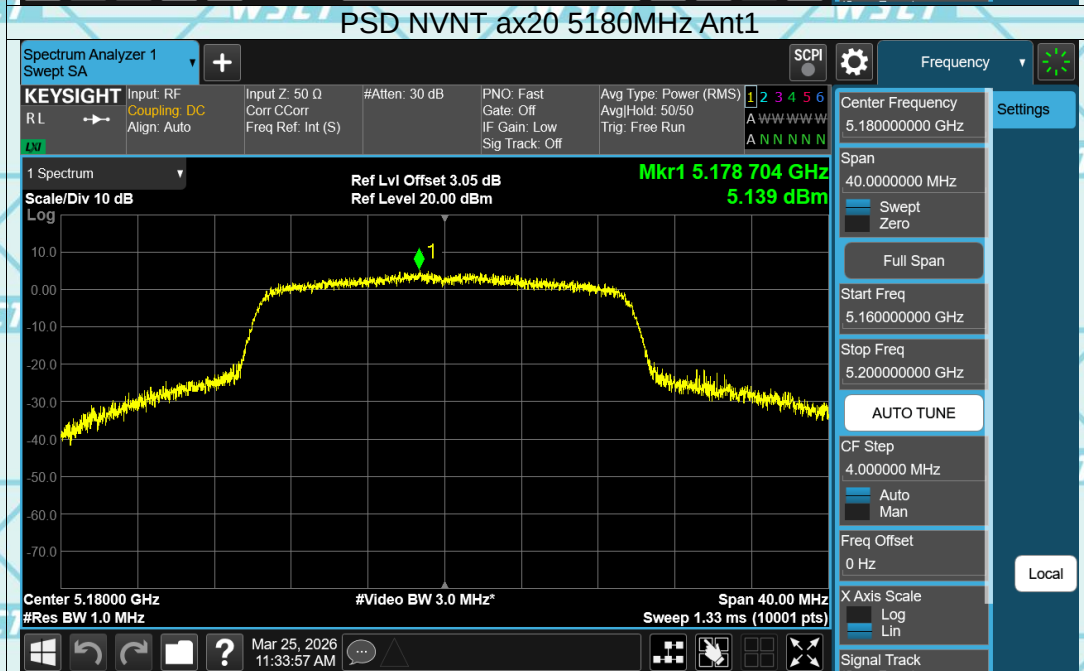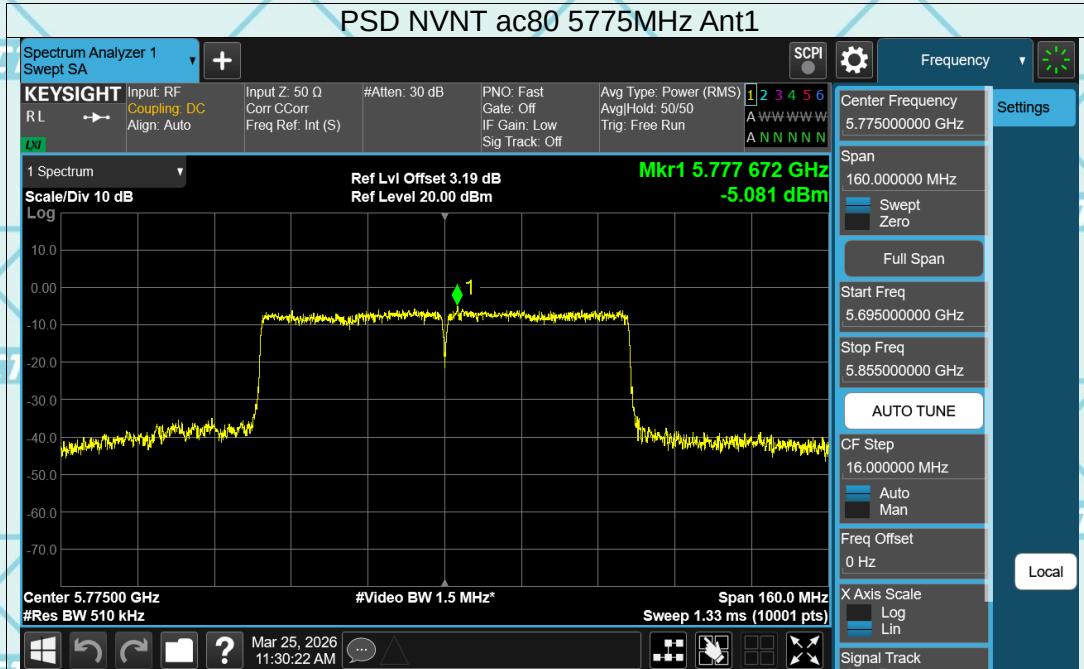


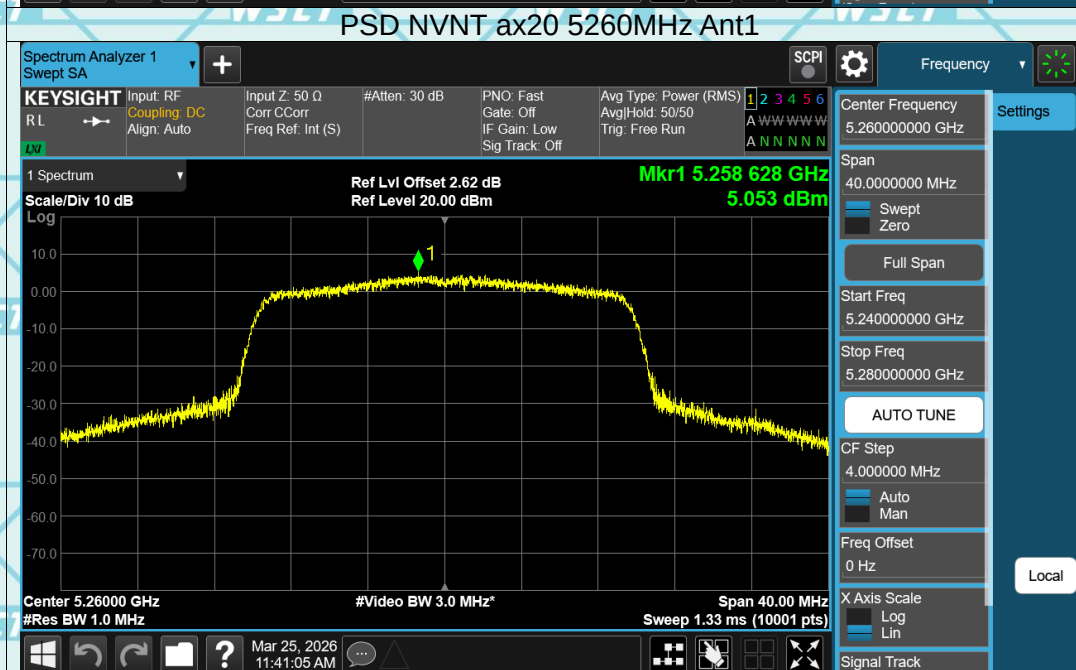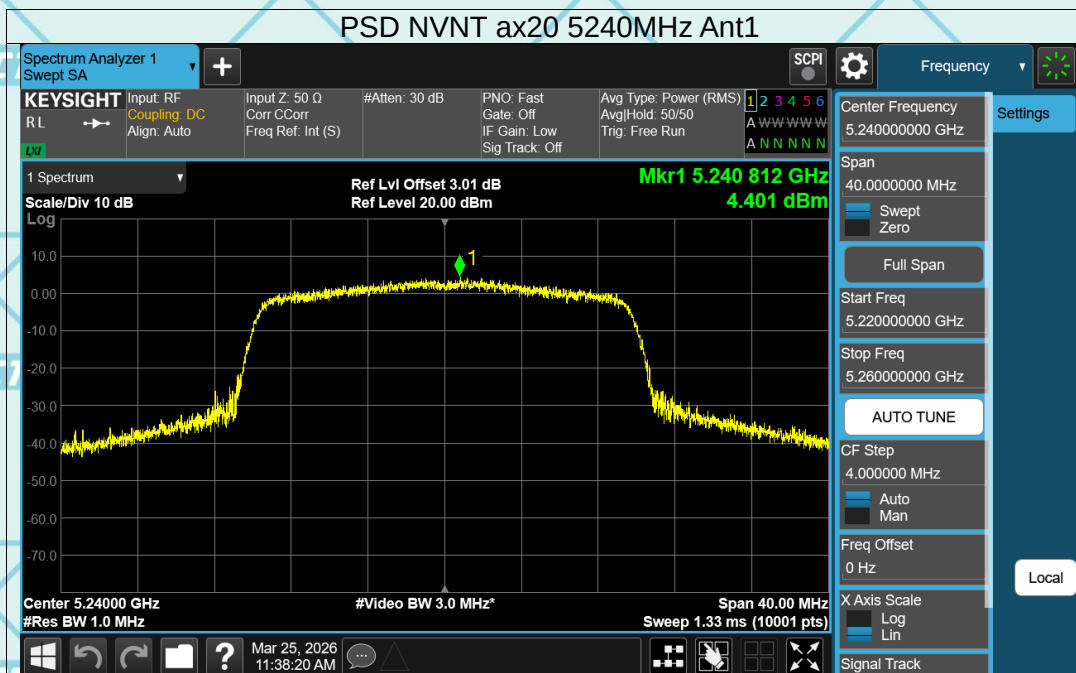




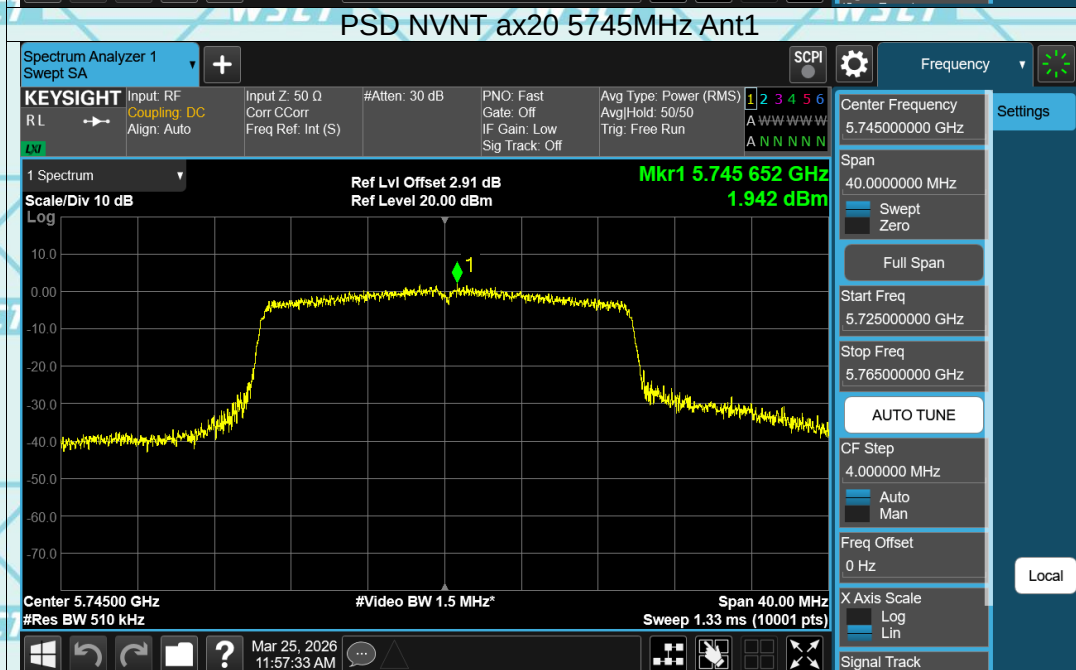
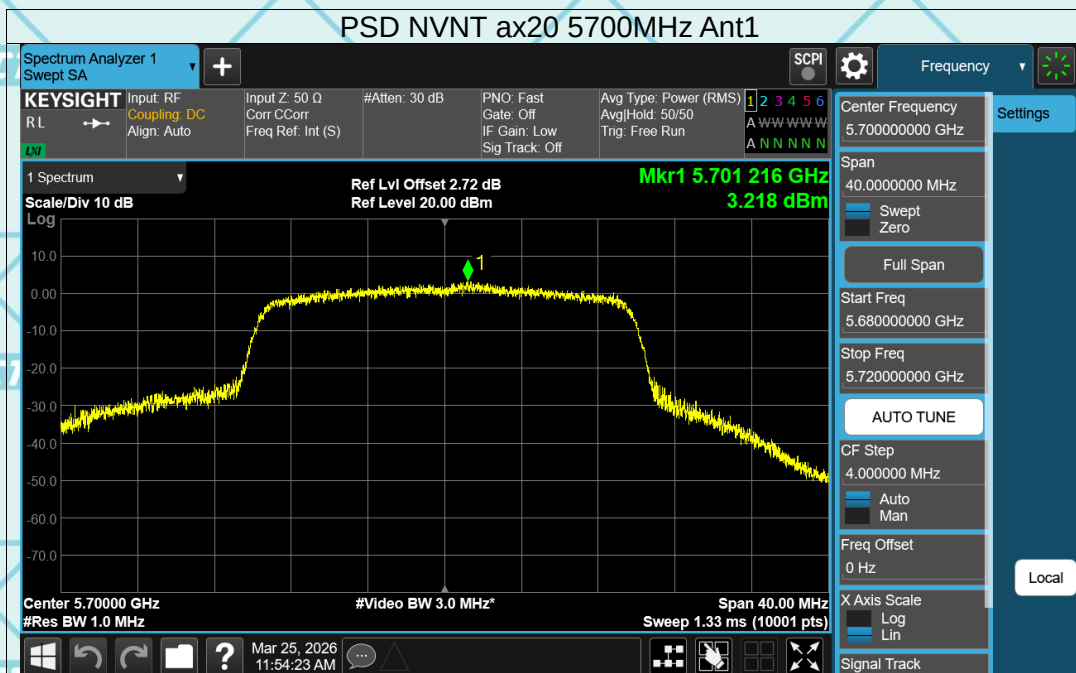


PSD NVNT ax20 5825MHz Ant1

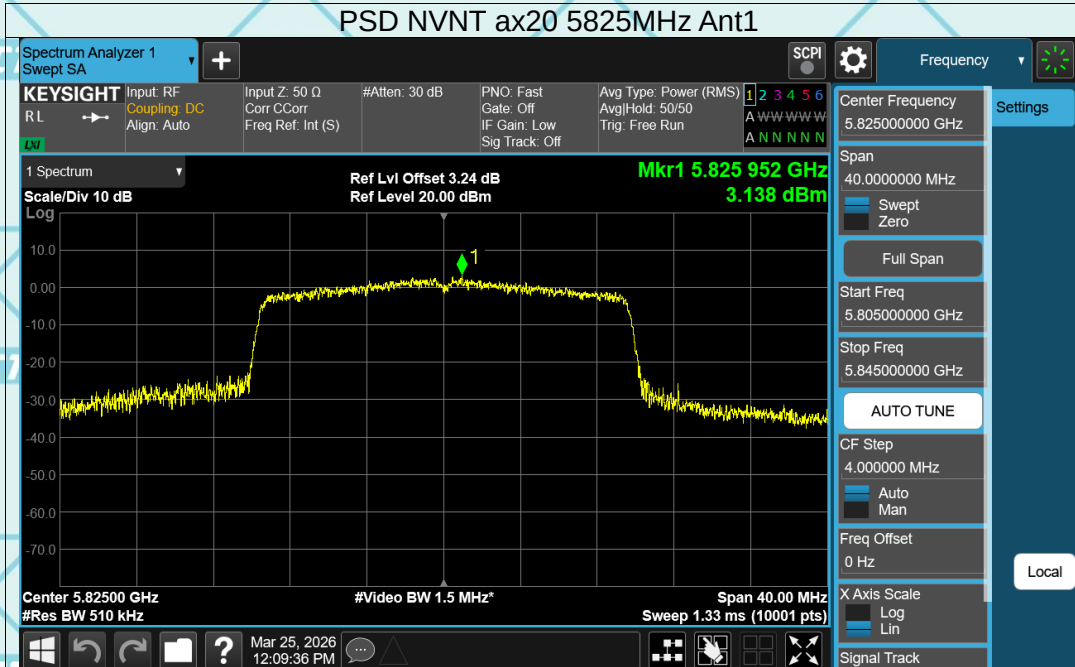


PSD NVNT ax40 5190MHz Ant1

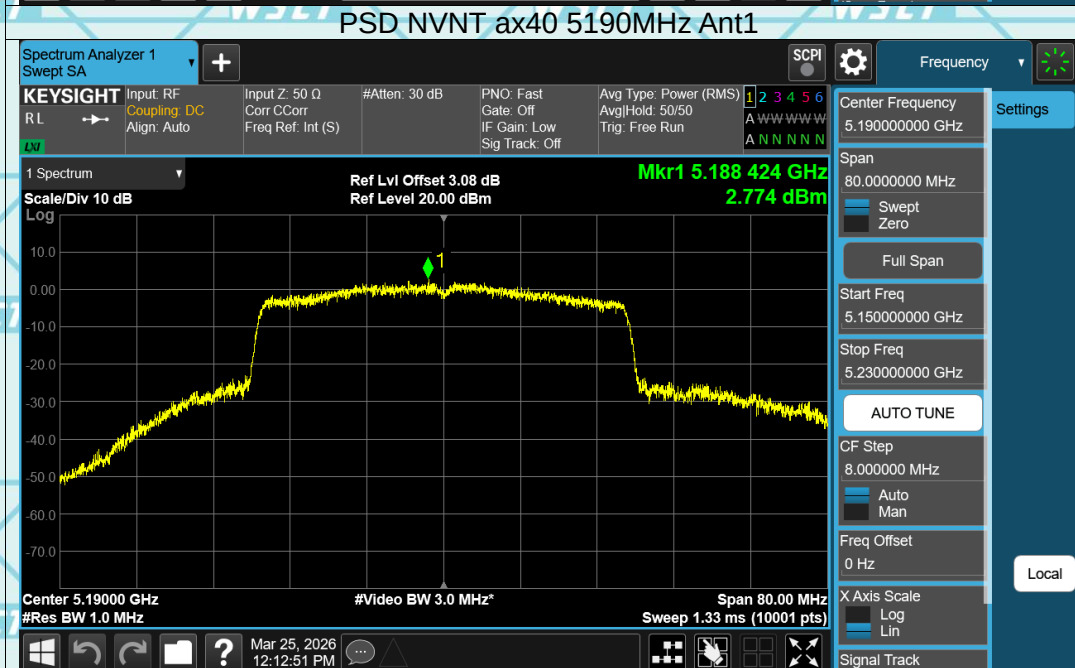


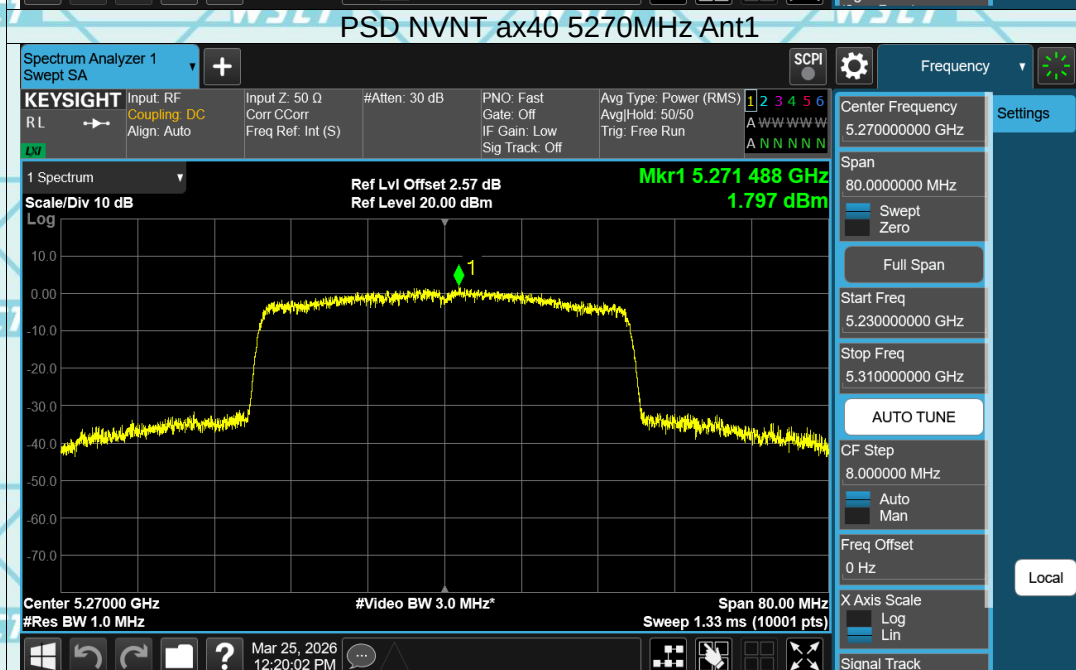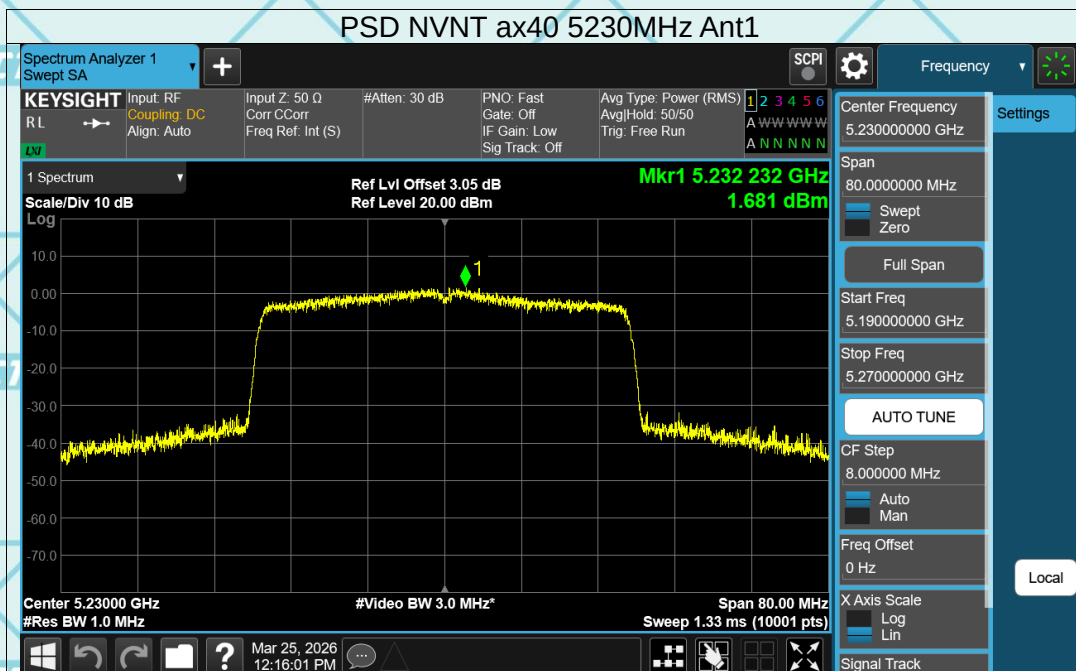


PSD NVNT ax40 5310MHz Ant1

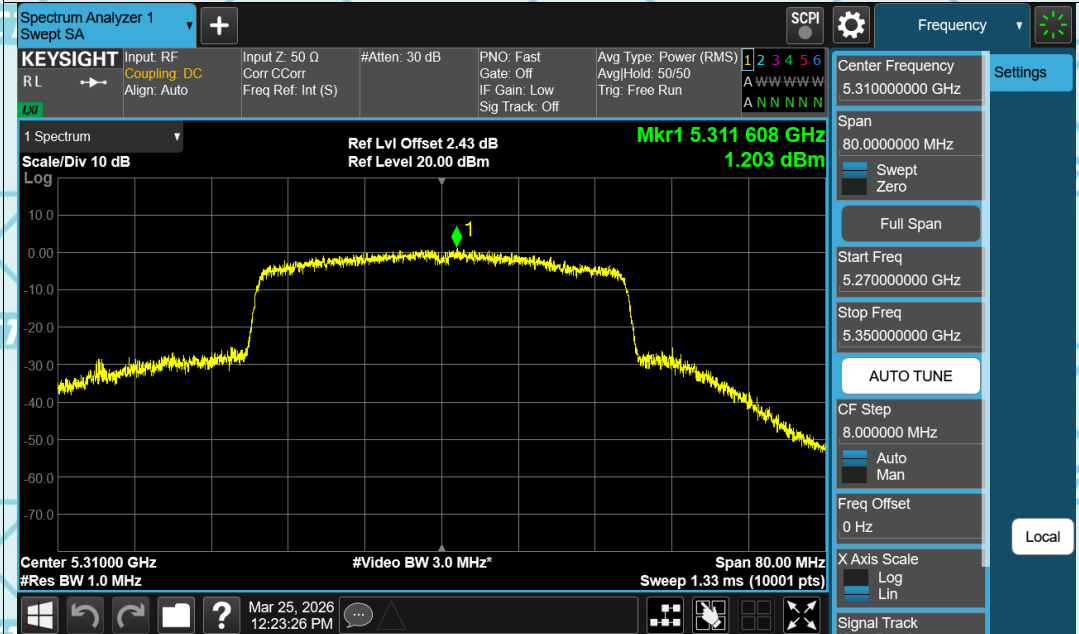


PSD NVNT ax40 5510MHz Ant1

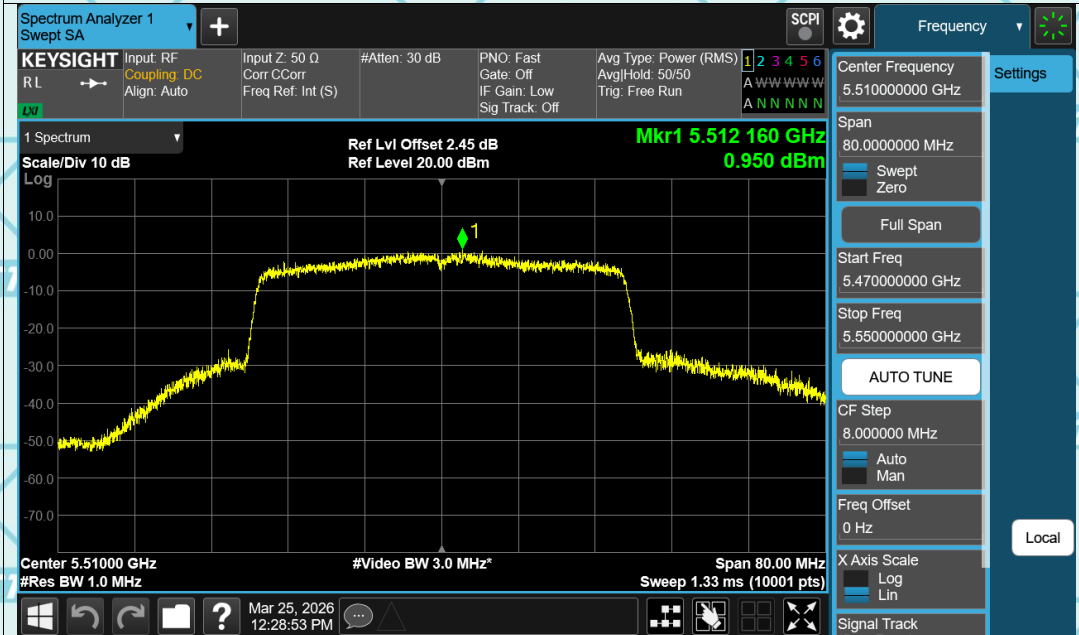


PSD NVNT ax40 5670MHz Ant1

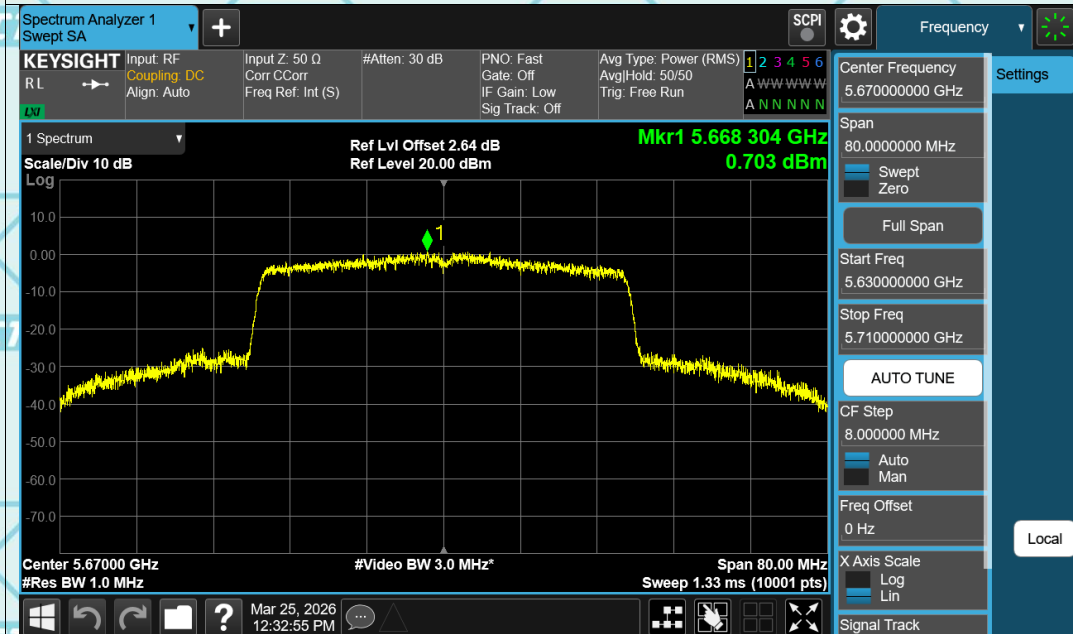


PSD NVNT ax40 5755MHz Ant1


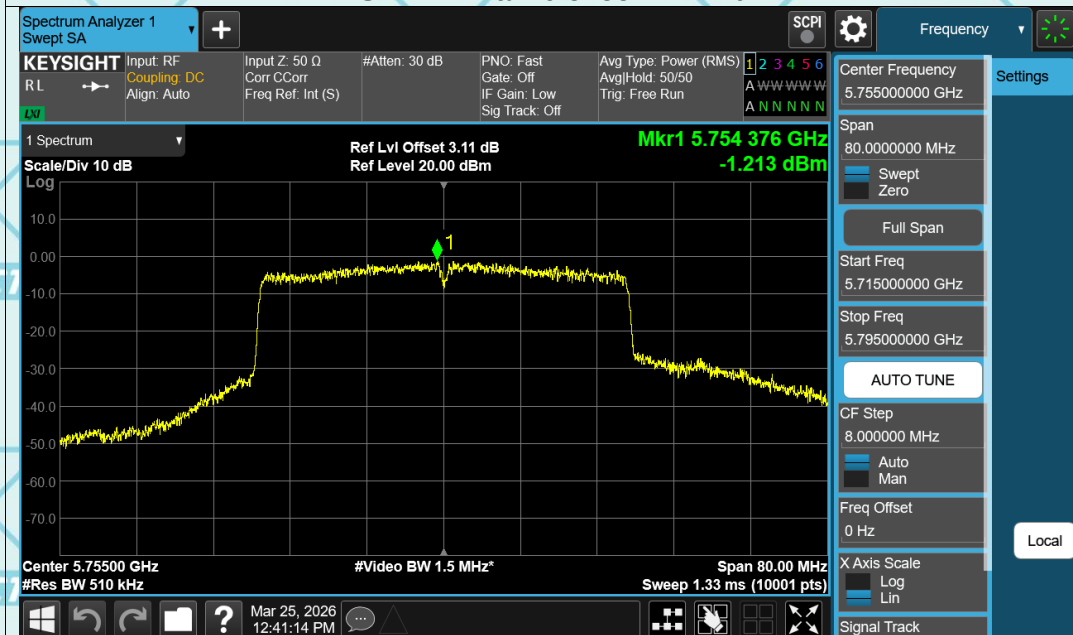




PSD NVNT ax40 5795MHz Ant1


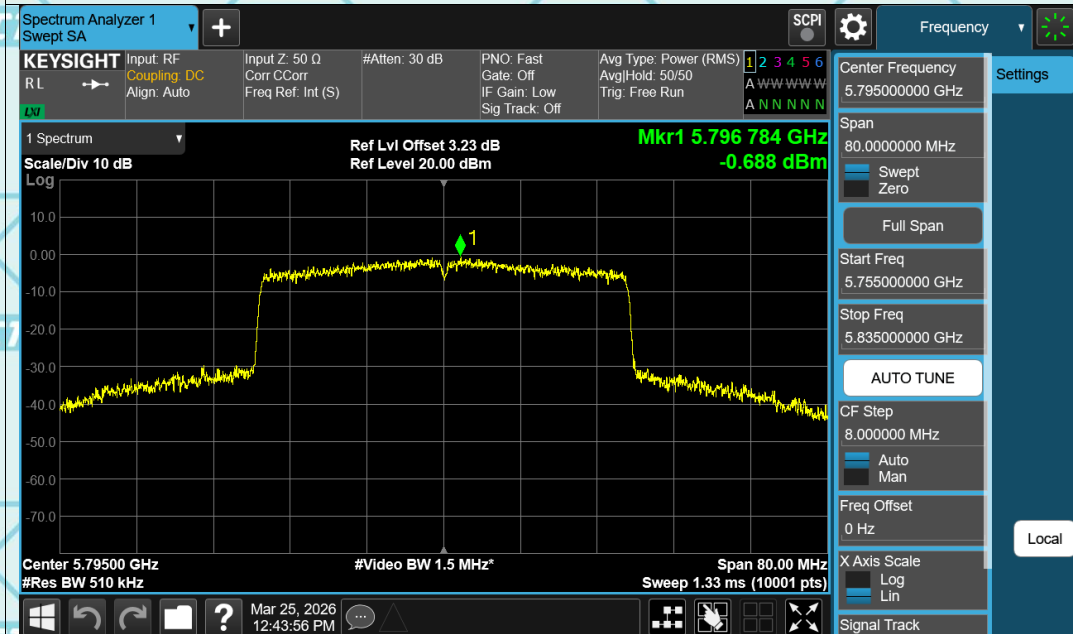


PSD NVNT ax80 5210MHz Ant1

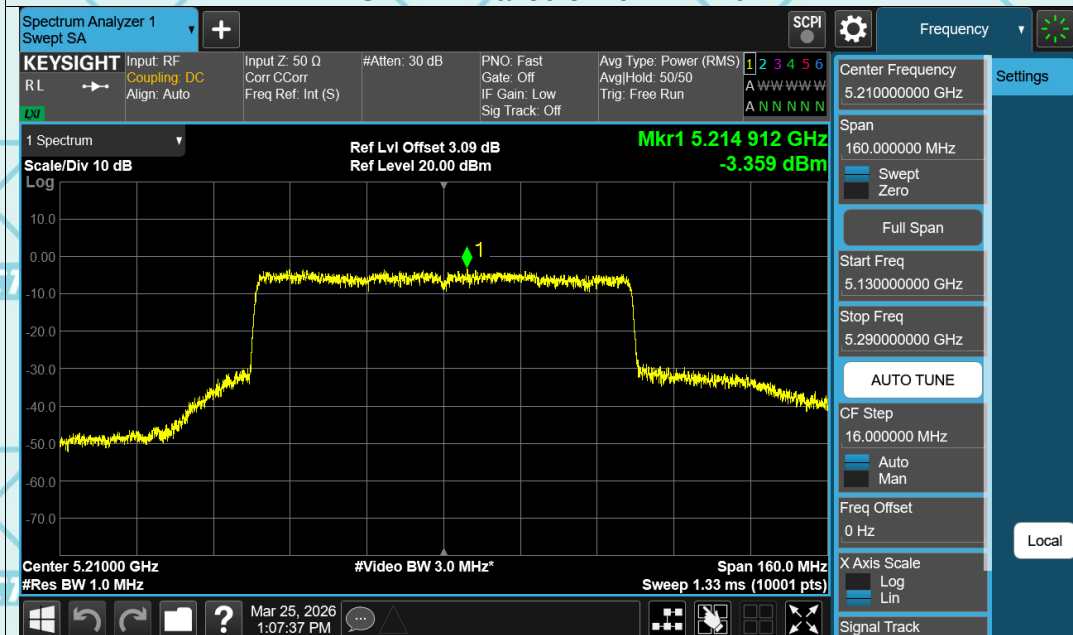

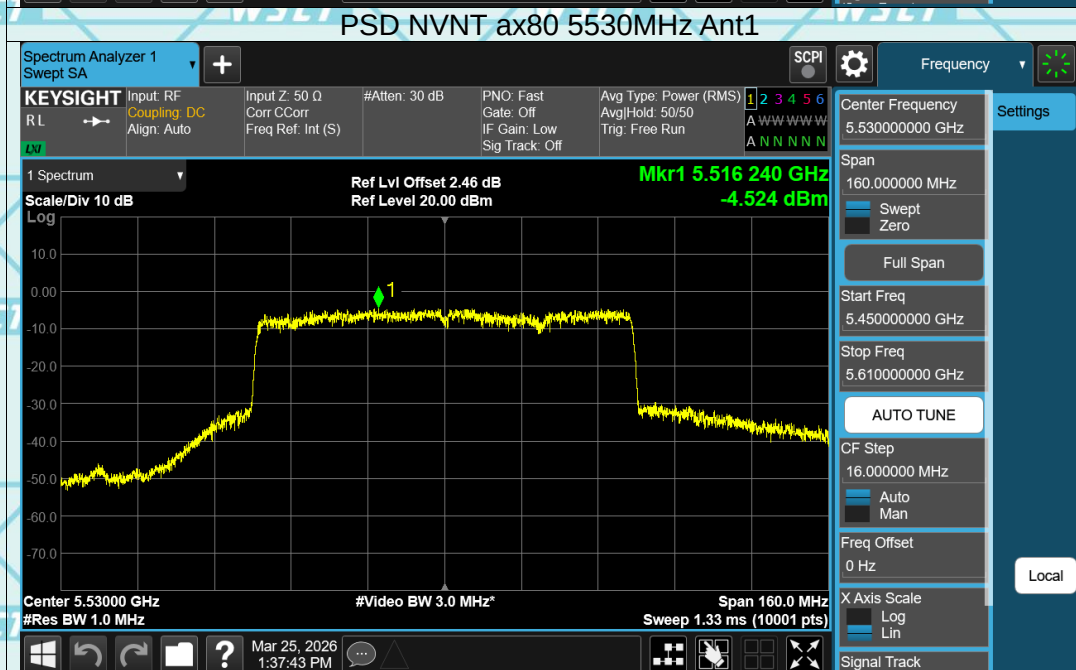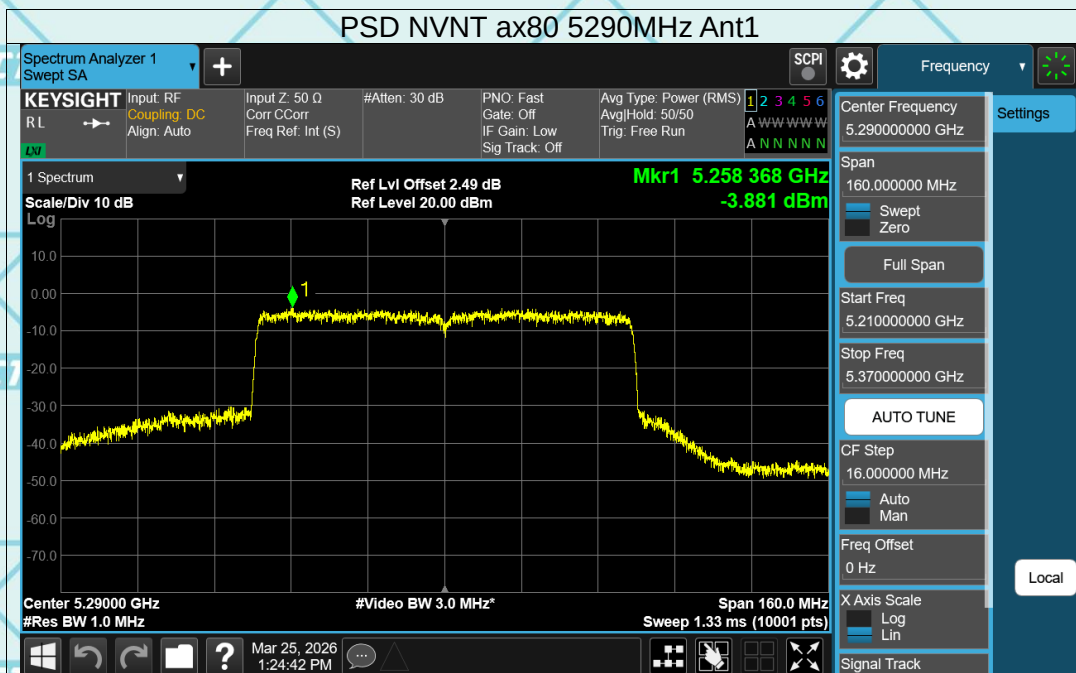

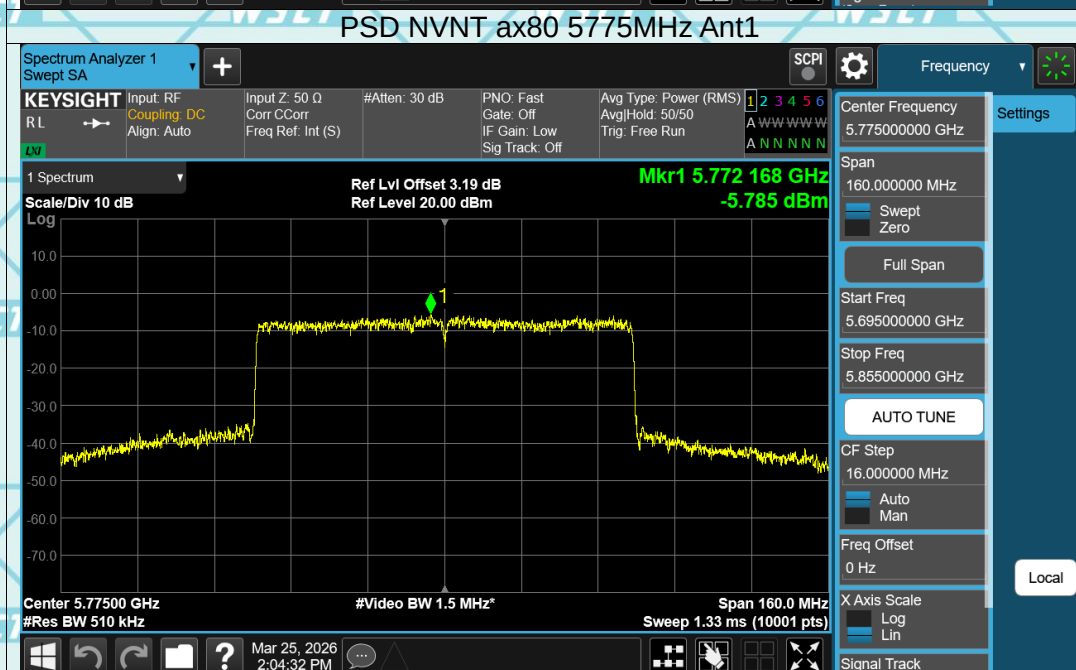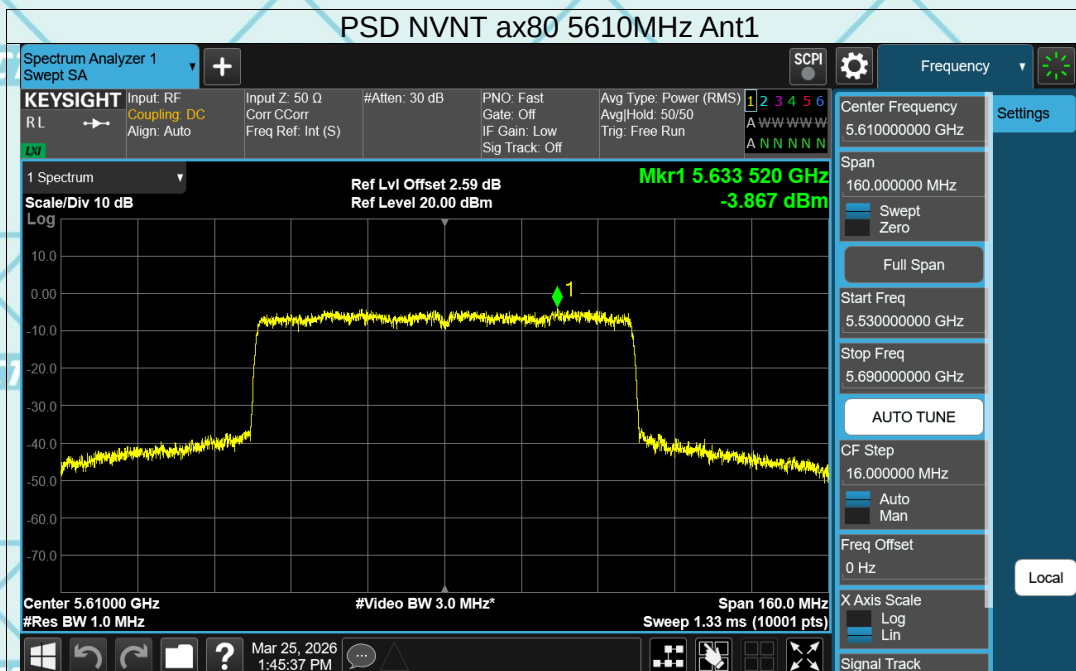

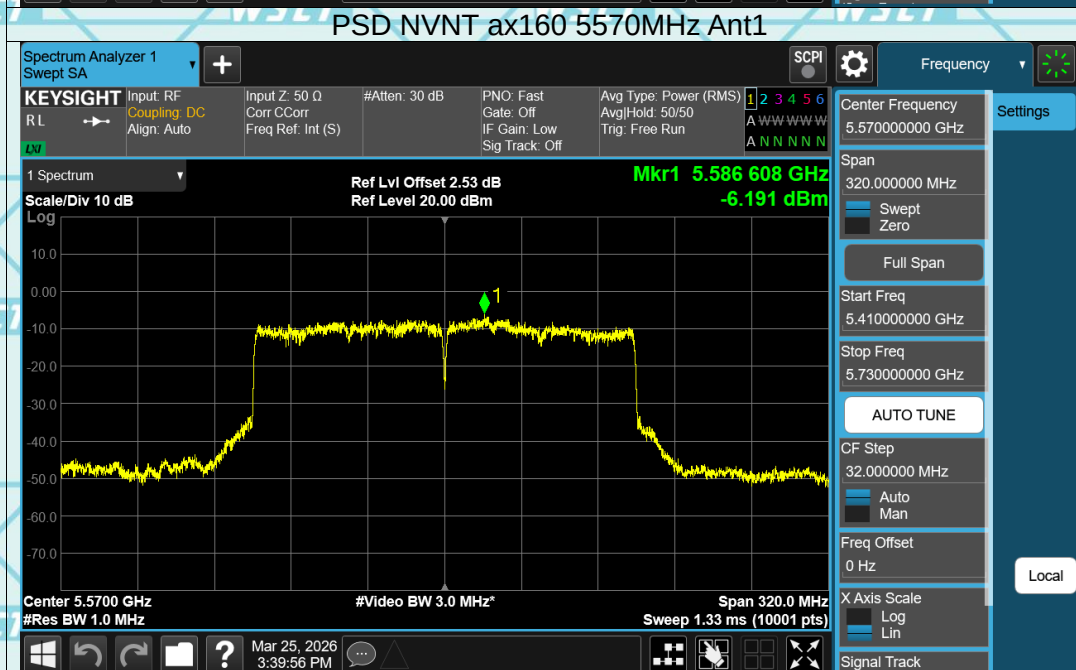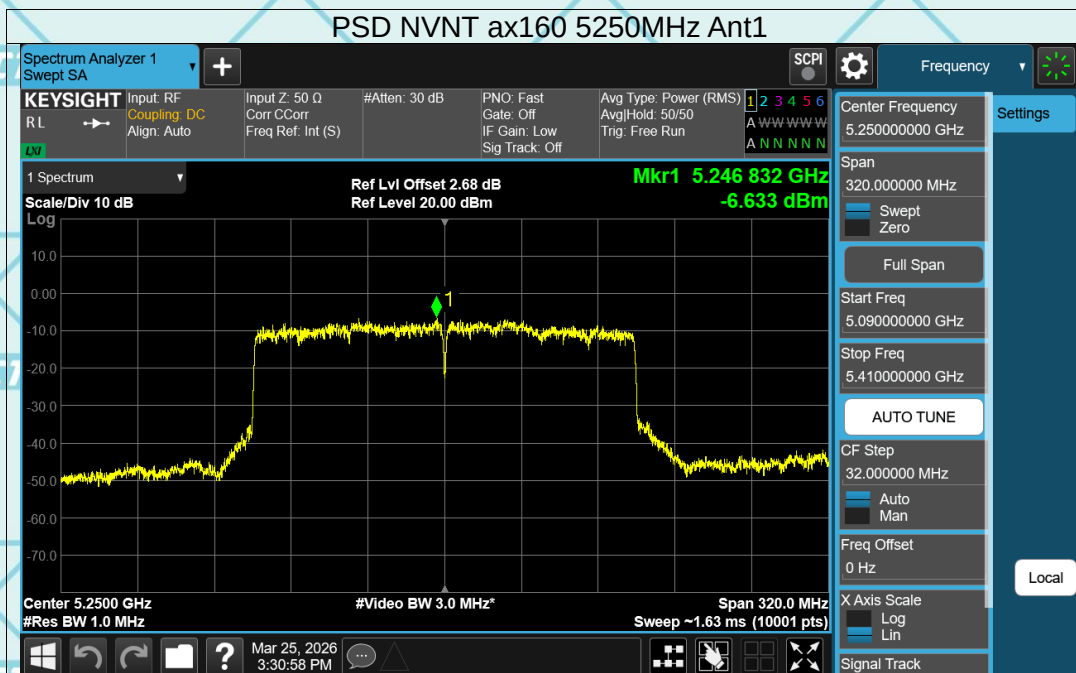

Report No.: WSCT-ANAB-R&E260400031A-Wi-Fi2 Issued: 29 April 2026

7.7 FREQUENCY STABILITY

Product:	EUT-Sample	Test Item:	Frequency Stability
Temperature:	25 °C	Humidity:	56%RH
Test Voltage:	DC 3.92V	Test Result:	PASS


Mode	Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
a	5180	5180.04	40000	7.72	25	Pass
a	5240	5239.98	-20000	-3.82	25	Pass
a	5260	5259.96	-40000	-7.6	25	Pass
a	5320	5319.96	-40000	-7.52	25	Pass
a	5500	5500	0	0	25	Pass
a	5700	5699.98	-20000	-3.51	25	Pass
a	5745	5745	0	0	25	Pass
a	5825	5825.02	20000	3.43	25	Pass
n20	5180	5179.98	-20000	-3.86	25	Pass
n20	5240	5239.98	-20000	-3.82	25	Pass
n20	5260	5259.98	-20000	-3.8	25	Pass
n20	5320	5319.98	-20000	-3.76	25	Pass
n20	5500	5500	0	0	25	Pass
n20	5700	5700.02	20000	3.51	25	Pass
n20	5745	5745	0	0	25	Pass
n20	5825	5825	0	0	25	Pass
n40	5190	5189.96	-40000	-7.71	25	Pass
n40	5230	5230	0	0	25	Pass
n40	5270	5270	0	0	25	Pass
n40	5310	5310	0	0	25	Pass
n40	5510	5510	0	0	25	Pass
n40	5670	5670	0	0	25	Pass
n40	5755	5755	0	0	25	Pass
n40	5795	5794.96	-40000	-6.9	25	Pass
ac20	5180	5179.98	-20000	-3.86	25	Pass
ac20	5240	5240	0	0	25	Pass
ac20	5260	5260	0	0	25	Pass
ac20	5320	5319.98	-20000	-3.76	25	Pass
ac20	5500	5500	0	0	25	Pass
ac20	5700	5700.02	20000	3.51	25	Pass
ac20	5745	5745.02	20000	3.48	25	Pass
ac20	5825	5825	0	0	25	Pass
ac40	5190	5189.96	-40000	-7.71	25	Pass
ac40	5230	5230	0	0	25	Pass
ac40	5270	5269.96	-40000	-7.59	25	Pass
ac40	5310	5309.96	-40000	-7.53	25	Pass
ac40	5510	5510	0	0	25	Pass
ac40	5670	5670	0	0	25	Pass
ac40	5755	5755.04	40000	6.95	25	Pass
ac40	5795	5795	0	0	25	Pass
ac80	5210	5210	0	0	25	Pass
ac80	5290	5290	0	0	25	Pass
ac80	5530	5530	0	0	25	Pass
ac80	5610	5610	0	0	25	Pass
ac80	5775	5775	0	0	25	Pass
ax20	5180	5180	0	0	25	Pass
ax20	5240	5240.02	20000	3.82	25	Pass
ax20	5260	5260	0	0	25	Pass
ax20	5320	5320	0	0	25	Pass
ax20	5500	5500	0	0	25	Pass
ax20	5700	5700.04	40000	7.02	25	Pass
ax20	5745	5745.06	60000	10.44	25	Pass
ax20	5825	5825.04	40000	6.87	25	Pass
ax40	5190	5190.04	40000	7.71	25	Pass
ax40	5230	5229.96	-40000	-7.65	25	Pass
ax40	5270	5269.96	-40000	-7.59	25	Pass
ax40	5310	5309.96	-40000	-7.53	25	Pass
ax40	5510	5510	0	0	25	Pass
ax40	5670	5670.04	40000	7.05	25	Pass

Report No.: WSCT-ANAB-R&E260400031A-Wi-Fi2 Issued: 29 April 2026

ax40	5755	5755.04	40000	6.95	25	Pass
ax40	5795	5795	0	0	25	Pass
ax80	5210	5210	0	0	25	Pass
ax80	5290	5290	0	0	25	Pass
ax80	5530	5530	0	0	25	Pass
ax80	5610	5610	0	0	25	Pass
ax80	5775	5775	0	0	25	Pass
ax160	5250	5250	0	0	25	Pass
ax160	5570	5570	0	0	25	Pass

Test Graphs

Freq. Stability NVNT a 5180MHz Ant1 0 Minutes

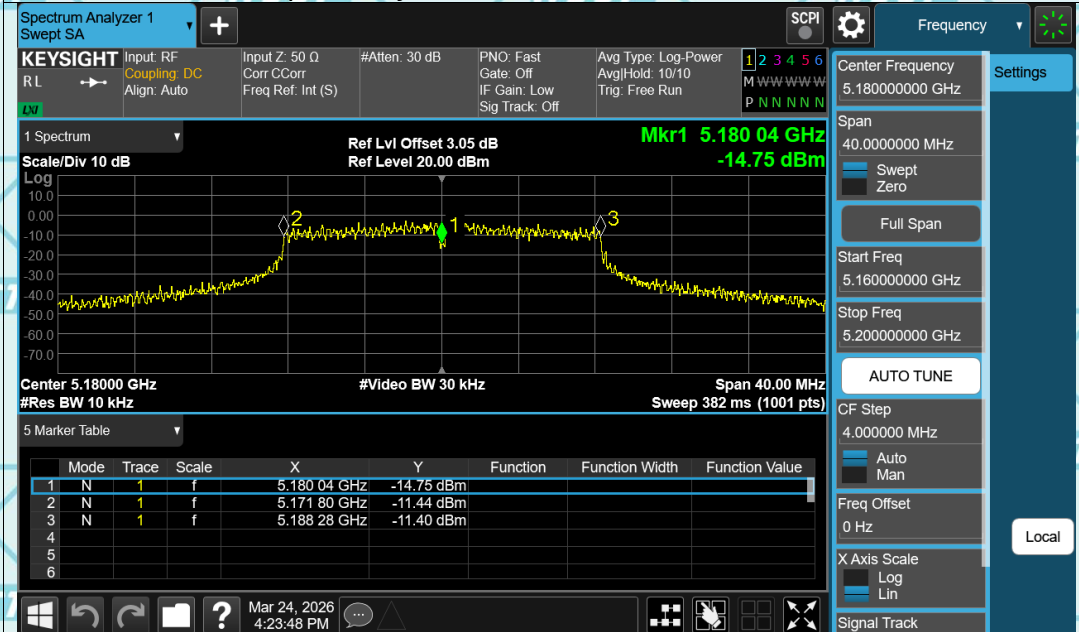

Freq. Stability NVNT a 5240MHz Ant1 0 Minutes

