

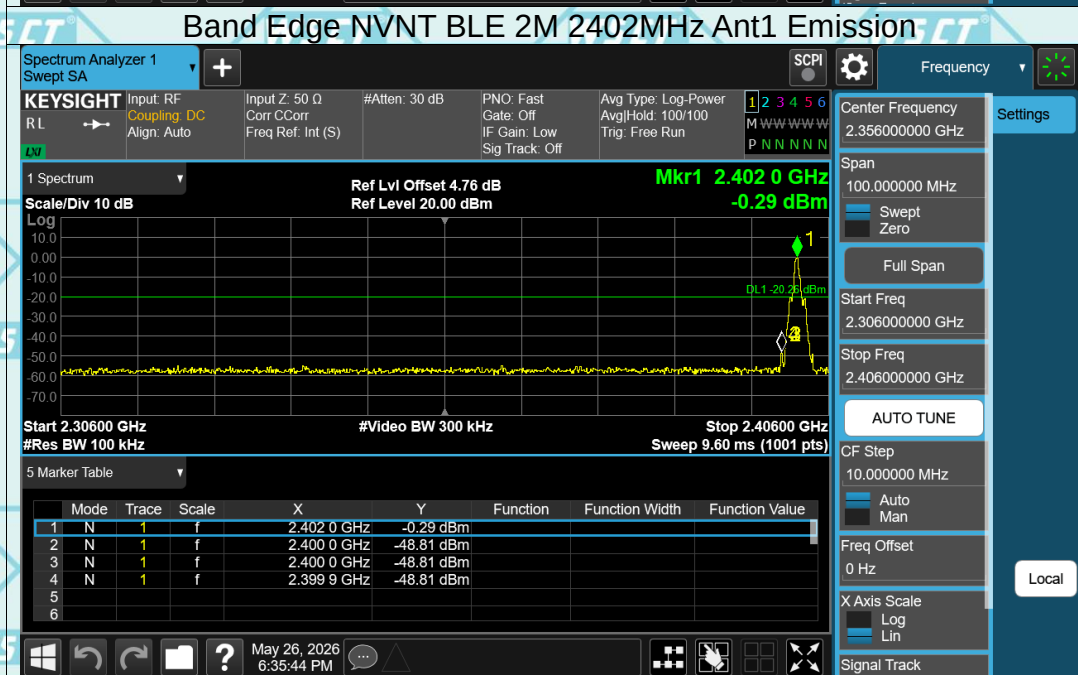
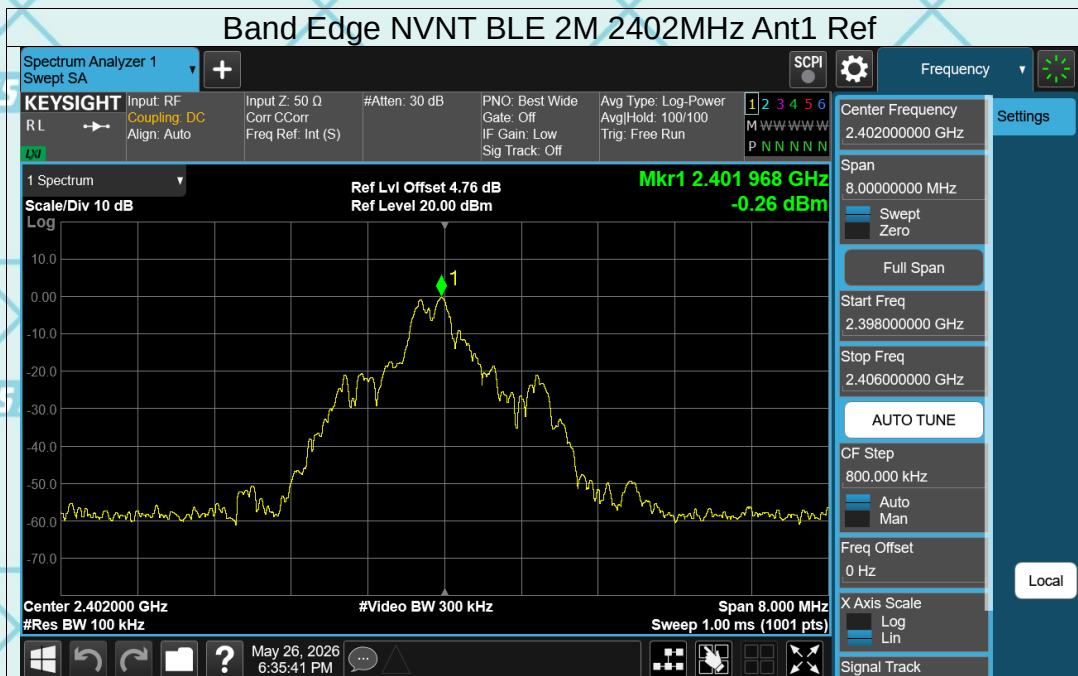




Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

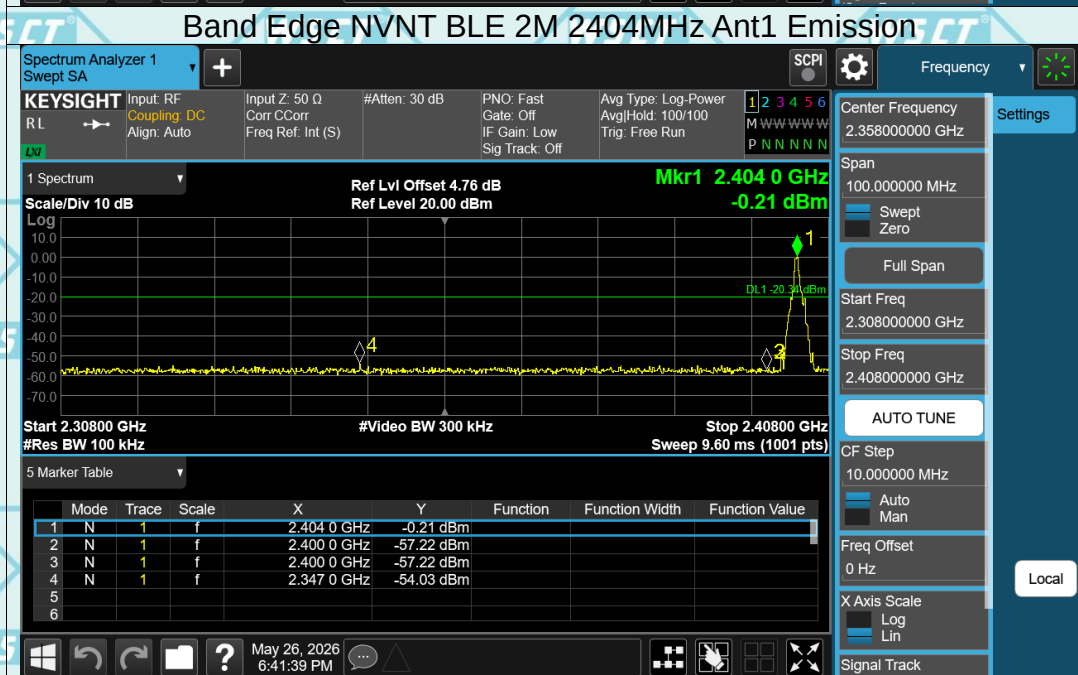



Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

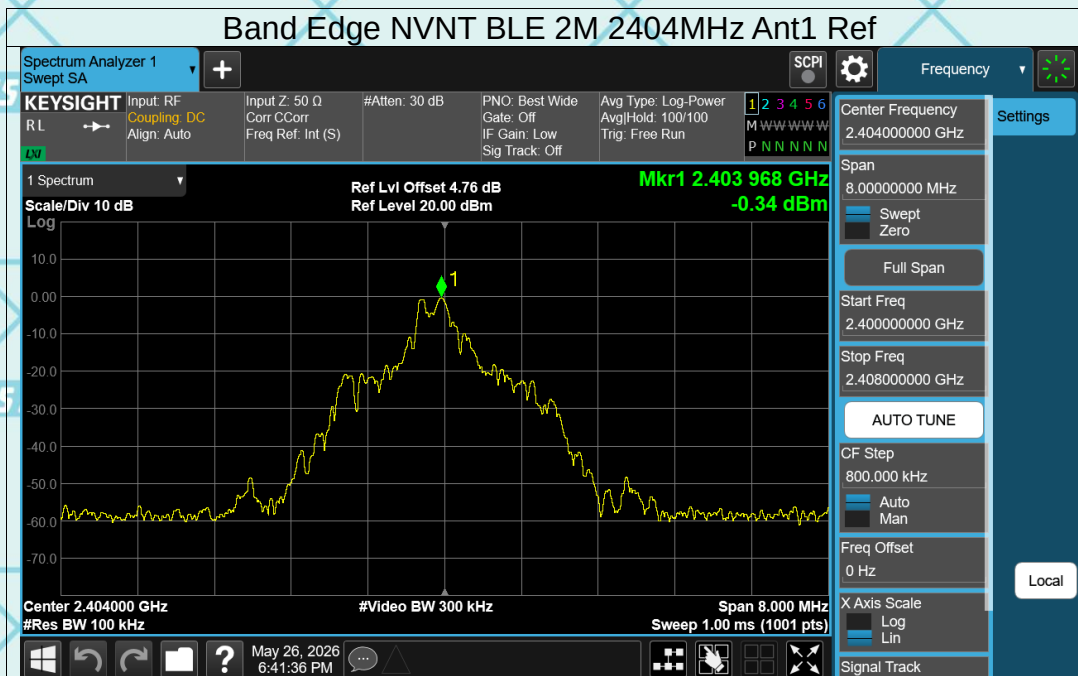

Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

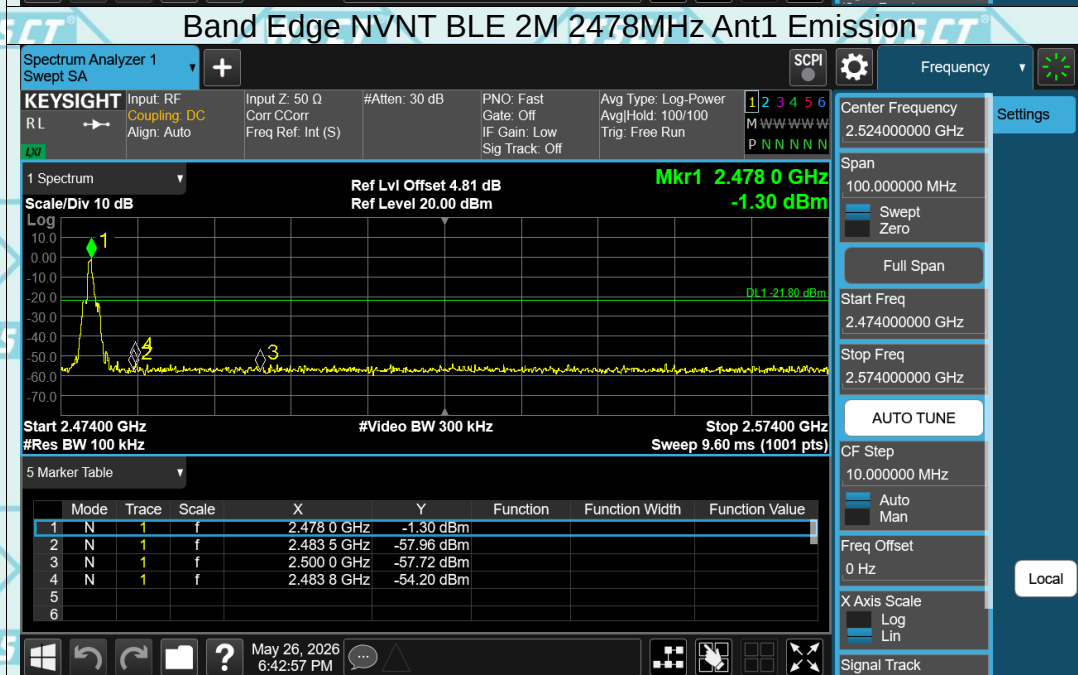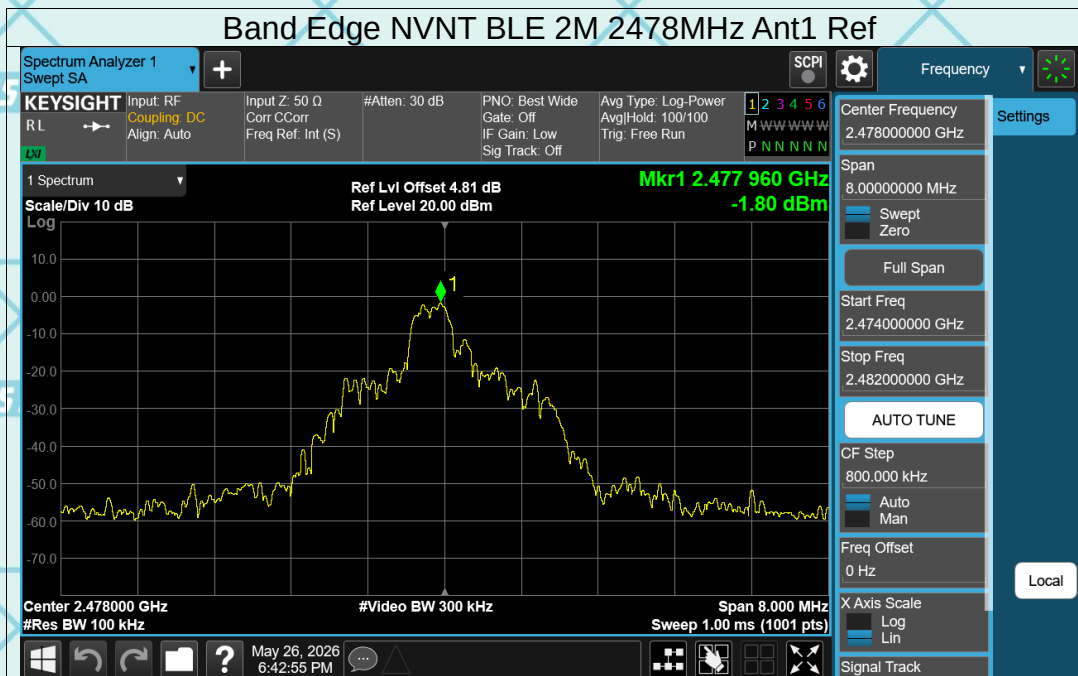



Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

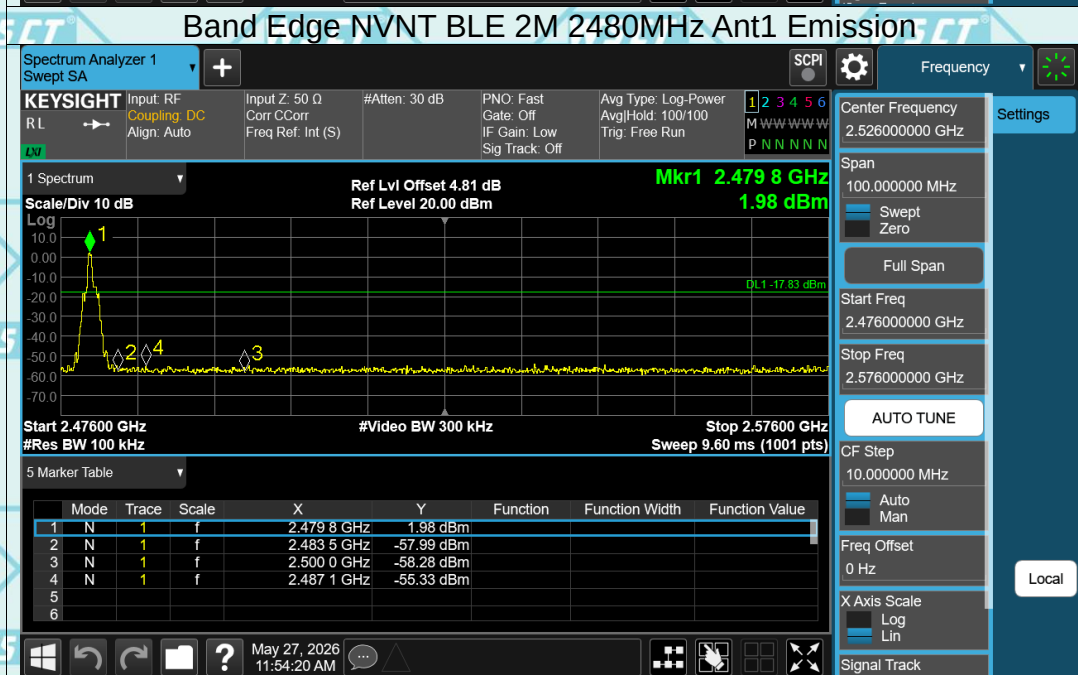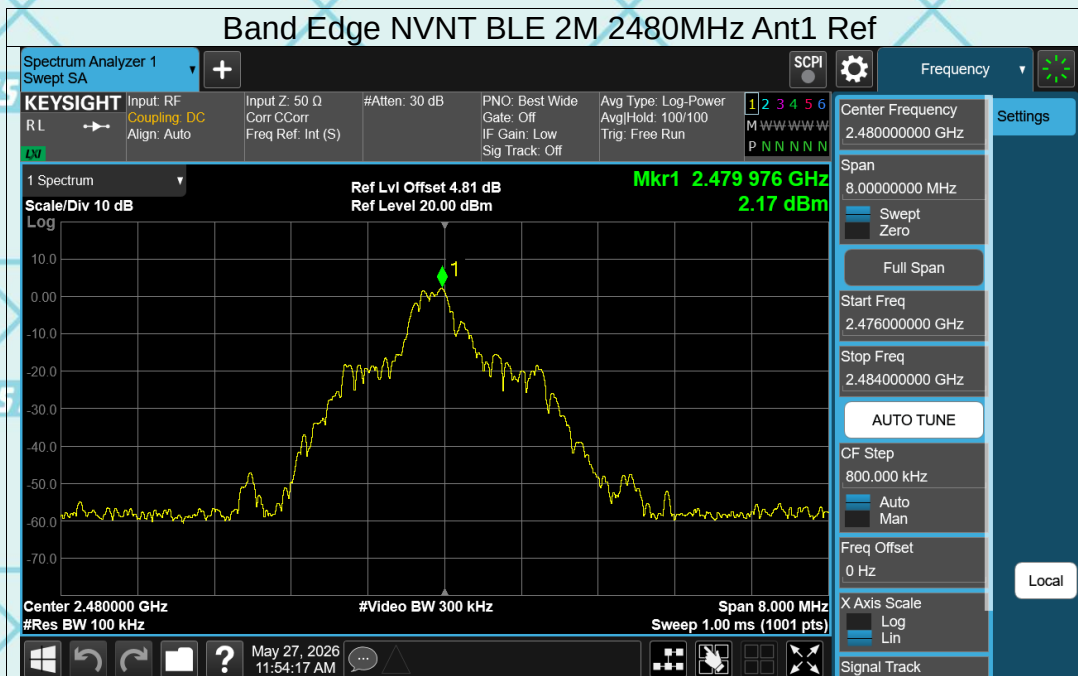



Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026  
Conducted RF Spurious Emission





Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

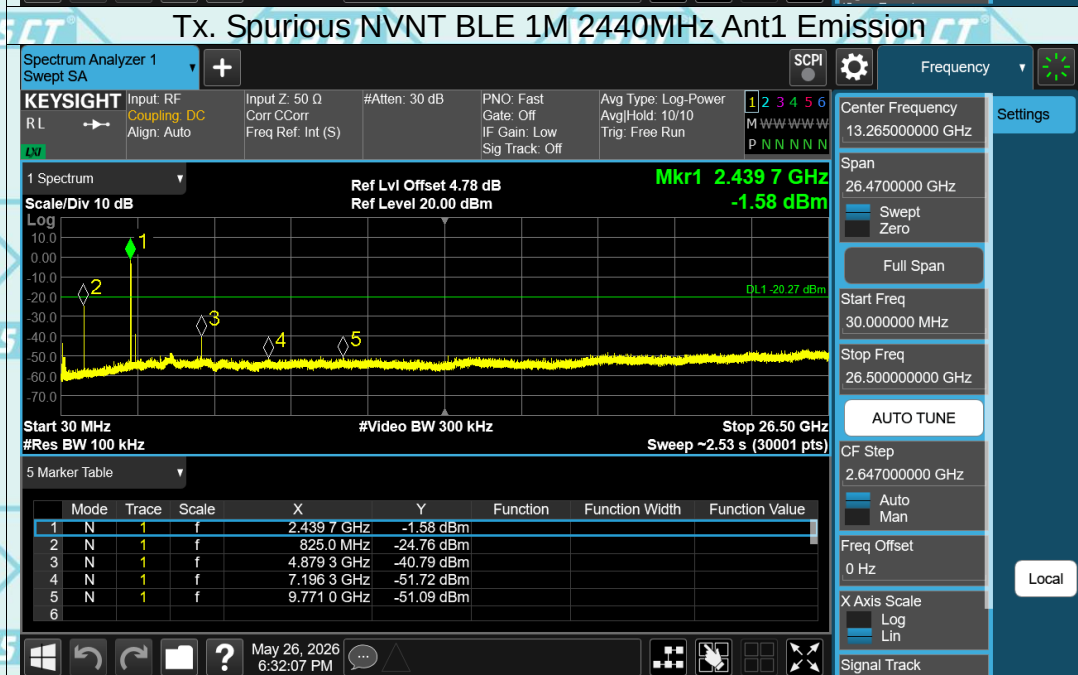
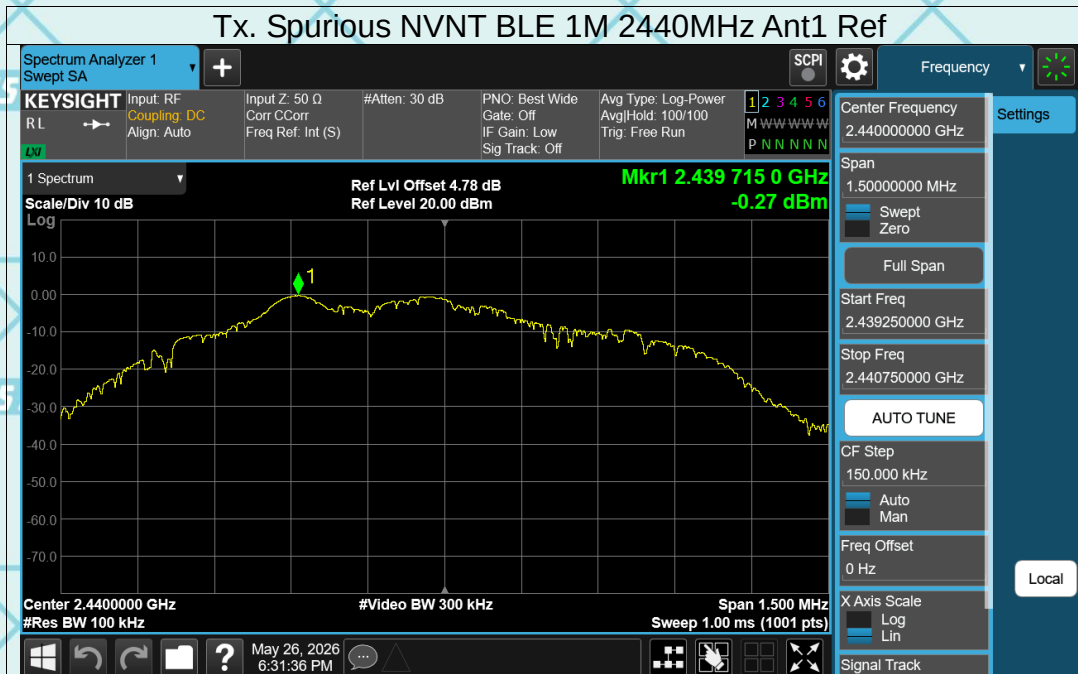


Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

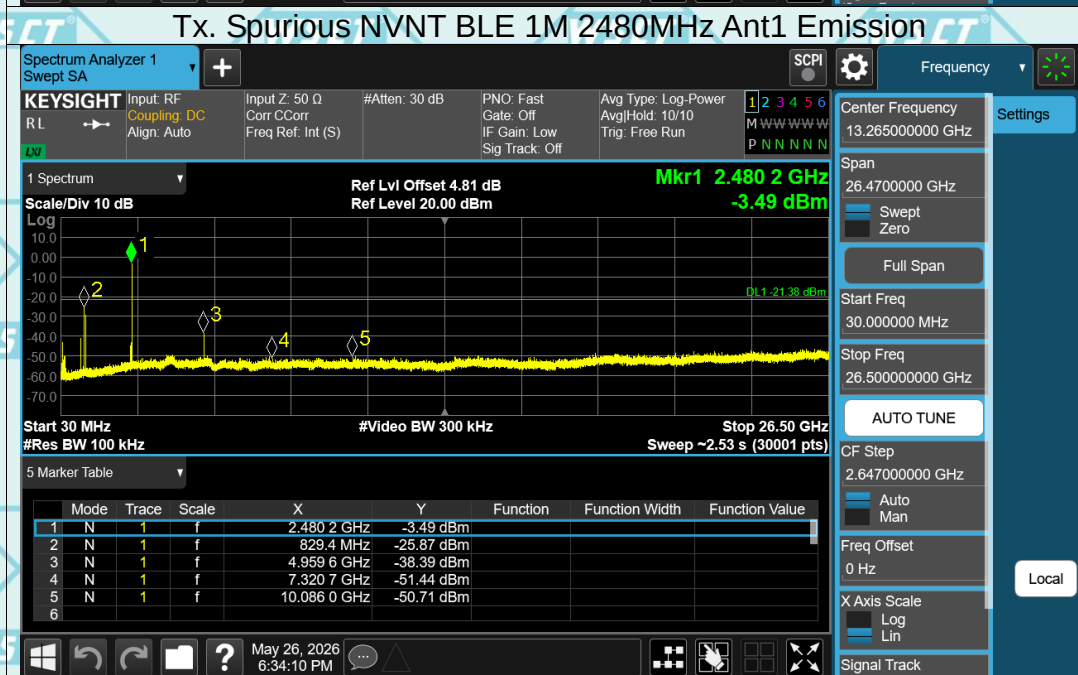
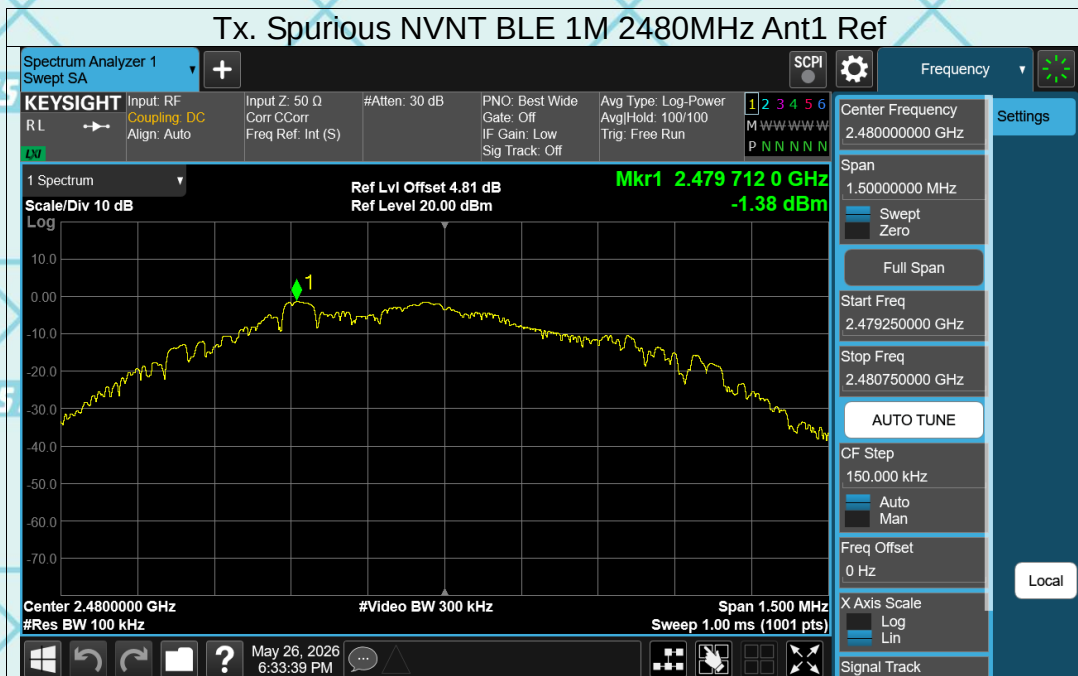


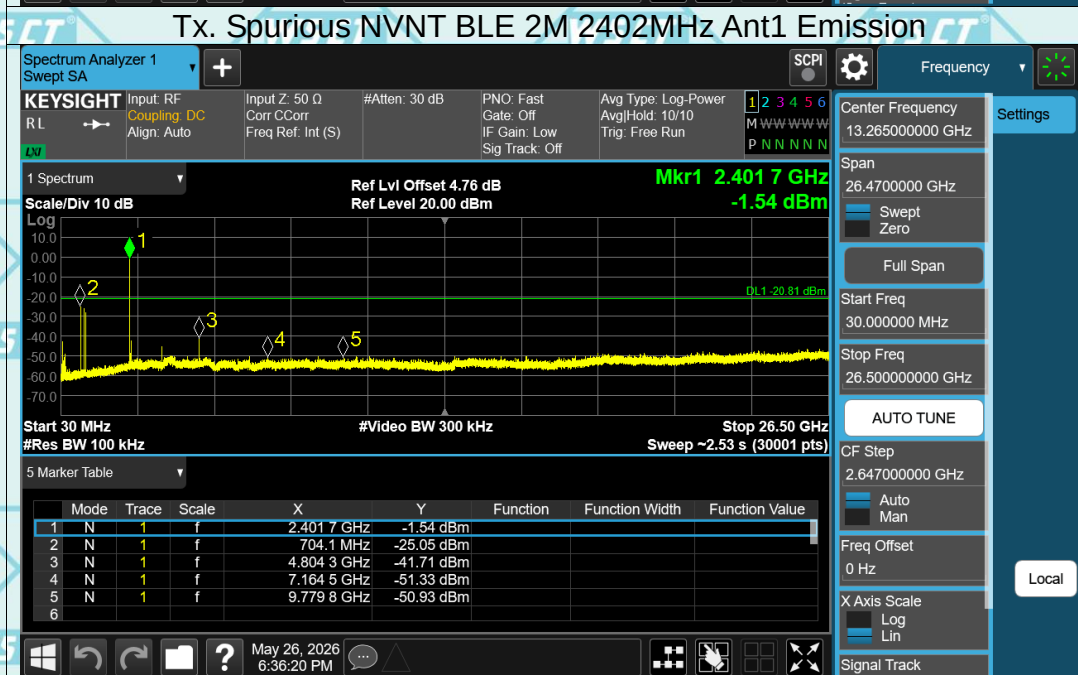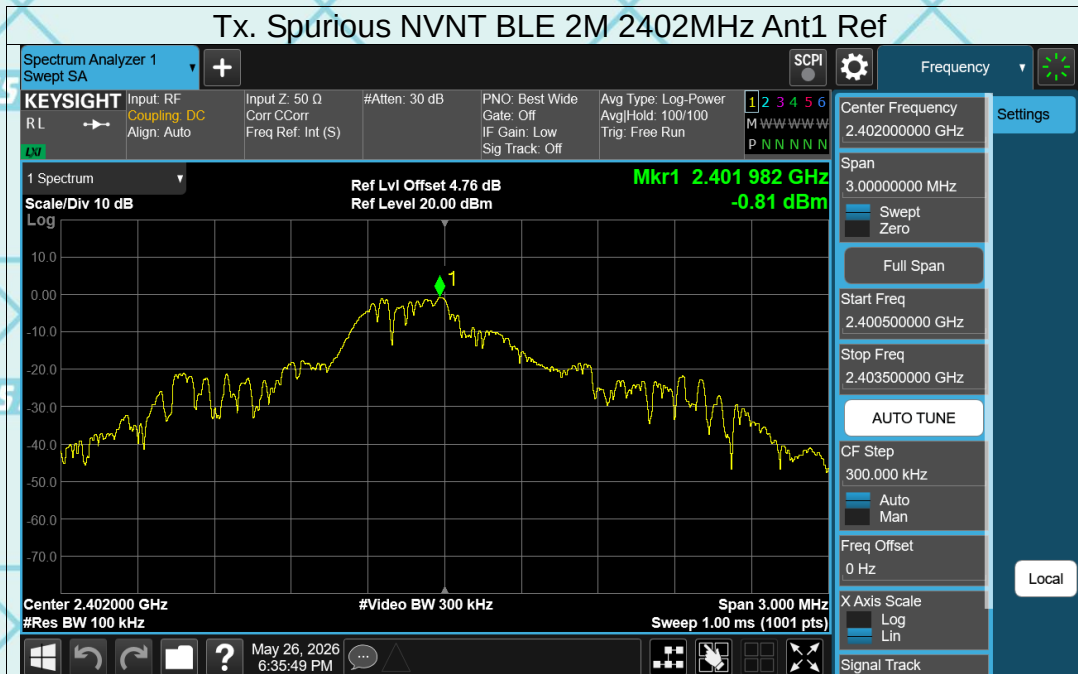



Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

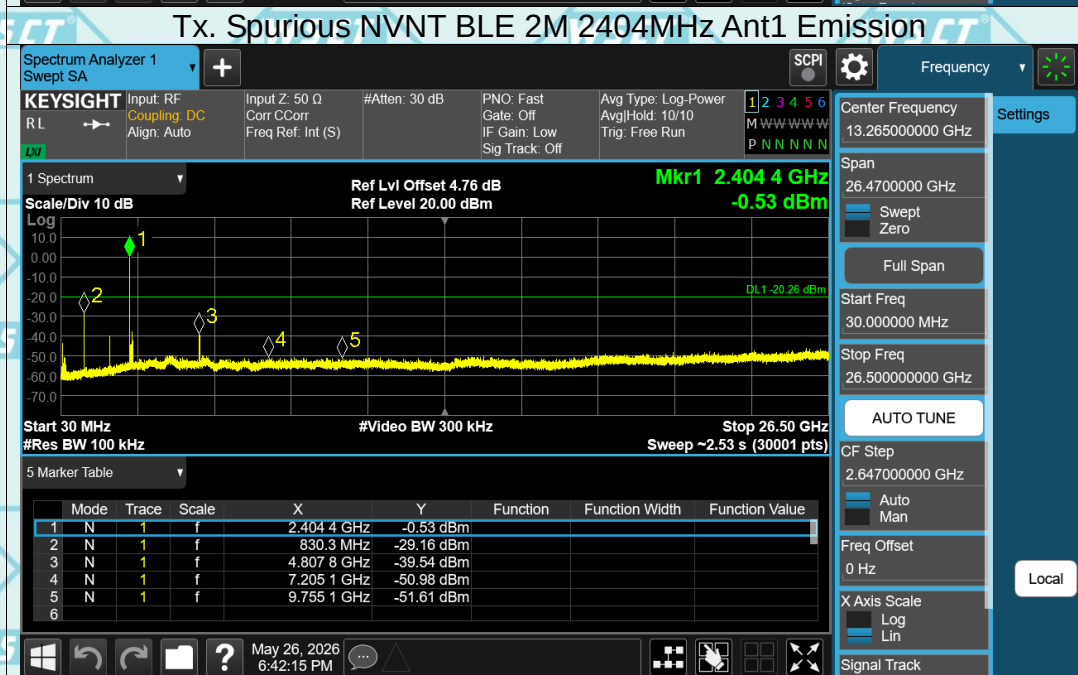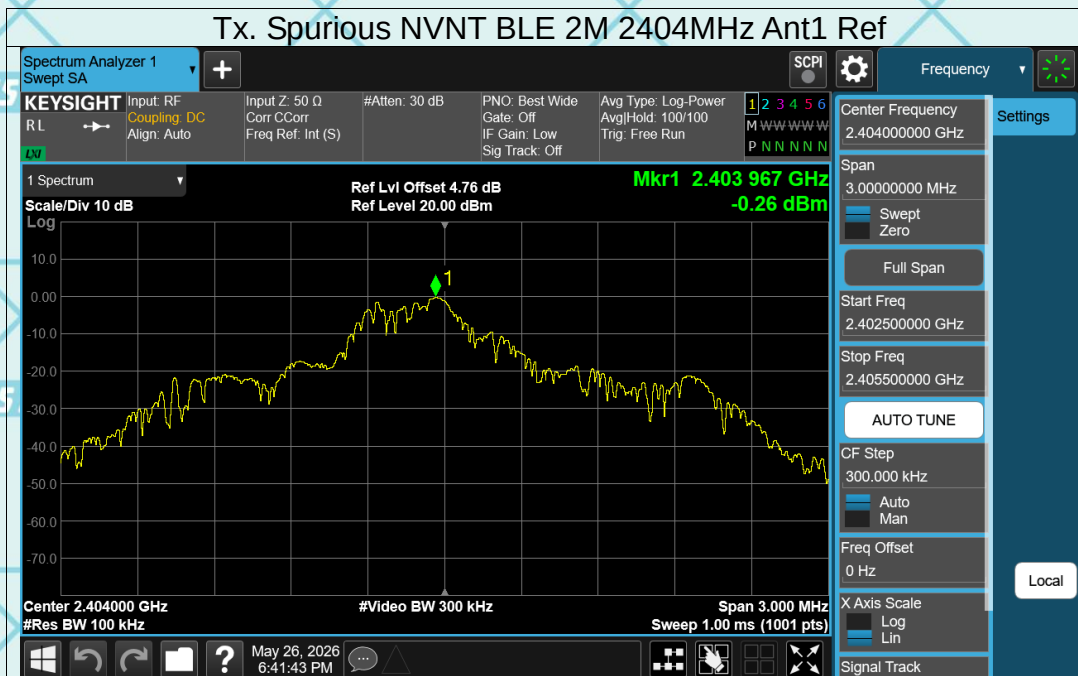



Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

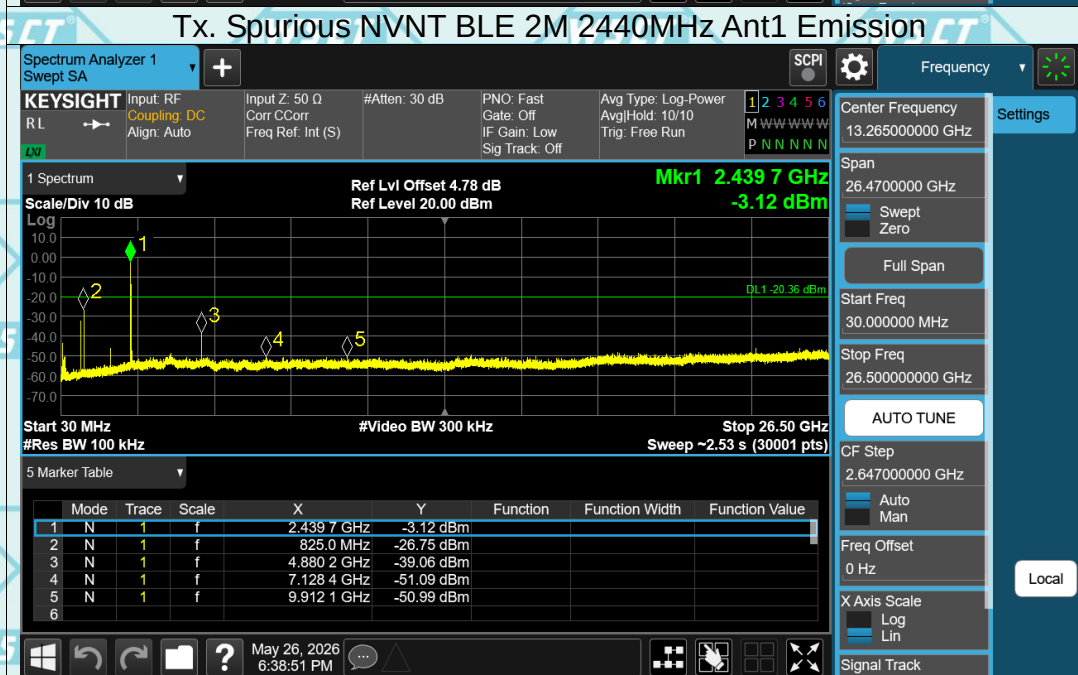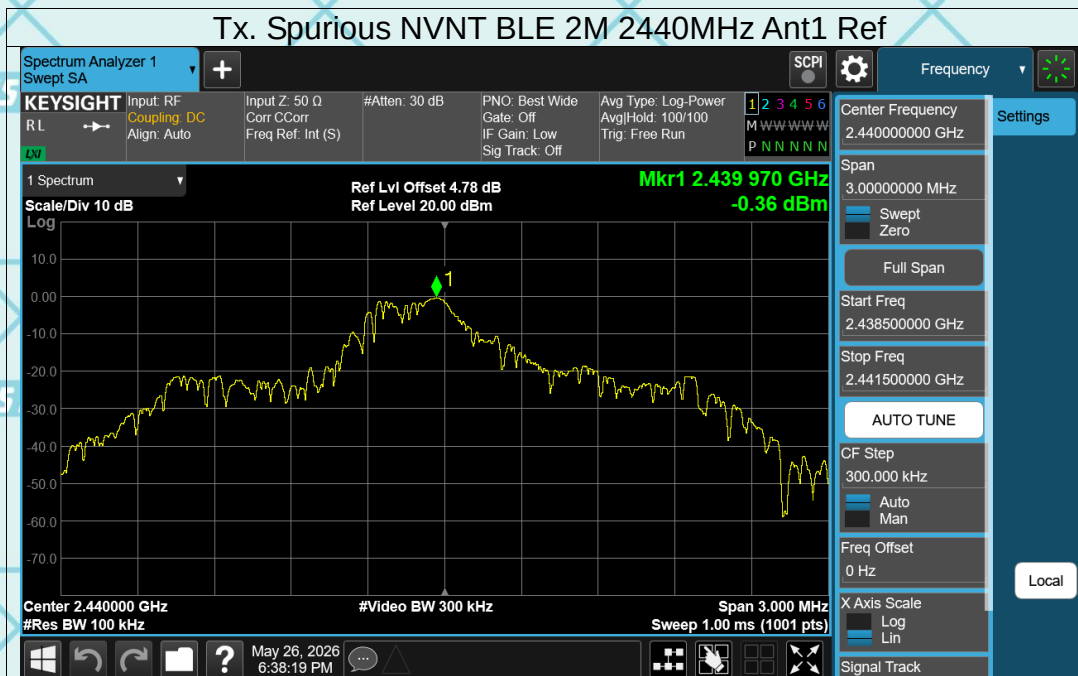

Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

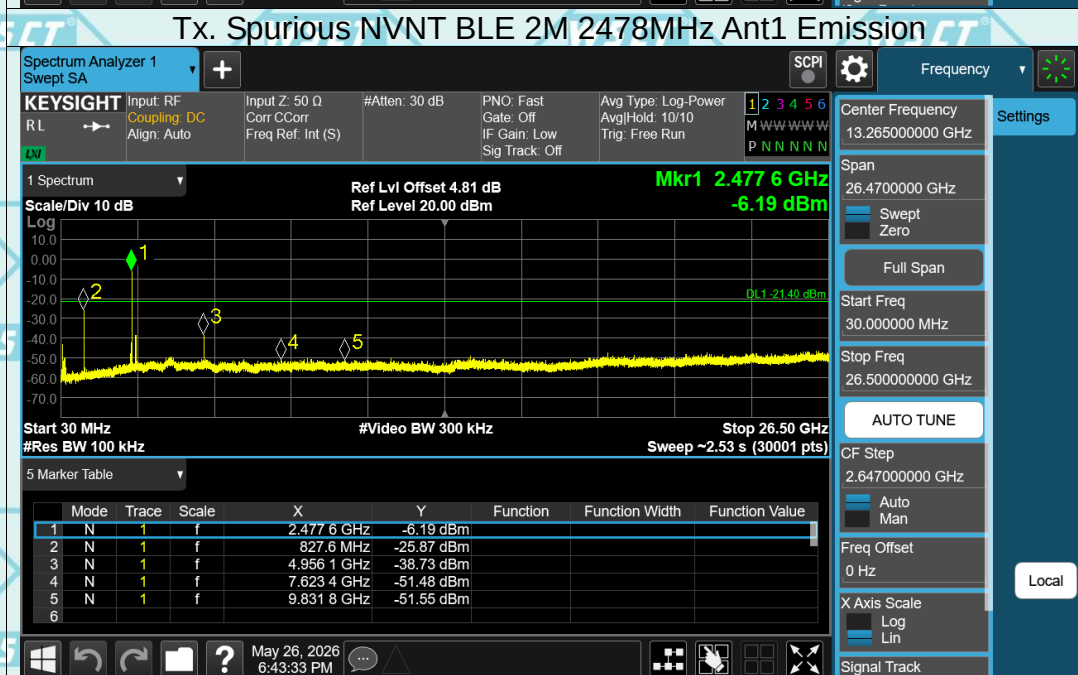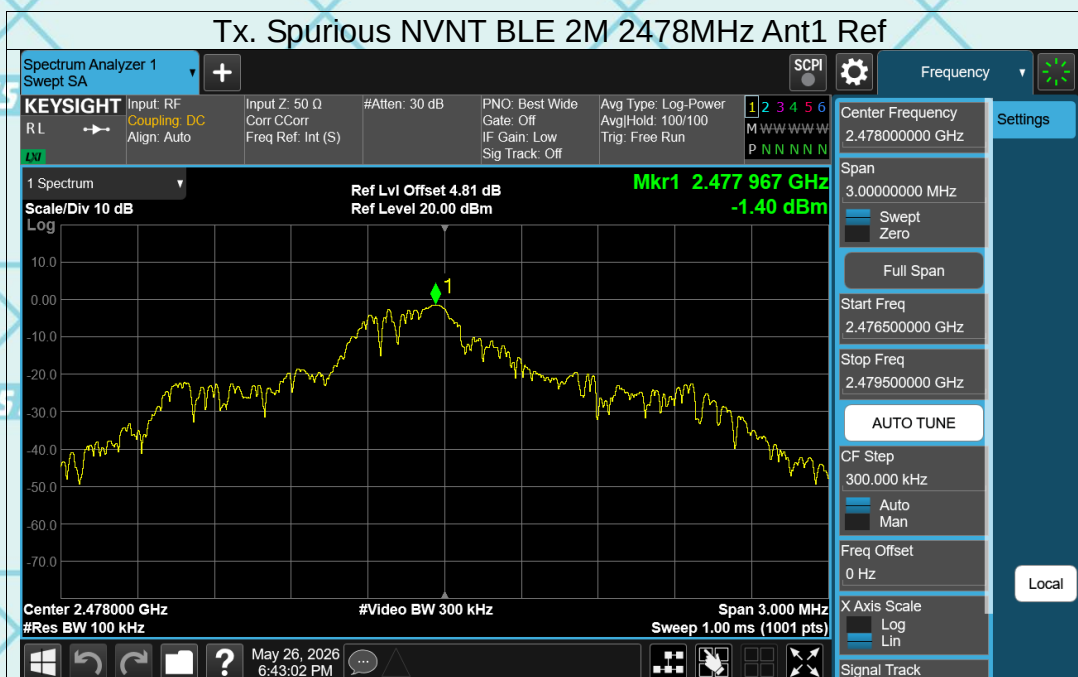



Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

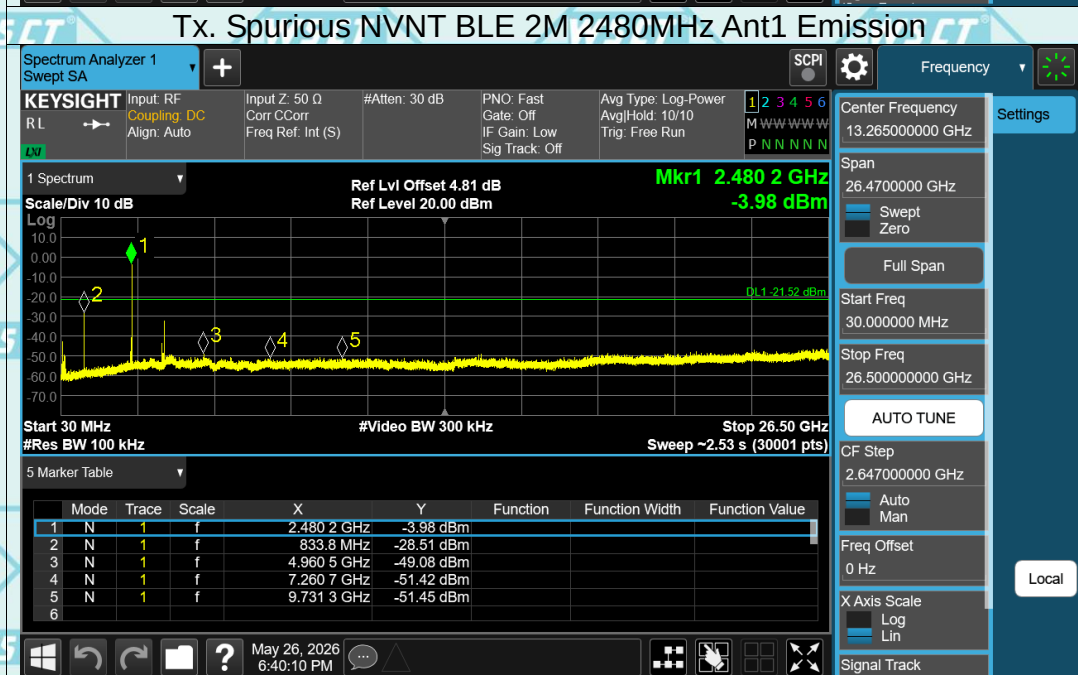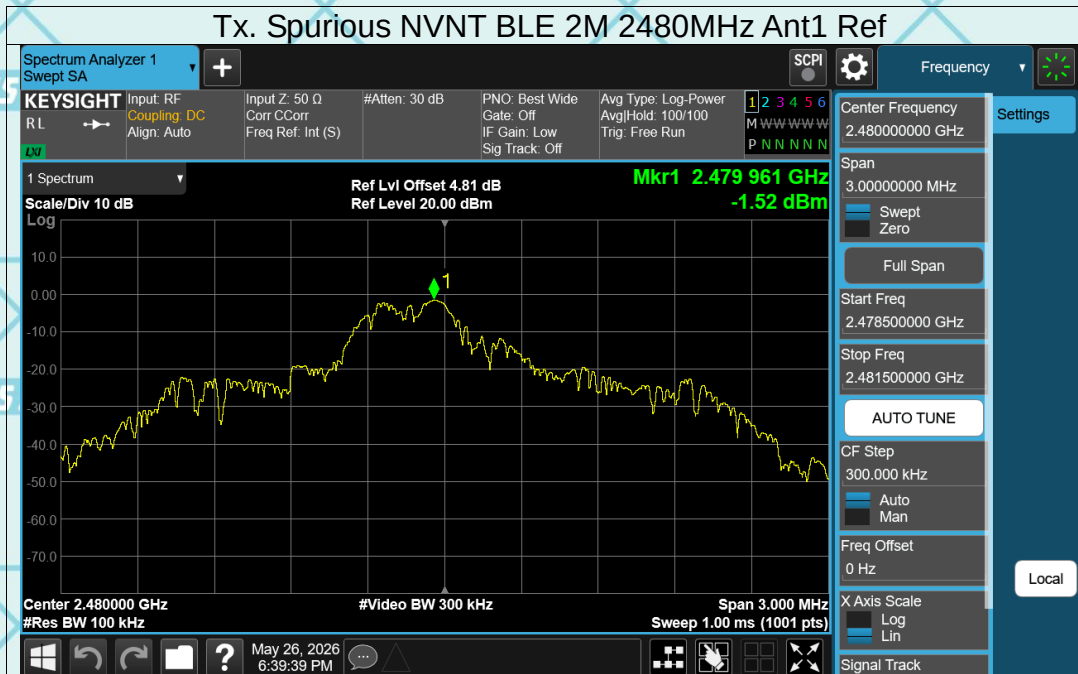


## 6.7. Radiated Spurious Emission Measurement

### 6.7.1. Test Specification
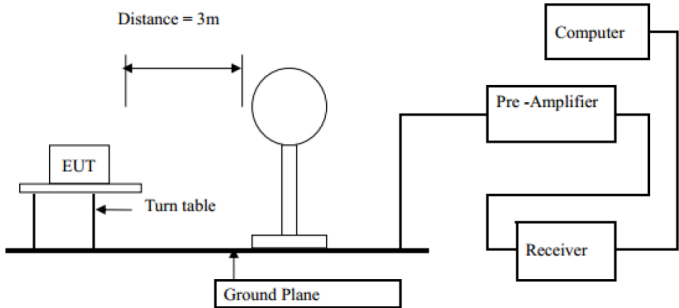
|                                                                                                                                                                                                                 |                             |                                   |                               |          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------------|-------------------------------|----------|
| <b>Test Requirement:</b>                                                                                                                                                                                        | FCC Part15 C Section 15.209 |                                   |                               |          |
| <b>Test Method:</b>                                                                                                                                                                                             | ANSI C63.10:2020            |                                   |                               |          |
| <b>Frequency Range:</b>                                                                                                                                                                                         | 9 kHz to 25 GHz             |                                   |                               |          |
| <b>Measurement Distance:</b>                                                                                                                                                                                    | 3 m                         |                                   |                               |          |
| <b>Antenna Polarization:</b>                                                                                                                                                                                    | Horizontal & Vertical       |                                   |                               |          |
| <b>Operation mode:</b>                                                                                                                                                                                          | Refer to item 4.1           |                                   |                               |          |
| <b>Receiver Setup:</b>                                                                                                                                                                                          | Frequency                   | Detector                          | RBW                           | VBW      |
|                                                                                                                                                                                                                 | 9kHz- 150kHz                | Quasi-peak                        | 200Hz                         | 1kHz     |
|                                                                                                                                                                                                                 | 150kHz- 30MHz               | Quasi-peak                        | 9kHz                          | 30kHz    |
|                                                                                                                                                                                                                 | 30MHz-1GHz                  | Quasi-peak                        | 100KHz                        | 300KHz   |
|                                                                                                                                                                                                                 | Above 1GHz                  | Peak                              | 1MHz                          | 3MHz     |
| <b>Limit:</b>                                                                                                                                                                                                   |                             |                                   |                               | Remark   |
|                                                                                                                                                                                                                 | 9kHz- 150kHz                | Quasi-peak                        | 200Hz                         | 1kHz     |
|                                                                                                                                                                                                                 | 150kHz- 30MHz               | Quasi-peak                        | 9kHz                          | 30kHz    |
|                                                                                                                                                                                                                 | 30MHz-1GHz                  | Quasi-peak                        | 100KHz                        | 300KHz   |
|                                                                                                                                                                                                                 | Above 1GHz                  | Peak                              | 1MHz                          | 3MHz     |
| <b>Test setup:</b>                                                                                                                                                                                              | Frequency                   | Field Strength (microvolts/meter) | Measurement Distance (meters) |          |
|                                                                                                                                                                                                                 | 0.009-0.490                 | 2400/F(KHz)                       | 300                           |          |
|                                                                                                                                                                                                                 | 0.490-1.705                 | 24000/F(KHz)                      | 30                            |          |
|                                                                                                                                                                                                                 | 1.705-30                    | 30                                | 30                            |          |
|                                                                                                                                                                                                                 | 30-88                       | 100                               | 3                             |          |
| <b>Test setup:</b>                                                                                                                                                                                              | 88-216                      | 150                               | 3                             |          |
|                                                                                                                                                                                                                 | 216-960                     | 200                               | 3                             |          |
|                                                                                                                                                                                                                 | Above 960                   | 500                               | 3                             |          |
|                                                                                                                                                                                                                 | Frequency                   | Field Strength (microvolts/meter) | Measurement Distance (meters) | Detector |
|                                                                                                                                                                                                                 | Above 1GHz                  | 500                               | 3                             | Average  |
|                                                                                                                                                                                                                 |                             | 5000                              | 3                             | Peak     |
| For radiated emissions below 30MHz                                                                                                                                                                              |                             |                                   |                               |          |
|  <p>Distance = 3m</p> <p>EUT</p> <p>Turn table</p> <p>Ground Plane</p> <p>Computer</p> <p>Pre-Amplifier</p> <p>Receiver</p> |                             |                                   |                               |          |
| 30MHz to 1GHz                                                                                                                                                                                                   |                             |                                   |                               |          |

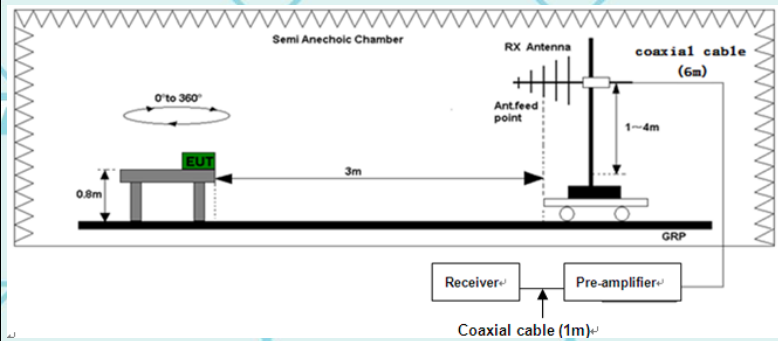

Above 1GHz

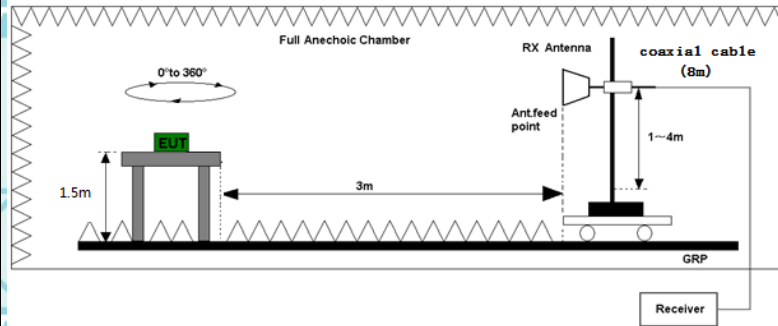

### Test Procedure:

- For the radiated emission test below 1GHz:  
The EUT was placed on a turntable with 0.1 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.  
For the radiated emission test above 1GHz:  
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- Corrected Reading: Antenna Factor + Cable Loss +

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                      | <p>Read Level - Preamplifier Factor = Level</p> <p>3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>4. Use the following spectrum analyzer settings:</p> <p>(1) Span shall wide enough to fully capture the emission being measured;</p> <p>(2) Set RBW=100 kHz for <math>f &lt; 1</math> GHz; VBW <math>\geq</math> RBW; Sweep = auto; Detector function = peak; Trace = max hold;</p> <p>(3) Set RBW = 1 MHz, VBW= 3MHz for <math>f \geq 1</math> GHz for peak measurement.</p> <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW <math>\geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p> |
| <b>Test mode:</b>    | Refer to section 4.1 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Test results:</b> | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

## 6.7.2. Test Data

Please refer to following diagram for individual  
Below 1GHz

Horizontal:



| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 50.3700      | 29.00                    | -7.51                   | 21.49                      | 40.00           | -18.51     | QP       |
| 2   |     | 160.9500     | 25.51                    | -6.68                   | 18.83                      | 43.50           | -24.67     | QP       |
| 3   |     | 416.0600     | 25.56                    | -3.08                   | 22.48                      | 46.00           | -23.52     | QP       |
| 4   |     | 583.8700     | 25.63                    | 0.77                    | 26.40                      | 46.00           | -19.60     | QP       |
| 5   |     | 697.3600     | 25.63                    | 3.14                    | 28.77                      | 46.00           | -17.23     | QP       |
| 6   | *   | 874.8700     | 25.29                    | 6.36                    | 31.65                      | 46.00           | -14.35     | QP       |

Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

Vertical:



| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 38.7300      | 46.17                    | -20.52                  | 25.65                      | 40.00           | -14.35     | QP       |
| 2   |     | 97.9000      | 47.61                    | -20.21                  | 27.40                      | 43.50           | -16.10     | QP       |
| 3   |     | 330.7000     | 39.29                    | -19.11                  | 20.18                      | 46.00           | -25.82     | QP       |
| 4   |     | 615.8800     | 45.26                    | -17.64                  | 27.62                      | 46.00           | -18.38     | QP       |
| 5   |     | 762.3500     | 47.99                    | -16.86                  | 31.13                      | 46.00           | -14.87     | QP       |
| 6   |     | 926.2800     | 47.29                    | -15.79                  | 31.50                      | 46.00           | -14.50     | QP       |

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

### Above 1GHz


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

Note 3 BLE 1M and 2M both tested the report and only recorded the worst-case scenario 1M:

Low channel: 2402MHz

Horizontal:

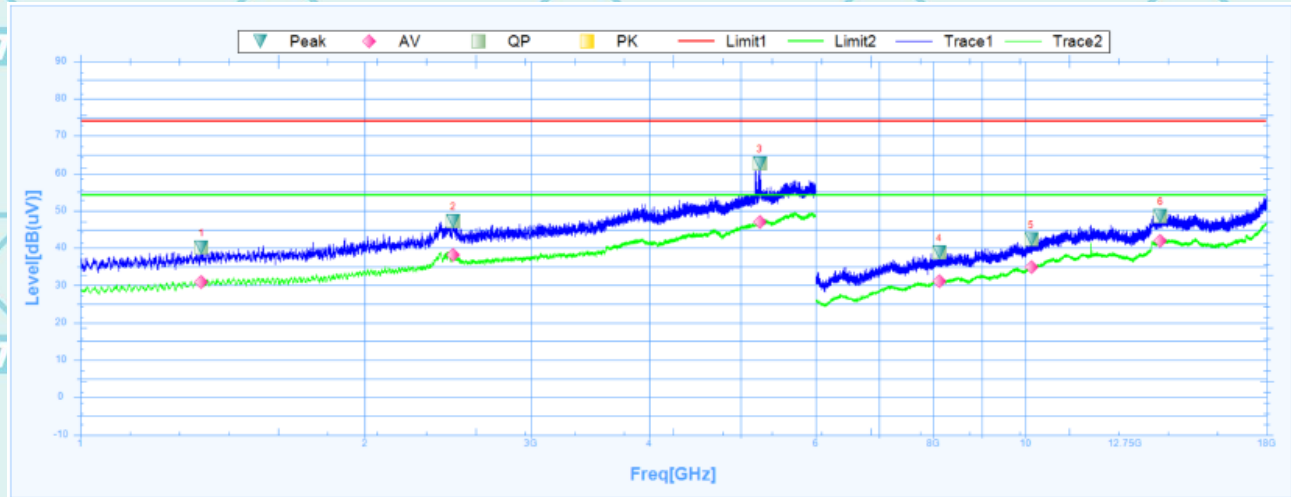


Susputed Data List

| NO. | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity   | Trace | Verdict |
|-----|-------------|----------------|-------------|------------------|------------|-------------|---------|------------|-------|---------|
| 1   | 1343.7500   | 40.11          | 24.9        | 15.21            | 74         | -33.89      | 20.2    | Horizontal | PK    | Pass    |
| 1   | 1343.7500   | 30.92          | 24.9        | 6.02             | 54         | -23.08      | 20.2    | Horizontal | AV    | Pass    |
| 2   | 2481.2500   | 47.21          | 27.54       | 19.67            | 74         | -26.79      | 161.3   | Horizontal | PK    | Pass    |
| 2   | 2481.2500   | 38.13          | 27.54       | 10.59            | 54         | -15.87      | 161.3   | Horizontal | AV    | Pass    |
| 3   | 5238.1250   | 62.78          | 31.79       | 30.99            | 74         | -11.22      | 256.9   | Horizontal | PK    | Pass    |
| 3   | 5238.1250   | 47.05          | 31.79       | 15.26            | 54         | -6.95       | 256.9   | Horizontal | AV    | Pass    |
| 4   | 8112.0000   | 38.78          | 8.51        | 30.27            | 74         | -35.22      | 360.1   | Horizontal | PK    | Pass    |
| 4   | 8112.0000   | 31.01          | 8.51        | 22.5             | 54         | -22.99      | 360.1   | Horizontal | AV    | Pass    |
| 5   | 10149.0000  | 42.38          | 12.81       | 29.57            | 74         | -31.62      | 332.9   | Horizontal | PK    | Pass    |
| 5   | 10149.0000  | 34.79          | 12.81       | 21.98            | 54         | -19.21      | 332.9   | Horizontal | AV    | Pass    |
| 6   | 13902.0000  | 48.64          | 18.84       | 29.8             | 74         | -25.36      | 279     | Horizontal | PK    | Pass    |
| 6   | 13902.0000  | 41.82          | 18.84       | 22.98            | 54         | -12.18      | 279     | Horizontal | AV    | Pass    |

Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

Vertical:

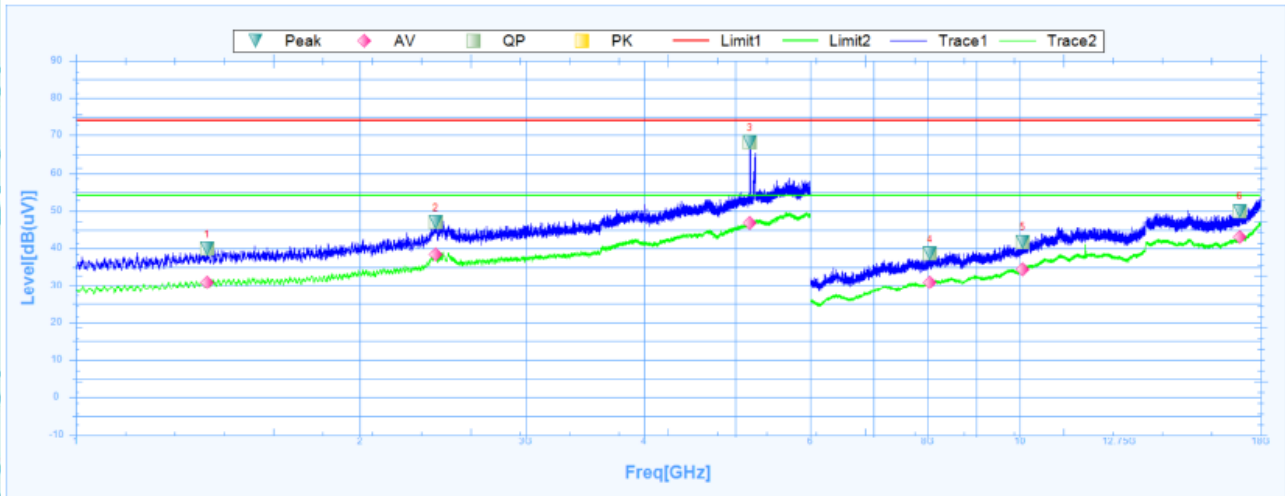


Susputed Data List

| NO. | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity | Trace | Verdict |
|-----|-------------|----------------|-------------|------------------|------------|-------------|---------|----------|-------|---------|
| 1   | 1376.8750   | 40.02          | 25.02       | 15               | 74         | -33.98      | 94.2    | Vertical | PK    | Pass    |
| 1   | 1376.8750   | 30.79          | 25.02       | 5.77             | 54         | -23.21      | 94.2    | Vertical | AV    | Pass    |
| 2   | 2407.5000   | 47.04          | 27.29       | 19.75            | 74         | -26.96      | 22.5    | Vertical | PK    | Pass    |
| 2   | 2407.5000   | 38.48          | 27.29       | 11.19            | 54         | -15.52      | 22.5    | Vertical | AV    | Pass    |
| 3   | 5181.8750   | 68.28          | 31.75       | 36.53            | 74         | -5.72       | 177.8   | Vertical | PK    | Pass    |
| 3   | 5181.8750   | 46.75          | 31.75       | 15               | 54         | -7.25       | 177.8   | Vertical | AV    | Pass    |
| 4   | 8038.5000   | 38.66          | 8.36        | 30.3             | 74         | -35.34      | 237.3   | Vertical | PK    | Pass    |
| 4   | 8038.5000   | 30.82          | 8.36        | 22.46            | 54         | -23.18      | 237.3   | Vertical | AV    | Pass    |
| 5   | 10078.5000  | 41.81          | 12.59       | 29.22            | 74         | -32.19      | 360.1   | Vertical | PK    | Pass    |
| 5   | 10078.5000  | 34.4           | 12.59       | 21.81            | 54         | -19.6       | 360.1   | Vertical | AV    | Pass    |
| 6   | 17106.0000  | 49.97          | 19.99       | 29.98            | 74         | -24.03      | 158.3   | Vertical | PK    | Pass    |
| 6   | 17106.0000  | 42.92          | 19.99       | 22.93            | 54         | -11.08      | 158.3   | Vertical | AV    | Pass    |

Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

Middle channel: 2440MHz  
Horizontal:

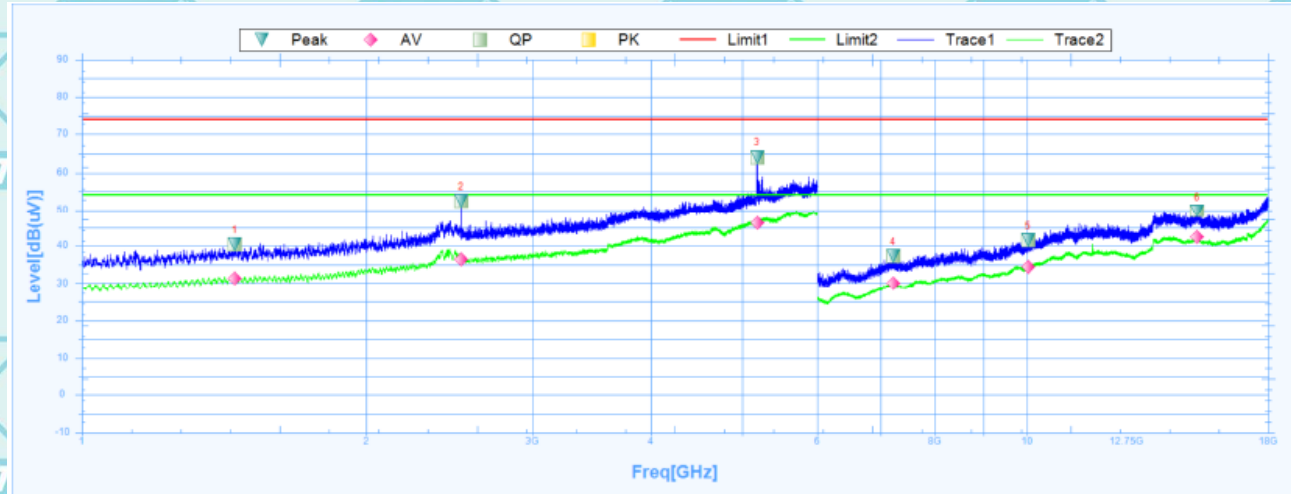


Susputed Data List

| NO. | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity   | Trace | Verdict |
|-----|-------------|----------------|-------------|------------------|------------|-------------|---------|------------|-------|---------|
| 1   | 1451.2500   | 40.31          | 25.05       | 15.26            | 74         | -33.69      | 355.9   | Horizontal | PK    | Pass    |
| 1   | 1451.2500   | 31.27          | 25.05       | 6.22             | 54         | -22.73      | 355.9   | Horizontal | AV    | Pass    |
| 2   | 2520.0000   | 52.49          | 27.62       | 24.87            | 74         | -21.51      | 98.9    | Horizontal | PK    | Pass    |
| 2   | 2520.0000   | 36.42          | 27.62       | 8.8              | 54         | -17.58      | 98.9    | Horizontal | AV    | Pass    |
| 3   | 5185.0000   | 64.11          | 31.75       | 32.36            | 74         | -9.89       | 59.4    | Horizontal | PK    | Pass    |
| 3   | 5185.0000   | 46.04          | 31.75       | 14.29            | 54         | -7.96       | 59.4    | Horizontal | AV    | Pass    |
| 4   | 7216.5000   | 37.35          | 6.98        | 30.37            | 74         | -36.65      | 166.7   | Horizontal | PK    | Pass    |
| 4   | 7216.5000   | 29.89          | 6.98        | 22.91            | 54         | -24.11      | 166.7   | Horizontal | AV    | Pass    |
| 5   | 10029.0000  | 41.46          | 12.43       | 29.03            | 74         | -32.54      | 123.7   | Horizontal | PK    | Pass    |
| 5   | 10029.0000  | 34.43          | 12.43       | 22               | 54         | -19.57      | 123.7   | Horizontal | AV    | Pass    |
| 6   | 15145.5000  | 49.66          | 19.56       | 30.1             | 74         | -24.34      | 142.8   | Horizontal | PK    | Pass    |
| 6   | 15145.5000  | 42.26          | 19.56       | 22.7             | 54         | -11.74      | 142.8   | Horizontal | AV    | Pass    |

Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026


Vertical:

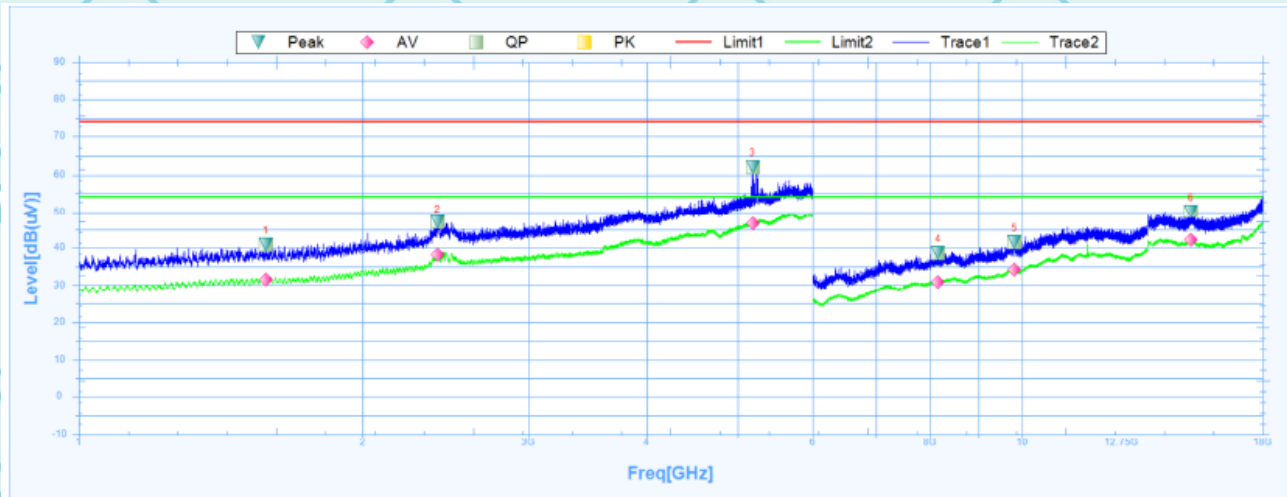

| Suspected Data List |             |                |             |                  |            |             |         |          |       |         |  |
|---------------------|-------------|----------------|-------------|------------------|------------|-------------|---------|----------|-------|---------|--|
| NO.                 | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity | Trace | Verdict |  |
| 1                   | 1579.3750   | 40.83          | 24.92       | 15.91            | 74         | -33.17      | 318.9   | Vertical | PK    | Pass    |  |
| 1                   | 1579.3750   | 31.6           | 24.92       | 6.68             | 54         | -22.4       | 318.9   | Vertical | AV    | Pass    |  |
| 2                   | 2400.6250   | 46.9           | 27.26       | 19.64            | 74         | -27.1       | 48.6    | Vertical | PK    | Pass    |  |
| 2                   | 2400.6250   | 38.2           | 27.26       | 10.94            | 54         | -15.8       | 48.6    | Vertical | AV    | Pass    |  |
| 3                   | 5183.1250   | 62.05          | 31.75       | 30.3             | 74         | -11.95      | 3.5     | Vertical | PK    | Pass    |  |
| 3                   | 5183.1250   | 46.46          | 31.75       | 14.71            | 54         | -7.54       | 3.5     | Vertical | AV    | Pass    |  |
| 4                   | 8151.0000   | 38.52          | 8.62        | 29.9             | 74         | -35.48      | 360.1   | Vertical | PK    | Pass    |  |
| 4                   | 8151.0000   | 30.85          | 8.62        | 22.23            | 54         | -23.15      | 360.1   | Vertical | AV    | Pass    |  |
| 5                   | 9823.5000   | 41.53          | 11.96       | 29.57            | 74         | -32.47      | 251.6   | Vertical | PK    | Pass    |  |
| 5                   | 9823.5000   | 34.14          | 11.96       | 22.18            | 54         | -19.86      | 251.6   | Vertical | AV    | Pass    |  |
| 6                   | 15114.0000  | 50.1           | 19.72       | 30.38            | 74         | -23.9       | 360.1   | Vertical | PK    | Pass    |  |
| 6                   | 15114.0000  | 42.07          | 19.72       | 22.35            | 54         | -11.93      | 360.1   | Vertical | AV    | Pass    |  |

Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026


High channel: 2480MHz  
Horizontal:

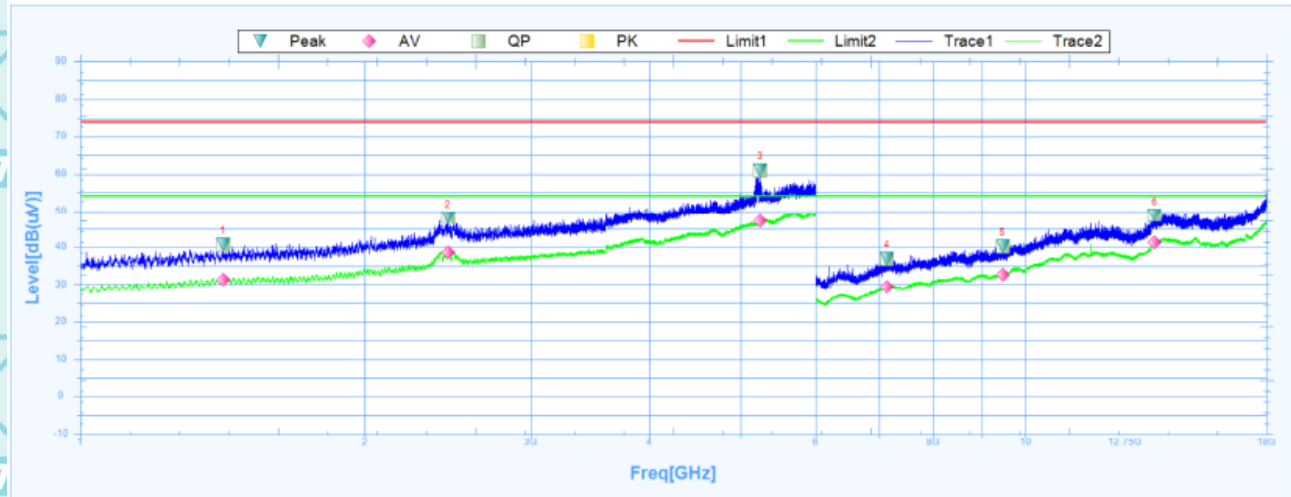

| Suspected Data List |             |                |             |                  |            |             |         |            |       |         |
|---------------------|-------------|----------------|-------------|------------------|------------|-------------|---------|------------|-------|---------|
| NO.                 | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity   | Trace | Verdict |
| 1                   | 1416.2500   | 40.54          | 25.08       | 15.46            | 74         | -33.46      | 2.5     | Horizontal | PK    | Pass    |
| 1                   | 1416.2500   | 31.36          | 25.08       | 6.28             | 54         | -22.64      | 2.5     | Horizontal | AV    | Pass    |
| 2                   | 2449.3750   | 48.07          | 27.43       | 20.64            | 74         | -25.93      | 201.8   | Horizontal | PK    | Pass    |
| 2                   | 2449.3750   | 38.6           | 27.43       | 11.17            | 54         | -15.4       | 201.8   | Horizontal | AV    | Pass    |
| 3                   | 5243.1250   | 60.92          | 31.79       | 29.13            | 74         | -13.08      | 78.6    | Horizontal | PK    | Pass    |
| 3                   | 5243.1250   | 47.11          | 31.79       | 15.32            | 54         | -6.89       | 78.6    | Horizontal | AV    | Pass    |
| 4                   | 7140.0000   | 36.81          | 6.91        | 29.9             | 74         | -37.19      | 93.8    | Horizontal | PK    | Pass    |
| 4                   | 7140.0000   | 29.23          | 6.91        | 22.32            | 54         | -24.77      | 93.8    | Horizontal | AV    | Pass    |
| 5                   | 9460.5000   | 40.15          | 11.05       | 29.1             | 74         | -33.85      | 81.8    | Horizontal | PK    | Pass    |
| 5                   | 9460.5000   | 32.72          | 11.05       | 21.67            | 54         | -21.28      | 81.8    | Horizontal | AV    | Pass    |
| 6                   | 13705.5000  | 48.73          | 18.27       | 30.46            | 74         | -25.27      | 7       | Horizontal | PK    | Pass    |
| 6                   | 13705.5000  | 41.21          | 18.27       | 22.94            | 54         | -12.79      | 7       | Horizontal | AV    | Pass    |

Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026

Vertical:

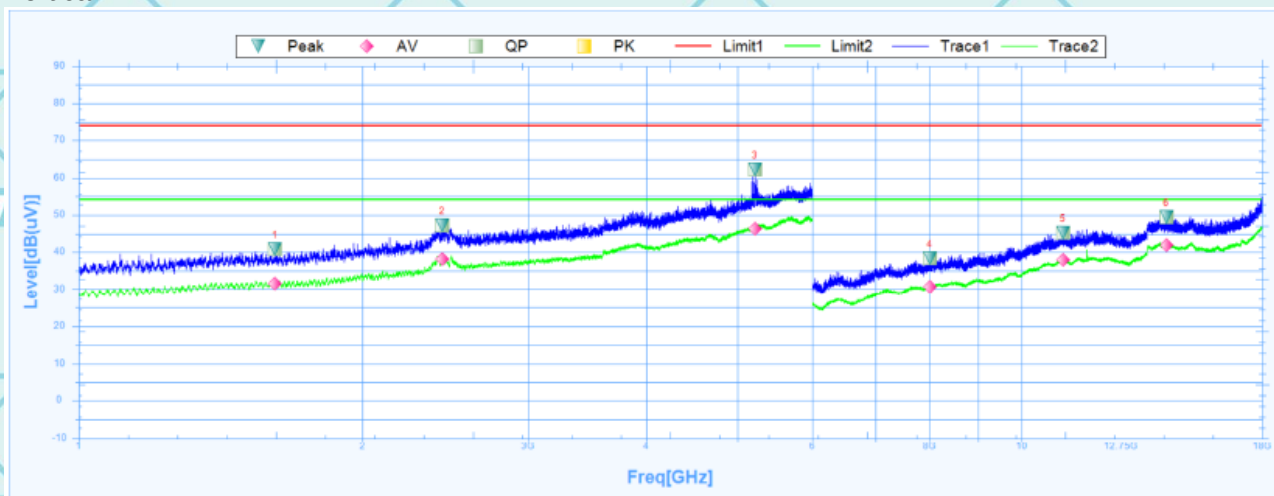

| Suspected Data List |             |                |             |                  |            |             |         |          |       |         |
|---------------------|-------------|----------------|-------------|------------------|------------|-------------|---------|----------|-------|---------|
| NO.                 | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity | Trace | Verdict |
| 1                   | 1615.0000   | 40.81          | 24.91       | 15.9             | 74         | -33.19      | 226.8   | Vertical | PK    | Pass    |
| 1                   | 1615.0000   | 31.51          | 24.91       | 6.6              | 54         | -22.49      | 226.8   | Vertical | AV    | Pass    |
| 2                   | 2430.0000   | 47.18          | 27.36       | 19.82            | 74         | -26.82      | -0.1    | Vertical | PK    | Pass    |
| 2                   | 2430.0000   | 38.18          | 27.36       | 10.82            | 54         | -15.82      | -0.1    | Vertical | AV    | Pass    |
| 3                   | 5218.7500   | 62.14          | 31.78       | 30.36            | 74         | -11.86      | 359     | Vertical | PK    | Pass    |
| 3                   | 5218.7500   | 46.45          | 31.78       | 14.67            | 54         | -7.55       | 359     | Vertical | AV    | Pass    |
| 4                   | 7996.5000   | 38.3           | 8.27        | 30.03            | 74         | -35.7       | 358.5   | Vertical | PK    | Pass    |
| 4                   | 7996.5000   | 30.73          | 8.27        | 22.46            | 54         | -23.27      | 358.5   | Vertical | AV    | Pass    |
| 5                   | 11068.5000  | 45.2           | 15.84       | 29.36            | 74         | -28.8       | 360     | Vertical | PK    | Pass    |
| 5                   | 11068.5000  | 37.92          | 15.84       | 22.08            | 54         | -16.08      | 360     | Vertical | AV    | Pass    |
| 6                   | 14244.0000  | 49.45          | 18.87       | 30.58            | 74         | -24.55      | 192.9   | Vertical | PK    | Pass    |
| 6                   | 14244.0000  | 41.89          | 18.87       | 23.02            | 54         | -12.11      | 192.9   | Vertical | AV    | Pass    |

**Note:**

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level + Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)


Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

### 6.7.3. Restricted Bands Requirements


Test result for GFSK Mode (BLE 1M the worst case)

Low channel  
Horizontal:

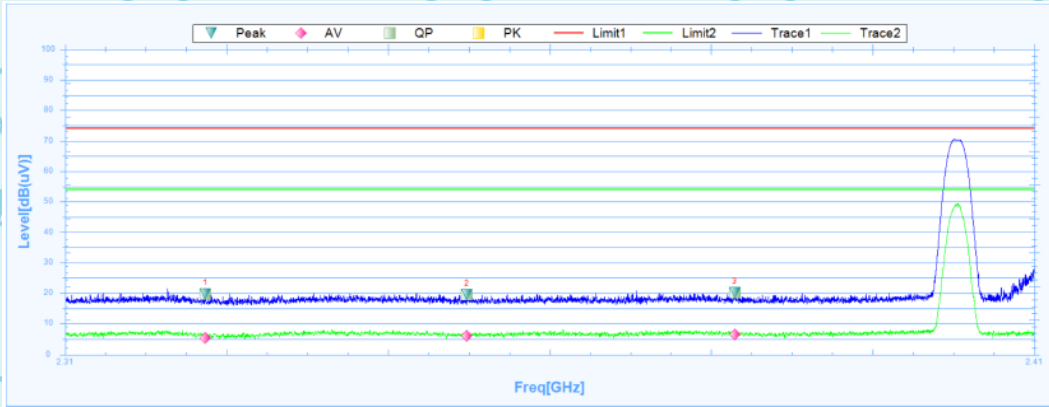

| Suspected Data List |             |                |             |                  |            |             |         |            |       |         |
|---------------------|-------------|----------------|-------------|------------------|------------|-------------|---------|------------|-------|---------|
| NO.                 | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity   | Trace | Verdict |
| 1                   | 2324.4875   | 19.72          | -9.49       | 29.21            | 74         | -54.28      | 59      | Horizontal | PK    | Pass    |
| 1                   | 2324.4875   | 5.32           | -9.49       | 14.81            | 54         | -48.68      | 59      | Horizontal | AV    | Pass    |
| 2                   | 2351.4625   | 19.51          | -9.37       | 28.88            | 74         | -54.49      | 243.2   | Horizontal | PK    | Pass    |
| 2                   | 2351.4625   | 5.88           | -9.37       | 15.25            | 54         | -48.12      | 243.2   | Horizontal | AV    | Pass    |
| 3                   | 2379.1000   | 20.13          | -9.23       | 29.36            | 74         | -53.87      | 114.1   | Horizontal | PK    | Pass    |
| 3                   | 2379.1000   | 6.48           | -9.23       | 15.71            | 54         | -47.52      | 114.1   | Horizontal | AV    | Pass    |

Vertical:

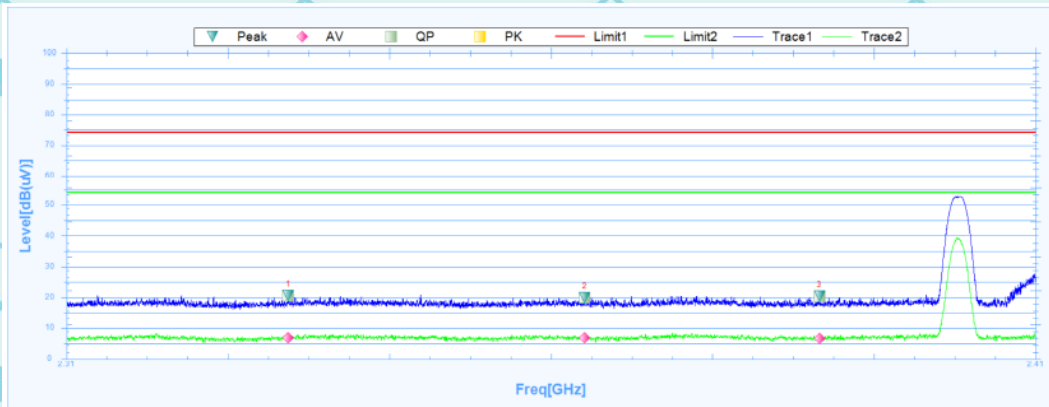


| Suspected Data List |             |                |             |                  |            |             |         |          |       |         |
|---------------------|-------------|----------------|-------------|------------------|------------|-------------|---------|----------|-------|---------|
| NO.                 | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity | Trace | Verdict |
| 1                   | 2332.8875   | 20.48          | -9.45       | 29.93            | 74         | -53.52      | 210.1   | Vertical | PK    | Pass    |
| 1                   | 2332.8875   | 6.85           | -9.45       | 16.3             | 54         | -47.15      | 210.1   | Vertical | AV    | Pass    |
| 2                   | 2363.4875   | 19.91          | -9.3        | 29.21            | 74         | -54.09      | 93      | Vertical | PK    | Pass    |
| 2                   | 2363.4875   | 6.78           | -9.3        | 16.08            | 54         | -47.22      | 93      | Vertical | AV    | Pass    |
| 3                   | 2387.7000   | 20.32          | -9.19       | 29.51            | 74         | -53.68      | 89.4    | Vertical | PK    | Pass    |
| 3                   | 2387.7000   | 6.64           | -9.19       | 15.83            | 54         | -47.36      | 89.4    | Vertical | AV    | Pass    |

Report No.: WSCT-ANAB-R&E260500042A-LE Issued Date: 29 May 2026


High channel

Horizontal:

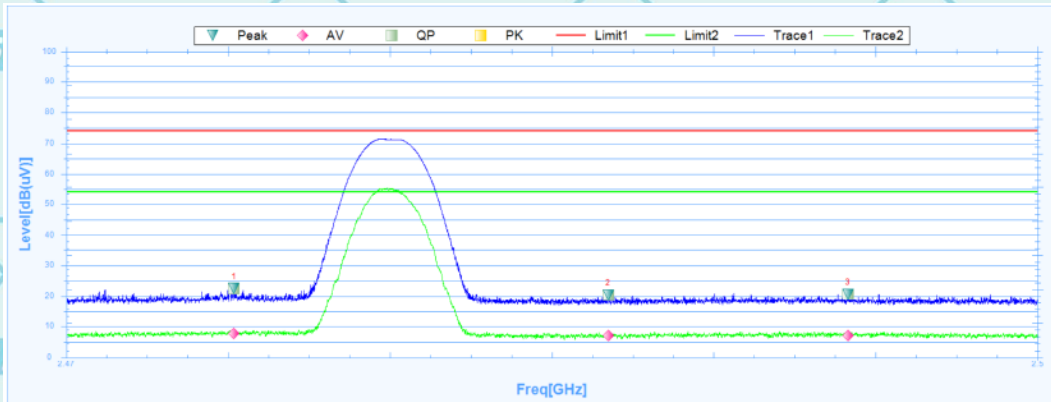

| Suspected Data List |             |                |             |                  |            |             |         |            |       |         |
|---------------------|-------------|----------------|-------------|------------------|------------|-------------|---------|------------|-------|---------|
| NO.                 | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity   | Trace | Verdict |
| 1                   | 2475.1788   | 22.51          | -8.66       | 31.17            | 74         | -51.49      | 25.2    | Horizontal | PK    | Pass    |
| 1                   | 2475.1788   | 7.66           | -8.66       | 16.32            | 54         | -46.34      | 25.2    | Horizontal | AV    | Pass    |
| 2                   | 2486.7400   | 20.44          | -8.6        | 29.04            | 74         | -53.56      | 137.5   | Horizontal | PK    | Pass    |
| 2                   | 2486.7400   | 7.03           | -8.6        | 15.63            | 54         | -46.97      | 137.5   | Horizontal | AV    | Pass    |
| 3                   | 2494.1500   | 20.66          | -8.55       | 29.21            | 74         | -53.34      | 359.9   | Horizontal | PK    | Pass    |
| 3                   | 2494.1500   | 7.03           | -8.55       | 15.58            | 54         | -46.97      | 359.9   | Horizontal | AV    | Pass    |

Vertical:

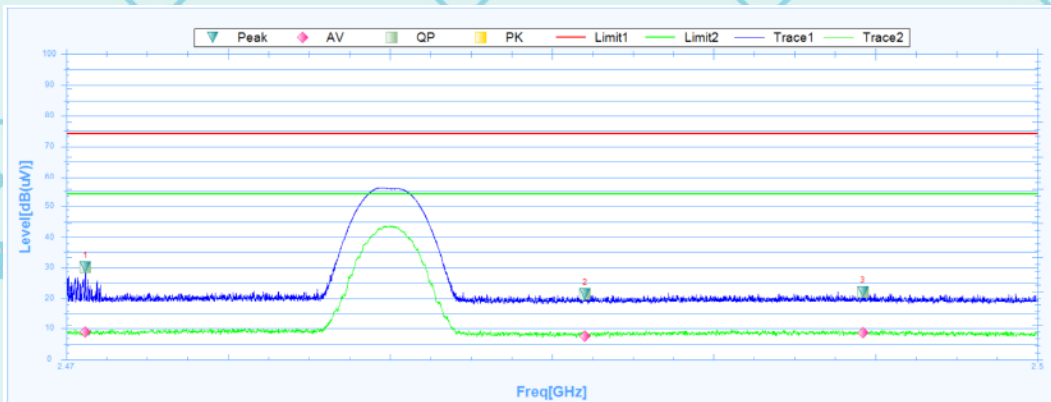

| Suspected Data List |             |                |             |                  |            |             |         |          |       |         |
|---------------------|-------------|----------------|-------------|------------------|------------|-------------|---------|----------|-------|---------|
| NO.                 | Freq. [MHz] | Level [dB(uV)] | Factor [dB] | Reading [dB(uV)] | Limit [dB] | Margin [dB] | Deg [°] | Polarity | Trace | Verdict |
| 1                   | 2470.5925   | 30.04          | -8.69       | 38.73            | 74         | -43.96      | 56.6    | Vertical | PK    | Pass    |
| 1                   | 2470.5925   | 8.88           | -8.69       | 17.57            | 54         | -45.12      | 56.6    | Vertical | AV    | Pass    |
| 2                   | 2486.0275   | 21.35          | -8.6        | 29.95            | 74         | -52.65      | 4.2     | Vertical | PK    | Pass    |
| 2                   | 2486.0275   | 7.58           | -8.6        | 16.18            | 54         | -46.42      | 4.2     | Vertical | AV    | Pass    |
| 3                   | 2494.6075   | 22.11          | -8.54       | 30.65            | 74         | -51.89      | 238.2   | Vertical | PK    | Pass    |
| 3                   | 2494.6075   | 8.55           | -8.54       | 17.09            | 54         | -45.45      | 238.2   | Vertical | AV    | Pass    |

Note: Freq. = Emission frequency in MHz

Reading level (dB(uV)) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dB(uV)) = Reading level (dB(uV)) + Corr. Factor (dB)

Limit (dB(uV)) = Limit stated in standard

Margin (dB) = Level (dB(uV)) - Limits (dB(uV))

## 7. Test Setup Photographs

Please refer to Annex "Test Setup photos-15C" for test setup photos

**\*\*\*\*\*END OF REPORT\*\*\*\*\***