

Meas.1 Body Plane with Right Edge 0mm on 0 Channel in Bluetooth mode with Ant.0

Date: 2026.02.01

Communication System Band: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.738

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.707$ S/m; $\epsilon_r = 39.977$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.71, 7.71, 7.71); Calibrated: 2025.11.11;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch0/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.254 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.1380 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 42.9%

Maximum value of SAR (measured) = 0.637 W/kg

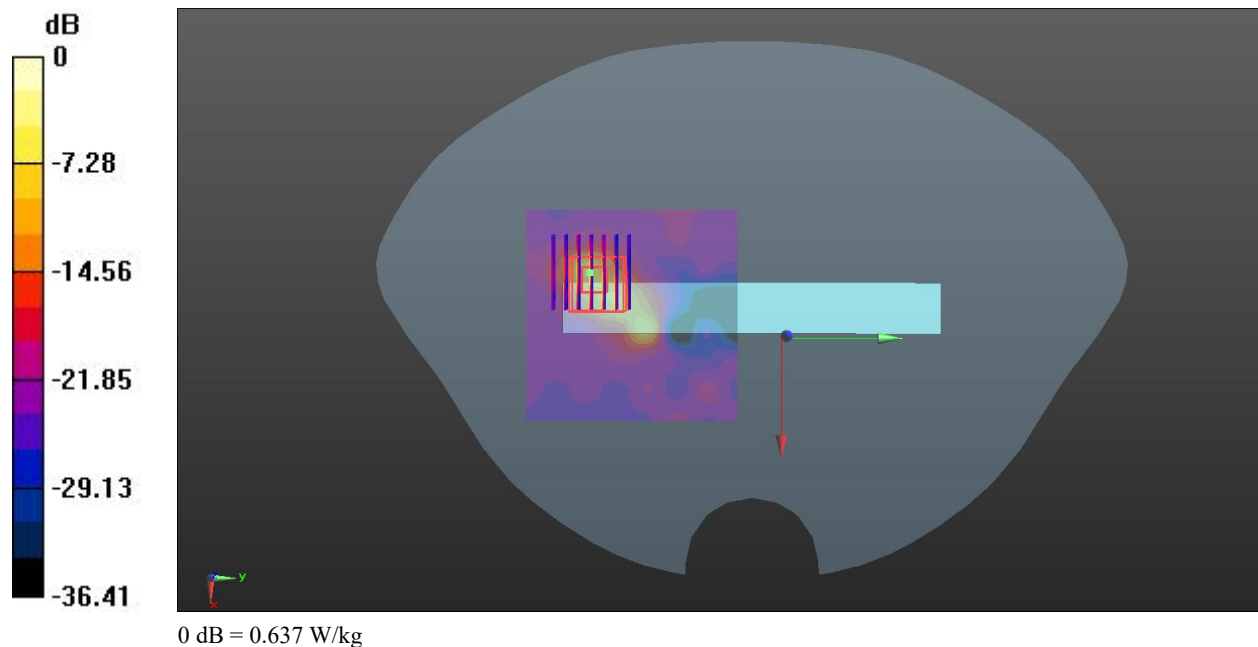

Meas.2 Body Plane with Right Edge 0mm on 1 Channel in IEEE802.11b mode with Ant.0

Date: 2026.02.01

Communication System Band: WIFI2.4; Frequency: 2412 MHz; Duty Cycle: 1:1.057

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.729$ S/m; $\epsilon_r = 39.684$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.71, 7.71, 7.71); Calibrated: 2025.11.11;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.07 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.632 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 0.827 W/kg; SAR(10 g) = 0.309 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 42.8%

Maximum value of SAR (measured) = 1.48 W/kg

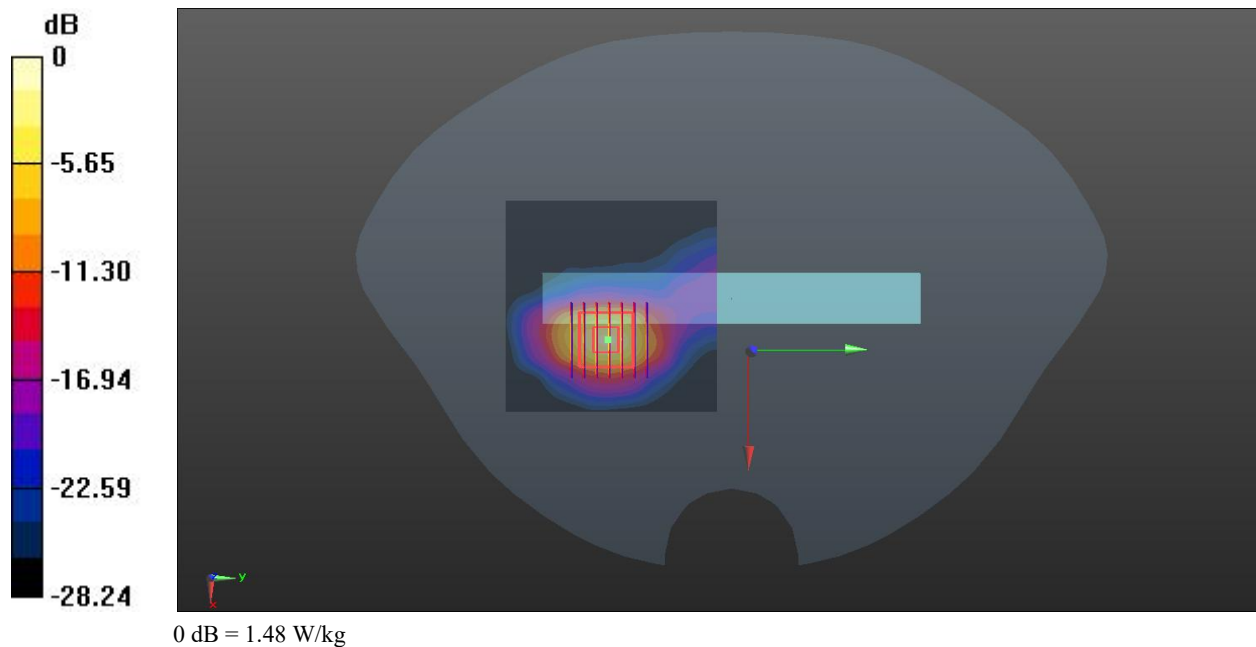

Meas.3 Body Plane with Right Edge 0mm on 52 Channel in IEEE802.11a mode with Ant.0

Date: 2026.02.01

Communication System Band: 5.2G; Frequency: 5260 MHz; Duty Cycle: 1:1.084

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 4.727$ S/m; $\epsilon_r = 36.496$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.5, 5.5, 5.5); Calibrated: 2025.11.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch52/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.63 W/kg

Ch52/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.193 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.73 W/kg

SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 49.8%

Maximum value of SAR (measured) = 1.63 W/kg

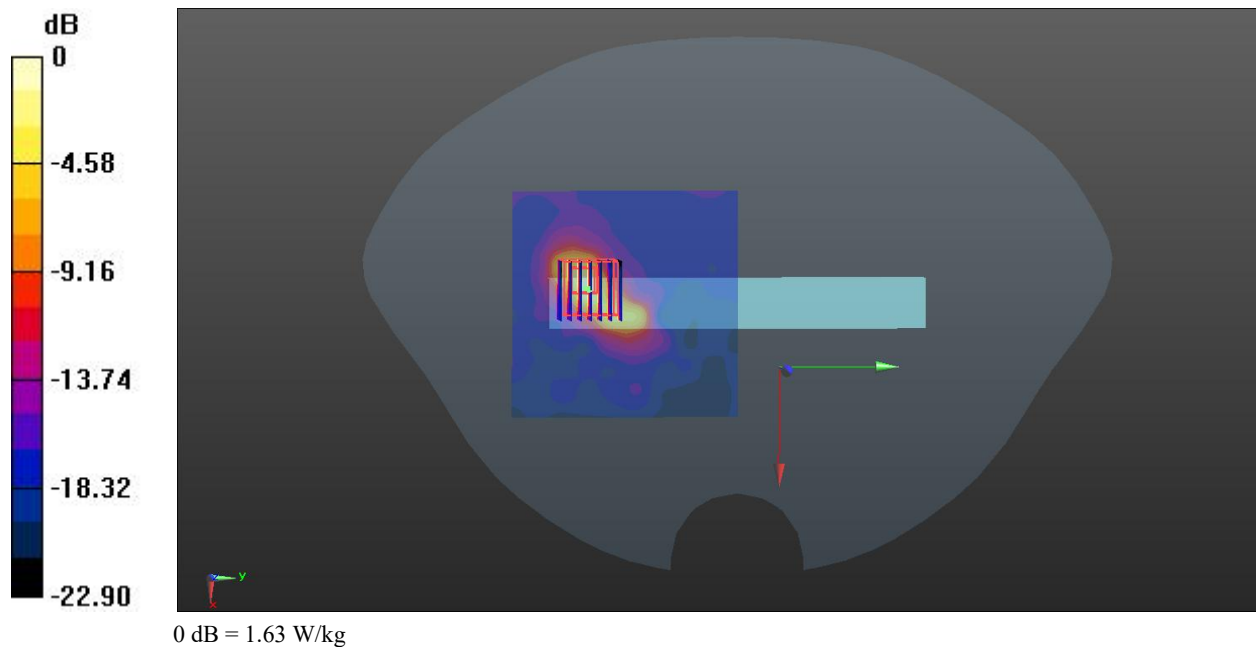

Meas.4 Body Plane with Right Edge 0mm on 116 Channel in IEEE802.11a mode with Ant.0

Date: 2026.02.02

Communication System Band: 5.6G; Frequency: 5580 MHz; Duty Cycle: 1:1.084

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.124$ S/m; $\epsilon_r = 35.644$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.9, 4.9, 4.9); Calibrated: 2025.11.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch116/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.63 W/kg

Ch116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.002 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 4.33 W/kg

SAR(1 g) = 0.758 W/kg; SAR(10 g) = 0.197 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.4%

Maximum value of SAR (measured) = 1.83 W/kg

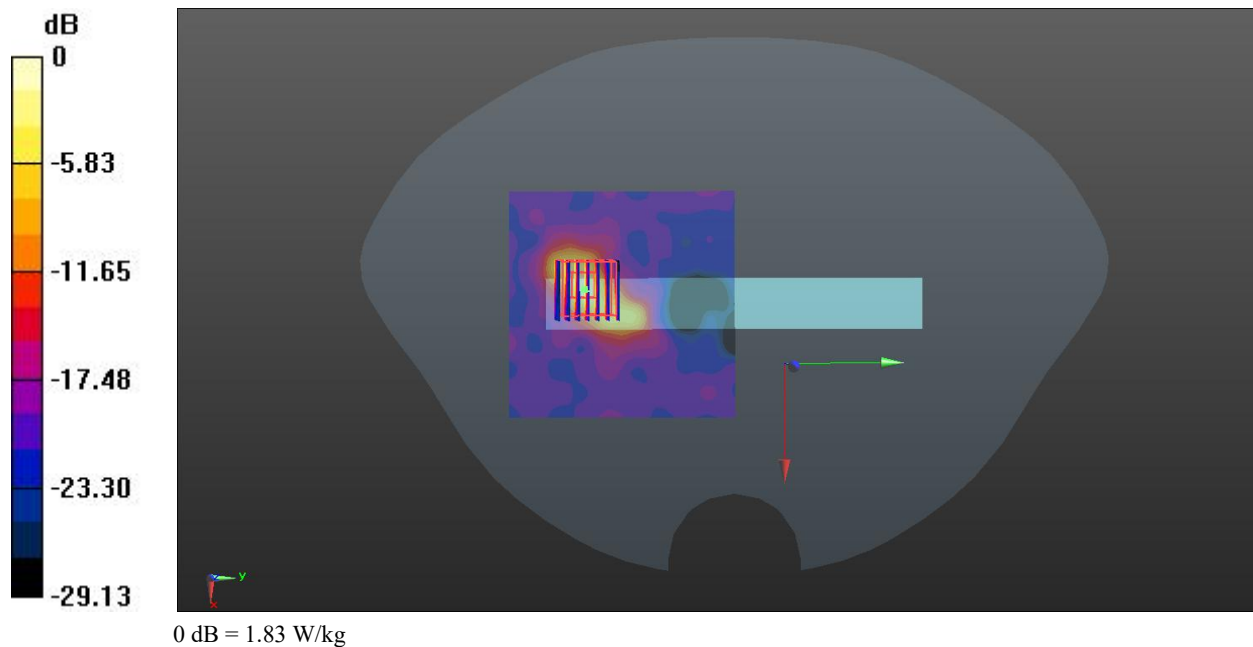

Meas.5 Body Plane with Right Edge 0mm on 149 Channel in IEEE802.11a mode with Ant.0

Date: 2026.02.02

Communication System Band: 5.8G; Frequency: 5745 MHz; Duty Cycle: 1:1.084

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.151$ S/m; $\epsilon_r = 36.211$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.99, 4.99, 4.99); Calibrated: 2025.11.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch149/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.06 W/kg

Ch149/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.6680 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 6.74 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.256 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 2.77 W/kg

