



REPORT No.: SZ18120103W01

TEST REPORT

APPLICANT : iTon Technology Corp.

PRODUCT NAME : Bluetooth 4.1 data module

MODEL NAME : STB1132

BRAND NAME : iTon

FCC ID : 2AJ22STB1132

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2018-12-24


TEST DATE : 2019-02-25 to 2019-02-26

ISSUE DATE : 2019-03-04

Edited by:


Zeng Xiaoying (Rapporteur)

Approved by:


Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	4
1.1. Applicant and Manufacturer Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Test Standards and Results	6
1.4. Environmental Conditions	6
2. 47 CFR Part 15C Requirements	7
2.1. Antenna requirement	7
2.2. Peak Output Power	7
2.3. 6dB Bandwidth	11
2.4. Conducted Spurious Emissions and Band Edge	14
2.5. Power spectral density (PSD)	18
2.6. Conducted Emission	21
2.7. Restricted Frequency Bands	25
2.8. Radiated Emission	35
Annex A Test Uncertainty	48
Annex B Testing Laboratory Information	49



REPORT No.: SZ18120103W01

Change History		
Version	Date	Reason for change
1.0	2019-03-04	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	iTon Technology Corp.
Applicant Address:	7 Floor East, Building C, No.1006 Shennan Road, Shenzhen International Innovation center, Futian Technology Square, Futian Dist, Shenzhen, China
Manufacturer:	iTon Technology Corp Shenzhen Branch
Manufacturer Address:	3F, Building E, WeiXinDa Industry park, No.95 AiNan Rd, Longgang District, Shenzhen, China

1.2. Equipment Under Test (EUT) Description

Product Name:	Bluetooth 4.1 data module	
Serial No:	(N/A, marked #1 by test site)	
Hardware Version:	V1.0	
Software Version:	V1.0	
Modulation Type:	GFSK	
Bluetooth Version:	Bluetooth LE	
Operating Frequency Range:	The frequency range used is 2402MHz - 2480MHz (40 channels, at intervals of 2MHz)	
Antenna Information:	Antenna 1	
	Brand Name:	N/A
	Model Name:	N/A
	Antenna Type:	PCB Antenna
	Antenna Gain:	-1.9 dBi
	Antenna 2	
	Brand Name:	Taoglas
	Model Name:	FXP74
	Antenna Type:	PCB Antenna
	Antenna Gain:	4.0 dBi



Antenna Information:	Antenna 3	
	Brand Name:	Taoglas
	Model Name:	FXP70
	Antenna Type:	PCB Antenna
	Antenna Gain:	5.0 dBi

Note 1: This test report is updated from original report SZ17050123W01 (Model: STB1132, FCC ID: 2AJ22STB1132). According to the certificate holder, they declared that the new module only added two new types of antennas (Ant2&Ant3), no other difference between the modules. The changes only affect the test results of Restricted Frequency Bands and Radiated Emission. And we added the results of two new antennas in these two test items.

Note 2: The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies is $F(\text{MHz})=2402+2*n$ ($0 \leq n \leq 39$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 19 (2440MHz) and 39 (2480MHz).

Note 3: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

Note 4: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(b)	Peak Output Power	May 31, 2017	Wang Meng	PASS _{Note1}
3	15.247(a)	Bandwidth	May 31, 2017	Wang Meng	PASS _{Note1}
4	15.247(d)	Conducted Spurious Emission and Band Edge	May 31, 2017	Wang Meng	PASS _{Note1}
5	15.247(e)	Power spectral density (PSD)	May 31, 2017	Wang Meng	PASS _{Note1}
6	15.207	Conducted Emission	Jun 06, 2017	Wu Zhongwen	PASS _{Note1}
7	15.247(d)	Restricted Frequency Bands	Jun 06, 2017 Feb 26, 2019	Wu Zhongwen	PASS
8	15.209, 15.247(d)	Radiated Emission	Jun 06, 2017 Feb 25, 2019	Wu Zhongwen	PASS

Note 1: The test results of these test items in this report refer to the test report (Report No.: SZ17050123W01).

Note 2: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05r01.

Note 3: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 11dB means the cable loss is 11dB.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Peak Output Power


2.2.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

A. Test Setup:

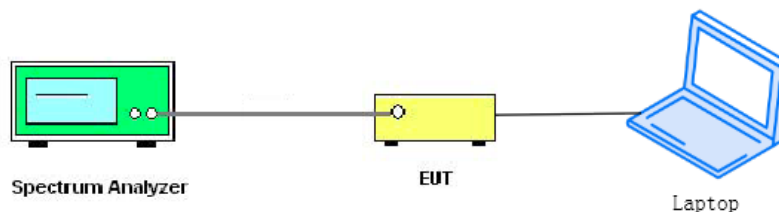

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.



B. Equipments List:

Please refer ANNEX B (4).

2.2.3. Test procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the RBW to 1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time to auto couple.
- f) Detector = peak.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use peak marker function to determine the peak amplitude level.




2.2.4. Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-1.69	0.0007	30	1	PASS
19	2440	-1.97	0.0006			PASS
39	2480	-2.45	0.0006			PASS


B. Test Plots:

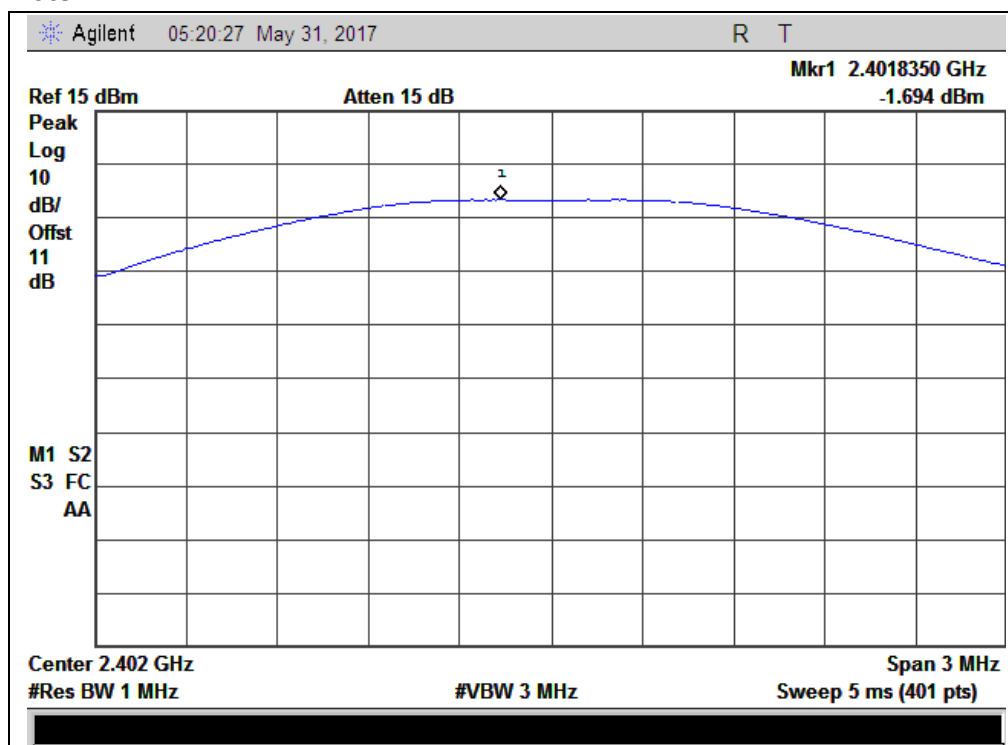

(Channel 0, 2402MHz)

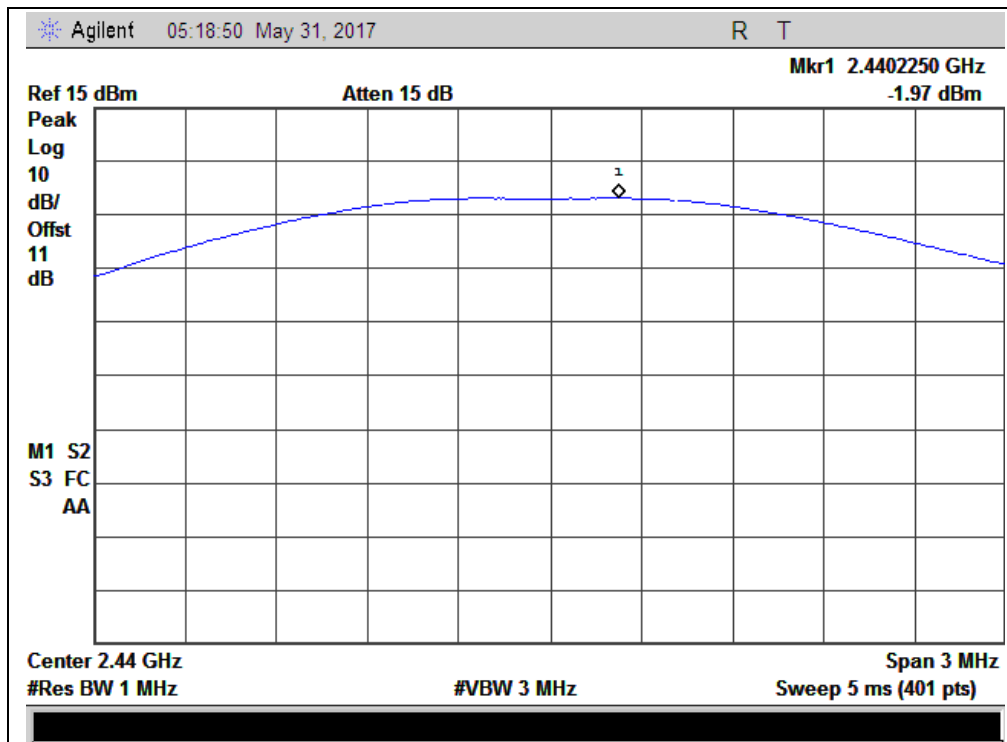

(Channel 19, 2440MHz)

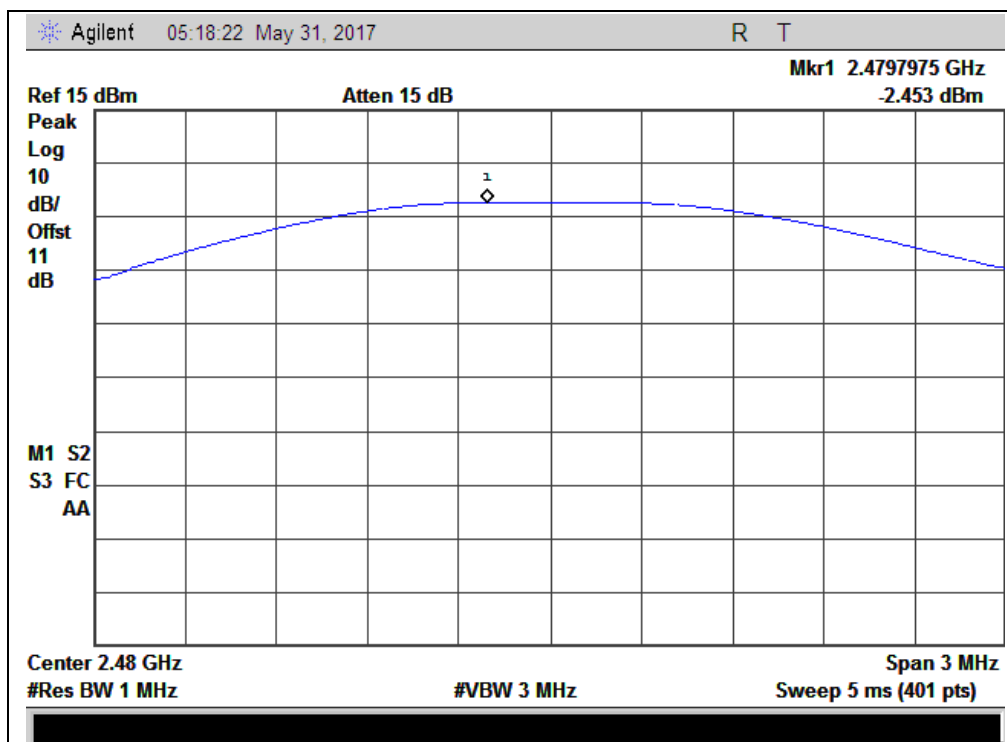

(Channel 39, 2480MHz)


2.3. 6dB Bandwidth

2.3.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2. Test Description

A. Test Set:

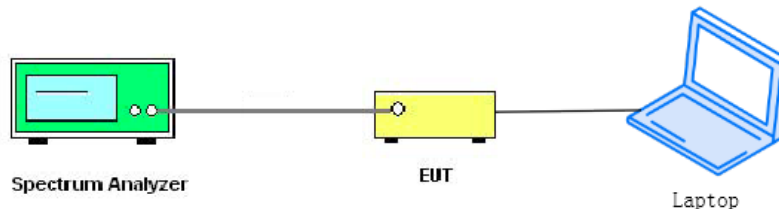

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please refer ANNEX B (4).

2.3.3. Test procedure

The steps for the first option are as follows:

(1) Set analyzer center frequency to channel center frequency.

- a) Set RBW = 100 kHz.
- b) Set the VBW=300 kHz.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

(2) The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100\text{ kHz}$, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq 6\text{ dB}$.


2.3.4. Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the module.


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
0	2402	0.742	≥ 500	PASS
19	2440	0.737	≥ 500	PASS
39	2480	0.741	≥ 500	PASS


B. Test Plots:

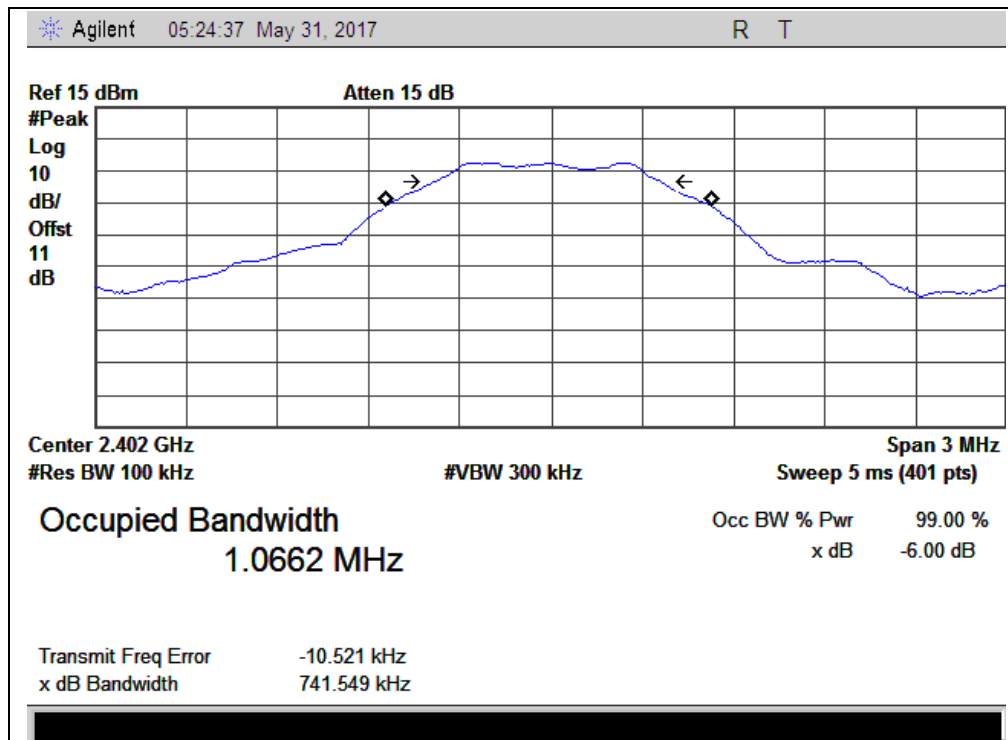

(Channel 0, 2402MHz)

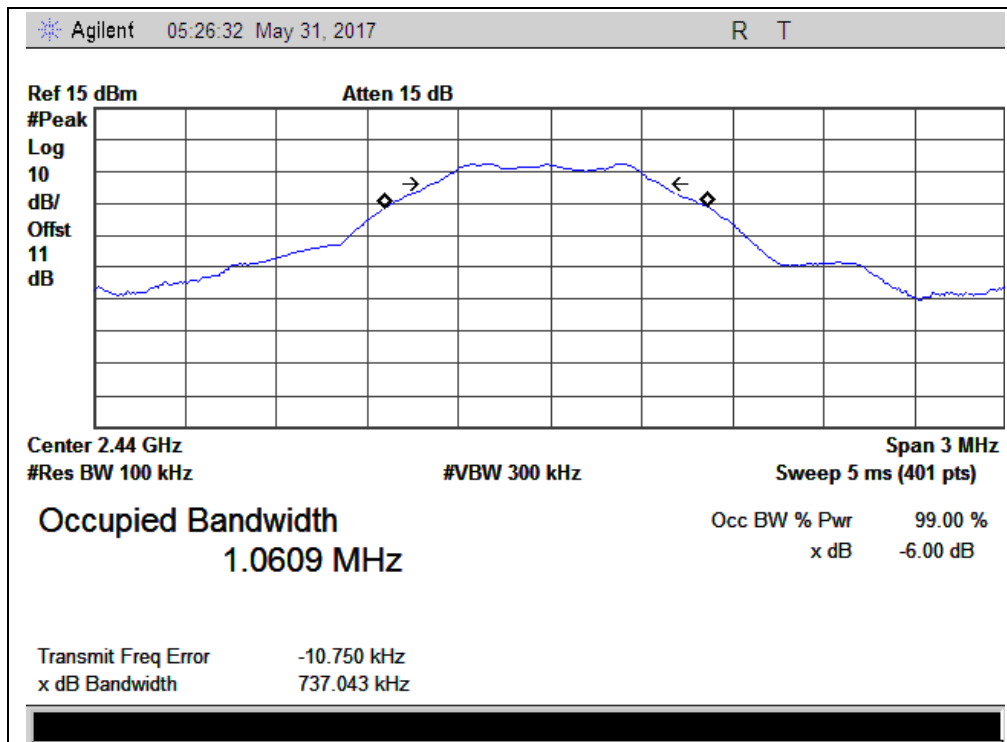

(Channel 19, 2440 MHz)

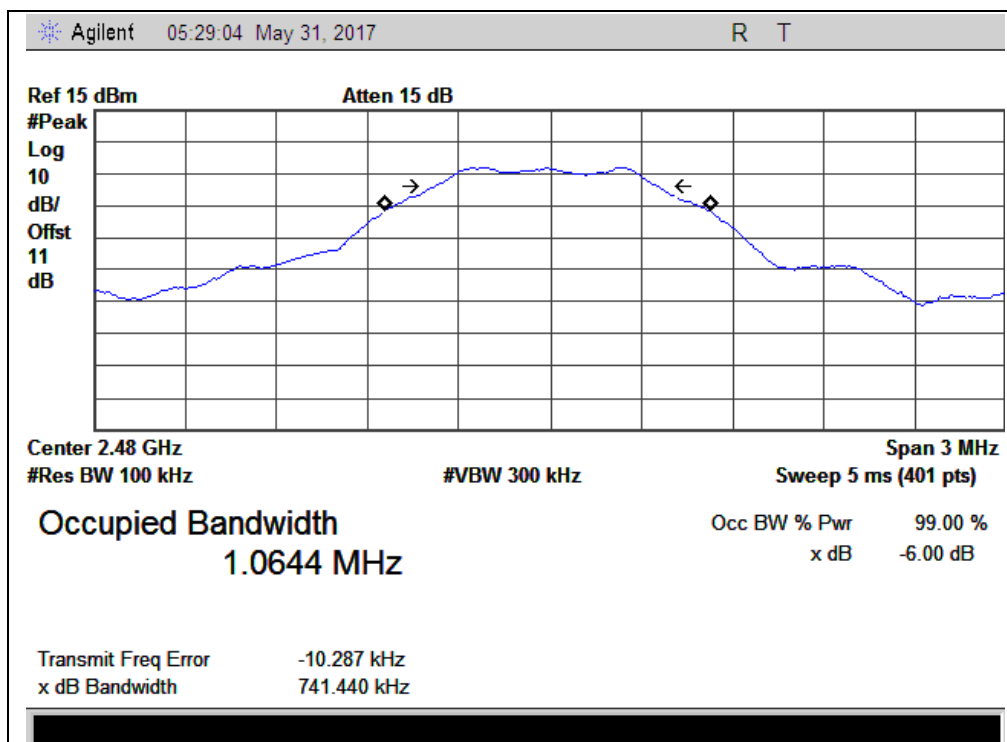

(Channel 39, 2480MHz)


2.4. Conducted Spurious Emissions and Band Edge

2.4.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2. Test Description

A. Test Set:

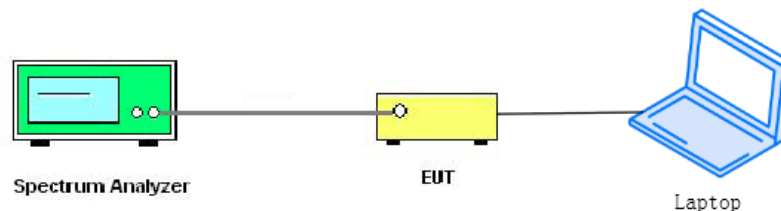

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please refer ANNEX B (4).

2.4.3. Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-45.73	-2.11	-22.11	PASS
19	2440	-45.10	-2.79	-22.79	PASS
39	2480	-46.22	-2.82	-22.82	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

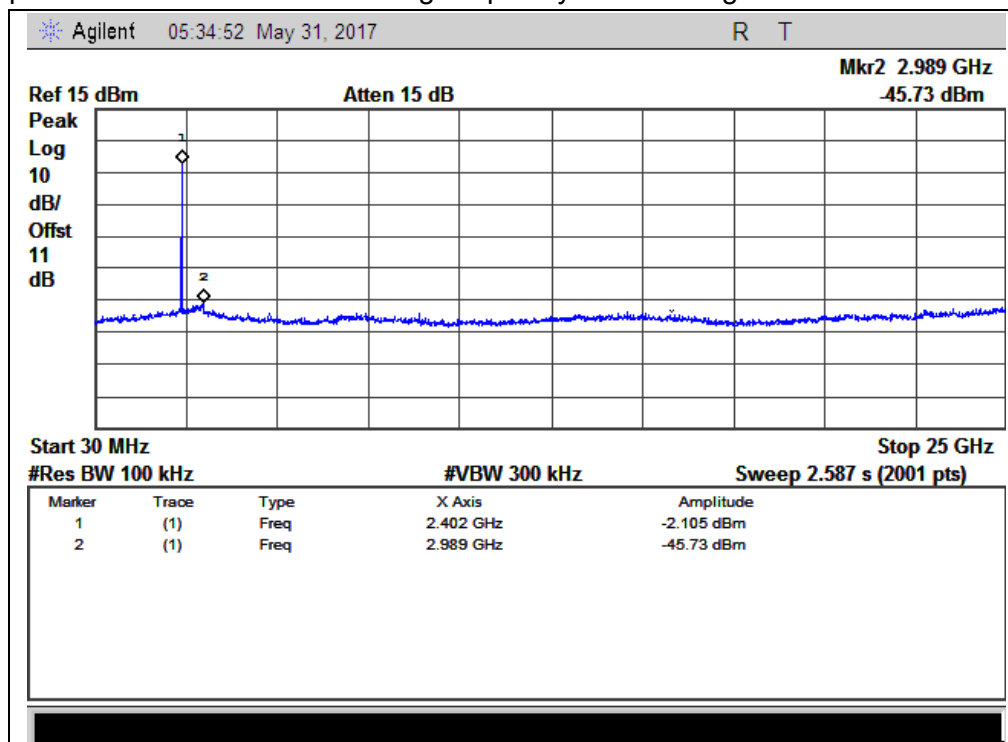


(Channel = 0, 30MHz to 25GHz)

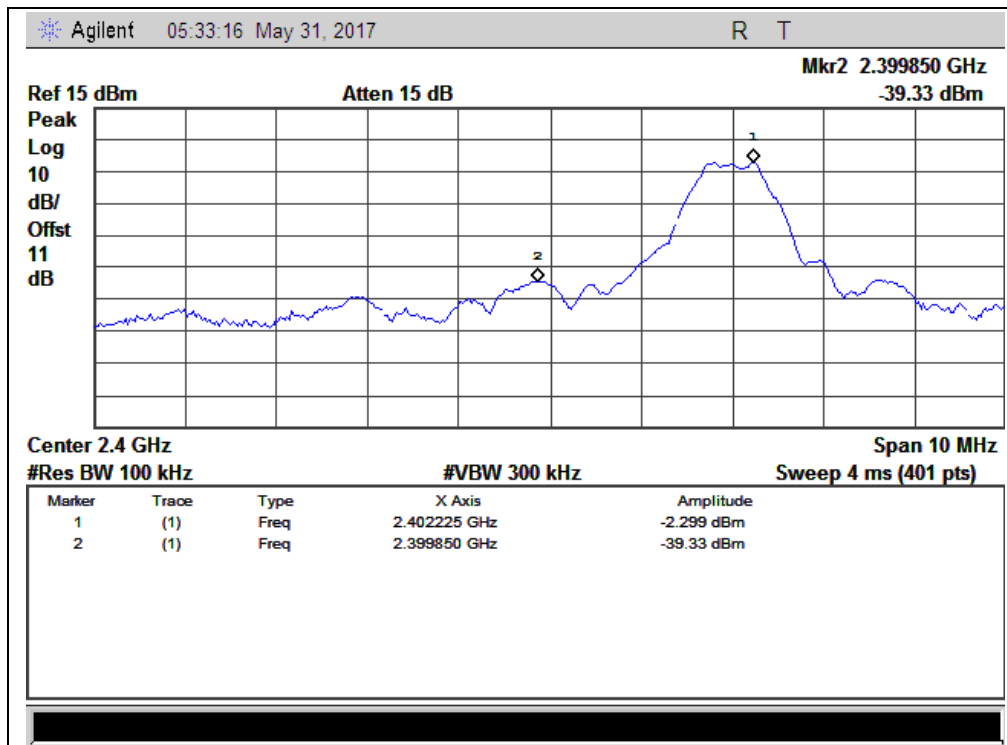


(Band Edge, Channel = 0)

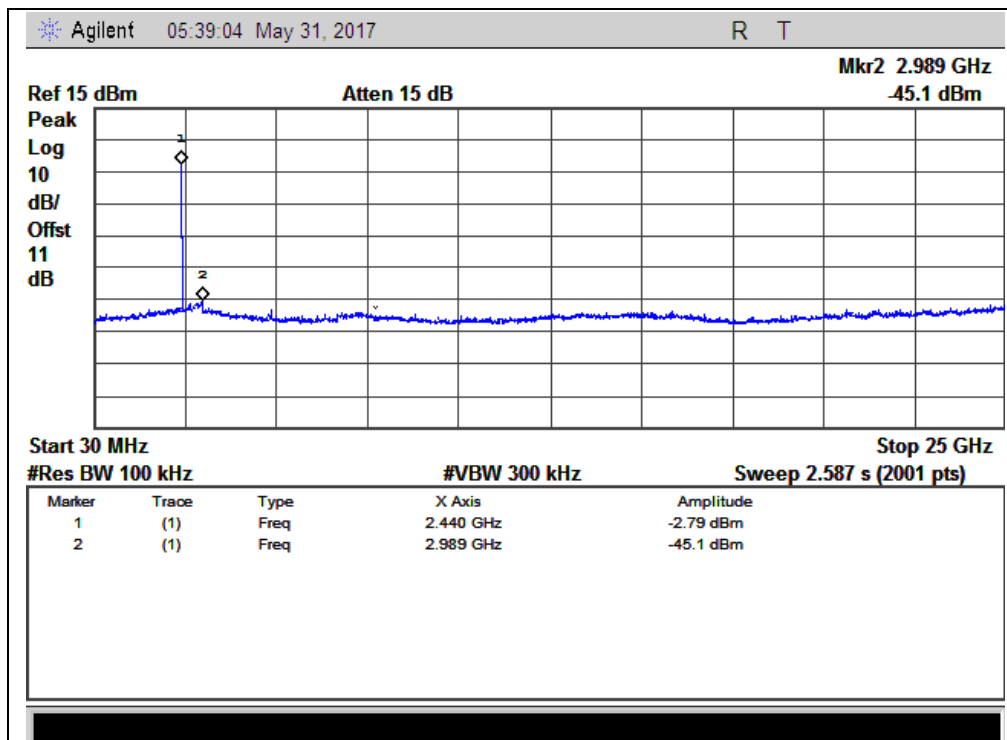

(Channel = 19, 30MHz to 25GHz)

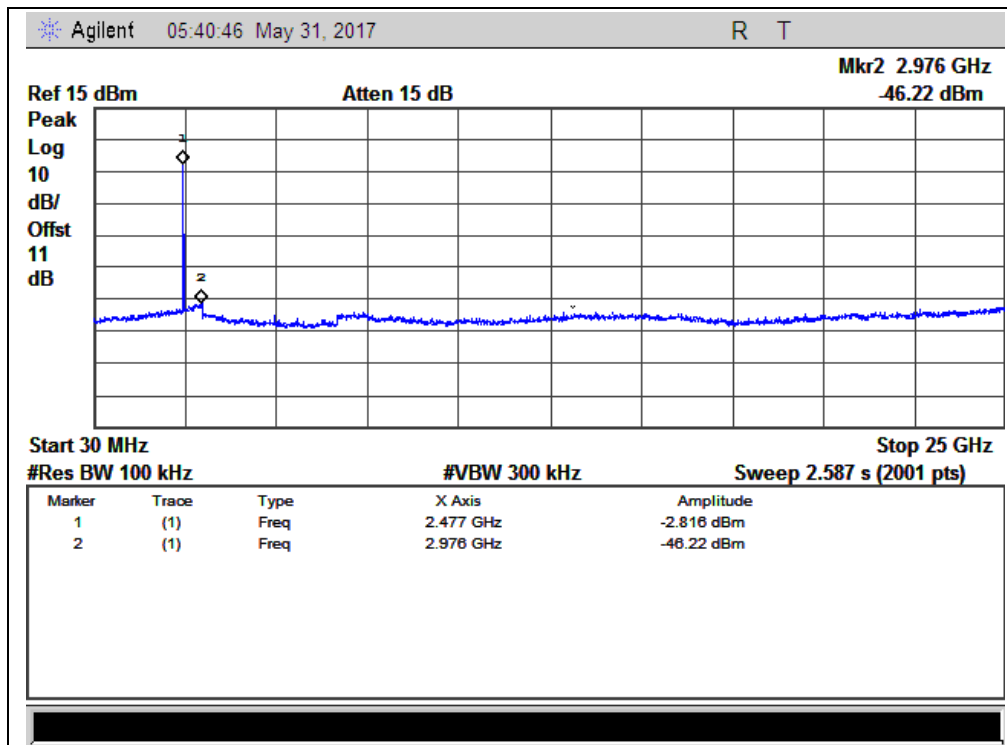

(Channel = 39, 30MHz to 25GHz)

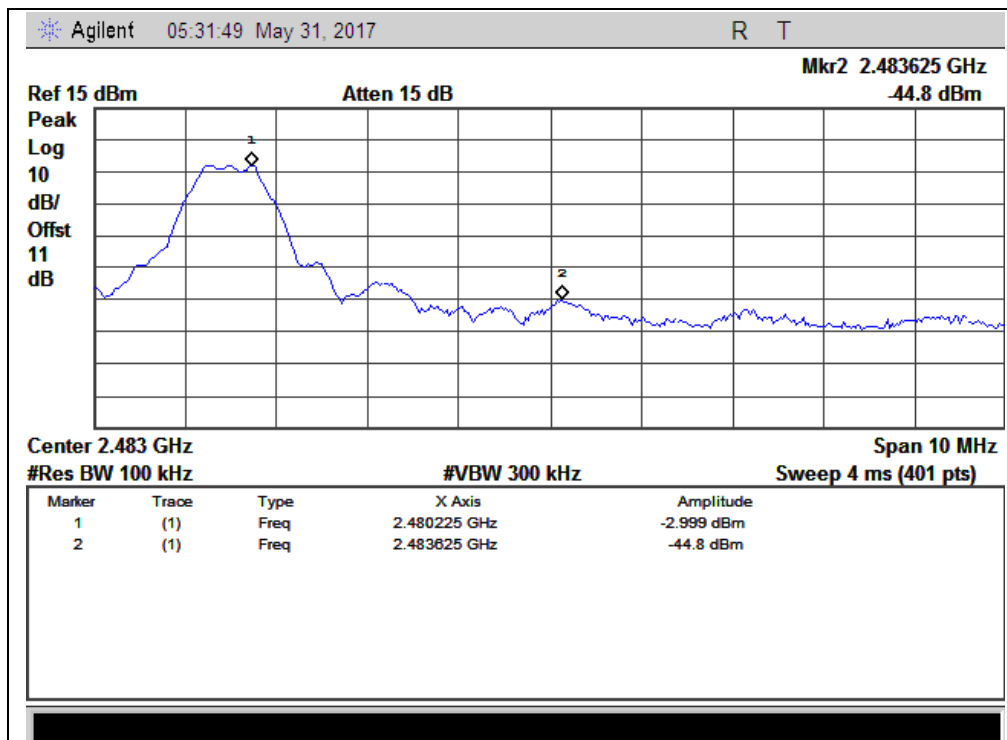

(Band Edge, Channel = 39)


2.5. Power spectral density (PSD)

2.5.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.5.2. Test Description

A. Test Set:

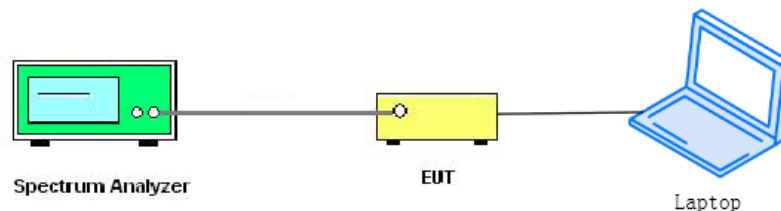

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX B (4).

2.5.3. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- Set analyzer center frequency to channel center frequency.
- Set the span to 1.5 times DTS
- Set the RBW to 3 kHz
- Set the VBW to 10 kHz
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.


2.5.4. Test Result

The lowest, middle and highest channels are tested.


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
0	2402	-16.49	8	PASS
19	2440	-16.73	8	PASS
39	2480	-17.11	8	PASS


B. Test Plots:

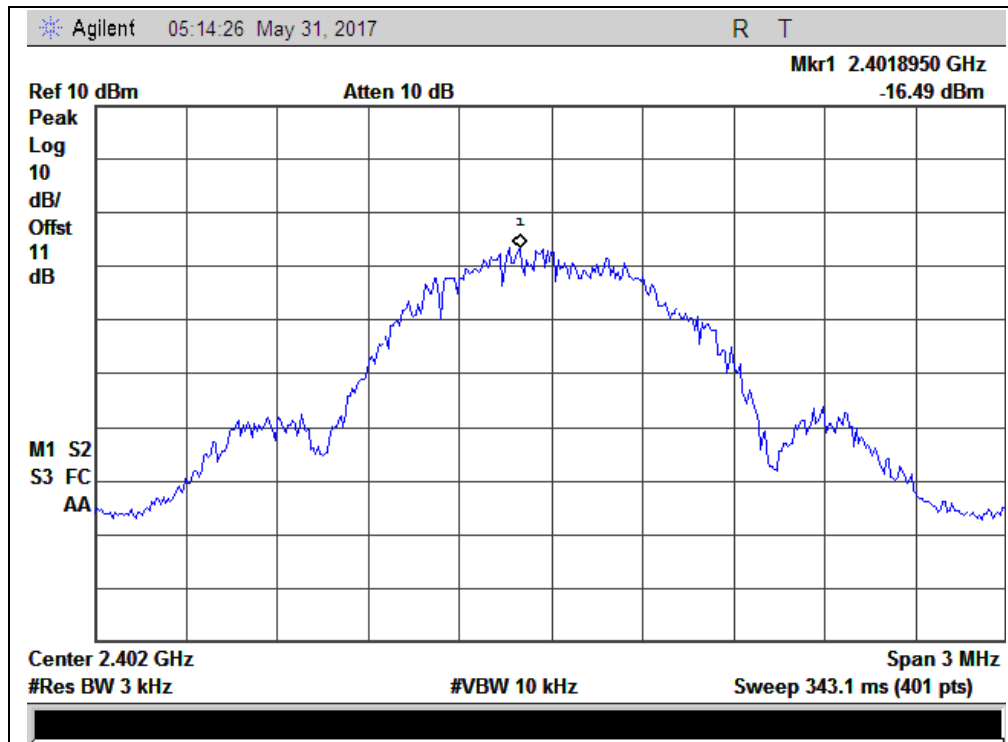

(Channel = 0, 2402MHz)

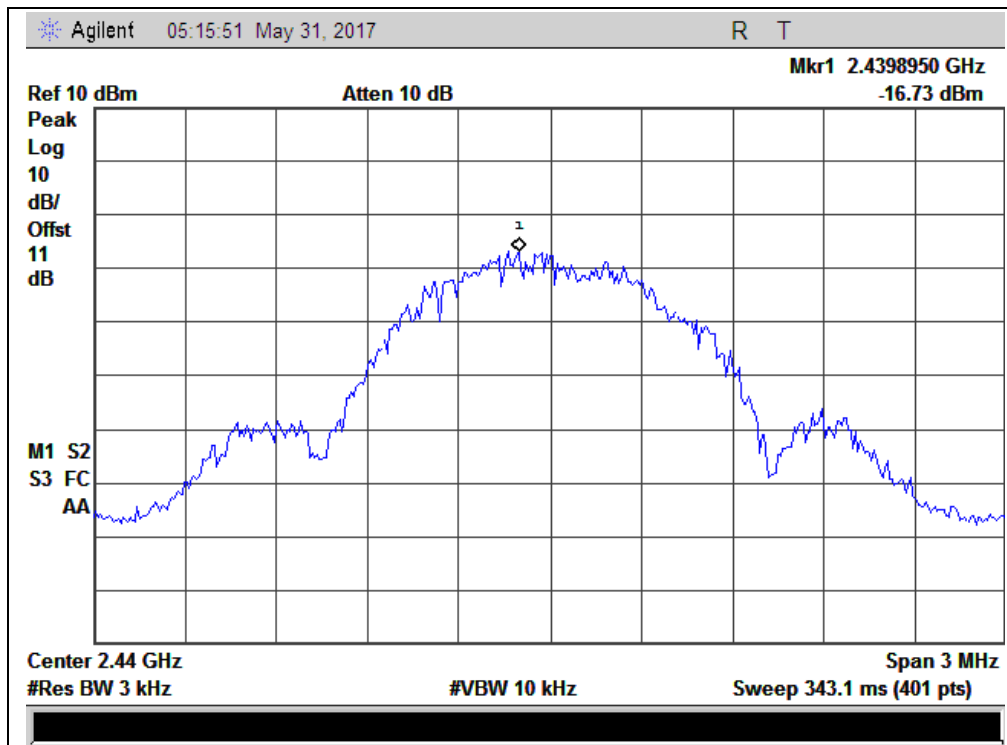

(Channel = 19, 2440MHz)

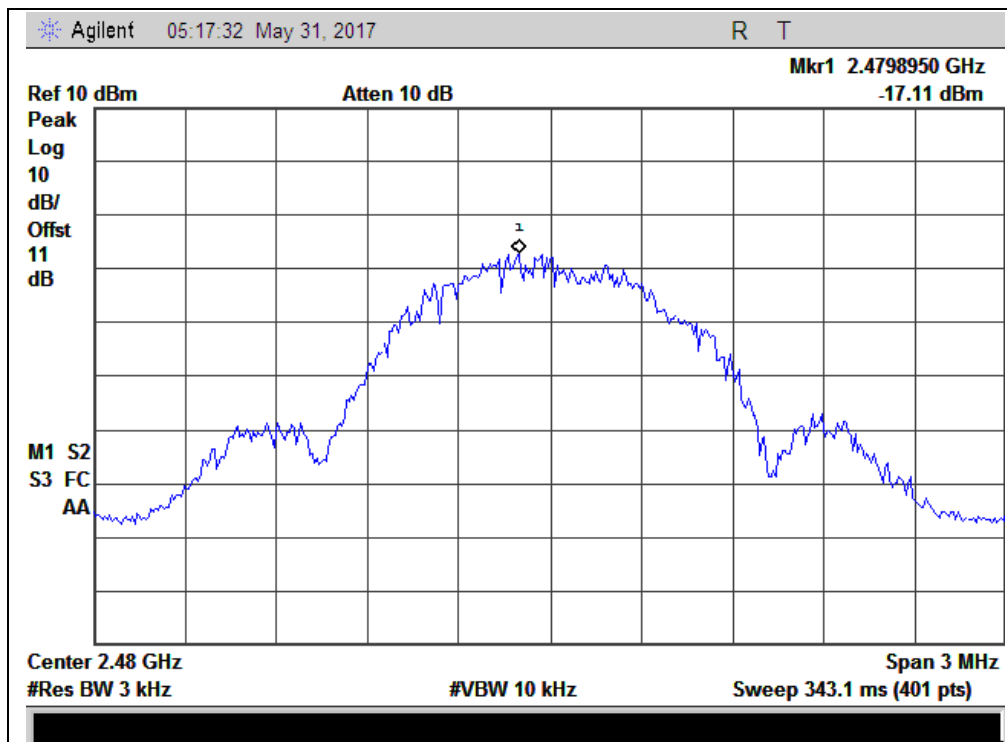

(Channel = 39, 2480MHz)

2.6. Conducted Emission

2.6.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency (MHz)	range	Conducted Limit (dB μ V)	
		Quai-peak	Average
0.15 - 0.50		66 to 56	56 to 46
0.50 - 5		56	46
5 - 30		60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.6.2. Test Description

A. Test Setup:

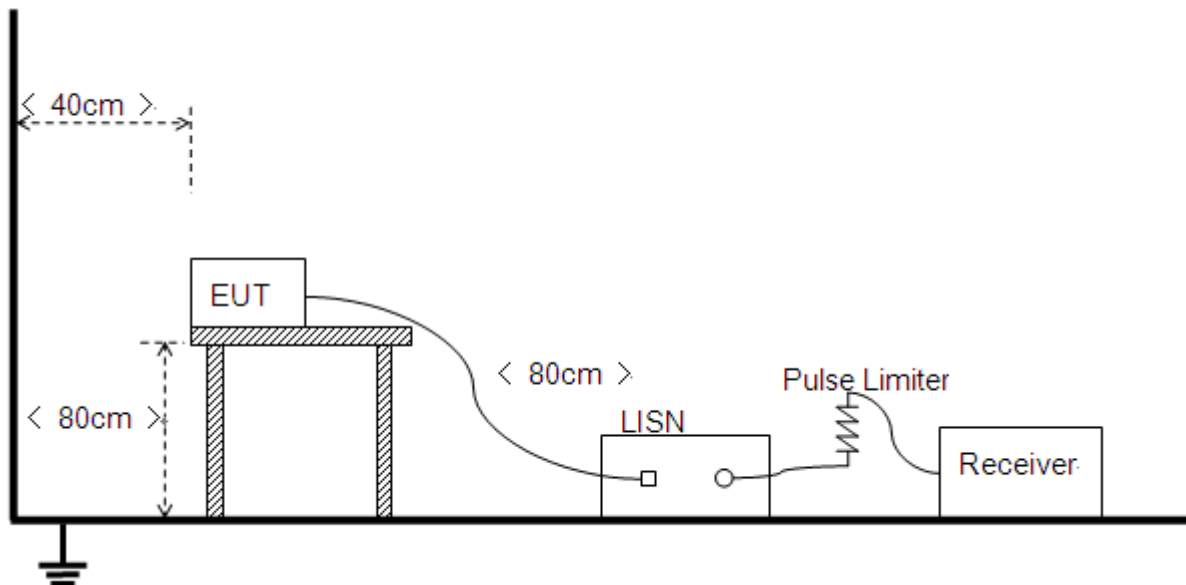

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



B. Equipments List:

Please refer ANNEX B (4).

2.6.3. Test Result

Test Mode: EUT+ Control Panel + PC+ BT TX


Test voltage: AC 120V/60Hz

The measurement results are obtained as below:

$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss [dB]} + A_{\text{Factor}}$


U_R : Receiver Reading

A_{Factor} : Voltage division factor of LISN

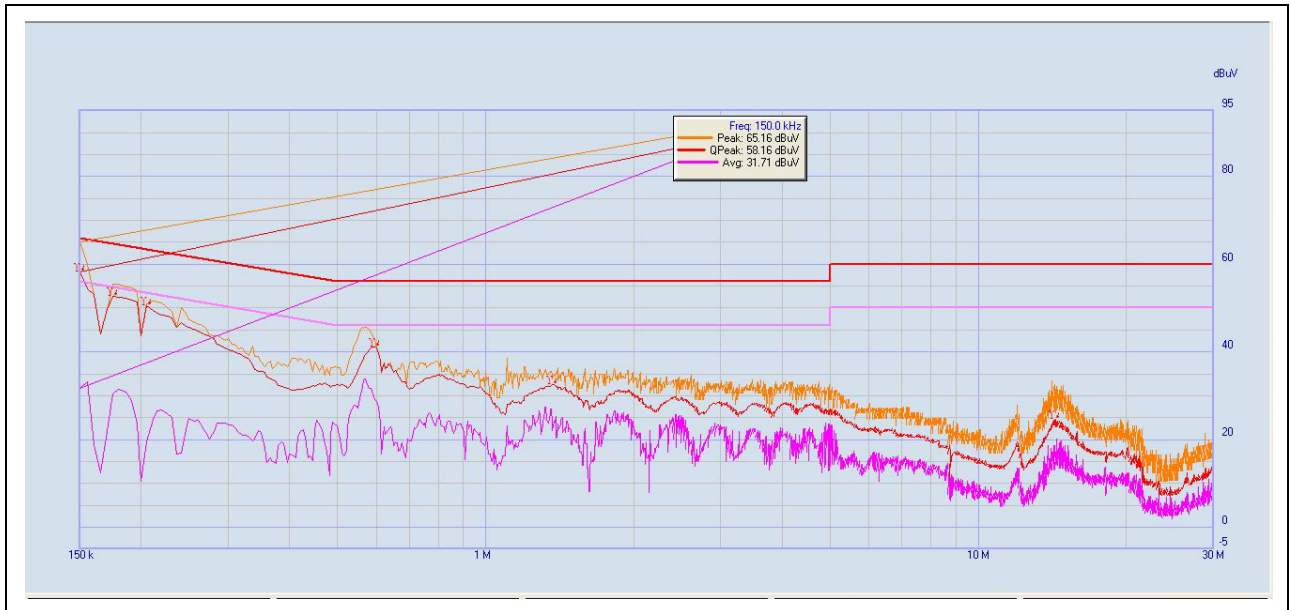

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	58.16	31.71	66.00	56.00	Line	PASS
2	0.175	52.77	30.45	65.29	55.29		PASS
3	0.205	50.45	19.42	64.43	54.43		PASS
4	0.595	41.15	29.02	56.00	46.00		PASS
5	1.365	32.48	23.91	56.00	46.00		PASS
6	14.255	24.20	18.56	60.00	50.00		PASS

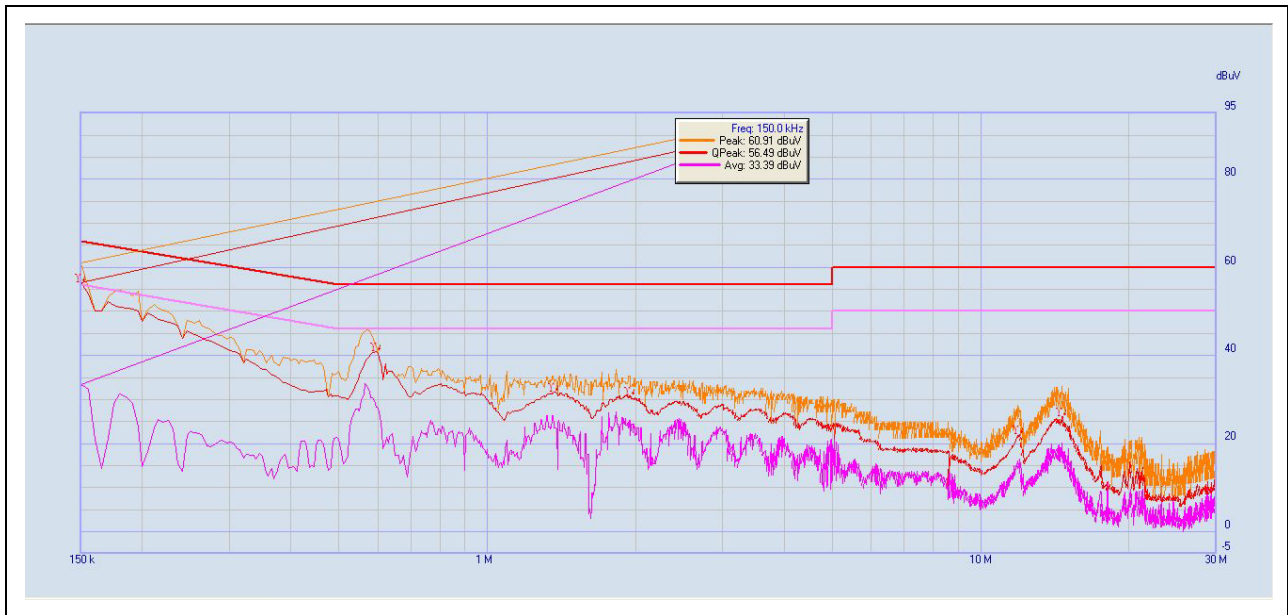

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	56.49	33.39	66.00	56.00	Neutral	PASS
2	0.595	40.85	28.25	56.00	46.00		PASS
3	1.37	31.60	23.52	56.00	46.00		PASS
4	1.95	30.56	21.91	56.00	46.00		PASS
5	11.905	21.86	15.20	60.00	50.00		PASS
6	14.625	24.69	17.99	60.00	50.00		PASS


2.7. Restricted Frequency Bands

2.7.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.7.2. Test Description

A. Test Setup

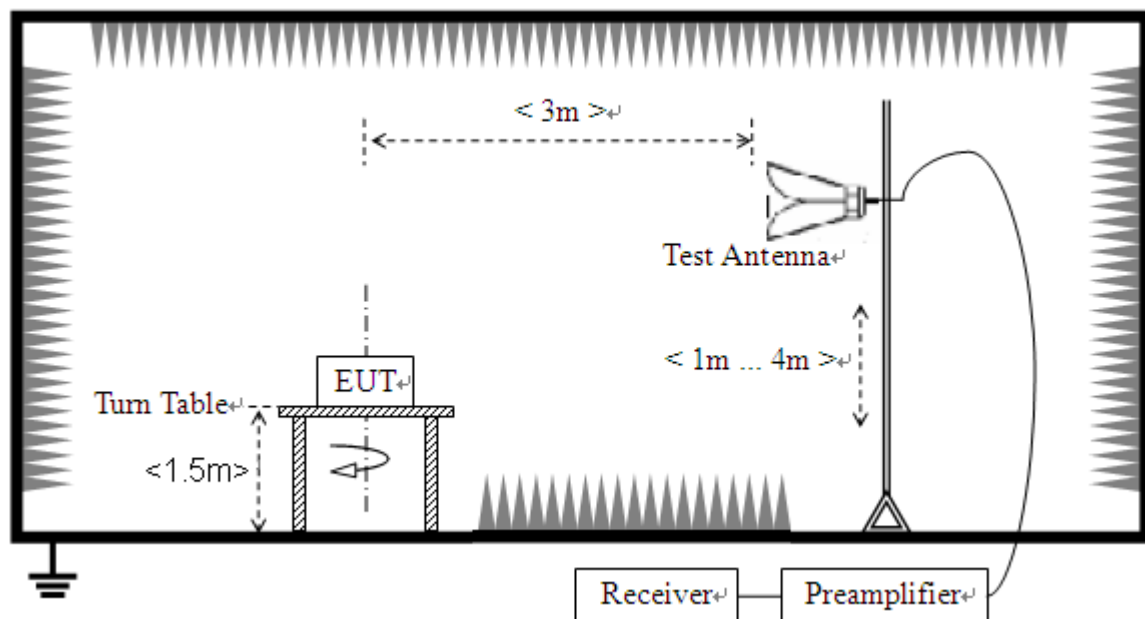

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Please refer ANNEX B(4).

2.7.3. Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading



G_{preamp} : Preamplifier Gain


A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


Antenna 1

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2388.50	PK	50.43	-33.63	32.56	49.36	74	PASS
0	2385.90	AV	33.00	-33.63	32.56	31.93	54	PASS
39	2483.50	PK	54.54	-33.18	32.50	53.86	74	PASS
39	2483.83	AV	33.50	-33.18	32.50	32.82	54	PASS



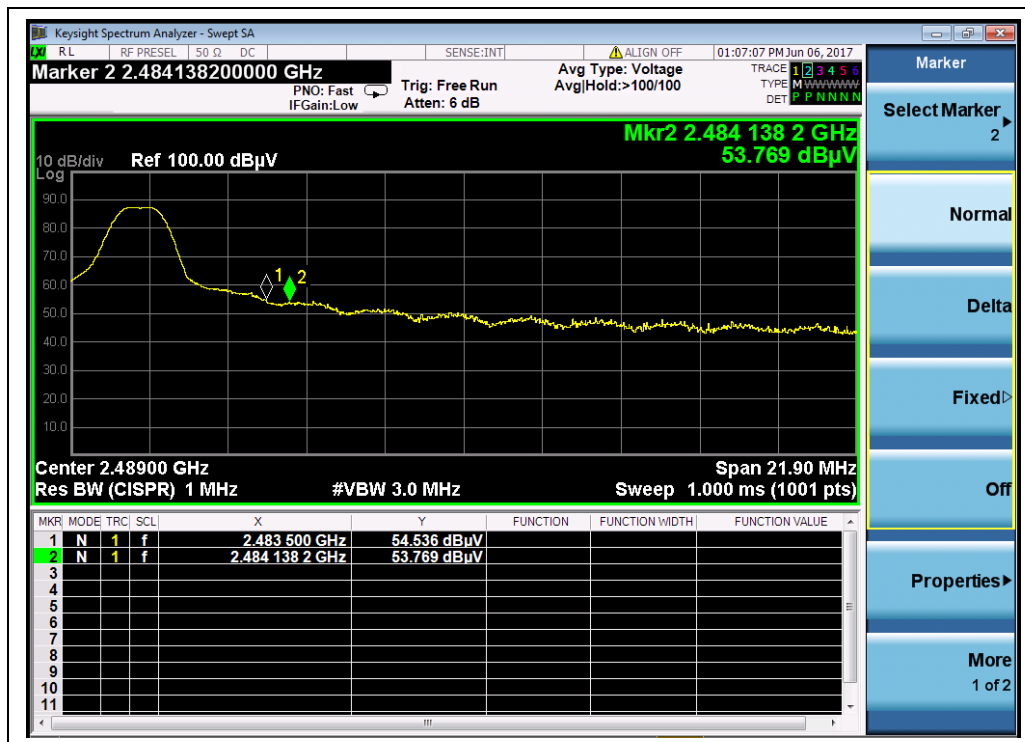

(Channel = 39, PEAK)

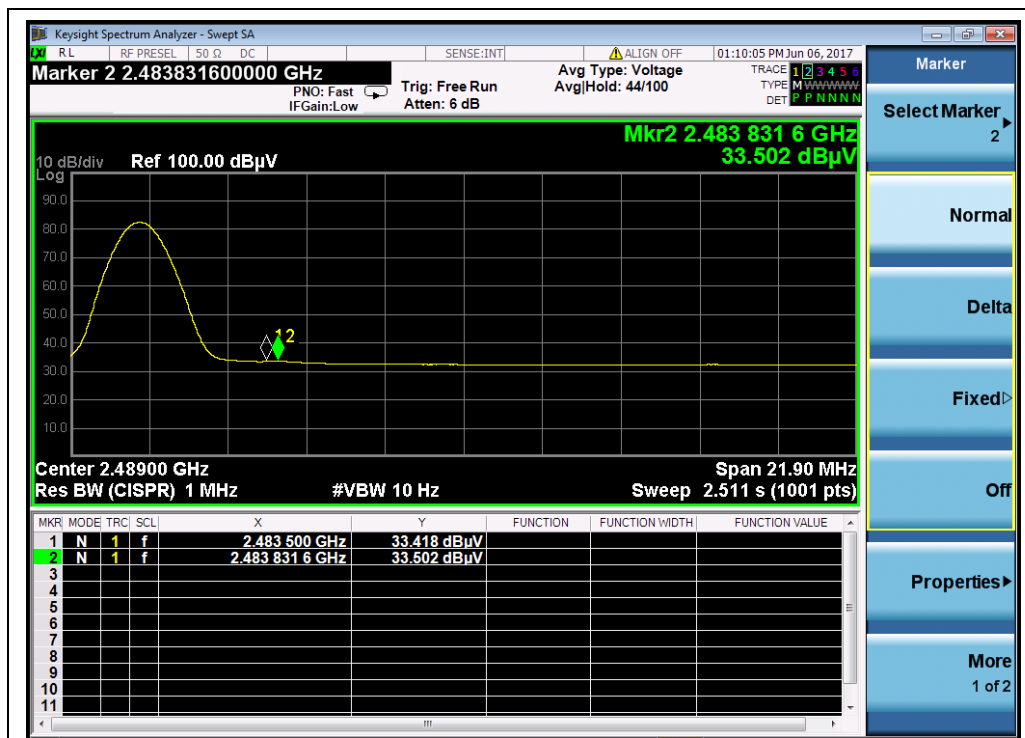


(Channel = 39, AVG)




Antenna 2


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2353.77	PK	49.86	-29.67	32.56	52.75	74	PASS
0	2388.61	AV	35.48	-29.67	32.56	38.37	54	PASS
39	2485.28	PK	48.70	-29.67	32.56	51.59	74	PASS
39	2483.51	AV	35.98	-29.67	32.56	38.87	54	PASS

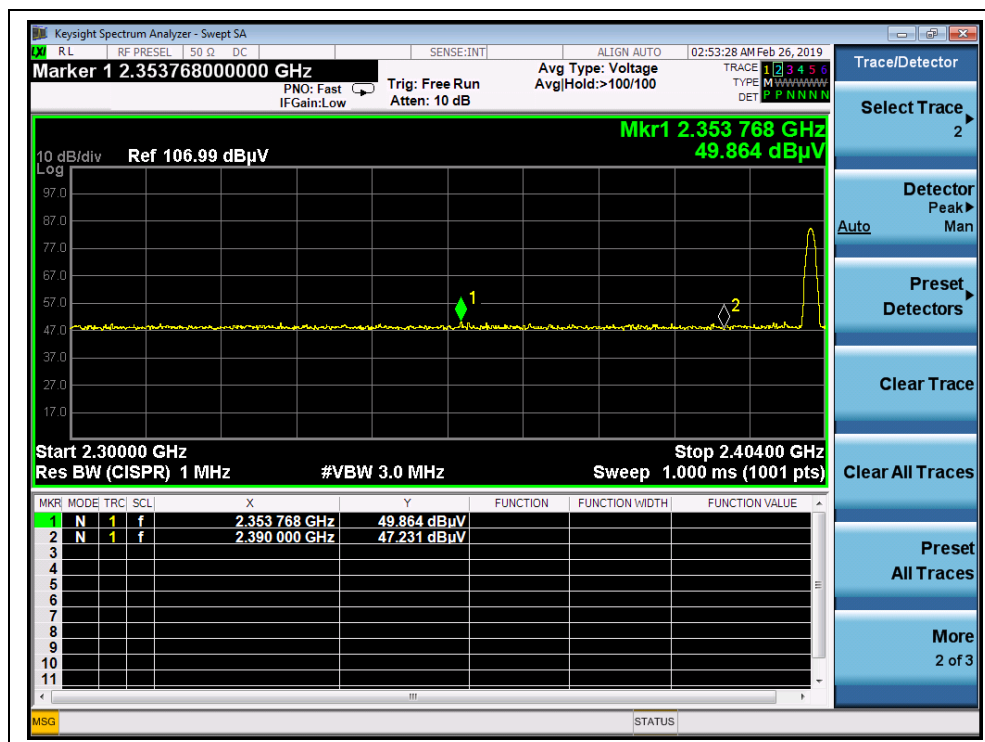


(Channel = 0, PEAK)

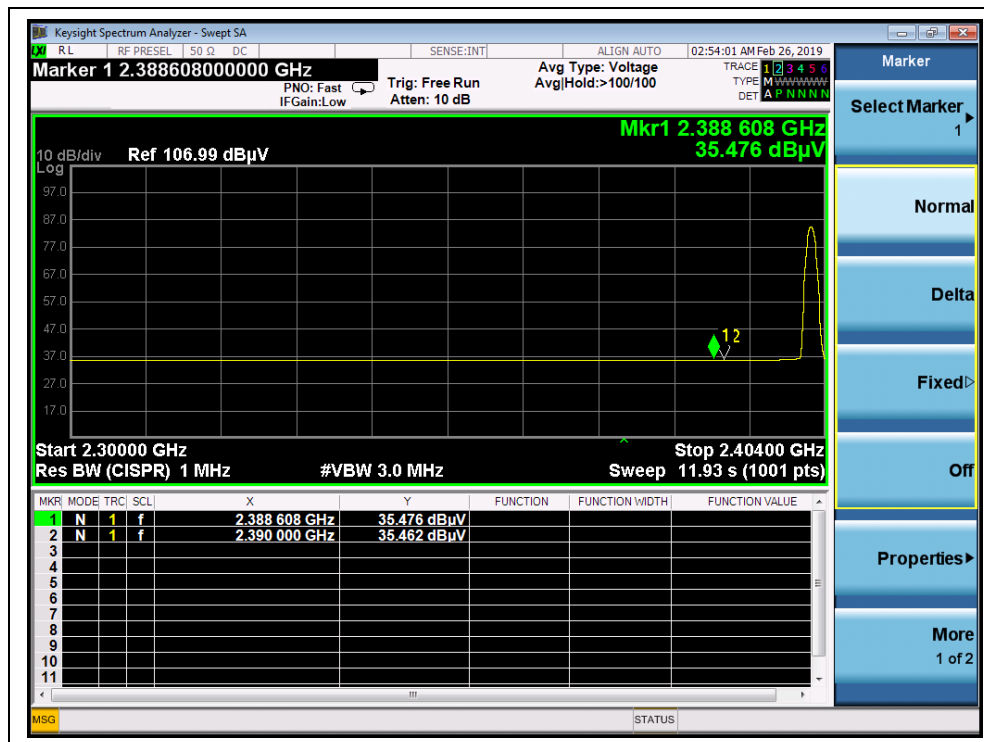

(Channel = 0, AVG)

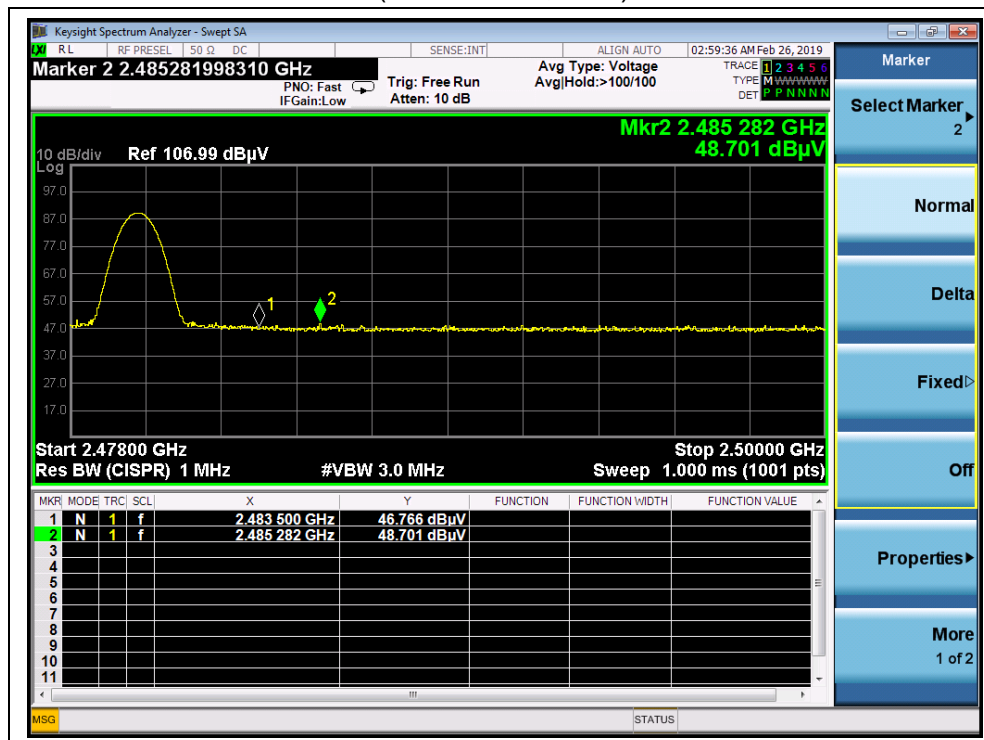

(Channel = 39, PEAK)

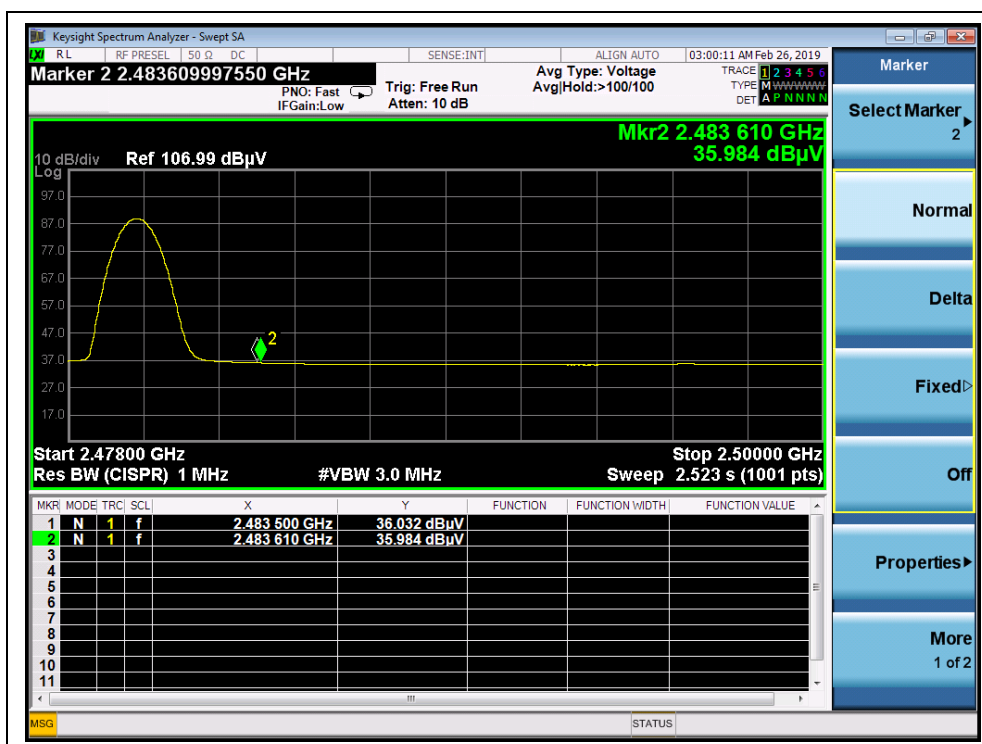


(Channel = 39, AVG)




Antenna 3


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2372.28	PK	49.48	-33.63	32.56	52.37	74	PASS
0	2387.46	AV	36.65	-33.63	32.56	39.54	54	PASS
39	2491.84	PK	49.35	-33.18	32.50	52.24	74	PASS
39	2483.50	AV	36.77	-33.18	32.50	39.66	54	PASS

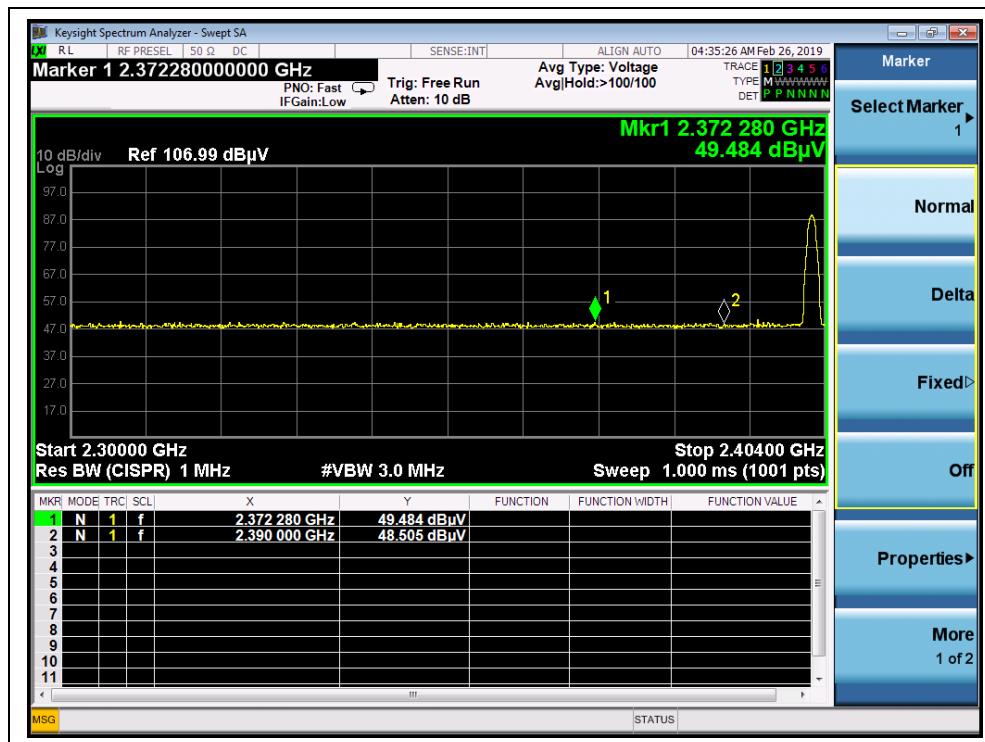


(Channel = 0, PEAK)

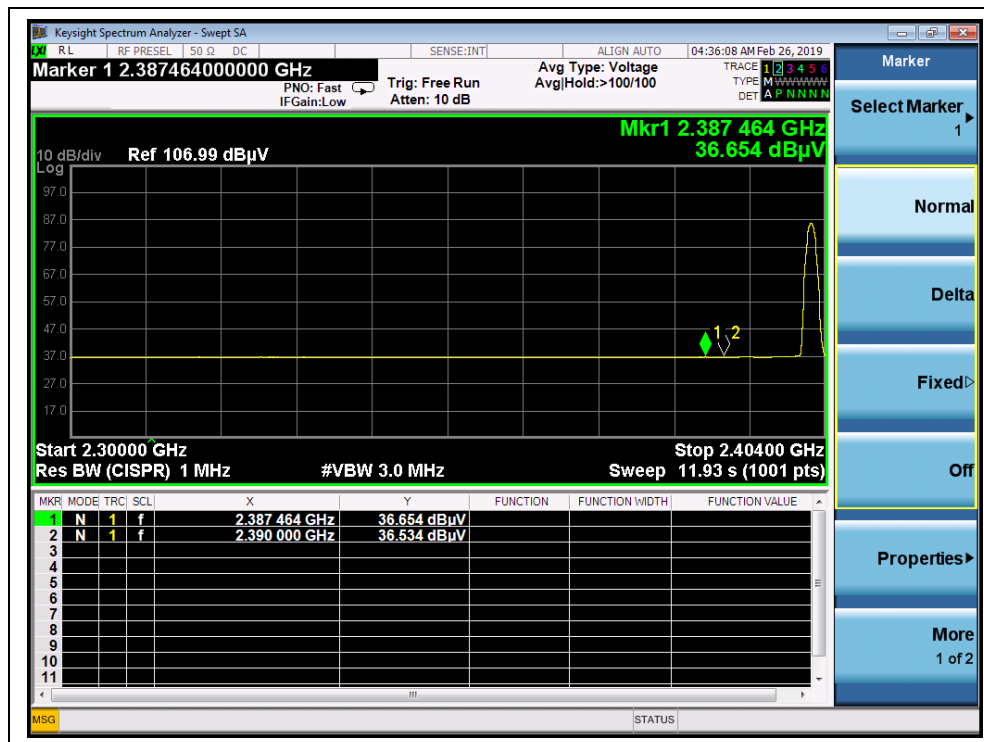

(Channel = 0, AVG)

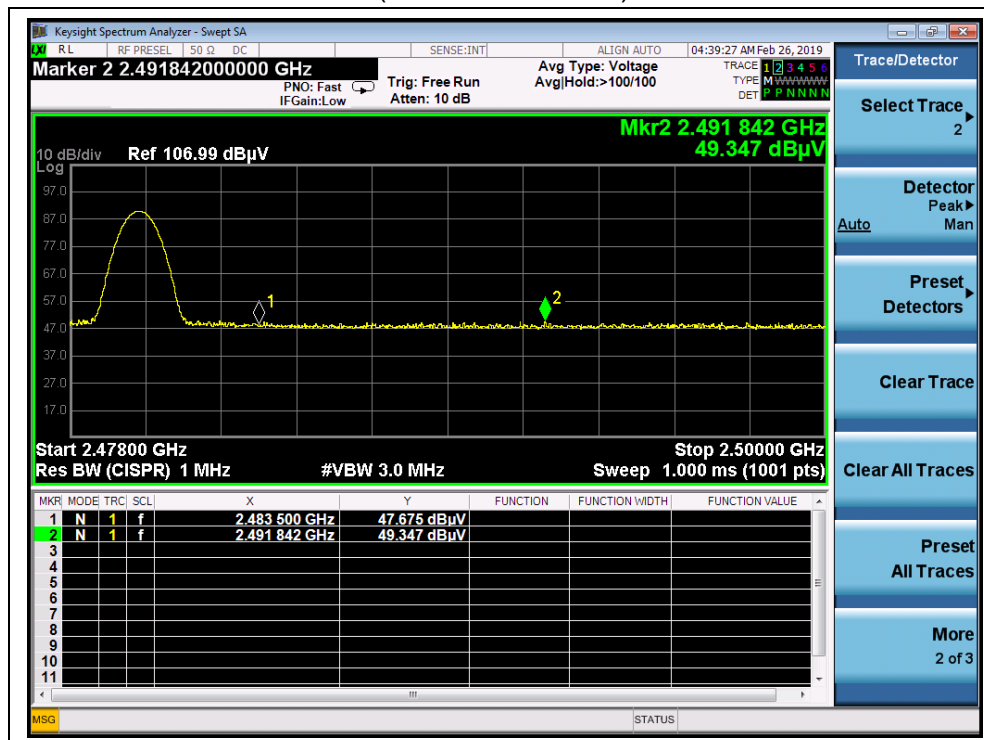

(Channel = 39, PEAK)

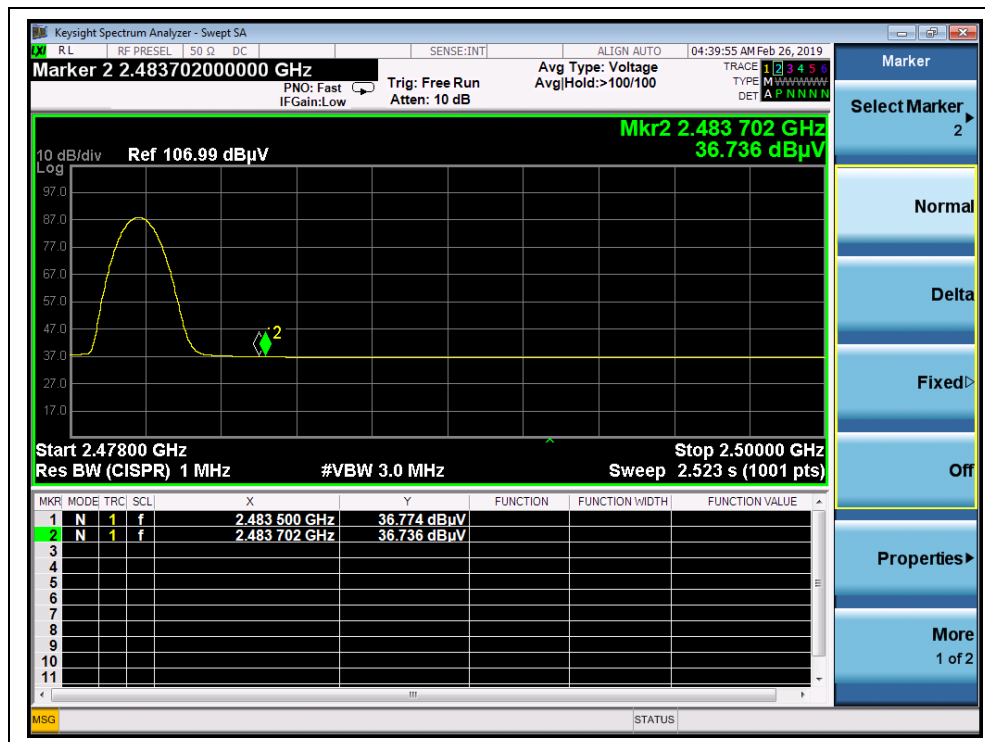

(Channel = 39, AVG)



2.8. Radiated Emission

2.8.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

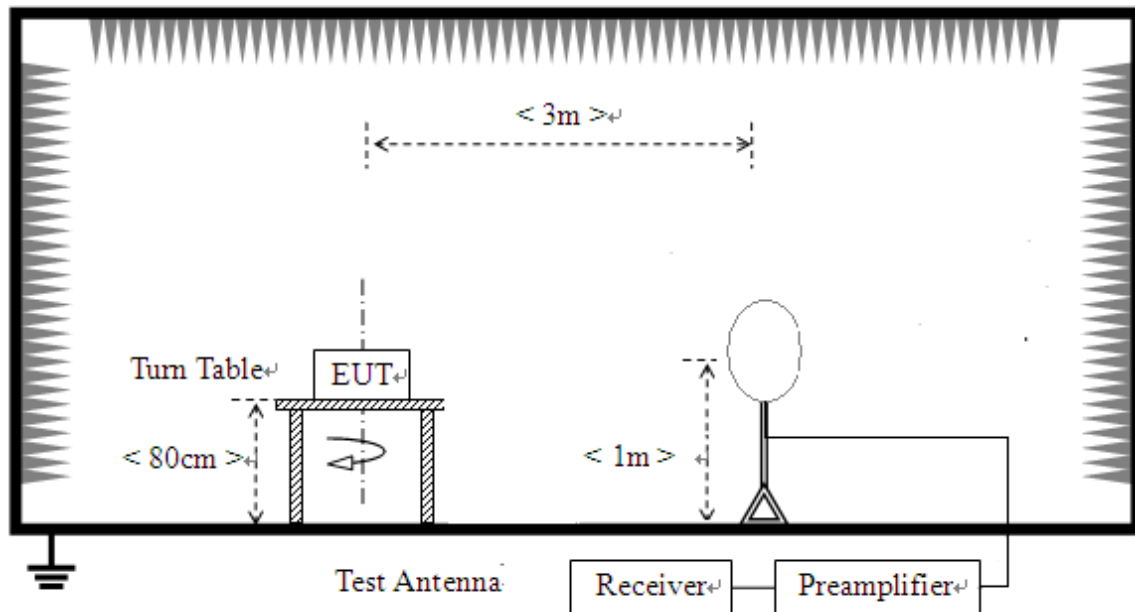

- 2) For radiated emissions from 30MHz to 1GHz

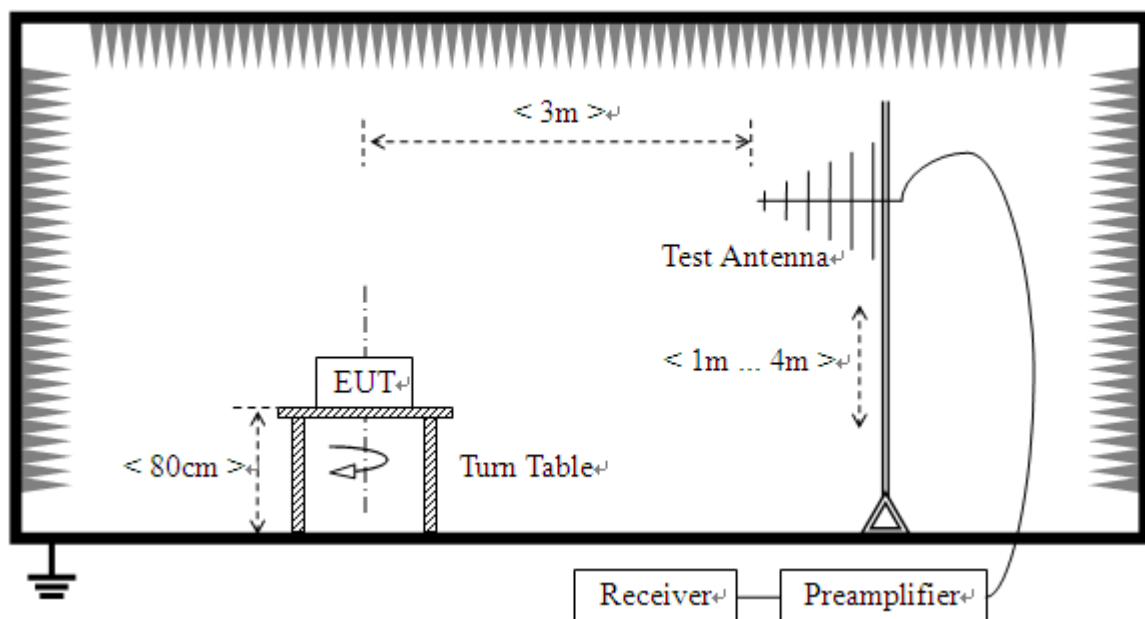

3) For radiated emissions above 1GHz

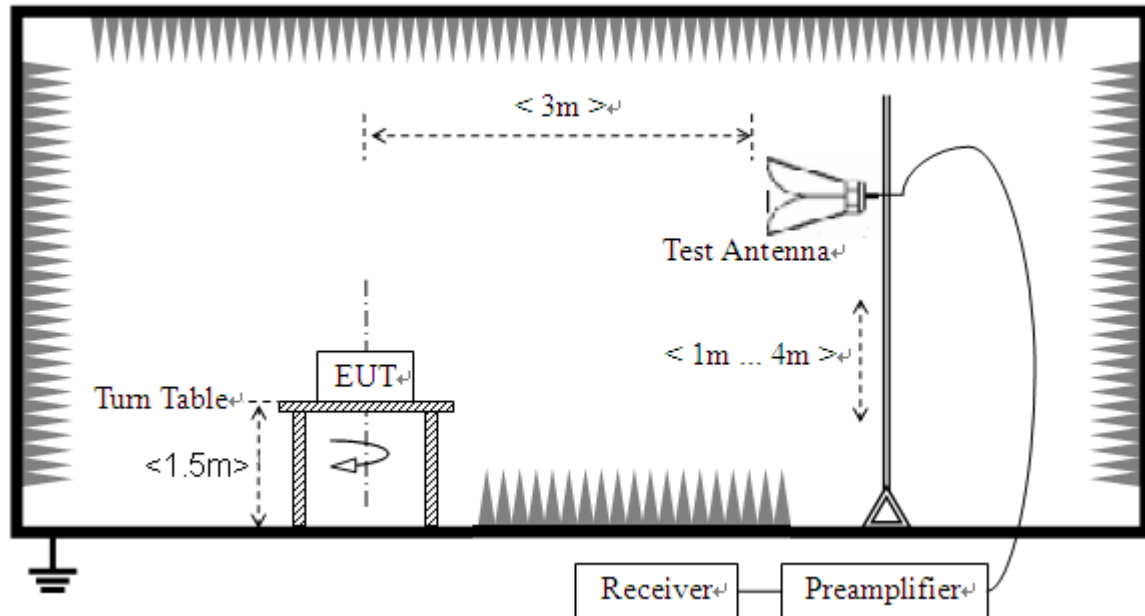

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant



emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please refer ANNEX B (4).

2.8.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**Antenna 1****Plots for Channel = 0**

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
191.464	30.59	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
335.932	34.15	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1030.092	41.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2376.551	48.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5756.938	46.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16001.709	49.77	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

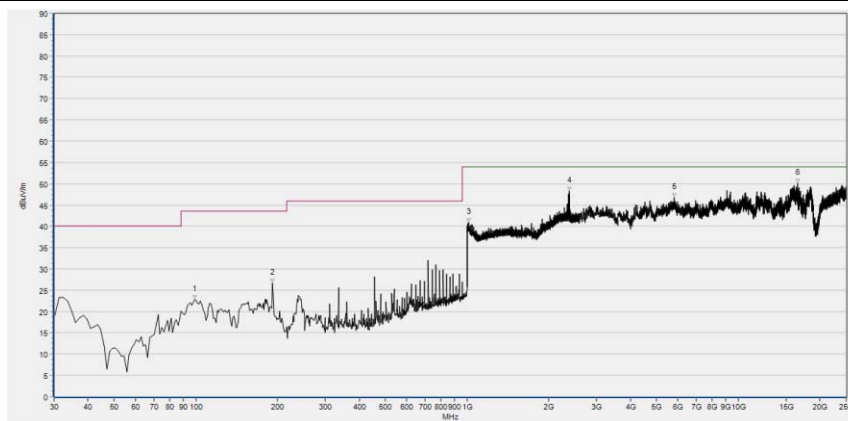

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.199	22.81	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
191.464	26.73	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1010.884	40.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2382.953	48.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5805.819	46.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16514.966	50.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 19



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
191.464	31.12	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
335.932	33.68	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1019.848	41.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2917.730	45.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12135.988	48.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16066.885	49.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
191.464	26.97	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
719.562	31.36	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1000.000	23.34	N/A	N/A	74.00	N/A	74.00	Vertical	PASS
2995.126	44.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10783.597	47.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18531.333	49.38	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 39




Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
191.464	30.71	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
335.932	34.37	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2185.114	43.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5646.954	46.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9361.957	47.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18405.055	49.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

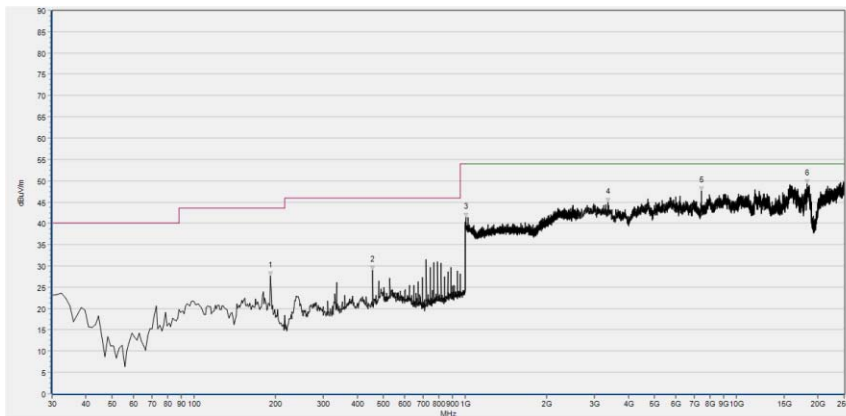

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
191.464	27.65	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
456.120	28.99	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1005.122	41.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3365.812	44.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7439.280	47.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18274.704	49.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

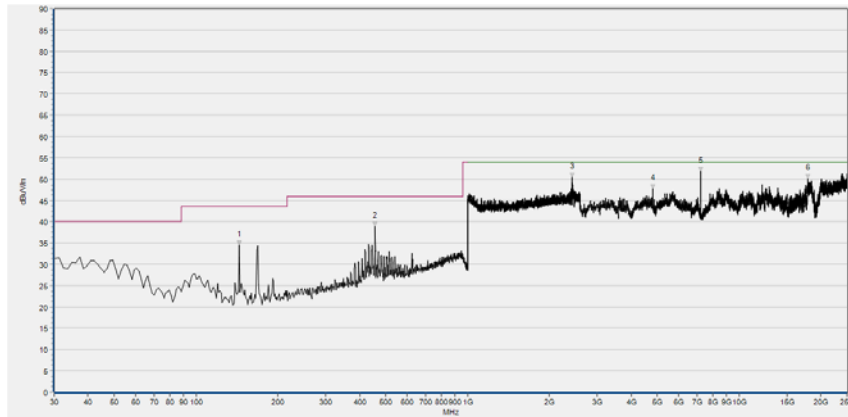**Antenna 2****Plots for Channel = 0**


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
144.118	34.52	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
456.120	38.91	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2429.052	50.39	N/A	N/A	74.00	N.A	54.00	Horizontal	PASS
4803.746	47.69	N/A	N/A	74.00	N.A	54.00	Horizontal	PASS
7207.092	51.77	N/A	N/A	74.00	N.A	54.00	Horizontal	PASS
17956.974	50.05	N/A	N/A	74.00	N.A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)




Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	33.51	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
168.398	33.06	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2434.814	48.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5663.248	48.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7207.092	50.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
17952.901	50.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

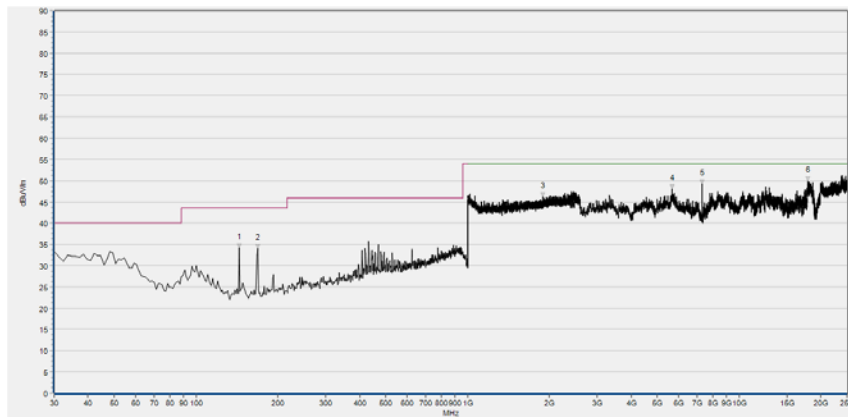**Plot for Channel = 19**


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
144.118	34.17	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
168.398	34.08	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1896.999	46.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5655.101	48.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7321.149	49.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17875.505	49.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

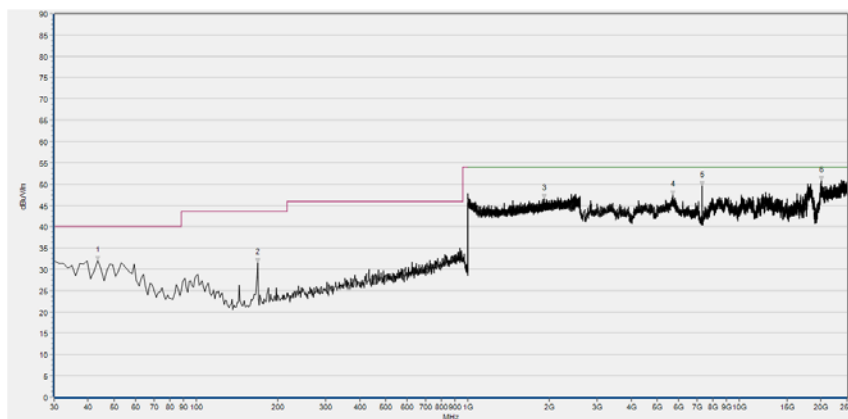


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.354	31.99	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
168.398	31.47	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1918.127	46.66	N/A	N/A	74.00	N/A	74.00	Vertical	PASS
5708.056	47.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7321.149	49.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20099.618	50.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

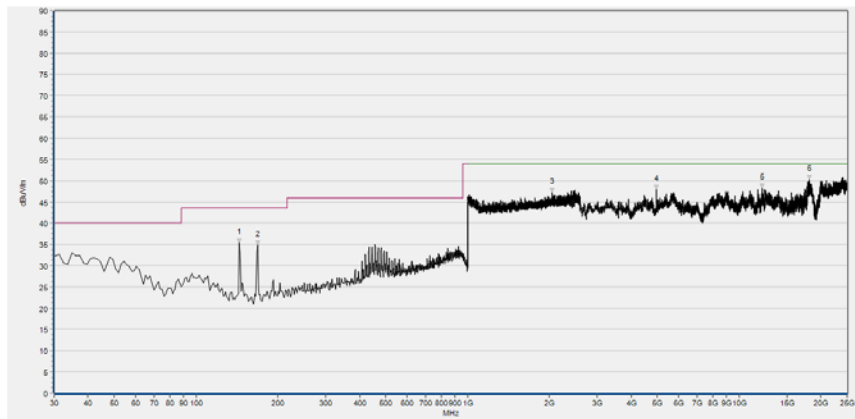**Plot for Channel = 39**


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
144.118	35.42	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
168.398	34.88	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2044.898	47.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4958.538	47.97	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12152.282	48.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18164.721	50.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

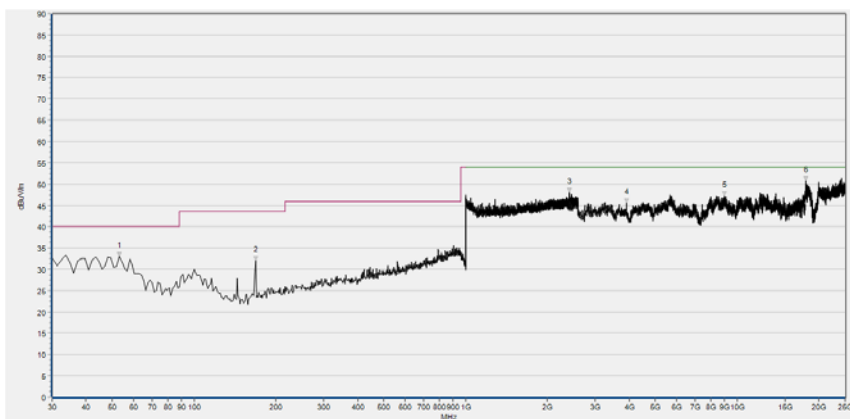


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.066	33.01	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
168.398	31.93	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2411.765	48.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3907.583	45.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8970.904	47.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
17928.460	50.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

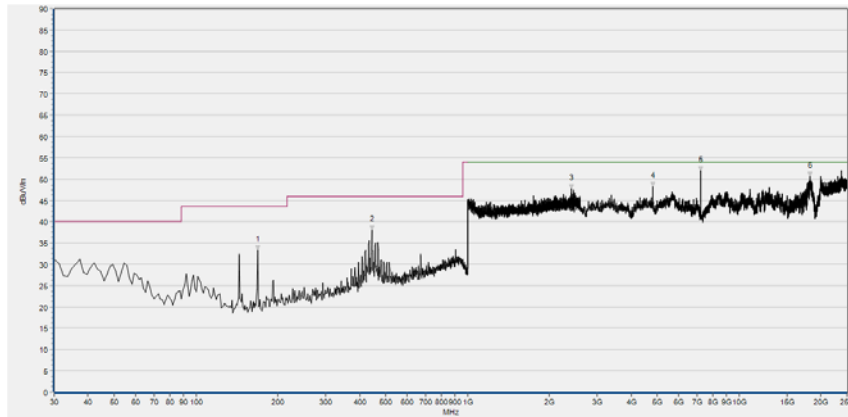**Antenna 3****Plots for Channel = 0**

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
168.398	33.42	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
443.980	38.06	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2415.606	47.77	N/A	N/A	74.00	N.A	54.00	Horizontal	PASS
4803.746	48.33	N/A	N/A	74.00	N.A	54.00	Horizontal	PASS
7207.092	51.88	N/A	N/A	74.00	N.A	54.00	Horizontal	PASS
18262.484	50.60	N/A	N/A	74.00	N.A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

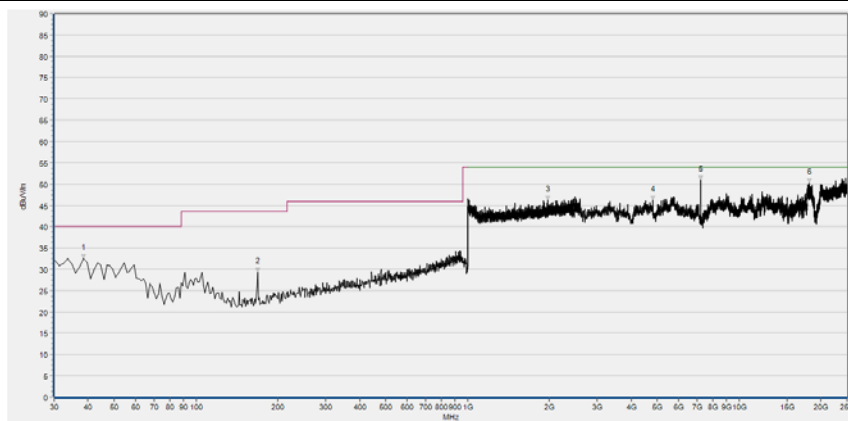

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.498	32.44	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
168.398	29.29	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1975.750	46.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4803.746	46.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7207.092	50.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18156.574	50.32	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 19

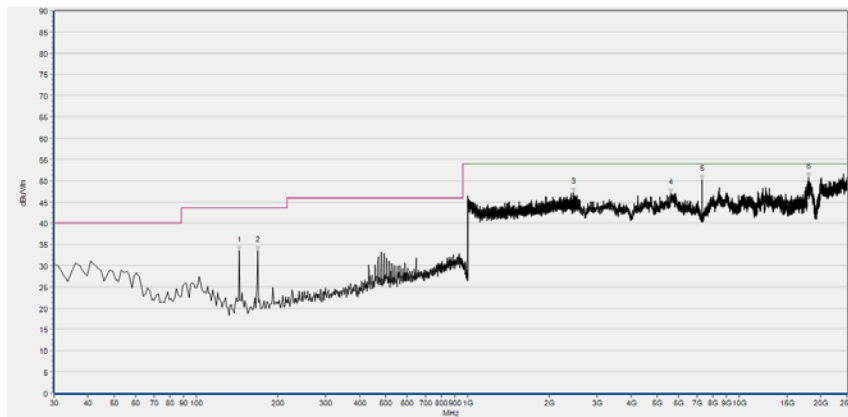

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
144.118	33.59	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
168.398	33.57	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2455.302	47.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5606.219	47.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7321.149	50.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17997.709	50.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

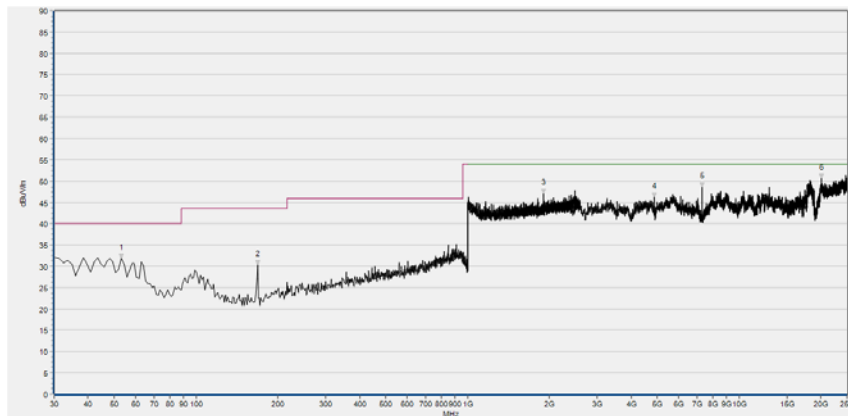

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.066	31.77	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
168.398	30.30	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1908.523	47.08	N/A	N/A	74.00	N/A	74.00	Vertical	PASS
4881.142	46.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7321.149	48.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20099.618	50.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 39

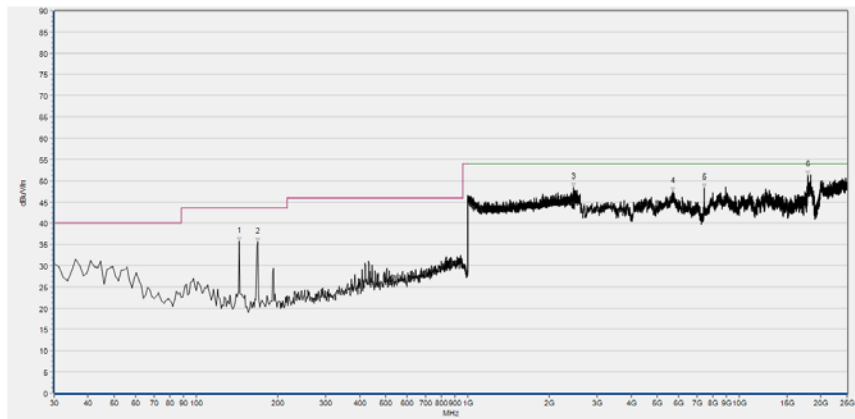

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
144.118	35.77	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
168.398	35.45	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2455.302	48.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5687.689	47.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7439.280	48.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17969.194	51.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

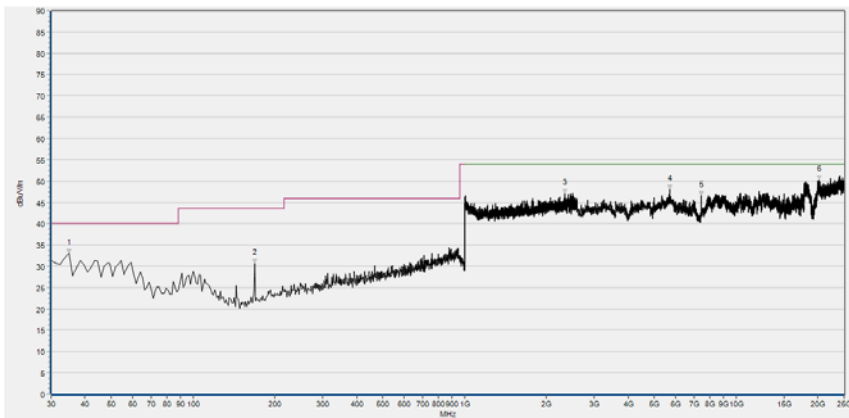

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
34.856	33.07	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
168.398	30.64	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2333.653	47.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5683.615	48.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7439.280	46.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20258.483	50.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{ dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2018.11.06	2019.11.05
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0

**4.3 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2018.08.04	2019.08.03
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.18	2019.05.17
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2018.08.06	2019.08.05
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2018.08.02	2019.08.01
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2018.12.01	2019.11.30
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

————— END OF REPORT —————