



# TEST REPORT

Applicant Name: Telpo Technology Co., Ltd.  
Address: No.15, Juyuan South Road, Guicheng Street, Nanhai District,  
Foshan City, Guangdong, China  
Report Number: 2504A04025E-RF-00C  
FCC ID: 2AJ2B-K1

## Test Standard (s)

FCC PART 15.247

## Sample Description

Product Name: Self-Service Kiosk  
Model No.: K1, K1D, K1Q, K1P, K1DN  
Trade Mark: Telpo  
Received Date: 2025-12-12  
Report Date: 2026-04-17

|              |                                            |
|--------------|--------------------------------------------|
| Test Result: | The EUT complied with the standards above. |
|--------------|--------------------------------------------|

## Prepared and Checked By:

Jason Fan

Jason Fan  
EMC Engineer

## Approved By:

Bob. Liao

Bob. Liao  
EMC Engineer

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked "#" is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked. This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.atc-lab.com

# TABLE OF CONTENTS

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>DOCUMENT REVISION HISTORY</b>                        | <b>4</b>  |
| <b>GENERAL INFORMATION</b>                              | <b>5</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)      | 5         |
| OBJECTIVE                                               | 6         |
| TEST METHODOLOGY                                        | 6         |
| TEST FACILITY                                           | 6         |
| MEASUREMENT UNCERTAINTY                                 | 6         |
| <b>SYSTEM TEST CONFIGURATION</b>                        | <b>7</b>  |
| DESCRIPTION OF TEST CONFIGURATION                       | 7         |
| EUT EXERCISE SOFTWARE AND POWER LEVEL <sup>#</sup>      | 7         |
| SPECIAL ACCESSORIES AND EQUIPMENT MODIFICATIONS         | 7         |
| SUPPORT EQUIPMENT LIST AND DETAILS                      | 8         |
| EXTERNAL I/O CABLE                                      | 8         |
| BLOCK DIAGRAM OF TEST SETUP                             | 8         |
| <b>SUMMARY OF TEST RESULTS</b>                          | <b>10</b> |
| <b>TEST EQUIPMENT LIST</b>                              | <b>11</b> |
| <b>ANTENNA REQUIREMENT</b>                              | <b>12</b> |
| APPLICABLE STANDARD                                     | 12        |
| ANTENNA CONNECTOR CONSTRUCTION                          | 12        |
| <b>AC LINE CONDUCTED EMISSIONS</b>                      | <b>13</b> |
| APPLICABLE STANDARD                                     | 13        |
| EUT SETUP                                               | 13        |
| EMI TEST RECEIVER SETUP                                 | 13        |
| TEST PROCEDURE                                          | 13        |
| CALCULATION                                             | 14        |
| TEST DATA                                               | 14        |
| <b>RADIATED SPURIOUS EMISSION</b>                       | <b>17</b> |
| APPLICABLE STANDARD                                     | 17        |
| EUT SETUP                                               | 17        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP             | 18        |
| TEST PROCEDURE                                          | 19        |
| CALCULATION                                             | 19        |
| TEST DATA                                               | 20        |
| <b>6 dB EMISSION BANDWIDTH &amp; OCCUPIED BANDWIDTH</b> | <b>87</b> |
| APPLICABLE STANDARD                                     | 87        |
| TEST PROCEDURE                                          | 87        |
| TEST DATA                                               | 88        |
| <b>MAXIMUM CONDUCTED OUTPUT POWER</b>                   | <b>89</b> |
| APPLICABLE STANDARD                                     | 89        |
| TEST PROCEDURE                                          | 89        |
| TEST DATA                                               | 89        |
| <b>CONDUCTED SPURIOUS EMISSION</b>                      | <b>90</b> |
| APPLICABLE STANDARD                                     | 90        |
| TEST PROCEDURE                                          | 90        |
| TEST DATA                                               | 90        |
| <b>POWER SPECTRAL DENSITY</b>                           | <b>91</b> |
| APPLICABLE STANDARD                                     | 91        |
| TEST PROCEDURE                                          | 91        |
| TEST DATA                                               | 91        |

**DUTY CYCLE..... 92**

TEST PROCEDURE ..... 92

TEST DATA ..... 92

**APPENDIX ..... 93**

6dB EMISSION BANDWIDTH ..... 94

99% OCCUPIED BANDWIDTH ..... 98

MAXIMUM CONDUCTED OUTPUT POWER ..... 102

POWER SPECTRAL DENSITY ..... 103

DUTY CYCLE..... 107

CONDUCTED SPURIOUS EMISSION ..... 109

**EXHIBIT A-EUT PHOTOGRAPHS ..... 117**

**EXHIBIT B-TEST SETUP PHOTOGRAPHS ..... 118**

DOCUMENT REVISION HISTORY

| Revision Number | Report Number      | Description of Revision | Date of Revision |
|-----------------|--------------------|-------------------------|------------------|
| Rev.00          | 2504A04025E-RF-00C | Original Report         | 2026-04-17       |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

|                                  |                                                                                                                                                             |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name                     | Self-Service Kiosk                                                                                                                                          |
| Tested Model                     | K1                                                                                                                                                          |
| Multiple Model                   | K1D, K1Q , K1P, K1DN                                                                                                                                        |
| Model Difference <sup>#</sup>    | The difference only lies in the model name and sales channels.<br>Please refer to DOS letter for details.<br>The applicant provided model "K1" for testing. |
| Voltage Range <sup>#</sup>       | DC 24V from adapter                                                                                                                                         |
| Adapter Information <sup>#</sup> | Model:GM130-2400500-F<br>Input:100-240V~50/60Hz 2.5A<br>Output:24.0V $\Rightarrow$ 5.0A 120.0W                                                              |

Note 1: There are three combinations for the same model.  
Combination1: Desk-Stand Appearance: master + Printer + Base plate  
Combination2: Floor-Stand Appearance: master + Printer + Lower Stand + Base plate  
Combination3: KDS Appearance: master + Interface box  
Note2: The worst mode after the BT pre-scan is Combination1, therefore, 2.4G WiFi only tests Combination1.

|                                                             |                                                                                         |
|-------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Frequency Range                                             | 2.4G Wi-Fi: 802.11b/g/n20/ax20: 2412-2462MHz<br>802.11n40/ax40: 2422-2452MHz            |
| Maximum Conducted Peak Output Power<br>(actual test result) | 22.34dBm                                                                                |
| Modulation Technique                                        | DSSS, OFDM, OFDMA                                                                       |
| Antenna Specification <sup>#</sup>                          | Internal Antenna, Gain: 2.7 dBi (It is provided by the applicant.)                      |
| Sample Serial Number                                        | For CE&RSE Test: 3ECH-1<br>For RF Conducted Test: 3ECH-2<br>(Assigned by ATC, Shenzhen) |
| Sample/EUT Status                                           | Good condition                                                                          |

## Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

## Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices, and KDB 558074 D01 15.247 Meas Guidance v05r02.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA).The Certificate Number is 4297.01.

## Measurement Uncertainty

| Parameter                          |                 | Uncertainty            |
|------------------------------------|-----------------|------------------------|
| Occupied Channel Bandwidth         |                 | 5 %                    |
| RF Frequency                       |                 | $0.064 \times 10^{-7}$ |
| RF output power, conducted         |                 | 0.3 dB                 |
| Unwanted Emission, conducted       |                 | 1.2 dB                 |
| AC Power Lines Conducted Emissions |                 | 2.7 dB                 |
| Radiated Spurious Emissions        | 9kHz - 30MHz    | 2.1 dB                 |
|                                    | 30MHz - 1GHz    | 4.3 dB                 |
|                                    | 1GHz - 18GHz    | 4.9 dB                 |
|                                    | 18GHz - 26.5GHz | 5.2 dB                 |
| Temperature                        |                 | 1 °C                   |
| Humidity                           |                 | 2 %                    |
| Supply voltages                    |                 | 0.4 %                  |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 2.4G Wi-Fi, total 11 channels are provided to testing:

| Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 1       | 2412        | 4       | 2427        | 7       | 2442        | 10      | 2457        |
| 2       | 2417        | 5       | 2432        | 8       | 2447        | 11      | 2462        |
| 3       | 2422        | 6       | 2437        | 9       | 2452        | /       | /           |

802.11b/g/n20/ax20 mode was tested with Channel 1, 6 and 11.  
802.11n40/ax40 mode was tested with Channel 3, 6 and 9.

EUT Exercise Software and Power Level<sup>#</sup>

| Exercise Software: |           | Developer Mode |                |              |
|--------------------|-----------|----------------|----------------|--------------|
| Mode               | Data Rate | Power Level    |                |              |
|                    |           | Low Channel    | Middle Channel | High Channel |
| 802.11 b           | 1Mbps     | 13             | 13             | 13           |
| 802.11 g           | 6Mbps     | 13             | 13             | 13           |
| 802.11 n20         | MCS0      | 13             | 13             | 13           |
| 802.11 n40         | MCS0      | 12             | 12             | 12           |
| 802.11 ax20        | MCS0      | 12             | 12             | 12           |
| 802.11 ax40        | MCS0      | 12             | 12             | 12           |

Note 1: The information in the above table is provided by the applicant.  
Note 2: The worse-case data rates are determined to be as above for each mode based upon investigations by measuring the output power and PSD across all data rates, bandwidths and modulations.  
Note 3: For 802.11 ax mode, the device not support partial RU mode.

Special Accessories and Equipment Modifications

No special accessories or modifications were used on the device under test (EUT) during the test.

Support Equipment List and Details


| Manufacturer | Description | Model   | Serial Number |
|--------------|-------------|---------|---------------|
| Lenovo       | Mouse       | Unknown | Unknown       |
| Lenovo       | Keyboard    | Unknown | Unknown       |
| Kingston     | USB disk*2  | 32G     | Unknown       |

External I/O Cable


| Cable Description | Shielding Type | Length (m) | From Port | To       |
|-------------------|----------------|------------|-----------|----------|
| RJ45 cable        | No             | 5.0        | EUT       | LAN      |
| USB cable         | No             | 1.2        | EUT       | Mouse    |
| USB cable         | No             | 1.3        | EUT       | Keyboard |
| AC line           | No             | 1.5        | Adapter   | AC mains |
| DC cable          | No             | 1.5        | Adapter   | EUT      |

Block Diagram of Test Setup


For Conducted Emission:

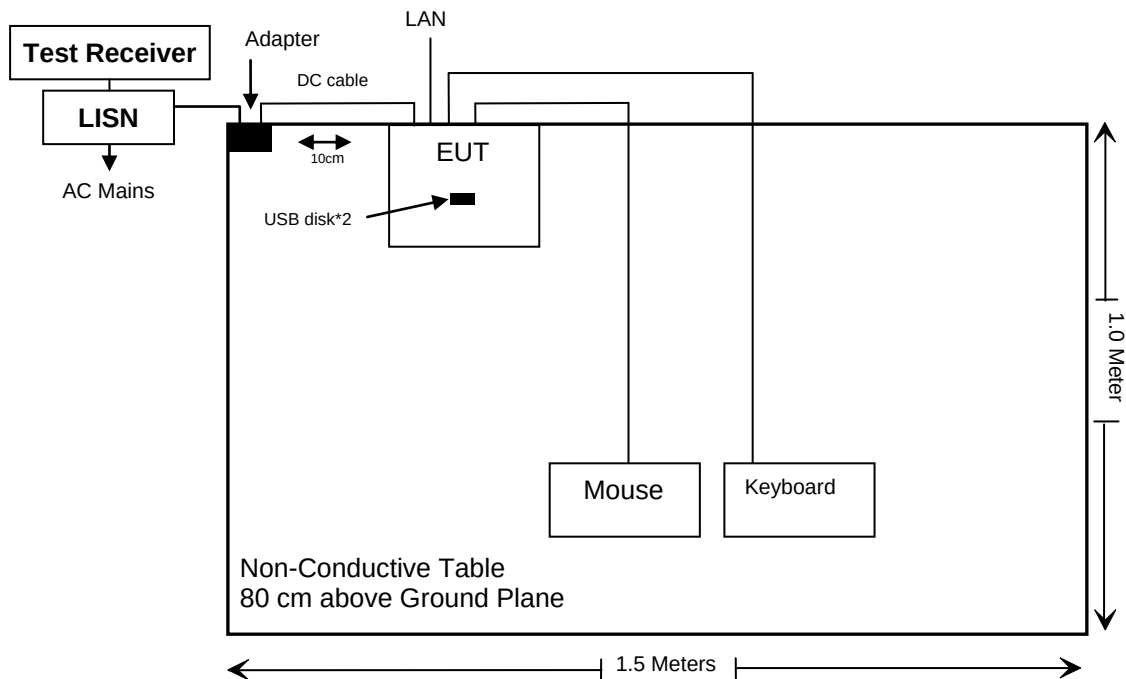

For Radiated Emission Below 1GHz:

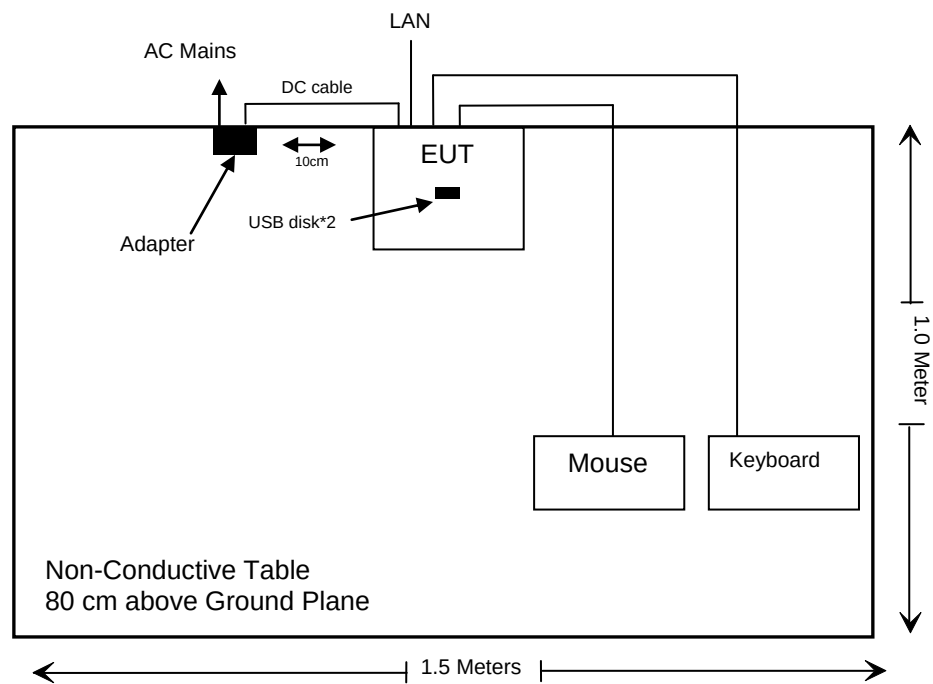

For Radiated Emission Above 1GHz:

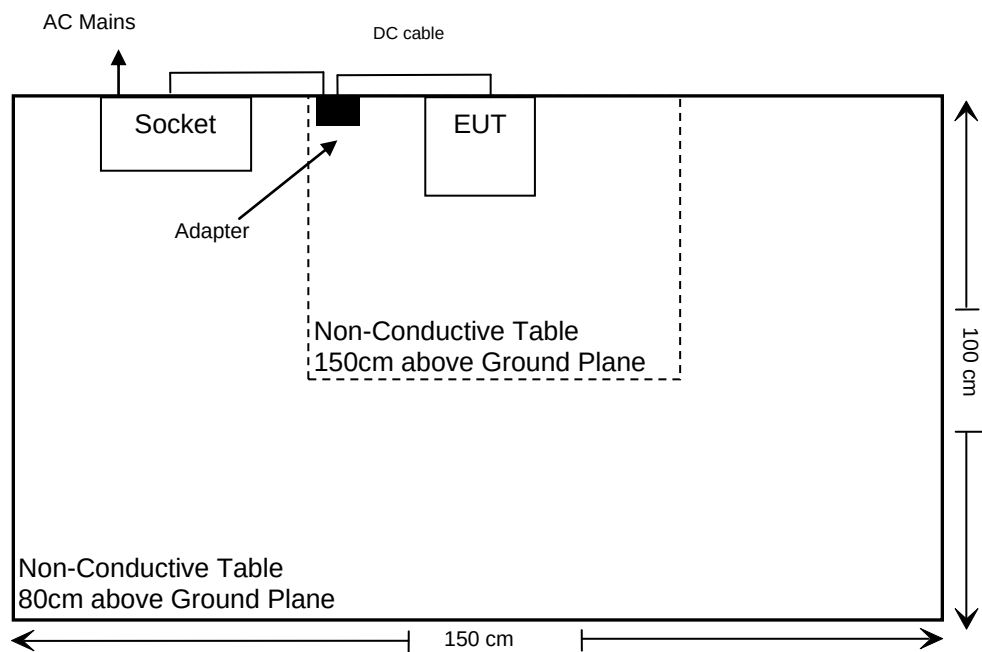

SUMMARY OF TEST RESULTS

| FCC Rules                      | Description of Test                             | Result     |
|--------------------------------|-------------------------------------------------|------------|
| §15.203                        | Antenna Requirement                             | Compliance |
| §15.207(a)                     | AC Line Conducted Emissions                     | Compliance |
| §15.205, §15.209<br>§15.247(d) | Radiated Spurious Emissions                     | Compliance |
| §15.247(a)(2)                  | 6 dB Emission Bandwidth<br>& Occupied Bandwidth | Compliance |
| §15.247(b)(3)                  | Maximum Conducted Output Power                  | Compliance |
| §15.247(d)                     | Conducted Spurious Emission                     | Compliance |
| §15.247(e)                     | Power Spectral Density                          | Compliance |

**TEST EQUIPMENT LIST**

| Manufacturer                                       | Description                       | Model           | Serial Number | Calibration Date | Calibration Due Date |
|----------------------------------------------------|-----------------------------------|-----------------|---------------|------------------|----------------------|
| <b>Conducted Emissions Test</b>                    |                                   |                 |               |                  |                      |
| Rohde & Schwarz                                    | EMI Test Receiver                 | ESCI            | 100784        | 2025/09/17       | 2026/09/16           |
| Rohde & Schwarz                                    | L.I.S.N.                          | ENV216          | 101314        | 2025/09/17       | 2026/09/16           |
| Anritsu Corp                                       | 50 Coaxial Switch                 | MP59B           | 6100237248    | 2025/09/18       | 2026/09/17           |
| Rohde & Schwarz                                    | Pulse Limiter                     | ESH3-Z2         | 100312        | 2025/05/30       | 2026/05/29           |
| Unknown                                            | RF Coaxial Cable                  | No.17           | N0350         | 2025/05/30       | 2026/05/29           |
| Test Software: e3 191218 (V9)                      |                                   |                 |               |                  |                      |
| <b>Radiated Spurious Emission Test(Below 1GHz)</b> |                                   |                 |               |                  |                      |
| Rohde & Schwarz                                    | Test Receiver                     | ESR             | 102725        | 2025/09/18       | 2026/09/17           |
| SONOMA INSTRUMENT                                  | Amplifier                         | 310N            | 186131        | 2026/01/20       | 2027/01/19           |
| Schwarzbeck                                        | Bilog Antenna                     | VULB9163        | 9163-323      | 2024/08/08       | 2027/08/07           |
| Unknown                                            | RF Coaxial Cable                  | No.12           | N040          | 2025/05/30       | 2026/05/29           |
| Unknown                                            | RF Coaxial Cable                  | No.13           | N300          | 2025/05/30       | 2026/05/29           |
| Unknown                                            | RF Coaxial Cable                  | No.14           | N800          | 2025/05/30       | 2026/05/29           |
| BACL                                               | LOOP ANTENNA                      | 1313-1A         | 3110711       | 2024/01/16       | 2027/01/15           |
| Test Software: e3 191218 (V9)                      |                                   |                 |               |                  |                      |
| <b>Radiated Spurious Emission Test(Above 1GHz)</b> |                                   |                 |               |                  |                      |
| Rohde & Schwarz                                    | Spectrum Analyzer                 | FSV40           | 101949        | 2025/09/17       | 2026/09/16           |
| Decentest                                          | Filter Switch Unit                | DT7220FSU       | DQ77927       | 2025/09/18       | 2026/09/17           |
| Decentest                                          | Multiplex Switch Test Control Set | DT7220CSU       | DQ77924       | 2025/09/18       | 2026/09/17           |
| COM-MW                                             | Band Reject Filter                | ZBSF8           | 12232062      | 2025/10/13       | 2026/10/12           |
| A.H. Systems, inc.                                 | Preamplifier                      | PAM-0118        | 226           | 2025/03/20       | 2026/03/19           |
| Schwarzbeck                                        | Horn Antenna                      | BBHA9120D       | 837           | 2023/02/22       | 2026/02/21           |
| Unknown                                            | RF Coaxial Cable                  | No.10           | N050          | 2025/05/30       | 2026/05/29           |
| Unknown                                            | RF Coaxial Cable                  | No.11           | N1000         | 2025/05/30       | 2026/05/29           |
| Unknown                                            | RF Coaxial Cable                  | No.19           | N500          | 2025/05/30       | 2026/05/29           |
| Schwarzbeck                                        | HORN ANTENNA                      | BBHA9170        | 9170-359      | 2023/12/12       | 2026/12/11           |
| BACL                                               | Amplifier                         | BACL-1313-A1840 | 4012521       | 2025/05/30       | 2026/05/29           |
| Unknown                                            | RF Coaxial Cable                  | No.15           | N600          | 2025/05/30       | 2026/05/29           |
| Unknown                                            | RF Coaxial Cable                  | No.16           | N650          | 2025/05/30       | 2026/05/29           |
| Test Software: e3 191218 (V9)                      |                                   |                 |               |                  |                      |
| <b>RF Conducted test</b>                           |                                   |                 |               |                  |                      |
| Rohde & Schwarz                                    | Spectrum Analyzer                 | FSV-40          | 101590        | 2025/09/17       | 2026/09/16           |
| Anritsu                                            | Microwave Peak Power Sensor       | MA24418A        | 12619         | 2025/03/26       | 2026/03/25           |
| WEINSCHL                                           | 10dB Attenuator                   | 5324            | AU 3842       | 2025/03/26       | 2026/03/25           |
| Test Software: JDAutoTestSystem V1.0.0             |                                   |                 |               |                  |                      |

**\* Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## ANTENNA REQUIREMENT

---

### Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Antenna Connector Construction

The EUT has one internal antenna arrangement, which were permanently attached to the EUT. The antenna is 2.7dBi<sup>#</sup>. Fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliance.

## AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a).

### EUT Setup

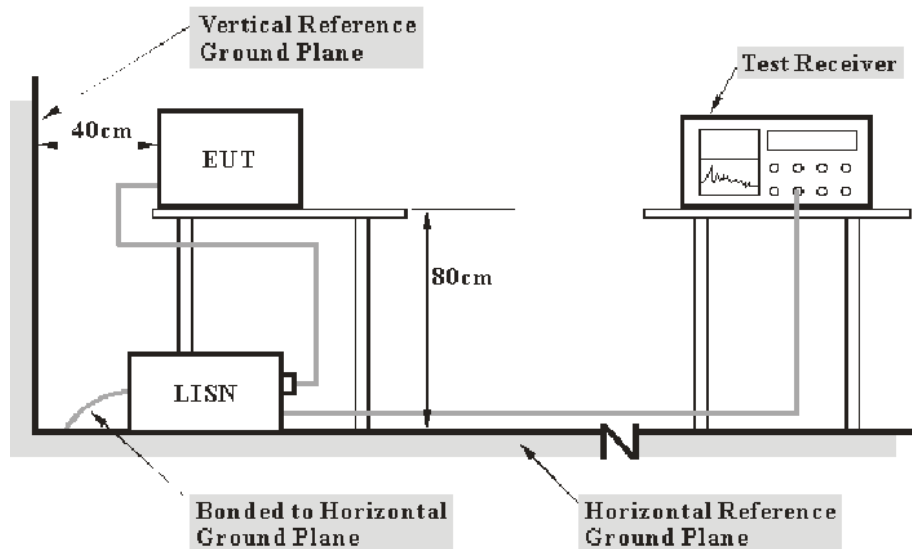

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + 10\text{dB Attenuation(Limiter)}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

## Test Data


### Environmental Conditions

|                     |                        |
|---------------------|------------------------|
| Temperature:        | 24.6℃                  |
| Relative Humidity:  | 42%                    |
| ATM Pressure:       | 100.9 kPa              |
| TestEngineer:       | Ronour Huang           |
| TestDate:           | 2025-12-23             |
| EUT Operation Mode: | 2.4G WIFI Transmitting |

**Test Result:** Compliance, please refer to the below data.

*Note: The pre-scan maximum output power mode and channel: 2.4G WIFI 802.11g High Channel was tested.*


## AC 120V/60Hz, Line:

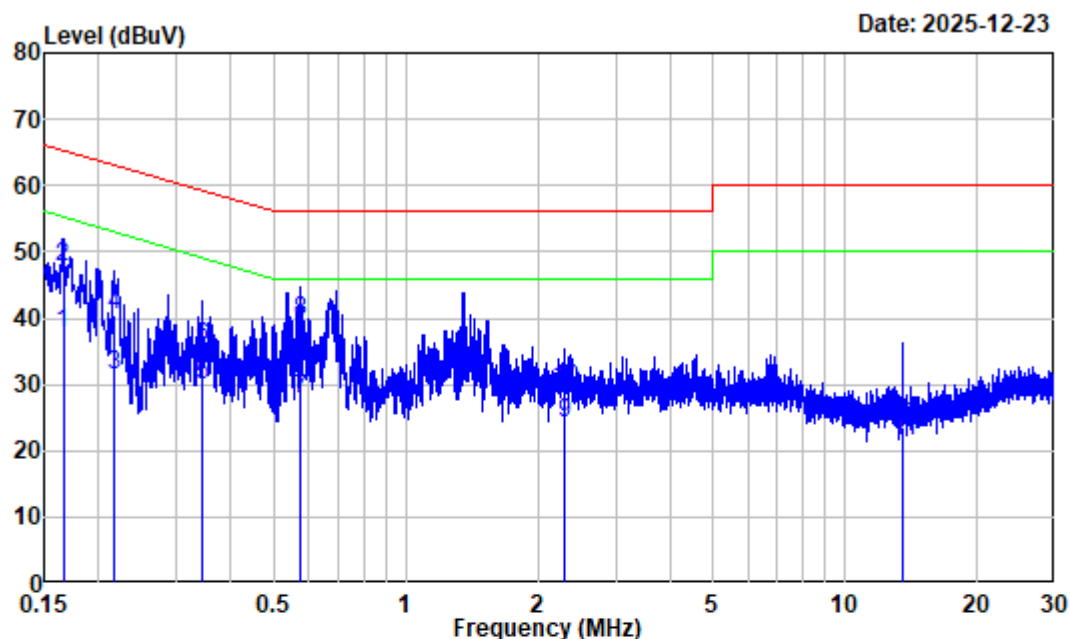

Site : Shielding Room  
 Condition : Line  
 Job No. : 2504A04025E-RF  
 Test Mode : 2.4G WIFI Transmitting  
 Tester : Ronour Huang  
 Receiver Setting: IF B/W 9kHz PK/AV

|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.166  | 19.86  | 17.96         | 37.82 | 55.17         | -17.35        | Average |
| 2  | 0.166  | 19.86  | 27.75         | 47.61 | 65.17         | -17.56        | QP      |
| 3  | 0.216  | 19.86  | 11.53         | 31.39 | 52.97         | -21.58        | Average |
| 4  | 0.216  | 19.86  | 20.73         | 40.59 | 62.97         | -22.38        | QP      |
| 5  | 0.343  | 19.72  | 10.15         | 29.87 | 49.12         | -19.25        | Average |
| 6  | 0.343  | 19.72  | 15.94         | 35.66 | 59.12         | -23.46        | QP      |
| 7  | 0.576  | 19.90  | 7.96          | 27.86 | 46.00         | -18.14        | Average |
| 8  | 0.576  | 19.90  | 19.77         | 39.67 | 56.00         | -16.33        | QP      |
| 9  | 2.304  | 20.50  | 3.64          | 24.14 | 46.00         | -21.86        | Average |
| 10 | 2.304  | 20.50  | 8.74          | 29.24 | 56.00         | -26.76        | QP      |
| 11 | 13.569 | 20.85  | 0.54          | 21.39 | 50.00         | -28.61        | Average |
| 12 | 13.569 | 20.85  | 2.73          | 23.58 | 60.00         | -36.42        | QP      |

## AC 120V/60Hz, Neutral:

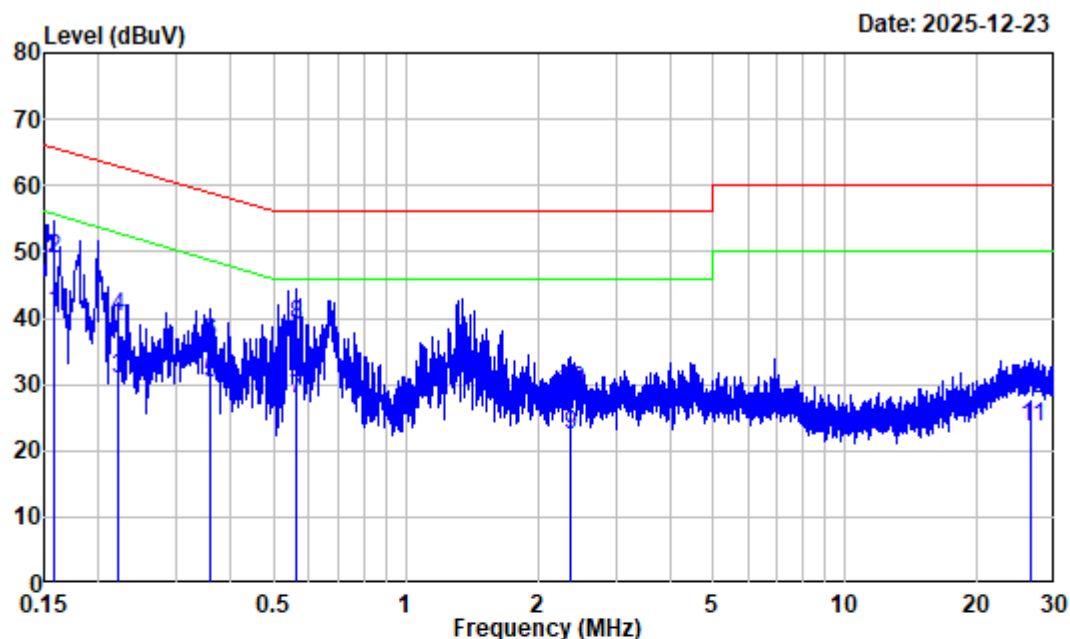

Site : Shielding Room  
 Condition : Neutral  
 Job No. : 2504A04025E-RF  
 Test Mode : 2.4G WIFI Transmitting  
 Tester : Ronour Huang  
 Receiver Setting: IF B/W 9kHz PK/AV

|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.158  | 19.88  | 20.91         | 40.79 | 55.58         | -14.79        | Average |
| 2  | 0.158  | 19.88  | 29.00         | 48.88 | 65.58         | -16.70        | QP      |
| 3  | 0.221  | 19.93  | 10.99         | 30.92 | 52.78         | -21.86        | Average |
| 4  | 0.221  | 19.93  | 20.09         | 40.02 | 62.78         | -22.76        | QP      |
| 5  | 0.358  | 19.88  | 10.31         | 30.19 | 48.77         | -18.58        | Average |
| 6  | 0.358  | 19.88  | 16.40         | 36.28 | 58.77         | -22.49        | QP      |
| 7  | 0.563  | 19.95  | 7.79          | 27.74 | 46.00         | -18.26        | Average |
| 8  | 0.563  | 19.95  | 19.05         | 39.00 | 56.00         | -17.00        | QP      |
| 9  | 2.366  | 20.53  | 1.96          | 22.49 | 46.00         | -23.51        | Average |
| 10 | 2.366  | 20.53  | 8.35          | 28.88 | 56.00         | -27.12        | QP      |
| 11 | 26.558 | 21.08  | 2.47          | 23.55 | 50.00         | -26.45        | Average |
| 12 | 26.558 | 21.08  | 6.69          | 27.77 | 60.00         | -32.23        | QP      |


## RADIATED SPURIOUS EMISSION

### Applicable Standard


FCC §15.205; §15.209; §15.247(d)


### EUT Setup

9kHz - 30MHz:

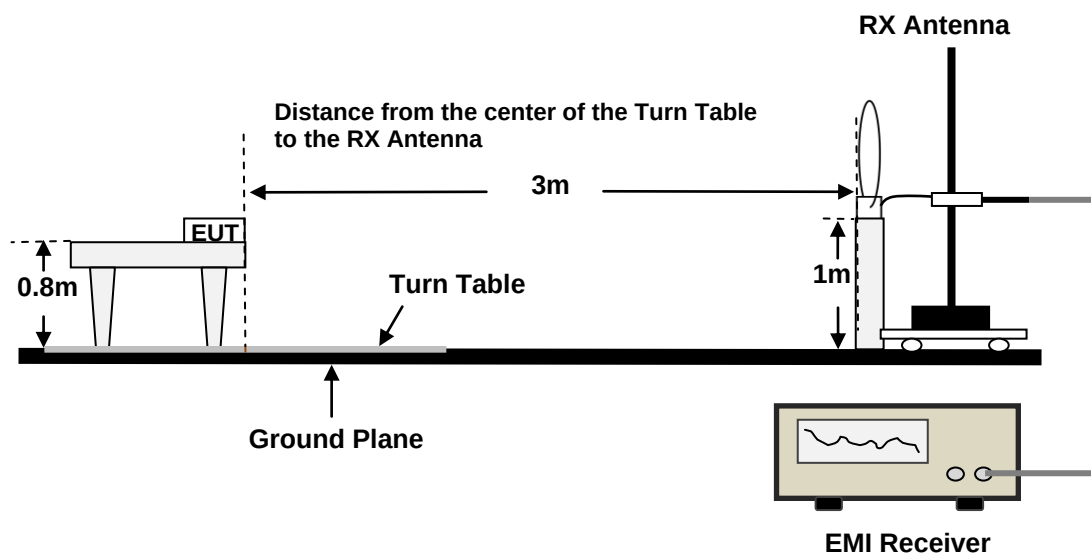

30MHz - 1GHz:

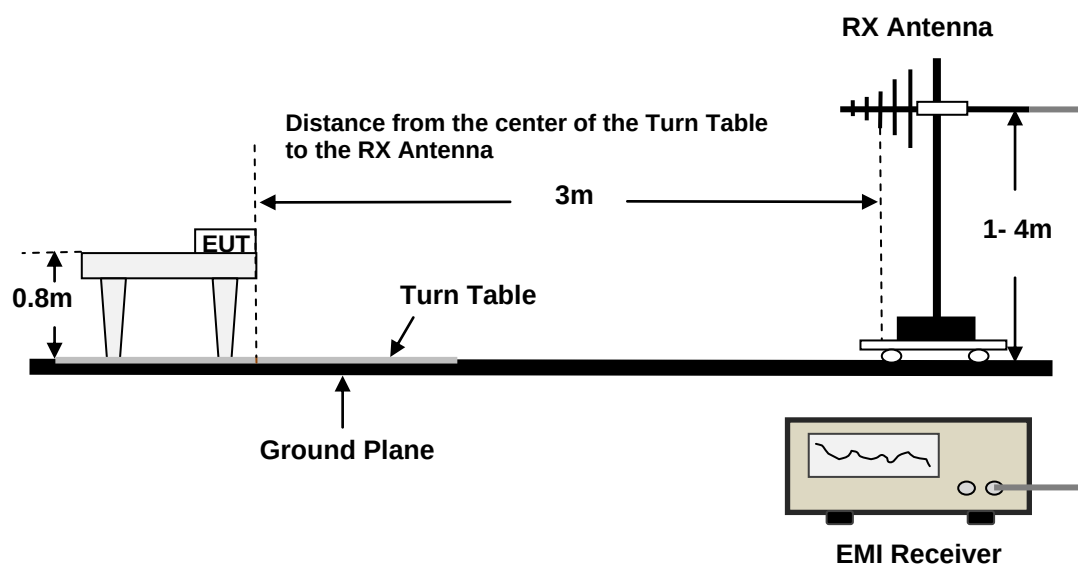

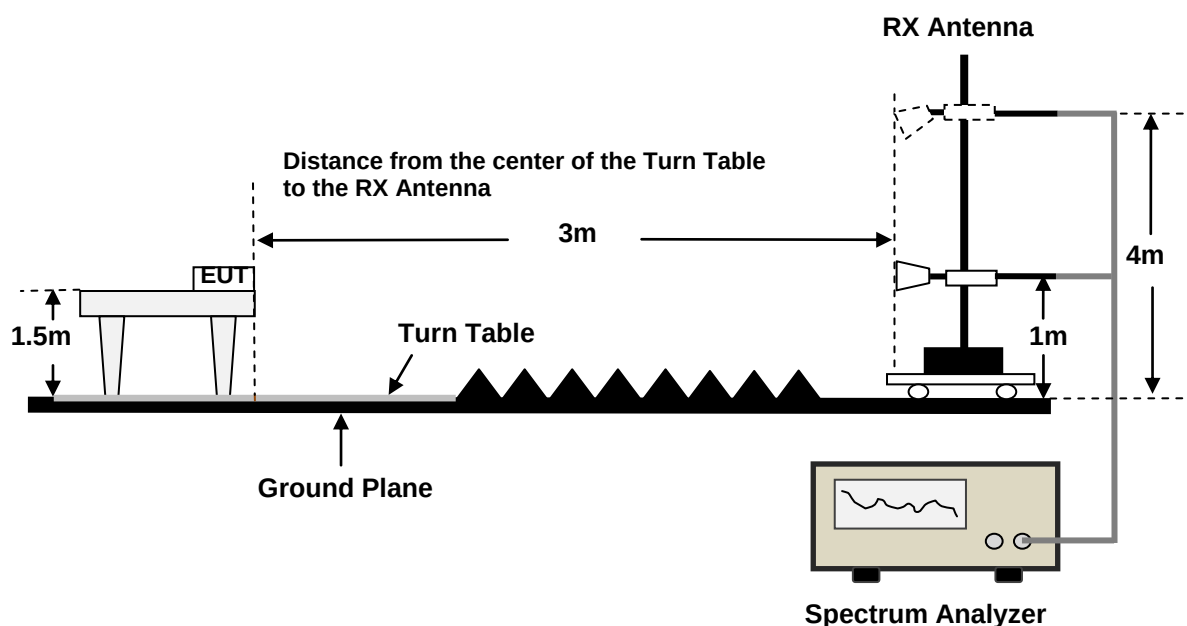**Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, FCC 15.247 limits.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 9kHz to 25GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz -1000MHz:

| Frequency Range | Measurement | RBW    | Video B/W | IF B/W | Detector |
|-----------------|-------------|--------|-----------|--------|----------|
| 9kHz - 150kHz   | PK          | 0.3kHz | 1kHz      | /      | PK       |
|                 | QP/AV       | /      | /         | 200Hz  | QP/AV    |
| 150kHz - 30MHz  | PK          | 10kHz  | 30kHz     | /      | PK       |
|                 | QP/AV       | /      | /         | 9kHz   | QP/AV    |
| 30MHz - 1000MHz | PK          | 100kHz | 300kHz    | /      | PK       |
|                 | QP          | /      | /         | 120kHz | QP       |

1GHz-25GHz:

Pre-scan:

| Measurement | Detector | Duty cycle | RBW  | Video B/W               |
|-------------|----------|------------|------|-------------------------|
| PK          | Peak     | Any        | 1MHz | 3MHz                    |
| Ave.        | Peak     | >98%       | 1MHz | 5kHz                    |
|             |          | <98%       | 1MHz | ≥1/T, no less than 3kHz |

Final measurement for emission identified during the pre-scan:

| Measurement | Detector | Duty cycle | RBW  | Video B/W |
|-------------|----------|------------|------|-----------|
| PK          | Peak     | Any        | 1MHz | 3MHz      |
| Ave.        | Peak     | >98%       | 1MHz | 10Hz      |
|             |          | <98%       | 1MHz | ≥1/T      |

Note 1: T is minimum transmission duration

Note 2: The 1GHz-18GHz testing use the notch filter.

Note 3: The band edge testing use 10dB attenuator.

Note 4: The filters and attenuators are all integrated within the filter switch unit.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

According to FCC §15.209(e), the provisions in §15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

According to FCC§15.31 measurement standard (f)(2), at frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

For 9kHz-30MHz, test distance is 3m, extrapolation limit shall be calculated using Equation:

$$E_{\text{limit-measure}} = E_{\text{limit-Standard}} + 40 \times \log_{10}\left(\frac{d_{\text{Standard}}}{d_{\text{measure}}}\right)$$

Note 1: If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Note 2: For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

## Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data

For Radiated Spurious Emissions, this device is installed vertically in Y-axes orientation. It was provided by applicant. The Y-axes orientation was tested and recorded in the report.

9kHz-1GHz

Environmental Conditions


|                     |                        |
|---------------------|------------------------|
| Temperature:        | 23.7℃                  |
| Relative Humidity:  | 55%                    |
| ATM Pressure:       | 100.7kPa               |
| Test Engineer:      | Jayden Luo             |
| Test Date:          | 2026-04-15             |
| EUT Operation Mode: | 2.4G WIFI Transmitting |

Test Result: Compliance, please refer to the below data.

*Note 1: The Loop Antenna were tested in parallel, perpendicular, and ground-parallel. The worst orientation was parallel and the data was recorded in report.*


*Note 2: The maximum output power mode and channel: 2.4G WIFI 802.11g High Channel was tested.*

9kHz~30MHz:

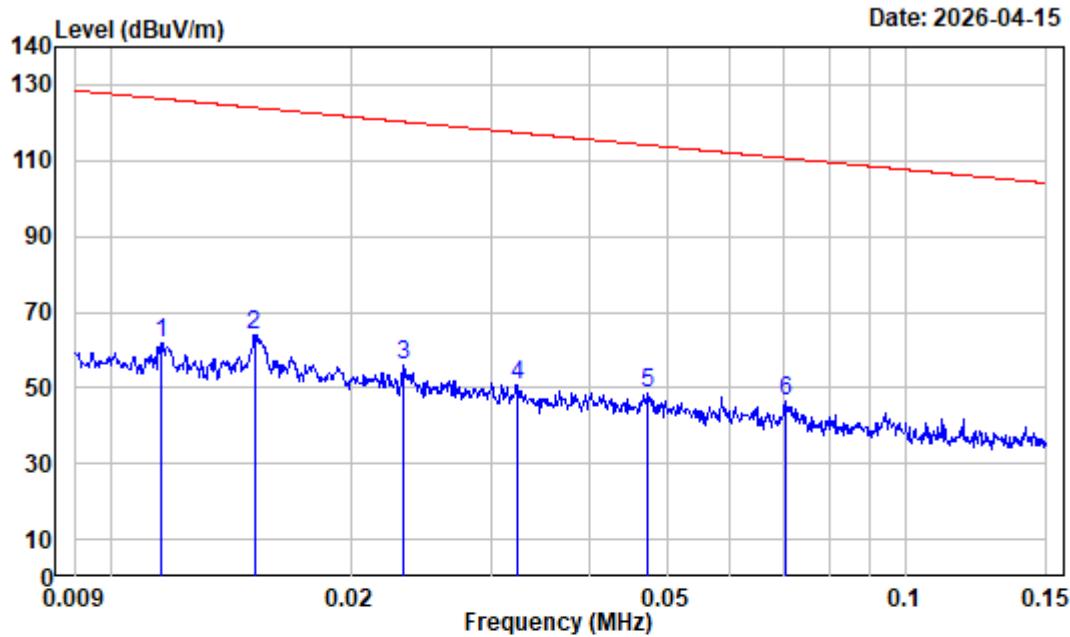

Site : chamber  
Condition : 3m  
Job No. : 2504A04025E-RF  
Polarization : Parallel Tester: Jayden Luo  
Test Mode : 2.4G WIFI Transmitting  
Receiver Setting: RBW:300Hz VBW:1kHz


|   | Freq  | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|-------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz   | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 0.012 | 35.12  | 26.86         | 61.98  | 126.32        | -64.34        | Peak   |
| 2 | 0.015 | 33.55  | 30.40         | 63.95  | 124.00        | -60.05        | Peak   |
| 3 | 0.023 | 29.90  | 26.13         | 56.03  | 120.24        | -64.21        | Peak   |
| 4 | 0.032 | 26.46  | 24.25         | 50.71  | 117.40        | -66.69        | Peak   |
| 5 | 0.047 | 23.37  | 25.14         | 48.51  | 114.10        | -65.59        | Peak   |
| 6 | 0.070 | 19.90  | 26.71         | 46.61  | 110.66        | -64.05        | Peak   |

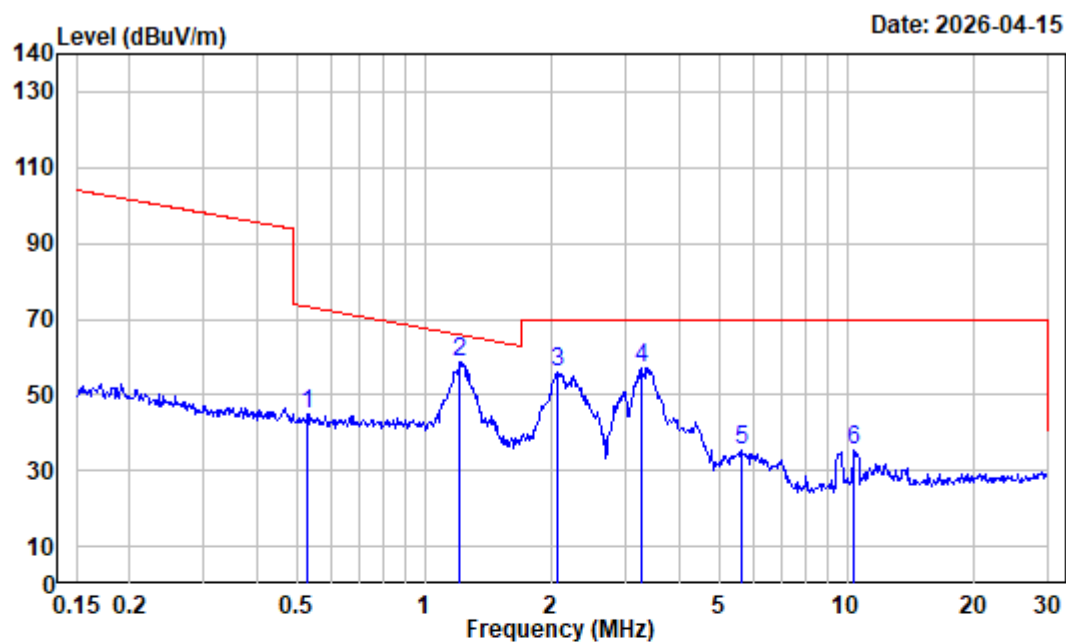

Site : chamber  
 Condition : 3m  
 Job No. : 2504A04025E-RF  
 Polarization : Parallel Tester: Jayden Luo  
 Test Mode : 2.4G WIFI Transmitting  
 Receiver Setting: RBW:10kHz VBW:30kHz

|   | Freq   | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|--------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz    | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 0.529  | 2.95   | 42.17         | 45.12  | 73.11         | -27.99        | Peak   |
| 2 | 1.210  | -2.58  | 61.32         | 58.74  | 65.78         | -7.04         | Peak   |
| 3 | 2.066  | -5.41  | 61.45         | 56.04  | 69.54         | -13.50        | Peak   |
| 4 | 3.276  | -5.96  | 63.17         | 57.21  | 69.54         | -12.33        | Peak   |
| 5 | 5.623  | -6.25  | 41.80         | 35.55  | 69.54         | -33.99        | Peak   |
| 6 | 10.397 | -5.25  | 40.75         | 35.50  | 69.54         | -34.04        | Peak   |

## 30MHz~1GHz:

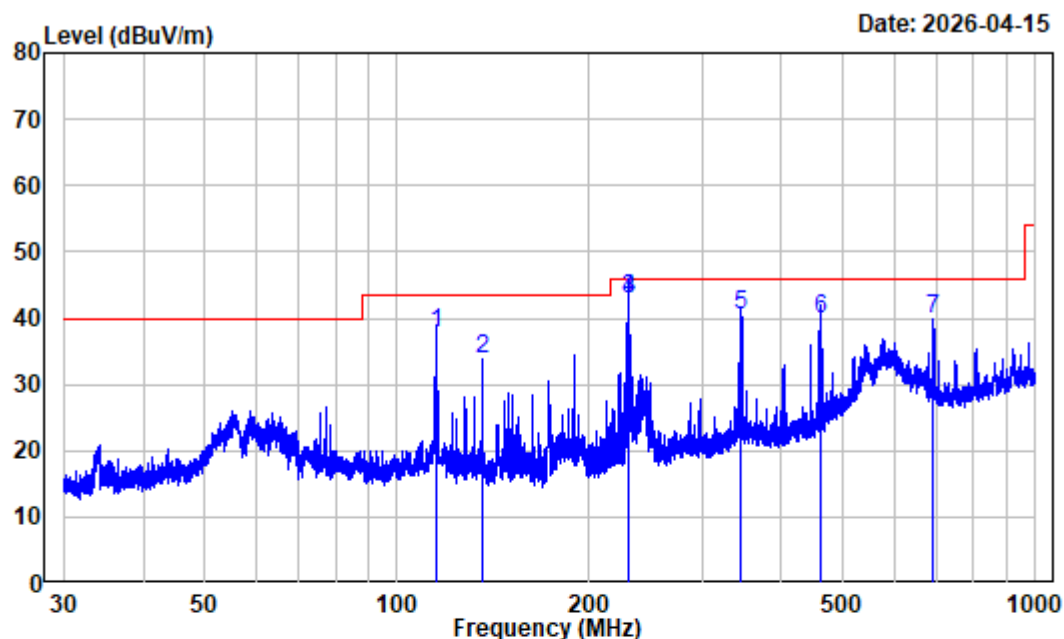

Site : chamber


Condition: 3m HORIZONTAL

Job No. : 2504A04025E-RF Tester: Jayden Luo

Test Mode: 2.4G WIFI Transmitting

: RBW:100kHz VBW:300kHz

|   | Freq    | Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 115.169 | -12.42 | 50.12      | 37.70  | 43.50      | -5.80      | QP     |
| 2 | 135.625 | -14.43 | 48.25      | 33.82  | 43.50      | -9.68      | Peak   |
| 3 | 230.099 | -10.51 | 53.23      | 42.72  | 46.00      | -3.28      | QP     |
| 4 | 230.603 | -10.50 | 53.40      | 42.90  | 46.00      | -3.10      | QP     |
| 5 | 346.202 | -6.80  | 47.21      | 40.41  | 46.00      | -5.59      | QP     |
| 6 | 461.536 | -4.72  | 44.56      | 39.84  | 46.00      | -6.16      | QP     |
| 7 | 692.897 | -1.12  | 41.03      | 39.91  | 46.00      | -6.09      | Peak   |

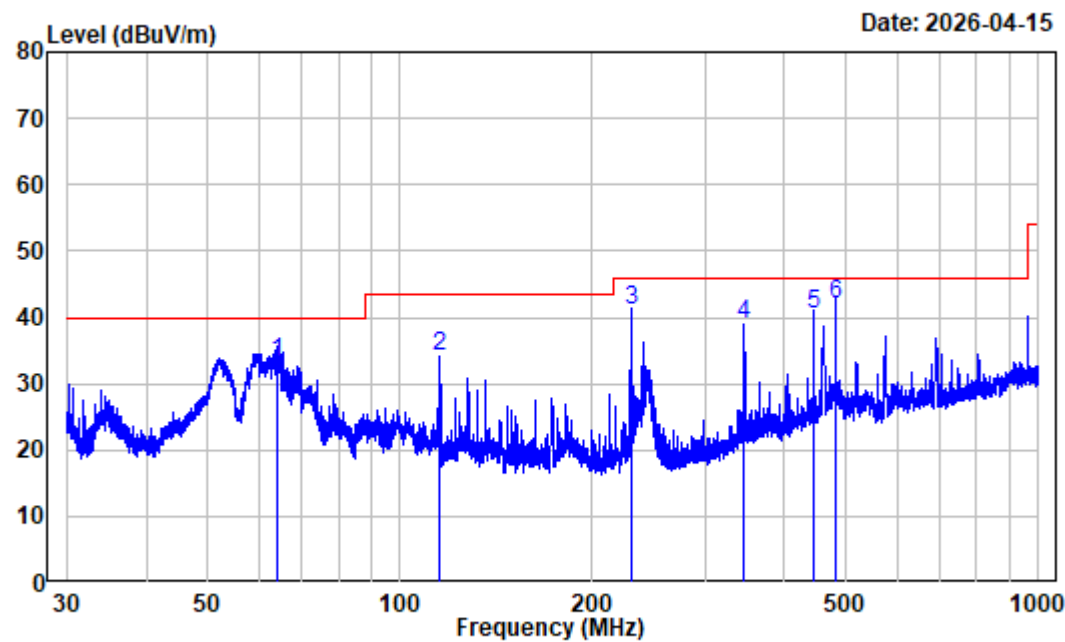

Site : chamber  
Condition: 3m VERTICAL  
Job No. : 2504A04025E-RF      Tester: Jayden Luo  
Test Mode: 2.4G WIFI Transmitting  
              : RBW:100kHz VBW:300kHz

|   | Freq    | Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 64.123  | -12.14 | 45.43      | 33.29  | 40.00      | -6.71      | QP     |
| 2 | 115.119 | -12.41 | 46.58      | 34.17  | 43.50      | -9.33      | Peak   |
| 3 | 230.401 | -10.50 | 51.42      | 40.92  | 46.00      | -5.08      | QP     |
| 4 | 345.292 | -6.80  | 45.64      | 38.84  | 46.00      | -7.16      | Peak   |
| 5 | 445.632 | -4.91  | 45.42      | 40.51  | 46.00      | -5.49      | QP     |
| 6 | 480.317 | -4.38  | 46.46      | 42.08  | 46.00      | -3.92      | QP     |

1GHz-25GHz

Environmental Conditions


|                     |              |
|---------------------|--------------|
| Temperature:        | 21.2℃        |
| Relative Humidity:  | 47%          |
| ATM Pressure:       | 101.8 kPa    |
| Test Engineer:      | Colin Lin    |
| Test Date:          | 2026-01-04   |
| EUT Operation Mode: | Transmitting |

**Test Result:** Compliance, please refer to the below data.

*Note 1: For 1GHz-18GHz, the fundamental with band reject filter.*

*Note 2: For 18GHz-25GHz, the pre-scan maximum output power mode and channel: 2.4G WIFI 802.11g High channel was tested.*

2.4G WIFI 802.11b Low Channel 1GHz-18GHz\_HORIZONTAL

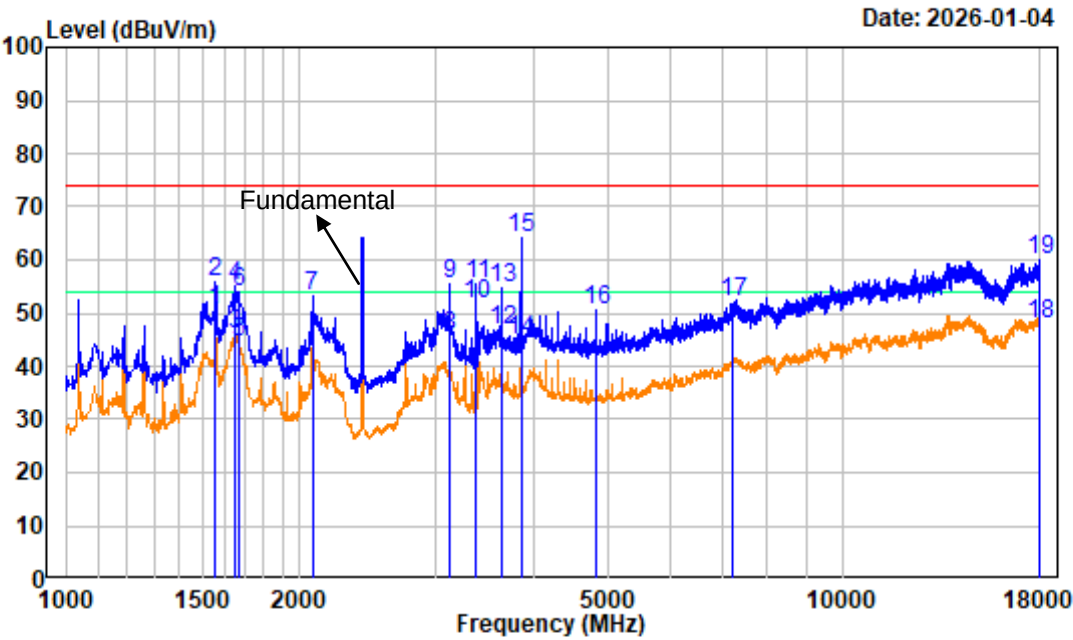

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF

Test Mode : TransmittingTester:Colin Lin


Note : 2.4G WIFI 802.11b Low Channel 2412MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 64.10      | 50.74  | 54.00      | -3.26      | Average |
| 2  | 1558.875 | -13.36 | 69.34      | 55.98  | 74.00      | -18.02     | Peak    |
| 3  | 1650.250 | -13.28 | 59.42      | 46.14  | 54.00      | -7.86      | Average |
| 4  | 1650.250 | -13.28 | 68.34      | 55.06  | 74.00      | -18.94     | Peak    |
| 5  | 1671.500 | -13.17 | 57.78      | 44.61  | 54.00      | -9.39      | Average |
| 6  | 1671.500 | -13.17 | 66.99      | 53.82  | 74.00      | -20.18     | Peak    |
| 7  | 2077.375 | -11.13 | 64.24      | 53.11  | 74.00      | -20.89     | Peak    |
| 8  | 3118.625 | -9.79  | 55.58      | 45.79  | 54.00      | -8.21      | Average |
| 9  | 3118.625 | -9.79  | 65.12      | 55.33  | 74.00      | -18.67     | Peak    |
| 10 | 3377.875 | -9.78  | 61.66      | 51.88  | 54.00      | -2.12      | Average |
| 11 | 3377.875 | -9.78  | 65.34      | 55.56  | 74.00      | -18.44     | Peak    |
| 12 | 3637.125 | -9.10  | 56.02      | 46.92  | 54.00      | -7.08      | Average |
| 13 | 3637.125 | -9.10  | 63.65      | 54.55  | 74.00      | -19.45     | Peak    |
| 14 | 3858.125 | -8.18  | 53.19      | 45.01  | 54.00      | -8.99      | Average |
| 15 | 3858.125 | -8.18  | 72.46      | 64.28  | 74.00      | -9.72      | Peak    |

|    | Freq      | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark  |
|----|-----------|--------|---------------|--------|---------------|---------------|---------|
|    | MHz       | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |         |
| 16 | 4824.000  | -6.64  | 57.28         | 50.64  | 74.00         | -23.36        | Peak    |
| 17 | 7236.000  | -1.32  | 53.51         | 52.19  | 74.00         | -21.81        | Peak    |
| 18 | 17955.380 | 8.19   | 39.75         | 47.94  | 54.00         | -6.06         | Average |
| 19 | 17955.380 | 8.19   | 51.86         | 60.05  | 74.00         | -13.95        | Peak    |

2.4G WIFI 802.11b Low Channel 1GHz-18GHz\_VERTICAL

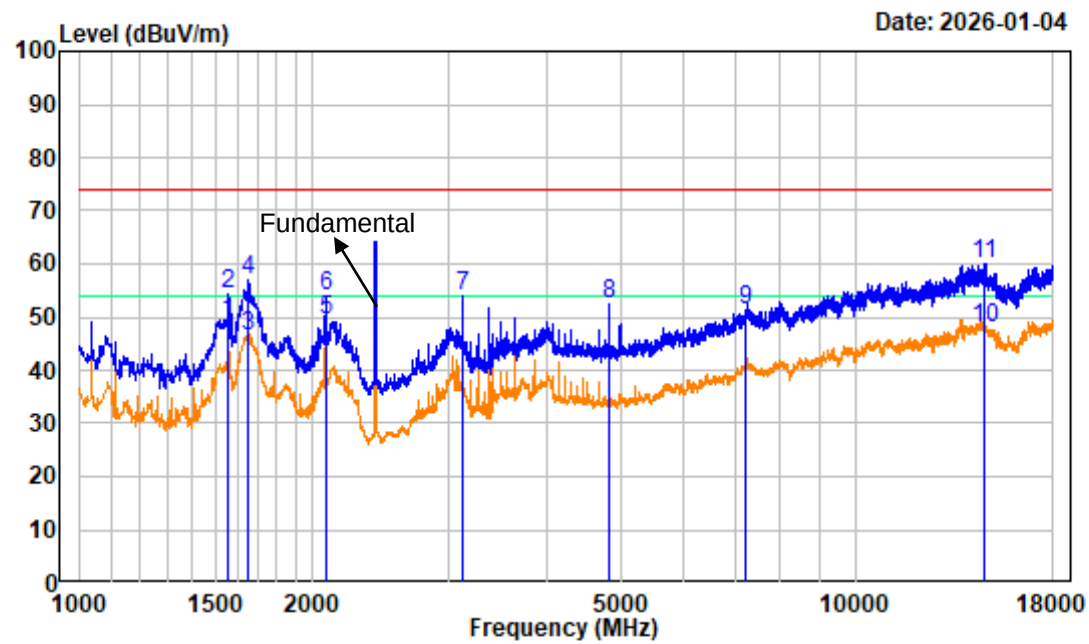

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11b Low Channel 2412MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq      | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|-----------|--------|------------|--------|------------|------------|---------|
|    | MHz       | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875  | -13.36 | 62.39      | 49.03  | 54.00      | -4.97      | Average |
| 2  | 1558.875  | -13.36 | 67.88      | 54.52  | 74.00      | -19.48     | Peak    |
| 3  | 1654.500  | -13.26 | 59.75      | 46.49  | 54.00      | -7.51      | Average |
| 4  | 1654.500  | -13.26 | 70.37      | 57.11  | 74.00      | -16.89     | Peak    |
| 5  | 2079.500  | -11.11 | 60.53      | 49.42  | 54.00      | -4.58      | Average |
| 6  | 2079.500  | -11.11 | 64.95      | 53.84  | 74.00      | -20.16     | Peak    |
| 7  | 3118.625  | -9.79  | 63.70      | 53.91  | 74.00      | -20.09     | Peak    |
| 8  | 4824.000  | -6.64  | 59.25      | 52.61  | 74.00      | -21.39     | Peak    |
| 9  | 7236.000  | -1.32  | 52.60      | 51.28  | 74.00      | -22.72     | Peak    |
| 10 | 14687.130 | 8.29   | 39.46      | 47.75  | 54.00      | -6.25      | Average |
| 11 | 14687.130 | 8.29   | 51.88      | 60.17  | 74.00      | -13.83     | Peak    |


2.4G WIFI 802.11b Low Channel Bandedge\_HORIZONTAL

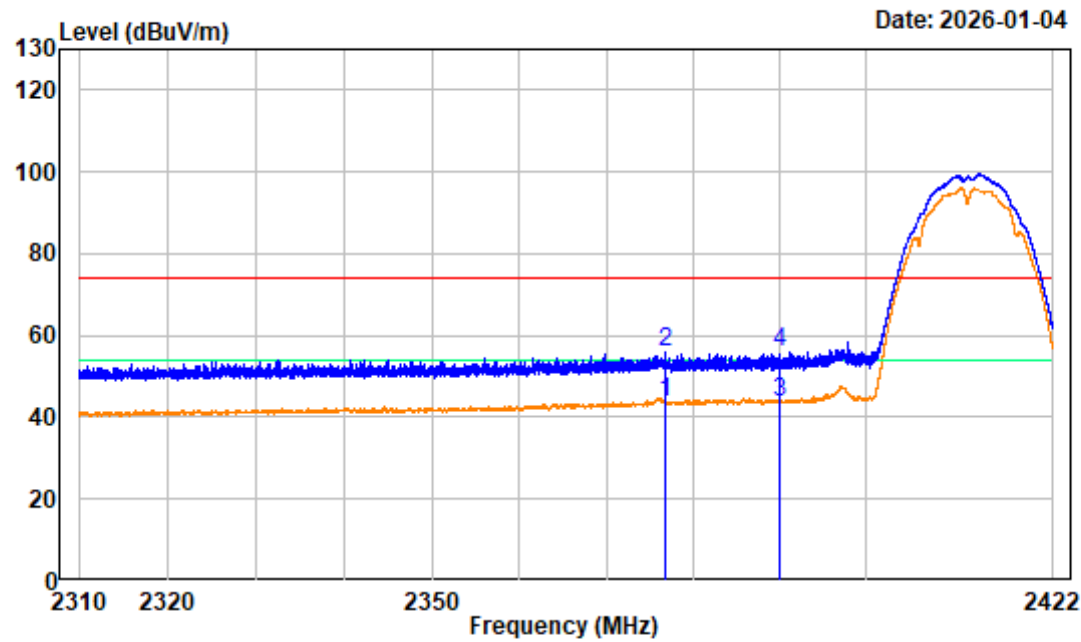

Site : chamber  
Condition : 3m HORIZONTAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11b Low Channel 2412MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2376.710 | -10.21 | 53.96      | 43.75  | 54.00      | -10.25     | Average |
| 2 | 2376.710 | -10.21 | 66.28      | 56.07  | 74.00      | -17.93     | Peak    |
| 3 | 2390.000 | -10.25 | 54.01      | 43.76  | 54.00      | -10.24     | Average |
| 4 | 2390.000 | -10.25 | 66.32      | 56.07  | 74.00      | -17.93     | Peak    |


2.4G WIFI 802.11b Low Channel Bandedge\_VERTICAL

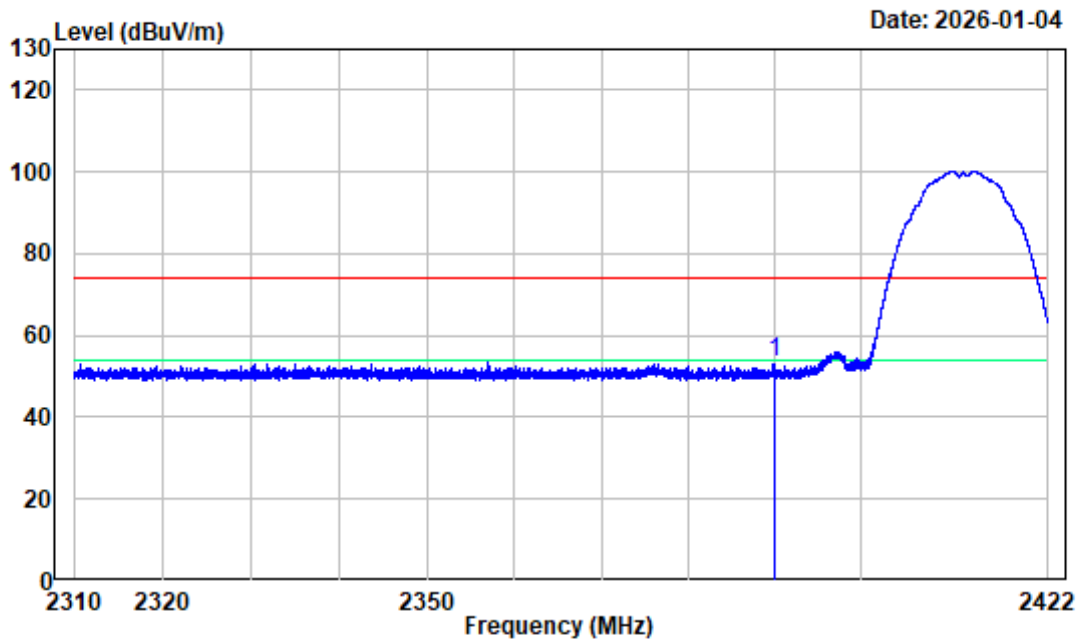

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11b Low Channel 2412MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz

| Freq |          | Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|------|----------|--------|------------|--------|------------|------------|--------|
| MHz  |          | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1    | 2390.000 | -10.25 | 63.56      | 53.31  | 74.00      | -20.69     | Peak   |

2.4G WIFI 802.11b Middle Channel 1GHz-18GHz\_HORIZONTAL

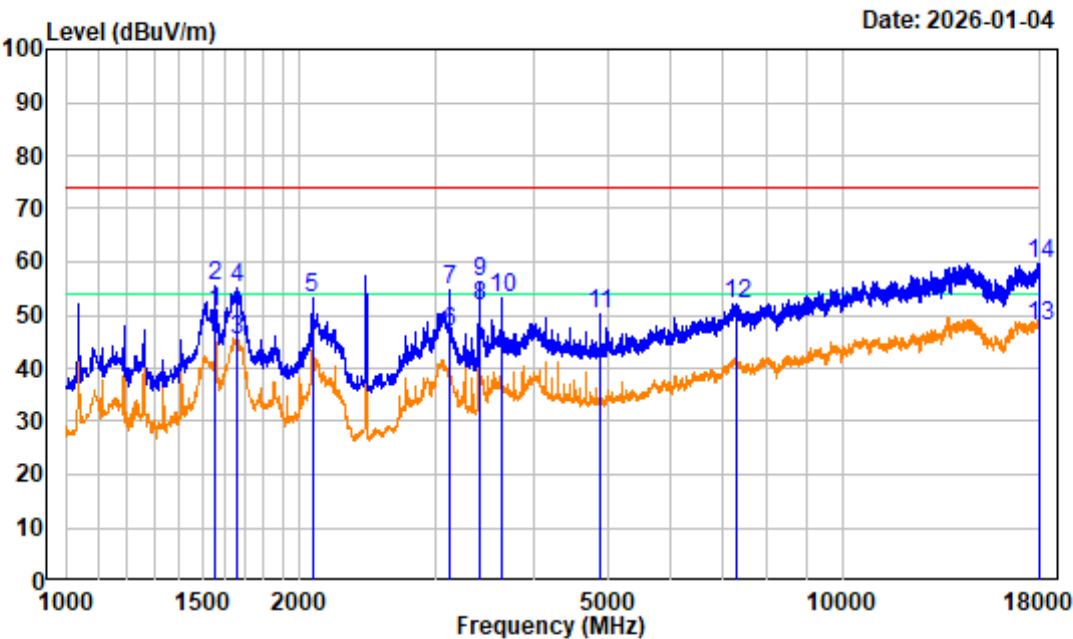

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF

Test Mode : Transmitting


Tester:Colin Lin

Note : 2.4G WIFI 802.11b Middle Channel 2437MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq      | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|-----------|--------|------------|--------|------------|------------|---------|
|    | MHz       | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875  | -13.36 | 63.95      | 50.59  | 54.00      | -3.41      | Average |
| 2  | 1558.875  | -13.36 | 68.89      | 55.53  | 74.00      | -18.47     | Peak    |
| 3  | 1658.750  | -13.23 | 58.63      | 45.40  | 54.00      | -8.60      | Average |
| 4  | 1658.750  | -13.23 | 68.25      | 55.02  | 74.00      | -18.98     | Peak    |
| 5  | 2077.375  | -11.13 | 64.44      | 53.31  | 74.00      | -20.69     | Peak    |
| 6  | 3118.625  | -9.79  | 56.51      | 46.72  | 54.00      | -7.28      | Average |
| 7  | 3118.625  | -9.79  | 64.52      | 54.73  | 74.00      | -19.27     | Peak    |
| 8  | 3411.875  | -9.87  | 61.67      | 51.80  | 54.00      | -2.20      | Average |
| 9  | 3411.875  | -9.87  | 66.28      | 56.41  | 74.00      | -17.59     | Peak    |
| 10 | 3637.125  | -9.10  | 62.40      | 53.30  | 74.00      | -20.70     | Peak    |
| 11 | 4874.000  | -6.58  | 56.95      | 50.37  | 74.00      | -23.63     | Peak    |
| 12 | 7311.000  | -1.12  | 53.19      | 52.07  | 74.00      | -21.93     | Peak    |
| 13 | 17951.130 | 8.17   | 39.81      | 47.98  | 54.00      | -6.02      | Average |
| 14 | 17951.130 | 8.17   | 51.62      | 59.79  | 74.00      | -14.21     | Peak    |

2.4G WIFI 802.11b Middle Channel 1GHz-18GHz\_VERTICAL

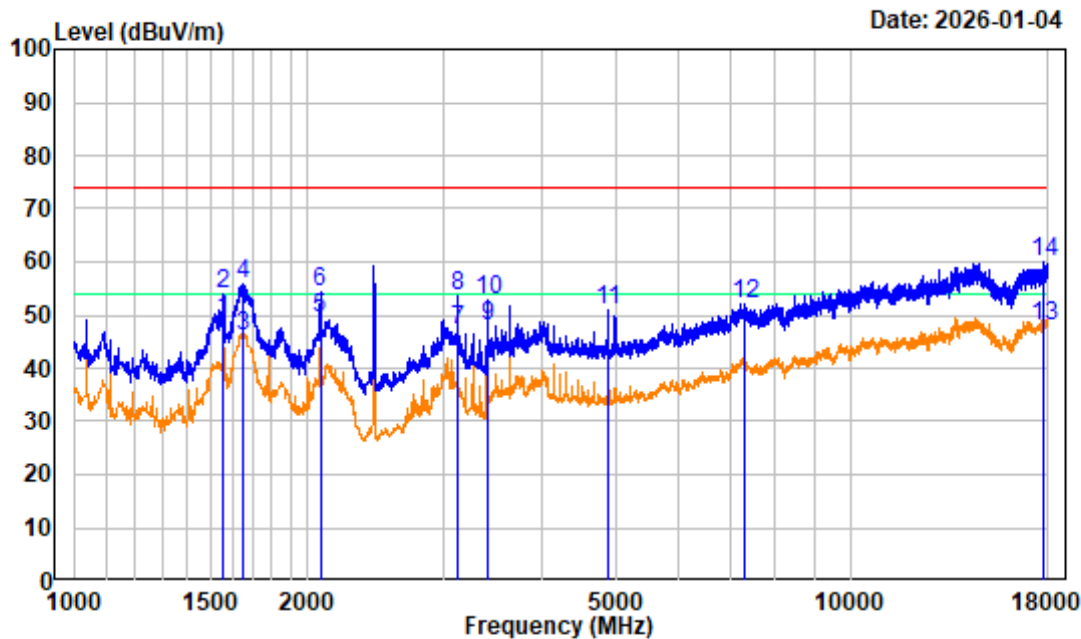

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11b Middle Channel 2437MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq      | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|-----------|--------|------------|--------|------------|------------|---------|
|    | MHz       | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875  | -13.36 | 62.30      | 48.94  | 54.00      | -5.06      | Average |
| 2  | 1558.875  | -13.36 | 67.38      | 54.02  | 74.00      | -19.98     | Peak    |
| 3  | 1648.125  | -13.29 | 59.35      | 46.06  | 54.00      | -7.94      | Average |
| 4  | 1648.125  | -13.29 | 69.16      | 55.87  | 74.00      | -18.13     | Peak    |
| 5  | 2077.375  | -11.13 | 60.62      | 49.49  | 54.00      | -4.51      | Average |
| 6  | 2077.375  | -11.13 | 65.40      | 54.27  | 74.00      | -19.73     | Peak    |
| 7  | 3116.500  | -9.80  | 57.06      | 47.26  | 54.00      | -6.74      | Average |
| 8  | 3116.500  | -9.80  | 63.39      | 53.59  | 74.00      | -20.41     | Peak    |
| 9  | 3414.000  | -9.88  | 57.75      | 47.87  | 54.00      | -6.13      | Average |
| 10 | 3414.000  | -9.88  | 62.84      | 52.96  | 74.00      | -21.04     | Peak    |
| 11 | 4874.000  | -6.58  | 57.47      | 50.89  | 74.00      | -23.11     | Peak    |
| 12 | 7311.000  | -1.12  | 53.36      | 52.24  | 74.00      | -21.76     | Peak    |
| 13 | 17723.750 | 7.71   | 40.11      | 47.82  | 54.00      | -6.18      | Average |
| 14 | 17723.750 | 7.71   | 52.13      | 59.84  | 74.00      | -14.16     | Peak    |

2.4G WIFI 802.11b High Channel 1GHz-18GHz\_HORIZONTAL

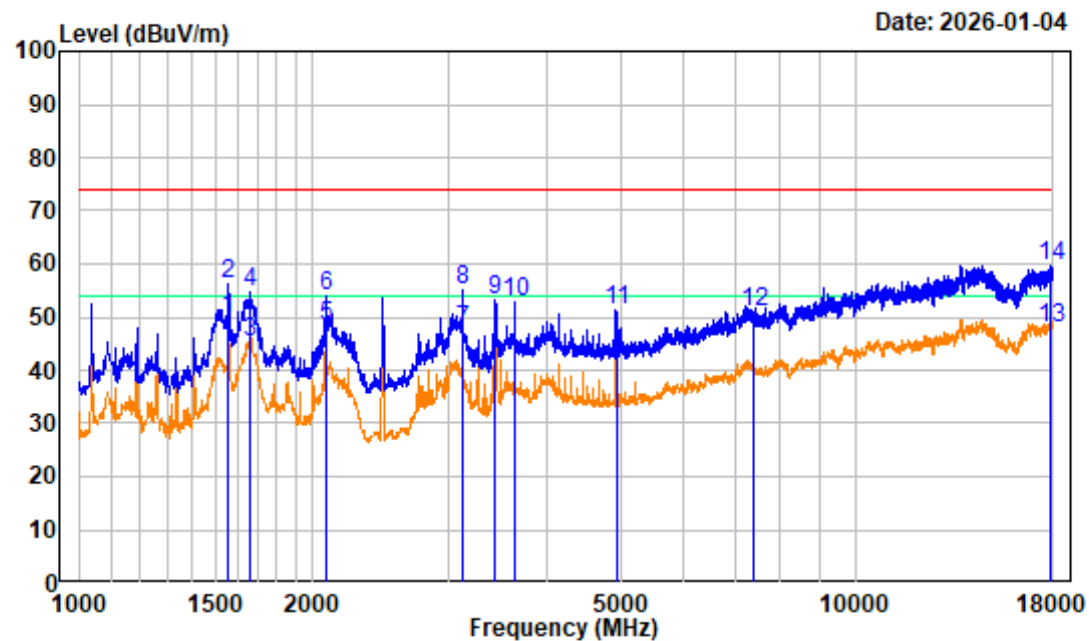

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF

Test Mode : Transmitting


Tester:Colin Lin

Note : 2.4G WIFI 802.11b High Channel 2462MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq      | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|-----------|--------|------------|--------|------------|------------|---------|
|    | MHz       | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875  | -13.36 | 63.12      | 49.76  | 54.00      | -4.24      | Average |
| 2  | 1558.875  | -13.36 | 69.44      | 56.08  | 74.00      | -17.92     | Peak    |
| 3  | 1660.875  | -13.23 | 58.58      | 45.35  | 54.00      | -8.65      | Average |
| 4  | 1660.875  | -13.23 | 67.80      | 54.57  | 74.00      | -19.43     | Peak    |
| 5  | 2079.500  | -11.11 | 59.45      | 48.34  | 54.00      | -5.66      | Average |
| 6  | 2079.500  | -11.11 | 65.00      | 53.89  | 74.00      | -20.11     | Peak    |
| 7  | 3118.625  | -9.79  | 57.30      | 47.51  | 54.00      | -6.49      | Average |
| 8  | 3118.625  | -9.79  | 64.71      | 54.92  | 74.00      | -19.08     | Peak    |
| 9  | 3443.750  | -9.85  | 62.89      | 53.04  | 74.00      | -20.96     | Peak    |
| 10 | 3637.125  | -9.10  | 61.93      | 52.83  | 74.00      | -21.17     | Peak    |
| 11 | 4924.000  | -6.48  | 57.73      | 51.25  | 74.00      | -22.75     | Peak    |
| 12 | 7386.000  | -1.31  | 52.27      | 50.96  | 74.00      | -23.04     | Peak    |
| 13 | 17915.000 | 8.23   | 39.71      | 47.94  | 54.00      | -6.06      | Average |
| 14 | 17915.000 | 8.23   | 51.53      | 59.76  | 74.00      | -14.24     | Peak    |


2.4G WIFI 802.11b High Channel 1GHz-18GHz\_VERTICAL

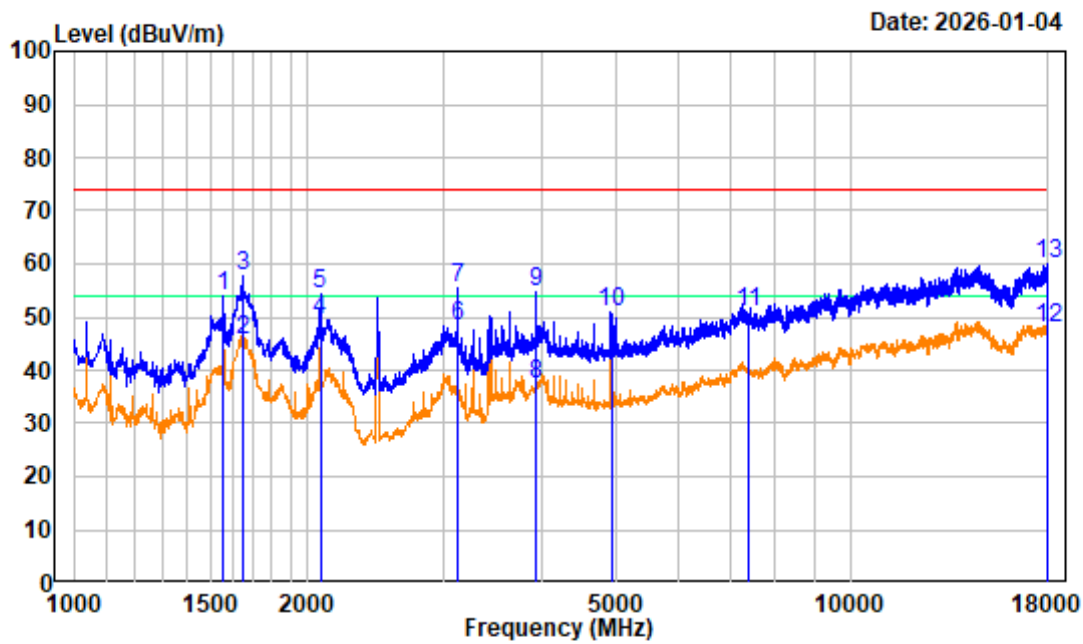

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11b High Channel 2462MHz 1GHz-18GHz  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq      | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|-----------|--------|------------|--------|------------|------------|---------|
|    | MHz       | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875  | -13.36 | 67.23      | 53.87  | 74.00      | -20.13     | Peak    |
| 2  | 1648.125  | -13.29 | 59.02      | 45.73  | 54.00      | -8.27      | Average |
| 3  | 1648.125  | -13.29 | 71.03      | 57.74  | 74.00      | -16.26     | Peak    |
| 4  | 2077.375  | -11.13 | 60.40      | 49.27  | 54.00      | -4.73      | Average |
| 5  | 2077.375  | -11.13 | 65.52      | 54.39  | 74.00      | -19.61     | Peak    |
| 6  | 3118.625  | -9.79  | 58.22      | 48.43  | 54.00      | -5.57      | Average |
| 7  | 3118.625  | -9.79  | 65.37      | 55.58  | 74.00      | -18.42     | Peak    |
| 8  | 3938.875  | -8.33  | 45.70      | 37.37  | 54.00      | -16.63     | Average |
| 9  | 3938.875  | -8.33  | 63.01      | 54.68  | 74.00      | -19.32     | Peak    |
| 10 | 4924.000  | -6.48  | 57.41      | 50.93  | 74.00      | -23.07     | Peak    |
| 11 | 7386.000  | -1.31  | 52.23      | 50.92  | 74.00      | -23.08     | Peak    |
| 12 | 17929.880 | 8.21   | 39.64      | 47.85  | 54.00      | -6.15      | Average |
| 13 | 17929.880 | 8.21   | 51.77      | 59.98  | 74.00      | -14.02     | Peak    |

## 2.4G WIFI 802.11b High Channel Bandedge\_HORIZONTAL

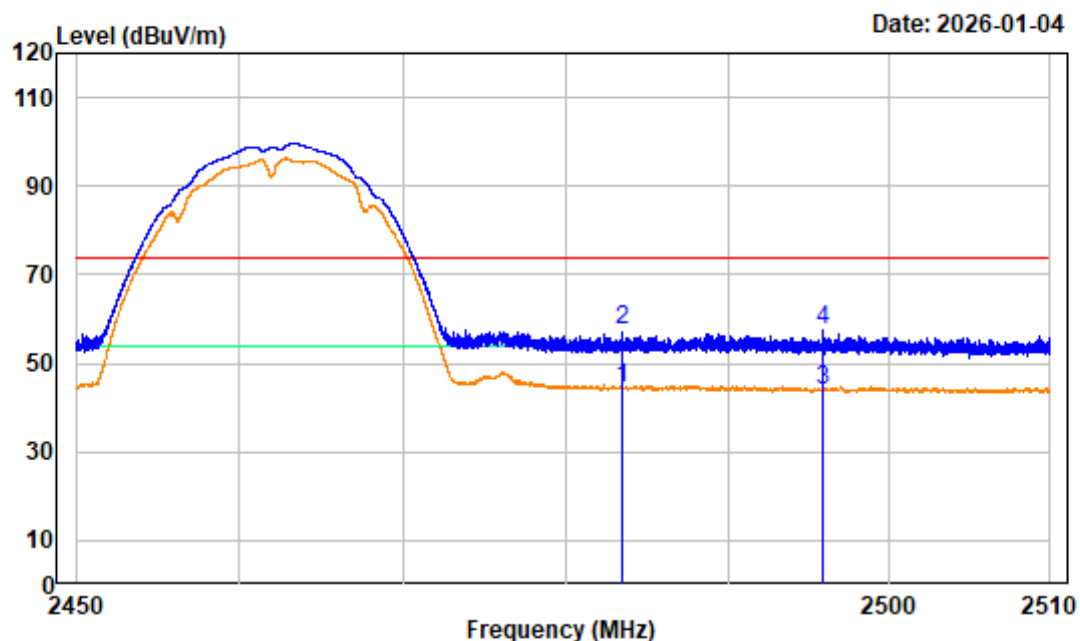

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF

Test Mode : Transmitting


Tester:Colin Lin

Note : 2.4G WIFI 802.11b High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark  |
|---|----------|--------|---------------|--------|---------------|---------------|---------|
|   | MHz      | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |         |
| 1 | 2483.500 | -10.23 | 54.71         | 44.48  | 54.00         | -9.52         | Average |
| 2 | 2483.500 | -10.23 | 67.70         | 57.47  | 74.00         | -16.53        | Peak    |
| 3 | 2495.900 | -10.27 | 54.42         | 44.15  | 54.00         | -9.85         | Average |
| 4 | 2495.900 | -10.27 | 67.74         | 57.47  | 74.00         | -16.53        | Peak    |

2.4G WIFI 802.11b High Channel Bandedge\_VERTICAL

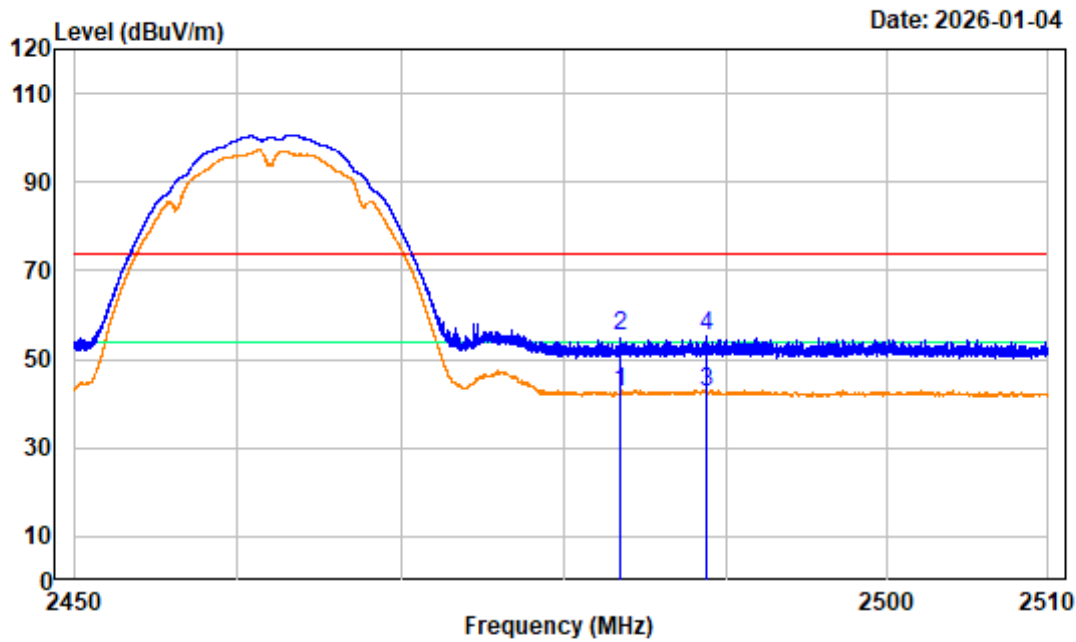

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11b High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2483.500 | -10.23 | 52.72      | 42.49  | 54.00      | -11.51     | Average |
| 2 | 2483.500 | -10.23 | 65.54      | 55.31  | 74.00      | -18.69     | Peak    |
| 3 | 2488.850 | -10.25 | 52.84      | 42.59  | 54.00      | -11.41     | Average |
| 4 | 2488.850 | -10.25 | 65.56      | 55.31  | 74.00      | -18.69     | Peak    |

2.4G WIFI 802.11g Low Channel 1GHz-18GHz\_HORIZONTAL

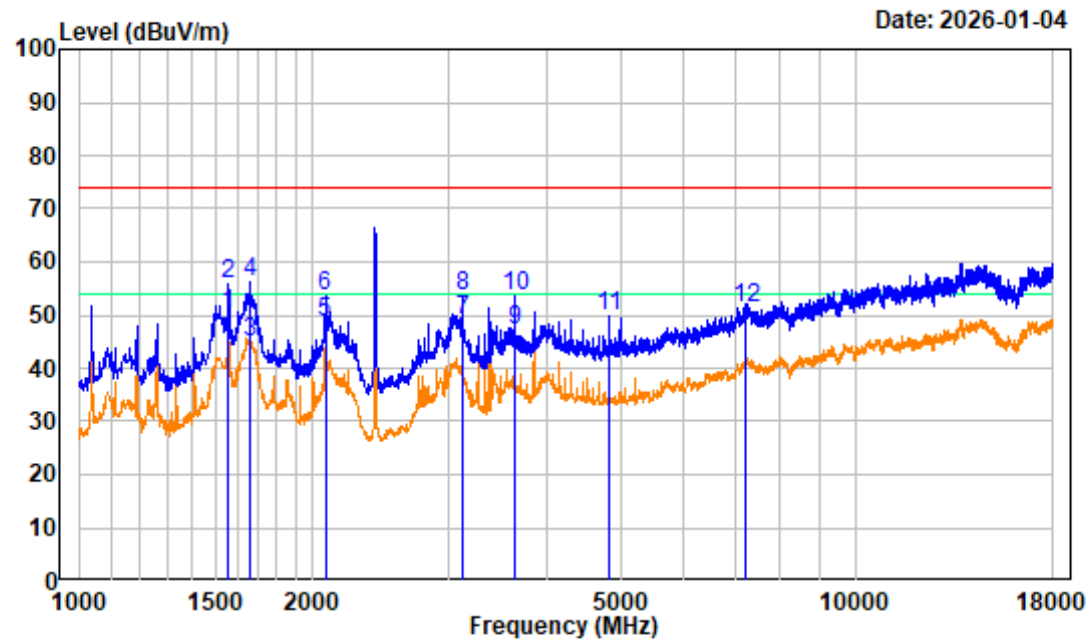

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF

Test Mode : Transmitting


Tester:Colin Lin

Note : 2.4G WIFI 802.11g Low Channel 2412MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 63.70      | 50.34  | 54.00      | -3.66      | Average |
| 2  | 1558.875 | -13.36 | 69.25      | 55.89  | 74.00      | -18.11     | Peak    |
| 3  | 1660.875 | -13.23 | 58.28      | 45.05  | 54.00      | -8.95      | Average |
| 4  | 1660.875 | -13.23 | 69.30      | 56.07  | 74.00      | -17.93     | Peak    |
| 5  | 2077.375 | -11.13 | 59.73      | 48.60  | 54.00      | -5.40      | Average |
| 6  | 2077.375 | -11.13 | 64.78      | 53.65  | 74.00      | -20.35     | Peak    |
| 7  | 3118.625 | -9.79  | 58.76      | 48.97  | 54.00      | -5.03      | Average |
| 8  | 3118.625 | -9.79  | 63.50      | 53.71  | 74.00      | -20.29     | Peak    |
| 9  | 3637.125 | -9.10  | 56.22      | 47.12  | 54.00      | -6.88      | Average |
| 10 | 3637.125 | -9.10  | 62.60      | 53.50  | 74.00      | -20.50     | Peak    |
| 11 | 4824.000 | -6.64  | 56.29      | 49.65  | 74.00      | -24.35     | Peak    |
| 12 | 7236.000 | -1.32  | 52.73      | 51.41  | 74.00      | -22.59     | Peak    |

2.4G WIFI 802.11g Low Channel 1GHz-18GHz\_VERTICAL

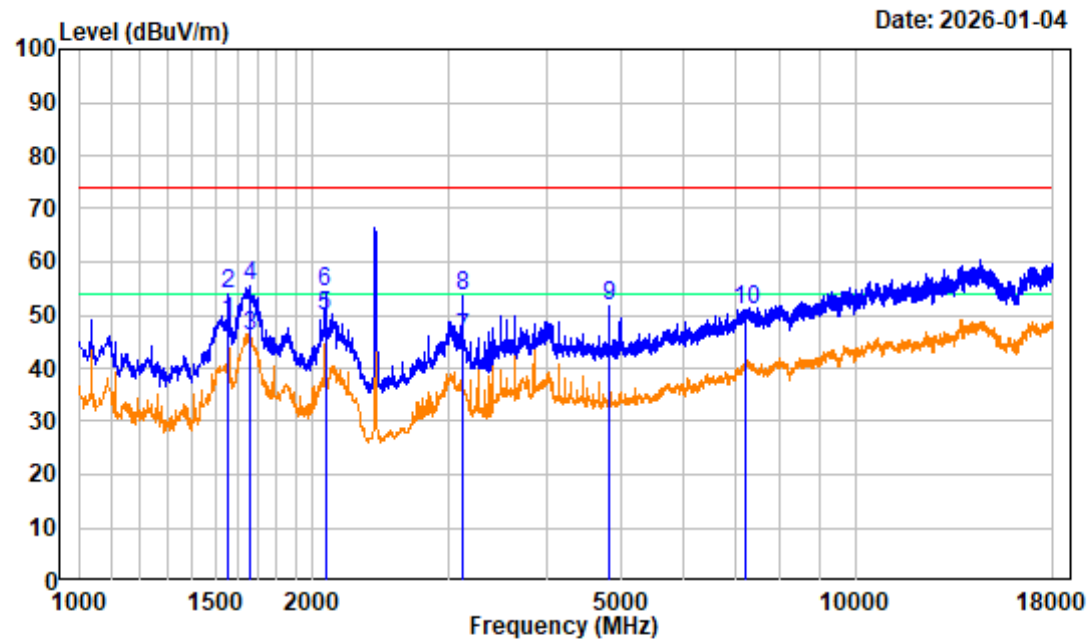

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11g Low Channel 2412MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 61.99      | 48.63  | 54.00      | -5.37      | Average |
| 2  | 1558.875 | -13.36 | 67.30      | 53.94  | 74.00      | -20.06     | Peak    |
| 3  | 1658.750 | -13.23 | 59.33      | 46.10  | 54.00      | -7.90      | Average |
| 4  | 1658.750 | -13.23 | 68.85      | 55.62  | 74.00      | -18.38     | Peak    |
| 5  | 2077.375 | -11.13 | 60.81      | 49.68  | 54.00      | -4.32      | Average |
| 6  | 2077.375 | -11.13 | 65.53      | 54.40  | 74.00      | -19.60     | Peak    |
| 7  | 3118.625 | -9.79  | 55.30      | 45.51  | 54.00      | -8.49      | Average |
| 8  | 3118.625 | -9.79  | 63.33      | 53.54  | 74.00      | -20.46     | Peak    |
| 9  | 4824.000 | -6.64  | 58.48      | 51.84  | 74.00      | -22.16     | Peak    |
| 10 | 7236.000 | -1.32  | 52.33      | 51.01  | 74.00      | -22.99     | Peak    |


2.4G WIFI 802.11g Low Channel Bandedge\_HORIZONTAL

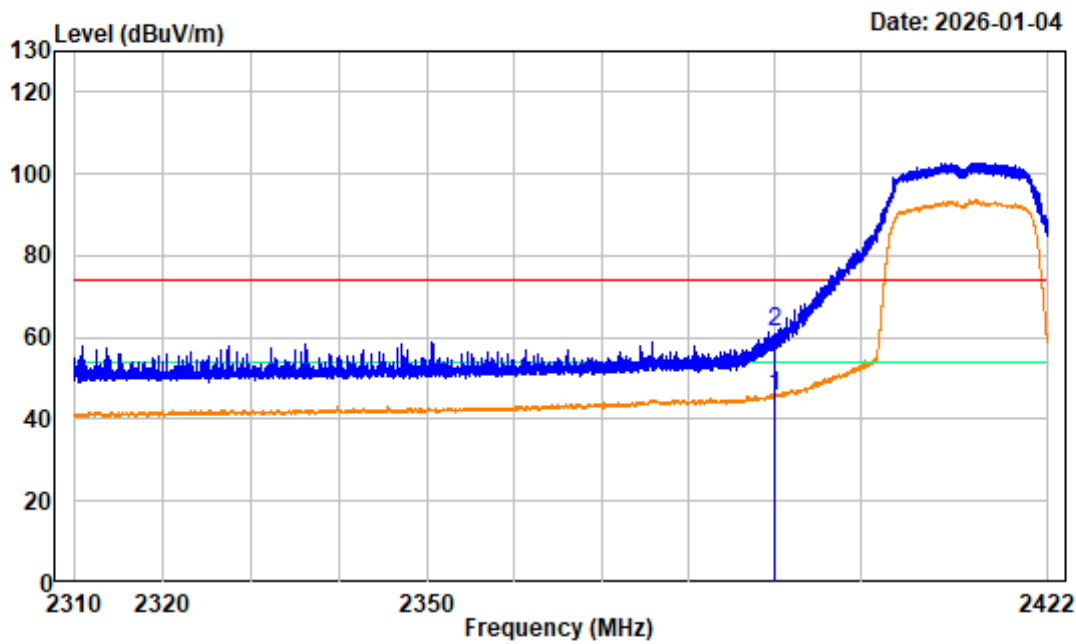

Site : chamber  
Condition : 3m HORIZONTAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11g Low Channel 2412MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2390.000 | -10.25 | 55.96      | 45.71  | 54.00      | -8.29      | Average |
| 2 | 2390.000 | -10.25 | 71.77      | 61.52  | 74.00      | -12.48     | Peak    |

2.4G WIFI 802.11g Low Channel Bandedge\_VERTICAL

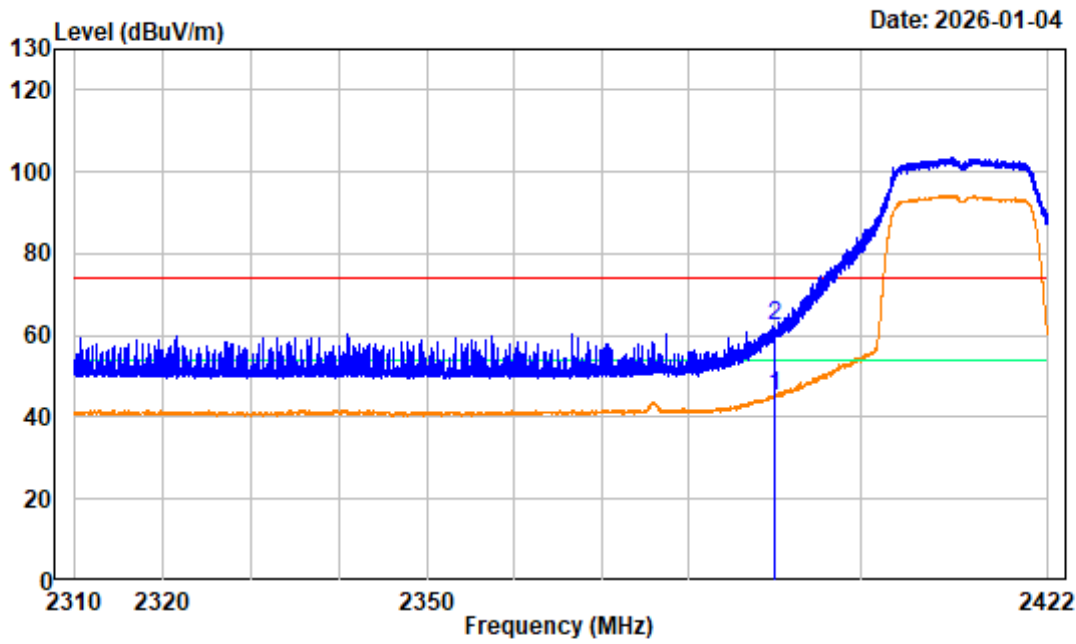

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11g Low Channel 2412MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2390.000 | -10.25 | 55.45      | 45.20  | 54.00      | -8.80      | Average |
| 2 | 2390.000 | -10.25 | 72.47      | 62.22  | 74.00      | -11.78     | Peak    |


2.4G WIFI 802.11g Middle Channel 1GHz-18GHz\_HORIZONTAL

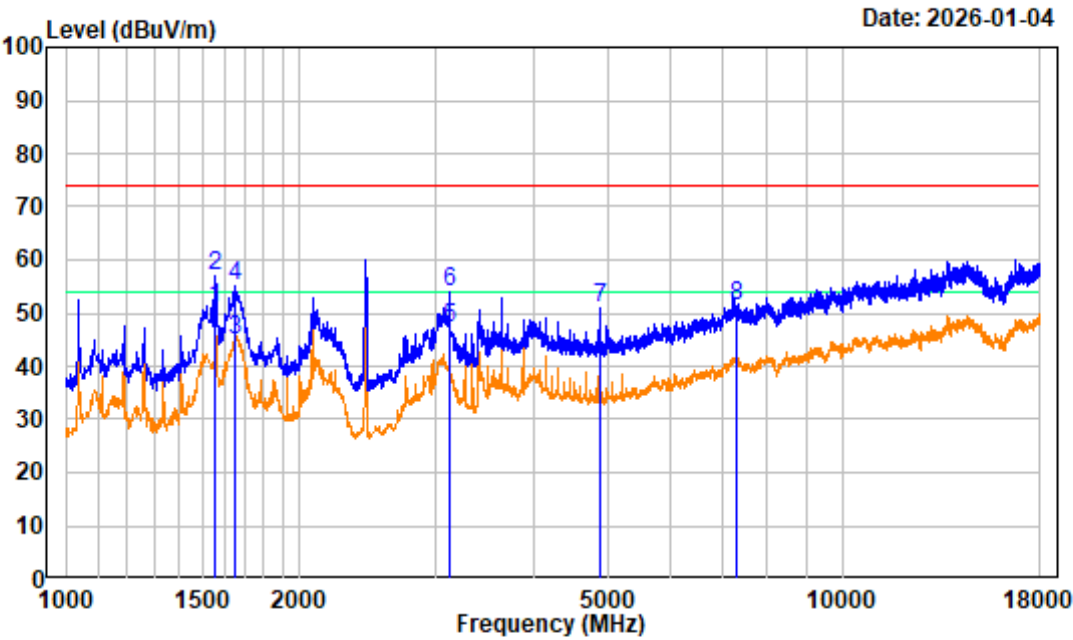

Site : chamber  
Condition : 3m HORIZONTAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11g Middle Channel 2437MHz 1GHz-18GHz  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 1558.875 | -13.36 | 64.38      | 51.02  | 54.00      | -2.98      | Average |
| 2 | 1558.875 | -13.36 | 70.34      | 56.98  | 74.00      | -17.02     | Peak    |
| 3 | 1650.250 | -13.28 | 58.32      | 45.04  | 54.00      | -8.96      | Average |
| 4 | 1650.250 | -13.28 | 68.30      | 55.02  | 74.00      | -18.98     | Peak    |
| 5 | 3118.625 | -9.79  | 57.07      | 47.28  | 54.00      | -6.72      | Average |
| 6 | 3118.625 | -9.79  | 63.71      | 53.92  | 74.00      | -20.08     | Peak    |
| 7 | 4874.000 | -6.58  | 57.61      | 51.03  | 74.00      | -22.97     | Peak    |
| 8 | 7311.000 | -1.12  | 52.62      | 51.50  | 74.00      | -22.50     | Peak    |

2.4G WIFI 802.11g Middle Channel 1GHz-18GHz\_VERTICAL

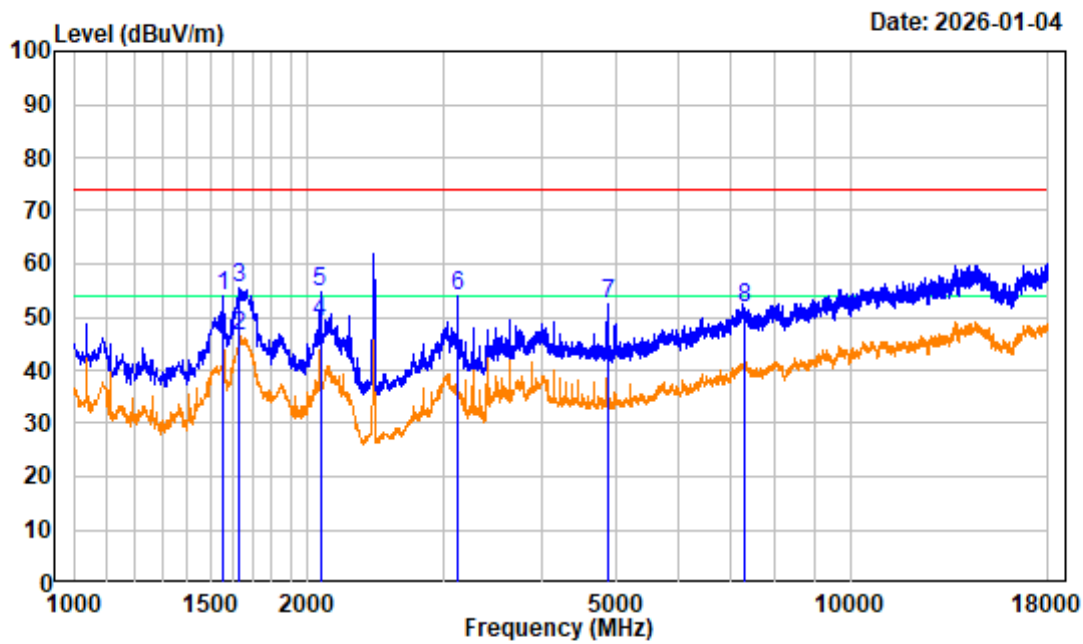

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11g Middle Channel 2437MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 1558.875 | -13.36 | 67.30      | 53.94  | 74.00      | -20.06     | Peak    |
| 2 | 1635.375 | -13.37 | 59.60      | 46.23  | 54.00      | -7.77      | Average |
| 3 | 1635.375 | -13.37 | 68.91      | 55.54  | 74.00      | -18.46     | Peak    |
| 4 | 2077.375 | -11.13 | 60.36      | 49.23  | 54.00      | -4.77      | Average |
| 5 | 2077.375 | -11.13 | 65.85      | 54.72  | 74.00      | -19.28     | Peak    |
| 6 | 3116.500 | -9.80  | 63.65      | 53.85  | 74.00      | -20.15     | Peak    |
| 7 | 4874.000 | -6.58  | 59.04      | 52.46  | 74.00      | -21.54     | Peak    |
| 8 | 7311.000 | -1.12  | 52.68      | 51.56  | 74.00      | -22.44     | Peak    |


2.4G WIFI 802.11g High Channel 1GHz-18GHz\_HORIZONTAL

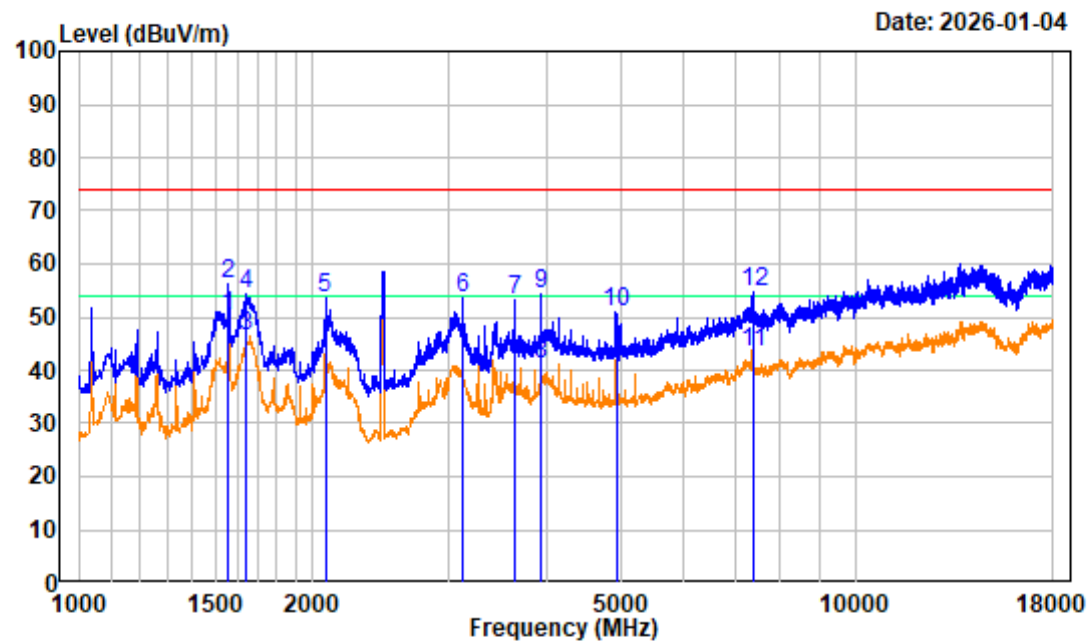

Site : chamber  
Condition : 3m HORIZONTAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11g High Channel 2462MHz 1GHz-18GHz  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 63.65      | 50.29  | 54.00      | -3.71      | Average |
| 2  | 1558.875 | -13.36 | 69.74      | 56.38  | 74.00      | -17.62     | Peak    |
| 3  | 1643.875 | -13.32 | 59.61      | 46.29  | 54.00      | -7.71      | Average |
| 4  | 1643.875 | -13.32 | 67.82      | 54.50  | 74.00      | -19.50     | Peak    |
| 5  | 2077.375 | -11.13 | 64.63      | 53.50  | 74.00      | -20.50     | Peak    |
| 6  | 3118.625 | -9.79  | 63.26      | 53.47  | 74.00      | -20.53     | Peak    |
| 7  | 3639.250 | -9.09  | 62.25      | 53.16  | 74.00      | -20.84     | Peak    |
| 8  | 3938.875 | -8.33  | 49.53      | 41.20  | 54.00      | -12.80     | Average |
| 9  | 3938.875 | -8.33  | 62.62      | 54.29  | 74.00      | -19.71     | Peak    |
| 10 | 4924.000 | -6.48  | 57.31      | 50.83  | 74.00      | -23.17     | Peak    |
| 11 | 7386.000 | -1.31  | 44.88      | 43.57  | 54.00      | -10.43     | Average |
| 12 | 7386.000 | -1.31  | 56.20      | 54.89  | 74.00      | -19.11     | Peak    |

2.4G WIFI 802.11g High Channel 1GHz-18GHz\_VERTICAL

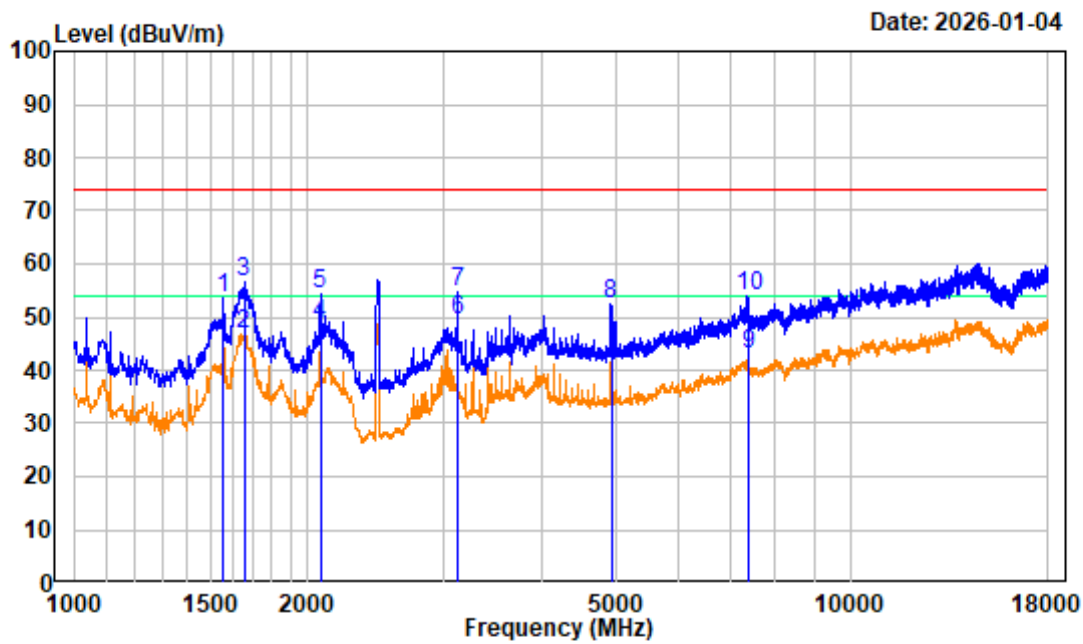

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11g High Channel 2462MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 66.81      | 53.45  | 74.00      | -20.55     | Peak    |
| 2  | 1656.625 | -13.25 | 59.96      | 46.71  | 54.00      | -7.29      | Average |
| 3  | 1656.625 | -13.25 | 69.98      | 56.73  | 74.00      | -17.27     | Peak    |
| 4  | 2077.375 | -11.13 | 59.96      | 48.83  | 54.00      | -5.17      | Average |
| 5  | 2077.375 | -11.13 | 65.35      | 54.22  | 74.00      | -19.78     | Peak    |
| 6  | 3116.500 | -9.80  | 59.33      | 49.53  | 54.00      | -4.47      | Average |
| 7  | 3116.500 | -9.80  | 64.37      | 54.57  | 74.00      | -19.43     | Peak    |
| 8  | 4924.000 | -6.48  | 58.94      | 52.46  | 74.00      | -21.54     | Peak    |
| 9  | 7386.000 | -1.31  | 44.34      | 43.03  | 54.00      | -10.97     | Average |
| 10 | 7386.000 | -1.31  | 55.37      | 54.06  | 74.00      | -19.94     | Peak    |

## 2.4G WIFI 802.11g High Channel Bandedge\_HORIZONTAL

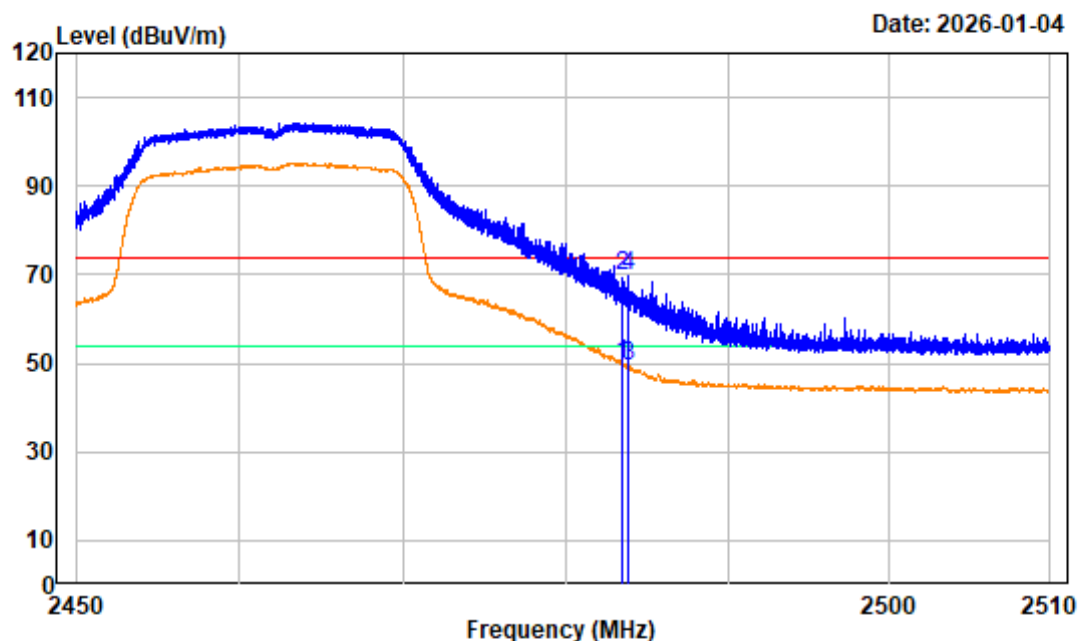

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF

Test Mode : Transmitting


Tester:Colin Lin

Note : 2.4G WIFI 802.11g High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark  |
|---|----------|--------|---------------|--------|---------------|---------------|---------|
|   | MHz      | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |         |
| 1 | 2483.500 | -10.23 | 60.12         | 49.89  | 54.00         | -4.11         | Average |
| 2 | 2483.500 | -10.23 | 80.14         | 69.91  | 74.00         | -4.09         | Peak    |
| 3 | 2483.810 | -10.23 | 59.51         | 49.28  | 54.00         | -4.72         | Average |
| 4 | 2483.810 | -10.23 | 80.14         | 69.91  | 74.00         | -4.09         | Peak    |

2.4G WIFI 802.11g High Channel Bandedge\_VERTICAL

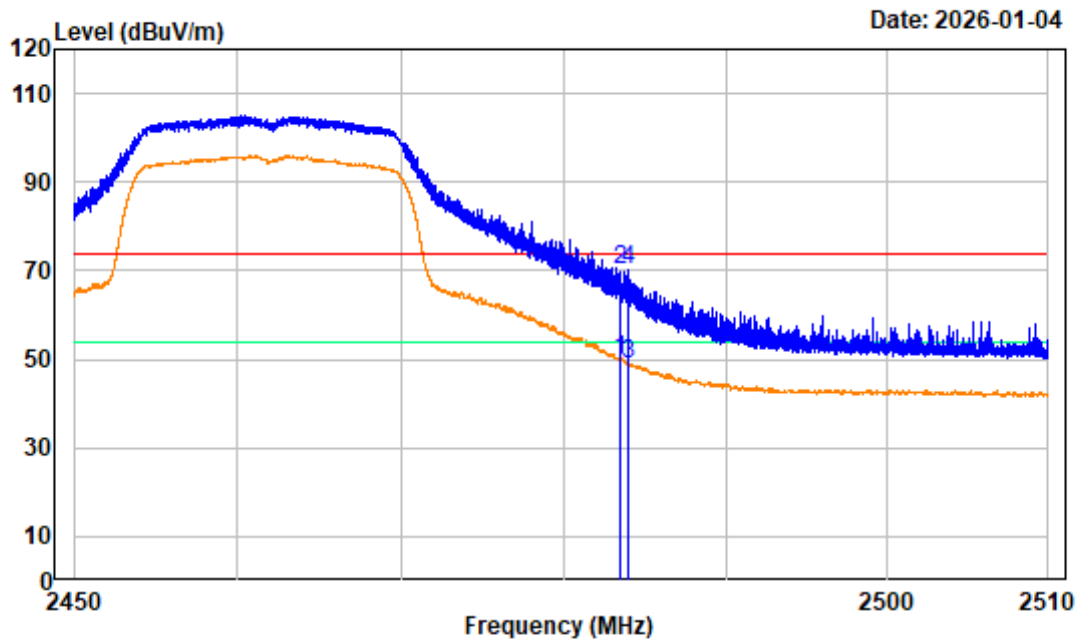

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11g High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2483.500 | -10.23 | 60.18      | 49.95  | 54.00      | -4.05      | Average |
| 2 | 2483.500 | -10.23 | 80.19      | 69.96  | 74.00      | -4.04      | Peak    |
| 3 | 2483.990 | -10.23 | 59.00      | 48.77  | 54.00      | -5.23      | Average |
| 4 | 2483.990 | -10.23 | 80.19      | 69.96  | 74.00      | -4.04      | Peak    |

2.4G WIFI 802.11n20 Low Channel 1GHz-18GHz\_HORIZONTAL

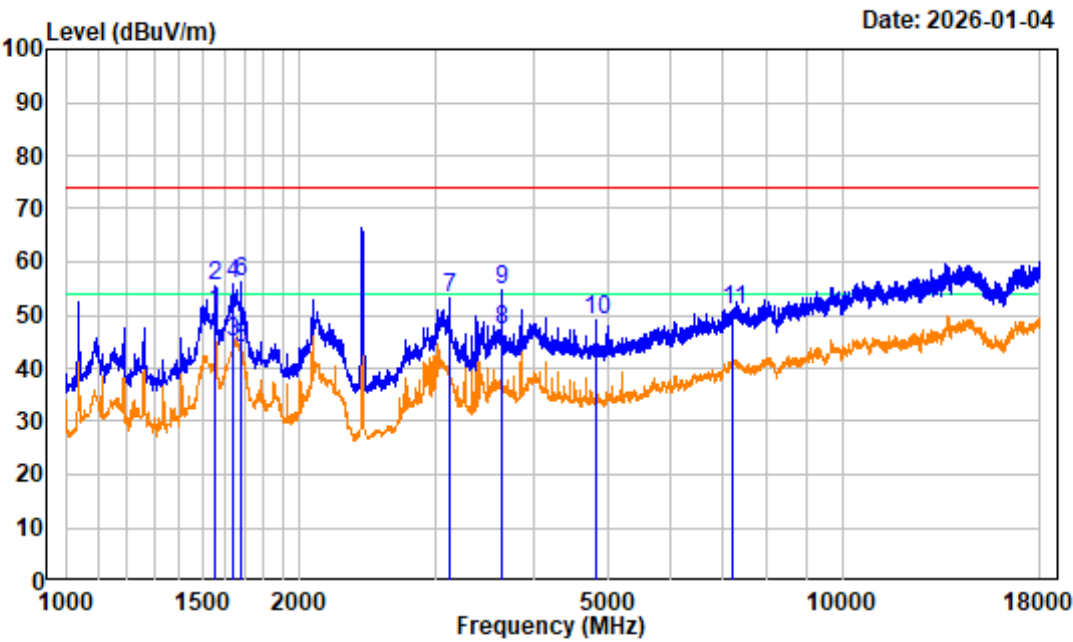

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11n20 Low Channel 2412MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 64.09      | 50.73  | 54.00      | -3.27      | Average |
| 2  | 1558.875 | -13.36 | 68.92      | 55.56  | 74.00      | -18.44     | Peak    |
| 3  | 1646.000 | -13.30 | 58.14      | 44.84  | 54.00      | -9.16      | Average |
| 4  | 1646.000 | -13.30 | 69.25      | 55.95  | 74.00      | -18.05     | Peak    |
| 5  | 1680.000 | -13.13 | 57.08      | 43.95  | 54.00      | -10.05     | Average |
| 6  | 1680.000 | -13.13 | 69.20      | 56.07  | 74.00      | -17.93     | Peak    |
| 7  | 3116.500 | -9.80  | 62.97      | 53.17  | 74.00      | -20.83     | Peak    |
| 8  | 3637.125 | -9.10  | 56.32      | 47.22  | 54.00      | -6.78      | Average |
| 9  | 3637.125 | -9.10  | 63.86      | 54.76  | 74.00      | -19.24     | Peak    |
| 10 | 4824.000 | -6.64  | 55.72      | 49.08  | 74.00      | -24.92     | Peak    |
| 11 | 7236.000 | -1.32  | 52.44      | 51.12  | 74.00      | -22.88     | Peak    |

2.4G WIFI 802.11n20 Low Channel 1GHz-18GHz\_VERTICAL

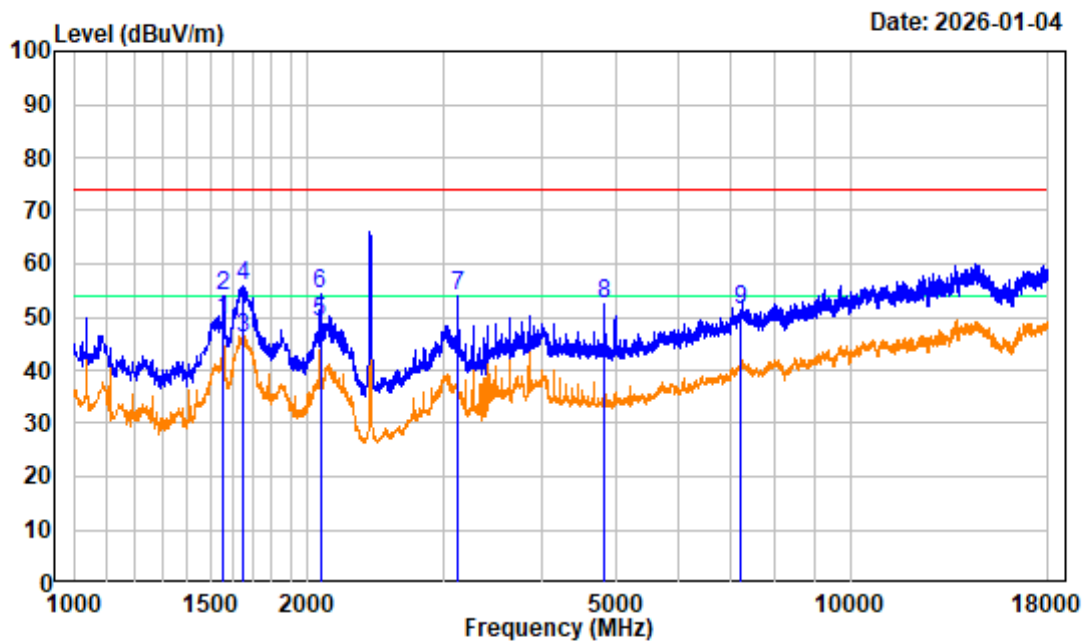

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11n20 Low Channel 2412MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 1558.875 | -13.36 | 62.61      | 49.25  | 54.00      | -4.75      | Average |
| 2 | 1558.875 | -13.36 | 67.50      | 54.14  | 74.00      | -19.86     | Peak    |
| 3 | 1650.250 | -13.28 | 59.33      | 46.05  | 54.00      | -7.95      | Average |
| 4 | 1650.250 | -13.28 | 69.05      | 55.77  | 74.00      | -18.23     | Peak    |
| 5 | 2077.375 | -11.13 | 60.23      | 49.10  | 54.00      | -4.90      | Average |
| 6 | 2077.375 | -11.13 | 65.64      | 54.51  | 74.00      | -19.49     | Peak    |
| 7 | 3116.500 | -9.80  | 63.71      | 53.91  | 74.00      | -20.09     | Peak    |
| 8 | 4824.000 | -6.64  | 59.18      | 52.54  | 74.00      | -21.46     | Peak    |
| 9 | 7236.000 | -1.32  | 52.64      | 51.32  | 74.00      | -22.68     | Peak    |

2.4G WIFI 802.11n20 Low Channel Bandedge\_HORIZONTAL

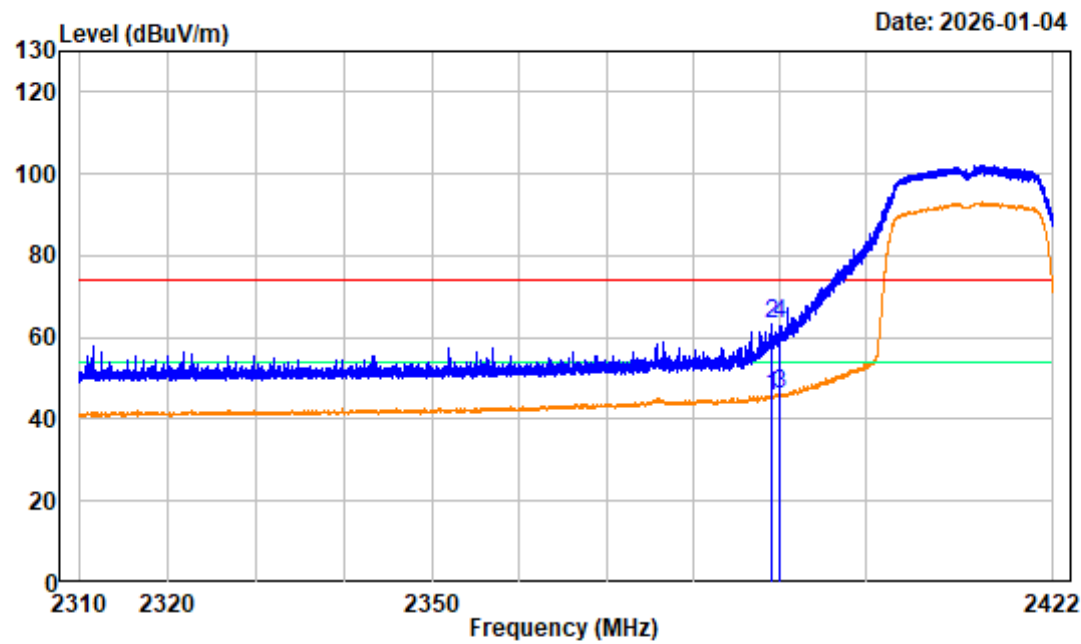

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF

Test Mode : Transmitting


Tester:Colin Lin

Note : 2.4G WIFI 802.11n20 Low Channel 2412MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2389.100 | -10.25 | 55.67      | 45.42  | 54.00      | -8.58      | Average |
| 2 | 2389.100 | -10.25 | 73.70      | 63.45  | 74.00      | -10.55     | Peak    |
| 3 | 2390.000 | -10.25 | 56.19      | 45.94  | 54.00      | -8.06      | Average |
| 4 | 2390.000 | -10.25 | 73.70      | 63.45  | 74.00      | -10.55     | Peak    |


2.4G WIFI 802.11n20 Low Channel Bandedge\_VERTICAL

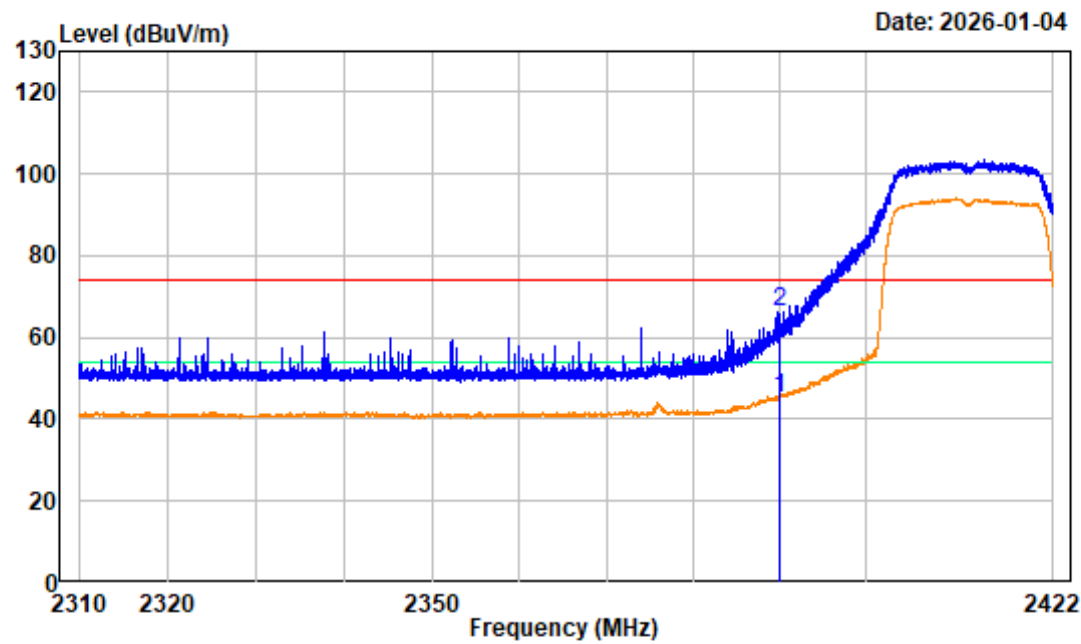

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11n20 Low Channel 2412MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2390.000 | -10.25 | 55.44      | 45.19  | 54.00      | -8.81      | Average |
| 2 | 2390.000 | -10.25 | 76.55      | 66.30  | 74.00      | -7.70      | Peak    |


2.4G WIFI 802.11n20 Middle Channel 1GHz-18GHz\_HORIZONTAL

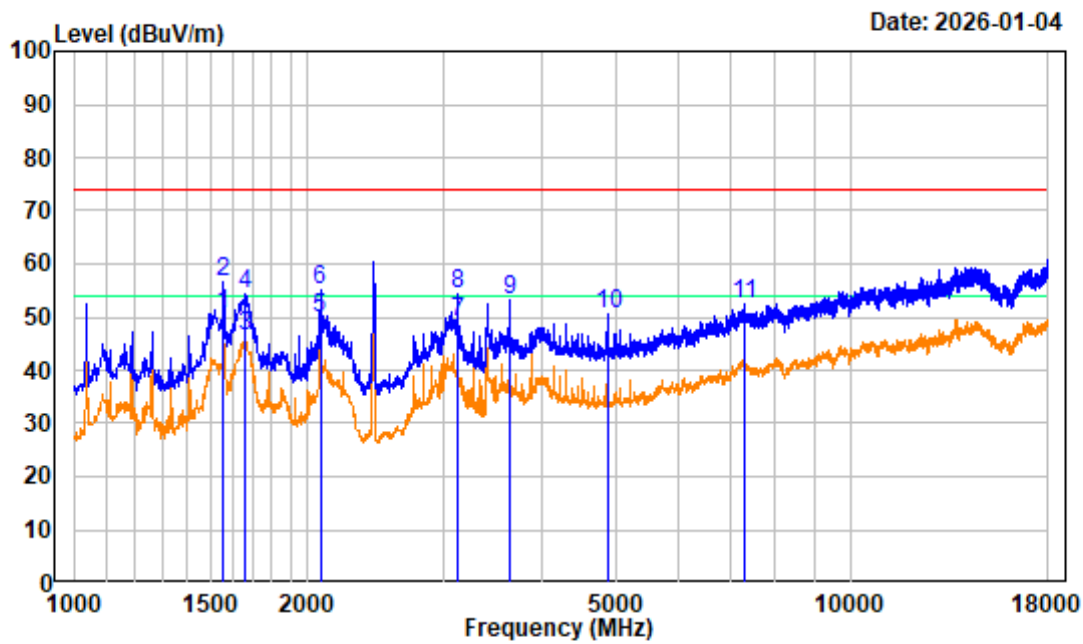

Site : chamber  
Condition : 3m HORIZONTAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11n20 Middle Channel 2437MHz 1GHz-18GHz  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 63.79      | 50.43  | 54.00      | -3.57      | Average |
| 2  | 1558.875 | -13.36 | 69.97      | 56.61  | 74.00      | -17.39     | Peak    |
| 3  | 1663.000 | -13.21 | 59.51      | 46.30  | 54.00      | -7.70      | Average |
| 4  | 1663.000 | -13.21 | 67.42      | 54.21  | 74.00      | -19.79     | Peak    |
| 5  | 2077.375 | -11.13 | 60.76      | 49.63  | 54.00      | -4.37      | Average |
| 6  | 2077.375 | -11.13 | 66.16      | 55.03  | 74.00      | -18.97     | Peak    |
| 7  | 3116.500 | -9.80  | 58.76      | 48.96  | 54.00      | -5.04      | Average |
| 8  | 3116.500 | -9.80  | 64.02      | 54.22  | 74.00      | -19.78     | Peak    |
| 9  | 3637.125 | -9.10  | 62.16      | 53.06  | 74.00      | -20.94     | Peak    |
| 10 | 4874.000 | -6.58  | 57.28      | 50.70  | 74.00      | -23.30     | Peak    |
| 11 | 7311.000 | -1.12  | 53.40      | 52.28  | 74.00      | -21.72     | Peak    |

2.4G WIFI 802.11n20 Middle Channel 1GHz-18GHz\_VERTICAL

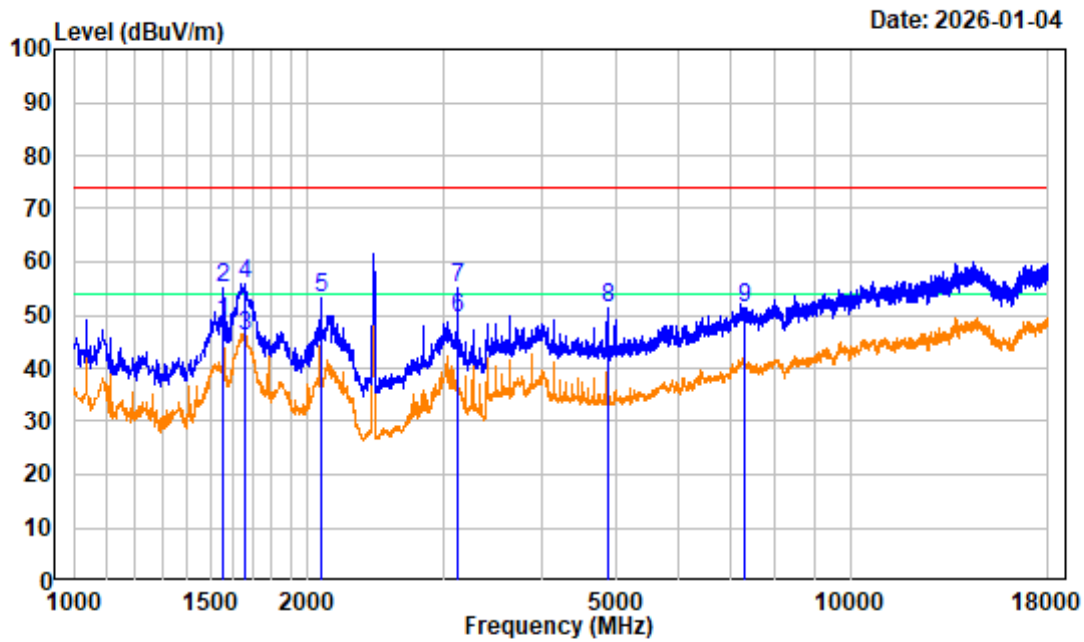

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11n20 Middle Channel 2437MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 1558.875 | -13.36 | 62.19      | 48.83  | 54.00      | -5.17      | Average |
| 2 | 1558.875 | -13.36 | 68.38      | 55.02  | 74.00      | -18.98     | Peak    |
| 3 | 1660.875 | -13.23 | 59.25      | 46.02  | 54.00      | -7.98      | Average |
| 4 | 1660.875 | -13.23 | 69.07      | 55.84  | 74.00      | -18.16     | Peak    |
| 5 | 2079.500 | -11.11 | 64.18      | 53.07  | 74.00      | -20.93     | Peak    |
| 6 | 3116.500 | -9.80  | 59.40      | 49.60  | 54.00      | -4.40      | Average |
| 7 | 3116.500 | -9.80  | 65.05      | 55.25  | 74.00      | -18.75     | Peak    |
| 8 | 4874.000 | -6.58  | 58.09      | 51.51  | 74.00      | -22.49     | Peak    |
| 9 | 7311.000 | -1.12  | 52.39      | 51.27  | 74.00      | -22.73     | Peak    |

2.4G WIFI 802.11n20 High Channel 1GHz-18GHz\_HORIZONTAL

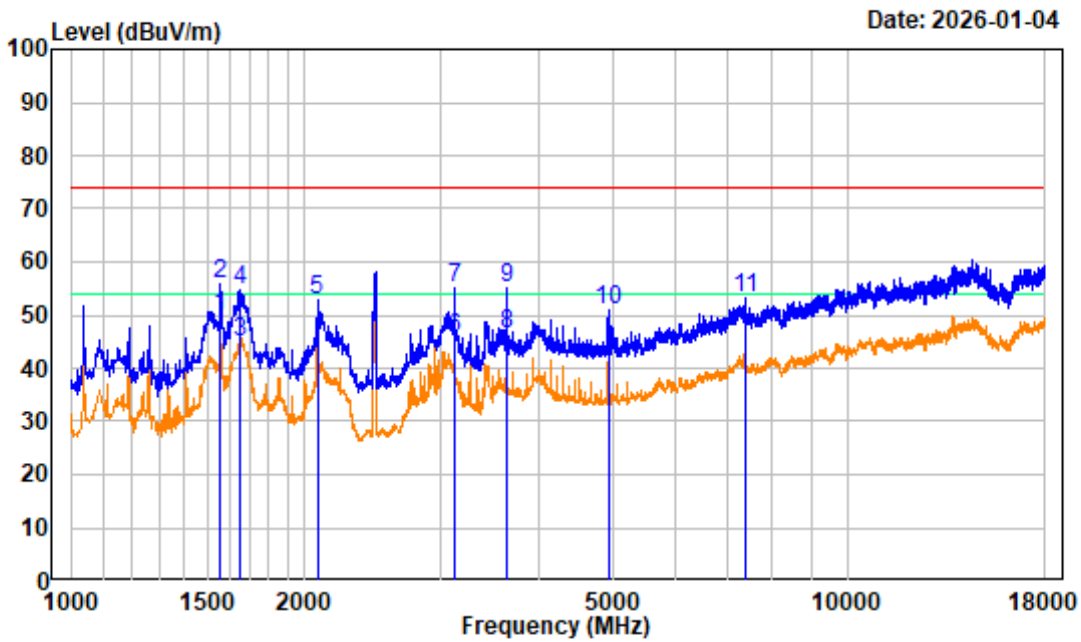

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11n20 High Channel 2462MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 62.99      | 49.63  | 54.00      | -4.37      | Average |
| 2  | 1558.875 | -13.36 | 69.20      | 55.84  | 74.00      | -18.16     | Peak    |
| 3  | 1648.125 | -13.29 | 58.35      | 45.06  | 54.00      | -8.94      | Average |
| 4  | 1648.125 | -13.29 | 67.86      | 54.57  | 74.00      | -19.43     | Peak    |
| 5  | 2077.375 | -11.13 | 63.88      | 52.75  | 74.00      | -21.25     | Peak    |
| 6  | 3118.625 | -9.79  | 55.50      | 45.71  | 54.00      | -8.29      | Average |
| 7  | 3118.625 | -9.79  | 64.84      | 55.05  | 74.00      | -18.95     | Peak    |
| 8  | 3637.125 | -9.10  | 55.55      | 46.45  | 54.00      | -7.55      | Average |
| 9  | 3637.125 | -9.10  | 64.20      | 55.10  | 74.00      | -18.90     | Peak    |
| 10 | 4924.000 | -6.48  | 57.41      | 50.93  | 74.00      | -23.07     | Peak    |
| 11 | 7386.000 | -1.31  | 54.42      | 53.11  | 74.00      | -20.89     | Peak    |

2.4G WIFI 802.11n20 High Channel 1GHz-18GHz\_VERTICAL

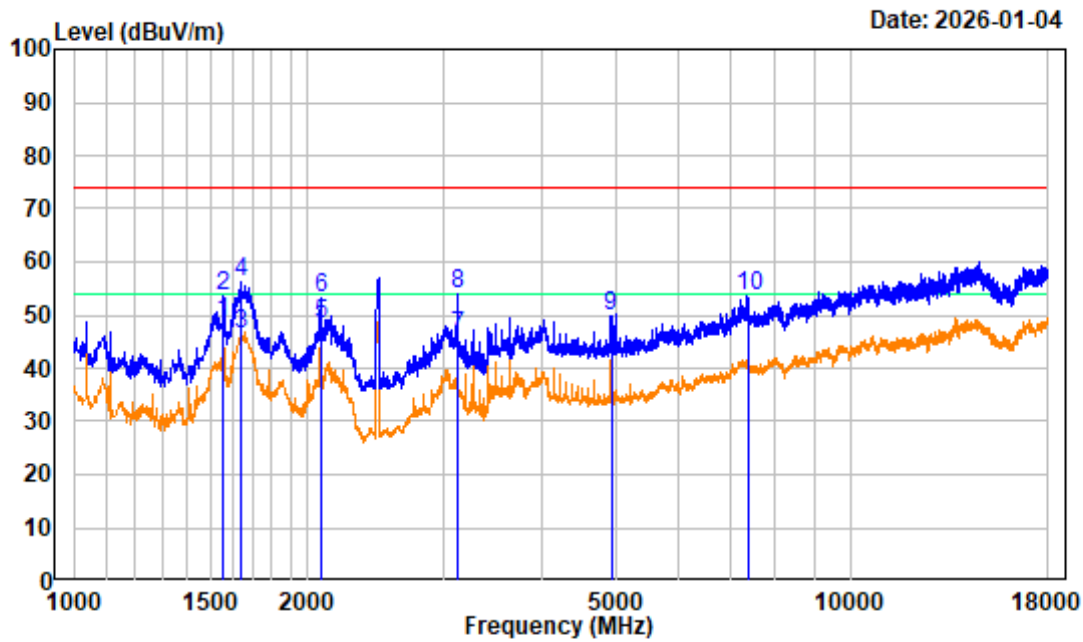

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11n20 High Channel 2462MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 61.92      | 48.56  | 54.00      | -5.44      | Average |
| 2  | 1558.875 | -13.36 | 67.05      | 53.69  | 74.00      | -20.31     | Peak    |
| 3  | 1643.875 | -13.32 | 59.72      | 46.40  | 54.00      | -7.60      | Average |
| 4  | 1643.875 | -13.32 | 69.70      | 56.38  | 74.00      | -17.62     | Peak    |
| 5  | 2079.500 | -11.11 | 59.31      | 48.20  | 54.00      | -5.80      | Average |
| 6  | 2079.500 | -11.11 | 64.19      | 53.08  | 74.00      | -20.92     | Peak    |
| 7  | 3118.625 | -9.79  | 55.95      | 46.16  | 54.00      | -7.84      | Average |
| 8  | 3118.625 | -9.79  | 63.83      | 54.04  | 74.00      | -19.96     | Peak    |
| 9  | 4924.000 | -6.48  | 56.38      | 49.90  | 74.00      | -24.10     | Peak    |
| 10 | 7386.000 | -1.31  | 54.89      | 53.58  | 74.00      | -20.42     | Peak    |


2.4G WIFI 802.11n20 High Channel Bandedge\_HORIZONTAL

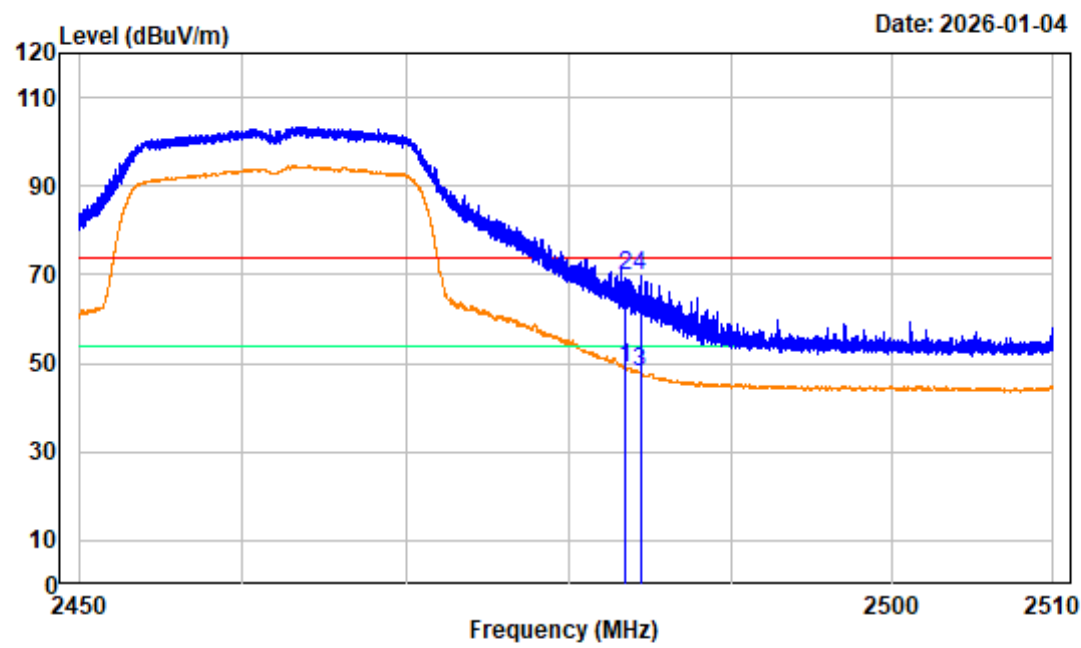

Site : chamber  
Condition : 3m HORIZONTAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11n20 High Channel 2462MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2483.500 | -10.23 | 59.13      | 48.90  | 54.00      | -5.10      | Average |
| 2 | 2483.500 | -10.23 | 80.15      | 69.92  | 74.00      | -4.08      | Peak    |
| 3 | 2484.395 | -10.23 | 58.12      | 47.89  | 54.00      | -6.11      | Average |
| 4 | 2484.395 | -10.23 | 80.15      | 69.92  | 74.00      | -4.08      | Peak    |


2.4G WIFI 802.11n20 High Channel Bandedge\_VERTICAL

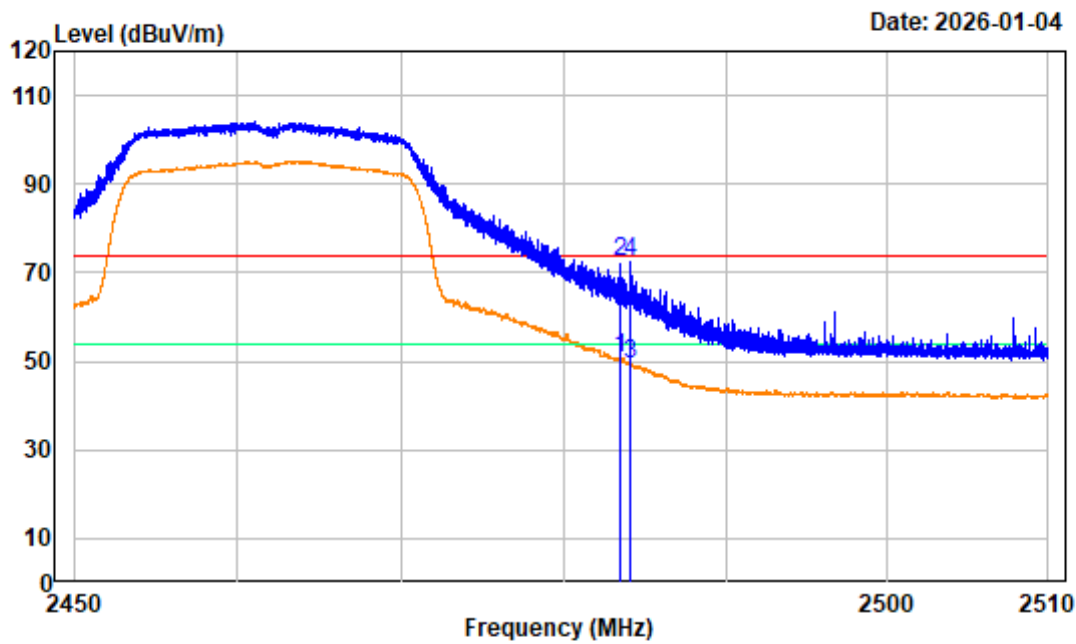

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11n20 High Channel 2462MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2483.500 | -10.23 | 60.74      | 50.51  | 54.00      | -3.49      | Average |
| 2 | 2483.500 | -10.23 | 82.86      | 72.63  | 74.00      | -1.37      | Peak    |
| 3 | 2484.065 | -10.23 | 59.44      | 49.21  | 54.00      | -4.79      | Average |
| 4 | 2484.065 | -10.23 | 82.86      | 72.63  | 74.00      | -1.37      | Peak    |


2.4G WIFI 802.11n40 Low Channel 1GHz-18GHz\_HORIZONTAL

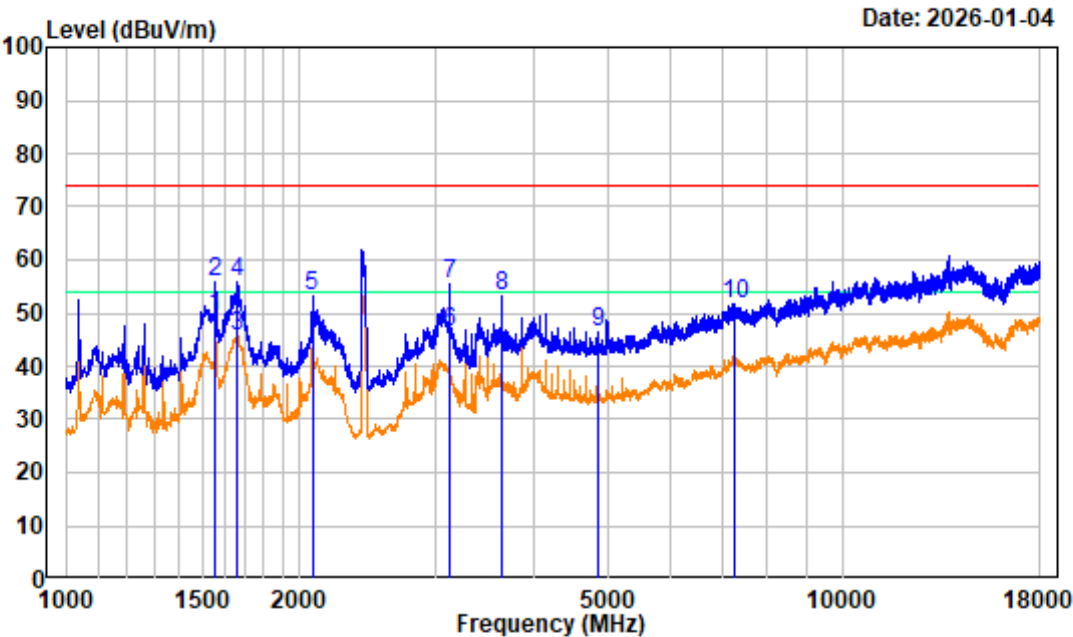

Site : chamber  
Condition : 3m HORIZONTAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11n40 Low Channel 2422MHz 1GHz-18GHz  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 62.79      | 49.43  | 54.00      | -4.57      | Average |
| 2  | 1558.875 | -13.36 | 69.03      | 55.67  | 74.00      | -18.33     | Peak    |
| 3  | 1660.875 | -13.23 | 58.78      | 45.55  | 54.00      | -8.45      | Average |
| 4  | 1660.875 | -13.23 | 68.90      | 55.67  | 74.00      | -18.33     | Peak    |
| 5  | 2077.375 | -11.13 | 64.52      | 53.39  | 74.00      | -20.61     | Peak    |
| 6  | 3118.625 | -9.79  | 56.31      | 46.52  | 54.00      | -7.48      | Average |
| 7  | 3118.625 | -9.79  | 65.13      | 55.34  | 74.00      | -18.66     | Peak    |
| 8  | 3637.125 | -9.10  | 62.42      | 53.32  | 74.00      | -20.68     | Peak    |
| 9  | 4844.000 | -6.64  | 52.91      | 46.27  | 74.00      | -27.73     | Peak    |
| 10 | 7266.000 | -1.23  | 52.99      | 51.76  | 74.00      | -22.24     | Peak    |


2.4G WIFI 802.11n40 Low Channel 1GHz-18GHz\_VERTICAL

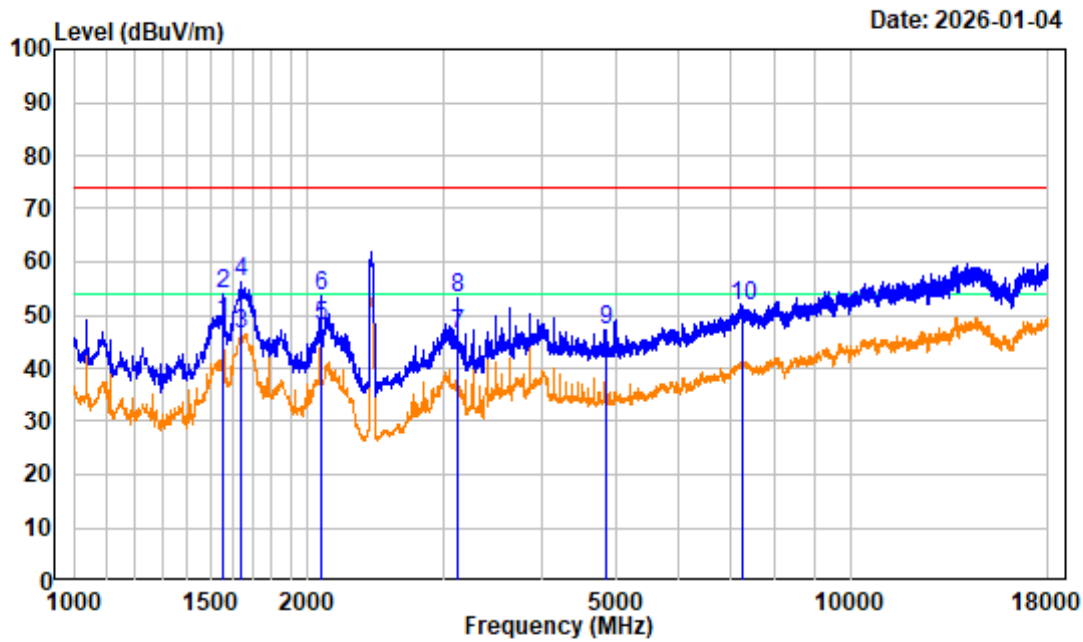

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11n40 Low Channel 2422MHz 1GHz-18GHz  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 62.19      | 48.83  | 54.00      | -5.17      | Average |
| 2  | 1558.875 | -13.36 | 67.30      | 53.94  | 74.00      | -20.06     | Peak    |
| 3  | 1643.875 | -13.32 | 59.82      | 46.50  | 54.00      | -7.50      | Average |
| 4  | 1643.875 | -13.32 | 69.53      | 56.21  | 74.00      | -17.79     | Peak    |
| 5  | 2079.500 | -11.11 | 58.98      | 47.87  | 54.00      | -6.13      | Average |
| 6  | 2079.500 | -11.11 | 64.65      | 53.54  | 74.00      | -20.46     | Peak    |
| 7  | 3118.625 | -9.79  | 56.36      | 46.57  | 54.00      | -7.43      | Average |
| 8  | 3118.625 | -9.79  | 63.12      | 53.33  | 74.00      | -20.67     | Peak    |
| 9  | 4844.000 | -6.64  | 53.87      | 47.23  | 74.00      | -26.77     | Peak    |
| 10 | 7266.000 | -1.23  | 53.00      | 51.77  | 74.00      | -22.23     | Peak    |

2.4G WIFI 802.11n40 Low Channel Bandedge\_HORIZONTAL

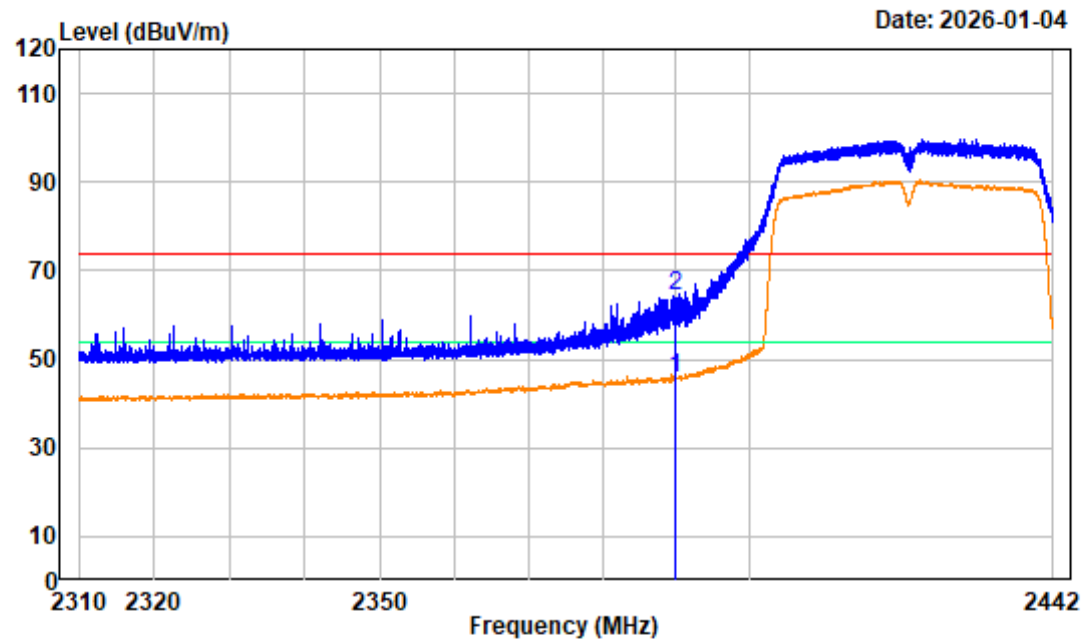

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF

Test Mode : Transmitting


Tester:Colin Lin

Note : 2.4G WIFI 802.11n40 Low Channel 2422MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2390.000 | -10.25 | 55.92      | 45.67  | 54.00      | -8.33      | Average |
| 2 | 2390.000 | -10.25 | 74.74      | 64.49  | 74.00      | -9.51      | Peak    |


2.4G WIFI 802.11n40 Low Channel Bandedge\_VERTICAL

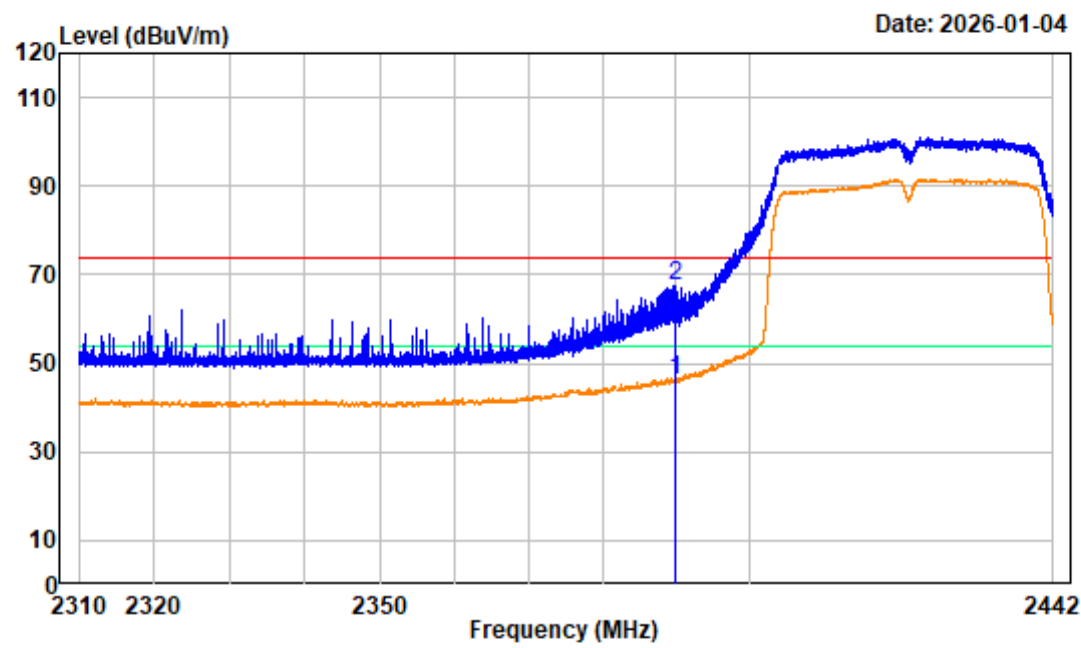

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11n40 Low Channel 2422MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2390.000 | -10.25 | 56.35      | 46.10  | 54.00      | -7.90      | Average |
| 2 | 2390.000 | -10.25 | 77.67      | 67.42  | 74.00      | -6.58      | Peak    |


2.4G WIFI 802.11n40 Middle Channel 1GHz-18GHz\_HORIZONTAL

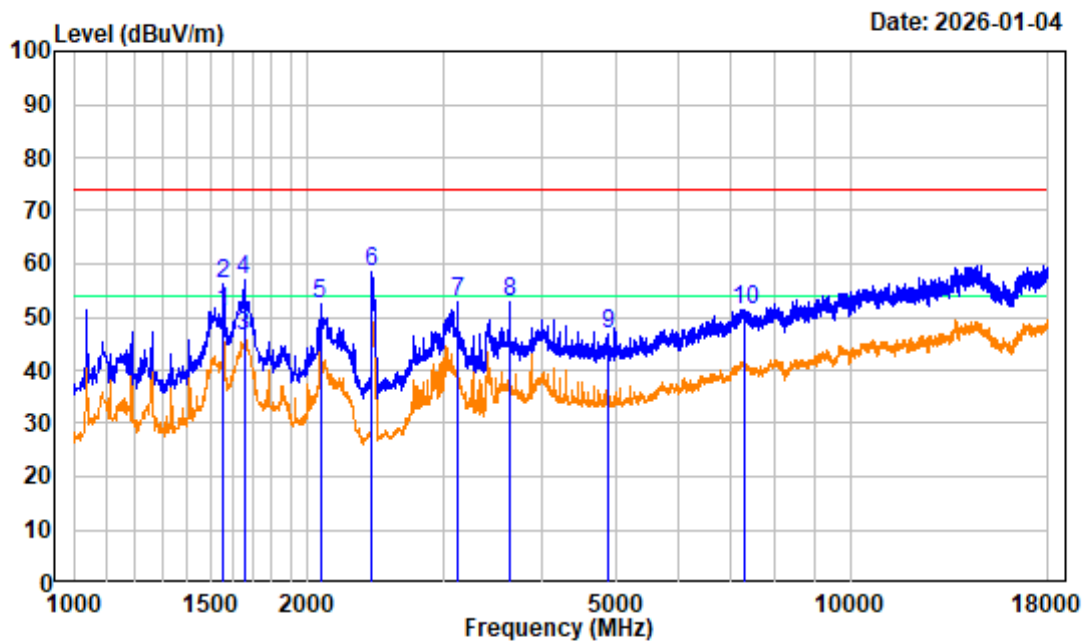

Site : chamber  
Condition : 3m HORIZONTAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11n40 Middle Channel 2437MHz 1GHz-18GHz  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 64.30      | 50.94  | 54.00      | -3.06      | Average |
| 2  | 1558.875 | -13.36 | 69.77      | 56.41  | 74.00      | -17.59     | Peak    |
| 3  | 1656.625 | -13.25 | 59.72      | 46.47  | 54.00      | -7.53      | Average |
| 4  | 1656.625 | -13.25 | 70.11      | 56.86  | 74.00      | -17.14     | Peak    |
| 5  | 2077.375 | -11.13 | 63.68      | 52.55  | 74.00      | -21.45     | Peak    |
| 6  | 2421.625 | -10.25 | 68.76      | 58.51  | 74.00      | -15.49     | Peak    |
| 7  | 3118.625 | -9.79  | 62.47      | 52.68  | 74.00      | -21.32     | Peak    |
| 8  | 3637.125 | -9.10  | 62.10      | 53.00  | 74.00      | -21.00     | Peak    |
| 9  | 4874.000 | -6.58  | 53.24      | 46.66  | 74.00      | -27.34     | Peak    |
| 10 | 7311.000 | -1.12  | 52.59      | 51.47  | 74.00      | -22.53     | Peak    |

2.4G WIFI 802.11n40 Middle Channel 1GHz-18GHz\_VERTICAL

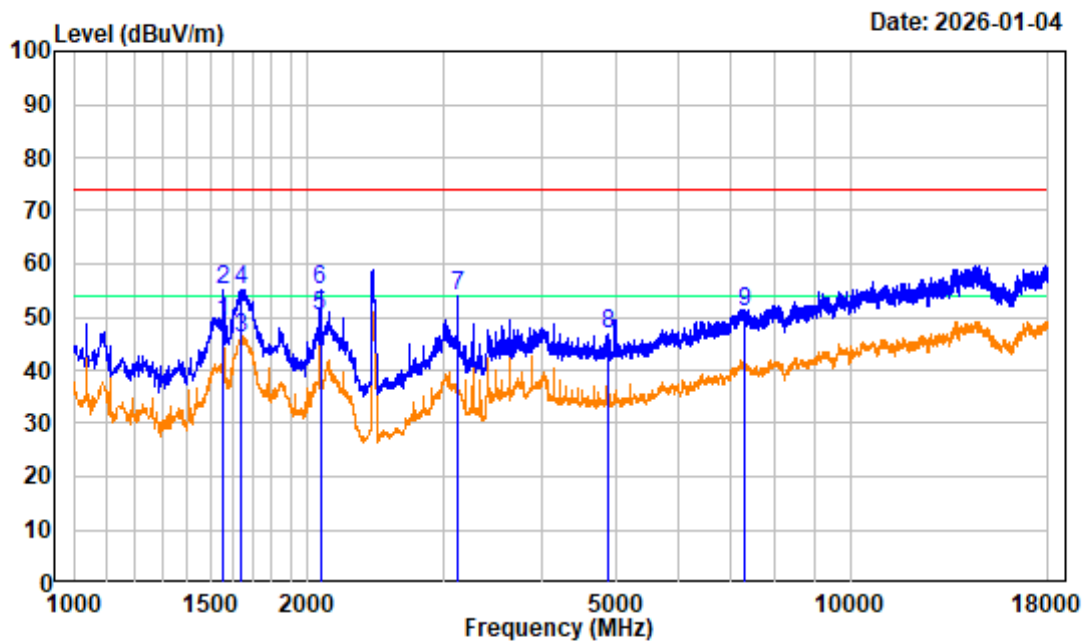

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11n40 Middle Channel 2437MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 1558.875 | -13.36 | 62.43      | 49.07  | 54.00      | -4.93      | Average |
| 2 | 1558.875 | -13.36 | 68.50      | 55.14  | 74.00      | -18.86     | Peak    |
| 3 | 1641.750 | -13.34 | 59.36      | 46.02  | 54.00      | -7.98      | Average |
| 4 | 1641.750 | -13.34 | 68.57      | 55.23  | 74.00      | -18.77     | Peak    |
| 5 | 2077.375 | -11.13 | 61.28      | 50.15  | 54.00      | -3.85      | Average |
| 6 | 2077.375 | -11.13 | 66.06      | 54.93  | 74.00      | -19.07     | Peak    |
| 7 | 3118.625 | -9.79  | 63.59      | 53.80  | 74.00      | -20.20     | Peak    |
| 8 | 4874.000 | -6.58  | 53.26      | 46.68  | 74.00      | -27.32     | Peak    |
| 9 | 7311.000 | -1.12  | 52.07      | 50.95  | 74.00      | -23.05     | Peak    |

2.4G WIFI 802.11n40 High Channel 1GHz-18GHz\_HORIZONTAL

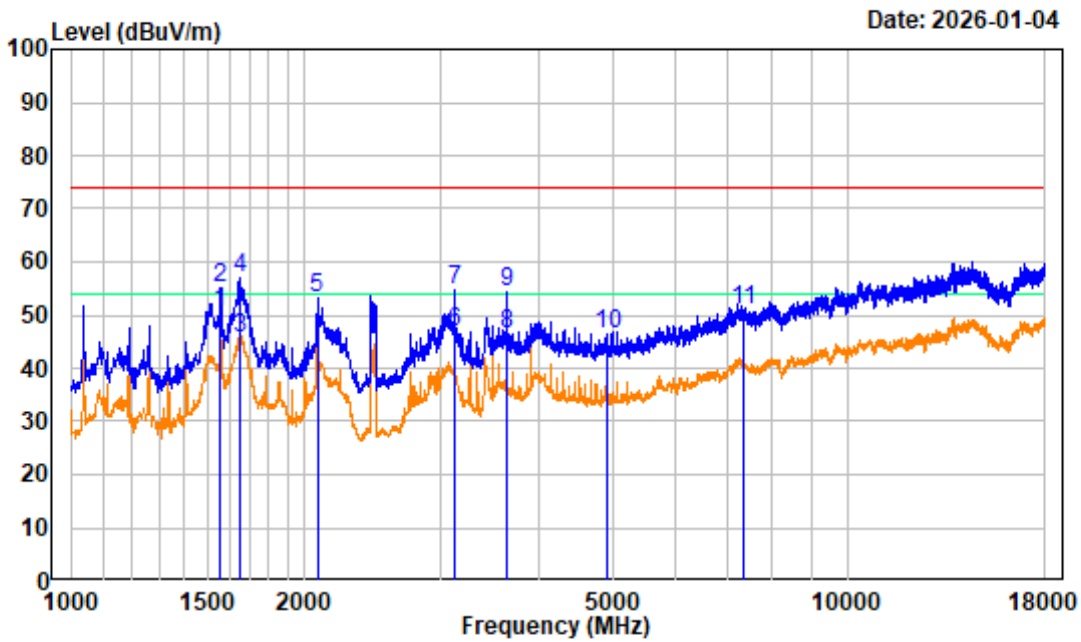

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11n40 High Channel 2452MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 64.08      | 50.72  | 54.00      | -3.28      | Average |
| 2  | 1558.875 | -13.36 | 68.41      | 55.05  | 74.00      | -18.95     | Peak    |
| 3  | 1652.375 | -13.27 | 59.05      | 45.78  | 54.00      | -8.22      | Average |
| 4  | 1652.375 | -13.27 | 70.27      | 57.00  | 74.00      | -17.00     | Peak    |
| 5  | 2077.375 | -11.13 | 64.48      | 53.35  | 74.00      | -20.65     | Peak    |
| 6  | 3116.500 | -9.80  | 56.74      | 46.94  | 54.00      | -7.06      | Average |
| 7  | 3116.500 | -9.80  | 64.64      | 54.84  | 74.00      | -19.16     | Peak    |
| 8  | 3637.125 | -9.10  | 55.60      | 46.50  | 54.00      | -7.50      | Average |
| 9  | 3637.125 | -9.10  | 63.63      | 54.53  | 74.00      | -19.47     | Peak    |
| 10 | 4904.000 | -6.52  | 52.93      | 46.41  | 74.00      | -27.59     | peak    |
| 11 | 7356.000 | -1.26  | 52.31      | 51.05  | 74.00      | -22.95     | peak    |


2.4G WIFI 802.11n40 High Channel 1GHz-18GHz\_VERTICAL

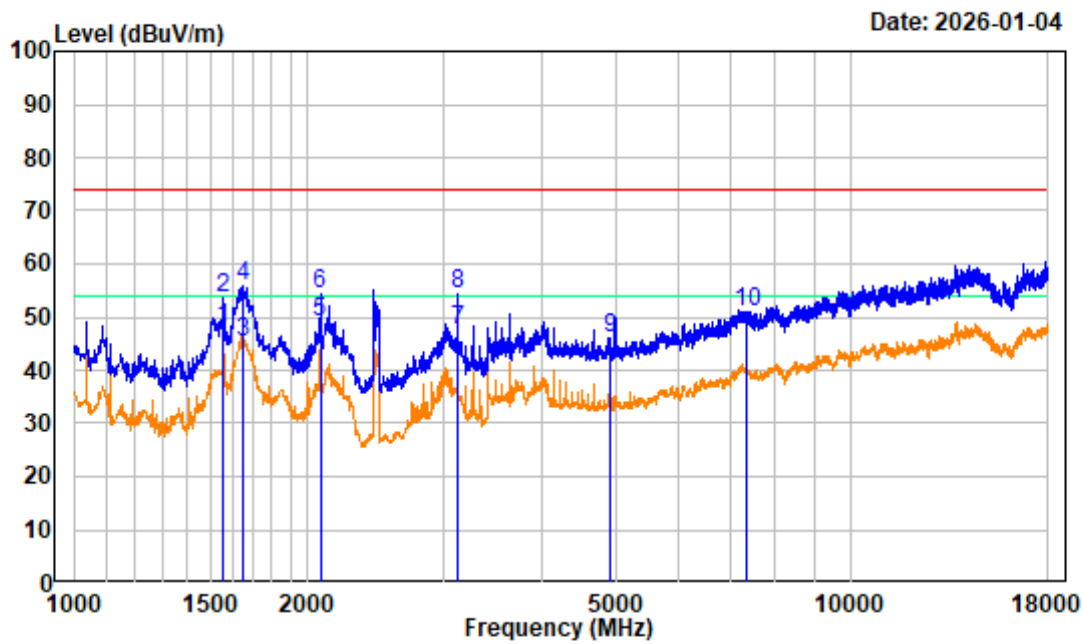

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11n40 High Channel 2452MHz 1GHz-18GHz  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 61.23      | 47.87  | 54.00      | -6.13      | Average |
| 2  | 1558.875 | -13.36 | 66.83      | 53.47  | 74.00      | -20.53     | Peak    |
| 3  | 1650.250 | -13.28 | 58.52      | 45.24  | 54.00      | -8.76      | Average |
| 4  | 1650.250 | -13.28 | 69.10      | 55.82  | 74.00      | -18.18     | Peak    |
| 5  | 2077.375 | -11.13 | 60.22      | 49.09  | 54.00      | -4.91      | Average |
| 6  | 2077.375 | -11.13 | 65.49      | 54.36  | 74.00      | -19.64     | Peak    |
| 7  | 3118.625 | -9.79  | 57.23      | 47.44  | 54.00      | -6.56      | Average |
| 8  | 3118.625 | -9.79  | 64.29      | 54.50  | 74.00      | -19.50     | Peak    |
| 9  | 4904.000 | -6.52  | 52.64      | 46.12  | 74.00      | -27.88     | peak    |
| 10 | 7356.000 | -1.26  | 52.30      | 51.04  | 74.00      | -22.96     | peak    |


2.4G WIFI 802.11n40 High Channel Bandedge\_HORIZONTAL

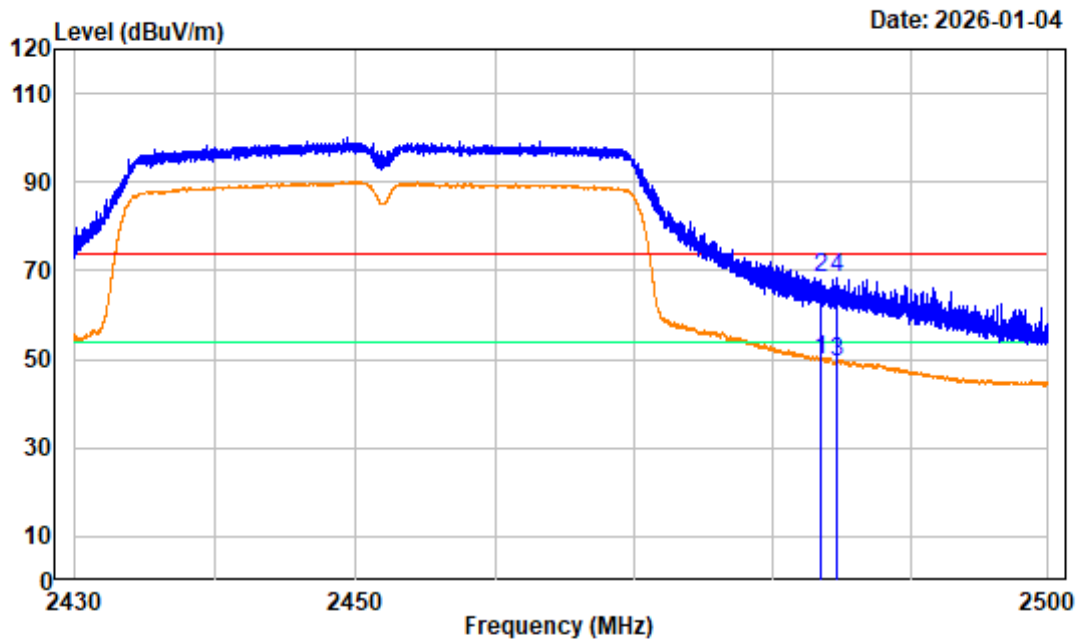

Site : chamber  
Condition : 3m HORIZONTAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11n40 High Channel 2452MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2483.500 | -10.23 | 60.14      | 49.91  | 54.00      | -4.09      | Average |
| 2 | 2483.500 | -10.23 | 78.46      | 68.23  | 74.00      | -5.77      | Peak    |
| 3 | 2484.653 | -10.23 | 59.64      | 49.41  | 54.00      | -4.59      | Average |
| 4 | 2484.653 | -10.23 | 78.46      | 68.23  | 74.00      | -5.77      | Peak    |


2.4G WIFI 802.11n40 High Channel Bandedge\_VERTICAL

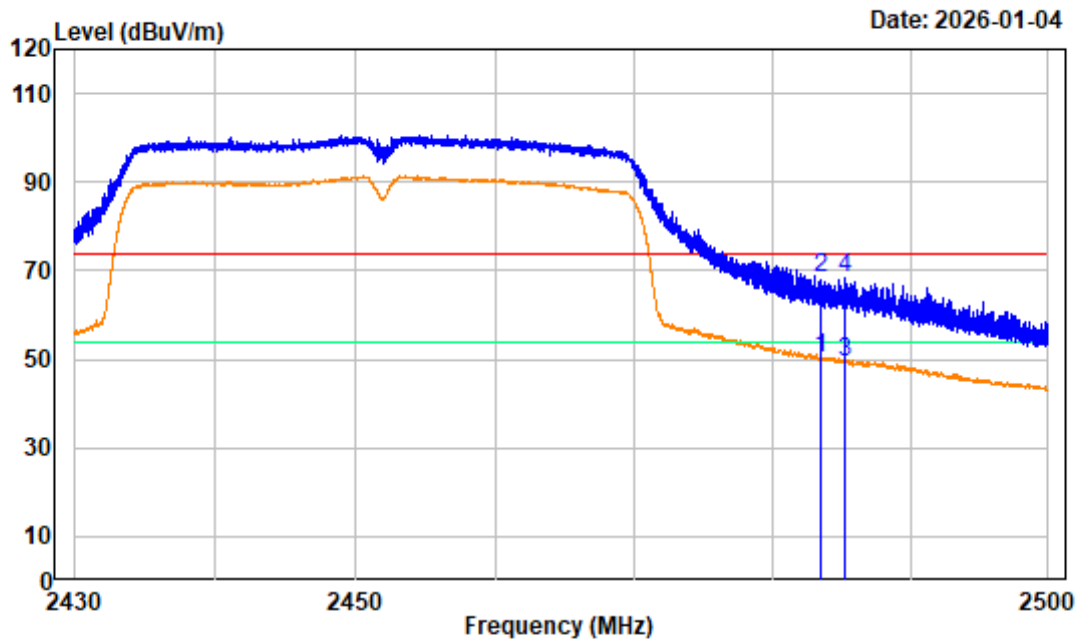

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11n40 High Channel 2452MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2483.500 | -10.23 | 60.36      | 50.13  | 54.00      | -3.87      | Average |
| 2 | 2483.500 | -10.23 | 78.78      | 68.55  | 74.00      | -5.45      | Peak    |
| 3 | 2485.186 | -10.25 | 59.78      | 49.53  | 54.00      | -4.47      | Average |
| 4 | 2485.186 | -10.25 | 78.80      | 68.55  | 74.00      | -5.45      | Peak    |

2.4G WIFI 802.11ax20 Low Channel 1GHz-18GHz\_HORIZONTAL

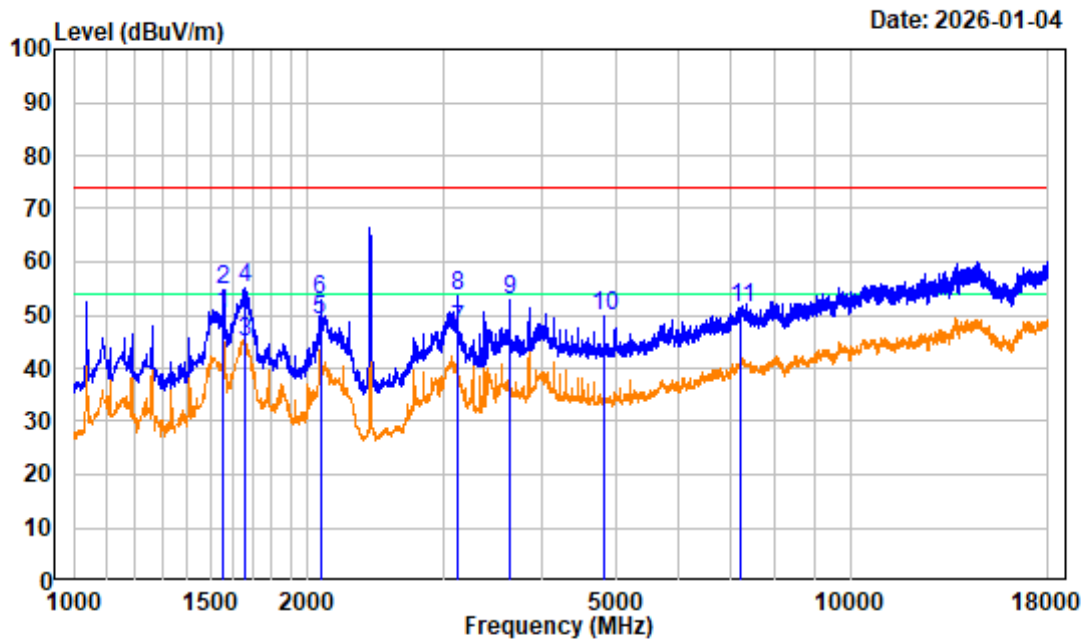

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11ax20 Low Channel 2412MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 63.70      | 50.34  | 54.00      | -3.66      | Average |
| 2  | 1558.875 | -13.36 | 68.04      | 54.68  | 74.00      | -19.32     | Peak    |
| 3  | 1658.750 | -13.23 | 58.05      | 44.82  | 54.00      | -9.18      | Average |
| 4  | 1658.750 | -13.23 | 68.37      | 55.14  | 74.00      | -18.86     | Peak    |
| 5  | 2077.375 | -11.13 | 60.35      | 49.22  | 54.00      | -4.78      | Average |
| 6  | 2077.375 | -11.13 | 63.88      | 52.75  | 74.00      | -21.25     | Peak    |
| 7  | 3118.625 | -9.79  | 56.85      | 47.06  | 54.00      | -6.94      | Average |
| 8  | 3118.625 | -9.79  | 63.33      | 53.54  | 74.00      | -20.46     | Peak    |
| 9  | 3639.250 | -9.09  | 61.99      | 52.90  | 74.00      | -21.10     | Peak    |
| 10 | 4824.000 | -6.64  | 56.31      | 49.67  | 74.00      | -24.33     | Peak    |
| 11 | 7236.000 | -1.32  | 52.62      | 51.30  | 74.00      | -22.70     | Peak    |


2.4G WIFI 802.11ax20 Low Channel 1GHz-18GHz\_VERTICAL

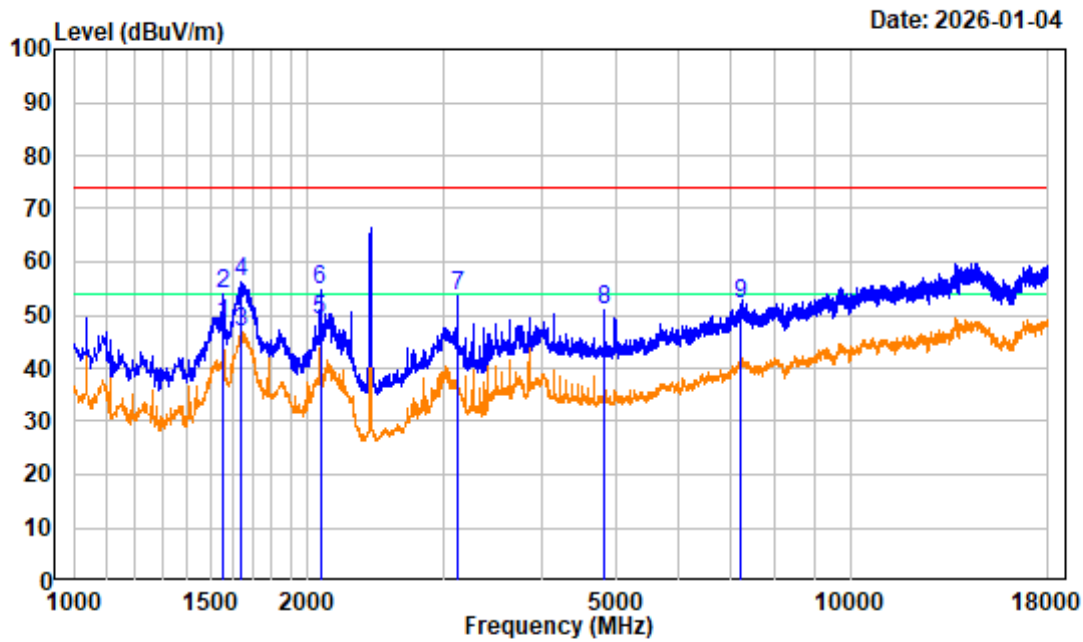

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11ax20 Low Channel 2412MHz 1GHz-18GHz  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 1558.875 | -13.36 | 61.79      | 48.43  | 54.00      | -5.57      | Average |
| 2 | 1558.875 | -13.36 | 67.46      | 54.10  | 74.00      | -19.90     | Peak    |
| 3 | 1646.000 | -13.30 | 60.06      | 46.76  | 54.00      | -7.24      | Average |
| 4 | 1646.000 | -13.30 | 69.37      | 56.07  | 74.00      | -17.93     | Peak    |
| 5 | 2077.375 | -11.13 | 60.25      | 49.12  | 54.00      | -4.88      | Average |
| 6 | 2077.375 | -11.13 | 66.01      | 54.88  | 74.00      | -19.12     | Peak    |
| 7 | 3118.625 | -9.79  | 63.56      | 53.77  | 74.00      | -20.23     | Peak    |
| 8 | 4824.000 | -6.64  | 57.60      | 50.96  | 74.00      | -23.04     | Peak    |
| 9 | 7236.000 | -1.32  | 53.53      | 52.21  | 74.00      | -21.79     | Peak    |

2.4G WIFI 802.11ax20 Low Channel Bandedge\_HORIZONTAL

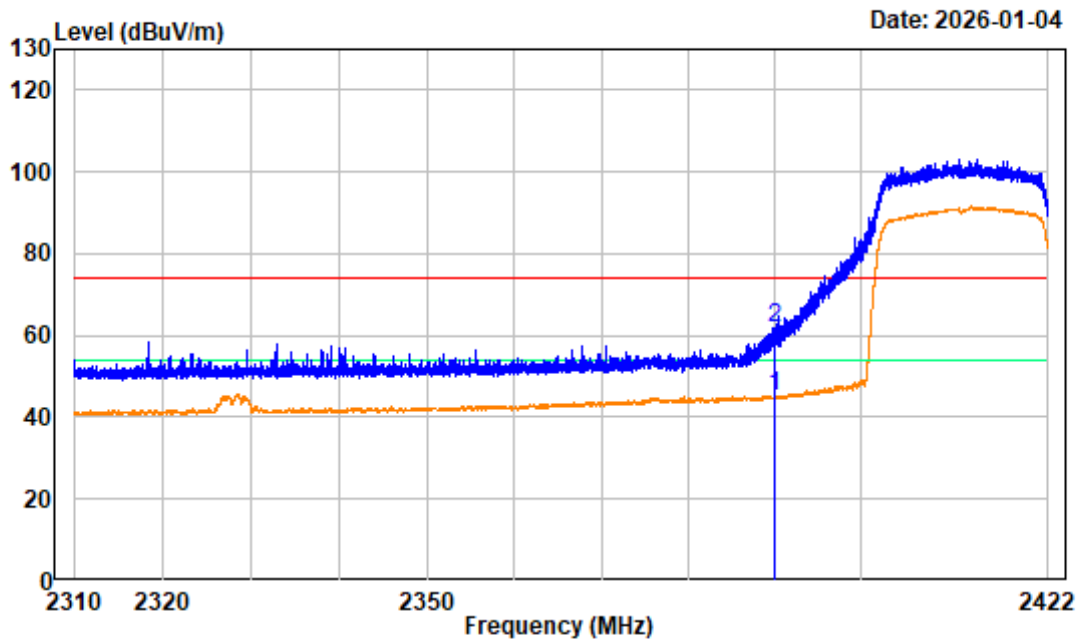

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF

Test Mode : Transmitting


Tester:Colin Lin

Note : 2.4G WIFI 802.11ax20 Low Channel 2412MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2390.000 | -10.25 | 55.28      | 45.03  | 54.00      | -8.97      | Average |
| 2 | 2390.000 | -10.25 | 72.09      | 61.84  | 74.00      | -12.16     | Peak    |


2.4G WIFI 802.11ax20 Low Channel Bandedge\_VERTICAL

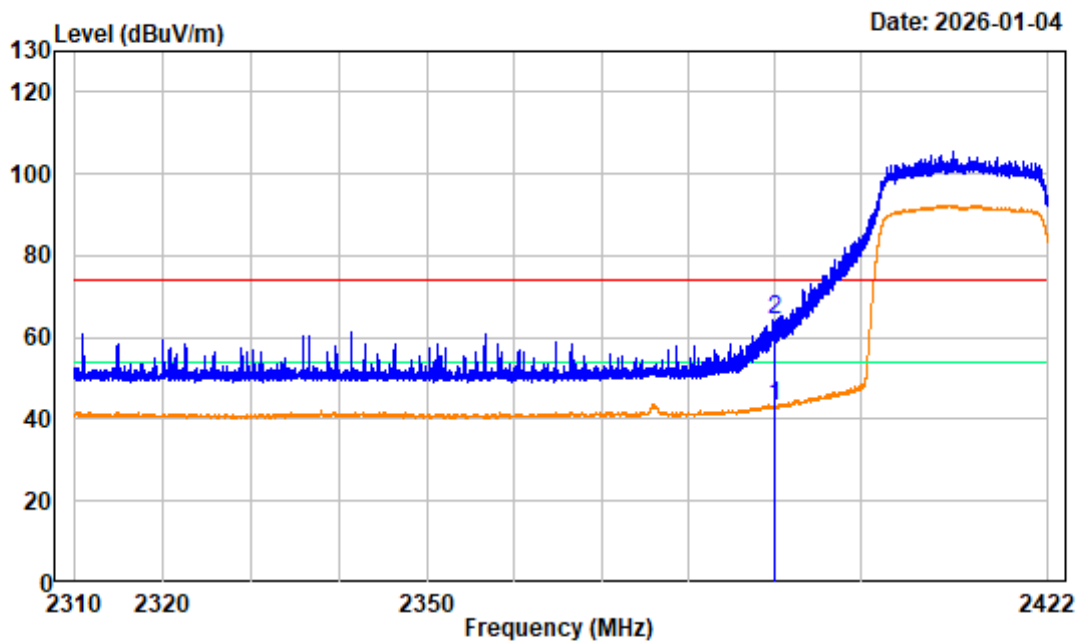

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11ax20 Low Channel 2412MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2390.000 | -10.25 | 53.46      | 43.21  | 54.00      | -10.79     | Average |
| 2 | 2390.000 | -10.25 | 74.67      | 64.42  | 74.00      | -9.58      | Peak    |

2.4G WIFI 802.11ax20 Middle Channel 1GHz-18GHz\_HORIZONTAL

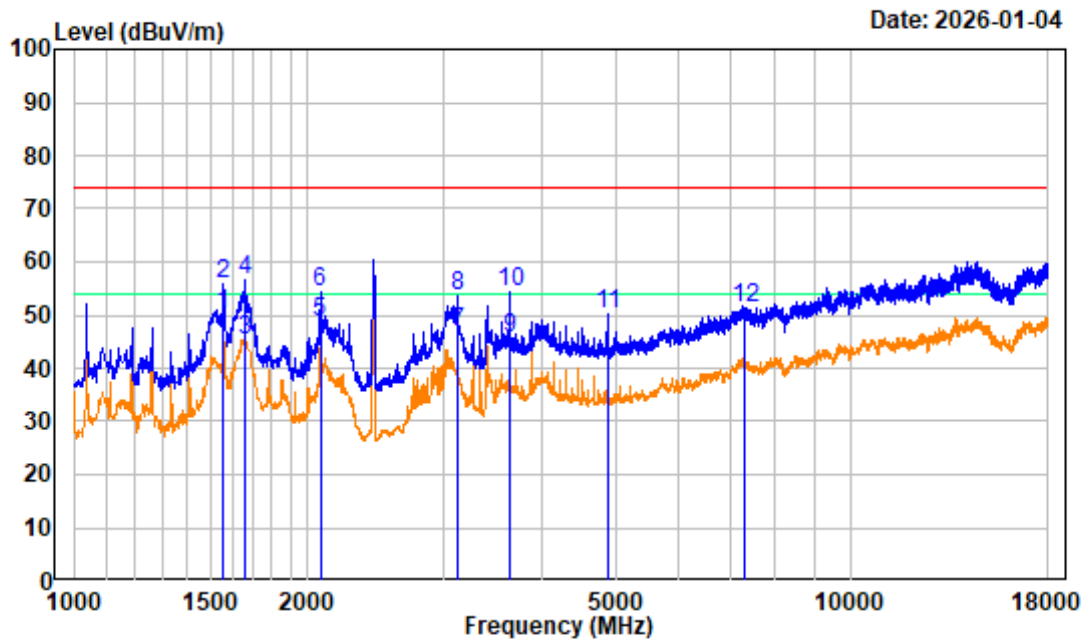

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11ax20 Middle Channel 2437MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 63.47      | 50.11  | 54.00      | -3.89      | Average |
| 2  | 1558.875 | -13.36 | 69.02      | 55.66  | 74.00      | -18.34     | Peak    |
| 3  | 1658.750 | -13.23 | 58.37      | 45.14  | 54.00      | -8.86      | Average |
| 4  | 1658.750 | -13.23 | 69.79      | 56.56  | 74.00      | -17.44     | Peak    |
| 5  | 2077.375 | -11.13 | 59.84      | 48.71  | 54.00      | -5.29      | Average |
| 6  | 2077.375 | -11.13 | 65.35      | 54.22  | 74.00      | -19.78     | Peak    |
| 7  | 3118.625 | -9.79  | 56.69      | 46.90  | 54.00      | -7.10      | Average |
| 8  | 3118.625 | -9.79  | 63.31      | 53.52  | 74.00      | -20.48     | Peak    |
| 9  | 3637.125 | -9.10  | 54.90      | 45.80  | 54.00      | -8.20      | Average |
| 10 | 3637.125 | -9.10  | 63.57      | 54.47  | 74.00      | -19.53     | Peak    |
| 11 | 4874.000 | -6.58  | 56.63      | 50.05  | 74.00      | -23.95     | Peak    |
| 12 | 7311.000 | -1.12  | 52.35      | 51.23  | 74.00      | -22.77     | Peak    |

2.4G WIFI 802.11ax20 Middle Channel 1GHz-18GHz\_VERTICAL

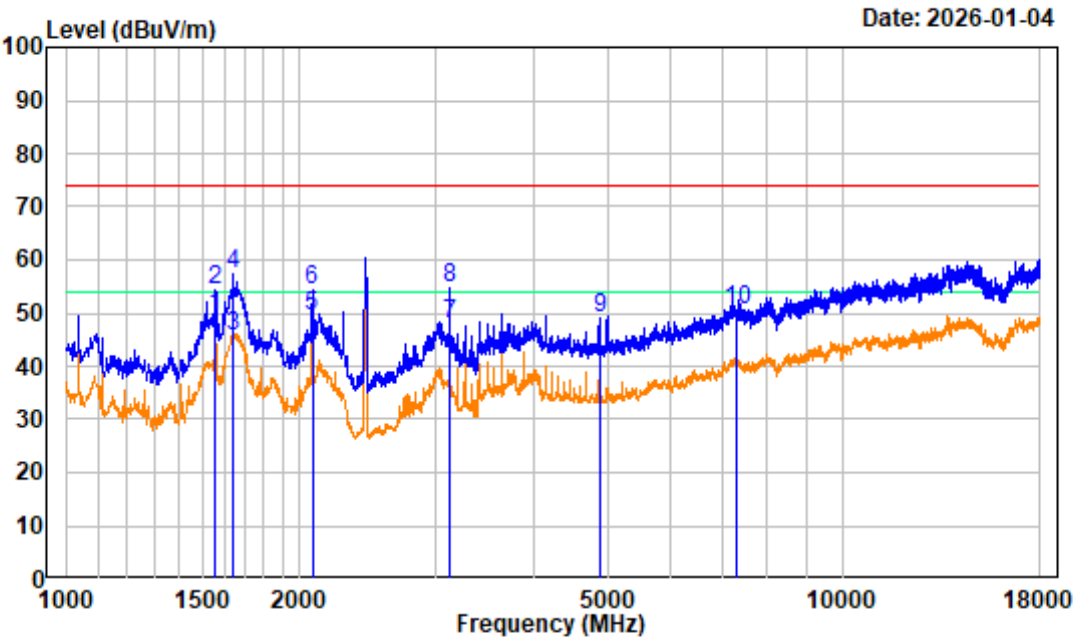

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11ax20 Middle Channel 2437MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 62.96      | 49.60  | 54.00      | -4.40      | Average |
| 2  | 1558.875 | -13.36 | 67.70      | 54.34  | 74.00      | -19.66     | Peak    |
| 3  | 1643.875 | -13.32 | 59.03      | 45.71  | 54.00      | -8.29      | Average |
| 4  | 1643.875 | -13.32 | 70.85      | 57.53  | 74.00      | -16.47     | Peak    |
| 5  | 2077.375 | -11.13 | 60.61      | 49.48  | 54.00      | -4.52      | Average |
| 6  | 2077.375 | -11.13 | 65.33      | 54.20  | 74.00      | -19.80     | Peak    |
| 7  | 3116.500 | -9.80  | 57.91      | 48.11  | 54.00      | -5.89      | Average |
| 8  | 3116.500 | -9.80  | 64.53      | 54.73  | 74.00      | -19.27     | Peak    |
| 9  | 4874.000 | -6.58  | 55.57      | 48.99  | 74.00      | -25.01     | Peak    |
| 10 | 7311.000 | -1.12  | 51.76      | 50.64  | 74.00      | -23.36     | Peak    |

2.4G WIFI 802.11ax20 High Channel 1GHz-18GHz\_HORIZONTAL

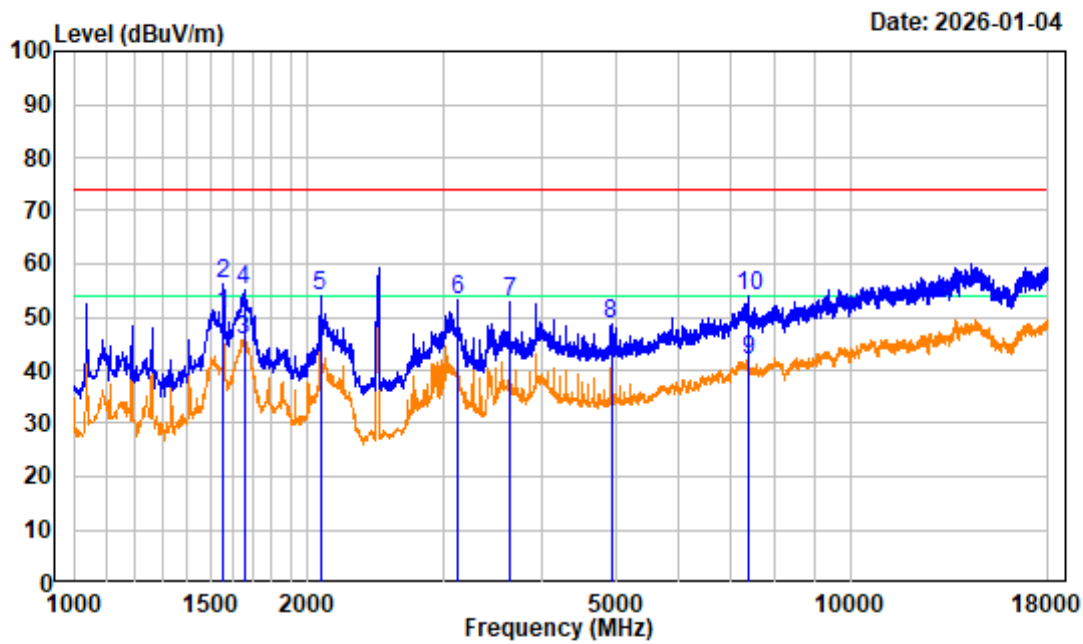

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11ax20 High Channel 2462MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 64.03      | 50.67  | 54.00      | -3.33      | Average |
| 2  | 1558.875 | -13.36 | 69.54      | 56.18  | 74.00      | -17.82     | Peak    |
| 3  | 1656.625 | -13.25 | 59.07      | 45.82  | 54.00      | -8.18      | Average |
| 4  | 1656.625 | -13.25 | 68.29      | 55.04  | 74.00      | -18.96     | Peak    |
| 5  | 2077.375 | -11.13 | 65.12      | 53.99  | 74.00      | -20.01     | Peak    |
| 6  | 3118.625 | -9.79  | 62.97      | 53.18  | 74.00      | -20.82     | Peak    |
| 7  | 3637.125 | -9.10  | 61.98      | 52.88  | 74.00      | -21.12     | Peak    |
| 8  | 4924.000 | -6.48  | 55.33      | 48.85  | 74.00      | -25.15     | Peak    |
| 9  | 7386.000 | -1.31  | 43.16      | 41.85  | 54.00      | -12.15     | Average |
| 10 | 7386.000 | -1.31  | 55.39      | 54.08  | 74.00      | -19.92     | Peak    |


2.4G WIFI 802.11ax20 High Channel 1GHz-18GHz\_VERTICAL

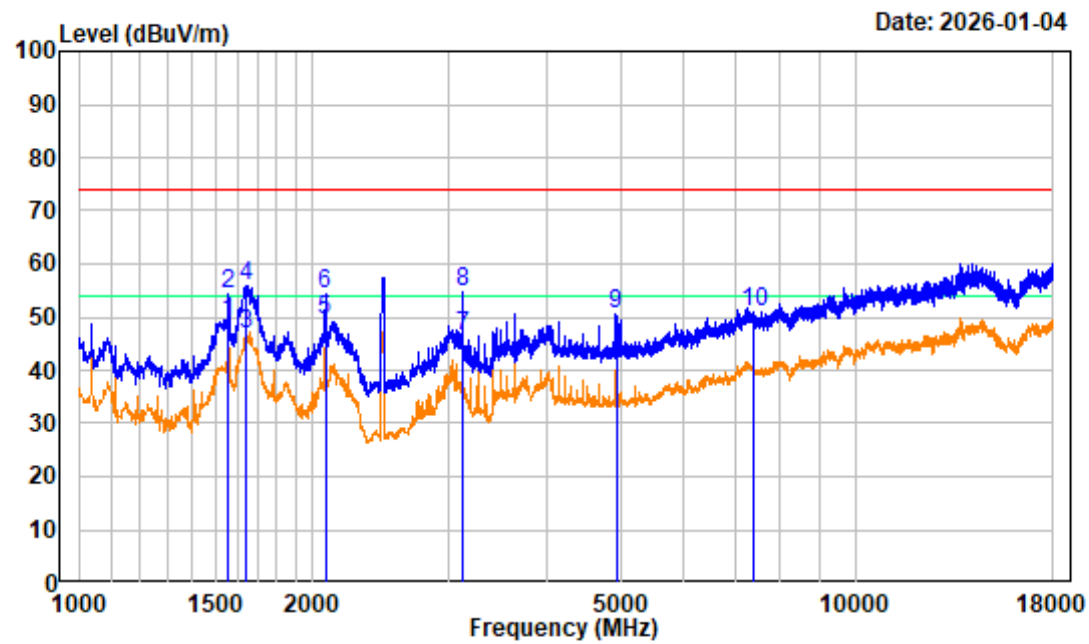

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11ax20 High Channel 2462MHz 1GHz-18GHz  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 62.56      | 49.20  | 54.00      | -4.80      | Average |
| 2  | 1558.875 | -13.36 | 67.53      | 54.17  | 74.00      | -19.83     | Peak    |
| 3  | 1646.000 | -13.30 | 60.22      | 46.92  | 54.00      | -7.08      | Average |
| 4  | 1646.000 | -13.30 | 69.20      | 55.90  | 74.00      | -18.10     | Peak    |
| 5  | 2077.375 | -11.13 | 60.54      | 49.41  | 54.00      | -4.59      | Average |
| 6  | 2077.375 | -11.13 | 65.42      | 54.29  | 74.00      | -19.71     | Peak    |
| 7  | 3118.625 | -9.79  | 56.16      | 46.37  | 54.00      | -7.63      | Average |
| 8  | 3118.625 | -9.79  | 64.68      | 54.89  | 74.00      | -19.11     | Peak    |
| 9  | 4924.000 | -6.48  | 57.05      | 50.57  | 74.00      | -23.43     | Peak    |
| 10 | 7386.000 | -1.31  | 52.07      | 50.76  | 74.00      | -23.24     | Peak    |

2.4G WIFI 802.11ax20 High Channel Bandedge\_HORIZONTAL

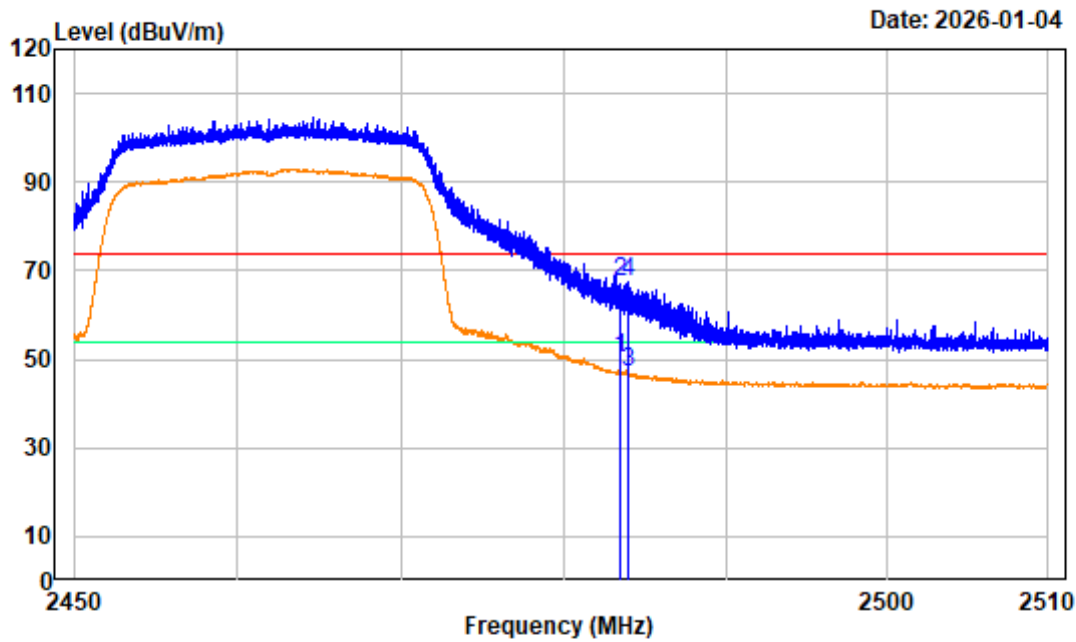

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11ax20 High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2483.500 | -10.23 | 60.70      | 50.47  | 54.00      | -3.53      | Average |
| 2 | 2483.500 | -10.23 | 77.72      | 67.49  | 74.00      | -6.51      | Peak    |
| 3 | 2483.952 | -10.23 | 57.30      | 47.07  | 54.00      | -6.93      | Average |
| 4 | 2483.952 | -10.23 | 77.72      | 67.49  | 74.00      | -6.51      | Peak    |


2.4G WIFI 802.11ax20 High Channel Bandedge\_VERTICAL

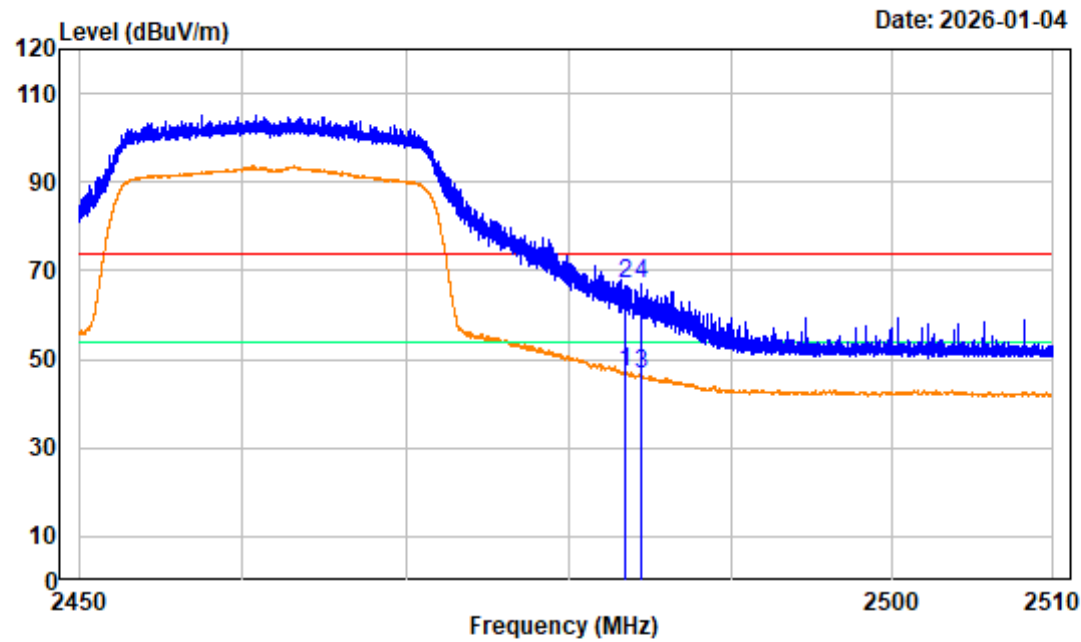

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11ax20 High Channel 2462MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2483.500 | -10.23 | 57.23      | 47.00  | 54.00      | -7.00      | Average |
| 2 | 2483.500 | -10.23 | 77.07      | 66.84  | 74.00      | -7.16      | Peak    |
| 3 | 2484.417 | -10.23 | 56.74      | 46.51  | 54.00      | -7.49      | Average |
| 4 | 2484.417 | -10.23 | 77.07      | 66.84  | 74.00      | -7.16      | Peak    |

2.4G WIFI 802.11ax40 Low Channel 1GHz-18GHz\_HORIZONTAL

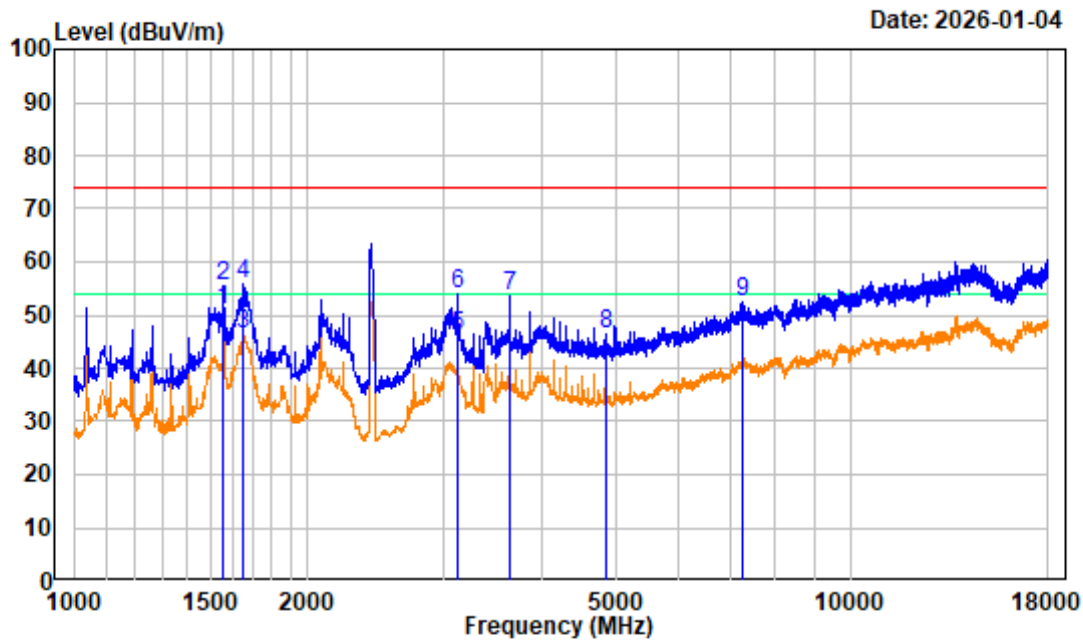

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11ax40 Low Channel 2422MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 1558.875 | -13.36 | 64.18      | 50.82  | 54.00      | -3.18      | Average |
| 2 | 1558.875 | -13.36 | 68.87      | 55.51  | 74.00      | -18.49     | Peak    |
| 3 | 1654.500 | -13.26 | 59.63      | 46.37  | 54.00      | -7.63      | Average |
| 4 | 1654.500 | -13.26 | 69.02      | 55.76  | 74.00      | -18.24     | Peak    |
| 5 | 3118.625 | -9.79  | 55.79      | 46.00  | 54.00      | -8.00      | Average |
| 6 | 3118.625 | -9.79  | 63.82      | 54.03  | 74.00      | -19.97     | Peak    |
| 7 | 3637.125 | -9.10  | 62.69      | 53.59  | 74.00      | -20.41     | Peak    |
| 8 | 4844.000 | -6.64  | 52.92      | 46.28  | 74.00      | -27.72     | Peak    |
| 9 | 7266.000 | -1.23  | 53.87      | 52.64  | 74.00      | -21.36     | Peak    |

2.4G WIFI 802.11ax40 Low Channel 1GHz-18GHz\_VERTICAL

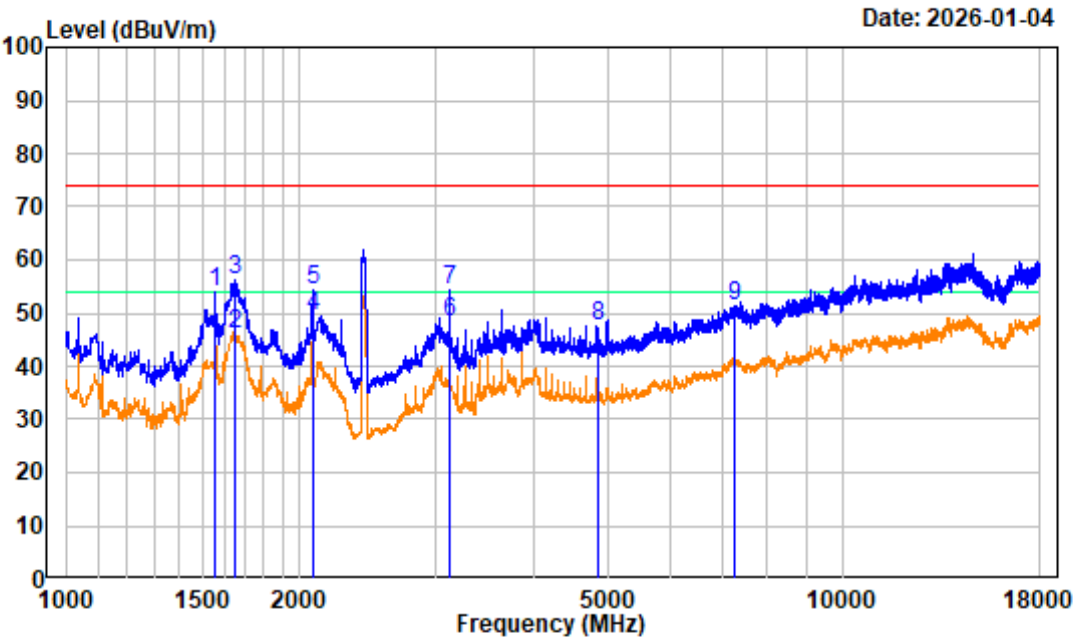

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11ax40 Low Channel 2422MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 1558.875 | -13.36 | 67.25      | 53.89  | 74.00      | -20.11     | Peak    |
| 2 | 1648.125 | -13.29 | 59.38      | 46.09  | 54.00      | -7.91      | Average |
| 3 | 1648.125 | -13.29 | 69.60      | 56.31  | 74.00      | -17.69     | Peak    |
| 4 | 2079.500 | -11.11 | 60.61      | 49.50  | 54.00      | -4.50      | Average |
| 5 | 2079.500 | -11.11 | 65.52      | 54.41  | 74.00      | -19.59     | Peak    |
| 6 | 3118.625 | -9.79  | 57.98      | 48.19  | 54.00      | -5.81      | Average |
| 7 | 3118.625 | -9.79  | 64.03      | 54.24  | 74.00      | -19.76     | Peak    |
| 8 | 4844.000 | -6.64  | 54.11      | 47.47  | 74.00      | -26.53     | Peak    |
| 9 | 7266.000 | -1.23  | 52.71      | 51.48  | 74.00      | -22.52     | Peak    |


2.4G WIFI 802.11ax40 Low Channel Bandedge\_HORIZONTAL

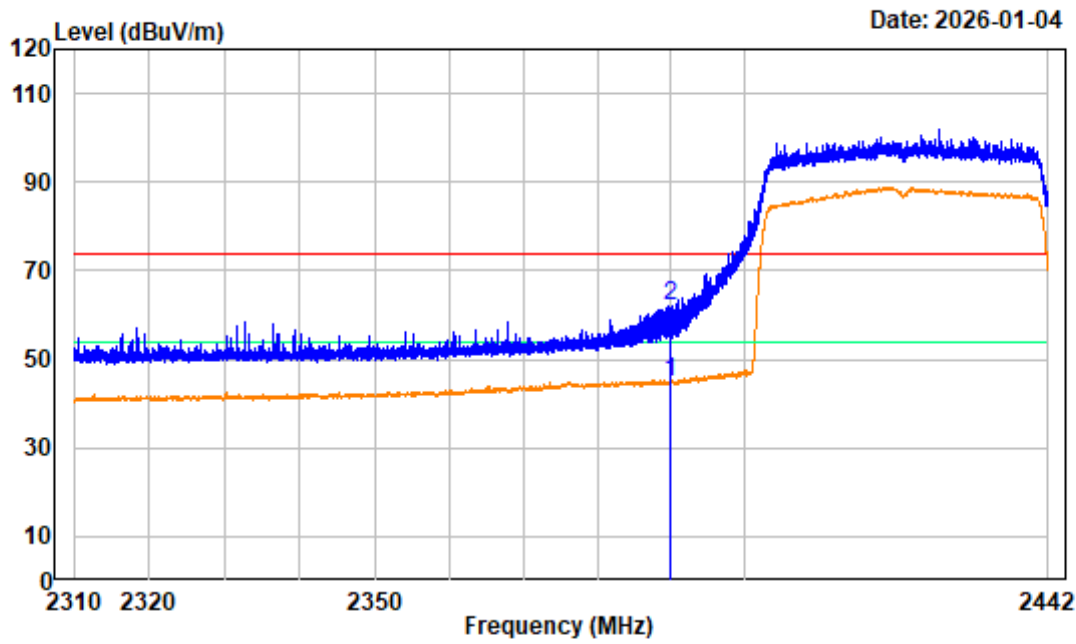

Site : chamber  
Condition : 3m HORIZONTAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11ax40 Low Channel 2422MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2390.000 | -10.25 | 54.89      | 44.64  | 54.00      | -9.36      | Average |
| 2 | 2390.000 | -10.25 | 72.40      | 62.15  | 74.00      | -11.85     | Peak    |

2.4G WIFI 802.11ax40 Low Channel Bandedge\_VERTICAL

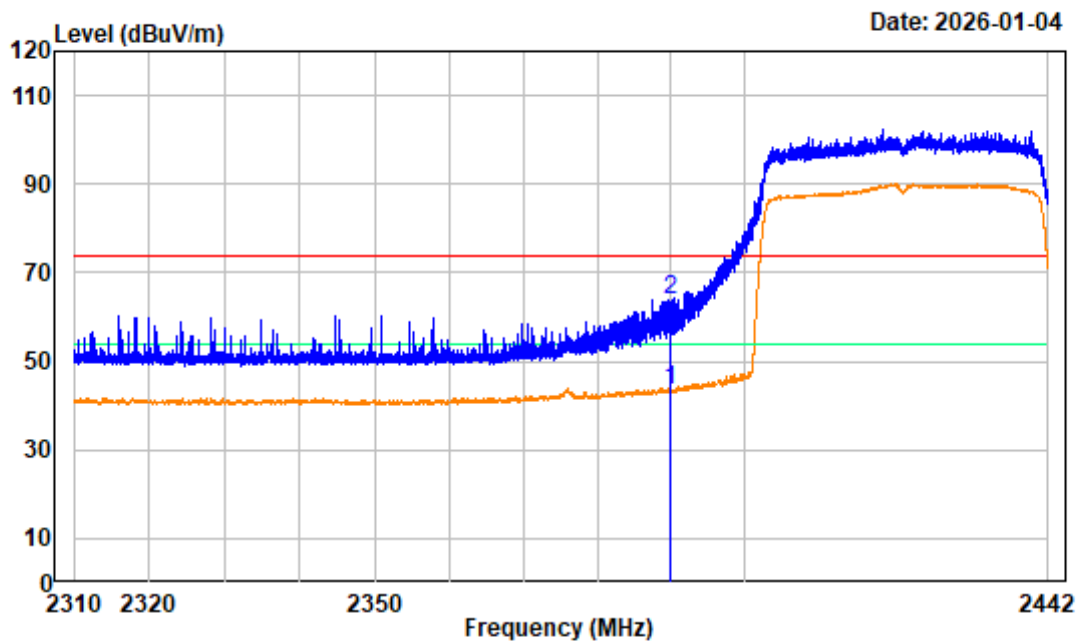

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11ax40 Low Channel 2422MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2390.000 | -10.25 | 53.87      | 43.62  | 54.00      | -10.38     | Average |
| 2 | 2390.000 | -10.25 | 74.09      | 63.84  | 74.00      | -10.16     | Peak    |

2.4G WIFI 802.11ax40 Middle Channel 1GHz-18GHz\_HORIZONTAL

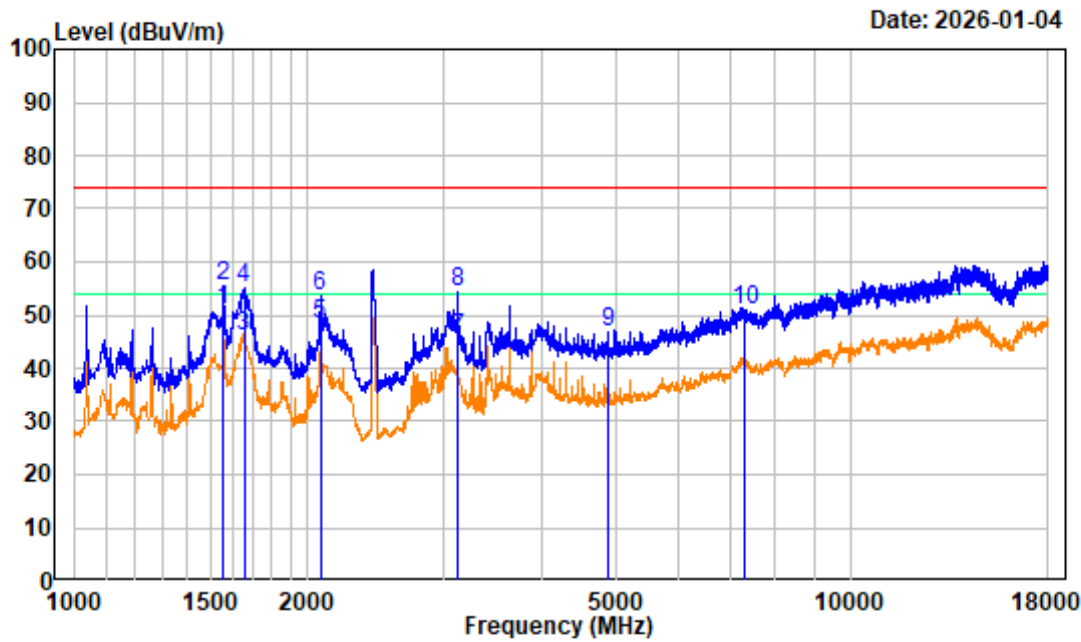

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11ax40 Middle Channel 2437MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 64.30      | 50.94  | 54.00      | -3.06      | Average |
| 2  | 1558.875 | -13.36 | 68.72      | 55.36  | 74.00      | -18.64     | Peak    |
| 3  | 1656.625 | -13.25 | 59.32      | 46.07  | 54.00      | -7.93      | Average |
| 4  | 1656.625 | -13.25 | 68.41      | 55.16  | 74.00      | -18.84     | Peak    |
| 5  | 2077.375 | -11.13 | 59.45      | 48.32  | 54.00      | -5.68      | Average |
| 6  | 2077.375 | -11.13 | 64.64      | 53.51  | 74.00      | -20.49     | Peak    |
| 7  | 3116.500 | -9.80  | 55.58      | 45.78  | 54.00      | -8.22      | Average |
| 8  | 3116.500 | -9.80  | 64.01      | 54.21  | 74.00      | -19.79     | Peak    |
| 9  | 4874.000 | -6.58  | 53.20      | 46.62  | 74.00      | -27.38     | Peak    |
| 10 | 7311.000 | -1.12  | 52.00      | 50.88  | 74.00      | -23.12     | Peak    |

2.4G WIFI 802.11ax40 Middle Channel 1GHz-18GHz\_VERTICAL

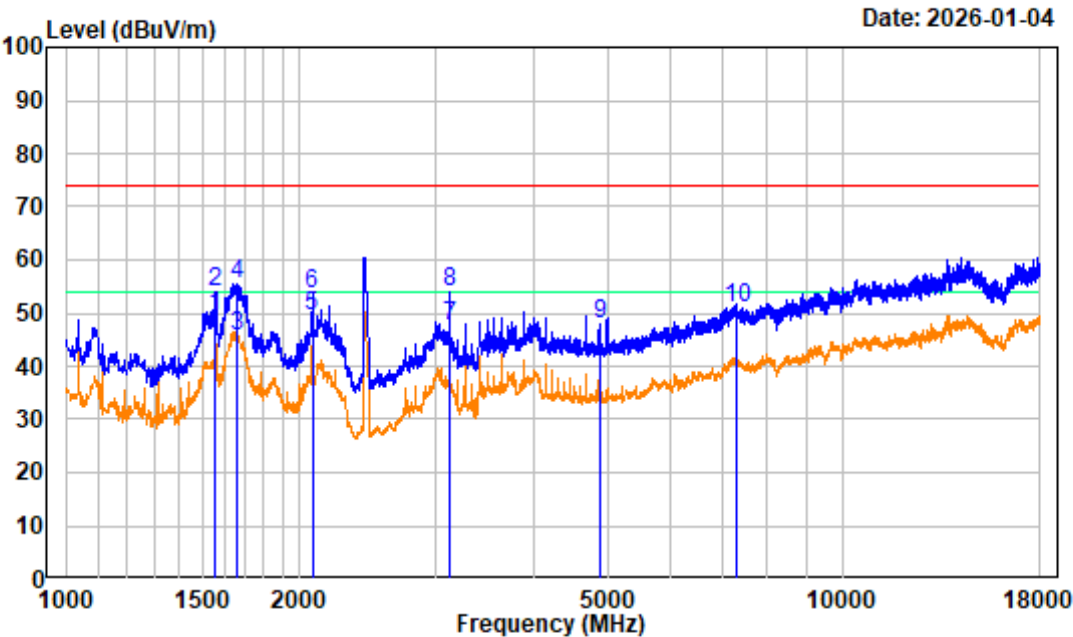

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11ax40 Middle Channel 2437MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 62.65      | 49.29  | 54.00      | -4.71      | Average |
| 2  | 1558.875 | -13.36 | 67.46      | 54.10  | 74.00      | -19.90     | Peak    |
| 3  | 1658.750 | -13.23 | 58.81      | 45.58  | 54.00      | -8.42      | Average |
| 4  | 1658.750 | -13.23 | 68.80      | 55.57  | 74.00      | -18.43     | Peak    |
| 5  | 2077.375 | -11.13 | 60.42      | 49.29  | 54.00      | -4.71      | Average |
| 6  | 2077.375 | -11.13 | 64.76      | 53.63  | 74.00      | -20.37     | Peak    |
| 7  | 3118.625 | -9.79  | 57.27      | 47.48  | 54.00      | -6.52      | Average |
| 8  | 3118.625 | -9.79  | 63.67      | 53.88  | 74.00      | -20.12     | Peak    |
| 9  | 4874.000 | -6.58  | 54.60      | 48.02  | 74.00      | -25.98     | Peak    |
| 10 | 7311.000 | -1.12  | 51.95      | 50.83  | 74.00      | -23.17     | Peak    |

2.4G WIFI 802.11ax40 High Channel 1GHz-18GHz\_HORIZONTAL

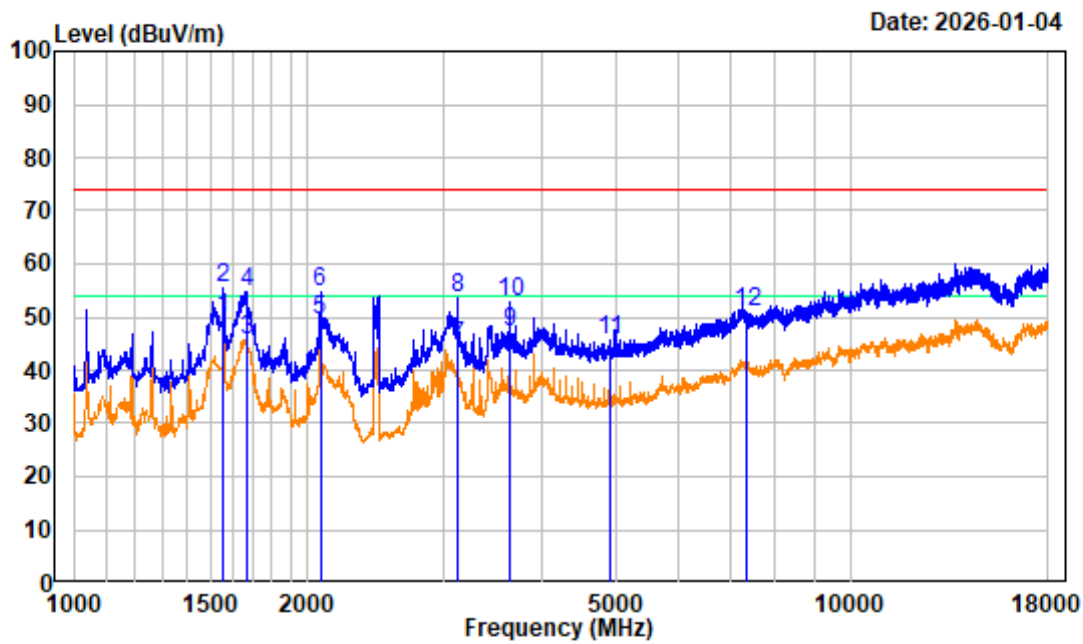

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504A04025E-RF

Test Mode : Transmitting


Tester:Colin Lin

Note : 2.4G WIFI 802.11ax40 High Channel 2452MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|    | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|----|----------|--------|------------|--------|------------|------------|---------|
|    | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1  | 1558.875 | -13.36 | 63.20      | 49.84  | 54.00      | -4.16      | Average |
| 2  | 1558.875 | -13.36 | 68.98      | 55.62  | 74.00      | -18.38     | Peak    |
| 3  | 1669.375 | -13.18 | 58.72      | 45.54  | 54.00      | -8.46      | Average |
| 4  | 1669.375 | -13.18 | 68.03      | 54.85  | 74.00      | -19.15     | Peak    |
| 5  | 2077.375 | -11.13 | 60.61      | 49.48  | 54.00      | -4.52      | Average |
| 6  | 2077.375 | -11.13 | 65.89      | 54.76  | 74.00      | -19.24     | Peak    |
| 7  | 3116.500 | -9.80  | 54.18      | 44.38  | 54.00      | -9.62      | Average |
| 8  | 3116.500 | -9.80  | 63.27      | 53.47  | 74.00      | -20.53     | Peak    |
| 9  | 3637.125 | -9.10  | 56.11      | 47.01  | 54.00      | -6.99      | Average |
| 10 | 3637.125 | -9.10  | 62.06      | 52.96  | 74.00      | -21.04     | Peak    |
| 11 | 4904.000 | -6.52  | 52.20      | 45.68  | 74.00      | -28.32     | peak    |
| 12 | 7356.000 | -1.26  | 52.04      | 50.78  | 74.00      | -23.22     | peak    |

2.4G WIFI 802.11ax40 High Channel 1GHz-18GHz\_VERTICAL

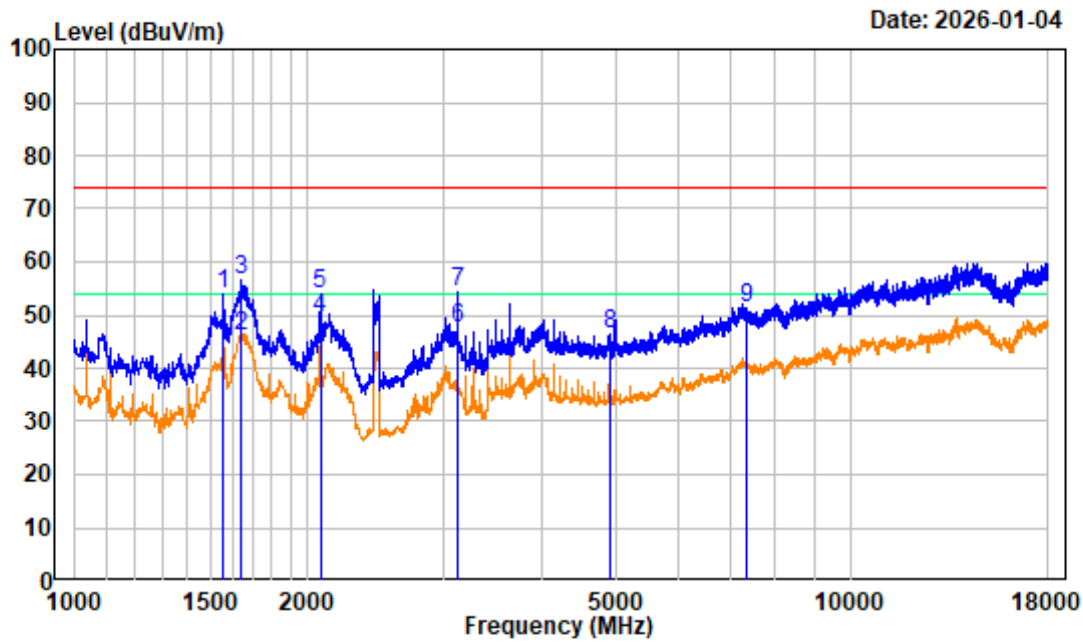

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504A04025E-RF


Test Mode : TransmittingTester:Colin Lin

Note : 2.4G WIFI 802.11ax40 High Channel 2452MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 1558.875 | -13.36 | 67.23      | 53.87  | 74.00      | -20.13     | Peak    |
| 2 | 1646.000 | -13.30 | 59.43      | 46.13  | 54.00      | -7.87      | Average |
| 3 | 1646.000 | -13.30 | 69.94      | 56.64  | 74.00      | -17.36     | Peak    |
| 4 | 2077.375 | -11.13 | 60.42      | 49.29  | 54.00      | -4.71      | Average |
| 5 | 2077.375 | -11.13 | 65.16      | 54.03  | 74.00      | -19.97     | Peak    |
| 6 | 3116.500 | -9.80  | 57.39      | 47.59  | 54.00      | -6.41      | Average |
| 7 | 3116.500 | -9.80  | 64.21      | 54.41  | 74.00      | -19.59     | Peak    |
| 8 | 4904.000 | -6.52  | 53.08      | 46.56  | 74.00      | -27.44     | peak    |
| 9 | 7356.000 | -1.26  | 52.59      | 51.33  | 74.00      | -22.67     | peak    |


2.4G WIFI 802.11ax40 High Channel Bandedge\_HORIZONTAL

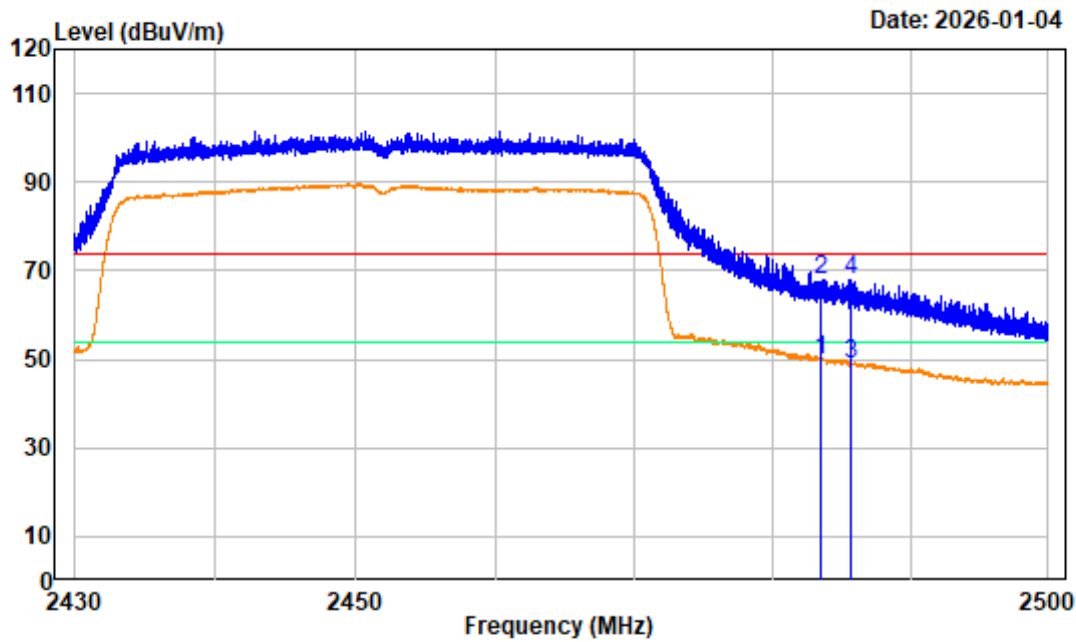

Site : chamber  
Condition : 3m HORIZONTAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11ax40 High Channel 2452MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2483.500 | -10.23 | 60.15      | 49.92  | 54.00      | -4.08      | Average |
| 2 | 2483.500 | -10.23 | 78.38      | 68.15  | 74.00      | -5.85      | Peak    |
| 3 | 2485.633 | -10.25 | 59.29      | 49.04  | 54.00      | -4.96      | Average |
| 4 | 2485.633 | -10.25 | 78.40      | 68.15  | 74.00      | -5.85      | Peak    |

2.4G WIFI 802.11ax40 High Channel Bandedge\_VERTICAL

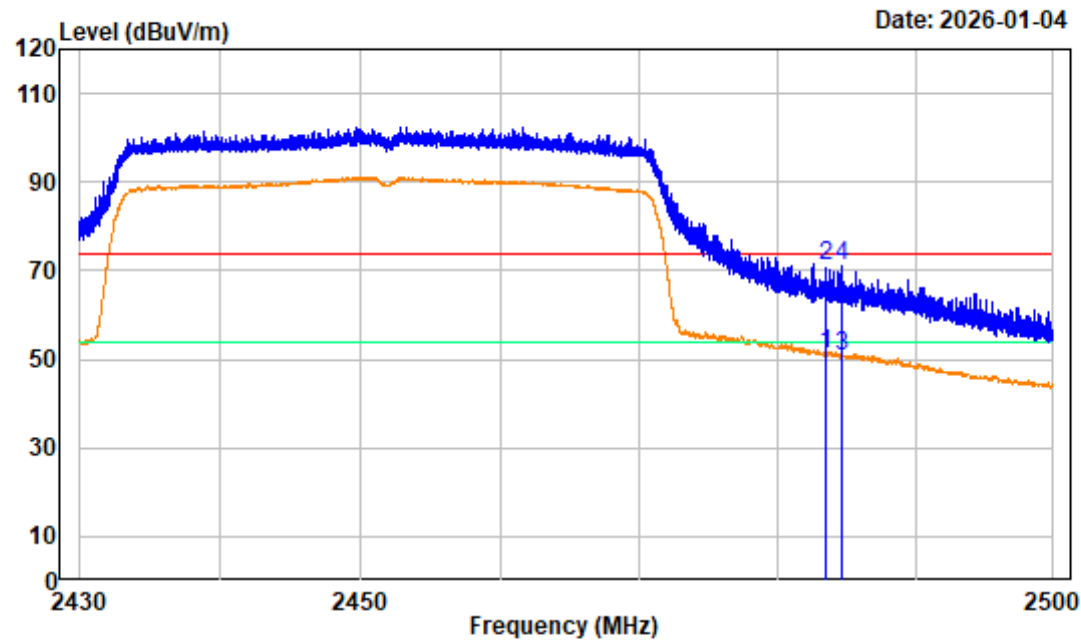

Site : chamber  
Condition : 3m VERTICAL  
Project No.: 2504A04025E-RF  
Test Mode : Transmitting Tester:Colin Lin  
Note : 2.4G WIFI 802.11ax40 High Channel 2452MHz Bandedge  
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|--------|------------|--------|------------|------------|---------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 2483.500 | -10.23 | 61.30      | 51.07  | 54.00      | -2.93      | Average |
| 2 | 2483.500 | -10.23 | 81.44      | 71.21  | 74.00      | -2.79      | Peak    |
| 3 | 2484.617 | -10.23 | 61.01      | 50.78  | 54.00      | -3.22      | Average |
| 4 | 2484.617 | -10.23 | 81.44      | 71.21  | 74.00      | -2.79      | Peak    |

## 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

### Applicable Standard

#### According to FCC §15.247(a)(2):

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

#### According to ANSI C63.10-2020, section 11.8 and section 6.9

The steps for the first option are as follows:


- a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

#### According to ANSI C63.10-2020, section 7.8.6 and section 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

- h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).



Note: Offset = RF cable loss(0.5dB<sup>#</sup>) + Attenuator(10dB)

### Test Data

**Test Result:** Compliance. Please refer to the Appendix.

## MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard

#### According to FCC §15.247(b)(3):

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


### Test Procedure

#### According to ANSI C63.10-2020, section 11.9.1.2

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast responding diode detector.

#### According to ANSI C63.10-2020, section 11.9.2.3

- Measurement using a power meter (PM)(Method AVGPM)
  - a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent, if all of the conditions listed below are satisfied:
    - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
    - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
    - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
  - b) If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal as described in 11.6.
  - c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
  - d) Correct the measurement in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle.



Note: Offset = RF cable loss(0.5dB<sup>#</sup>) + Attenuator(10dB)

### Test Data

**Test Result:** Compliance. Please refer to the Appendix.

## CONDUCTED SPURIOUS EMISSION

### Applicable Standard

#### According to FCC §15.247(d):


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

#### According to ANSI C63.10-2020, section 11.11

- Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution. NOTE—the number of points can also be increased for large spans to retain frequency resolution
- Set the RBW: 100 kHz
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.



Note: Offset = RF cable loss(0.5dB<sup>#</sup>/3.0dB<sup>#</sup>) + Attenuator(10dB)

The cable loss of 0.5dB<sup>#</sup> has been added into test result, except for test result of frequencies from 30 MHz to 25 GHz, where a maximum cable loss of 3.0dB<sup>#</sup> has been added.

### Test Data

**Test Result:** Compliance. Please refer to the Appendix.

## POWER SPECTRAL DENSITY

### Applicable Standard

#### According to FCC §15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


### Test Procedure

#### According to ANSI C63.10-2020, section 11.10.2

- Method PKPSD (peak PSD)

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span  $>1.5$  times the DTS bandwidth.
- Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.



Note: Offset = RF cable loss(0.5dB<sup>#</sup>) + Attenuator(10dB)

### Test Data

**Test Result:** Compliance. Please refer to the Appendix.


## DUTY CYCLE

### Test Procedure

#### According to ANSI C63.10-2020 Section 11.6

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
  - 1) Set the center frequency of the instrument to the center frequency of the transmission.
  - 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
  - 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
  - 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)



Note: Offset = RF cable loss(0.5dB<sup>#</sup>) + Attenuator(10dB)

### Test Data

**Test Result:** Compliance. Please refer to the Appendix.