



FCC TEST REPORT

FCC ID: 2AJ30-U45D

On Behalf of

SHENZHEN FZONE TECHNOLOGY CO.,LTD
STEREO IN-EAR MONITOR WIRELESS SYSTEM
Model No.: U45D, U45DT, U45DR2, U45DR4, U45DT7

Prepared for : SHENZHEN FZONE TECHNOLOGY CO.,LTD
Address : 2nd floor, Building12, Xicheng Industrial Area, Xixiang Town, Baoan District, Shenzhen, Guangdong, China.

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2512234-C01-R05
Date of Receipt : December 30, 2025
Date of Test : December 31, 2025 –January 7, 2026
Date of Report : January 12, 2026
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. General Information	5
1.1. Description of Device (EUT)	5
1.2. Test Facility	6
1.3. Equipment List	7
2. Summary Of Measurement	8
2.1. Summary of Test Result	8
2.2. Test Connection	8
2.3. Assistant Equipment Used For Test	9
2.4. Test Mode	9
2.5. Software test version and power setting information	9
2.6. Test Conditions	10
2.7. Measurement Uncertainty (95% confidence levels, k=2)	10
3. Radiated Emission and Band Edge	11
3.1. Radiated Emission Limits	11
3.2. Test Procedure	12
3.3. Deviation From Test Standard	13
3.4. Test Setup	13
3.5. Eut Operating Conditions	14
3.6. Test Results	14
4. Power Line Conducted Emission	23
4.1. Test Limits	23
4.2. Test Procedure	23
4.3. Test Setup	23
4.4. Test Results	24
5. Bandwidth Test	27
5.1. Test Standard and Limit	27
5.2. Test Setup	27
5.3. Test Procedure	27
5.4. Test Results	27
6. Antenna Requirement	30
6.1. Standard Requirement	30
6.2. EUT Antenna	30
7. Photos of test setup	31
8. Photos of EUT	31

TEST REPORT DECLARATION

Applicant : SHENZHEN FZONE TECHNOLOGY CO.,LTD
Address : 2nd floor, Building12, Xicheng Industrial Area, Xixiang Town, Baoan District,
Shenzhen, Guangdong, China.
Manufacturer : SHENZHEN FZONE TECHNOLOGY CO.,LTD
Address : 2nd floor, Building12, Xicheng Industrial Area, Xixiang Town, Baoan District,
Shenzhen, Guangdong, China.
EUT Description : STEREO IN-EAR MONITOR WIRELESS SYSTEM
(A) Model No. : U45D, U45DT, U45DR2, U45DR4, U45DT7

(B) Trademark :



Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.249

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Jensen Wang
Test Engineer

A handwritten signature in black ink, appearing to read 'Jensen Wang', written over a dotted line.

Approved by (name + signature).....:

Simple Guan
Project Manager

A handwritten signature in black ink, appearing to read 'Simple Guan', written over a dotted line.

Date of issue.....:

January 12, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	January 12, 2026	Initial released Issue	Jensen Wang



1. General Information

1.1. Description of Device (EUT)

EUT Name	:	STEREO IN-EAR MONITOR WIRELESS SYSTEM
Model No./HVIN	:	U45D, U45DT, U45DR2, U45DR4, U45DT7
		All samples are the same except that they are sold with different accessories.
		U45D: One Transmitter and one Receiver
DIFF.	:	U45DT: Single Transmitter unit
		U45DR2: One Transmitter and two Receivers
		U45DR4: One Transmitter and four Receivers
		U45DT7: One Transmitter, one Receiver, and one wired earphone
Power supply	:	DC 5V from USB, DC 3.7V from battery.
Radio technology	:	5.8G SRD
Operation frequency	:	5730~5844MHz
Modulation	:	FSK
Channel No.	:	18CH
Antenna Type	:	Internal antenna, max gain 3.29dBi
Software version	:	V0.20
Hardware version	:	V0.20
Intend use environment	:	Residential, commercial and light industrial environment
		Antenna information is provided by applicant.
Note	:	Testing lab is not responsible for the accuracy of the information.

1.2. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 21, 2023 File on Federal Communication Commission
Registration Number: 916281

September 21, 2023 Certificated by IC
Registration Number: 31123
CAB identifier: CN0158



1.3. Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2025.12.18	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2025.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2025.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2025.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2025.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G1 8G-45dB	SK20220329 01	/	2025.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118 G-45	SK20200108 01	/	2025.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.0 2-1111533-F z	/	2025.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2025.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2025.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2025.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	2022112516 38		2025.12.18	1 Year
17.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2025.12.18	1 Year

For Test Software Information

Item	Software Name	Manufacturer	Version
RE	EZ EMC	Farad	PSI-3A1
CE	EZ EMC	Farad	PSI-3A1
RF	RTS	TACHOY	V1.0.0

2. Summary Of Measurement

2.1. Summary of Test Result


EMISSION			
Description of Test Item	Test Requirement	Standard Paragraph	Results
Power Line Conducted Emission Test	FCC Part 15 RSS 210	Section 15.207 RSS-GEN(8.8)	P
Spurious Emission Test	FCC Part 15 RSS 210	Section 15.249&15.209 RSS-210 Annex B.10(a) & (b)	P
Occupied bandwidth	FCC Part 15 RSS 210	Section 15. 249 RSS-Gen §6.7	P
Band edge Requirement	FCC Part 15 RSS 210	Section 15.249&15.209 RSS-210 Annex B.10(a) & (b)	P
Antenna Requirement	FCC Part 15 RSS 210	Section 15.203 RSS-Gen §6.8	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.			

Note: The EUT has been tested as an independent unit. And continual transmitting in maximum power.

2.2. Test Connection

Conducted Emissions:

Adapter



EUT

Radiation Emission:

EUT

Spectrum
Analyzer



EUT

RF Conducted Test:

2.3. Assistant Equipment Used For Test

No.	Description	Manufacturer	Model	Serial Number	Certification
1	Adapter	Baseus	CCXFK65CC	N/A	N/A
2.	USB cable	N/A	N/A	N/A	N/A

2.4. Test Mode

Mode	Channel	Frequency(MHz)
FSK	CH1	5730
	CH5	5780
	CH18	5844
Charging		
Note: According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test.		

Channel List

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	5730MHz	10	5805MHz
2	5736MHz	11	5811MHz
3	5742MHz	12	5813MHz
4	5756MHz	13	5827MHz
5	5780MHz	14	5829MHz
6	5785MHz	15	5833MHz
7	5791MHz	16	5835MHz
8	5797MHz	17	5842MHz
9	5803MHz	18	5844MHz

2.5. Software test version and power setting information

Mode	The client 's preset testing software is used to control the operation of EUT in continuous transmission mode and select the testing channel, wireless mode:		
Power level setup by client			
Mode	Channel	Frequency (MHz)	Soft Set
FSK	CH1	5730	TX level is set as defaults
	CH5	5780	TX level is set as defaults
	CH18	5844	TX level is set as defaults

2.6. Test Conditions

Temperature range	21-25℃
Humidity range	40-75%
Pressure range	86-106kPa

2.7. Measurement Uncertainty (95% confidence levels, k=2)

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(Below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB

3. Radiated Emission and Band Edge

3.1. Radiated Emission Limits

FCC Part 15.209

Frequency MHz	Distance (Meters)	Field Strengths Limits	
		uV/m	dB uV/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	----
1.705 ~ 30	30	30	29.5
30 ~ 88	3	100(3nW)	40
88 ~ 216	3	150(6.8nW)	43.5
216 ~ 960	3	200(12nW)	46
Above 960	3	500(75nW)	54
Carrier frequency	3	50000(avg)	113.97(peak) 93.97(avg)

Notes:

1. Emission level = Read level + Antenna Factor - Preamp Factor + Cable Loss
2. The smaller limit shall apply at the cross point between two frequency bands.
3. Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
4. For frequencies above 1000 MHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Radiated Spurious Emission					
Test Standard	RSS-Gen 8.9				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	6.37/F (F in kHz)	-	-	300
	0.490MHz~1.705MHz	63.7/F (F in kHz)	-	-	30
	1.705MHz~30MHz	0.08	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	Above 960MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

- (1) The lower limit shall apply at the transition frequency.
- (2) Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Transmitters with wanted and unwanted emissions that are within the general field strength limits				
Test Standard	RSS-210 Annex B.10, Table B2			
Test Limit	Frequency bands (MHz)	Field Strength (mV/m)		Measurement distance (m)
		Fundamental emissions	Harmonics emissions	
	902-928	50	0.5	3
	2400-2483.5	50	0.5	3
	5725-5875	50	0.5	3
	24000-24250	250	2.5	3
Remark:				
(1) The field strength shall be measured using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using an International Special Committee on Radio Interference (CISPR) quasi-peak detector.				
(2) Emissions radiated outside of the specified frequency bands, except for harmonic emissions, shall be attenuated by at least 50 dB below the level of the fundamental emissions or to the general field strength limits listed in RSS-Gen, whichever is less stringent.				

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz/3MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2. Test Procedure

- The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)

- f. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3. Deviation From Test Standard


No deviation

3.4. Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

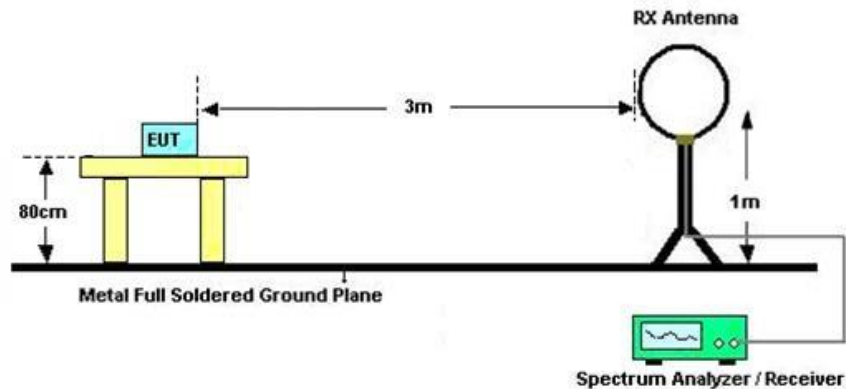

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

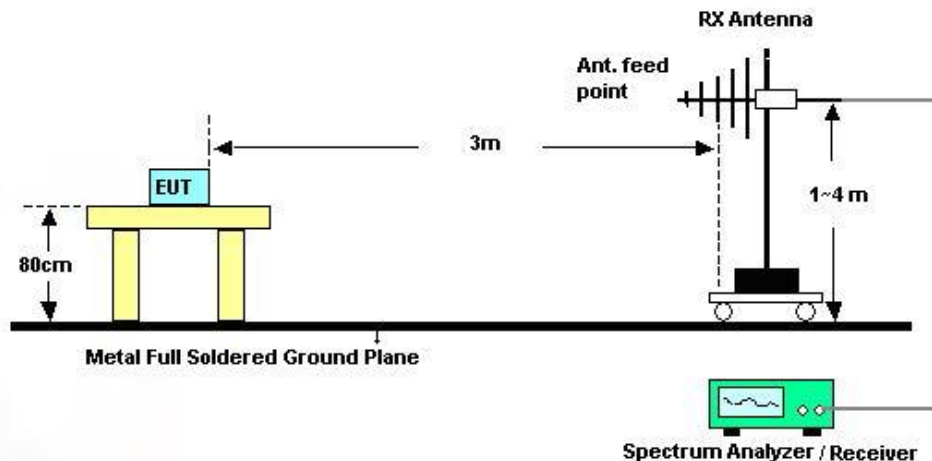

(C) Radiated Emission Test-Up Frequency Above 1GHz

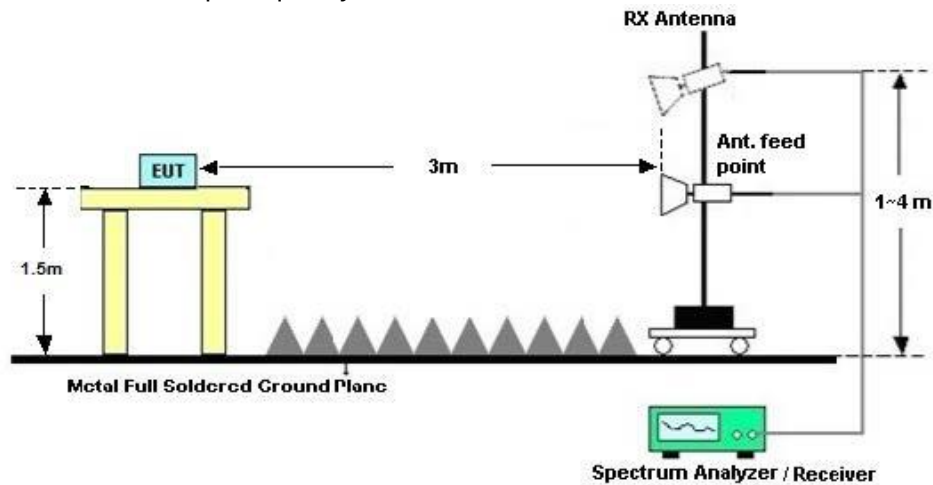

3.5. Eut Operating Conditions

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


3.6. Test Results

For the actual test, please refer to the ANSI C63.10, refer to section 7 for more detail


We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz:	
Test Date : 2026.1.6	Temperature : 26°C
Test Engineer : Jensen Wang	Humidity : 54%
Test Mode : FSK mode	
Test Voltage : DC 3.7V	
Test Results : PASS	
Note:	The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz:	
Test Date : 2026.1.6	Temperature : 26°C
Test Engineer : Jensen Wang	Humidity : 54%
Test Mode : FSK mode	
Test Voltage : DC 3.7V	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. All modes have been tested, and only worst data of FSK 5730MHz mode was listed in this report.

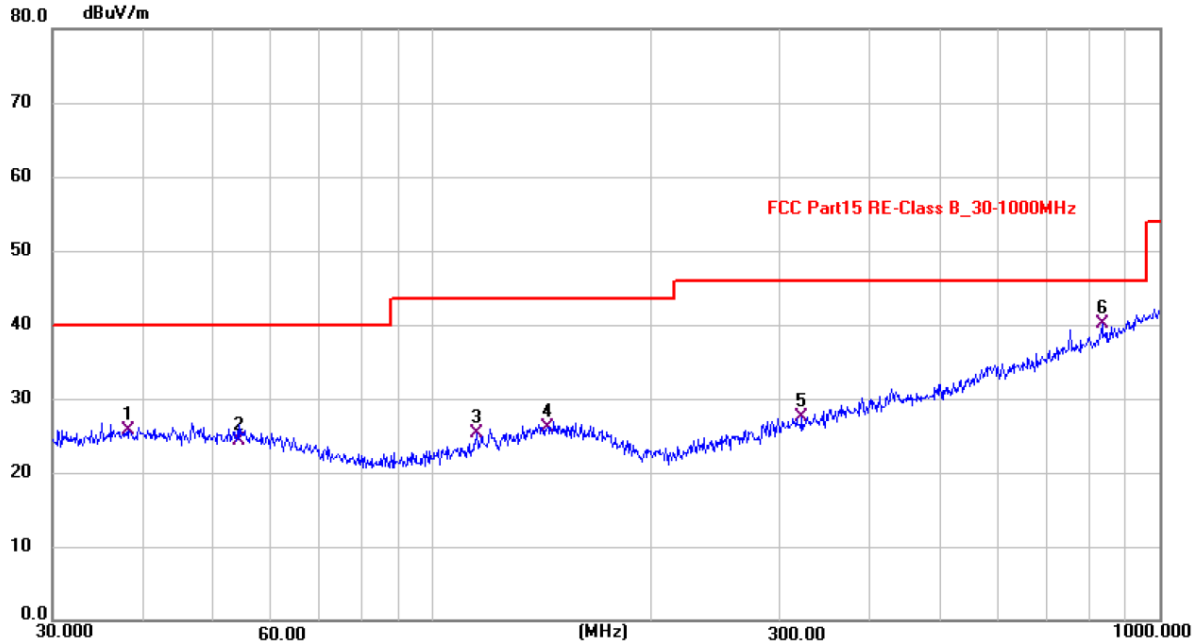Polarization: Vertical

Note: Level = Reading + Factor Margin = Level - Limit

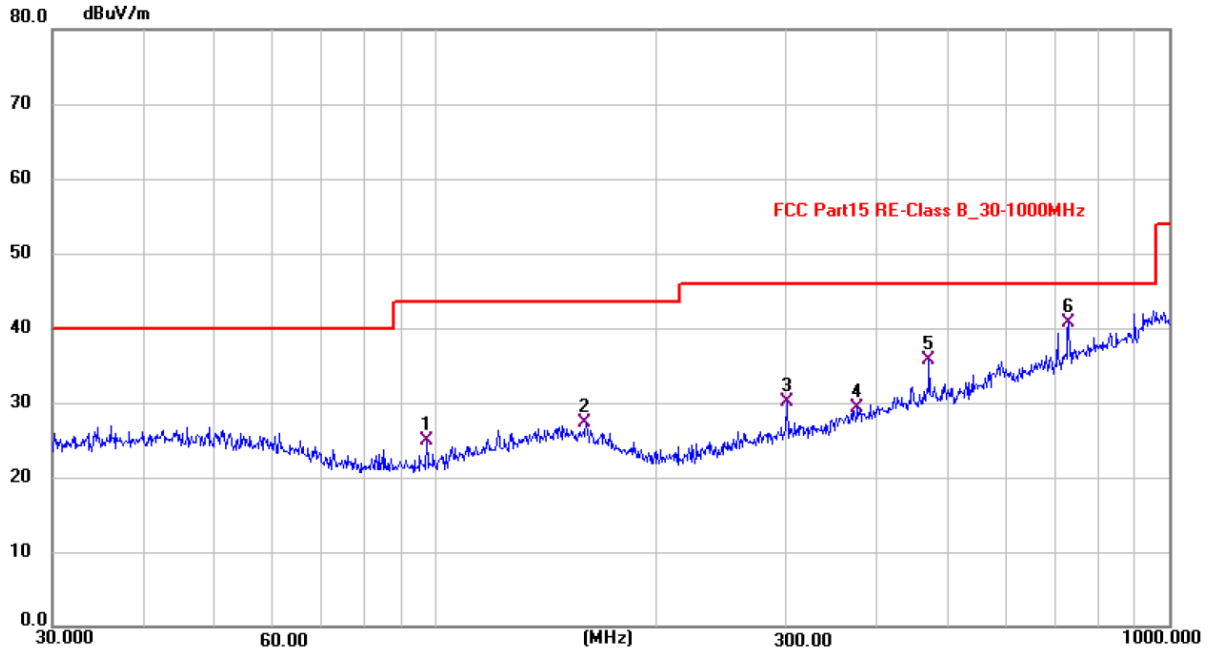Polarization: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	97.2000	13.68	11.21	24.89	43.50	-18.61	QP
2	160.3456	12.42	14.92	27.34	43.50	-16.16	QP
3	301.6867	15.13	14.96	30.09	46.00	-15.91	QP
4	376.9285	12.53	16.87	29.40	46.00	-16.60	QP
5	470.7295	16.59	19.10	35.69	46.00	-10.31	QP
6 *	729.9979	16.12	24.62	40.74	46.00	-5.26	QP


Note: Level = Reading + Factor Margin = Level - Limit

From 1GHz to 40GHz:	
Test Date : 2026.1.6	Temperature : 26°C
Test Engineer : Jensen Wang	Humidity : 54%
Test Mode : FSK mode	
Test Voltage : DC 3.7V	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.


Frequency range: 1GHz~40GHz

Test Mode : FSK TX 5730MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	5730	V	98.72	-16.12	82.60	113.97	-32.66	Peak
2	5730	V	82.89	-16.12	66.77	93.97	-27.55	Avg
3	11460	V	66.30	-10.57	55.73	74.00	-17.19	Peak
4	11460	V	51.65	-10.57	41.08	54.00	-10.43	Avg
5	17190	V	57.90	-5.19	52.71	74.00	-19.98	Peak
6	17190	V	44.98	-5.19	39.79	54.00	-13.27	Avg
7	5730	H	94.94	-16.12	78.82	113.97	-35.73	Peak
8	5730	H	82.23	-16.12	66.11	93.97	-25.16	Avg
9	11460	H	65.80	-10.57	55.23	74.00	-21.98	Peak
10	11460	H	51.71	-10.57	41.14	54.00	-10.01	Avg
11	17190	H	59.74	-5.19	54.55	74.00	-20.81	Peak
12	17190	H	45.16	-5.19	39.97	54.00	-11.94	Avg
Test Mode : FSK TX 5780MHz								
1	5780	V	98.93	-16.01	80.38	113.97	-33.59	Peak
2	5780	V	85.82	-16.01	69.85	93.97	-24.12	Avg
3	11560	V	63.99	-10.50	53.15	74.00	-20.85	Peak
4	11560	V	51.76	-10.50	41.26	54.00	-12.74	Avg
5	17340	V	57.10	-5.27	51.87	74.00	-22.13	Peak
6	17340	V	46.28	-5.27	38.23	54.00	-15.77	Avg
7	5780	H	96.16	-16.01	77.55	113.97	-36.42	Peak
8	5780	H	83.72	-16.01	69.58	93.97	-24.39	Avg
9	11560	H	64.70	-10.50	53.89	74.00	-20.11	Peak
10	11560	H	53.27	-10.50	42.28	54.00	-11.72	Avg
11	17340	H	59.97	-5.27	52.08	74.00	-21.92	Peak
12	17340	H	43.57	-5.27	41.42	54.00	-12.58	Avg

Test Mode : FSK TX 5844MHz								
1	5844	V	98.61	-15.86	82.75	113.97	-31.22	Peak
2	5844	V	84.76	-15.86	68.90	93.97	-25.07	Avg
3	11688	V	66.54	-10.42	56.12	74.00	-17.88	Peak
4	11688	V	54.62	-10.42	44.20	54.00	-9.80	Avg
5	17532	V	59.83	-5.36	54.47	74.00	-19.53	Peak
6	17532	V	43.05	-5.36	37.69	54.00	-16.31	Avg
7	5844	H	95.46	-15.86	79.60	113.97	-34.37	Peak
8	5844	H	82.62	-15.86	66.76	93.97	-27.21	Avg
9	11688	H	65.56	-10.42	55.14	74.00	-18.86	Peak
10	11688	H	53.34	-10.42	42.92	54.00	-11.08	Avg
11	17532	H	60.87	-5.36	55.51	74.00	-18.49	Peak
12	17532	H	45.32	-5.36	39.96	54.00	-14.04	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

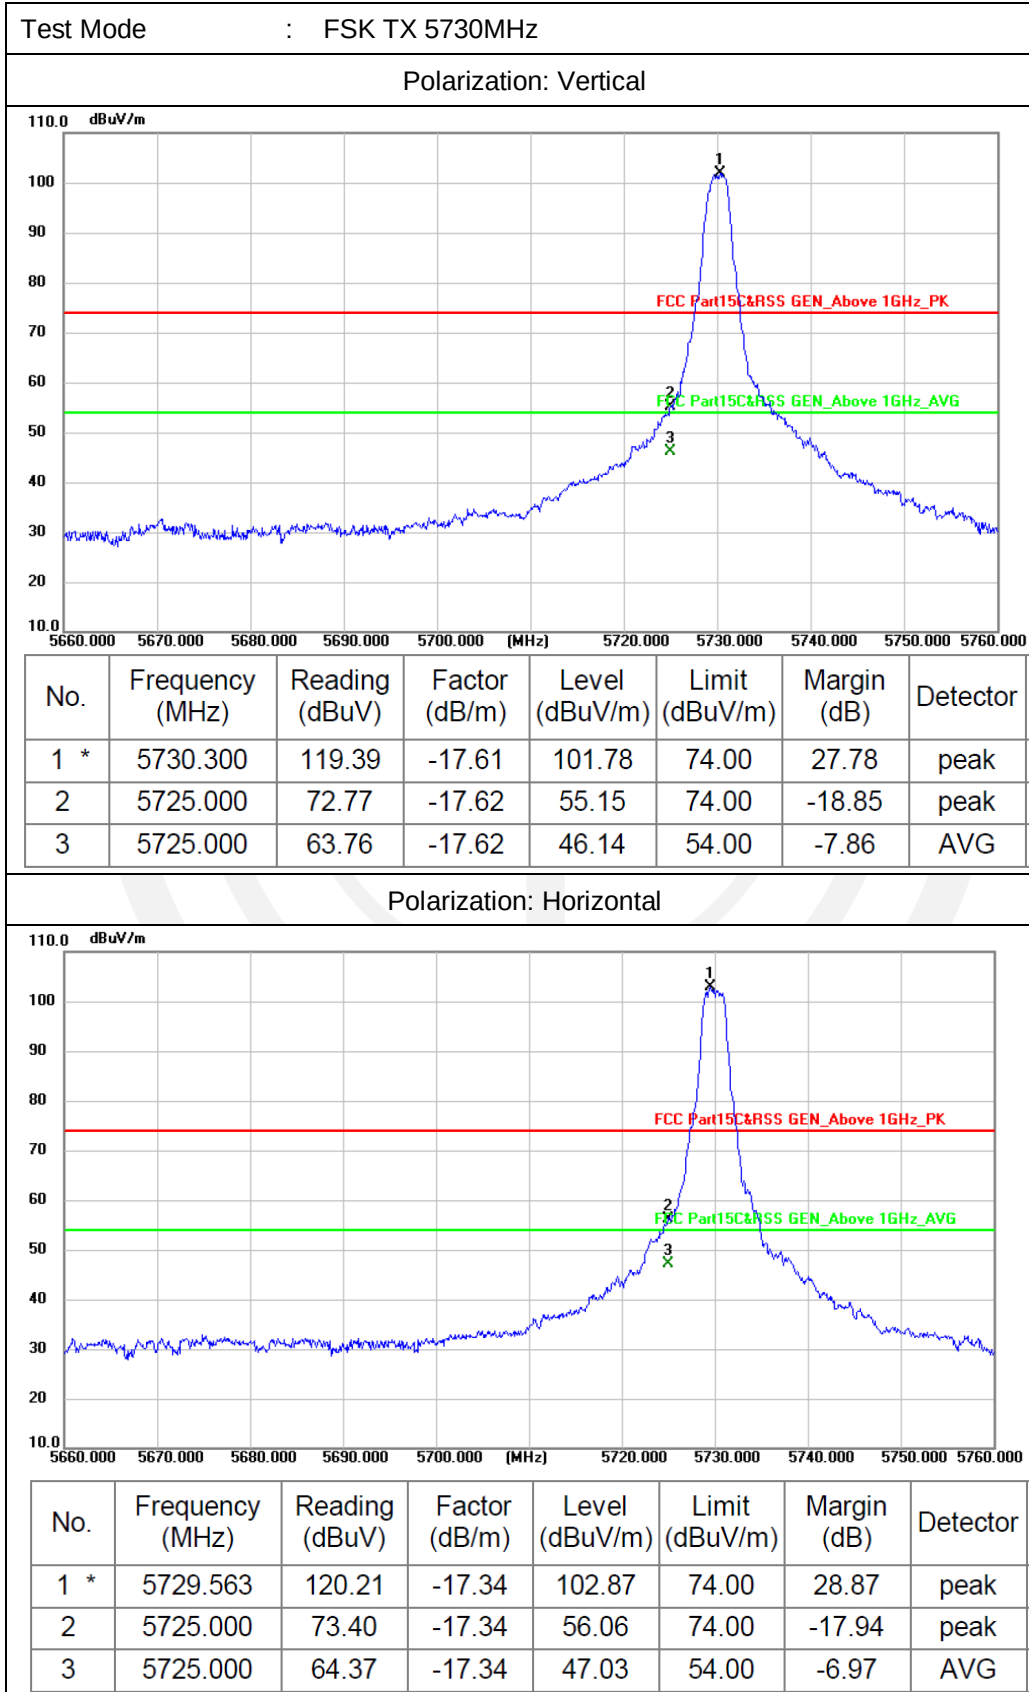Band Edge Test Results:

Level = Reading + Factor Margin = Level - Limit

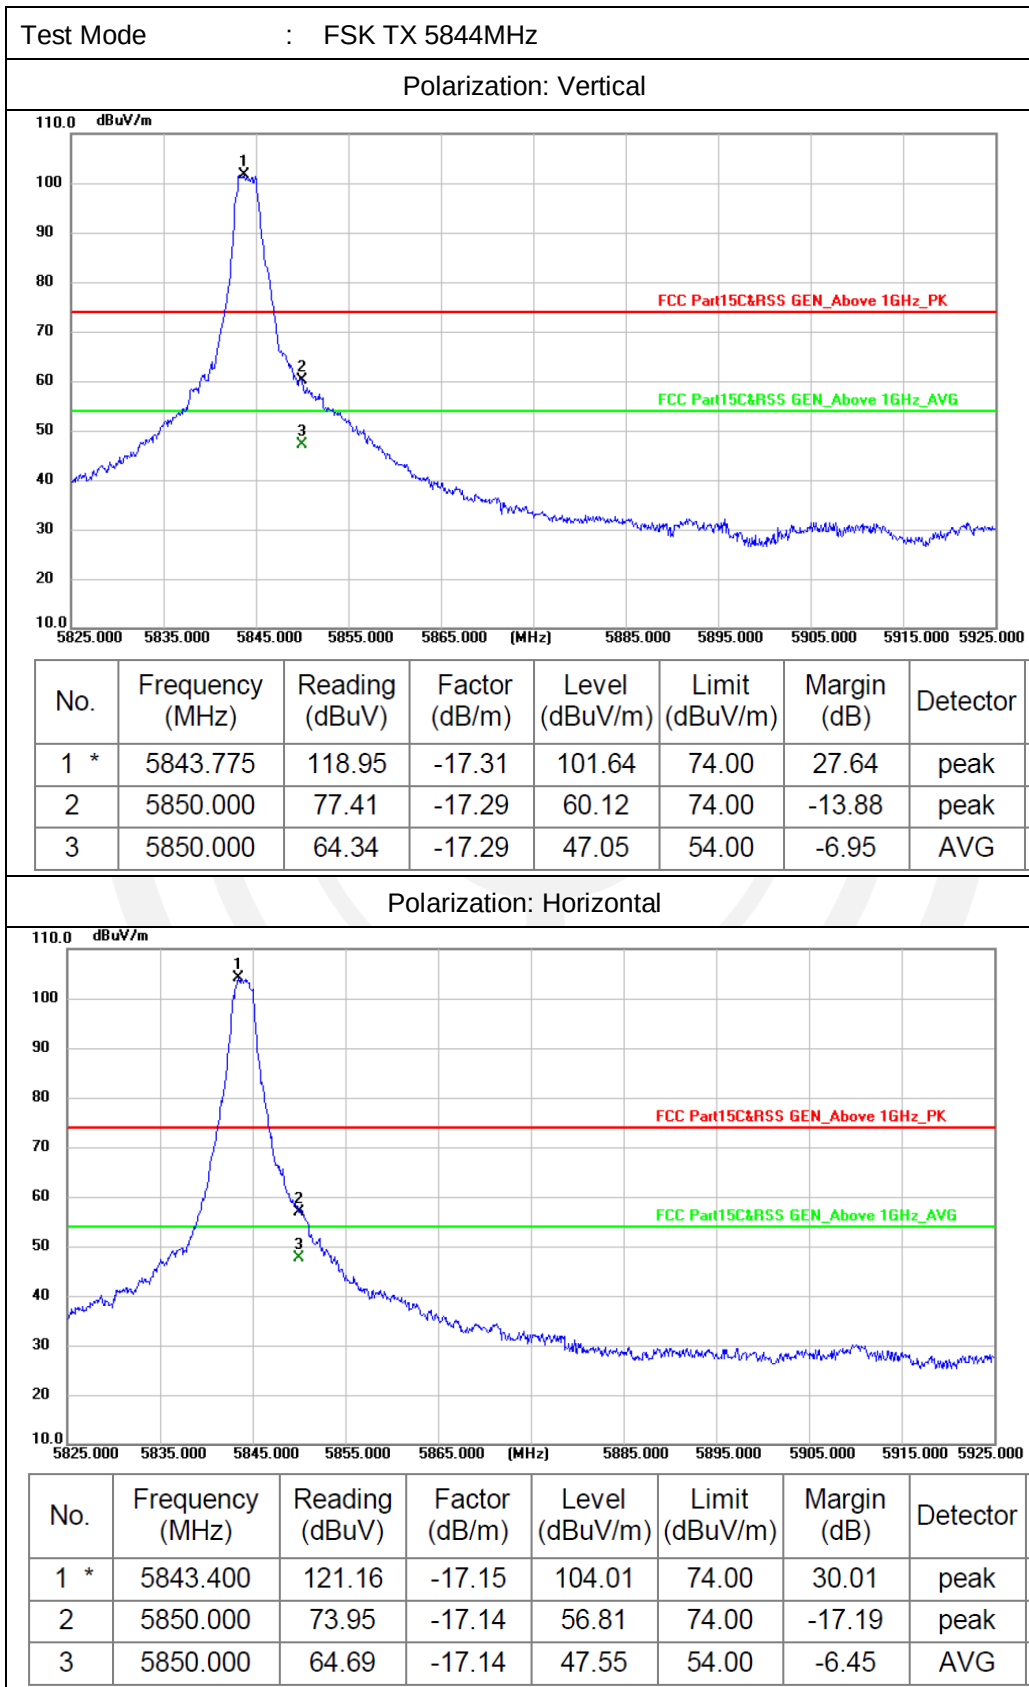

Level = Reading + Factor Margin = Level – Limit

4. Power Line Conducted Emission

4.1. Test Limits

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2020 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.


4.3. Test Setup

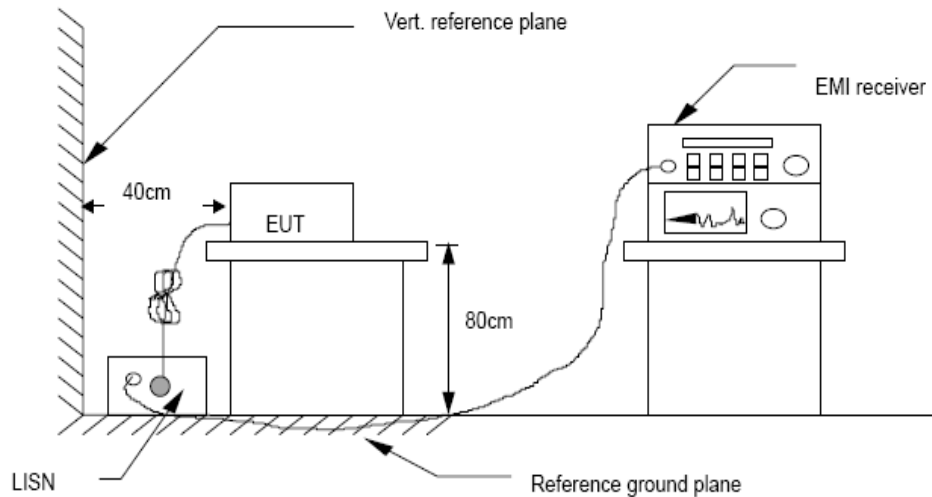

4.4. Test Results

Test Date	: 2026.1.5	Temperature	: 26℃
Test Engineer	: Jensen Wang	Humidity	: 54%
Test Mode	: Charging		
Test Voltage	: AC 120V/60Hz		
Test Results	: PASS		
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.		


Polarization: L

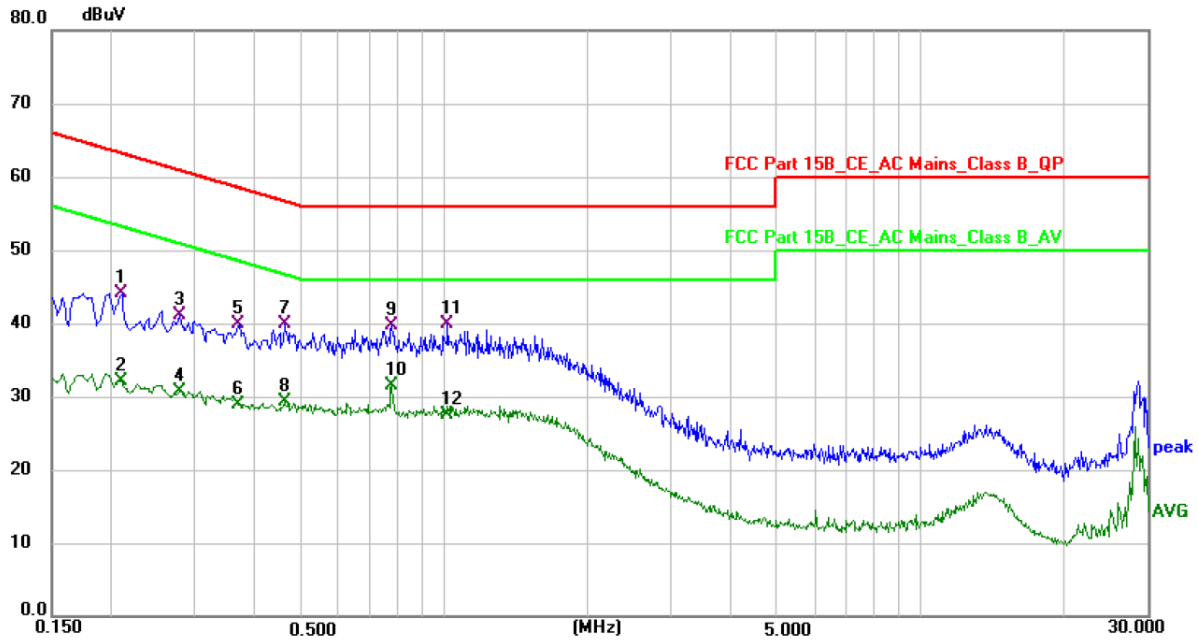

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2100	34.13	9.95	44.08	63.21	-19.13	QP
2	0.2100	22.22	9.95	32.17	53.21	-21.04	AVG
3	0.2779	31.20	9.98	41.18	60.88	-19.70	QP
4	0.2779	20.66	9.98	30.64	50.88	-20.24	AVG
5	0.3700	30.15	9.73	39.88	58.50	-18.62	QP
6	0.3700	19.25	9.73	28.98	48.50	-19.52	AVG
7	0.4620	30.06	9.80	39.86	56.66	-16.80	QP
8	0.4620	19.51	9.80	29.31	46.66	-17.35	AVG
9	0.7780	30.22	9.42	39.64	56.00	-16.36	QP
10 *	0.7780	22.12	9.42	31.54	46.00	-14.46	AVG
11	1.0180	30.49	9.41	39.90	56.00	-16.10	QP
12	1.0180	18.19	9.41	27.60	46.00	-18.40	AVG

Result=Reading + Correct Factor. Margin= Result-Limit.

Polarization: N

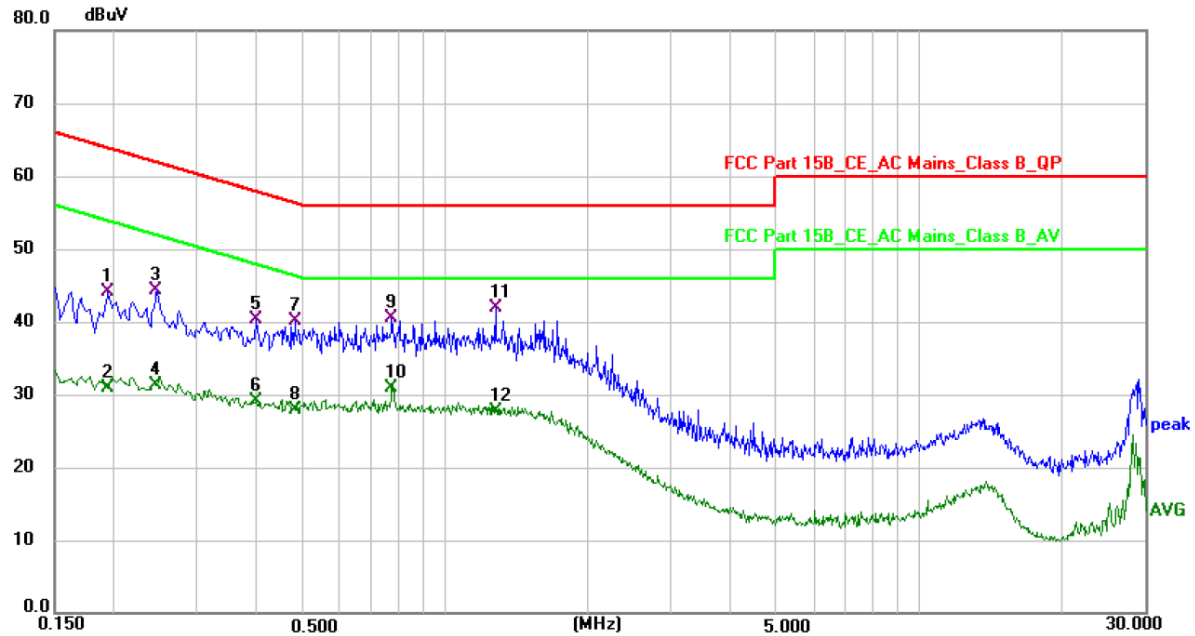

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1940	34.01	10.02	44.03	63.86	-19.83	QP
2	0.1940	20.96	10.02	30.98	53.86	-22.88	AVG
3	0.2460	34.43	9.93	44.36	61.89	-17.53	QP
4	0.2460	21.39	9.93	31.32	51.89	-20.57	AVG
5	0.3980	30.74	9.55	40.29	57.90	-17.61	QP
6	0.3980	19.54	9.55	29.09	47.90	-18.81	AVG
7	0.4820	30.36	9.74	40.10	56.30	-16.20	QP
8	0.4820	18.23	9.74	27.97	46.30	-18.33	AVG
9	0.7740	30.85	9.71	40.56	56.00	-15.44	QP
10	0.7740	21.28	9.71	30.99	46.00	-15.01	AVG
11 *	1.2820	32.51	9.44	41.95	56.00	-14.05	QP
12	1.2820	18.20	9.44	27.64	46.00	-18.36	AVG


Result=Reading + Correct Factor. Margin= Result-Limit.

5. Bandwidth Test

5.1. Test Standard and Limit

Test Standard	RSS-Gen §6.7, FCC 15.249
Test Limit	N/A

5.2. Test Setup

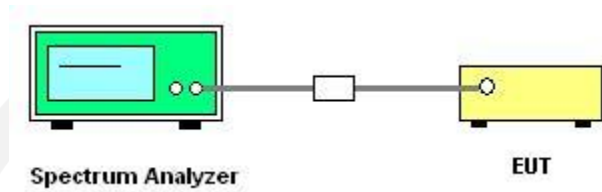



5.3. Test Procedure


Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW $\geq 1\%$ of the 20 dB bandwidth.
3. Set the VBW $\geq$ RBW
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
9. Measure the 99% Bandwidth use the function button of "Occupied Bandwidth".

5.4. Test Results

Mode	Antenna	Frequency (MHz)	-20dB BW(MHz)	99% BW(MHz)	limit(kHz)
FSK	ANT1	5730	2.371	2.2032	/
FSK	ANT1	5780	2.493	2.2434	/
FSK	ANT1	5844	2.404	2.2359	/

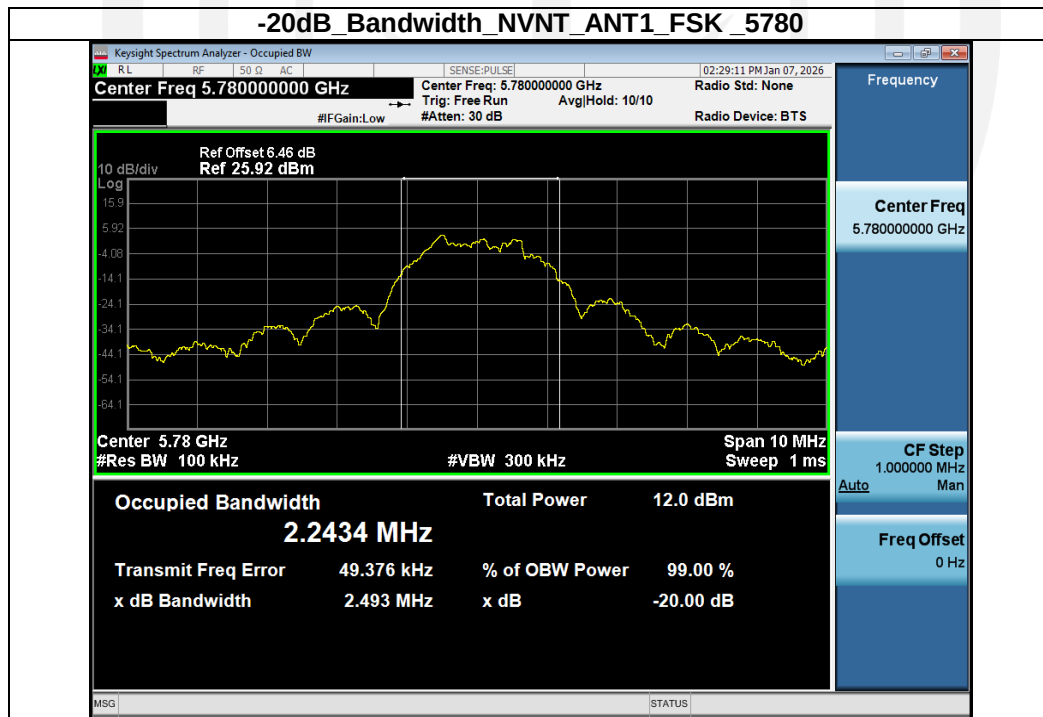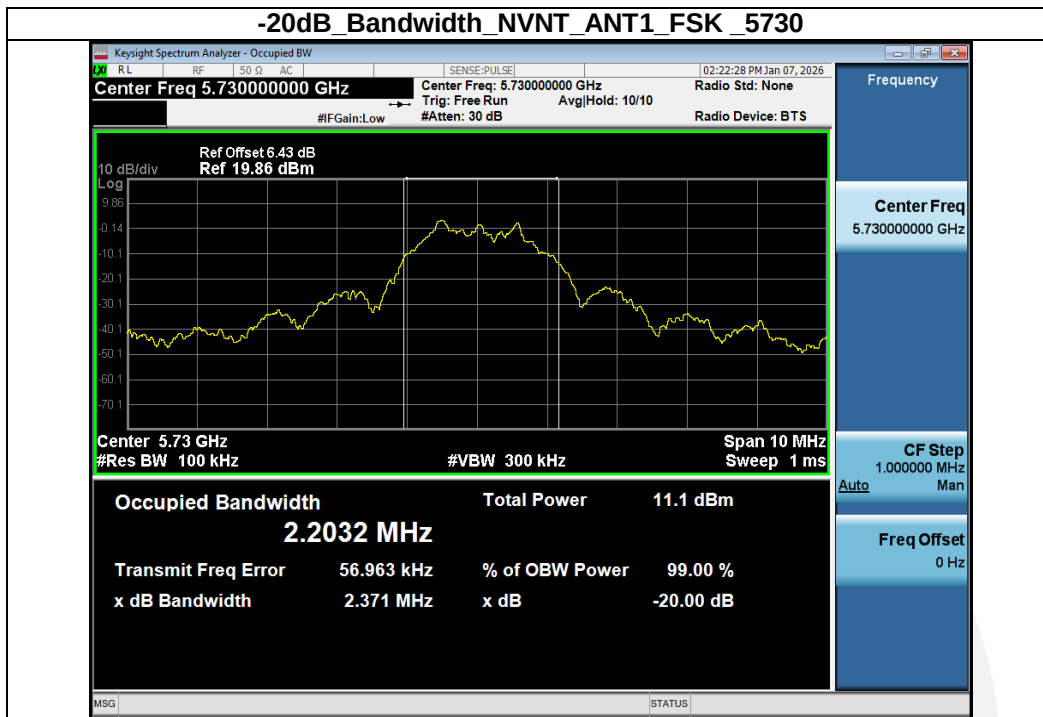

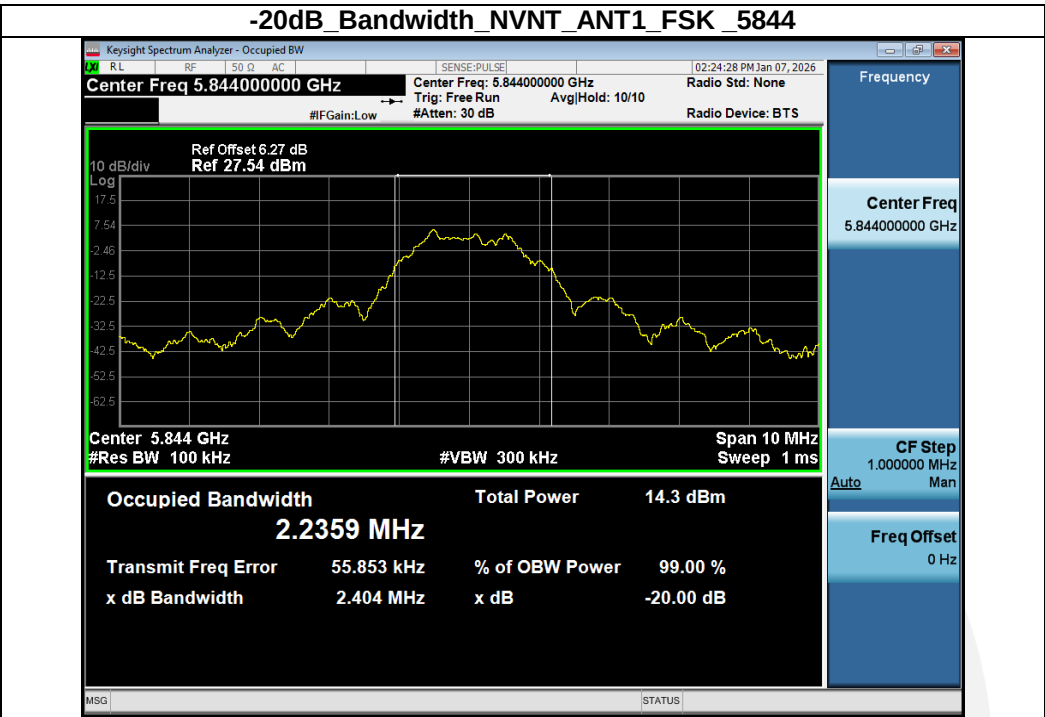


6. Antenna Requirement

6.1. Standard Requirement

According to the FCC Part 15 Paragraph 15.203& RSS-GEN(6.8), an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product use a permanent ceramic printed antenna, fulfill the requirement of this section

6.2. EUT Antenna

The EUT antenna is internal antenna. It complies with the standard requirement.

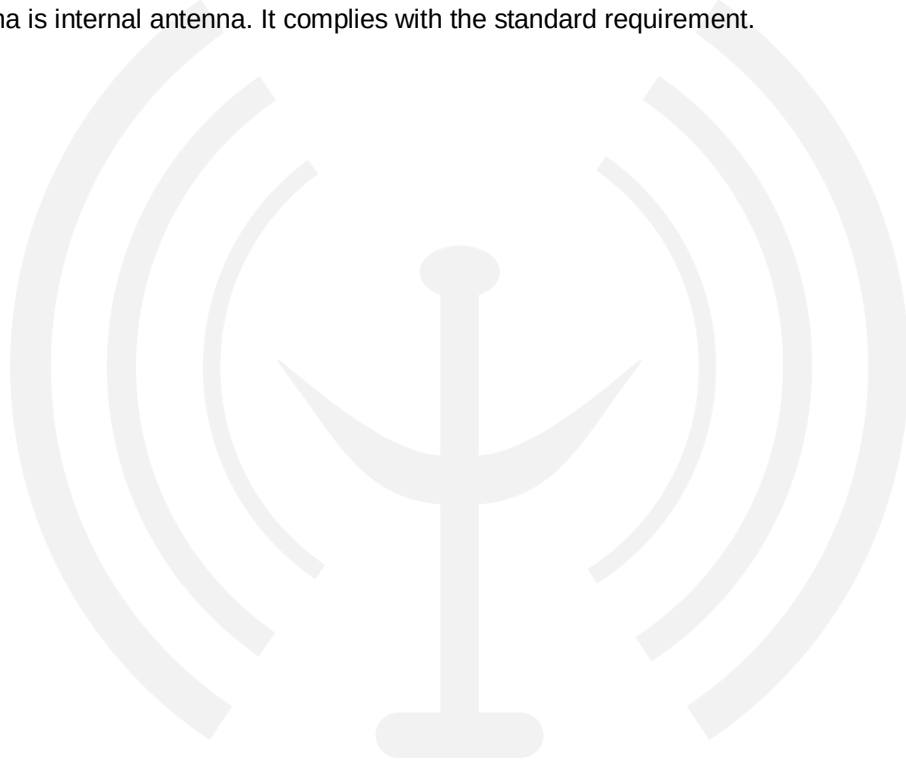

7. Photos of test setup

Reference to the **appendix I Test Setup Photo** for details.

8. Photos of EUT

Reference to the **appendix II external photos** and **appendix III internal photos** for details.

----- END OF REPORT-----

