TEST REPORT

Part 15.247 & RSS-247 (Issue 2)

Equipment under test	TactSuit X16
Model name	BHTV16D001
FCC ID	2AJ6BBHTV16D001
IC	24747-BHTV16D001
Applicant	bHaptics Inc.
Manufacturer	bHaptics Inc.
Date of test(s)	2023.06.29 ~ 2023.06.30
Date of issue	2023.06.30

Issued to
bHaptics Inc.
Bldg 3 Unit 503, 70, Yuseong-daero 1689boen-gil,
Yuseong-gu, Daejeon, South Korea
Tel: +82-42-867-2468 / Fax : +82-42-867-2467

Issued by
KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, Korea
473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	**Report approval by :**
Bong-Seok, Kim Test engineer	Yeong-Jun, Cho Technical manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Revision history

Revision	Date of issue	Test report No.	Description
-	2023.06.30	KES-RF-23T0096	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

TABLE OF CONTENTS

1. General information 4
1.1. EUT description 4
1.2. Test configuration 4
1.3. Information about derivative model 5
1.4. Accessory information 5
1.5. Sample calculation 5
1.6. Measurement Uncertainty 5
1.7. Frequency/channel operations 6
2. Summary of tests 7
3. Test results 8
3.1. 99% Occupied Bandwidth 8
3.2. 6 dB bandwidth 10
3.3. Output power 12
3.4. Power spectral density 14
3.5. Radiated restricted band and emissions 16
3.6. Conducted spurious emissions & band edge 31
3.7. AC conducted emissions 35
Appendix A. Measurement equipment 38
Appendix B. Test setup photos 39

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1. General information

Applicant:	bHaptics Inc.
Applicant address:	Bldg 3 Unit 503, 70, Yuseong-daero 1689boen-gil, Yuseong-gu, Daejeon, South Korea
Test site:	KES Co., Ltd.
Test site address:	☐3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea ☒473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Test Facility	FCC Accreditation Designation No.: KR0100, Registration No.: 444148 ISED Registration No.: 23298
FCC, IC rule part(s):	FCC: 15.247 / IC: RSS-247
FCC ID:	2AJ6BBHTV16D001
IC :	24747-BHTV16D001
Test device serial No.:	☒ Production ☐ Pre-production ☐ Engineering

1.1. EUT description

Equipment under test	TactSuit X16
Frequency range	**2 402 ㎒ ~ 2 480 ㎒ (LE 1 Mbps)**
Model	BHTV16D001
Modulation technique	GFSK
Number of channels	**2 402 ㎒ ~ 2 480 ㎒ (LE 1 Mbps) : 40 ch**
Antenna specification	Chip Antenna // Peak gain: 1.3 ㏈i
Power source	DC 3.63 V (Battery)
H/W version	1.0
S/W version	1.0
S/N	aa77-eb68-1d2e-4bb5-bf9c

1.2. Test configuration

The **bHaptics Inc. // TactSuit X16 // BHTV16D001 // FCC ID: 2AJ6BBHTV16D001 // IC : 24747-BHTV16D001** was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.247
ISED RSS-247 Issue 2 and RSS-Gen Issue 5
KDB 558074 D01 v05 r02
ANSI C63.10-2013

1.3. Information about derivative model

N/A

1.4. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
-	-	-	-	-

1.5. Sample calculation

Where relevant, the following sample calculation is provided
For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).
= 0.73 + 10 = 10.73 (dB)

For Radiation test :
Field strength level (dBμV/m) = Measured level (dBμV) + Antenna factor (dB) + Cable loss (dB) – Amplifier gain (dB)

1.6. Measurement Uncertainty

Test Item		Uncertainty
Uncertainty for Conduction emission test		2.22 dB (SHIELD ROOM #6)
Uncertainty for Radiation emission test (include Fundamental emission)	Below 1㎓	4.04 dB (SAC #6)
	Above 1㎓	5.32 dB (SAC #5)
Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.7. Frequency/channel operations

Ch.	Frequency (㎒)	Rate(Mbps)
00	2 402	LE 1 Mbps
⋮	⋮	⋮
20	2 442	LE 1 Mbps
⋮	⋮	⋮
39	2 480	LE 1 Mbps

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2. Summary of tests

Section in FCC Part 15	Section in RSS-247 & Gen	Test description	Test results
-	RSS-Gen 6.7	99% Occupied bandwidth	Pass
15.247(a)(2)	RSS-247 5.2(a)	6 dB bandwidth	Pass
15.247(b)(3)	RSS-247 5.4(d)	Output power	Pass
15.247(e)	RSS-247 5.2(b)	Power spectral density	Pass
15.205 15.209	RSS-247 5.5 RSS-Gen 8.9,8,10	Radiated restricted band and emission	Pass
15.247(d)	RSS-247 5.5	Conducted spurious emission and band edge	Pass
15.207(a)	RSS-Gen 8.8	AC Conducted emissions	Pass
15.203	-	Antenna Requirement	Pass note2

Note
1.During the test, the power setting was set to 8 dBm.
2.Please check the antenna spec for the Antenna Requirement.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3. Test results

3.1. 99% Occupied Bandwidth

Test procedure

ANSI C63.10-2013 clause 6.9.2 and 6.9.3

Test setup

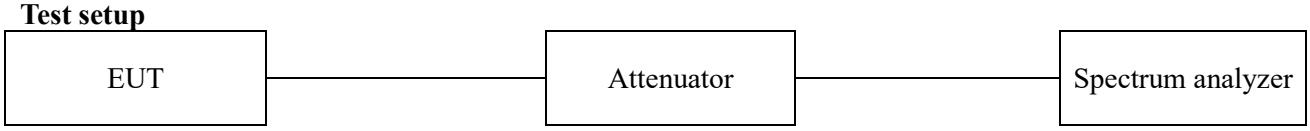

Test setting

1. Span = The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
2. RBW = The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW 3. VBW = shall be approximately three times the RBW
4. Sweep = auto
5. Detector function = Peak
6. Trace = Max hold

Limit

None; for reporting purpose only.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode : LE 1Mbps

Frequency(㎒)	99% occupied bandwidth(㎒)	Limit(㎒)
2 402	1.06	-
2 442	1.06	
2 480	1.07	

Test plots

LE 1Mbps

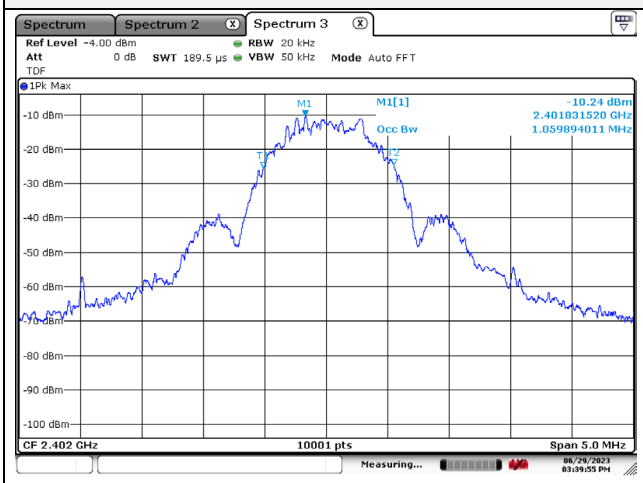

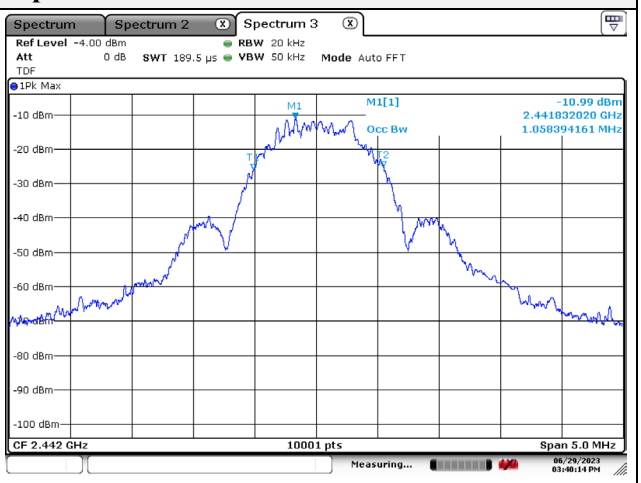

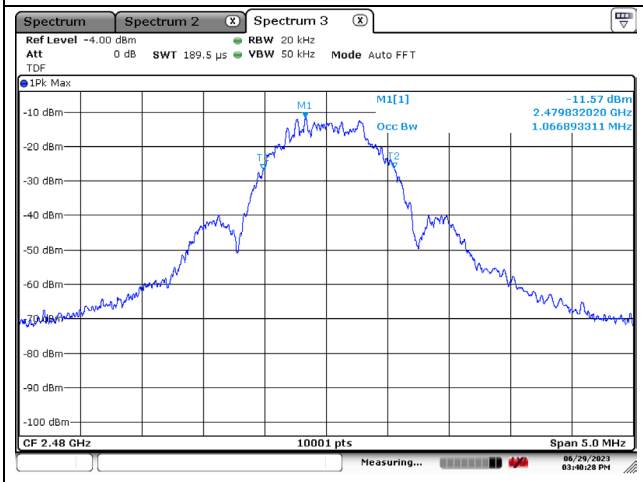

N/A

3.2. 6 dB bandwidth

Test procedure

ANSI C63.10-2013 - Section 11.8.2

Test setup

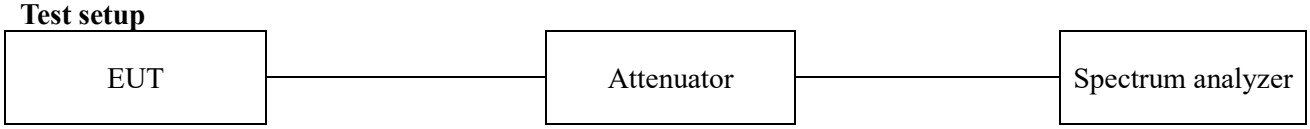

ANSI C63.10-2013 - Section 11.8.2

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW ≥ 3 × RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Limit

According to RSS-247 5.2(a), The minimum 6 dB bandwidth shall be 500 kHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results

Mode : LE 1Mbps

Frequency(㎒)	6 dB bandwidth(㎒)	Limit(㎒)
2 402	0.708	≥ 0.500
2 442	0.705	
2 480	0.709	

LE 1 Mbps

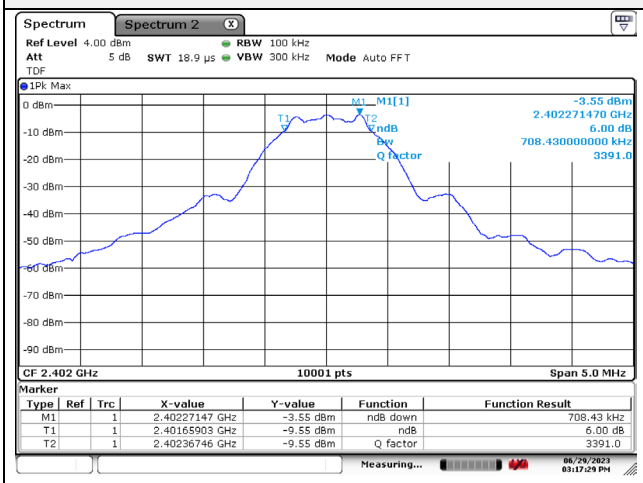

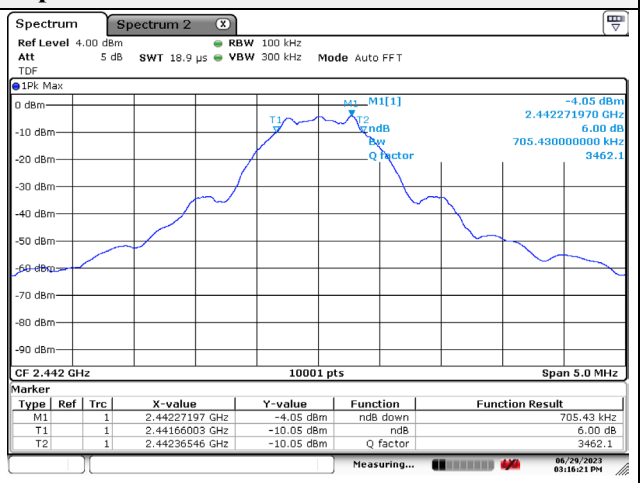

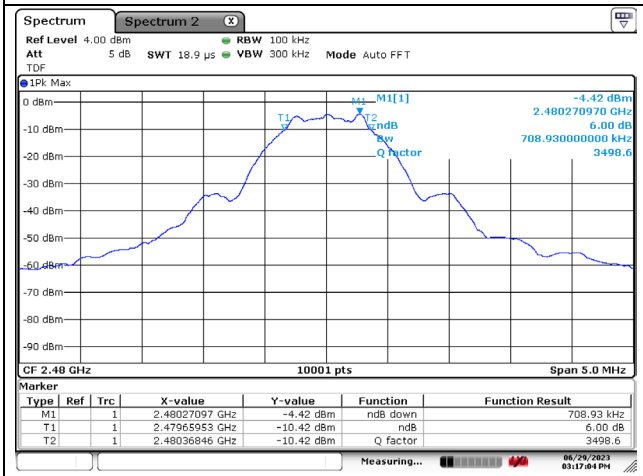

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.3. Output power

Test procedure

ANSI C63.10-2013 - Section 11.9.1.3 and 11.9.2.3.2

Test setup

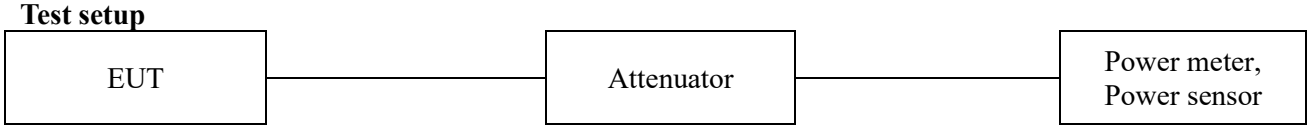

ANSI C63.10-2013 - Section 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS ba ndwidth and shall use a fast-responding diode detector.

ANSI C63.10-2013 - Section 11.9.2.3.2

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

Limit

According to §15.247(b)(3), For systems using digital modulation in the 902~928 ㎒, 2 400~2 483.5 ㎒, and 5 725~5 850 ㎒ bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted out-put power. Maximum Conducted Out-put Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Limit

According to RSS-247 5.4 (d), For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results

Mode	2 402 ㎒		2 442 ㎒		2 480 ㎒	
	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)
LE 1 Mbps	-2.06	-1.70	-2.78	-2.38	-3.44	-2.93

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.4. Power spectral density

Test procedure

ANSI C63.10-2013 - Section 11.10.2

Test setup

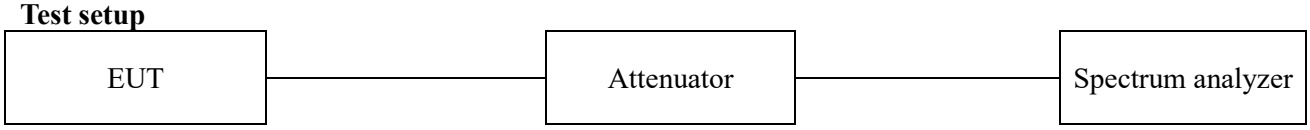

Section 10.2 & ANSI C63.10-2013 - Section 11.10.2

a. Set analyzer center frequency to DTS channel center frequency.
b. Set the span to 1.5 times the DTS bandwidth.
c. Set the RBW to 3 ㎑ ≤ RBW ≤ 100 ㎑
d. Set the VBW ≥ [3 × RBW].
e. Detector = peak.
f. Sweep time = auto couple.
g. Trace mode = max hold.
h. Allow trace to fully stabilize.
i. Use the peak marker function to determine the maximum amplitude level within the RBW.
j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Limit

According to §15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 ㏈m in any 3 ㎑ band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Limit

According to RSS-247 5.2(b), The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Results

Mode : LE 1 Mbps

Frequency(㎒)	PSD (dBm/3㎑)	Limit(dBm/3㎑)
2 402	-18.96	8
2 442	-19.68	
2 480	-20.54	

LE 1 Mbps

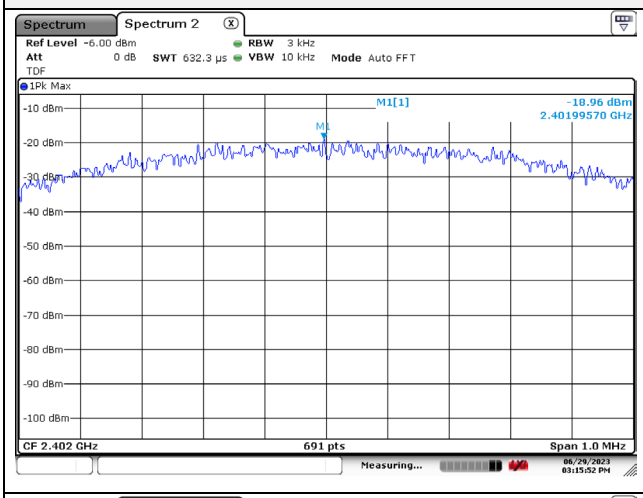

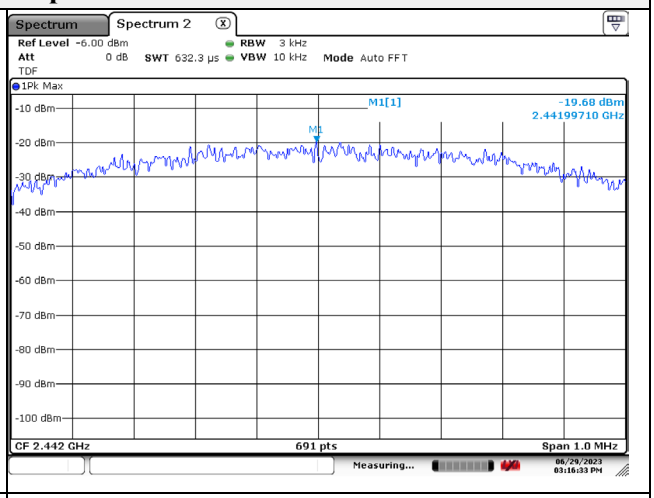

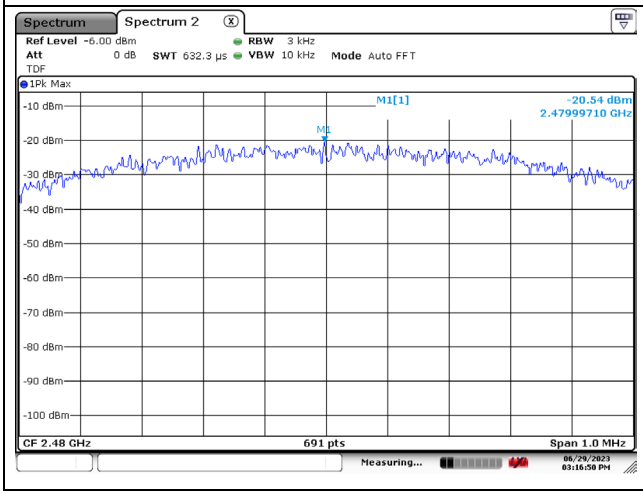

Blank

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.5. Radiated restricted band and emissions

Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 ㎑ to 30 ㎒ Emissions.

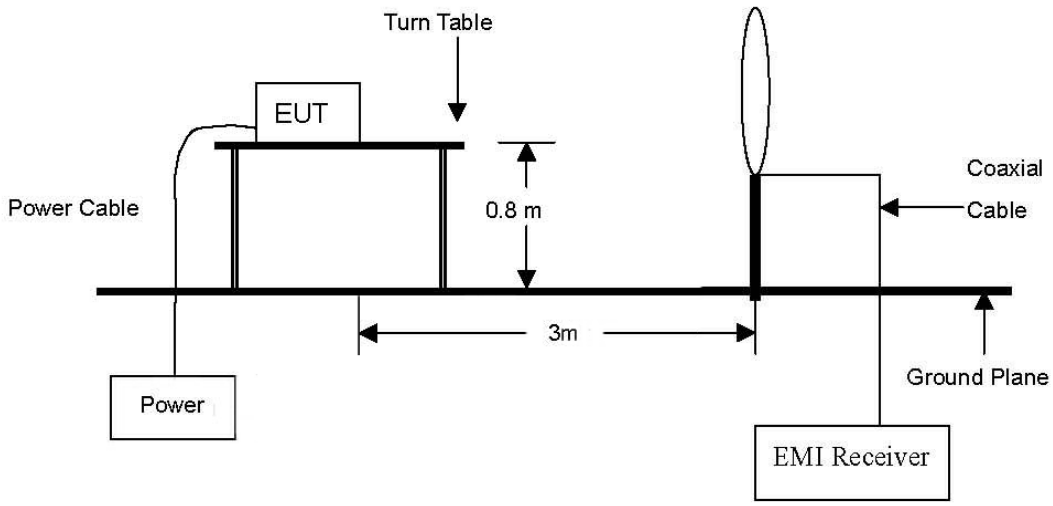

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 ㎒ to 1 ㎓ emissions.

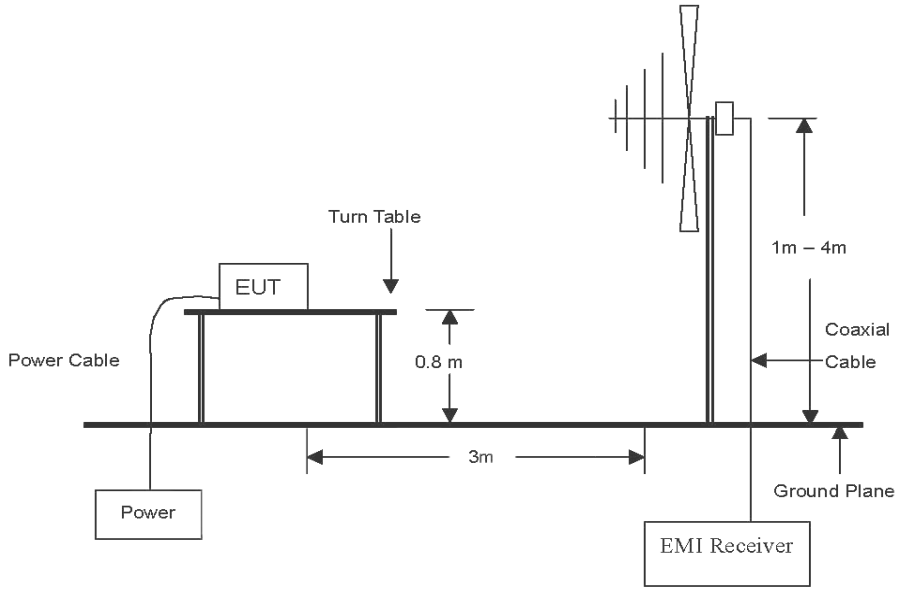

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 ㎓ to the tenth harmonic of the highest fundamental frequency or to 40 ㎓ emissions, whichever is lower.

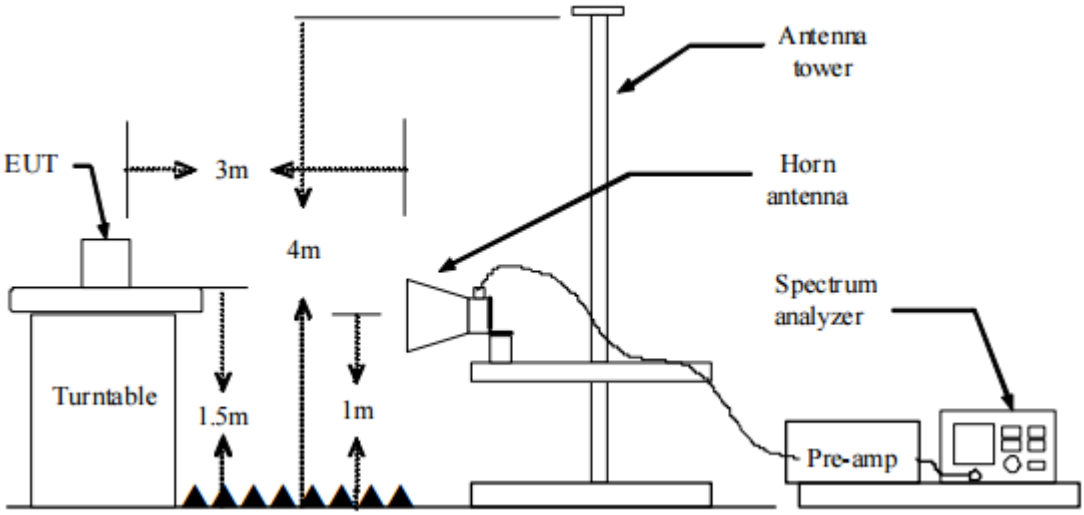

Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2013.

Test procedure below 30 ㎒

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel, ground parallel and perpendicular of the antenna are set to make the measurement. It was determined that **parallel** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **parallel.**
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

Test procedure above 30 ㎒ ~ 1 000 ㎒

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The antenna is a bi-log antenna, a horn antenna, and its height are varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test procedure above 1 000 ㎒

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The antenna is a bi-log antenna, a horn antenna, and its height are varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5. Spectrum analyzer settings for f < 1 ㎓:
   ① Span = wide enough to fully capture the emission being measured
   ② RBW = 100 ㎑
   ③ VBW ≥ RBW
   ④ Detector = quasi peak
   ⑤ Sweep time = auto
   ⑥ Trace = max hold
6. Spectrum analyzer settings for f ≥1 ㎓: Peak
   ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
   ② RBW = 1 ㎒
   ③ VBW ≥ 3 ㎒
   ④ Detector = peak
   ⑤ Sweep time = auto
   ⑥ Trace = max hold
   ⑦ Trace was allowed to stabilize

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

7. Spectrum analyzer settings for $f \geq 1$ ㎓: Average
   ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
   ② RBW = 1 ㎒
   ③ VBW ≥ 3 × RBW
   ④ Detector = RMS, if span/(# of points in sweep) ≤ (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
   ⑤ Averaging type = power(i.e., RMS)
      1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
      2) Some instruments require linear display mode in order to use linear voltage averaging. Log or ㏈ averaging shall not be used.
   ⑥ Sweep = auto
   ⑦ Trace = max hold
   ⑧ Perform a trace average of at least 100 traces.A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
      1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is 10 log(1/x), where x is the duty cycle.
      2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is 20 log(1/x), where x is the duty cycle.
      3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Note.

1. f<30 ㎒, extrapolation factor of 40 ㏈/decade of distance. $F_d = 40\log(D_m/Ds)$
   f ≥30 ㎒, extrapolation factor of 20 ㏈/decade of distance. $F_d = 20\log(D_m/Ds)$
   Where:
   F_d = Distance factor in ㏈
   D_m = Measurement distance in meters
   D_s = Specification distance in meters
2. Field strength(㏈㎶/m) = Level(㏈㎶) + CF (㏈) + or DCF(㏈)
3. Margin(㏈) = Limit(㏈㎶/m) - Field strength(㏈㎶/m)
4. Emissions below 18 ㎓ were measured at a 3 meter test distance while emissions above 18 ㎓ were measured at a 1 meter test distance with the application of a distance correction factor.
5. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **X orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **X orientation.**
6. The worst-case emissions are reported however emissions whose levels were not within 20 ㏈ of respective limits were not reported.
7. According to exploratory test no any obvious emission were detected from 9 ㎑ to 30 ㎒. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values：

Frequency (㎒)	Distance (Meters)	Radiated (㎶/m)
0.009 ~ 0.490	300	2 400/F(㎑)
0.490 ~ 1.705	30	24 000/F(㎑)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 ㎒, 76 ~ 88 ㎒, 174 ~ 216 ㎒ or 470 ~ 806 ㎒. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Limit

According to RSS-Gen, Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits：

Frequency (㎒)	Distance (Meters)	Radiated (㎶/m)
0.009 ~ 0.490	300	2 400 / F(㎑)
0.490 ~ 1.705	30	24 000 / F(㎑)
1.705 ~ 30.0	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960*	3	500

* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Duty cycle

Regarding to KDB 558074 D01_v05 r02, 6. Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

a) A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on- and off-times of the transmitted signal.

b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on- and off-times of the transmitted signal.

Mode : LE 1 Mbps

T_{on} time (㎳)	Period (㎳)	Duty cycle (Linear)	Duty cycle (%)	Duty cycle correction factor (dB)
2.14	2.50	0.86	85.60	0.68

Duty cycle (Linear) = T_{on} time/Period

DCF(Duty cycle correction factor (㏈)) = 10log(1/duty cycle)

Middle channel

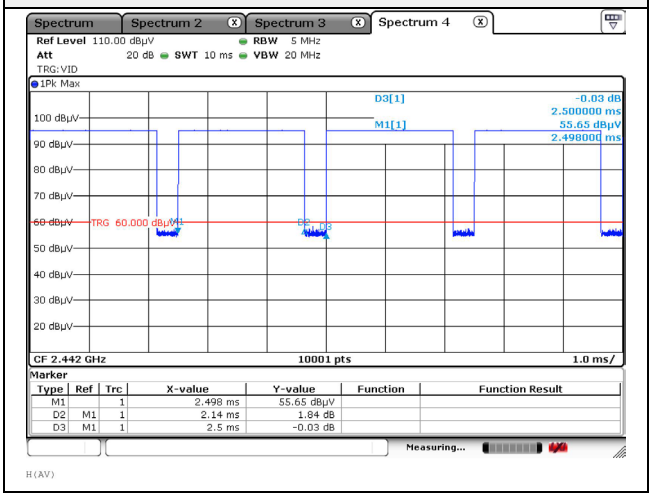

Test results (Below 30 ㎒)

Mode:	LE 1 Mbps
Distance of measurement:	3 meter
Channel:	00 (Worst case)

Parallel

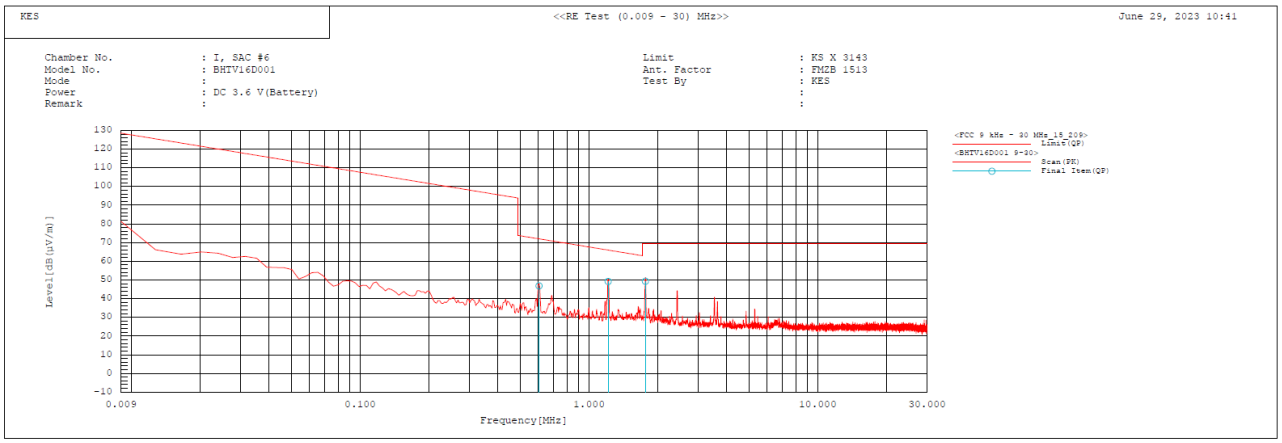

Final Result

No.	Frequency [MHz]	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Angle [deg]	Remark
1	0.605	27.0	19.8	46.8	72.0	25.2	23.3	
2	1.212	28.9	20.3	49.2	66.0	16.8	23.3	
3	1.763	29.1	20.2	49.3	69.5	20.2	28.1	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results (Below 1 000 ㎒)

Mode:	LE 1 Mbps
Distance of measurement:	3 meter
Channel:	00 (Worst case)

Horizontal // Vertical

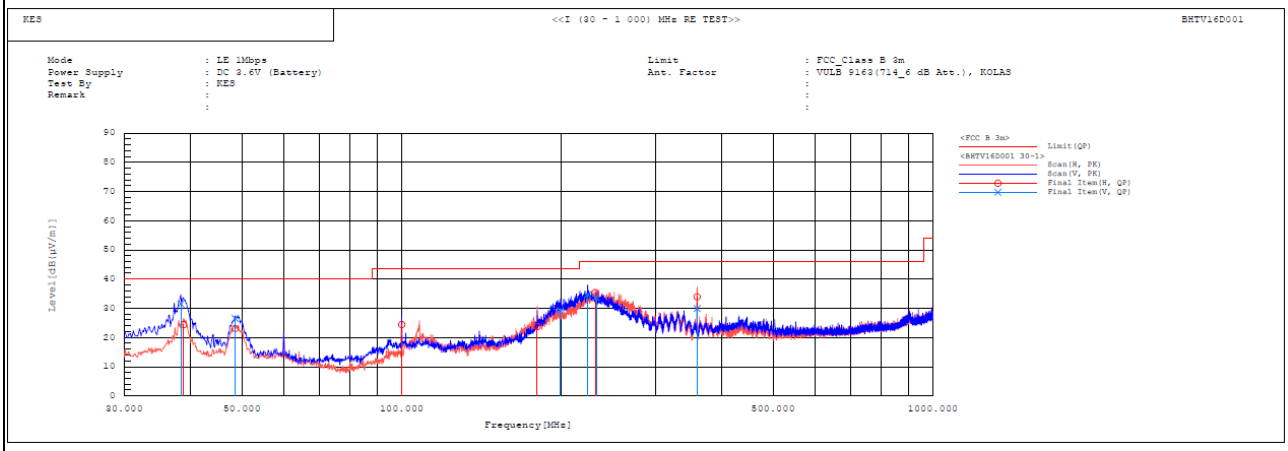

Final Result

No.	Frequency [MHz]	Pol	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.366	V	45.0	-13.5	31.5	40.0	8.5	100.0	131.7	
2	38.851	H	37.9	-13.5	24.4	40.0	15.6	200.0	9.4	
3	48.551	V	38.4	-11.9	26.5	40.0	13.5	100.0	45.9	
4	48.551	H	35.0	-11.9	23.1	40.0	16.9	200.0	337.4	
5	99.961	H	37.9	-13.5	24.4	43.5	19.1	200.0	162.5	
6	179.986	H	37.8	-14.1	23.7	43.5	19.8	189.0	28.9	
7	199.023	V	41.8	-12.8	29.0	43.5	14.5	100.0	131.7	
8	223.879	V	46.6	-11.9	34.7	46.0	11.3	100.0	221.2	
9	231.518	H	47.1	-11.7	35.4	46.0	10.6	196.0	225.8	
10	232.366	V	45.3	-11.7	33.6	46.0	12.4	121.0	70.9	
11	359.921	V	37.7	-7.8	29.9	46.0	16.1	100.0	131.7	
12	359.921	H	41.7	-7.8	33.9	46.0	12.1	200.0	206.2	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results (Above 1 000 ㎒)

Mode: LE 1 Mbps

Distance of measurement: 3 meter

Channel: 00

- **Spurious**

Frequency (㎒)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 008.10	47.59	Peak	H	-10.03	-	37.56	74.00	36.44
1 214.08	46.54	Peak	V	-8.62	-	37.92	74.00	36.08

- **Band edge**

Frequency (㎒)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 367.80	42.56	Peak	H	-1.90	-	40.66	74.00	33.34
2 386.18	41.96	Peak	V	-1.90	-	40.06	74.00	33.94

Restricted band // Horizontal // Peak

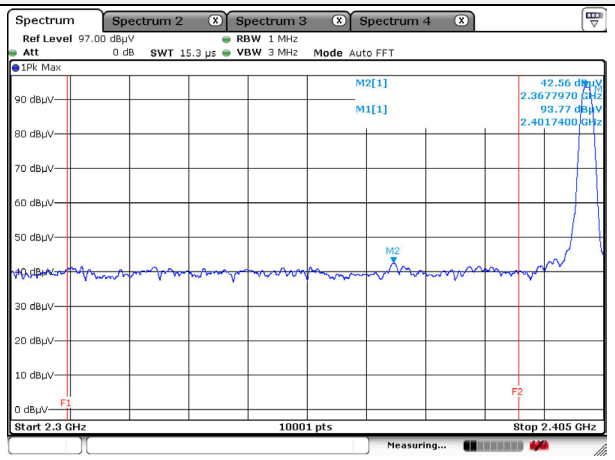

Restricted band // Vertical // Peak

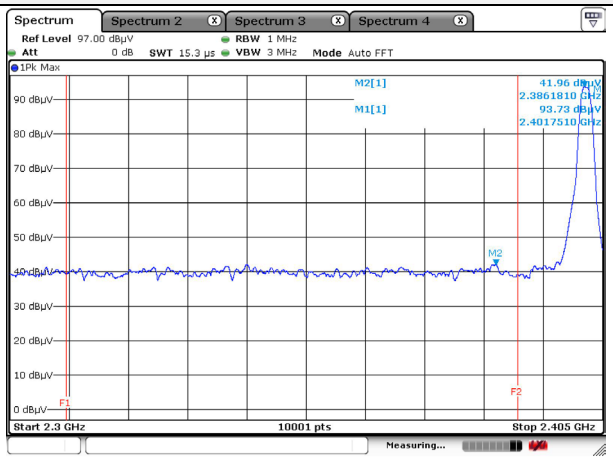

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Horizontal // Peak for 1 ㎓ to 3 ㎓	Vertical // Peak for 1 ㎓ to 3 ㎓
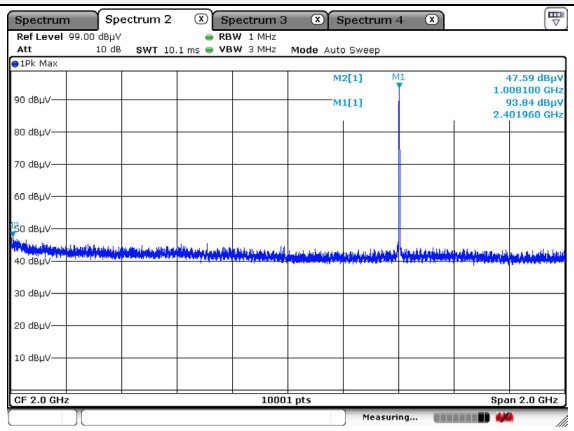	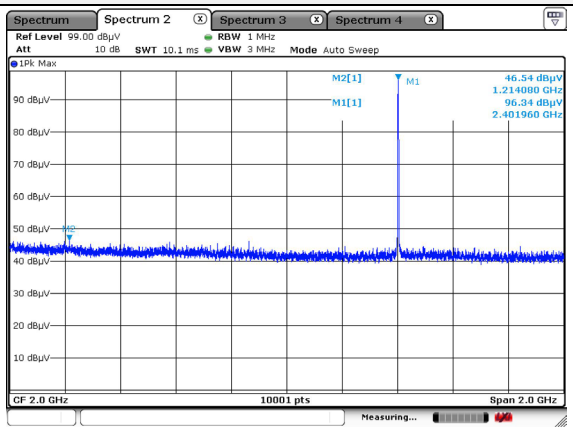
Horizontal // Peak for 3 ㎓ to 18 ㎓	**Vertical // Peak for 3 ㎓ to 18 ㎓**
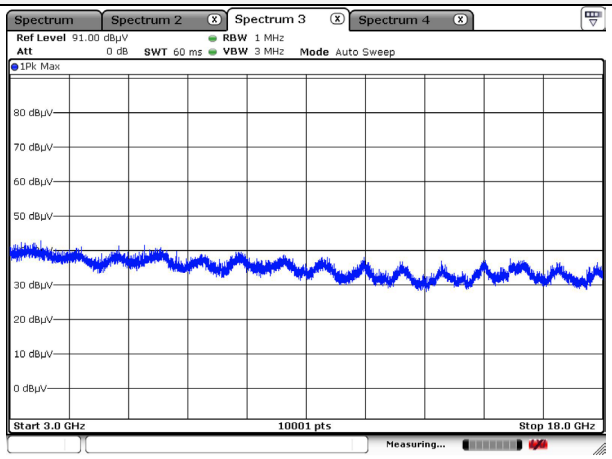	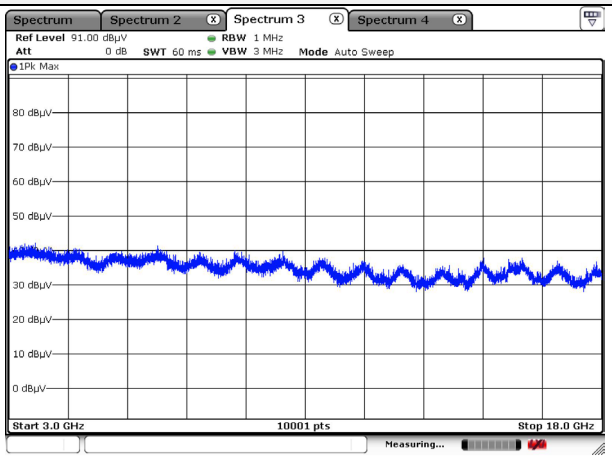

Note.
1. No spurious emission were detected above 3 ㎓.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode:	LE 1 Mbps
Distance of measurement:	3 meter
Channel:	20

- **Spurious**

Frequency (㎒)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 009.30	47.31	Peak	H	-10.02	-	37.29	74.00	36.71
1 197.68	47.35	Peak	V	-8.75	-	38.60	74.00	35.40

Horizontal // Peak for 1 ㎓ to 3 ㎓

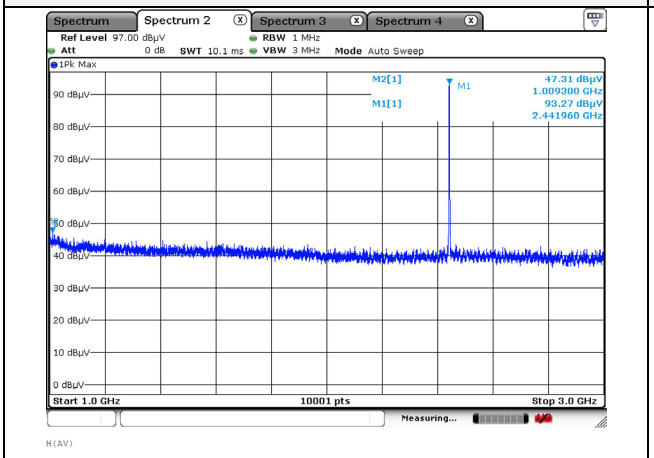

Vertical // Peak for 1 ㎓ to 3 ㎓

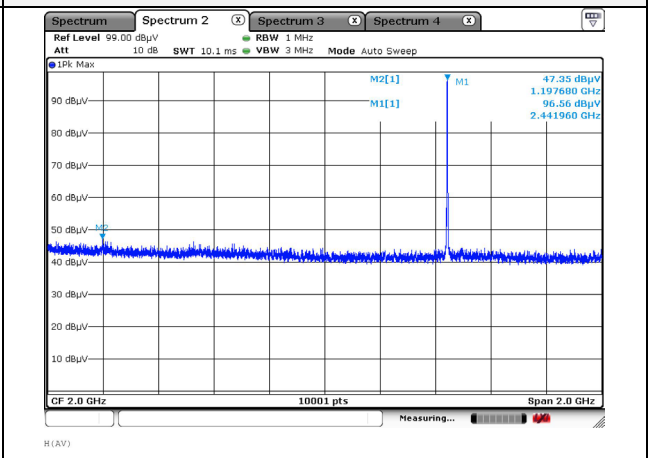

Horizontal // Peak for 3 ㎓ to 18 ㎓

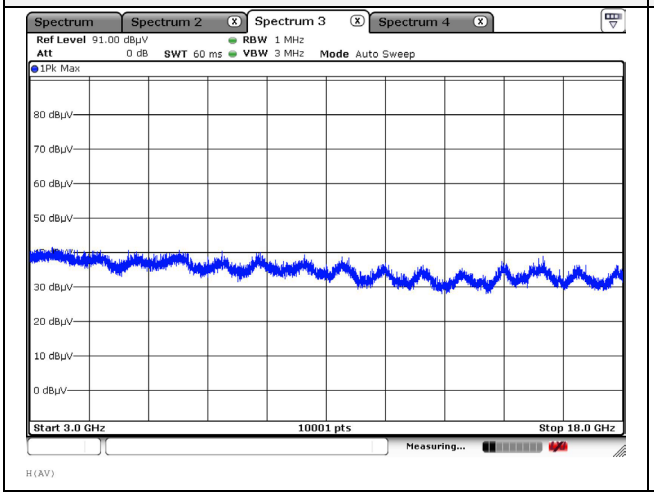

Vertical // Peak for 3 ㎓ to 18 ㎓

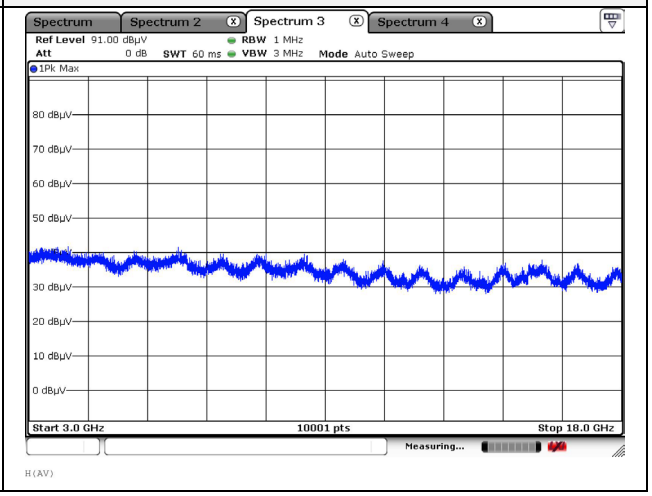

Note.
1. No spurious emission were detected above 3 ㎓.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode: LE 1 Mbps

Distance of measurement: 3 meter

Channel: 39

- **Spurious**

Frequency (㎒)	Level (dB㎶)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
1 123.29	45.99	Peak	H	-9.25	-	36.74	74.00	37.26
1 191.28	46.25	Peak	V	-8.80	-	37.45	74.00	36.55

- **Band edge**

Frequency (㎒)	Level (dB㎶)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
2 483.50	43.00	Peak	H	-1.68	-	41.32	74.00	32.68
2 483.50	43.24	Peak	V	-1.68	-	42.23	74.00	31.77

Restricted band // Horizontal // Peak

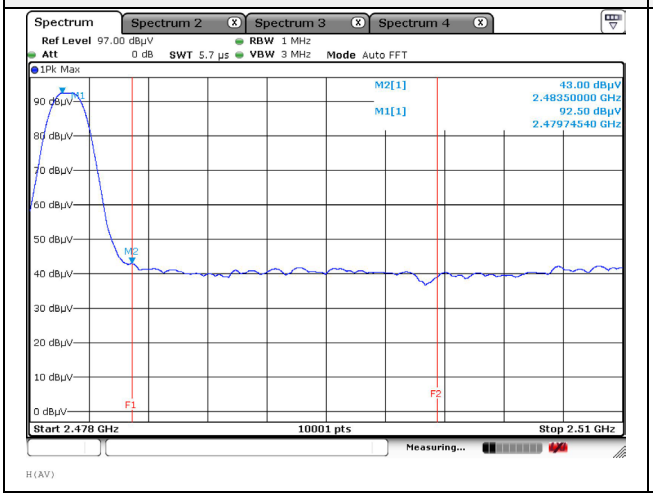

Restricted band // Vertical // Peak

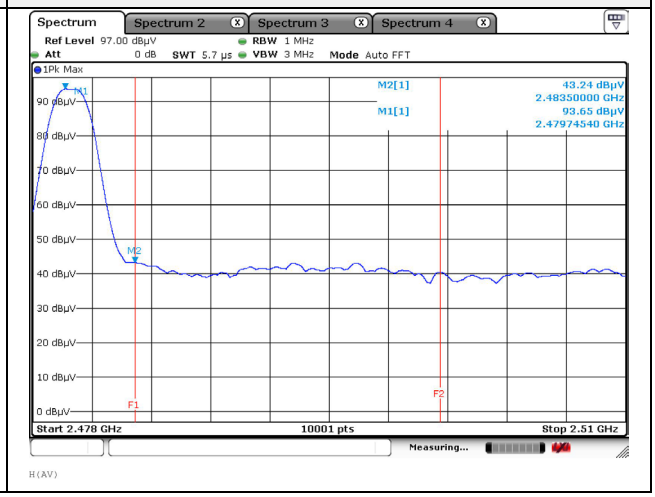

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Horizontal // Peak for 1 ㎓ to 3 ㎓

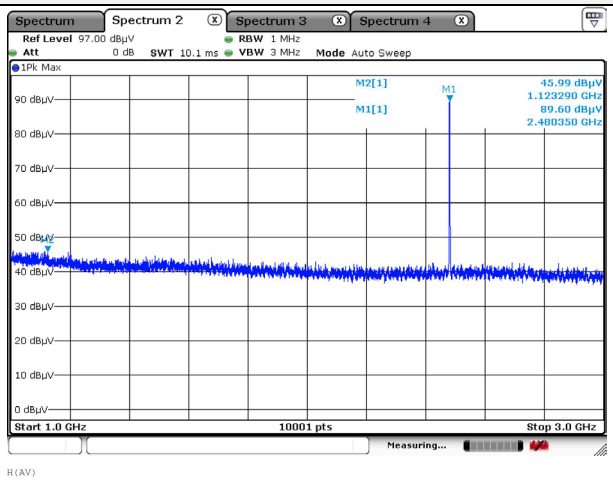

Vertical // Peak for 1 ㎓ to 3 ㎓

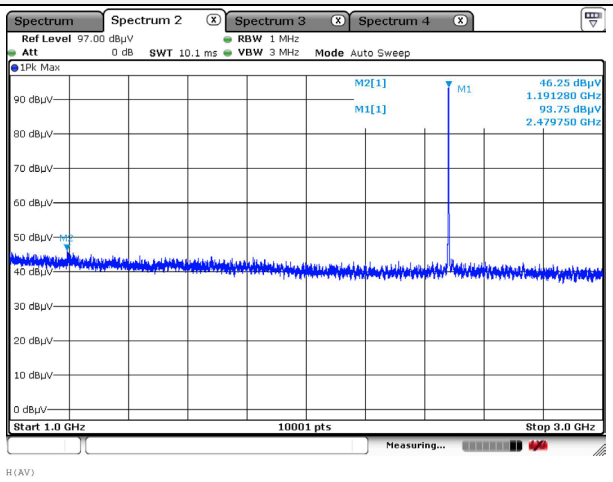

Horizontal // Peak for 3 ㎓ to 18 ㎓

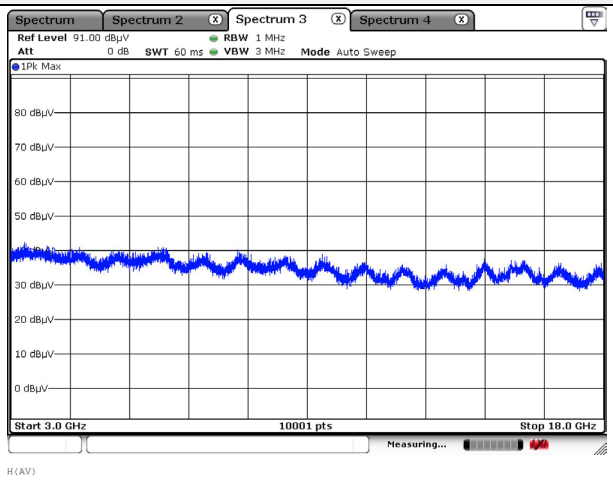

Vertical // Peak for 3 ㎓ to 18 ㎓

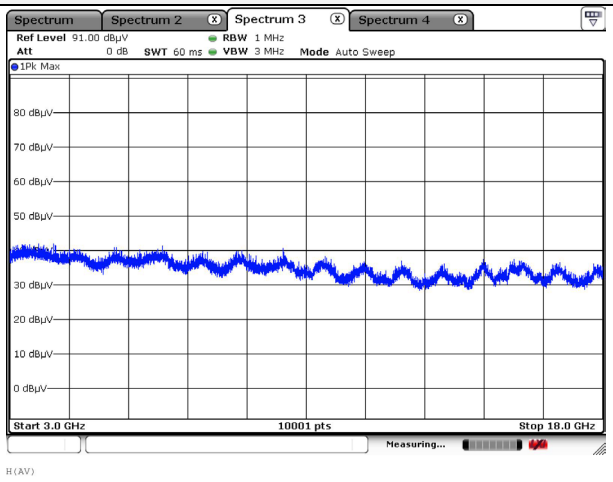

Note.
1. No spurious emission were detected above 3 ㎓.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results (18 ㎓ to 30 ㎓) – Worst case

Mode:	LE 1 Mbps
Distance of measurement:	3 meter
Channel:	00 (Worst case)

Horizontal Peak	Vertical Peak
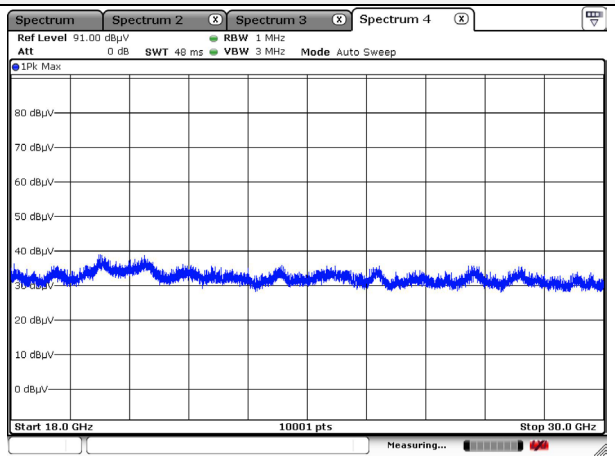	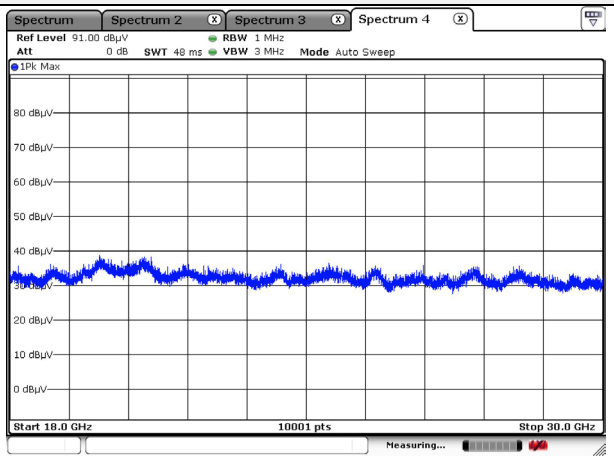

Note.
No spurious emission were detected above 18 ㎓.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.6. Conducted spurious emissions & band edge

Test setup

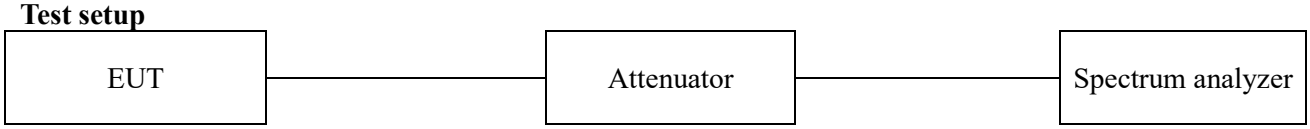

Test procedure

Band edge

ANSI C63.10-2013 - Section 11.11

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Set the RBW = 100 ㎑
4. Set the VBW = [3 × RBW].
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow trace to fully stabilize.

Out of band emissions

ANSI C63.10-2013 - Section 11.11

1. Start frequency was set to 30 ㎒ and stop frequency was set to 25 ㎓ for 2.4 ㎓ frequencies and 40 ㎓ for 5 ㎓ frequencies
2. Set the RBW = 100 ㎑
3. Set the VBW = [3 × RBW].
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow trace to fully stabilize.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Limit

According to 15.247(d), in any 100 ㎑ bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 ㏈ below that in the 100 ㎑ bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 ㏈ instead of 20 ㏈. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))

Limit

According to RSS-247 5.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results

LE 1 Mbps

2 402 MHz

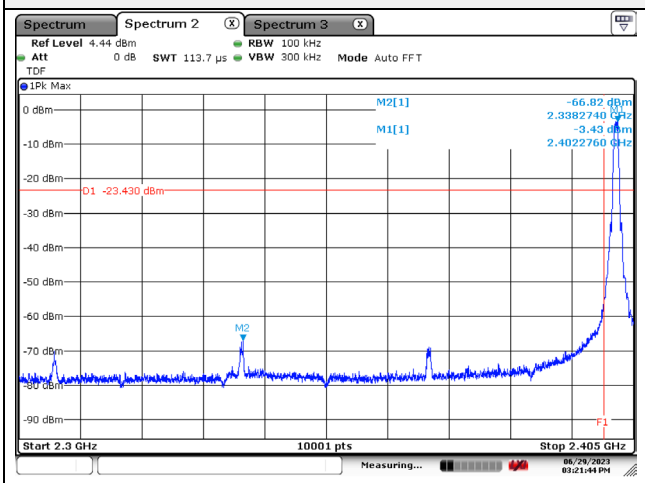

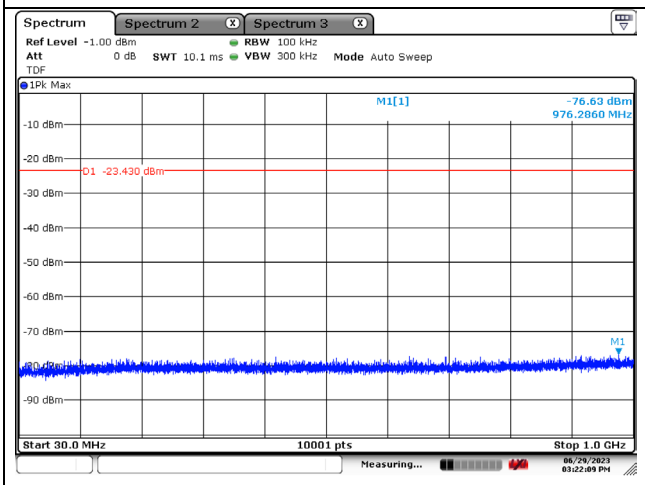

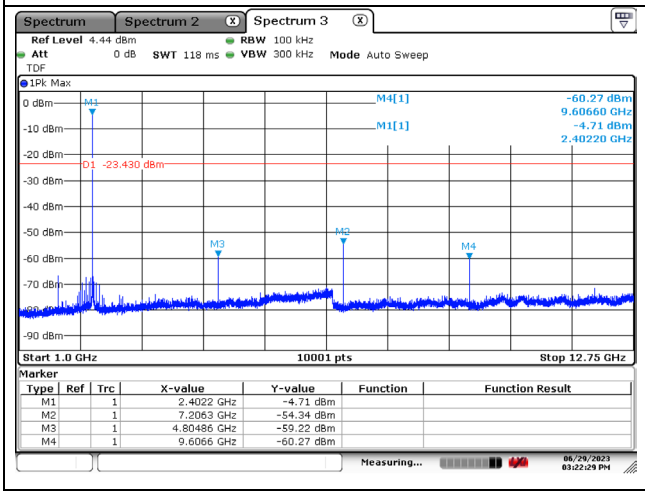

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.4022 GHz	-4.71 dBm		
M2		1	7.2063 GHz	-54.34 dBm		
M3		1	4.80486 GHz	-59.22 dBm		
M4		1	9.6066 GHz	-60.27 dBm		

2 442 MHz

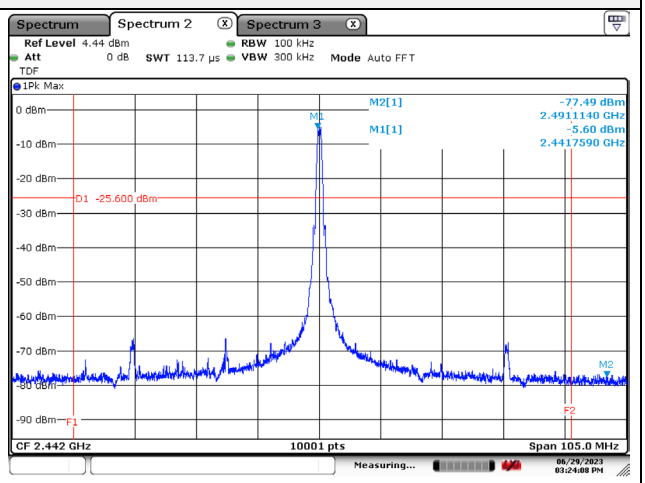

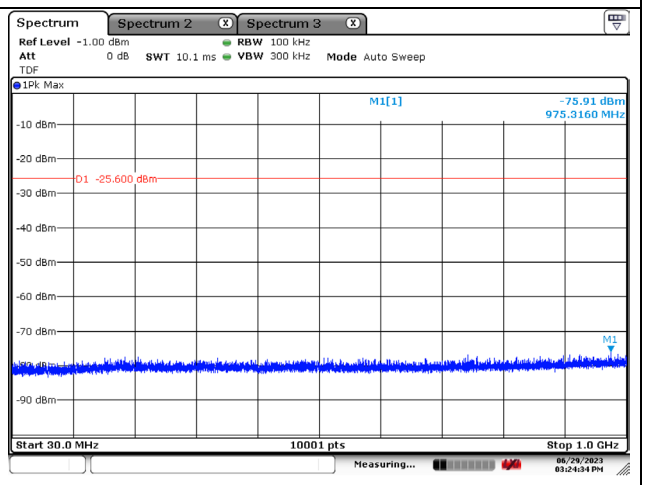

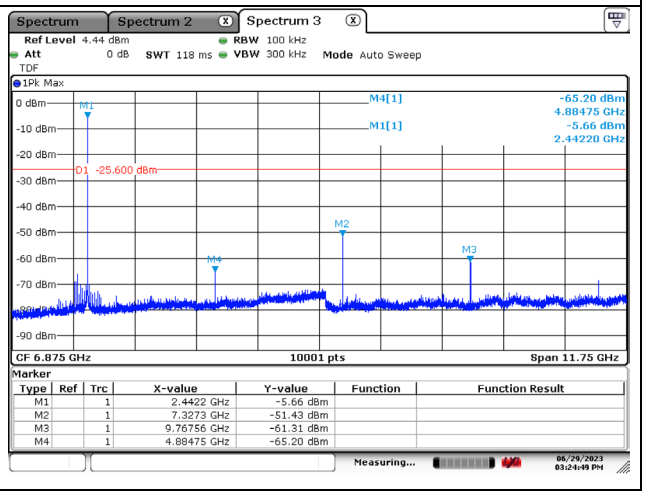

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.4422 GHz	-5.66 dBm		
M2		1	7.3273 GHz	-51.43 dBm		
M3		1	9.76756 GHz	-61.31 dBm		
M4		1	4.88475 GHz	-65.20 dBm		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

LE 1Mbps	
2 480 MHz	**-**
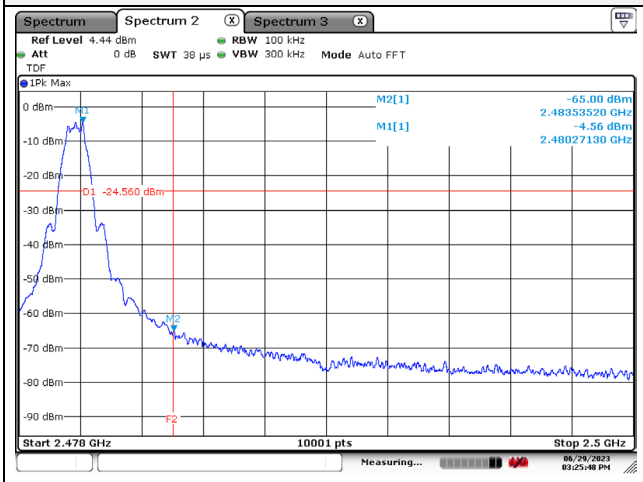	BLANK
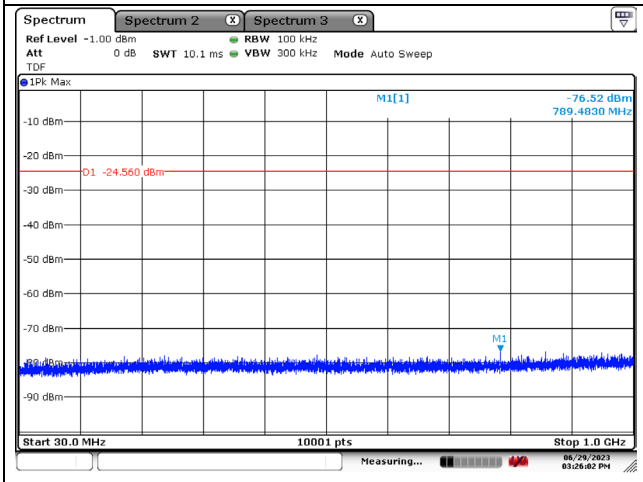	BLANK
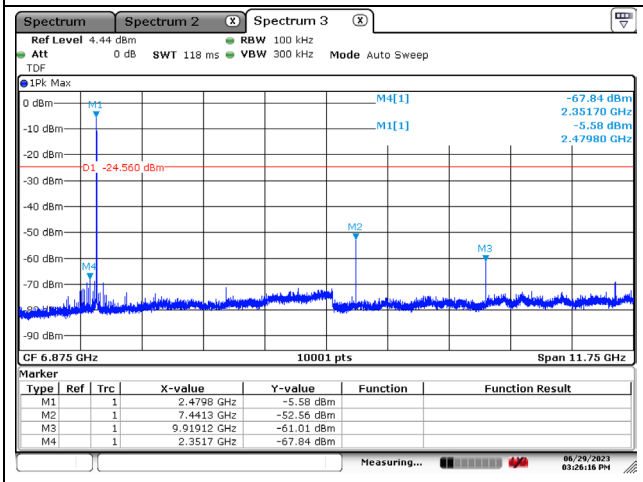 Marker Type | Ref | Trc | X-value | Y-value | Function | Function Result M1 | 1 | 2.4798 GHz | -5.58 dBm M2 | 1 | 7.4413 GHz | -52.56 dBm M3 | 1 | 9.91912 GHz | -61.01 dBm M4 | 1 | 2.3517 GHz | -67.84 dBm	BLANK

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.7. AC conducted emissions

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 ㎑ to 30 ㎒, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (㎒)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

*Decreases with the logarithm of the frequency

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Limit

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 H / 50 line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Frequency of Emission (㎒)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56[note1]	56 to 46 [note1]
0.5 – 5.	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.

Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results

Mode:	LE 1 Mbps
Distance of measurement:	3 meter
Channel:	00 (Worst case)

Hot Line

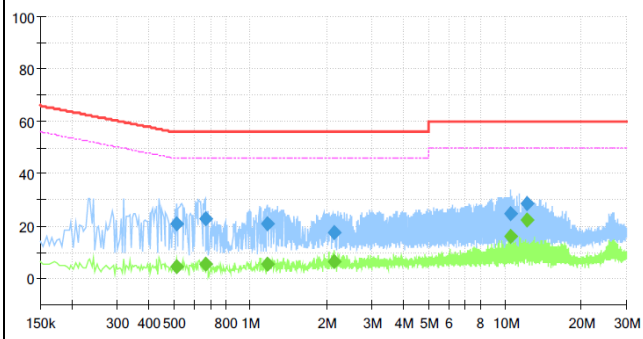

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.514000	---	4.53	46.00	41.47	1000.0	9.000	L1	19.8
0.514000	20.80	---	56.00	35.20	1000.0	9.000	L1	19.8
0.666000	---	5.23	46.00	40.77	1000.0	9.000	L1	20.0
0.666000	22.69	---	56.00	33.31	1000.0	9.000	L1	20.0
1.162000	---	5.36	46.00	40.64	1000.0	9.000	L1	20.3
1.162000	20.67	---	56.00	35.33	1000.0	9.000	L1	20.3
2.142000	---	6.41	46.00	39.59	1000.0	9.000	L1	20.4
2.142000	17.28	---	56.00	38.72	1000.0	9.000	L1	20.4
10.494000	---	16.12	50.00	33.88	1000.0	9.000	L1	20.4
10.494000	24.92	---	60.00	35.08	1000.0	9.000	L1	20.4
12.226000	---	22.25	50.00	27.75	1000.0	9.000	L1	20.5
12.226000	28.78	---	60.00	31.22	1000.0	9.000	L1	20.5

Neutral Line

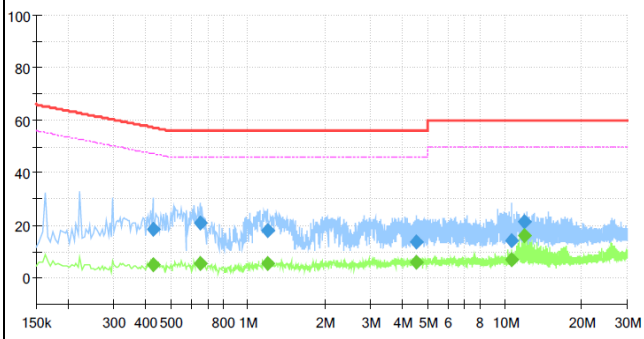

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.426000	---	4.94	47.33	42.39	1000.0	9.000	N	19.7
0.426000	18.66	---	57.33	38.67	1000.0	9.000	N	19.7
0.654000	---	5.43	46.00	40.57	1000.0	9.000	N	20.0
0.654000	21.04	---	56.00	34.96	1000.0	9.000	N	20.0
1.194000	---	5.20	46.00	40.80	1000.0	9.000	N	20.3
1.194000	18.09	---	56.00	37.91	1000.0	9.000	N	20.3
4.514000	---	5.96	46.00	40.04	1000.0	9.000	N	20.0
4.514000	13.46	---	56.00	42.54	1000.0	9.000	N	20.0
10.682000	---	6.67	50.00	43.33	1000.0	9.000	N	20.4
10.682000	14.12	---	60.00	45.88	1000.0	9.000	N	20.4
11.962000	---	16.17	50.00	33.83	1000.0	9.000	N	20.5
11.962000	21.58	---	60.00	38.42	1000.0	9.000	N	20.5

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
SPECTRUM ANALYZER	R&S	FSV40-N	102194	1 year	2023.08.11
SPECTRUM ANALYZER	R&S	FSV40	101725	1 year	2024.06.15
SIGNAL GENERATOR	KEYSIGHT	N5182B	MY59100115	1 year	2024.04.19
SIGNAL GENERATOR	Anritsu	68369B	002118	1 year	2024.05.12
Power Meter	Anritsu	ML2495A	2010001	1 year	2024.04.19
Pulse Power Sensor	Anritsu	MA2411B	1911111	1 year	2024.04.18
ATTENUATOR	Mini-Circuits	BW-S10-2W263+	1	1 year	2024.01.13
Loop Antenna	Schwarzbeck	FMZB1513	1513-257	2 years	2025.03.22
BILOG ANTENNA	Schwarzbeck	VULB 9168	9168-461	2 years	2024.04.27
Attenuator	HUBER+SHHNER	6806.17.A	NONE	1 year	2024.03.21
Horn Antenna	A.H.	SAS-571	414	1 year	2024.01.16
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA 9170550	1 year	2024.01.16
Amplifier	SONOMA INSTRUMENT	310N	401123	1 year	2024.03.21
PREAMPLIFIER	HP	8449B	3008A00538	1 year	2024.05.31
BROADBAND AMPLIFIER	SCHWARZBECK	BBV9721	PS9721-003	1 year	2024.01.16
EMI Test Receiver	R&S	ESU26	100552	1 year	2024.03.21
LISN	ENV216	R & S	101787	1 year	2023.11.10
EMI TEST RECEIVER	ESR3	R & S	101783	1 year	2023.11.11
PULSE LIMITER	ESH3-Z2	R & S	101915	1 year	2023.11.10

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook computer	LG Electronics Inc.,	LGS53	306QCZP560949

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr