

Appendix B: Test Results of Bluetooth LE

APPENDIX B: TEST RESULTS OF BLUETOOTH LE	1
APPENDIX B.1: TEST RESULTS OF 6DB BANDWIDTH.....	2
Test Result.....	2
Test Graphs.....	3
APPENDIX B.2: TEST RESULTS OF 99% BANDWIDTH.....	6
Test Result.....	6
Test Graphs.....	7
APPENDIX B.3: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	10
Test Result.....	10
Test Graphs.....	11
APPENDIX B.4: TEST RESULTS OF BAND EDGE MEASUREMENTS.....	14
Bluetooth LE, 1Mbps.....	14
Bluetooth LE, 2Mbps.....	15
APPENDIX B.5: TEST RESULTS OF CONDUCTED SPURIOUS EMISSION.....	16
Test Result.....	16
Test Graphs.....	17
APPENDIX B.6: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	24
30MHz - 1GHz.....	24
1GHz - 18GHz.....	26
APPENDIX B.7: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	38
APPENDIX B.8: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	46


Appendix B.1: Test Results of 6dB Bandwidth

Test Result


TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.66	2401.66	2402.32	0.5	PASS
		2440	0.66	2439.66	2440.32	0.5	PASS
		2480	0.66	2479.66	2480.32	0.5	PASS
BLE_2M	Ant1	2402	1.10	2401.45	2402.55	0.5	PASS
		2440	1.10	2439.45	2440.55	0.5	PASS
		2480	1.10	2479.45	2480.55	0.5	PASS

Test Graphs


BLE_1M_Ant1_2402

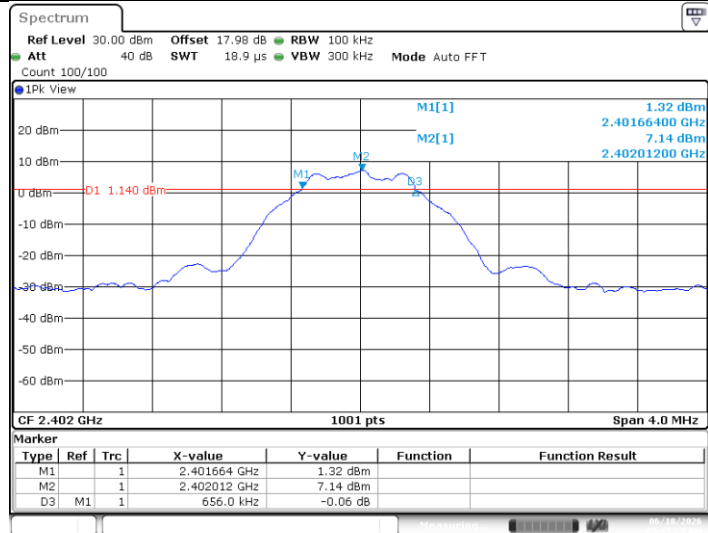


BLE_1M_Ant1_2440

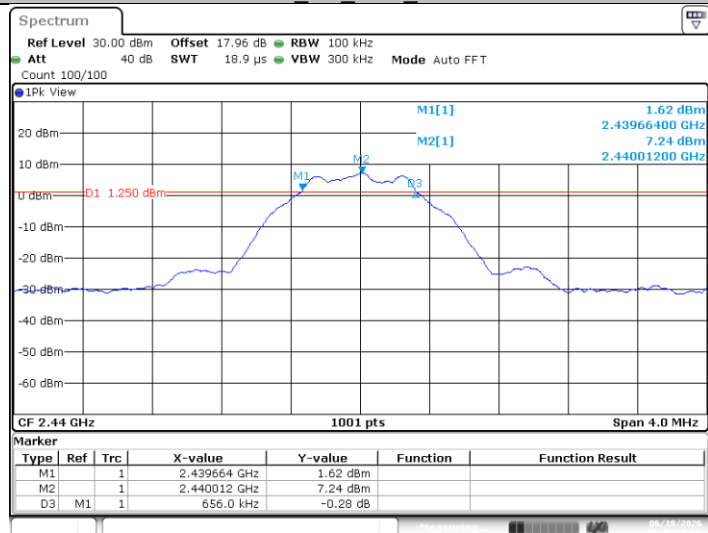


BLE_1M_Ant1_2480

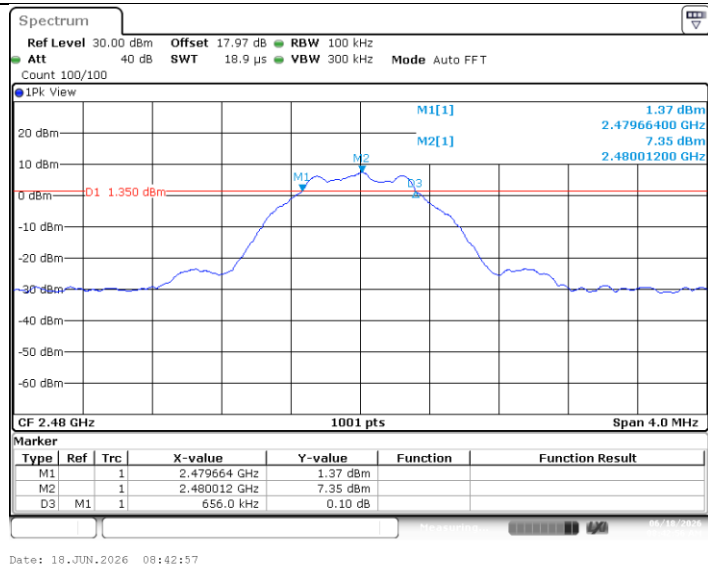


BLE 2M Ant1 2402

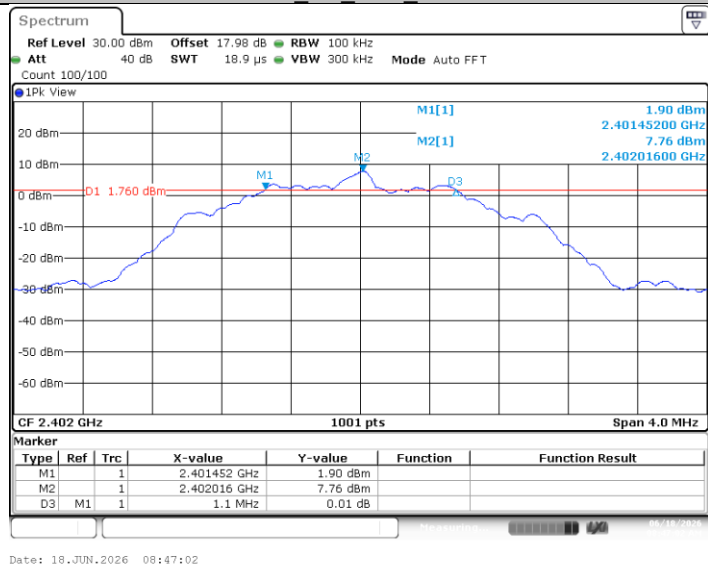

BLE 2M Ant1 2440

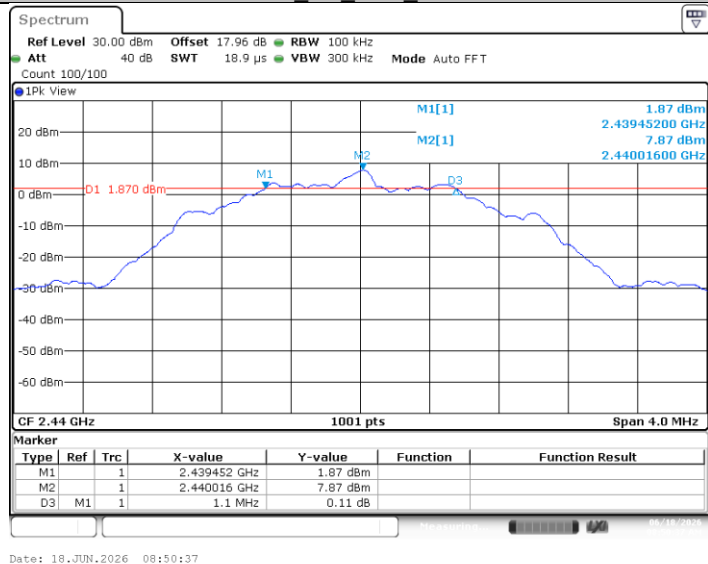

BLE 2M Ant1 2480

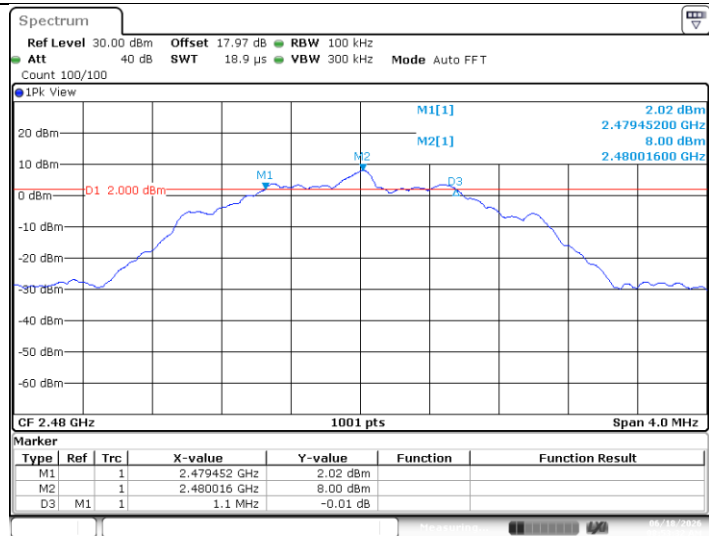

Date: 18.JUN.2026 08:53:32


Appendix B.2: Test Results of 99% Bandwidth

Test Result


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0390	2401.4845	2402.5235	---	PASS
		2440	1.0390	2439.4845	2440.5235	---	PASS
		2480	1.0390	2479.4845	2480.5235	---	PASS
BLE_2M	Ant1	2402	2.0460	2400.9890	2403.0350	---	PASS
		2440	2.0460	2438.9930	2441.0390	---	PASS
		2480	2.0460	2478.9930	2481.0390	---	PASS

Test Graphs


BLE_1M_Ant1_2402

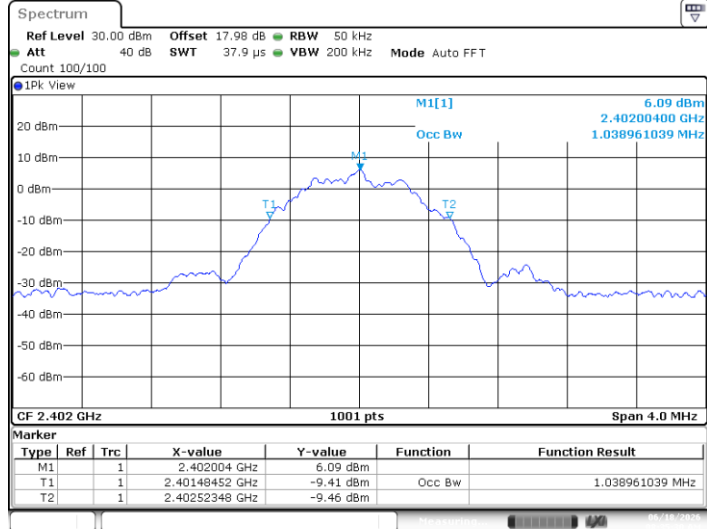


BLE_1M_Ant1_2440

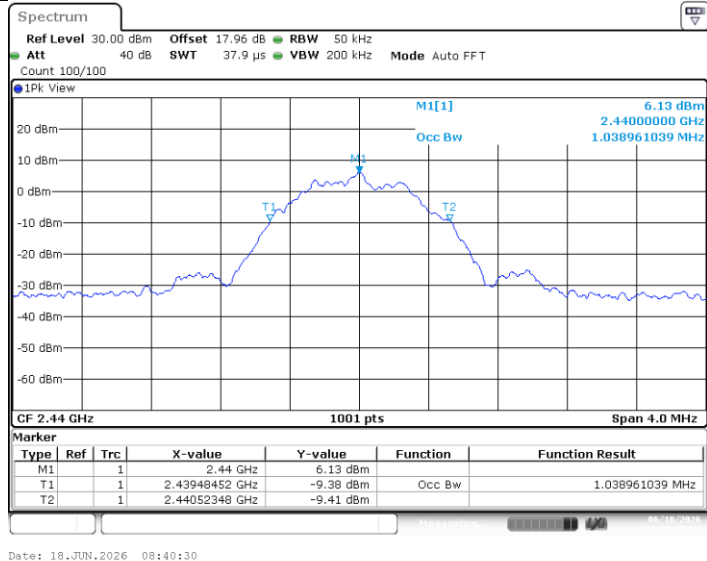


BLE_1M_Ant1_2480

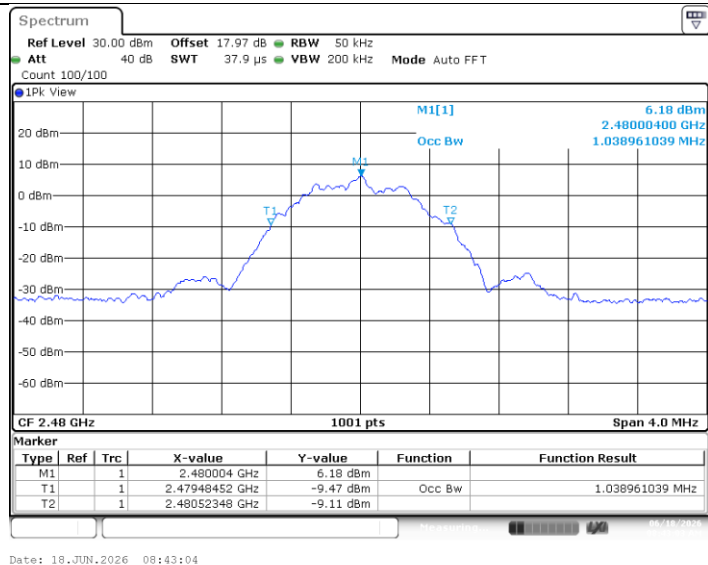


BLE 2M Ant1 2402

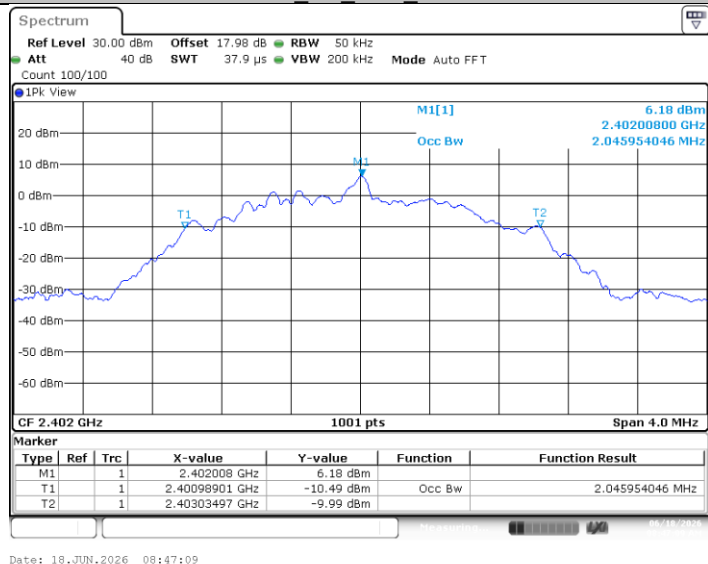

BLE 2M Ant1 2440

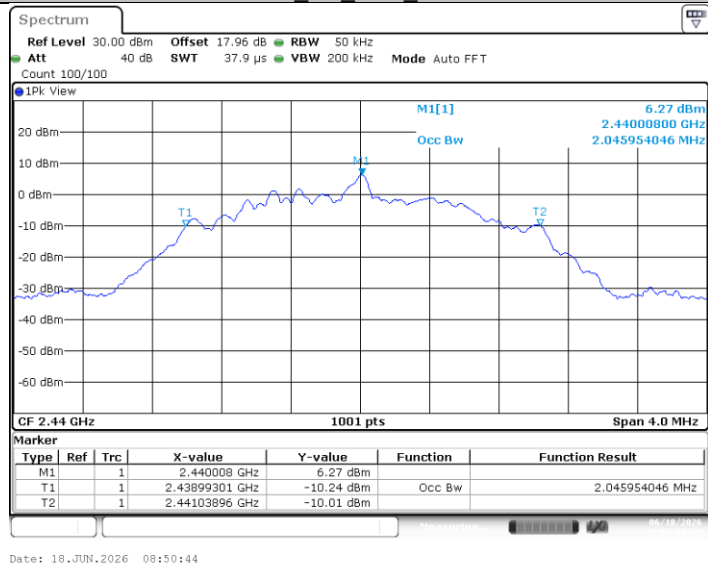

BLE 2M Ant1 2480

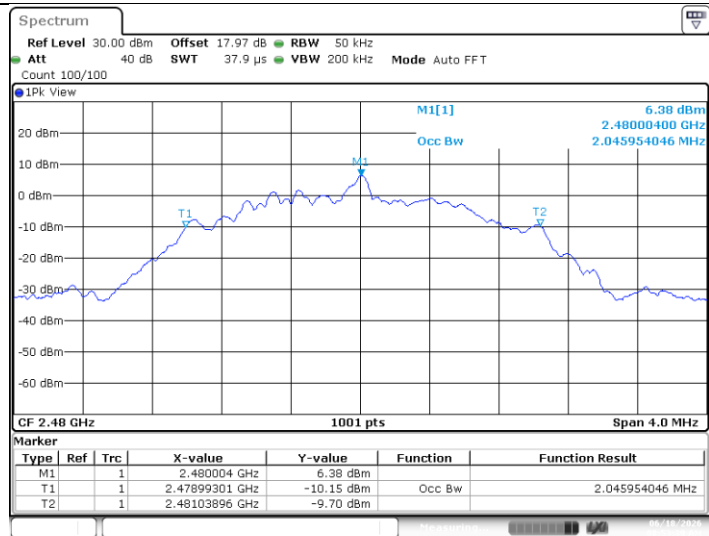

Date: 18.JUN.2026 08:53:39


Appendix B.3: Test Results of Conducted Power Spectral Density

Test Result


TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-8.05	≤8.00	PASS
		2440	-7.79	≤8.00	PASS
		2480	-7.88	≤8.00	PASS
BLE_2M	Ant1	2402	-11.34	≤8.00	PASS
		2440	-11.27	≤8.00	PASS
		2480	-11.20	≤8.00	PASS

Test Graphs


BLE_1M_Ant1_2402

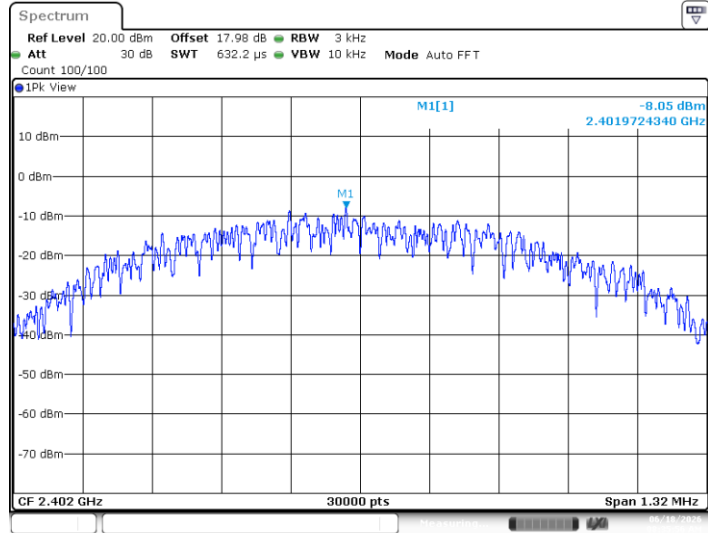


BLE_1M_Ant1_2440

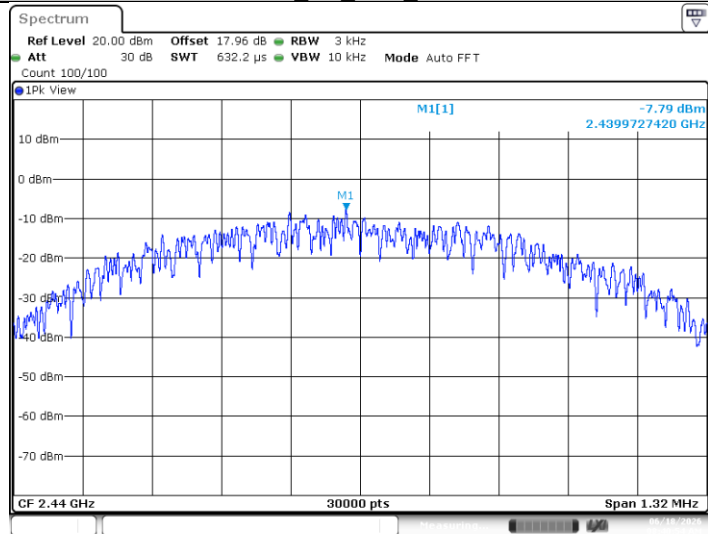


BLE_1M_Ant1_2480

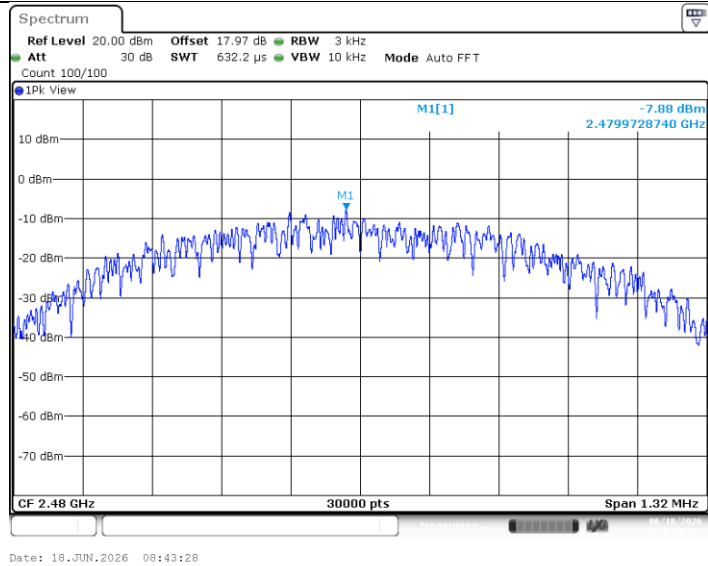


BLE 2M Ant1 2402

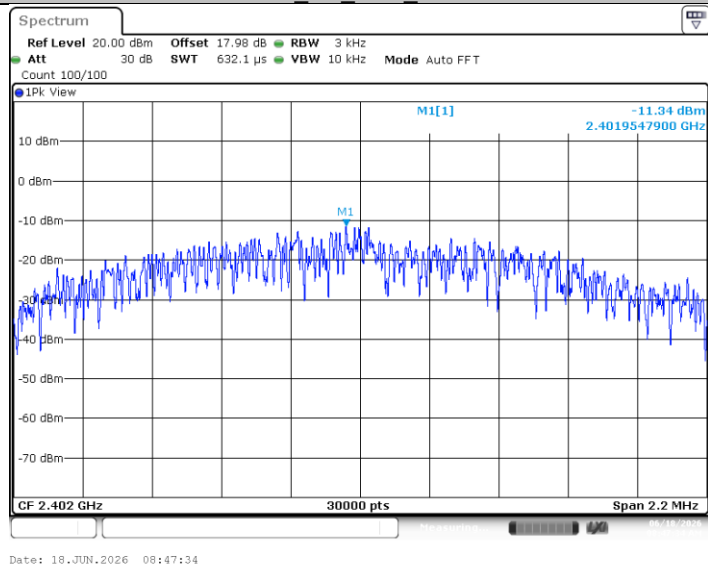

BLE 2M Ant1 2440

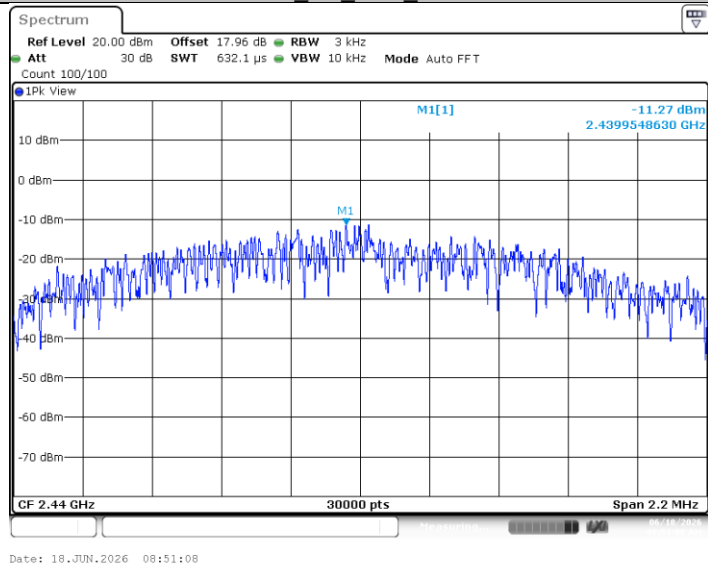


BLE 2M Ant1 2480

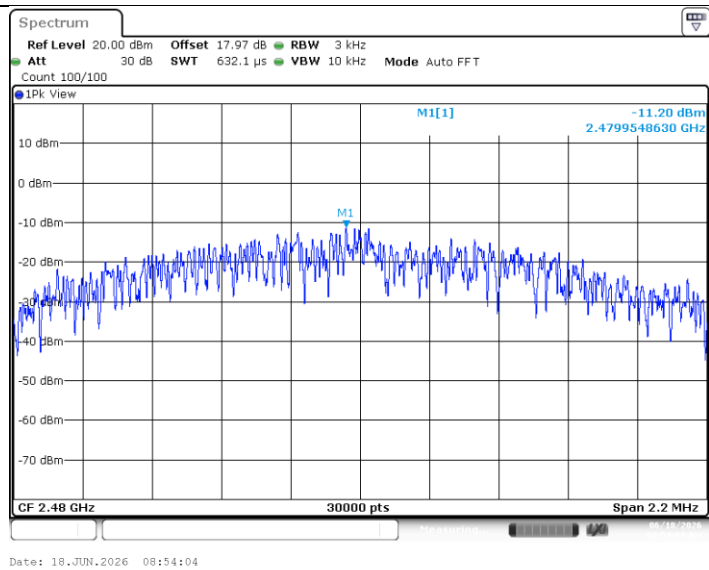


Appendix B.4: Test Results of Band Edge Measurements

Bluetooth LE, 1Mbps

Low Channel

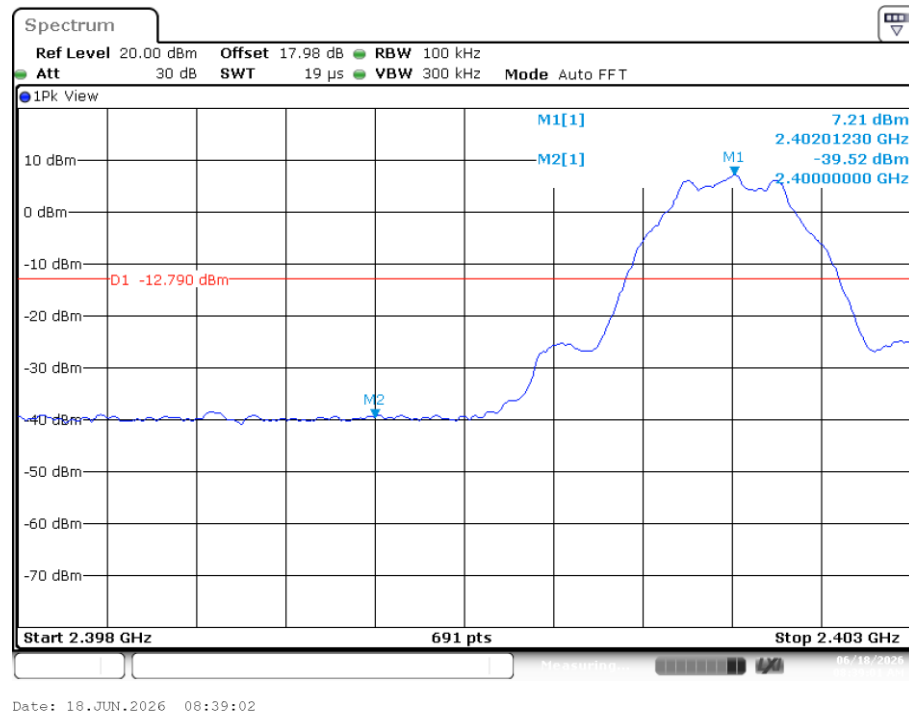


High Channel

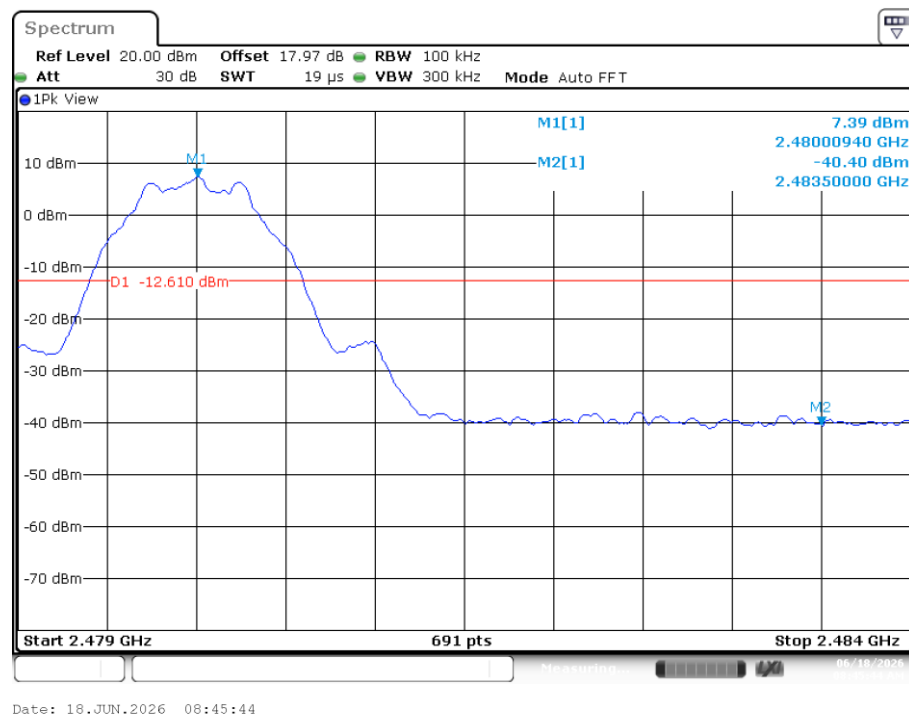


Bluetooth LE, 2Mbps

Low Channel

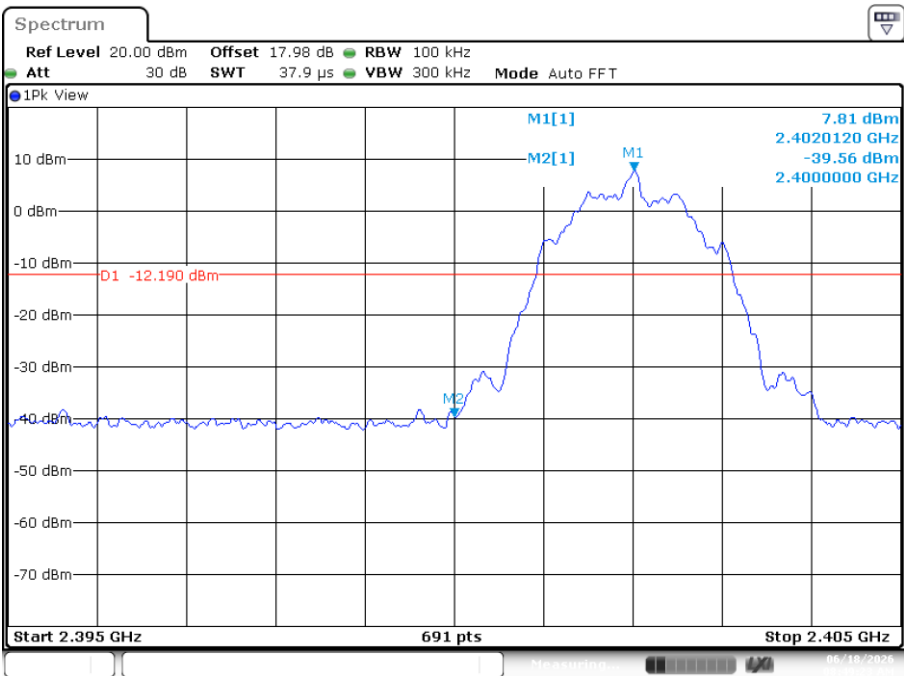

Date: 18.JUN.2026 08:49:24

High Channel

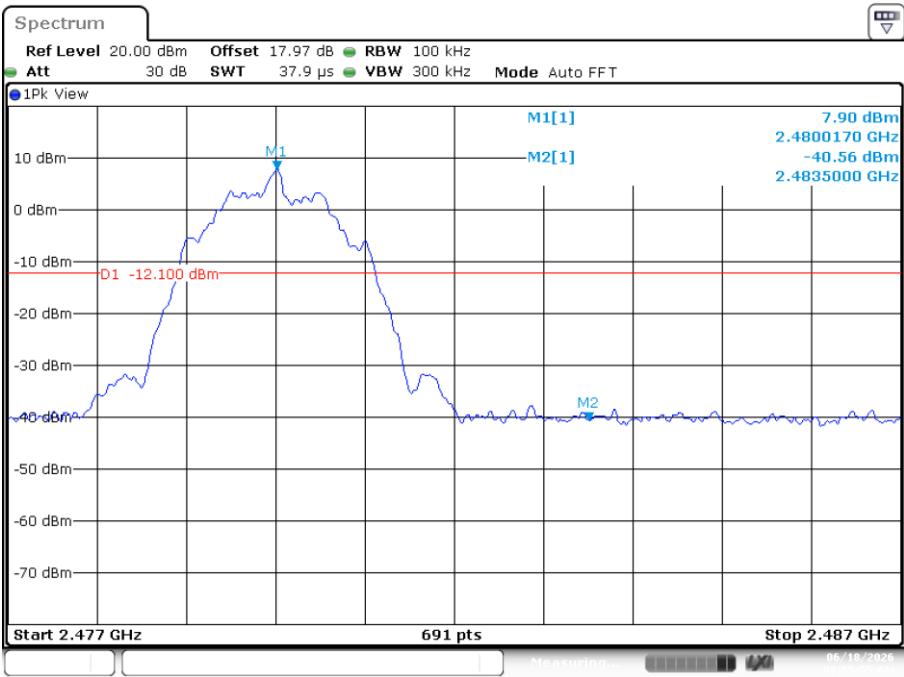

Date: 18.JUN.2026 08:55:55


Appendix B.5: Test Results of Conducted Spurious Emission

Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	7.20	7.20	---	PASS
			30~1000	7.20	-48.14	≤-12.8	PASS
			1000~26500	7.20	-43.18	≤-12.8	PASS
		2440	Reference	7.28	7.28	---	PASS
			30~1000	7.28	-48.98	≤-12.72	PASS
			1000~26500	7.28	-42.85	≤-12.72	PASS
		2480	Reference	7.35	7.35	---	PASS
			30~1000	7.35	-48.8	≤-12.65	PASS
			1000~26500	7.35	-43.36	≤-12.65	PASS
BLE_2M	Ant1	2402	Reference	7.81	7.81	---	PASS
			30~1000	7.81	-48.82	≤-12.19	PASS
			1000~26500	7.81	-42.82	≤-12.19	PASS
		2440	Reference	7.90	7.90	---	PASS
			30~1000	7.90	-48.58	≤-12.1	PASS
			1000~26500	7.90	-42.98	≤-12.1	PASS
		2480	Reference	7.98	7.98	---	PASS
			30~1000	7.98	-49.02	≤-12.02	PASS
			1000~26500	7.98	-42.75	≤-12.02	PASS


Test Graphs

BLE_1M_Ant1_2402_0~Reference

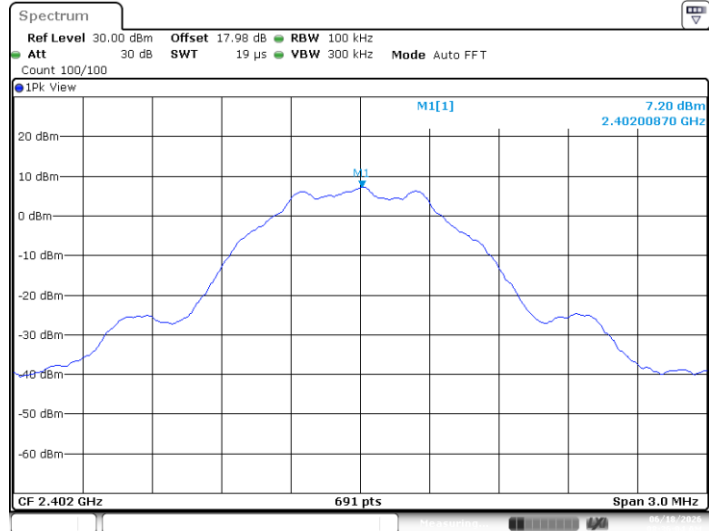


Date: 18.JUN.2026 08:36:05

BLE_1M_Ant1_2402_30~1000

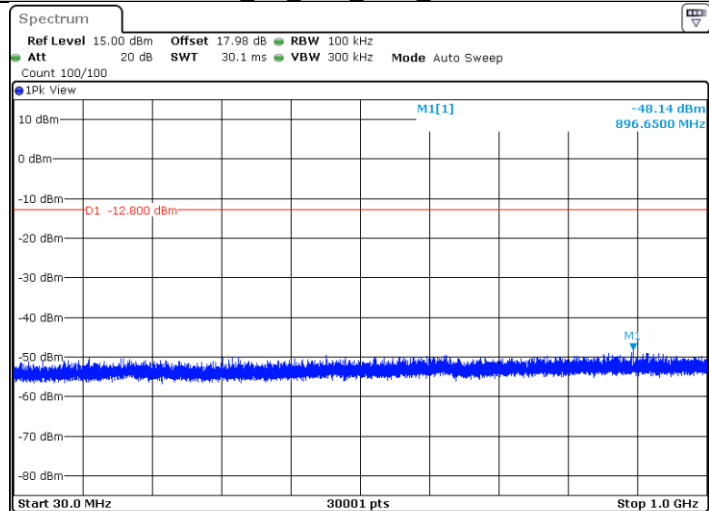


Date: 18.JUN.2026 08:36:18


BLE_1M_Ant1_2402_1000~26500

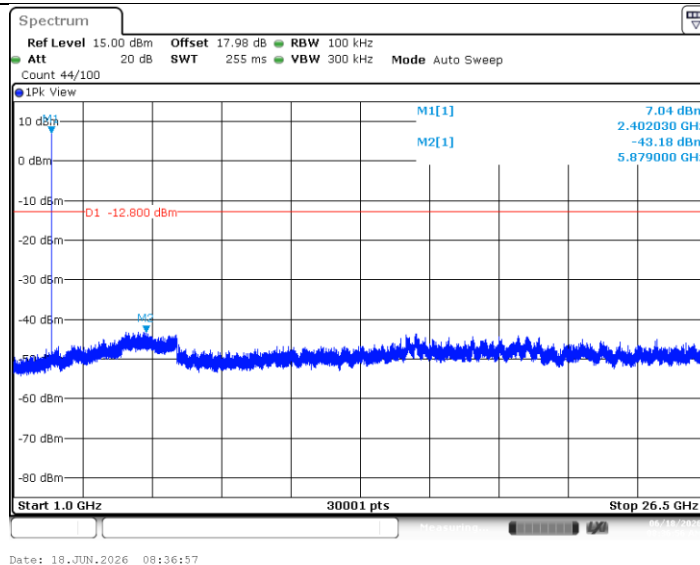


BLE_1M_Ant1_2440_0~Reference

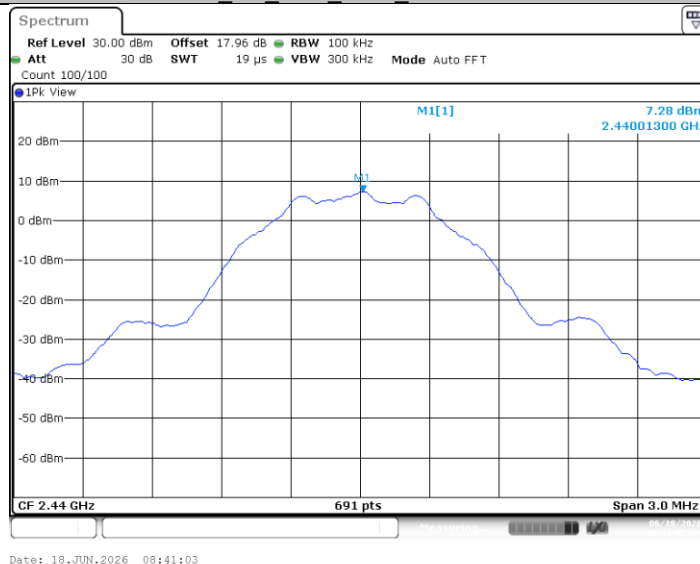


BLE_1M_Ant1_2440_30~1000

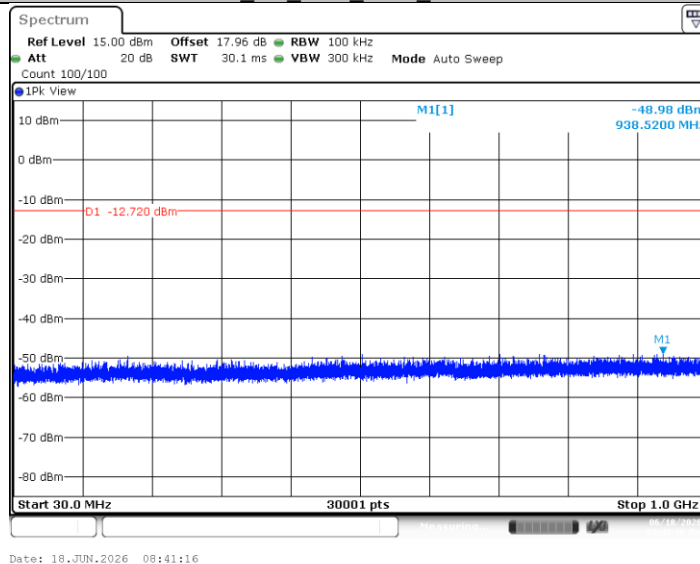


BLE_1M_Ant1_2440_1000~26500

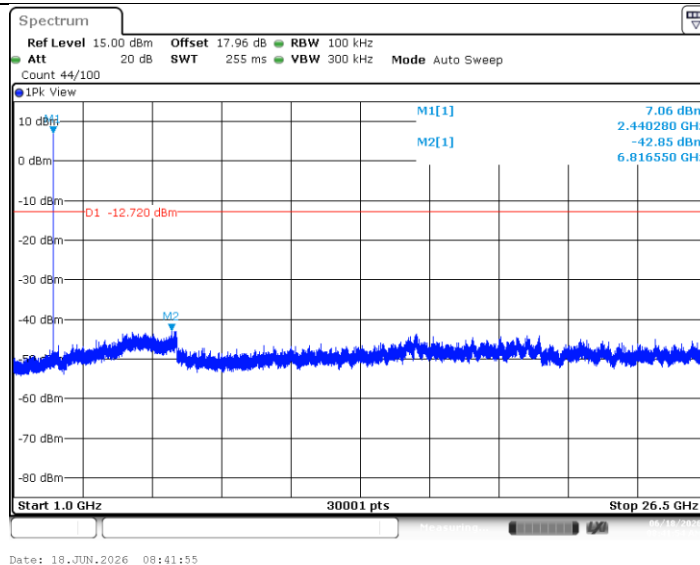


BLE_1M_Ant1_2480_0~Reference

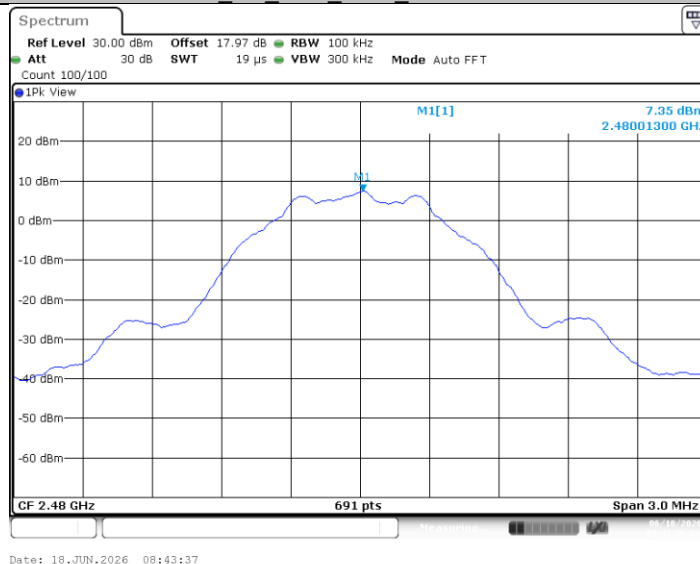


BLE_1M_Ant1_2480_30~1000

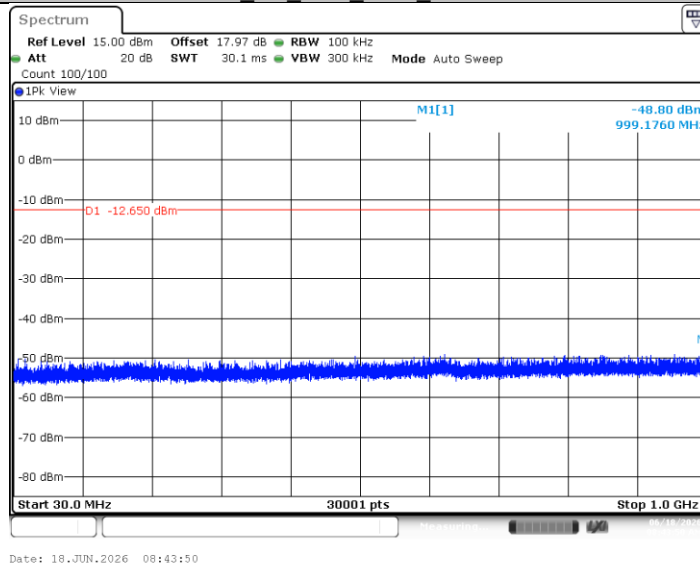


BLE_1M_Ant1_2480_1000~26500

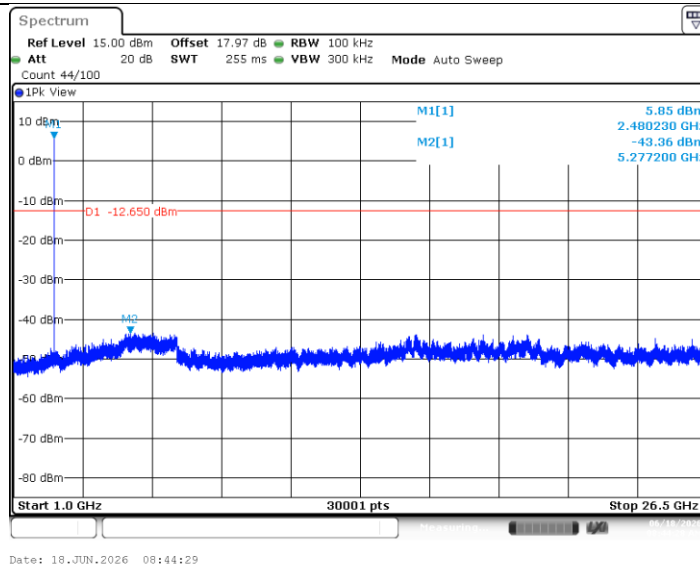


BLE_2M_Ant1_2402_0~Reference

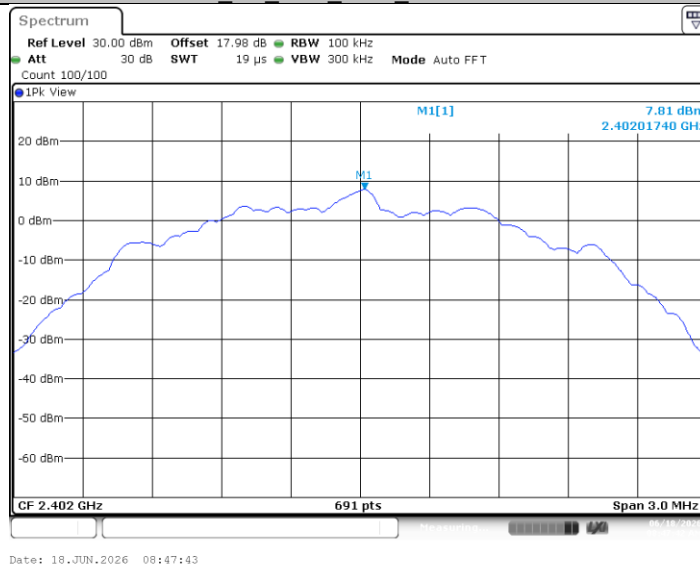


BLE_2M_Ant1_2402_30~1000

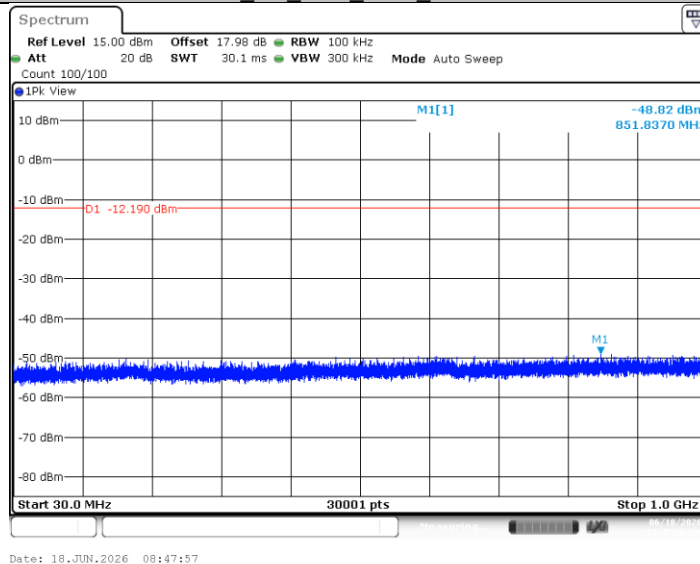


BLE_2M_Ant1_2402_1000~26500

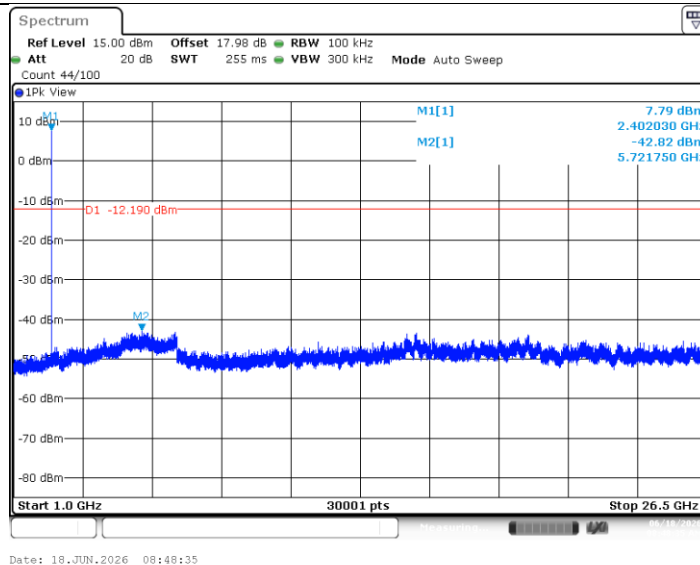


BLE_2M_Ant1_2440_0~Reference

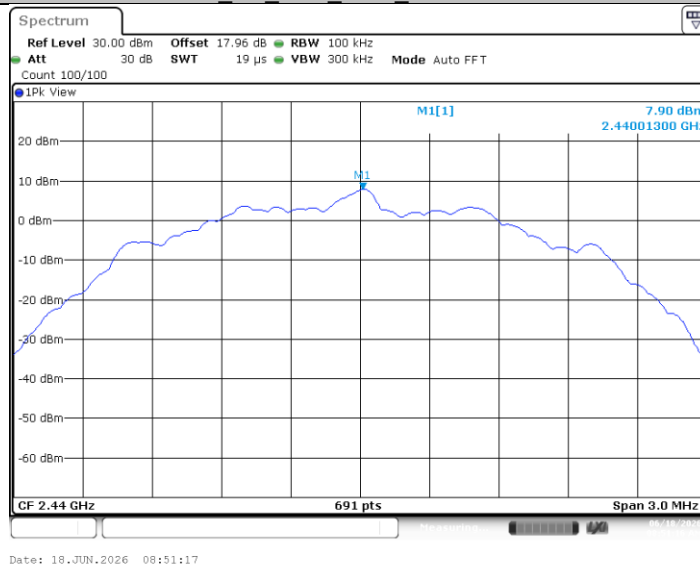


BLE_2M_Ant1_2440_30~1000

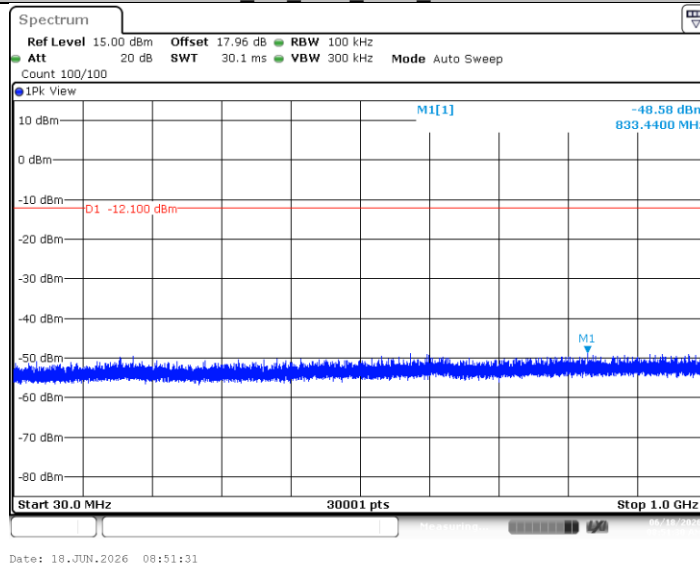


BLE_2M_Ant1_2440_1000~26500

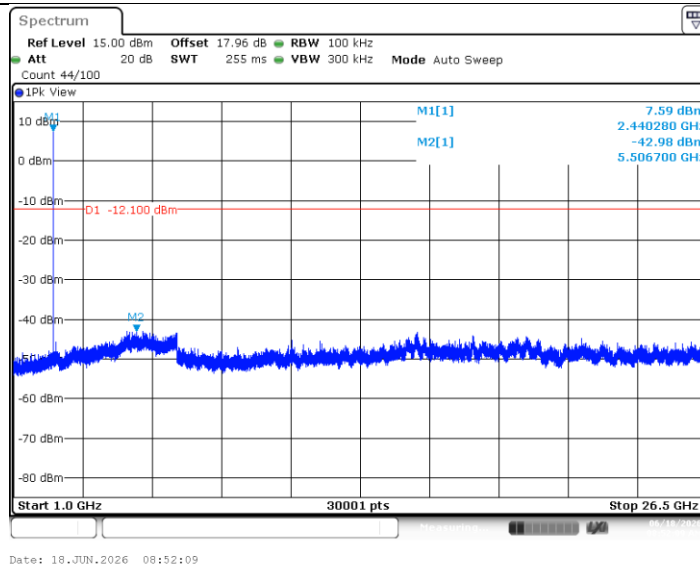


BLE_2M_Ant1_2480_0~Reference

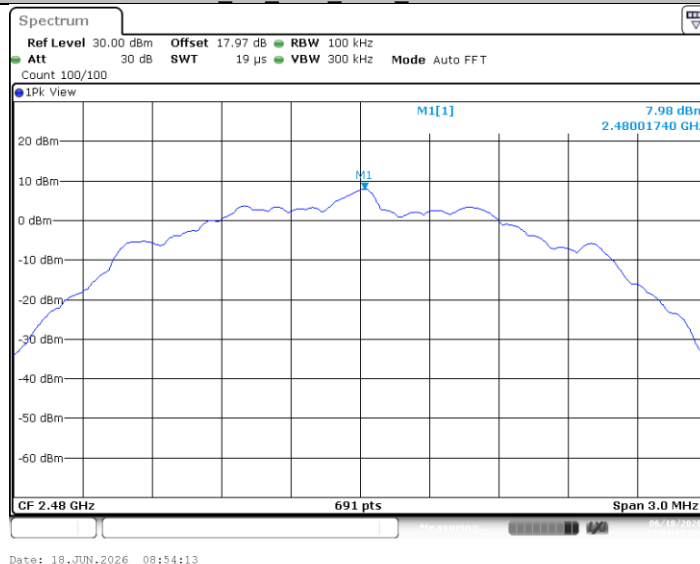

BLE_2M_Ant1_2480_30~1000

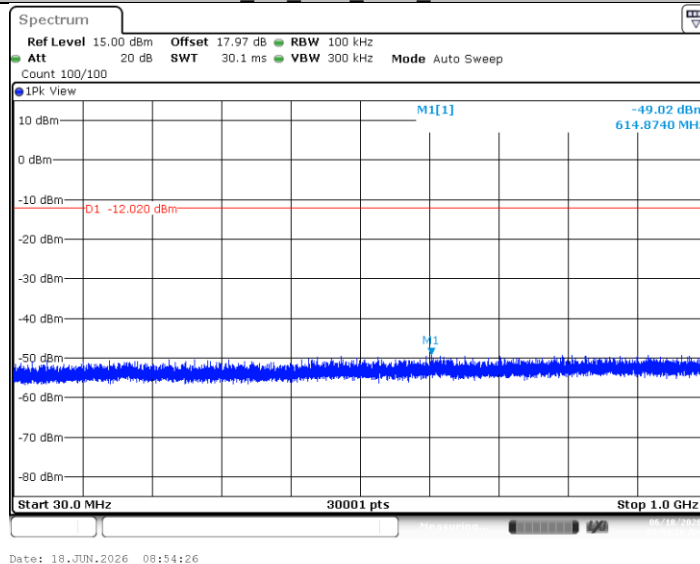

BLE_2M_Ant1_2480_1000~26500

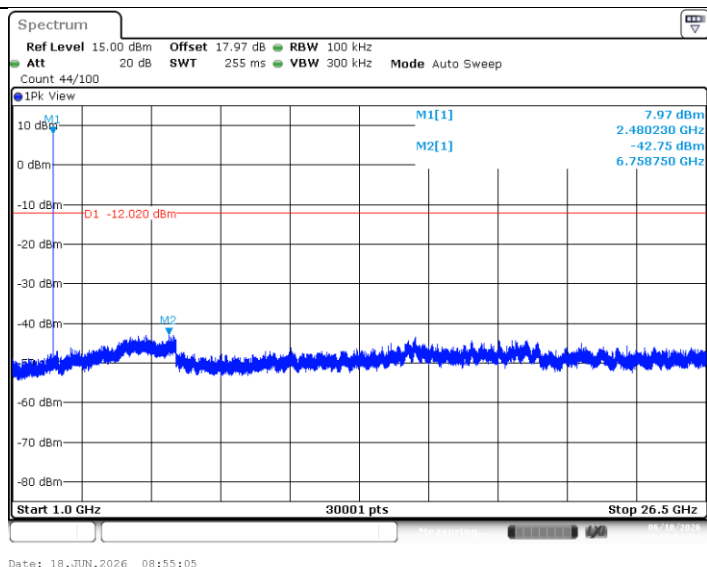

Appendix B.6: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

EUT Information

EUT Name:	Dongle
Model:	UMA-ME00
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	A004135533-001
Test Voltage:	DC 5V
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

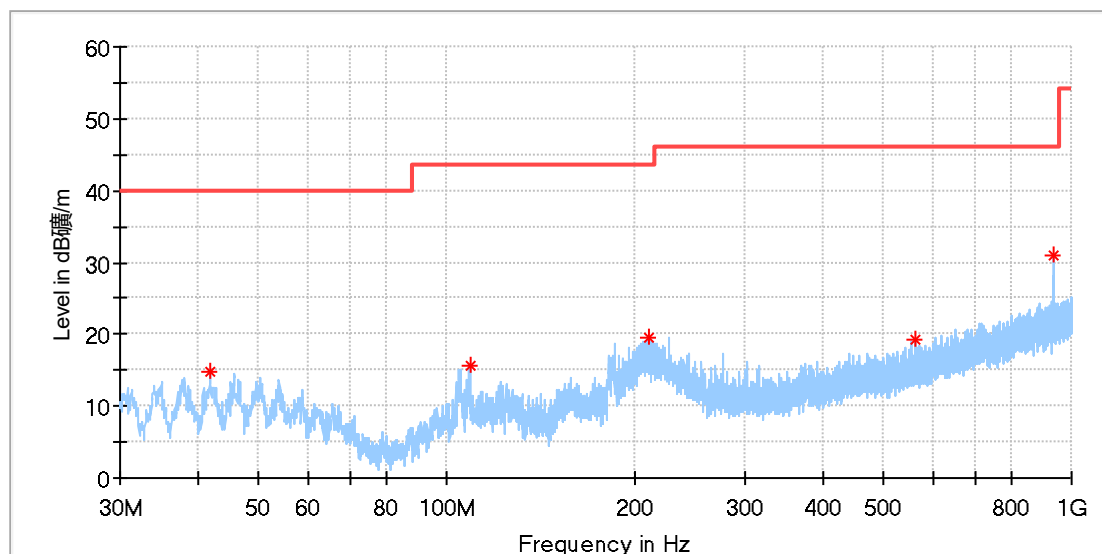

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.747778	14.82	40.00	25.18	100.0	H	12.0	-19.7
108.839444	15.77	43.50	27.73	100.0	H	199.0	-19.1
210.096667	19.40	43.50	24.10	100.0	H	267.0	-18.9
561.883333	19.13	46.00	26.87	100.0	H	160.0	-10.5
937.542778	31.01	46.00	14.99	100.0	H	91.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Dongle
Model: UMA-ME00
Test Mode: BLE 1M_Mid channel
Order No/Sample No: A004135533-001
Test Voltage: DC 5V
Remark: Temp 23.8°C Humi:57%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

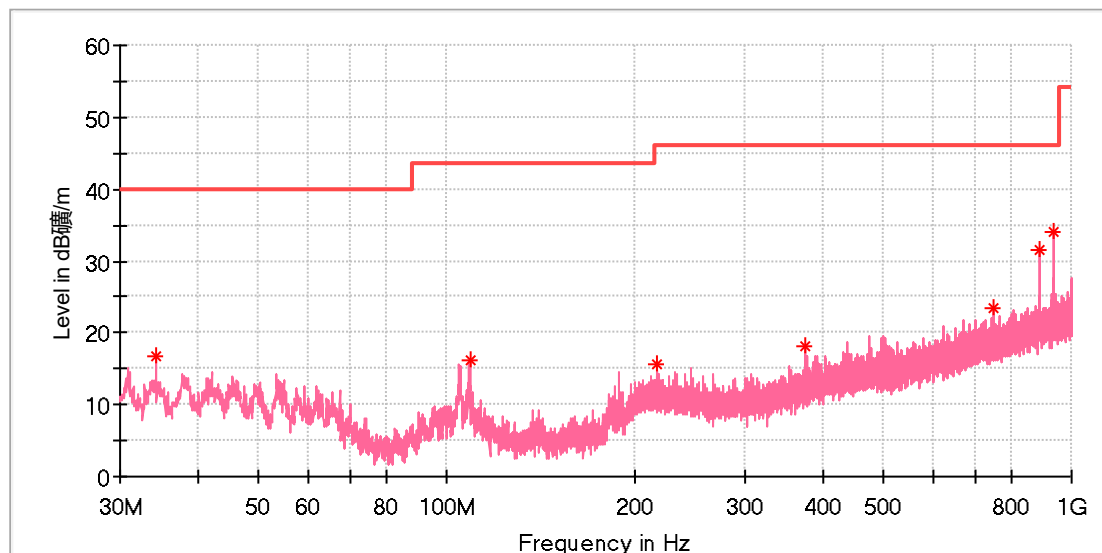

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.203333	16.73	40.00	23.27	100.0	V	254.0	-22.2
108.839444	16.15	43.50	27.35	100.0	V	107.0	-19.1
217.641111	15.65	46.00	30.35	100.0	V	233.0	-18.7
374.996667	18.02	46.00	27.98	100.0	V	225.0	-14.3
750.009444	23.46	46.00	22.54	100.0	V	246.0	-7.1
891.036667	31.43	46.00	14.57	100.0	V	0.0	-4.9
937.542778	33.96	46.00	12.04	100.0	V	154.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Dongle
Model:	UMA-ME00
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	A004135533-001
Test Voltage:	DC 5V
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

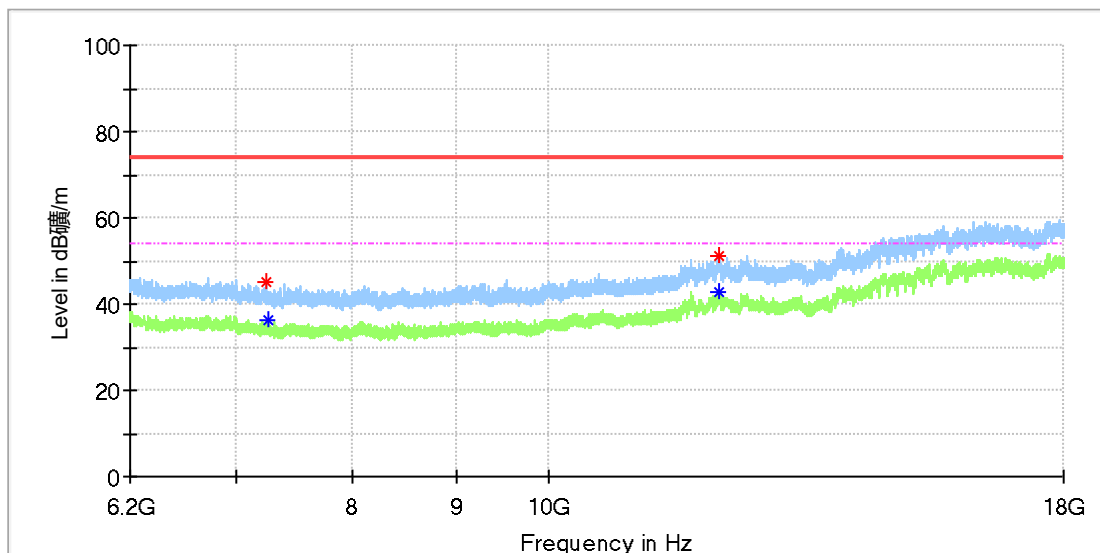

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7247.250000	45.20	---	74.00	28.80	150.0	H	176.0	8.6
7258.066667	---	36.32	54.00	17.68	150.0	H	0.0	8.5
12139.825000	---	42.68	54.00	11.32	150.0	H	0.0	16.5
12149.658333	51.26	---	74.00	22.74	150.0	H	261.0	16.7

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	-----	-----	-----	-----	-----		-----	-----

EUT Information

EUT Name:	Dongle
Model:	UMA-ME00
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	A004135533-001
Test Voltage:	DC 5V
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

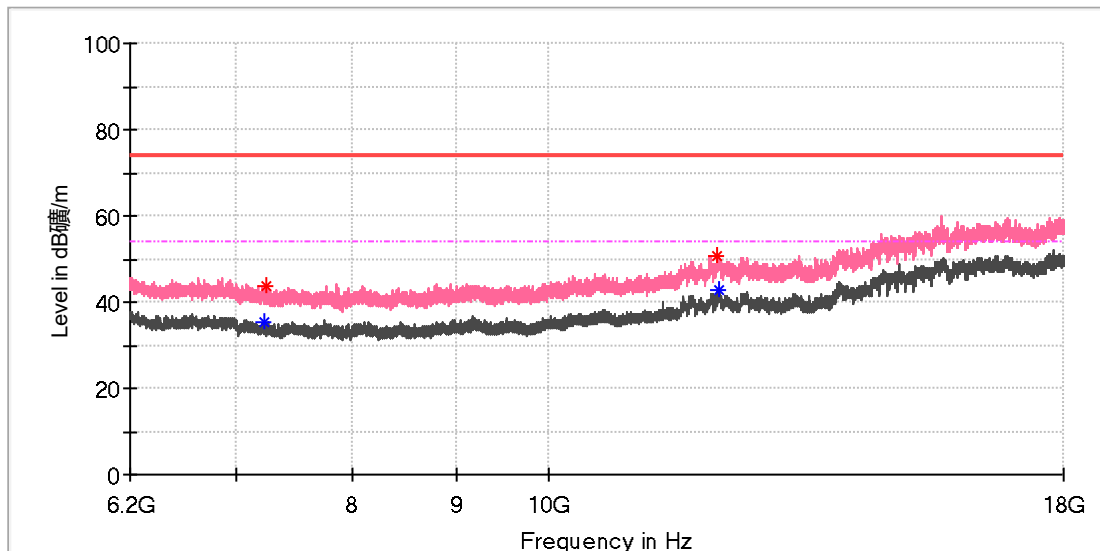

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7220.208333	---	35.31	54.00	18.69	150.0	V	89.0	8.7
7243.808333	43.54	---	74.00	30.46	150.0	V	0.0	8.6
12130.483333	50.78	---	74.00	23.22	150.0	V	0.0	16.2
12158.016667	---	42.67	54.00	11.33	150.0	V	12.0	16.3

Final_Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	-----

EUT Information

EUT Information

EUT Information

EUT Name:	Dongle
Model:	UMA-ME00
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	A004135533-001
Test Voltage:	DC 5V
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

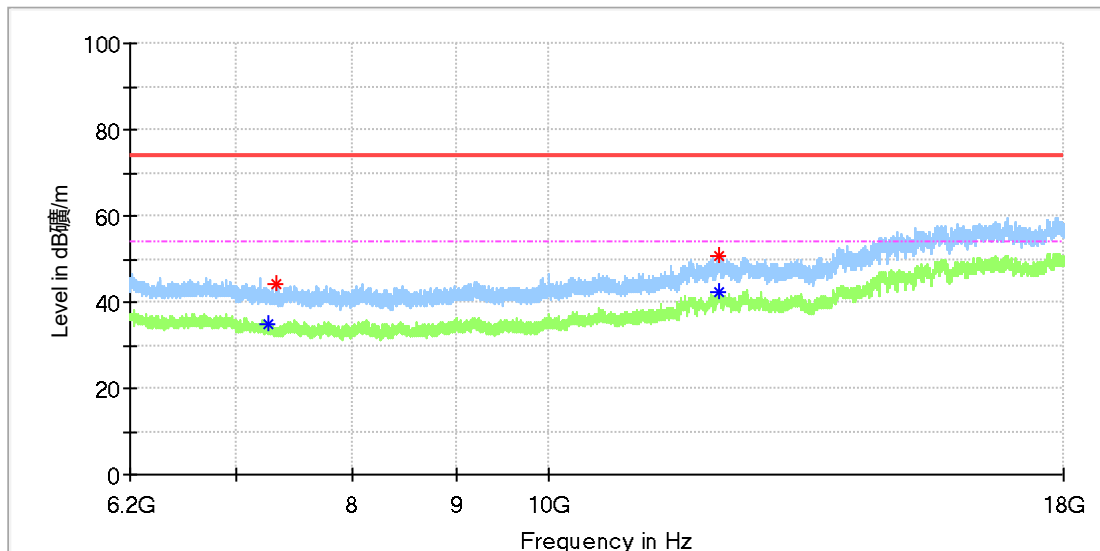

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7262.983333	---	34.95	54.00	19.05	150.0	H	357.0	8.5
7326.900000	43.99	---	74.00	30.01	150.0	H	156.0	8.1
12139.333333	---	42.48	54.00	11.52	150.0	H	0.0	16.5
12146.708333	50.52	---	74.00	23.48	150.0	H	0.0	16.6

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	-----	-----	-----	-----	-----		-----	-----

EUT Information

EUT Name:	Dongle
Model:	UMA-ME00
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	A004135533-001
Test Voltage:	DC 5V
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

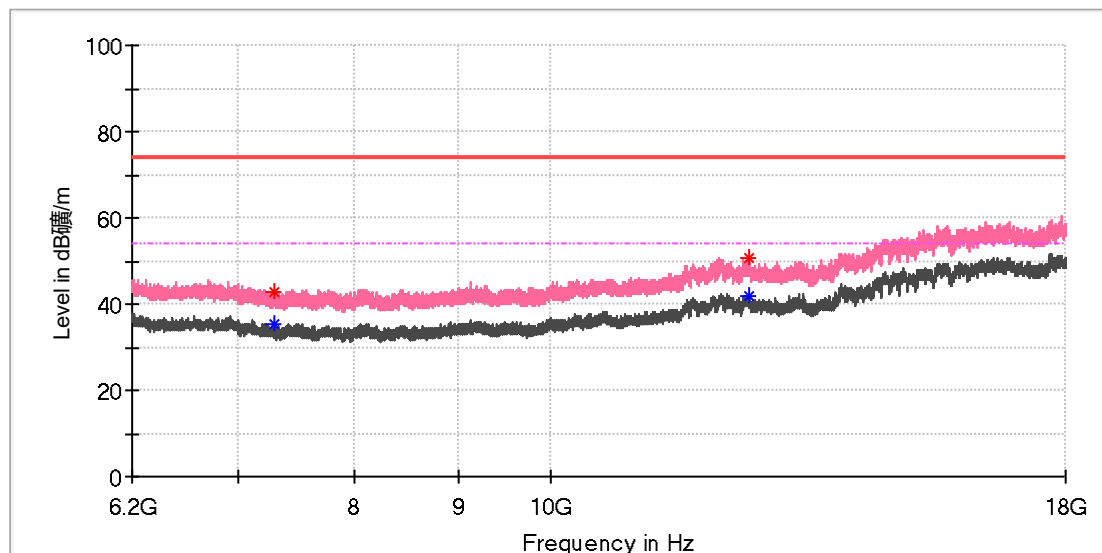

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7289.533333	---	35.14	54.00	18.86	150.0	V	170.0	8.4
7297.891667	42.88	---	74.00	31.12	150.0	V	18.0	8.3
12531.683333	50.55	---	74.00	23.45	150.0	V	95.0	16.3
12546.433333	---	42.07	54.00	11.93	150.0	V	0.0	16.5

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Information

EUT Information

EUT Information

EUT Name:	Dongle
Model:	UMA-ME00
Test Mode:	BLE 1M_High channel
Order No/Sample No:	A004135533-001
Test Voltage:	DC 5V
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

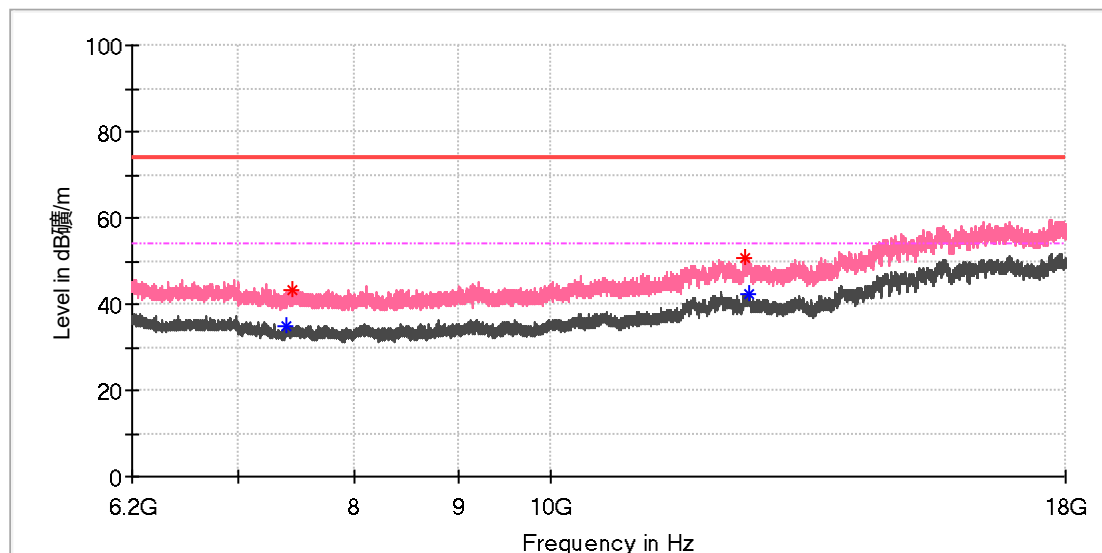


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7396.225000	---	35.08	54.00	18.92	150.0	V	339.0	8.3
7444.408333	43.10	---	74.00	30.90	150.0	V	245.0	8.5
12487.925000	50.75	---	74.00	23.25	150.0	V	1.0	16.0
12549.383333	---	42.55	54.00	11.45	150.0	V	132.0	16.6

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Name:	Dongle
Model:	UMA-ME00
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	A004135533-001
Test Voltage:	DC 5V
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

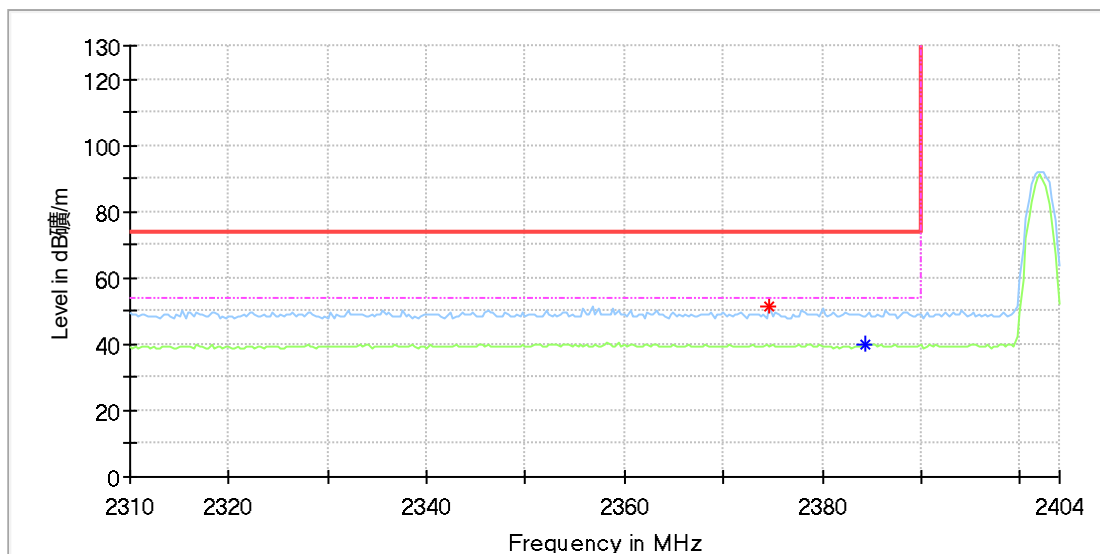


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2374.705882	51.15	---	74.00	22.85	150.0	H	109.0	8.5
2384.411765	---	39.80	54.00	14.20	150.0	H	103.0	8.5

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Dongle
Model:	UMA-ME00
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	A004135533-001
Test Voltage:	DC 5V
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

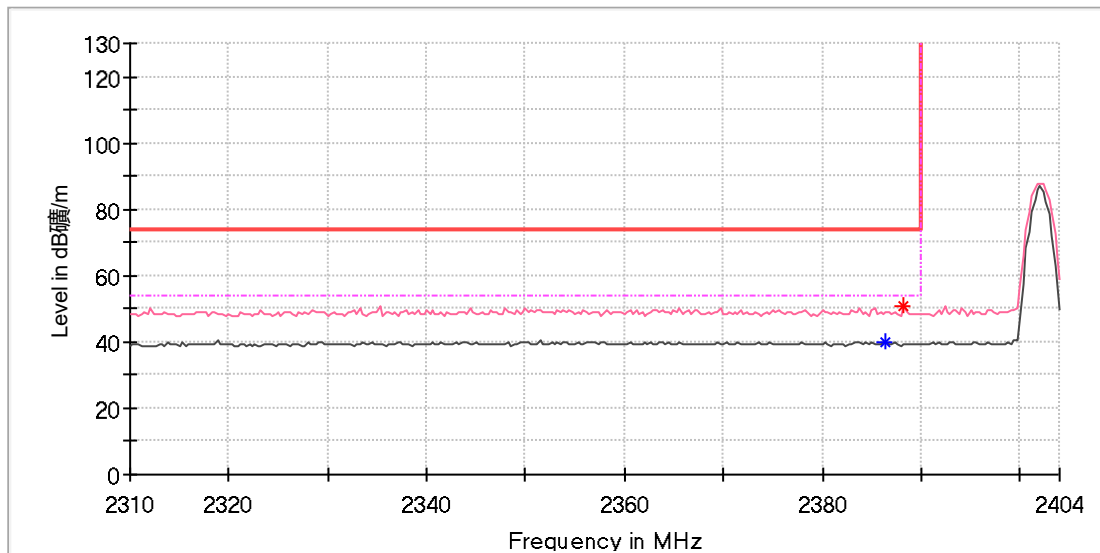

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2386.470588	---	39.72	54.00	14.28	150.0	V	328.0	8.5
2388.235294	50.56	---	74.00	23.44	150.0	V	328.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Dongle
Model:	UMA-ME00
Test Mode:	BLE 1M_High channel
Order No/Sample No:	A004135533-001
Test Voltage:	DC 5V
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

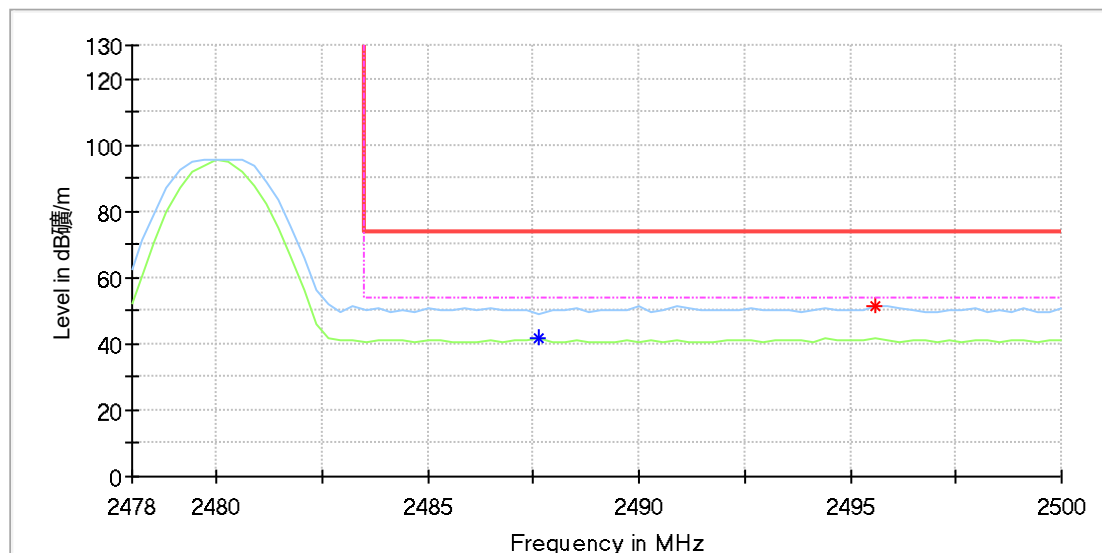

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.647059	---	41.64	54.00	12.36	150.0	H	124.0	9.0
2495.588235	51.49	---	74.00	22.51	150.0	H	334.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Information

EUT Name:	Dongle
Model:	UMA-ME00
Test Mode:	BLE 1M_High channel
Order No/Sample No:	A004135533-001
Test Voltage:	DC 5V
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

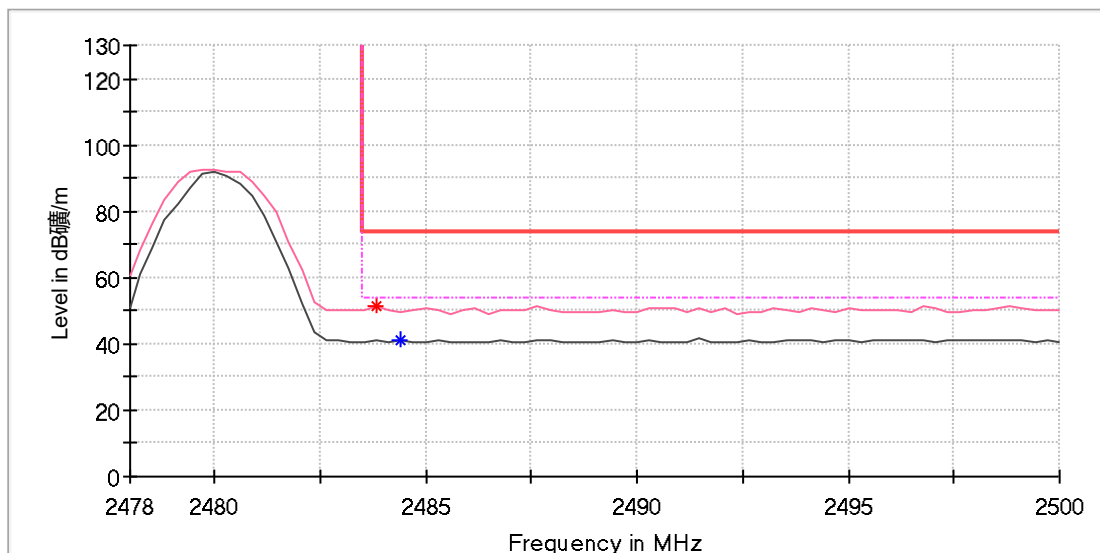

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.823529	51.59	---	74.00	22.41	150.0	V	0.0	9.0
2484.411765	---	41.08	54.00	12.92	150.0	V	46.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Information

EUT Name:	Dongle
Model:	UMA-ME00
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	A004135533-001
Test Voltage:	DC 5V
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

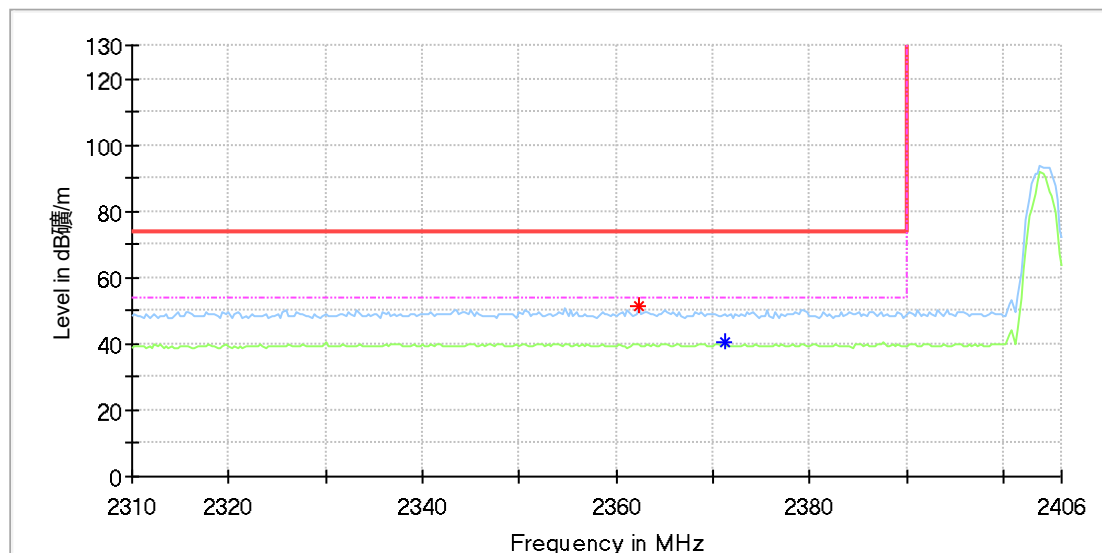

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2362.352941	51.36	---	74.00	22.64	150.0	H	301.0	8.5
2371.176471	---	40.21	54.00	13.79	150.0	H	127.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Information

EUT Name:	Dongle
Model:	UMA-ME00
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	A004135533-001
Test Voltage:	DC 5V
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

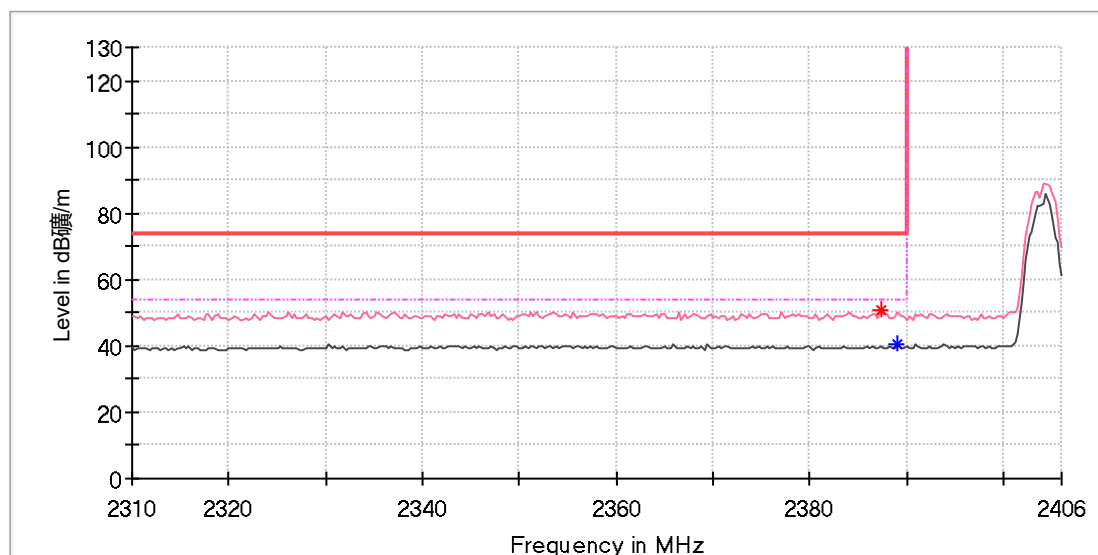

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2387.352941	50.88	---	74.00	23.12	150.0	V	23.0	8.5
2389.117647	---	40.24	54.00	13.76	150.0	V	296.0	8.5

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

Appendix B.8: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name: HONOR CHOICE YHEMI MouseBuds Pro
Order Number: P02155374
Model: UMA-ME00
Test Mode: Normal working with BT connecting
Test Voltage: AC 120V/60Hz
Standard: FCC PART 15
Test By./Review By: Charron Chen / Charlie Zha
Tem./Hum./Pressure: 24.0°C/49.3%/101kPa
Remark: SR 3

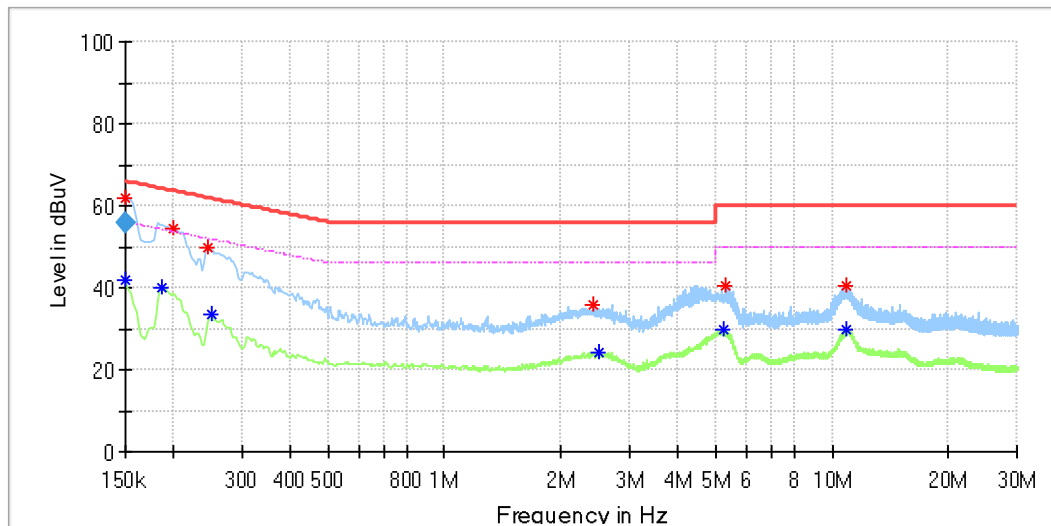

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.150	---	42.1	56.00	13.95	L1	9.5
0.150	62.1	---	66.00	3.92	L1	9.5
0.187	---	40.0	54.16	14.15	L1	9.7
0.200	54.6	---	63.62	9.02	L1	9.7
0.245	49.8	---	61.94	12.10	L1	9.7
0.250	---	33.4	51.77	18.42	L1	9.7
2.421	35.7	---	56.00	20.34	L1	9.6
2.491	---	24.2	46.00	21.80	L1	9.6
5.269	---	29.9	50.00	20.15	L1	9.8
5.284	40.3	---	60.00	19.73	L1	9.8
10.901	40.4	---	60.00	19.63	L1	9.9
10.926	---	29.6	50.00	20.45	L1	9.9

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150	55.7	---	66.00	10.31	1000.0	9.0	L1	9.5

EUT Information

EUT Name: HONOR CHOICE YHEMI MouseBuds Pro
Order Number: P02155374
Model: UMA-ME00
Test Mode: Normal working with BT connecting
Test Voltage: AC 120V/60Hz
Standard: FCC PART 15
Test By:/Review By: Charron Chen / Charlie Zha
Tem./Hum./Pressure: 24.0°C/49.3%/101kPa
Remark: SR 3

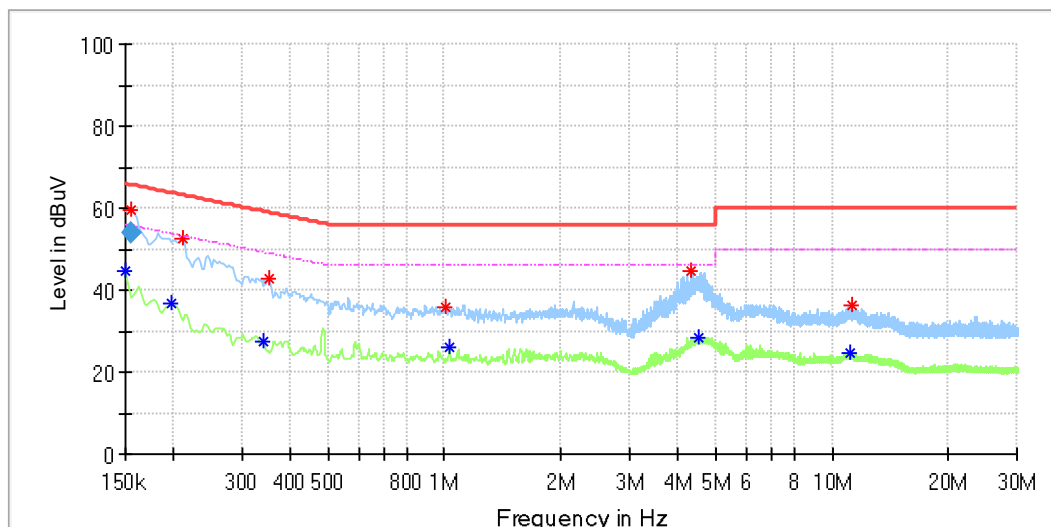

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.150	---	44.9	56.00	11.12	N	9.7
0.155	59.7	---	65.73	6.01	N	9.8
0.197	---	36.5	53.73	17.19	N	9.9
0.212	52.7	---	63.12	10.46	N	9.9
0.339	---	27.6	49.23	21.67	N	9.9
0.351	42.8	---	58.93	16.10	N	9.9
1.001	35.8	---	56.00	20.17	N	9.8
1.028	---	26.3	46.00	19.74	N	9.8
4.314	44.4	---	56.00	11.56	N	9.7
4.535	---	28.5	46.00	17.48	N	9.7
11.142	---	24.5	50.00	25.53	N	9.7
11.267	36.2	---	60.00	23.81	N	9.7

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155	53.9	---	65.73	11.85	1000.0	9.0	N	9.8