

## Appendix B: Test Results of Bluetooth LE

|                                                                                   |           |
|-----------------------------------------------------------------------------------|-----------|
| <b>APPENDIX B: TEST RESULTS OF BLUETOOTH LE .....</b>                             | <b>1</b>  |
| <b>APPENDIX B.1: TEST RESULTS OF 6DB BANDWIDTH.....</b>                           | <b>2</b>  |
| Test Result.....                                                                  | 2         |
| Test Graphs.....                                                                  | 3         |
| <b>APPENDIX B.2: TEST RESULTS OF 99% BANDWIDTH.....</b>                           | <b>5</b>  |
| Test Result.....                                                                  | 5         |
| Test Graphs.....                                                                  | 6         |
| <b>APPENDIX B.3: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY .....</b>       | <b>8</b>  |
| Test Result, Left earbud .....                                                    | 8         |
| Test Graphs, Left earbud.....                                                     | 9         |
| Test Result, Right earbud .....                                                   | 11        |
| Test Graphs, Right earbud .....                                                   | 12        |
| <b>APPENDIX B.4: TEST RESULTS OF BAND EDGE MEASUREMENTS.....</b>                  | <b>14</b> |
| Test Result.....                                                                  | 14        |
| <b>APPENDIX B.5: TEST RESULTS OF CONDUCTED SPURIOUS EMISSION.....</b>             | <b>15</b> |
| Test Result.....                                                                  | 15        |
| Test Graphs.....                                                                  | 16        |
| <b>APPENDIX B.6: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS .....</b>            | <b>20</b> |
| 30MHz - 1GHz, Left earbud.....                                                    | 20        |
| 1GHz - 18GHz, Left earbud.....                                                    | 22        |
| 30MHz - 1GHz, Right earbud .....                                                  | 34        |
| 1GHz - 18GHz, Right earbud .....                                                  | 36        |
| <b>APPENDIX B.7: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS .....</b> | <b>48</b> |
| For left earbud .....                                                             | 48        |
| For right earbud.....                                                             | 52        |
| <b>APPENDIX B.8: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....</b>          | <b>56</b> |

## Appendix B.1: Test Results of 6dB Bandwidth


### *Test Result*

Both left and right earbuds tested, only the worst-case reported.


| TestMode | Antenna | Channel | DTS BW [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|----------|---------|---------|--------------|---------|---------|------------|---------|
| BLE_1M   | Ant1    | 2402    | 0.66         | 2401.67 | 2402.33 | 0.5        | PASS    |
|          |         | 2440    | 0.66         | 2439.67 | 2440.33 | 0.5        | PASS    |
|          |         | 2480    | 0.66         | 2479.67 | 2480.32 | 0.5        | PASS    |

## Test Graphs


### BLE\_1M\_Ant1\_2402

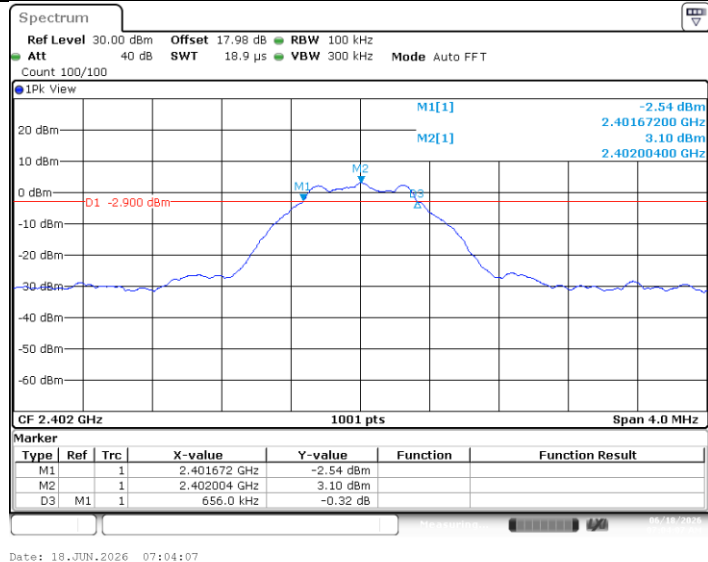

### BLE\_1M\_Ant1\_2440

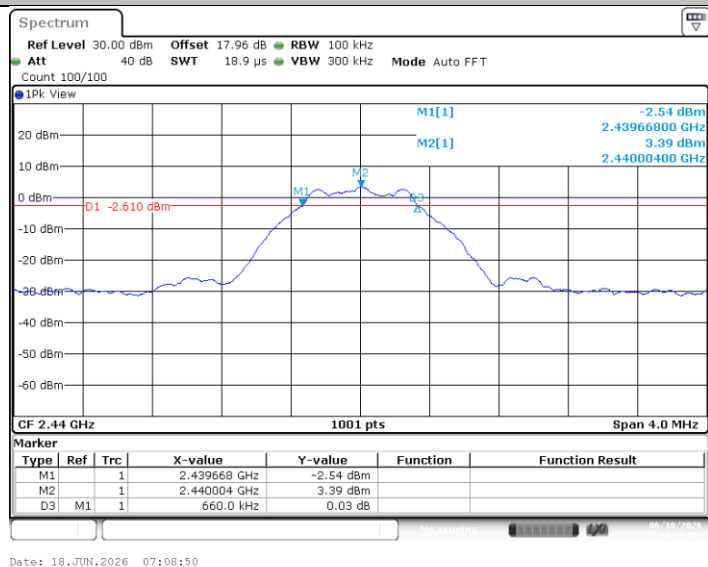

### BLE\_1M\_Ant1\_2480

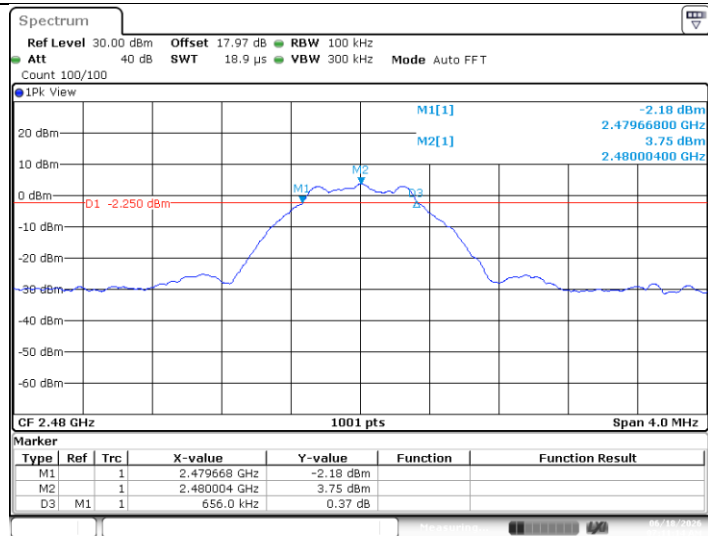

Date: 18.JUN.2026 07:11:14

## Appendix B.2: Test Results of 99% Bandwidth


### *Test Result*

Both left and right earbuds tested, only the worst-case reported.


| TestMode | Antenna | Channel | OCB [MHz] | FL[MHz]   | FH[MHz]   | Limit[MHz] | Verdict |
|----------|---------|---------|-----------|-----------|-----------|------------|---------|
| BLE_1M   | Ant1    | 2402    | 1.0509    | 2401.4845 | 2402.5355 | ---        | PASS    |
|          |         | 2440    | 1.0509    | 2439.4845 | 2440.5355 | ---        | PASS    |
|          |         | 2480    | 1.0470    | 2479.4845 | 2480.5315 | ---        | PASS    |

Test Graphs


BLE\_1M\_Ant1\_2402

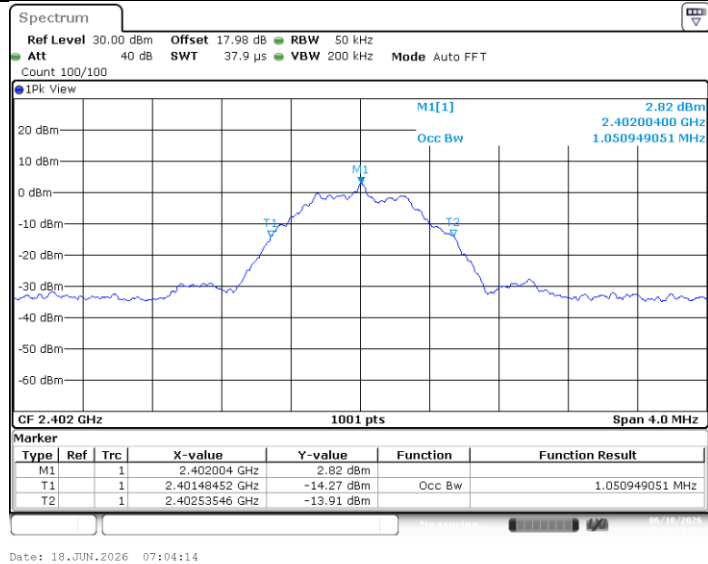

BLE\_1M\_Ant1\_2440

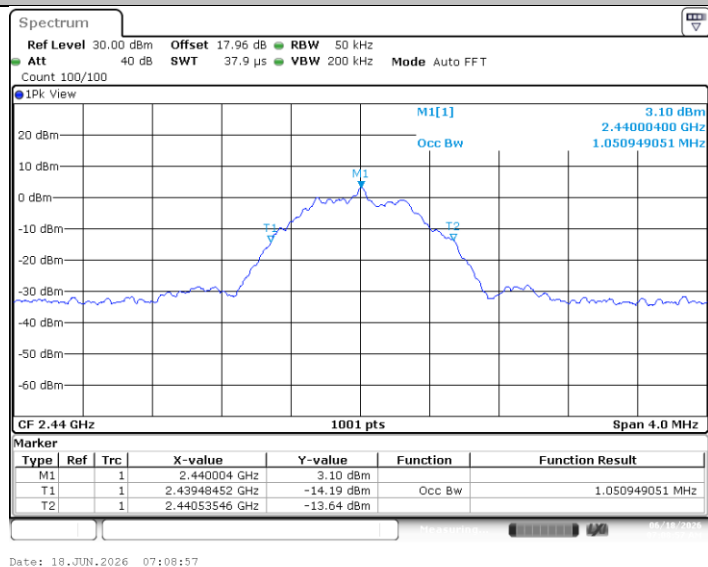

BLE\_1M\_Ant1\_2480

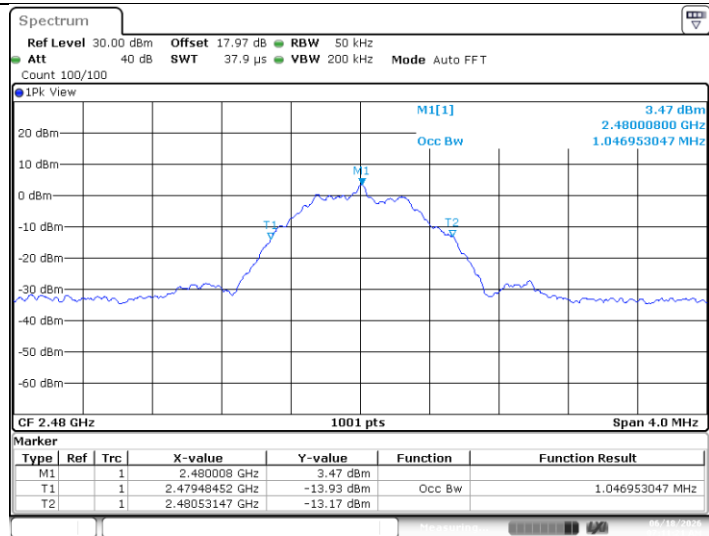

Date: 18.JUN.2026 07:11:22


### Appendix B.3: Test Results of Conducted Power Spectral Density

Test Result, Left earbud


| TestMode | Antenna | Channel | Result[dBm/3-100kHz] | Limit[dBm/3kHz] | Verdict |
|----------|---------|---------|----------------------|-----------------|---------|
| BLE_1M   | Ant1    | 2402    | -12.63               | ≤8.00           | PASS    |
|          |         | 2440    | -12.20               | ≤8.00           | PASS    |
|          |         | 2480    | -12.09               | ≤8.00           | PASS    |

Test Graphs, Left earbud


BLE\_1M\_Ant1\_2402

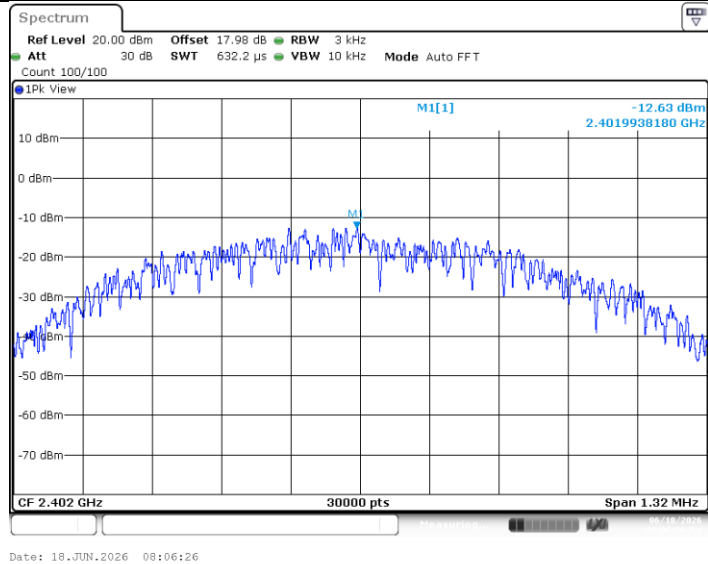

BLE\_1M\_Ant1\_2440

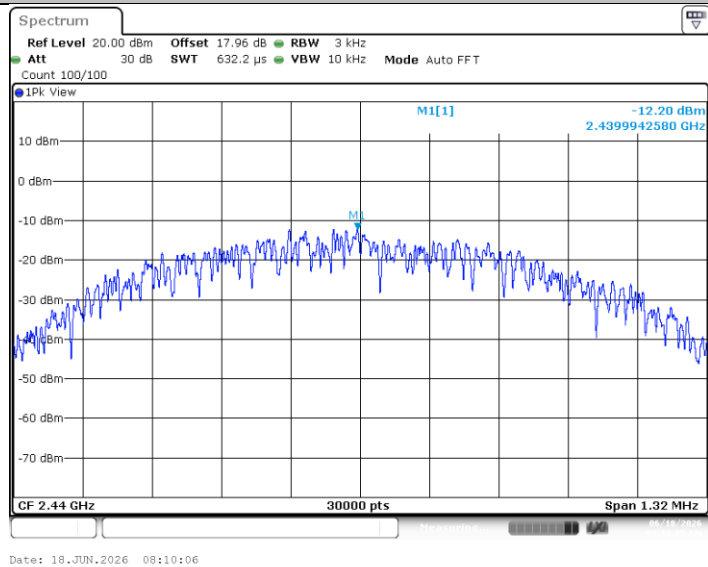

BLE\_1M\_Ant1\_2480

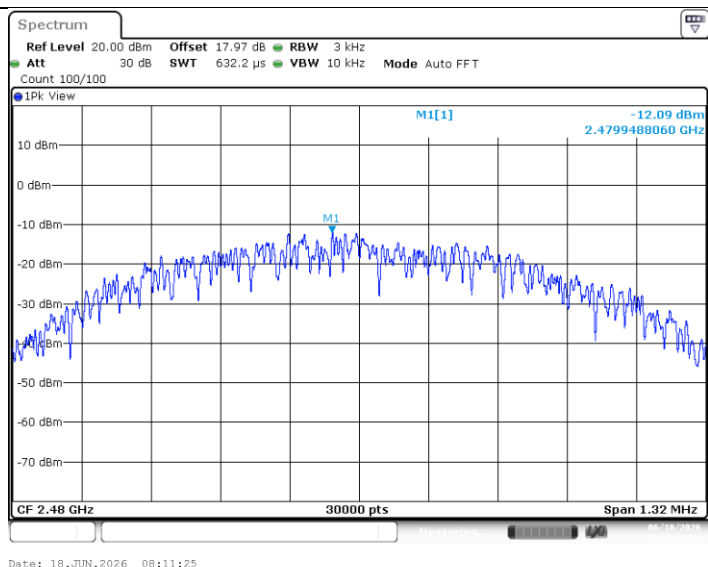


*Test Result, Right earbud*


| TestMode | Antenna | Channel | Result[dBm/3-100kHz] | Limit[dBm/3kHz] | Verdict |
|----------|---------|---------|----------------------|-----------------|---------|
| BLE_1M   | Ant1    | 2402    | -12.55               | ≤8.00           | PASS    |
|          |         | 2440    | -12.11               | ≤8.00           | PASS    |
|          |         | 2480    | -11.97               | ≤8.00           | PASS    |

Test Graphs, Right earbud


BLE\_1M\_Ant1\_2402

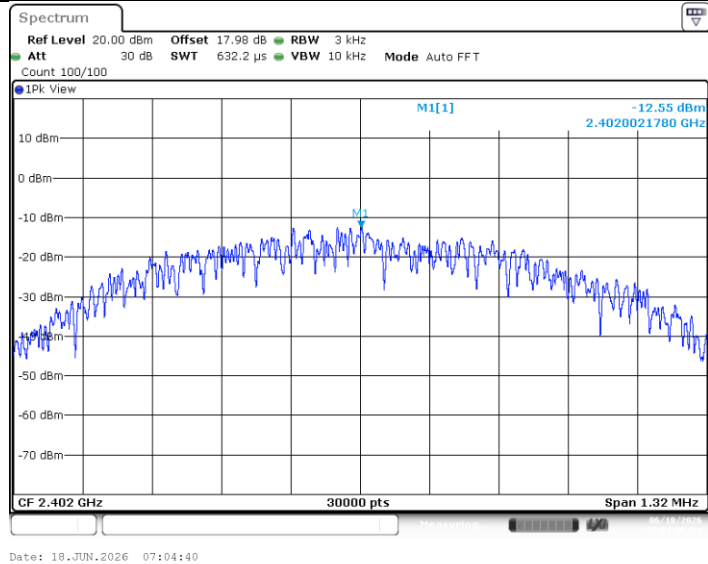

BLE\_1M\_Ant1\_2440

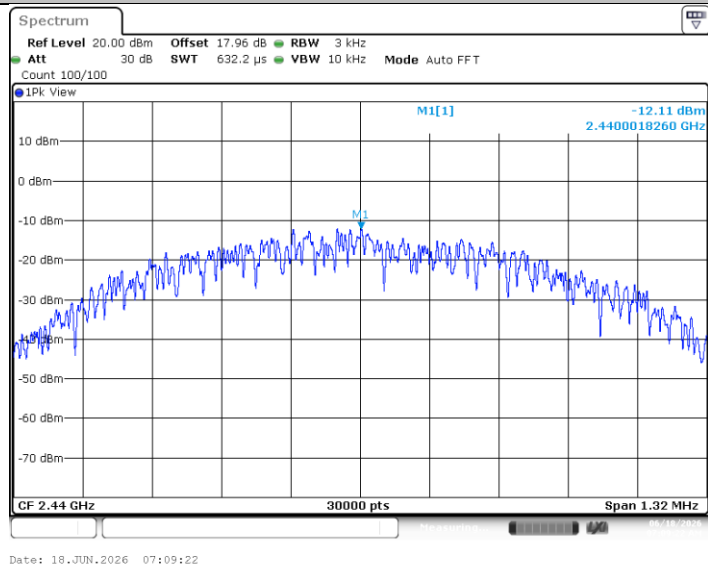

BLE\_1M\_Ant1\_2480

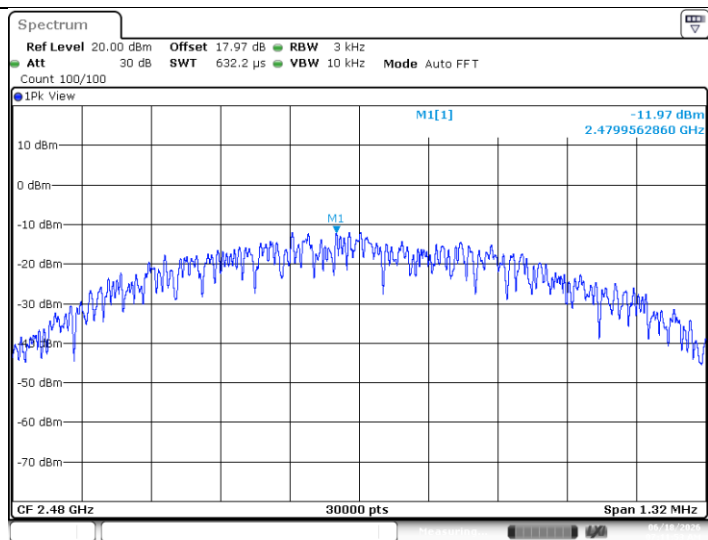


Date: 18.JUN.2026 07:11:54

## Appendix B.4: Test Results of Band Edge Measurements


### Test Result

Both left and right earbuds tested, only the worst-case reported.  
Low Channel

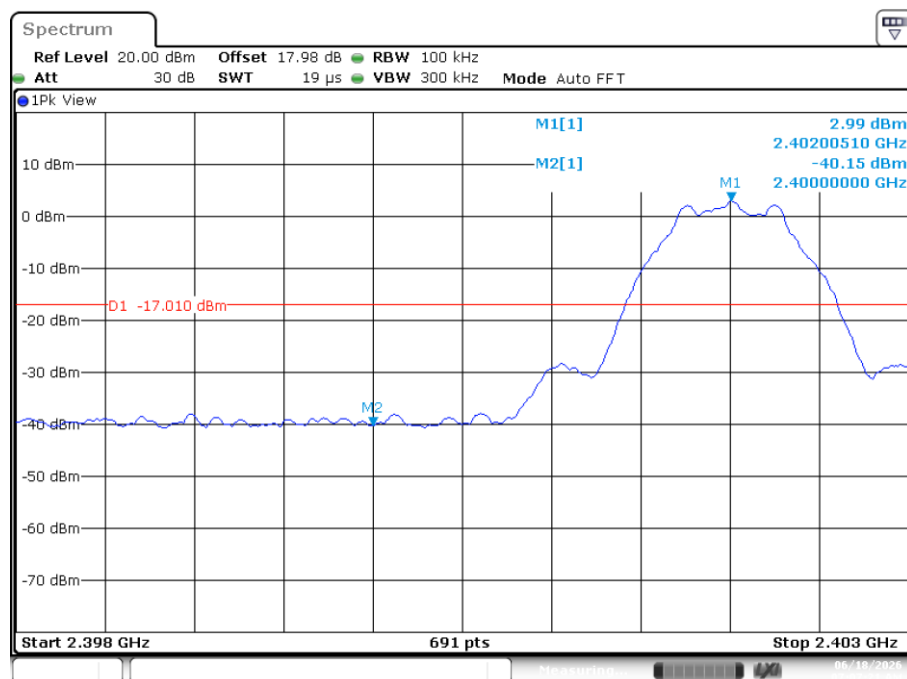

Date: 18.JUN.2026 07:07:21

### High Channel

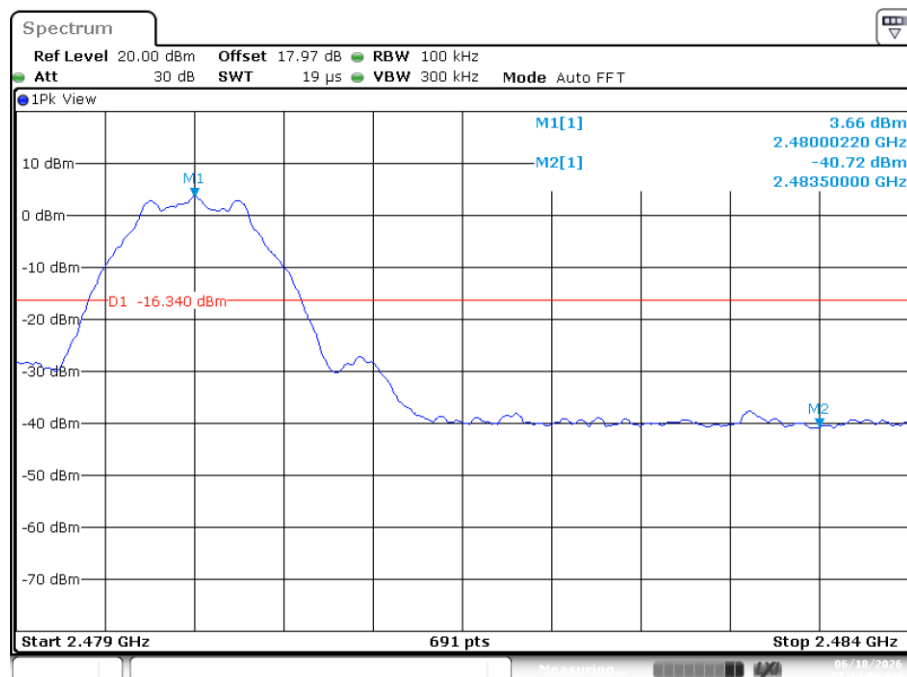

Date: 18.JUN.2026 07:14:01

## Appendix B.5: Test Results of Conducted Spurious Emission


### Test Result

Both left and right earbuds tested, only the worst-case reported.


| TestMode | Antenna | Channel | FreqRange [MHz] | RefLevel [dBm] | Result[dBm] | Limit[dBm] | Verdict |
|----------|---------|---------|-----------------|----------------|-------------|------------|---------|
| BLE_1M   | Ant1    | 2402    | Reference       | 3.06           | 3.06        | ---        | PASS    |
|          |         |         | 30~1000         | 3.06           | -48.38      | ≤-16.94    | PASS    |
|          |         |         | 1000~26500      | 3.06           | -42.93      | ≤-16.94    | PASS    |
|          |         | 2440    | Reference       | 3.39           | 3.39        | ---        | PASS    |
|          |         |         | 30~1000         | 3.39           | -48.66      | ≤-16.61    | PASS    |
|          |         |         | 1000~26500      | 3.39           | -42.69      | ≤-16.61    | PASS    |
|          |         | 2480    | Reference       | 3.68           | 3.68        | ---        | PASS    |
|          |         |         | 30~1000         | 3.68           | -48.78      | ≤-16.32    | PASS    |
|          |         |         | 1000~26500      | 3.68           | -43.16      | ≤-16.32    | PASS    |

Test Graphs


BLE\_1M\_Ant1\_2402\_0~Reference

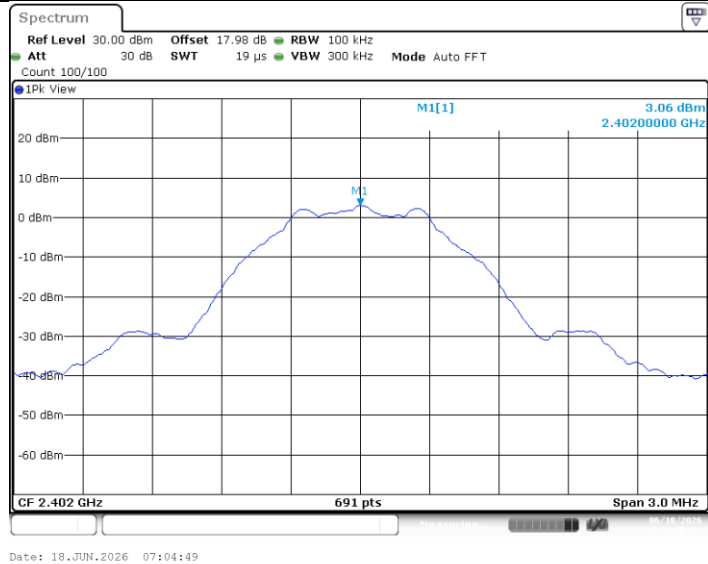


BLE\_1M\_Ant1\_2402\_30~1000

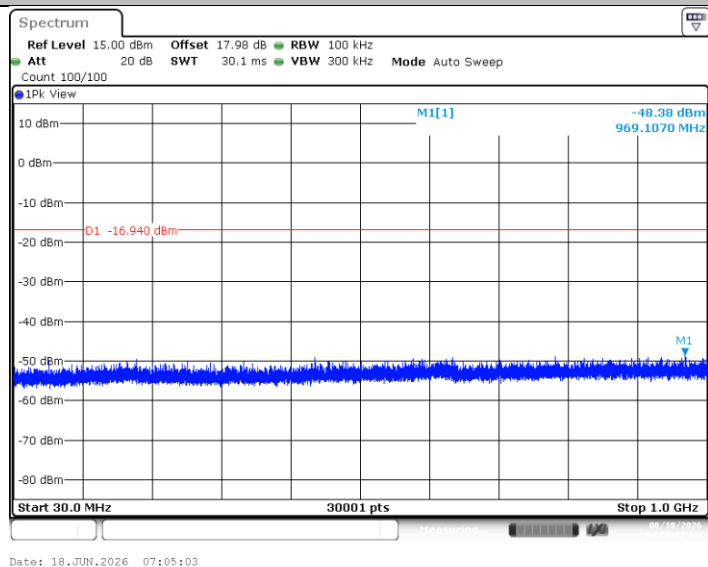


BLE\_1M\_Ant1\_2402\_1000~26500

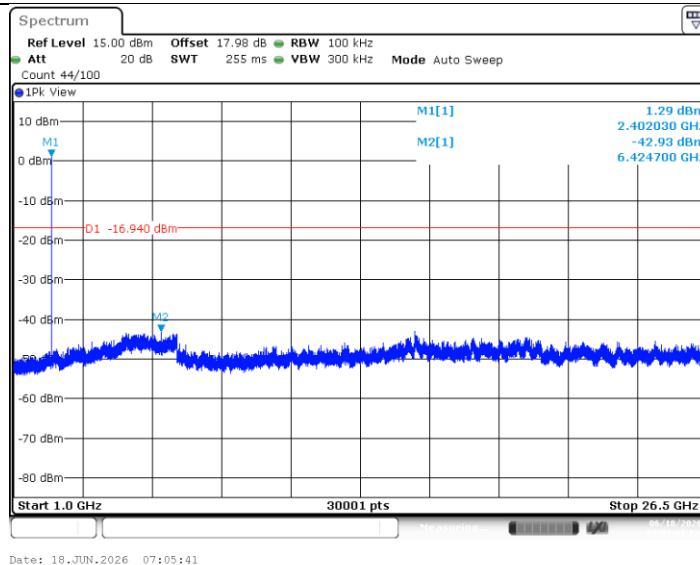


BLE\_1M\_Ant1\_2440\_0~Reference

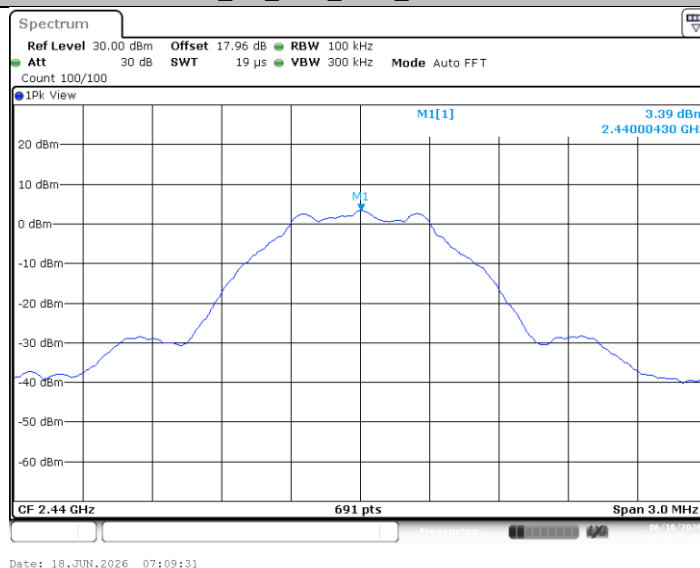

BLE\_1M\_Ant1\_2440\_30~1000

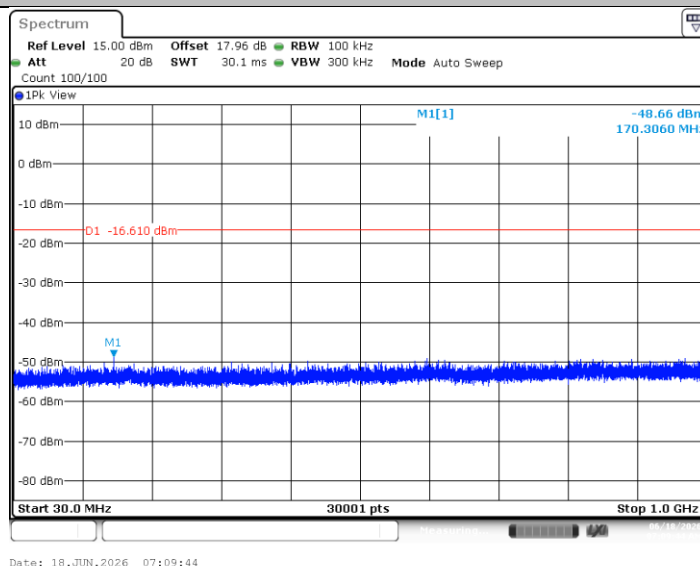


BLE\_1M\_Ant1\_2440\_1000~26500

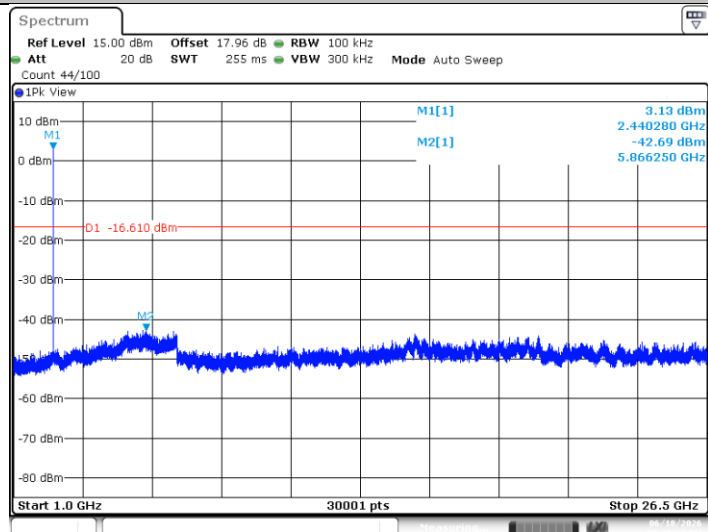


Date: 18.JUN.2026 07:10:23

BLE\_1M\_Ant1\_2480\_0~Reference

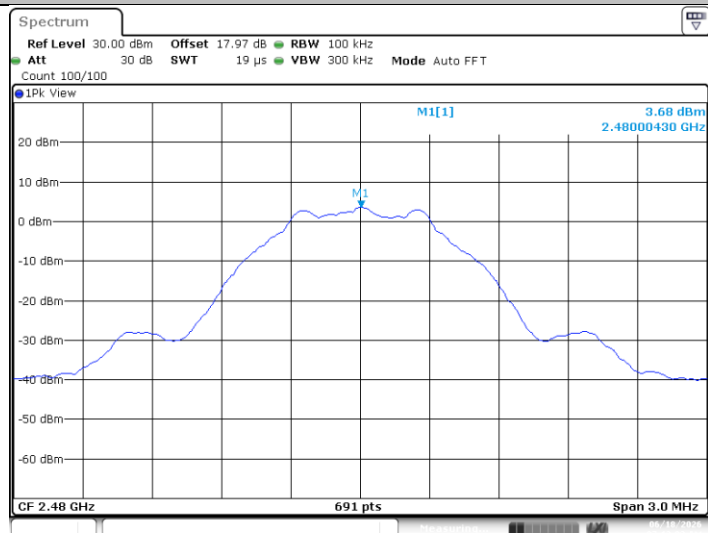


Date: 18.JUN.2026 07:12:02

BLE\_1M\_Ant1\_2480\_30~1000

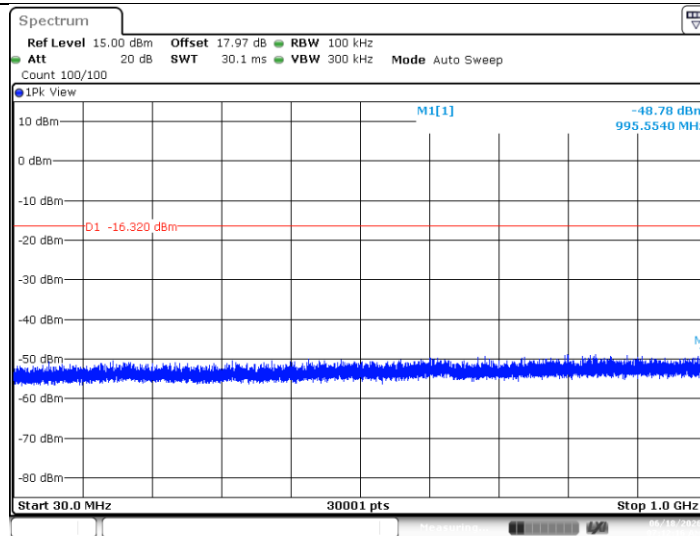

BLE\_1M\_Ant1\_2480\_1000~26500

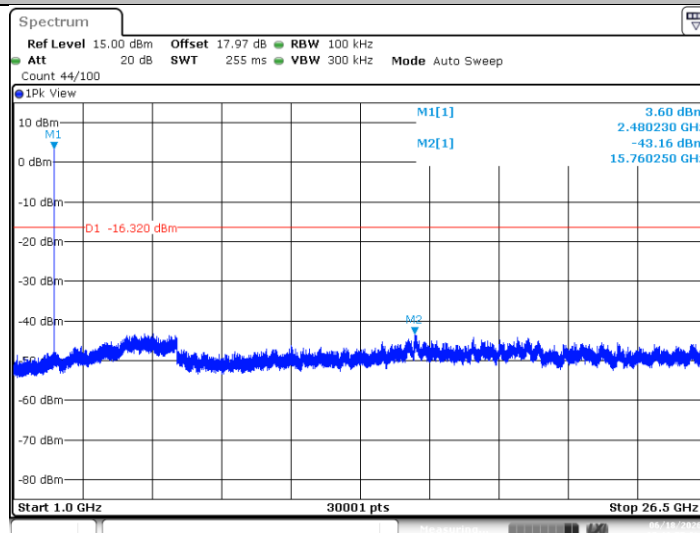

## Appendix B.6: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz, Left earbud

### EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_Mid channel   |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.8°C Humi:57% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

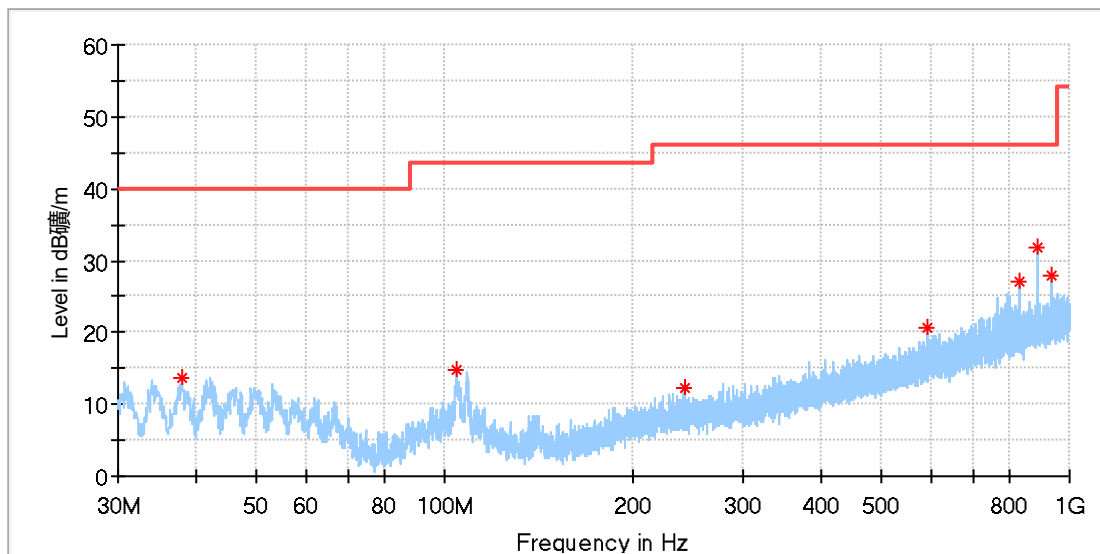

### Critical Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 37.975556       | 13.80            | 40.00          | 26.20       | 100.0       | H   | 303.0         | -20.8        |
| 104.474444      | 14.84            | 43.50          | 28.66       | 100.0       | H   | 98.0          | -18.9        |
| 242.214444      | 12.20            | 46.00          | 33.80       | 100.0       | H   | 115.0         | -17.6        |
| 593.731667      | 20.73            | 46.00          | 25.27       | 100.0       | H   | 303.0         | -9.8         |
| 831.004444      | 27.05            | 46.00          | 18.95       | 100.0       | H   | 15.0          | -5.6         |
| 890.982778      | 31.74            | 46.00          | 14.26       | 100.0       | H   | 89.0          | -4.9         |
| 936.950000      | 27.87            | 46.00          | 18.13       | 100.0       | H   | 140.0         | -4.4         |

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         | --- | ---           | ---          |

## EUT Information

EUT Name: Earbuds  
Model: UMA-ME00  
Test Mode: BLE 1M\_Mid channel  
Order No/Sample No: A004127313-002  
Test Voltage: Battery  
Remark: Temp 23.8°C Humi:57%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

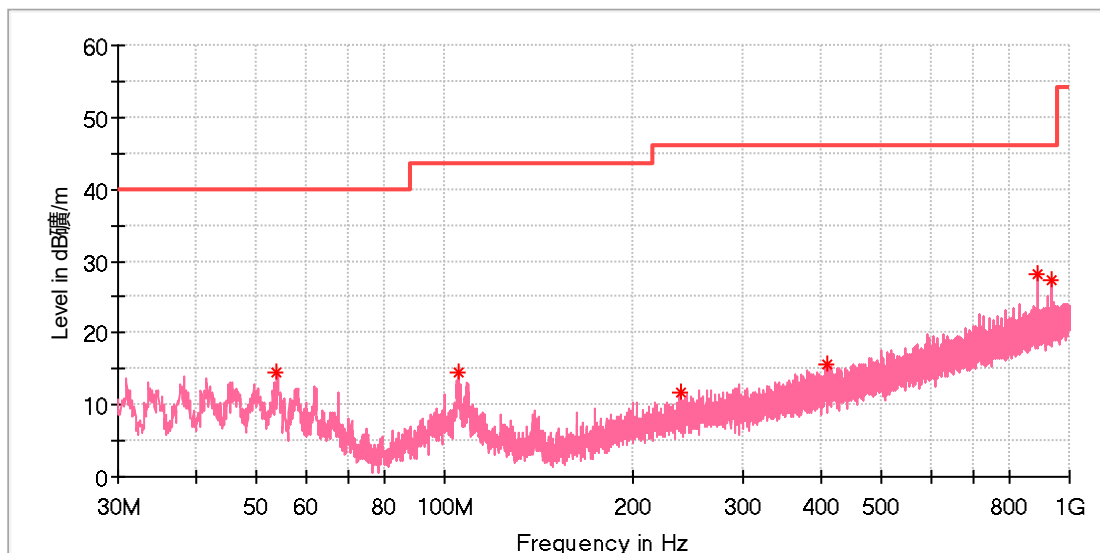

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 53.926667       | 14.43            | 40.00          | 25.57       | 100.0       | V   | 145.0         | -18.5        |
| 105.282778      | 14.47            | 43.50          | 29.03       | 100.0       | V   | 159.0         | -18.9        |
| 237.957222      | 11.64            | 46.00          | 34.36       | 100.0       | V   | 82.0          | -17.8        |
| 410.293889      | 15.59            | 46.00          | 30.41       | 100.0       | V   | 296.0         | -13.5        |
| 890.982778      | 28.14            | 46.00          | 17.86       | 100.0       | V   | 5.0           | -4.9         |
| 936.950000      | 27.31            | 46.00          | 18.69       | 100.0       | V   | 28.0          | -4.4         |

## Final\_Result


| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         |     | ---           | ---          |

1GHz - 18GHz, Left earbud

Note: The highest waveform in the figure is Bluetooth Fundamental.

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_Low channel   |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.8°C Humi:57% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

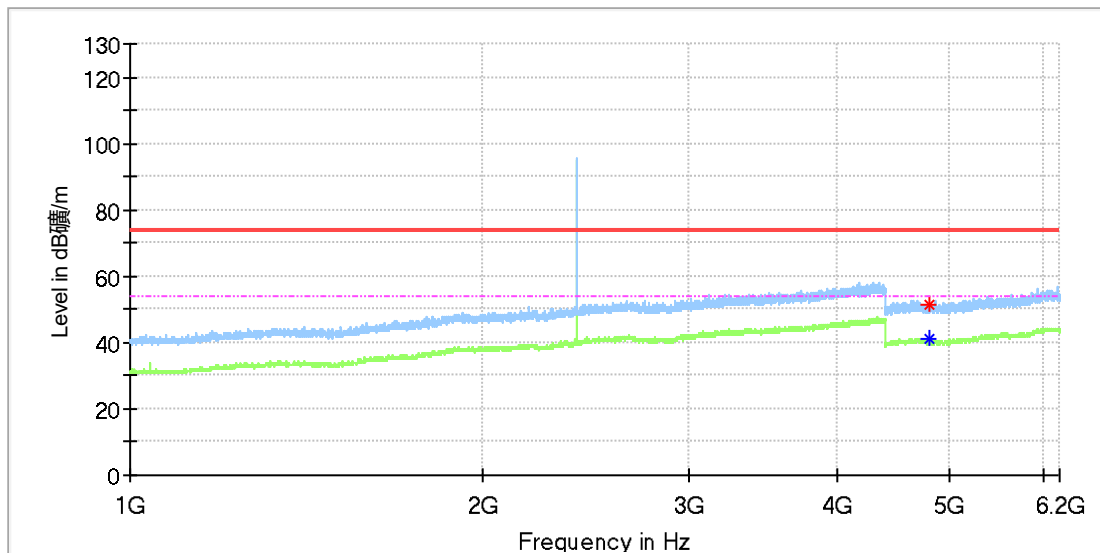

## Critical\_Freqs

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 4802.500000        | 51.17               | ---                 | 74.00             | 22.83          | 150.0          | H   | 204.0            | 13.3            |
| 4803.500000        | ---                 | 40.84               | 54.00             | 13.16          | 150.0          | H   | 212.0            | 13.3            |

## Final Result


| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |

## EUT Information



## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_Low channel   |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.8°C Humi:57% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

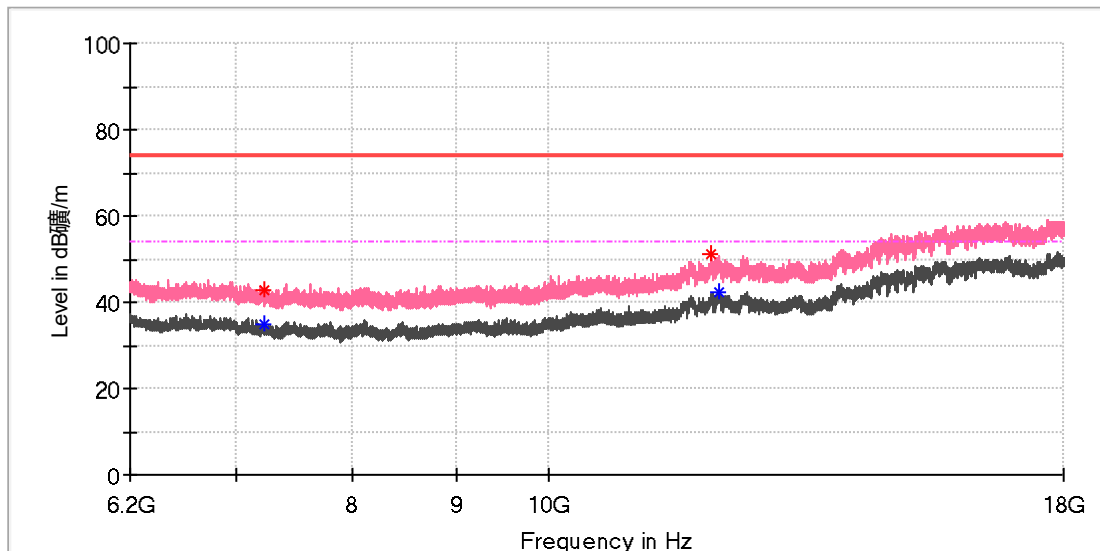

## Critical\_Freqs

| Frequency<br>(MHz) | MaxPeak<br>(dBµV/m) | Average<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 7222.666667        | 42.57               | ---                 | 74.00             | 31.43          | 150.0          | V   | 250.0            | 8.7             |
| 7223.650000        | ---                 | 34.84               | 54.00             | 19.16          | 150.0          | V   | 260.0            | 8.7             |
| 12048.866667       | 51.39               | ---                 | 74.00             | 22.61          | 150.0          | V   | 302.0            | 16.4            |
| 12147.691667       | ---                 | 42.33               | 54.00             | 11.67          | 150.0          | V   | 280.0            | 16.7            |


## Final Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ----            | ----             | ----             | ----           | ----        | ----        |     | ----          | ----         |

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_Mid channel   |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.8°C Humi:57% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

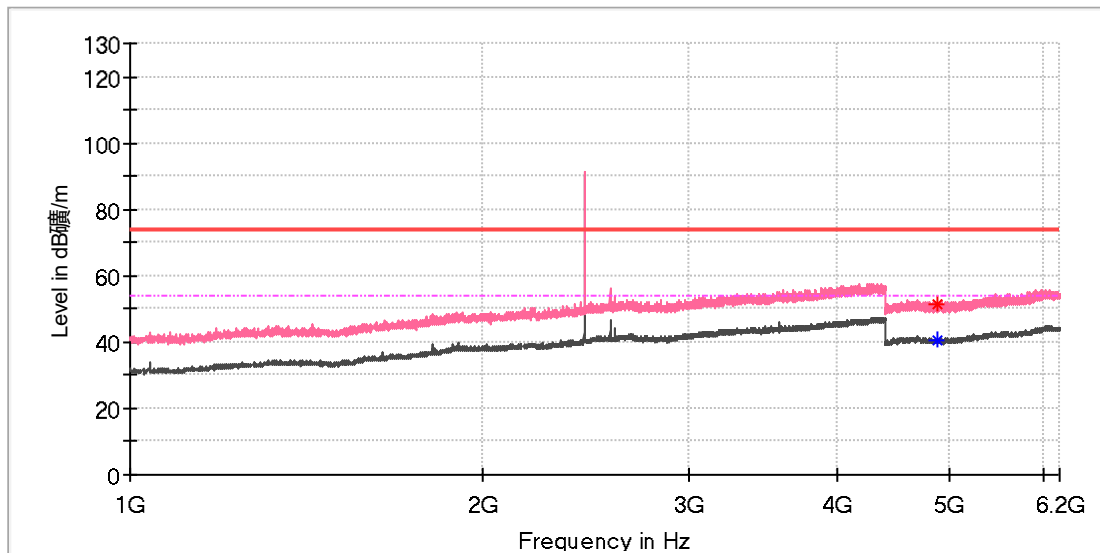

## Critical\_Freqs


| Frequency<br>(MHz) | MaxPeak<br>(dBµV/m) | Average<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 4877.500000        | 51.27               | ---                 | 74.00             | 22.73          | 150.0          | V   | 273.0            | 13.3            |
| 4880.000000        | ---                 | 40.42               | 54.00             | 13.58          | 150.0          | V   | 133.0            | 13.3            |

## Final\_Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_Mid channel   |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.8°C Humi:57% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

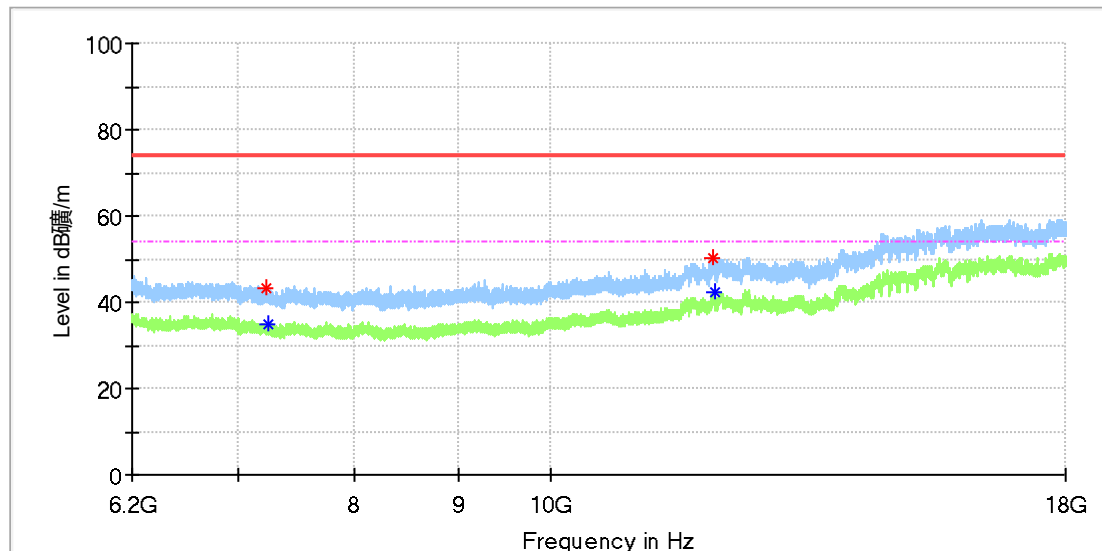

## Critical\_Freqs

| Frequency<br>(MHz) | MaxPeak<br>(dBµV/m) | Average<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 7227.583333        | 43.08               | ---                 | 74.00             | 30.92          | 150.0          | H   | 275.0            | 8.7             |
| 7238.891667        | ---                 | 34.87               | 54.00             | 19.13          | 150.0          | H   | 60.0             | 8.6             |
| 12022.316667       | 50.37               | ---                 | 74.00             | 23.63          | 150.0          | H   | 330.0            | 15.8            |
| 12050.833333       | ---                 | 42.51               | 54.00             | 11.49          | 150.0          | H   | 27.0             | 16.3            |

## Final Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |






| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 100.000000         | 100.000000          | 100.000000          | 100.000000        | 100.000000     | 100.000000     |     | 100.000000       |                 |

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_High channel  |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.8°C Humi:57% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

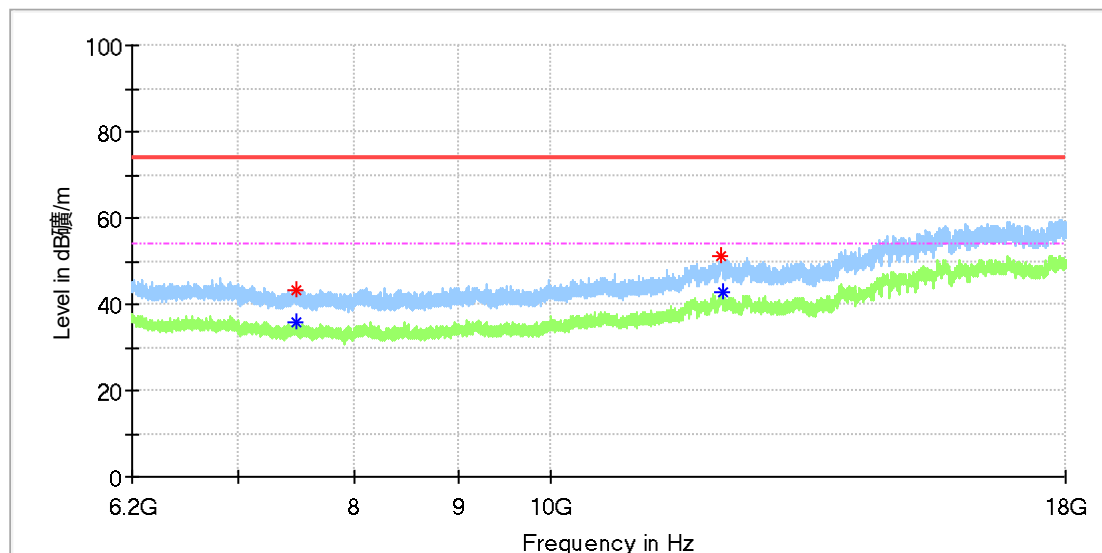

## Critical\_Freqs


| Frequency<br>(MHz) | MaxPeak<br>(dBµV/m) | Average<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 7470.466667        | ---                 | 35.73               | 54.00             | 18.27          | 150.0          | H   | 54.0             | 8.6             |
| 7478.333333        | 43.07               | ---                 | 74.00             | 30.93          | 150.0          | H   | 165.0            | 8.7             |
| 12138.350000       | 50.93               | ---                 | 74.00             | 23.07          | 150.0          | H   | 86.0             | 16.4            |
| 12160.475000       | ---                 | 42.79               | 54.00             | 11.21          | 150.0          | H   | 97.0             | 16.2            |

## Final\_Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_High channel  |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.8°C Humi:57% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

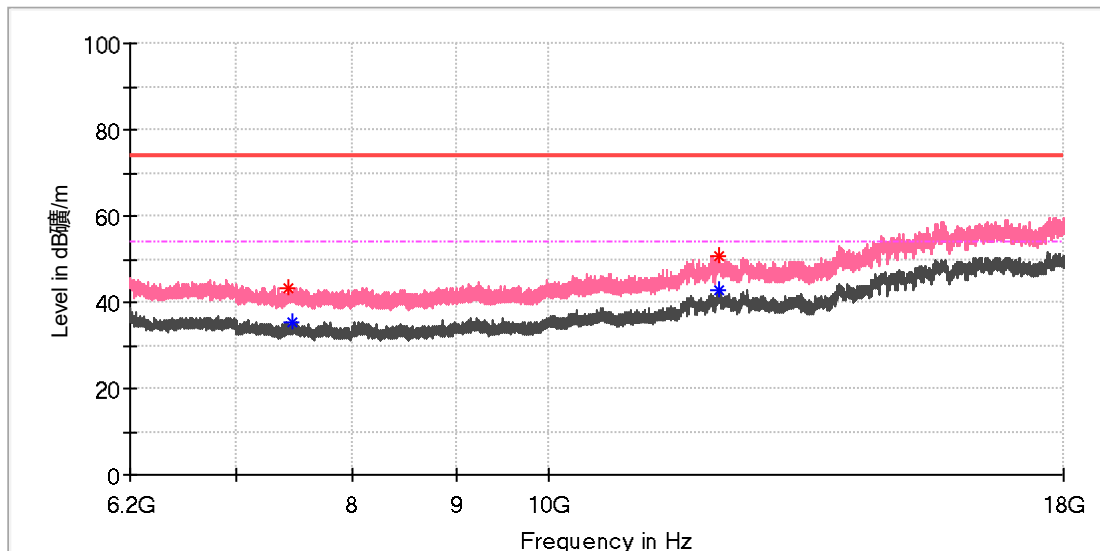

## Critical\_Freqs

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 7434.083333        | 43.44               | ---                 | 74.00             | 30.56          | 150.0          | V   | 336.0            | 8.4             |
| 7461.125000        | ---                 | 35.53               | 54.00             | 18.47          | 150.0          | V   | 217.0            | 8.5             |
| 12148.183333       | 50.67               | ---                 | 74.00             | 23.33          | 150.0          | V   | 272.0            | 16.7            |
| 12154.083333       | ---                 | 42.77               | 54.00             | 11.23          | 150.0          | V   | 173.0            | 16.5            |


## Final Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |

30MHz - 1GHz, Right earbud

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_Mid channel   |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.5°C Humi:54% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

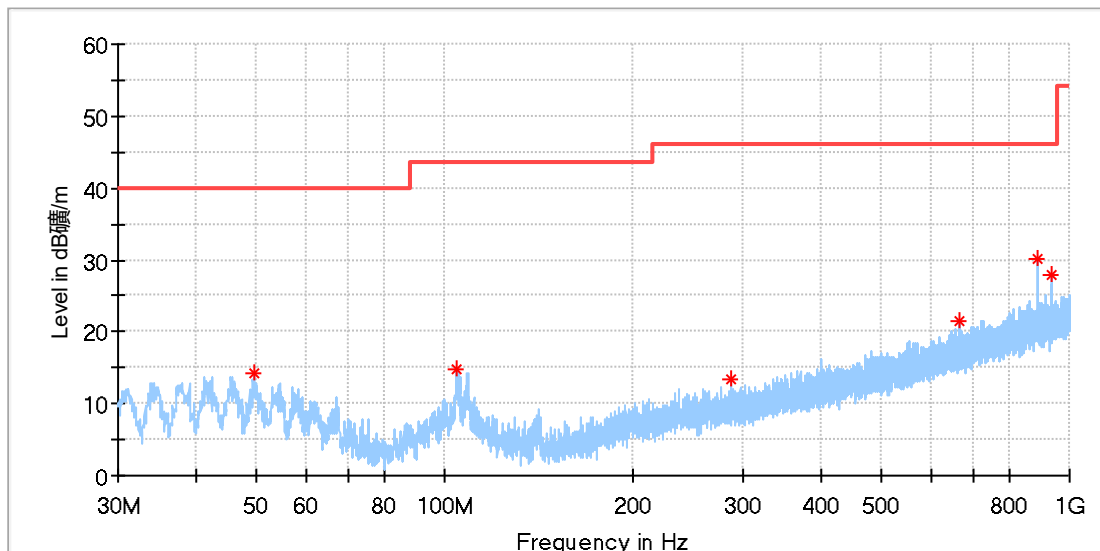

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 49.615556       | 14.12            | 40.00          | 25.88       | 100.0       | H   | 150.0         | -18.4        |
| 104.690000      | 14.69            | 43.50          | 28.81       | 100.0       | H   | 229.0         | -18.9        |
| 287.050000      | 13.30            | 46.00          | 32.70       | 100.0       | H   | 61.0          | -16.6        |
| 666.912778      | 21.43            | 46.00          | 24.57       | 100.0       | H   | 352.0         | -8.6         |
| 890.982778      | 30.08            | 46.00          | 15.92       | 100.0       | H   | 189.0         | -4.9         |
| 936.950000      | 27.98            | 46.00          | 18.02       | 100.0       | H   | 13.0          | -4.4         |

## Final\_Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: Earbuds  
Model: UMA-ME00  
Test Mode: BLE 1M\_Mid channel  
Order No/Sample No: A004127313-002  
Test Voltage: Battery  
Remark: Temp 23.5°C Humi:54%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

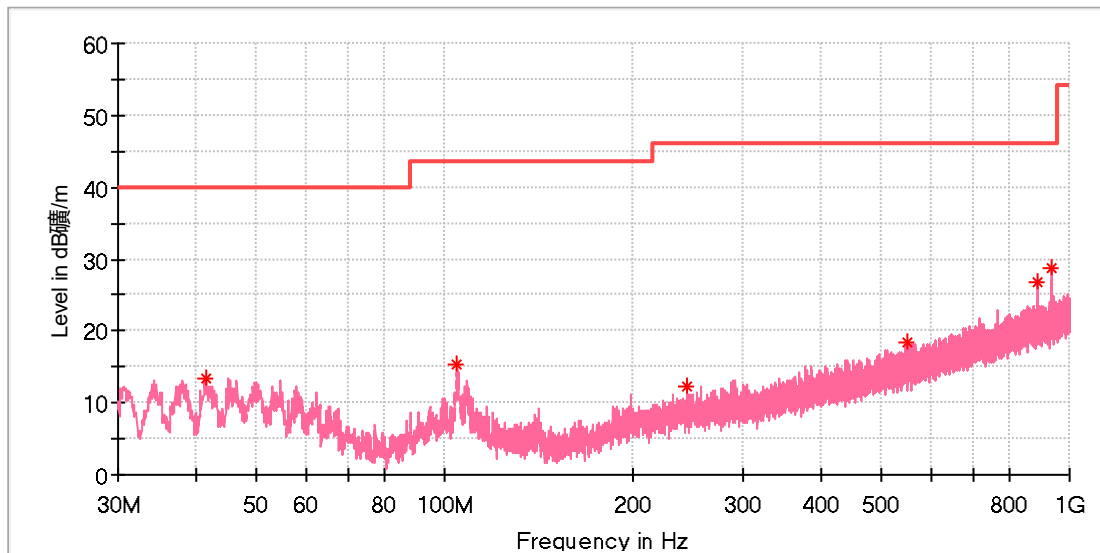

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 41.532222       | 13.36            | 40.00          | 26.64       | 100.0       | V   | 241.0         | -19.8        |
| 104.797778      | 15.38            | 43.50          | 28.12       | 100.0       | V   | 109.0         | -18.9        |
| 244.747222      | 12.39            | 46.00          | 33.61       | 100.0       | V   | 241.0         | -17.5        |
| 551.267222      | 18.40            | 46.00          | 27.60       | 100.0       | V   | 0.0           | -10.8        |
| 891.036667      | 26.67            | 46.00          | 19.33       | 100.0       | V   | 313.0         | -4.9         |
| 936.950000      | 28.77            | 46.00          | 17.23       | 100.0       | V   | 0.0           | -4.4         |


## Final\_Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         |     | ---           | ---          |

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_Low channel   |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.5°C Humi:54% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

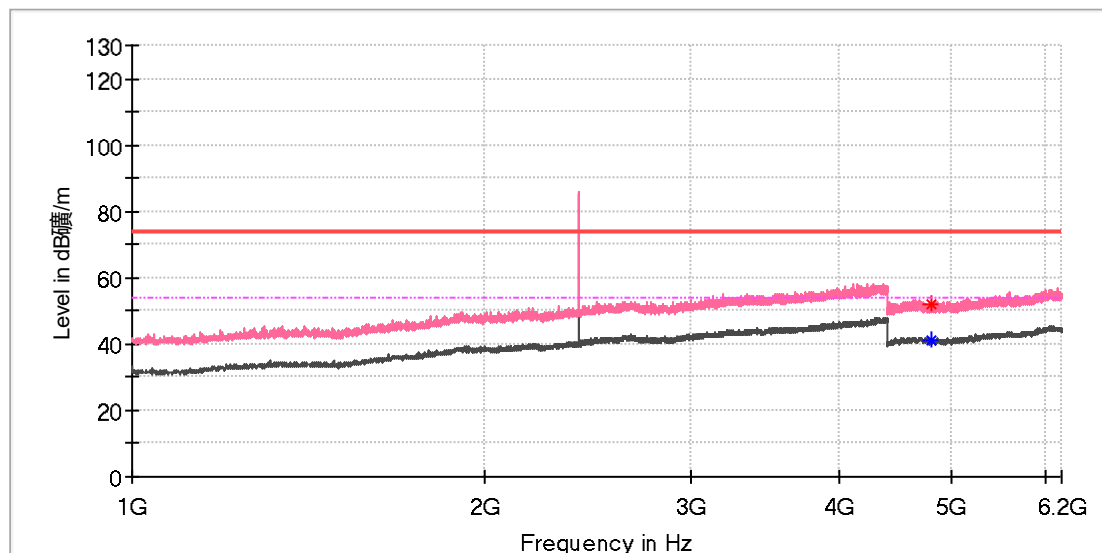

## Critical\_Freqs


| Frequency<br>(MHz) | MaxPeak<br>(dBµV/m) | Average<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 4802.500000        | 52.13               | ---                 | 74.00             | 21.87          | 150.0          | V   | 256.0            | 13.3            |
| 4803.500000        | ---                 | 41.25               | 54.00             | 12.75          | 150.0          | V   | 220.0            | 13.3            |

## Final Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ----               | ----                | ----                | ----              | ----           | ----           |     | ----             |                 |

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_Low channel   |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.5°C Humi:54% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

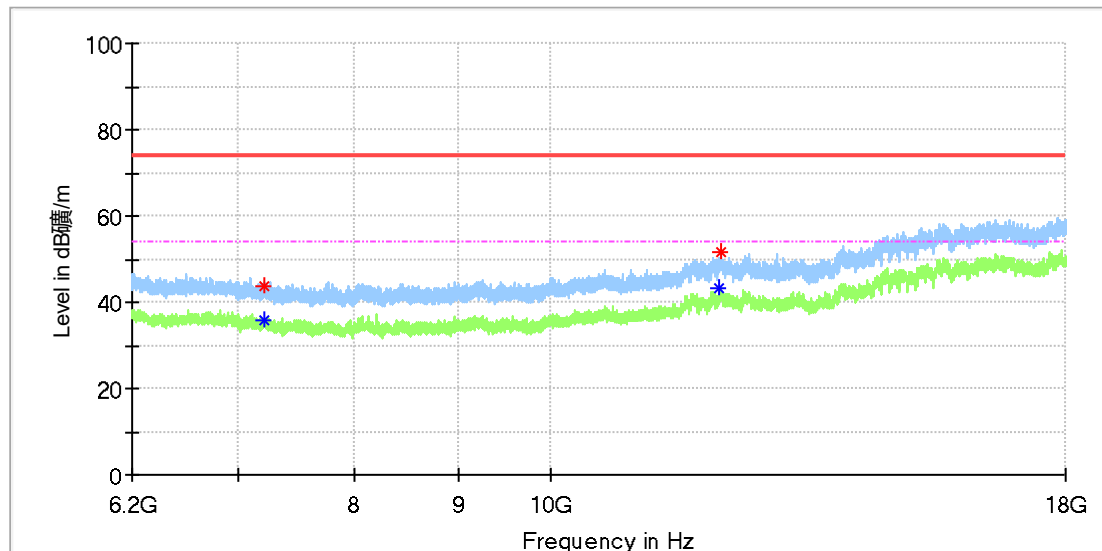

## Critical\_Freqs


| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 7204.475000        | 43.61               | ---                 | 74.00             | 30.39          | 150.0          | H   | 347.0            | 8.8             |
| 7204.966667        | ---                 | 35.92               | 54.00             | 18.08          | 150.0          | H   | 356.0            | 8.8             |
| 12122.616667       | ---                 | 43.28               | 54.00             | 10.72          | 150.0          | H   | 148.0            | 16.0            |
| 12151.133333       | 51.85               | ---                 | 74.00             | 22.15          | 150.0          | H   | 137.0            | 16.7            |

## Final Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_Low channel   |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.5°C Humi:54% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

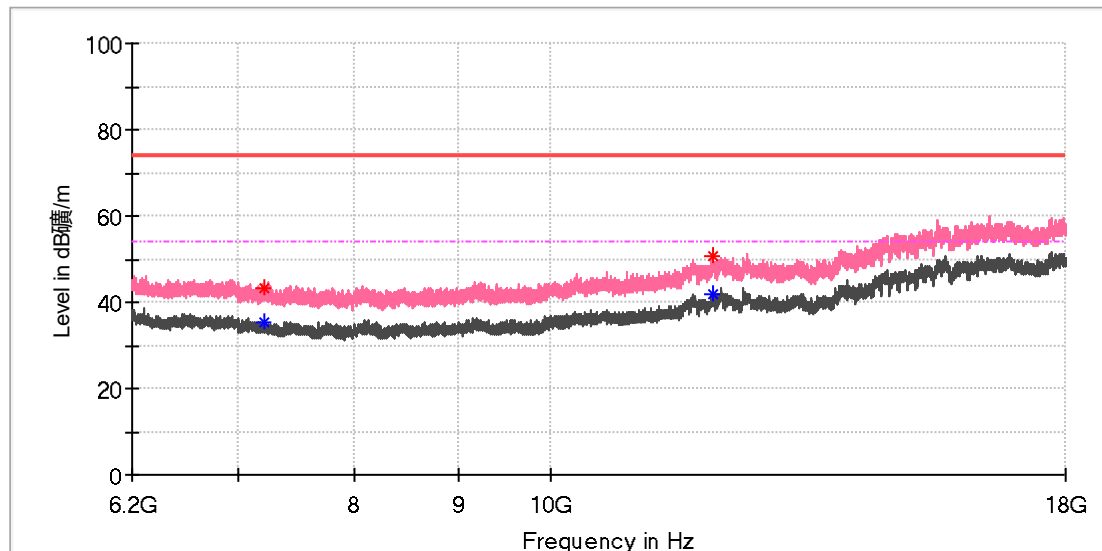

## Critical\_Freqs

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 7205.950000        | ---                 | 35.31               | 54.00             | 18.69          | 150.0          | V   | 76.0             | 8.8             |
| 7208.900000        | 43.31               | ---                 | 74.00             | 30.69          | 150.0          | V   | 0.0              | 8.8             |
| 12036.575000       | 50.59               | ---                 | 74.00             | 23.41          | 150.0          | V   | 2.0              | 16.1            |
| 12041.491667       | ---                 | 41.81               | 54.00             | 12.19          | 150.0          | V   | 139.0            | 16.2            |

## Final Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |


| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |

## EUT Information

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_Mid channel   |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.5°C Humi:54% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

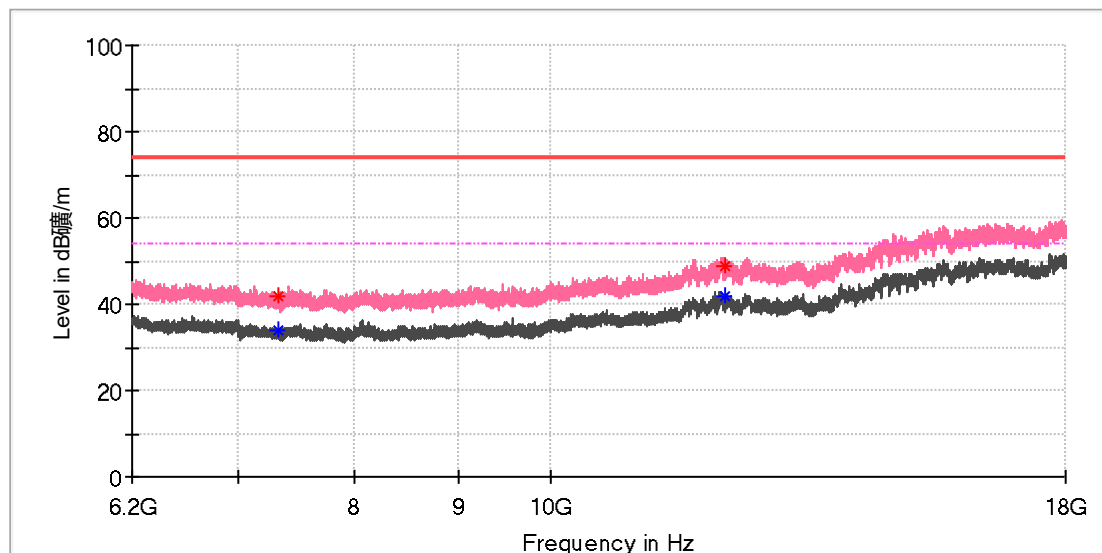

## Critical\_Freqs

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 7323.950000        | ---                 | 33.83               | 54.00             | 20.17          | 150.0          | V   | 341.0            | 8.2             |
| 7323.950000        | 42.04               | ---                 | 74.00             | 31.96          | 150.0          | V   | 341.0            | 8.2             |
| 12212.100000       | 48.93               | ---                 | 74.00             | 25.07          | 150.0          | V   | 37.0             | 15.8            |
| 12215.050000       | ---                 | 41.88               | 54.00             | 12.12          | 150.0          | V   | 0.0              | 15.8            |

## Final Result


| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |

## EUT Information



## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_High channel  |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.5°C Humi:54% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

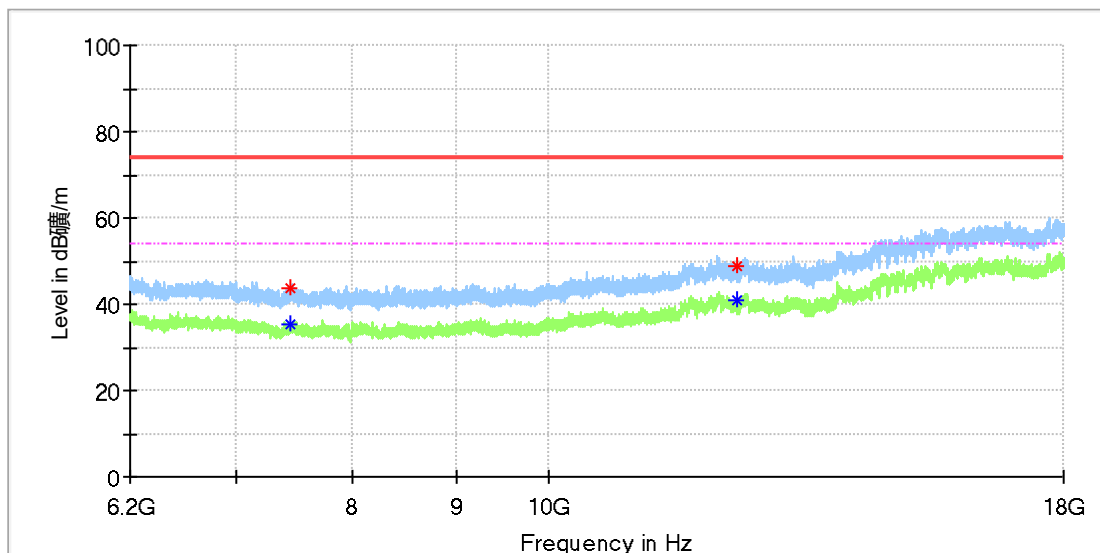

## Critical\_Freqs


| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 7439.491667        | 43.75               | ---                 | 74.00             | 30.26          | 150.0          | H   | 327.0            | 8.4             |
| 7439.983333        | ---                 | 35.30               | 54.00             | 18.70          | 150.0          | H   | 124.0            | 8.4             |
| 12393.525000       | 48.85               | ---                 | 74.00             | 25.15          | 150.0          | H   | 170.0            | 15.4            |
| 12404.833333       | ---                 | 40.91               | 54.00             | 13.09          | 150.0          | H   | 304.0            | 15.3            |

## Final Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_High channel  |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.5°C Humi:54% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

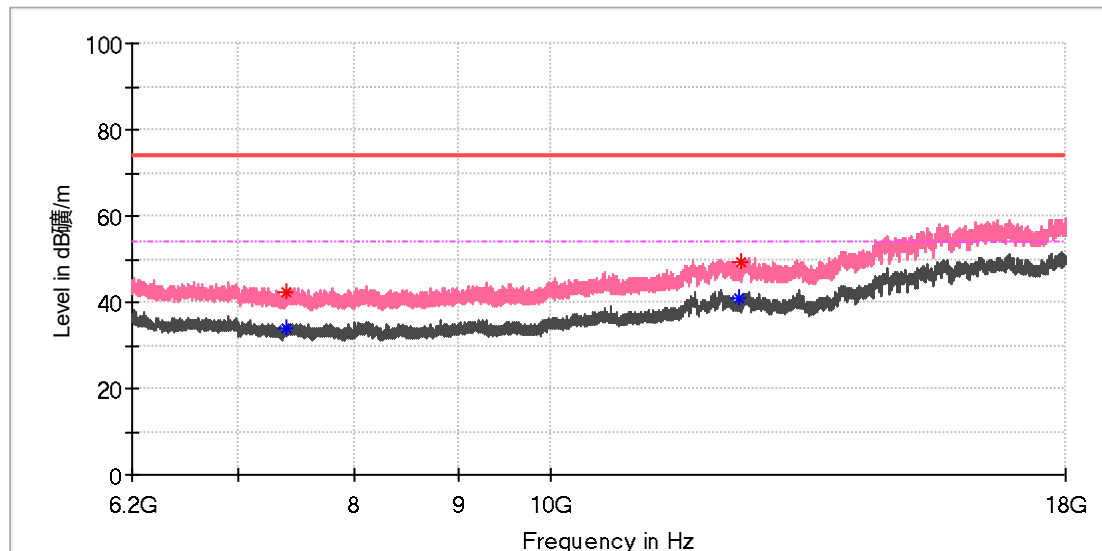

## Critical\_Freqs

| Frequency<br>(MHz) | MaxPeak<br>(dBµV/m) | Average<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 7394.258333        | 42.42               | ---                 | 74.00             | 31.58          | 150.0          | V   | 4.0              | 8.3             |
| 7399.175000        | ---                 | 34.14               | 54.00             | 19.86          | 150.0          | V   | 245.0            | 8.3             |
| 12394.016667       | ---                 | 40.91               | 54.00             | 13.09          | 150.0          | V   | 36.0             | 15.4            |
| 12421.058333       | 49.14               | ---                 | 74.00             | 24.86          | 150.0          | V   | 80.0             | 14.9            |

## Final Result


| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |

## Appendix B.7: Test Results of Radiated Emissions in Restricted Bands

*For left earbud*

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_Low channel   |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.8°C Humi:57% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

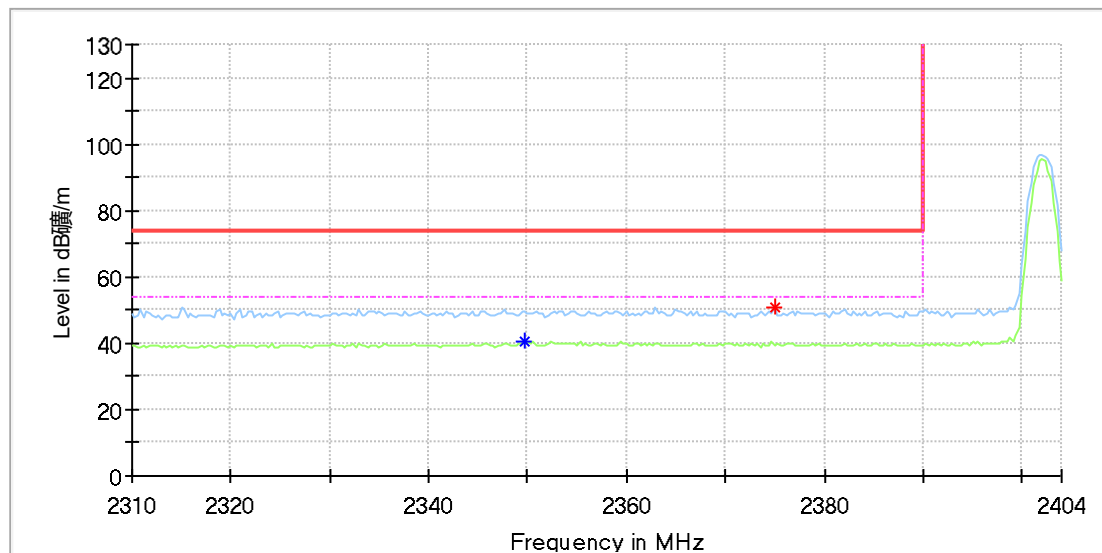

## Critical\_Freqs


| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 2349.705882        | ---                 | 40.28               | 54.00             | 13.72          | 150.0          | H   | 246.0            | 8.5             |
| 2375.000000        | 50.78               | ---                 | 74.00             | 23.22          | 150.0          | H   | 188.0            | 8.5             |

## Final Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_Low channel   |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.8°C Humi:57% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

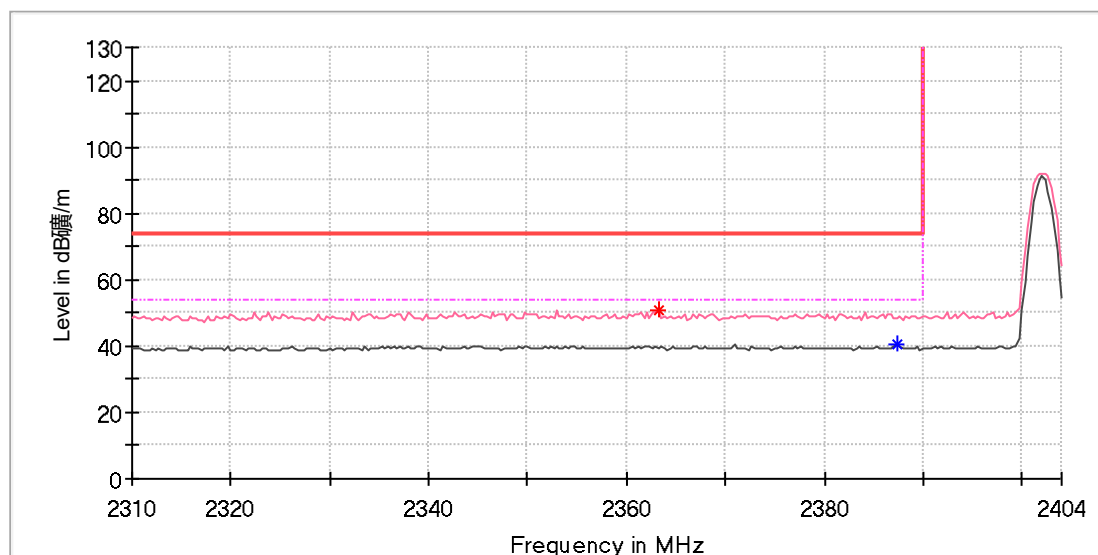

## Critical\_Freqs


| Frequency<br>(MHz) | MaxPeak<br>(dBµV/m) | Average<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 2363.235294        | 50.88               | ---                 | 74.00             | 23.12          | 150.0          | V   | 57.0             | 8.5             |
| 2387.352941        | ---                 | 40.36               | 54.00             | 13.64          | 150.0          | V   | 341.0            | 8.5             |

## Final Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---            |

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_High channel  |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.8°C Humi:57% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

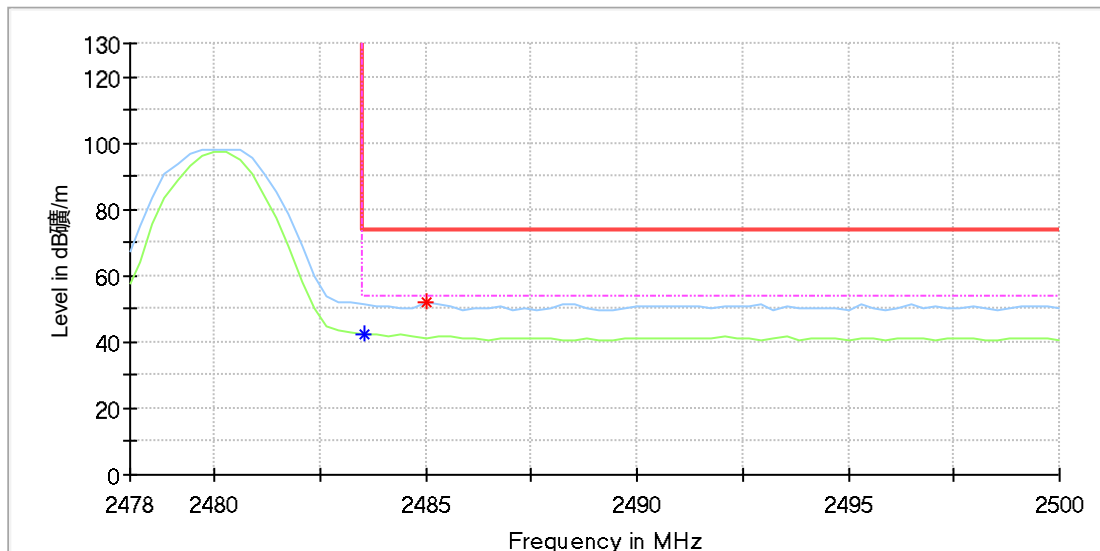

## Critical\_Freqs


| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 2483.529412        | ---                 | 42.45               | 54.00             | 11.55          | 150.0          | H   | 117.0            | 9.0             |
| 2485.000000        | 52.13               | ---                 | 74.00             | 21.87          | 150.0          | H   | 272.0            | 9.0             |

## Final Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ----               | ----                | ----                | ----              | ----           | ----           |     | ----             |                 |

## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_High channel  |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.8°C Humi:57% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

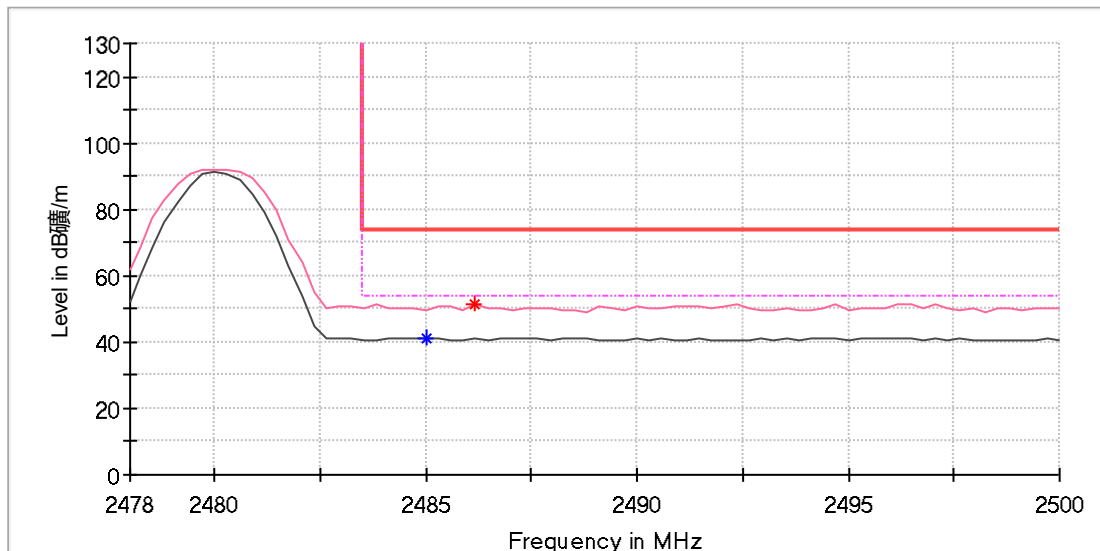

## Critical\_Freqs

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 2485.000000        | ---                 | 41.36               | 54.00             | 12.64          | 150.0          | V   | 211.0            | 9.0             |
| 2486.176471        | 51.52               | ---                 | 74.00             | 22.48          | 150.0          | V   | 256.0            | 9.0             |

## Final Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 93.7               | 122.5               | 122.5               | 122.5             | 0.0            | 100.0          | 0   | 0                | 0               |


| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 100.00             | 100.00              | 100.00              | 100.00            | 100.00         | 100.00         |     | 100.00           | 100.00          |

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ---                | ---                 | ---                 | ---               | ---            | ---            |     | ---              | ---             |



## EUT Information

|                     |                      |
|---------------------|----------------------|
| EUT Name:           | Earbuds              |
| Model:              | UMA-ME00             |
| Test Mode:          | BLE 1M_High channel  |
| Order No/Sample No: | A004127313-002       |
| Test Voltage:       | Battery              |
| Remark:             | Temp 23.5°C Humi:54% |
| Test Standard:      | FCC 15.247           |
| Tested By:          | Kei Zhang            |
| Reviewed By:        | Terry Yin            |

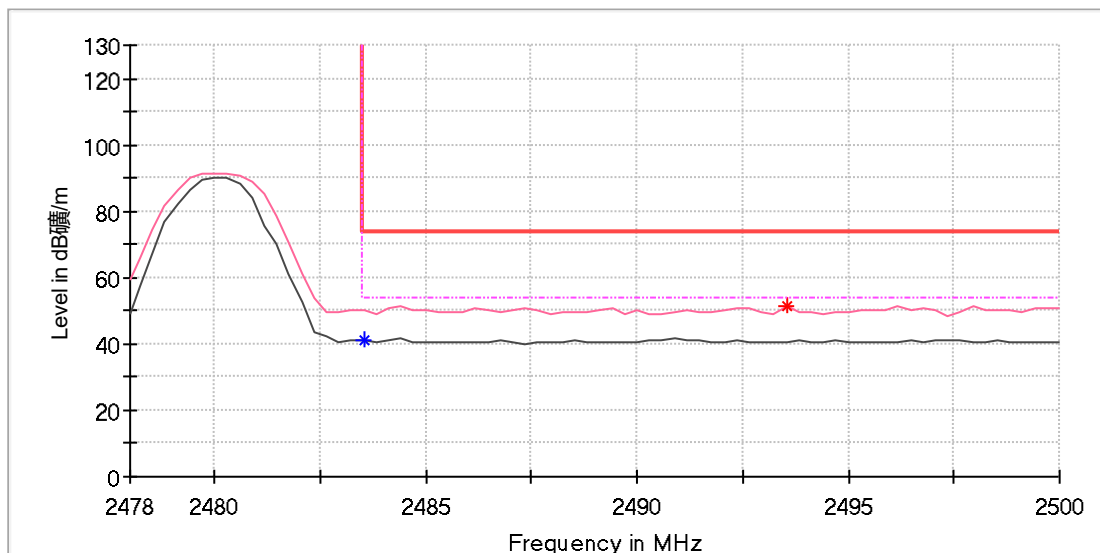

## Critical\_Freqs

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| 2483.529412        | ---                 | 41.04               | 54.00             | 12.96          | 150.0          | V   | 0.0              | 9.0             |
| 2493.529412        | 51.45               | ---                 | 74.00             | 22.55          | 150.0          | V   | 278.0            | 9.0             |


## Final\_Result

| Frequency<br>(MHz) | MaxPeak<br>(dBμV/m) | Average<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|---------------------|---------------------|-------------------|----------------|----------------|-----|------------------|-----------------|
| ----               | ----                | ----                | ----              | ----           | ----           |     | ----             | ----            |

## Appendix B.8: Test Results of Conducted Emission on AC Mains

### EUT Information

EUT Name: HONOR CHOICE YHEMI MouseBuds Pro  
Model: UMA-ME00  
Test Voltage: AC 120V/60Hz  
Standard: FCC PART 15  
Test By:/Review By: Charron Chen / Charlie Zha  
Tem./Hum./Pressure: 24.0°C/49.3%/101kPa  
Remark: SR 3

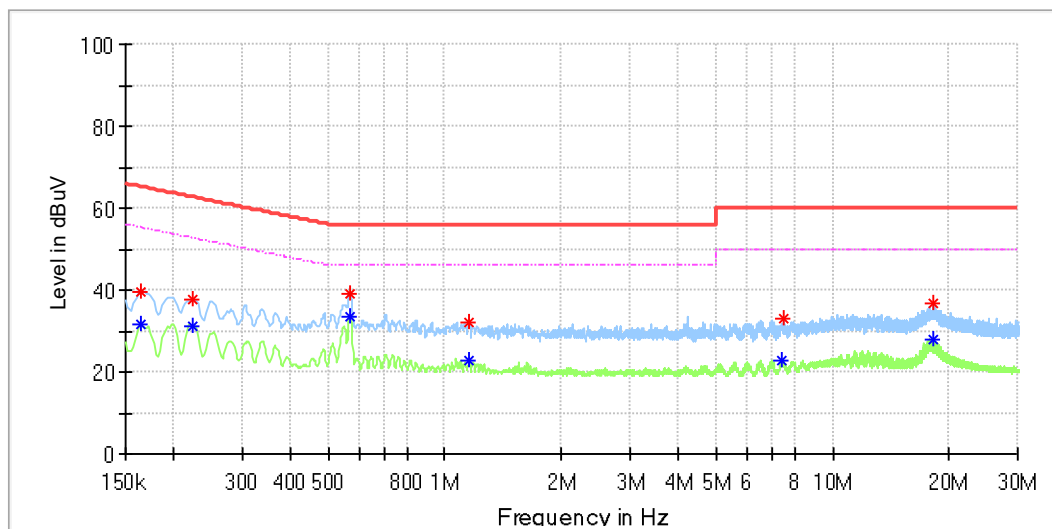

### Critical Freqs


| Frequency (MHz) | MaxPeak (dBuV) | Average (dBuV) | Limit (dBuV) | Margin (dB) | Line | Corr. (dB) |
|-----------------|----------------|----------------|--------------|-------------|------|------------|
| 0.165           | ---            | 31.4           | 55.21        | 23.77       | L1   | 9.6        |
| 0.165           | 39.8           | ---            | 65.21        | 25.46       | L1   | 9.6        |
| 0.225           | ---            | 31.4           | 52.65        | 21.26       | L1   | 9.7        |
| 0.225           | 37.9           | ---            | 62.65        | 24.79       | L1   | 9.7        |
| 0.568           | 39.2           | ---            | 56.00        | 16.77       | L1   | 9.6        |
| 0.568           | ---            | 33.6           | 46.00        | 12.37       | L1   | 9.6        |
| 1.152           | ---            | 22.8           | 46.00        | 23.21       | L1   | 9.6        |
| 1.152           | 32.0           | ---            | 56.00        | 24.02       | L1   | 9.6        |
| 7.416           | ---            | 22.7           | 50.00        | 27.32       | L1   | 9.9        |
| 7.511           | 33.1           | ---            | 60.00        | 26.91       | L1   | 9.9        |
| 18.137          | ---            | 27.8           | 50.00        | 22.18       | L1   | 9.7        |
| 18.155          | 36.5           | ---            | 60.00        | 23.48       | L1   | 9.7        |

### Final Result

| Frequency (MHz) | QuasiPeak (dBuV) | Average (dBuV) | Limit (dBuV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|------------|
| ---             | ---              | ---            | ---          | ---         | ---             | ---             | ---  | ---        |

### EUT Information

|                     |                                  |
|---------------------|----------------------------------|
| EUT Name:           | HONOR CHOICE YHEMI MouseBuds Pro |
| Order Number:       | P02155374                        |
| Model:              | UMA-ME00                         |
| Test Mode:          | Charging                         |
| Test Voltage:       | AC 120V/60Hz                     |
| Standard:           | FCC PART 15                      |
| Test By:/Review By: | Charron Chen / Charlie Zha       |
| Tem./Hum./Pressure: | 24.0°C/49.3%/101kPa              |
| Remark:             | SR 3                             |

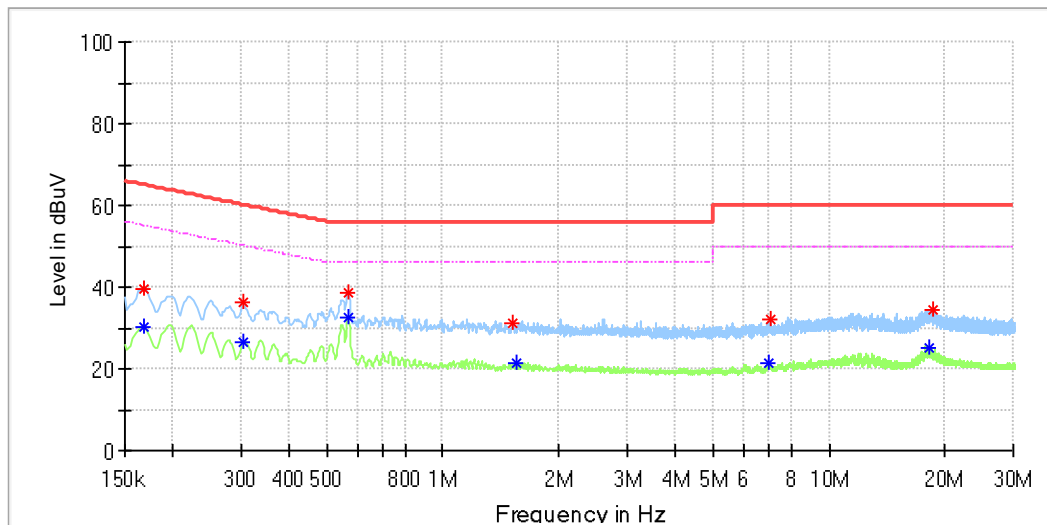

## Critical\_Freqs

| Frequency<br>(MHz) | MaxPeak<br>(dBuV) | Average<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Line | Corr.<br>(dB) |
|--------------------|-------------------|-------------------|-----------------|----------------|------|---------------|
| 0.167              | ---               | 30.2              | 55.09           | 24.87          | N    | 9.8           |
| 0.167              | 39.7              | ---               | 65.09           | 25.38          | N    | 9.8           |
| 0.304              | ---               | 26.5              | 50.13           | 23.63          | N    | 9.9           |
| 0.304              | 36.2              | ---               | 60.13           | 23.92          | N    | 9.9           |
| 0.568              | 38.7              | ---               | 56.00           | 17.35          | N    | 9.9           |
| 0.568              | ---               | 32.8              | 46.00           | 13.23          | N    | 9.9           |
| 1.513              | 31.1              | ---               | 56.00           | 24.86          | N    | 9.9           |
| 1.543              | ---               | 21.4              | 46.00           | 24.57          | N    | 9.9           |
| 6.966              | ---               | 21.2              | 50.00           | 28.76          | N    | 9.9           |
| 7.033              | 32.2              | ---               | 60.00           | 27.81          | N    | 9.9           |
| 18.234             | ---               | 25.3              | 50.00           | 24.75          | N    | 9.7           |
| 18.605             | 34.3              | ---               | 60.00           | 25.67          | N    | 9.7           |

## Final\_Result

[illegible]