



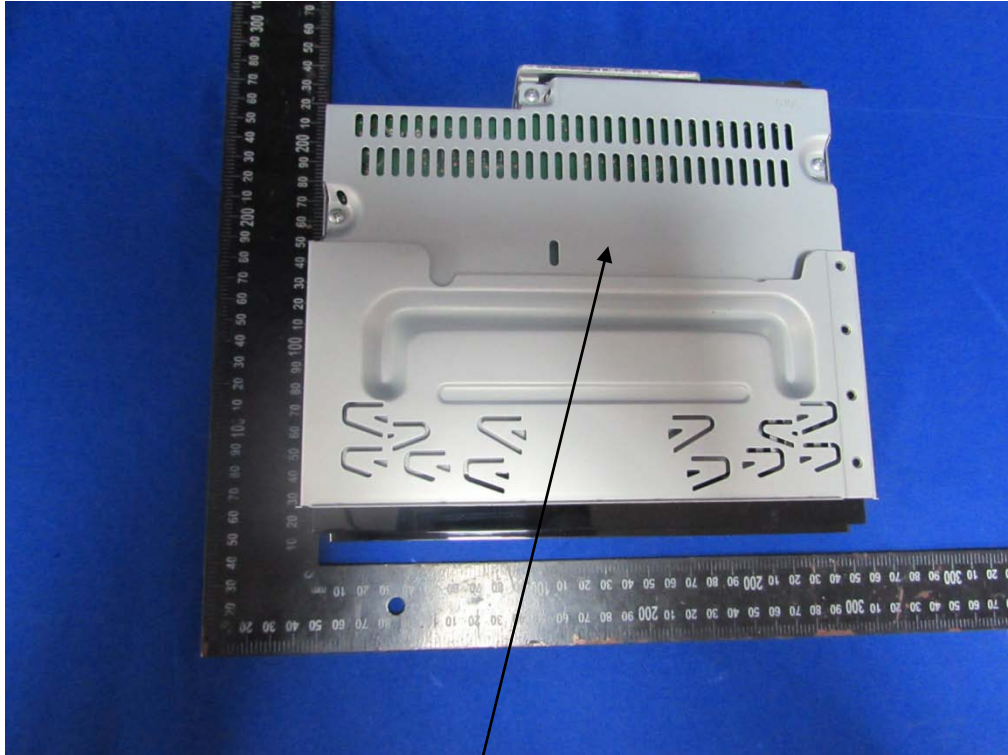

120.00 mm

BLAUPUNKT

Rear of Unit

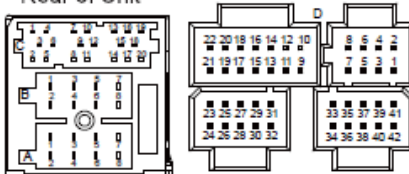

PIN NO.	Description	PIN NO.	Description
1	NC	5	P.ANT
2	NC	6	ILL
3	NC	7	B+
4	ACC	8	GND

PIN NO.	Description	PIN NO.	Description
1	RS+	5	FL+
2	RS-	6	FL-
3	FR+	7	RL+
4	FR-	8	RL-

PIN NO.	Description	PIN NO.	Description
1	CAMERA CVBS-	11	SWC_GND
2	NC	12	SWC2
3	NC	13	NC
4	CAMERA CVBS+	14	NC
5	VIDEO	15	NC
6	CVBS_OUT1	16	NC
7	REVERSE	17	NC
8	P.CONT	18	NC
9	PARKING	19	NC
10	SWCT	20	NC

This product was produced using lead free technology.
Help keep the world clean! Dispose properly!

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC ID: 2AJ5A-NEWYORK750

Model: New York 750

PIN NO.	Description	PIN NO.	Description
1	NC	22	AV1_CVBS_IN+
2	MIC-	23	NC
3	MIC+	24	NC
4	NC	25	NC
5	NC	26	NC
6	NC	27	NC
7	NC	28	NC
8	NC	29	NC
9	AGND	30	NC
10	LINE OUT FL	31	NC
11	LINE OUT FR	32	NC
12	AGND	33	NC
13	LINE OUT RL	34	NC
14	LINE OUT RR	35	NC
15	AGND	36	NC
16	LINE OUT SUB1	37	NC
17	LINE OUT SUB2	38	NC
18	AGND	39	NC
19	AUX1_L_IN	40	NC
20	AUX1_R_IN	41	NC
21	AUX1_CVBS_IN	42	NC

Warnings:

Warranty void if this unit is damaged due to misuse or unauthorized service attempting.

Before making any electrical connections disconnect the vehicle battery's negative terminal and carefully read the unit's Owner's Manual.

Connect each pair of speaker leads only to a single pair of speakers (or speaker system) that has an impedance of at least 4 ohms, as well as 45-watt power handling capability. Never allow the uninsulated part of any speaker leads to touch a metal part of the vehicle.

Connect speaker leads to input of external amplifiers ONLY if indicated in amplifier's manual, otherwise this unit's internal amplifier will be damaged.

12V GROUND 15A max

PIN:1270720066800/A0

100.00 mm