

FCC - TEST REPORTReport Number : **60.792.17.013.01R01** Date of Issue : April 28, 2017Model : **HG02429A, HG02429B**Product Type : **Bluetooth speaker**Applicant : Lidl US Trading, LLCAddress : 3500 S. Clark Street Arlington, Virginia, 22202Production Facility : DIGI MAX TECHNOLOGY LIMITEDAddress : Room 708, Building 3, Xinyuan B area, Jinshan Industrial District,
Fuzhou, ChinaTest Result : ☒ **Positive** ☐ **Negative**Total pages
including
Appendices : 44

TÜV SÜD HONG KONG LTD. is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025. TÜV SÜD HONG KONG LTD. reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD HONG KONG LTD. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD HONG KONG LTD. issued reports. This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

1 Table of Contents

1 Table of Contents.....	2
2 Description of Equipment Under Test	3
3 Summary of Test Standards	4
4 Details about the Test Laboratory	5
4.1 Test Equipment Site List	6
4.2 Measurement System Uncertainty	7
5 Summary of Test Results.....	8
6 General Remarks	9
7 Emission Test Results	10
7.1 Spurious Radiated Emission	10
7.2 20dB & 99% Bandwidth	16
7.3 Peak Output Power.....	19
7.4 Spurious Emissions at Antenna Terminals.....	22
7.5 100kHz Bandwidth of band edges.....	25
7.6 Minimum. Number of Hopping Frequencies	29
7.7 Minimum Hopping Channel Carrier Frequency Separation	30
7.8 Average Channel Occupancy Time.....	31
7.9 Antenna Requirement.....	32
8 Appendix A - Photographs of EUT	33
9 Appendix B - Setup Photographs of EUT.....	42
10 Appendix C - General Product Information	43

2 Description of Equipment Under Test

Description of the Equipment Under Test

Product:	Bluetooth speaker
Model no.:	HG02429A, HG02429B
FCC ID:	2AJ9O-HG2429
Rating:	1) 3.7VDC (1 x 3.7VDC Rechargeable battery) 2) 5.0VDC (USB port)
Frequency:	2402MHz-2480MHz
Antenna gain:	0 dBi
Number of operated channel:	79
Modulation:	GFSK

3 Summary of Test Standards

Test Standards
FCC Part 15 Subpart C 10-1-16 Edition Federal Communications Commission, PART 15 — Radio Frequency Devices, Subpart C — Unintentional Radiators

4 Details about the Test Laboratory

Site 1

Company name: TÜV SÜD Hong Kong Ltd.
3/F, West Wing, Lakeside 2,
10 Science Park West Avenue,
Science Park, Shatin, Hong Kong

Site 2

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13 Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2,
Shenzhen 518052, P.R.China
FCC Registration Number: 502708

Emission Tests	
Test Item	Test Site
FCC Part 15 Subpart C	
FCC Title 47 Part 15.205, 15.209 & 15.247(d) Spurious Radiated Emission	Site 2
FCC Title 47 Part 15.247(a)(1) 20dB & 99% Bandwidth	Site 2
FCC Title 47 Part 15.247(b) Peak Output Power	Site 2
FCC Title 47 Part 2.1051 & 15.247(d) Spurious Emissions at Antenna Terminals	Site 2
FCC Title 47 Part 15.247(d) 100kHz Bandwidth of band edges	Site 2
FCC Title 47 Part 15.247(a)(1) Minimum Number of Hopping Frequencies	Site 2
FCC Title 47 Part 15.247(a)(1) Minimum Hopping Channel Carrier Frequency Separation	Site 2
FCC Title 47 Part 15.247(a)(1) Average Time of Occupancy	Site 2
FCC Title 47 Part 15.203 & 15.247(b) Antenna Requirement	Site 2

4.1 Test Equipment Site List

Radiated emission Test – Site 2

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	15-July-17
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	15-July-17
Horn Antenna	Rohde & Schwarz	HF907	102294	15-July-17
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	15-July-17
3m Semi-anechoic chamber	TDK	9X6X6	----	29-May-19

20dB & 99% Bandwidth, Peak Output Power, Spurious Emissions at Antenna Terminals,
 100kHz Bandwidth of band edges, Min. No. of Hopping Frequencies,
 Min. Hopping Channel Carrier Frequency Separation and Average Time of Occupancy – Site 2

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Signal Generator	Rohde & Schwarz	SMB100A	108272	15-July-17
Signal Analyzer	Rohde & Schwarz	FSV40	101030	15-July-17
Vector Signal Generator	Rohde & Schwarz	SMU 200A	105324	15-July-17
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157	101226/100851	15-July-17

4.2 Measurement System Uncertainty

Measurement System Uncertainty Emissions

System Measurement Uncertainty	
Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber 9kHz-30MHz	4.54dB
Uncertainty for Radiated Emission in 3m chamber 30MHz-1000MHz	Horizontal: 4.83dB; Vertical: 4.91dB;
Uncertainty for Radiated Emission in 3m chamber 1000MHz-25000MHz	Horizontal: 4.89dB; Vertical: 4.88dB;
Uncertainty for Conducted RF test	2.04dB

5 Summary of Test Results

Emission Tests				
FCC Part 15 Subpart C				
Test Condition	Pages	Test Result		
		Pass	Fail	N/A
FCC Title 47 Part 15.205, 15.209 & 15.247(d) Spurious Radiated Emission	10-15	☒	☐	☐
FCC Title 47 Part 15.247(a)(2) 6dB & 99% Bandwidth	16-18	☒	☐	☐
FCC Title 47 Part 15.247(b) Peak Output Power	19-21	☒	☐	☐
FCC Title 47 Part 2.1051 & 15.247(d) Spurious Emissions at Antenna Terminals	22-24	☒	☐	☐
FCC Title 47 Part 15.247(d) 100kHz Bandwidth of band edges	25-28	☒	☐	☐
FCC Title 47 Part 15.247(a)(1) Min. No. of Hopping Frequencies	29	☒	☐	☐
FCC Title 47 Part 15.247(a)(1) Min. of Hopping Channel Carrier Frequency Separation	30	☒	☐	☐
FCC Title 47 Part 15.247(a)(1) Average Time of Occupancy	31	☒	☐	☐
FCC Title 47 Part 15.203 & 15.247(b) Antenna Requirement	32	☒	☐	☐

6 General Remarks

Remarks

Client informs that the HG02429B have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction, with Bluetooth speaker, HG02429A. The difference lies only on different color of the different models. (Client's conformation letter shown at appendix C)

EMC Tests were performed on model: HG02429A.

SUMMARY:

- All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

- The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.


Sample Received Date: March 16, 2017

Testing Start Date: March 17, 2017

Testing End Date: April 19, 2017

- TÜV SÜD HONG KONG LTD. -

Reviewed by:

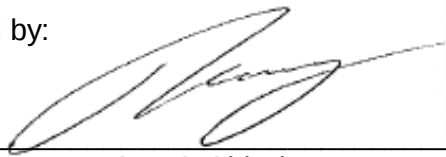

TSENG Chi Kit
EMC Project Engineer



Prepared by:



CHAN Kwan Ho Alex
EMC Project Engineer

7 Emission Test Results

7.1 Spurious Radiated Emission

EUT: HG02429A
 Op Condition: Operated, TX Mode (2402MHz)
 Test Specification: FCC15.205, 15.209 & 15.247(d) Antenna: Horizontal
 Comment: 3.7VDC
 Remark: 9kHz to 25GHz

Test Result	
☒	Passed
☐	Not Passed

Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Detector
62.225	21.54	40.0	-18.46	Quasi Peak
437.992	20.49	46.0	-25.51	Quasi Peak
875.947	26.11	46.0	-19.89	Quasi Peak
1238.505	38.06	74.0	-35.94	Peak
1238.505	27.24	54.0	-26.76	Average
1599.560	35.10	74.0	-38.90	Peak
1599.560	26.01	54.0	-27.99	Average
4799.531	40.71	74.0	-33.29	Peak
4799.531	29.94	54.0	-24.06	Average
8783.906	40.05	74.0	-33.95	Peak
8783.906	31.28	54.0	-22.72	Average
14997.656	47.73	74.0	-26.27	Peak
14997.656	39.22	54.0	-13.83	Average

Spurious Radiated Emission

EUT: HG02429A
 Op Condition: Operated, TX Mode (2402MHz)
 Test Specification: FCC15.205, 15.209 & 15.247(d) Antenna: Vertical
 Comment: 3.7VDC
 Remark: 9kHz to 25GHz

Test Result	
☒	Passed
☐	Not Passed

Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Detector
72.150	22.66	40.0	-17.34	Quasi Peak
95.660	23.45	43.5	-20.05	Quasi Peak
280.886	24.81	46.0	-21.19	Quasi Peak
1866.312	29.60	74.0	-44.40	Peak
1866.312	20.68	54.0	-33.32	Average
2248.062	31.86	74.0	-42.14	Peak
2248.062	21.09	54.0	-32.91	Average
2706.750	32.82	74.0	-41.18	Peak
2706.750	29.63	54.0	-24.37	Average
4799.530	41.12	74.0	-32.88	Peak
4799.530	30.95	54.0	-23.05	Average
8731.875	39.77	74.0	-34.23	Peak
8731.875	30.07	54.0	-23.93	Average
12807.185	45.28	74.0	-28.72	Peak
12807.185	36.11	54.0	-17.89	Average

Spurious Radiated Emission

EUT: HG02429A
 Op Condition: Operated, TX Mode (2441MHz)
 Test Specification: FCC15.205, 15.209 & 15.247(d) Antenna: Horizontal
 Comment: 3.7VDC
 Remark: 9kHz to 25GHz

Test Result	
☒	Passed
☐	Not Passed

Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector
72.165	21.88	40.0	-18.12	Quasi Peak
125.005	22.07	43.5	-21.43	Quasi Peak
248.350	25.34	46.0	-20.66	Quasi Peak
1241.750	32.41	74.0	-41.59	Peak
1241.750	23.18	54.0	-30.82	Average
1599.375	38.88	74.0	-35.12	Peak
1599.375	27.49	54.0	-26.51	Average
4877.812	39.03	74.0	-34.97	Peak
4877.812	30.11	54.0	-23.89	Average
8730.937	40.69	74.0	-33.31	Peak
8730.937	31.16	54.0	-22.84	Average
13196.718	43.36	74.0	-30.64	Peak
13196.718	33.57	54.0	-20.43	Average
15033.750	46.71	74.0	-27.29	Peak
15033.750	37.22	54.0	-16.78	Average

Spurious Radiated Emission

EUT: HG02429A
 Op Condition: Operated, TX Mode (2441MHz)
 Test Specification: FCC15.205, 15.209 & 15.247(d) Antenna: Vertical
 Comment: 3.7VDC
 Remark: 9kHz to 25GHz

Test Result	
☒	Passed
☐	Not Passed

Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector
72.165	21.82	40.0	-18.18	Quasi Peak
120.150	22.07	43.5	-21.43	Quasi Peak
241.225	23.15	46.0	-22.85	Quasi Peak
1246.250	31.32	74.0	-42.68	Peak
1246.250	22.53	54.0	-31.47	Average
1592.062	30.12	74.0	-43.88	Peak
1592.062	21.58	54.0	-32.42	Average
4877.812	38.85	74.0	-35.15	Peak
4877.812	29.14	54.0	-24.86	Average
7491.562	38.87	74.0	-35.13	Peak
7491.562	29.20	54.0	-24.80	Average
8608.593	39.78	74.0	-34.22	Peak
8608.593	30.06	54.0	-23.94	Average
12863.437	43.49	74.0	-30.51	Peak
12863.437	33.84	54.0	-20.16	Average

Spurious Radiated Emission

EUT: HG02429A
 Op Condition: Operated, TX Mode (2480MHz)
 Test Specification: FCC15.205, 15.209 & 15.247(d) Antenna: Horizontal
 Comment: 3.7VDC
 Remark: 9kHz to 25GHz

Test Result	
☒	Passed
☐	Not Passed

Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Detector
54.550	20.85	40.0	-19.15	Quasi Peak
195.207	22.44	43.5	-21.06	Quasi Peak
450.885	23.26	46.0	-22.74	Quasi Peak
1258.550	32.22	74.0	-41.78	Peak
1258.550	21.84	54.0	-32.16	Average
1647.437	30.32	74.0	-43.68	Peak
1647.437	20.25	54.0	-33.75	Average
4955.625	38.65	74.0	-35.35	Peak
4955.625	29.22	54.0	-24.78	Average
7683.281	38.89	74.0	-35.11	Peak
7683.281	29.72	54.0	-24.28	Average
12438.280	42.89	74.0	-31.11	Peak
12438.280	33.18	54.0	-20.82	Average
15028.595	47.21	74.0	-26.79	Peak
15028.595	39.03	54.0	-14.97	Average

Spurious Radiated Emission

EUT: HG02429A
 Op Condition: Operated, TX Mode (2480MHz)
 Test Specification: FCC15.205, 15.209 & 15.247(d) Antenna: Vertical
 Comment: 3.7VDC
 Remark: 9kHz to 25GHz


Test Result	
☒	Passed
☐	Not Passed

Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Detector
55.940	20.59	40.0	-19.41	Quasi Peak
144.660	21.58	43.5	-21.92	Quasi Peak
305.690	23.59	46.0	-22.41	Quasi Peak
1592.635	30.85	74.0	-43.15	Peak
1592.635	21.28	54.0	-32.72	Average
2248.625	31.19	74.0	-42.81	Peak
2248.625	22.58	54.0	-31.42	Average
4955.625	39.07	74.0	-34.93	Peak
4955.625	28.55	54.0	-25.45	Average
8813.437	39.81	74.0	-34.19	Peak
8813.437	30.25	54.0	-23.75	Average
10825.312	41.73	74.0	-32.27	Peak
10825.312	31.29	54.0	-22.71	Average
14971.875	46.27	74.0	-27.73	Peak
14971.875	37.19	54.0	-16.81	Average

7.2 20dB & 99% Bandwidth

EUT: HG02429A
Op Condition: Operated, TX Mode (2402MHz)
Test Specification: FCC15.247(a)(2), 20dB Bandwidth & 99% Bandwidth
Comment: 3.7VDC

Test Result
☒ Passed
☐ Not Passed

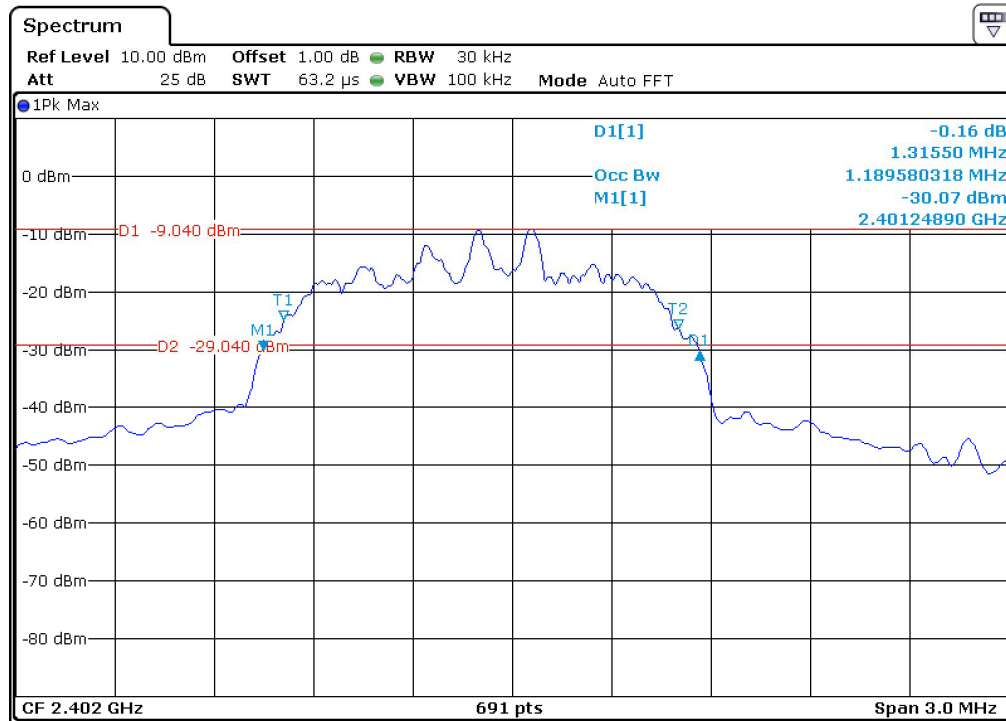


20dB bandwidth	99% bandwidth
1315.500 kHz	1189.580 kHz

20dB & 99% Bandwidth

EUT: HG02429A
 Op Condition: Operated, TX Mode (2441MHz)
 Test Specification: FCC15.247(a)(2), 20dB Bandwidth & 99% Bandwidth
 Comment: 3.7VDC

Test Result	
☒	Passed
☐	Not Passed

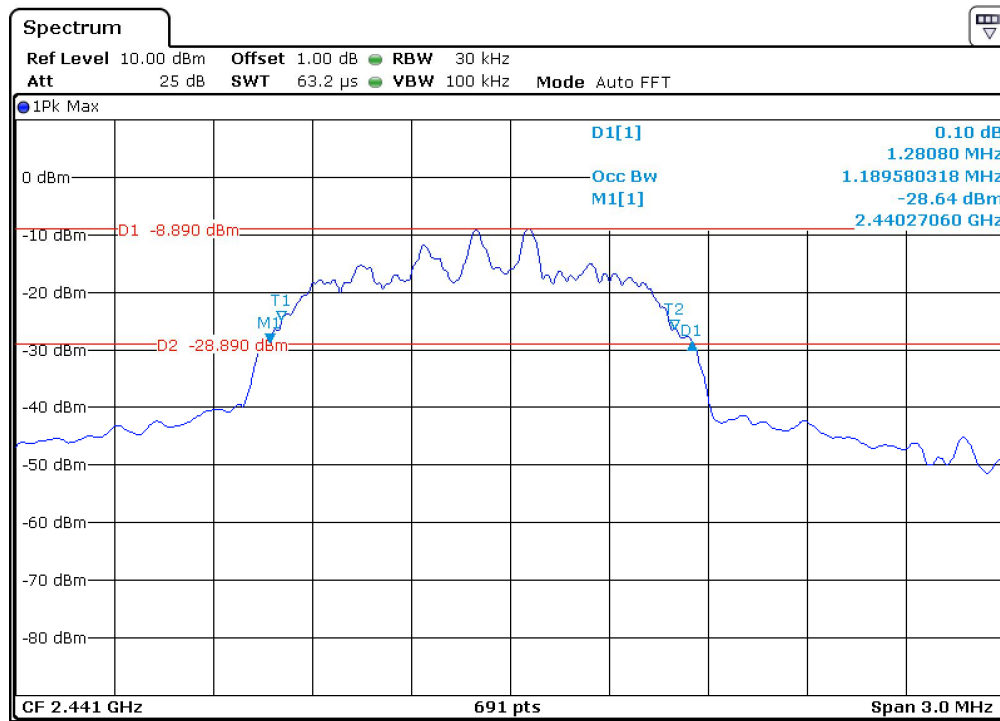


20dB bandwidth	99% bandwidth
1280.800 kHz	1189.580 kHz

20dB & 99% Bandwidth

EUT: HG02429A
 Op Condition: Operated, TX Mode (2480MHz)
 Test Specification: FCC15.247(a)(2), 20dB Bandwidth & 99% Bandwidth
 Comment: 3.7VDC

Test Result
☒ Passed
☐ Not Passed

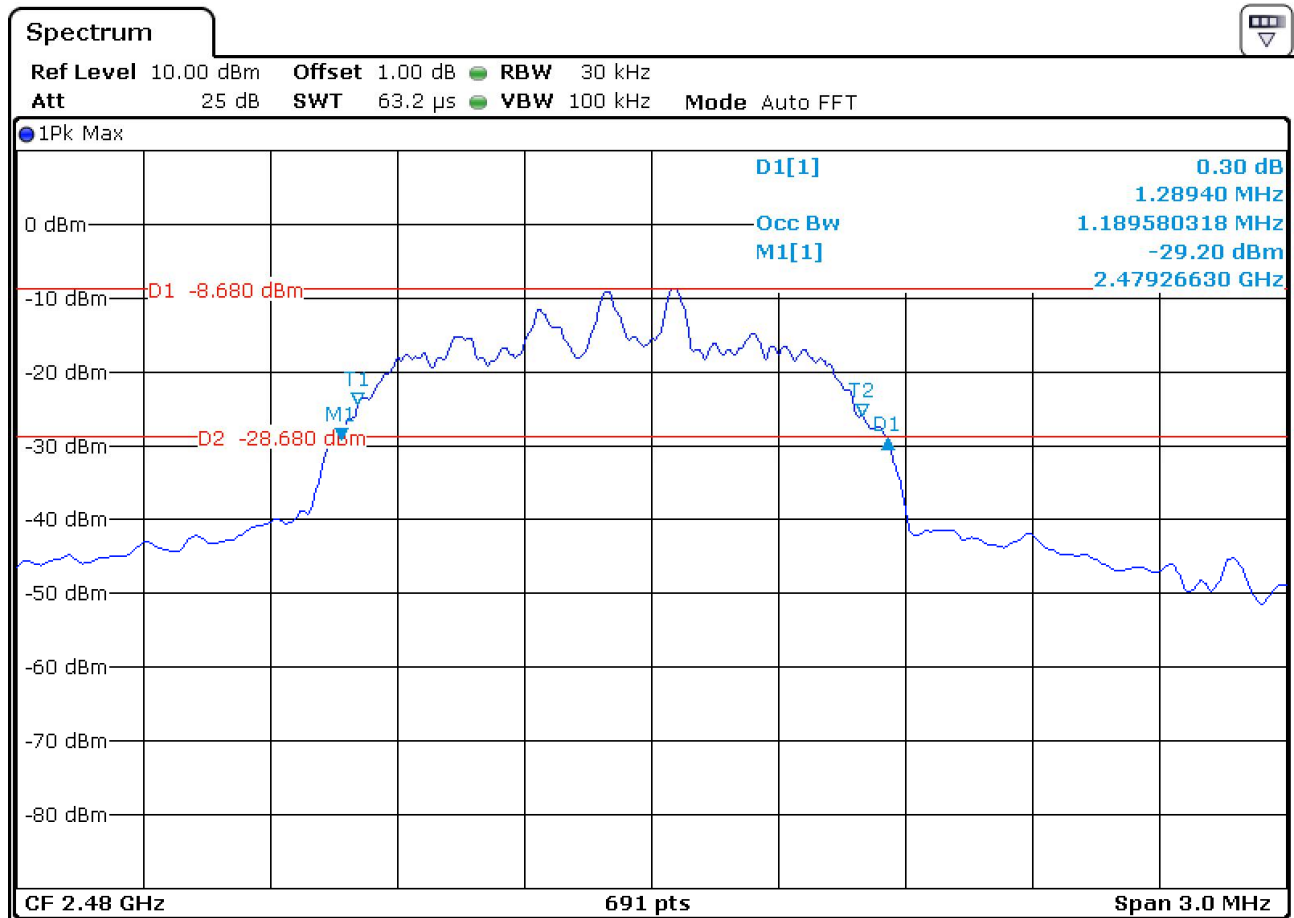


20dB bandwidth	99% bandwidth
1289.400kHz	1189.580 kHz

7.3 Peak Output Power

EUT: HG02429A
 Op Condition: Operated, TX Mode (2402MHz)
 Test Specification: FCC15.247(b)
 Comment: 3.7VDC, Antenna gain: 0 dBi, Cable Loss: 0.5dB

Test Result	
☒	Passed
☐	Not Passed

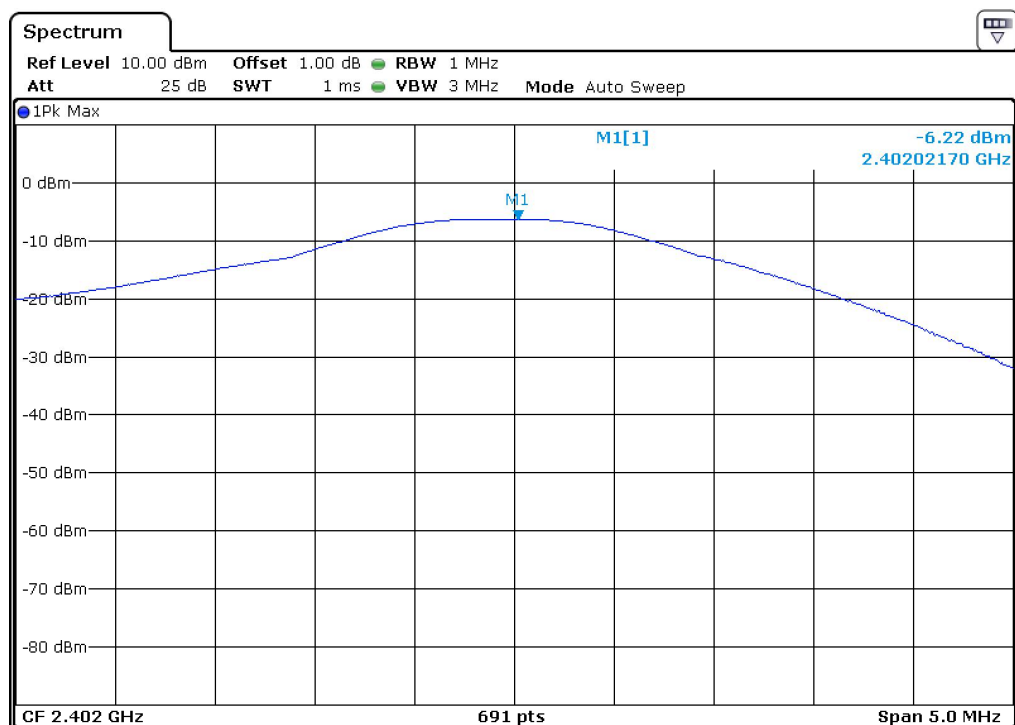


Conducted Output Power (dBm)	Conducted Output Power (mW)	Limit (mW)
-6.22	0.238	125.0

Peak Output Power

EUT: HG02429A
 Op Condition: Operated, TX Mode (2441MHz)
 Test Specification: FCC15.247(b)
 Comment: 3.7VDC, Antenna gain: 0 dBi, Cable Loss: 0.5dB

Test Result	
☒	Passed
☐	Not Passed

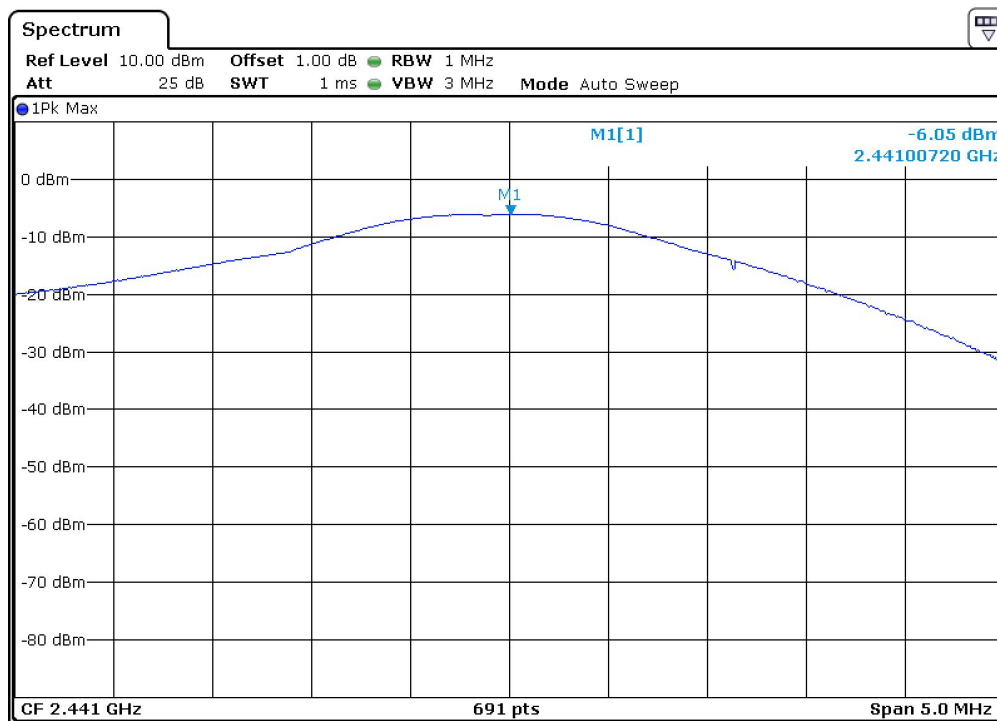


Conducted Output Power (dBm)	Conducted Output Power (mW)	Limit (mW)
-6.05	0.248	125.0

Peak Output Power

EUT: HG02429A
 Op Condition: Operated, TX Mode (2480MHz)
 Test Specification: FCC15.247(b)
 Comment: 3.7VDC, Antenna gain: 0 dBi, Cable Loss: 0.5dB

Test Result	
☒	Passed
☐	Not Passed


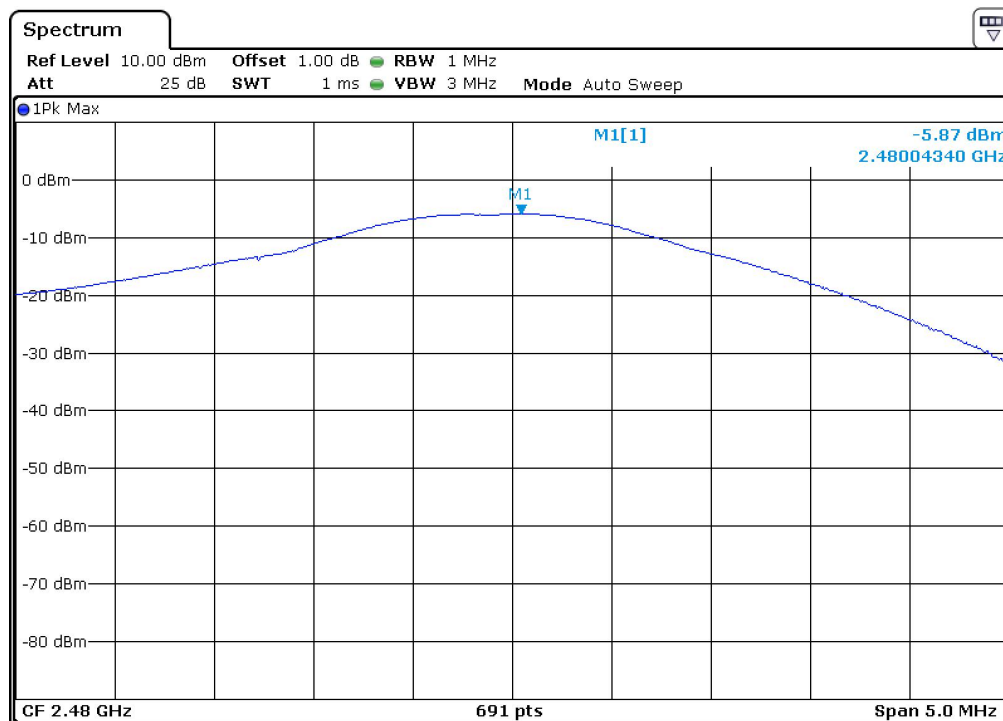


Conducted Output Power (dBm)	Conducted Output Power (mW)	Limit (mW)
-5.87	0.259	125.0

7.4 Spurious Emissions at Antenna Terminals

EUT: HG02429A
 Op Condition: Operated, TX Mode (2402MHz)
 Test Specification: FCC2.1051 & 15.247(d)
 Comment: 3.7VDC

Test Result
☒ Passed
☐ Not Passed

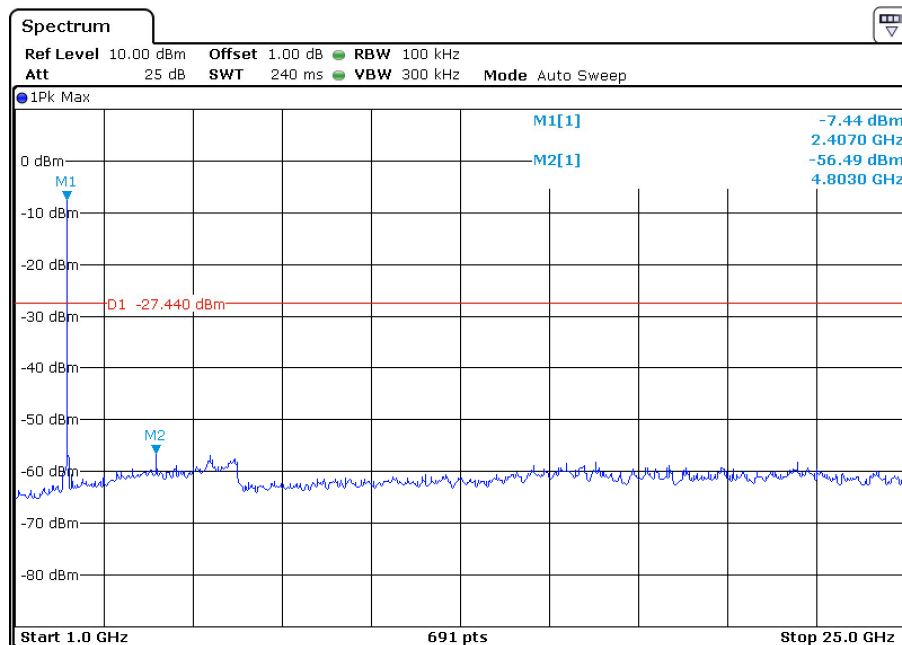
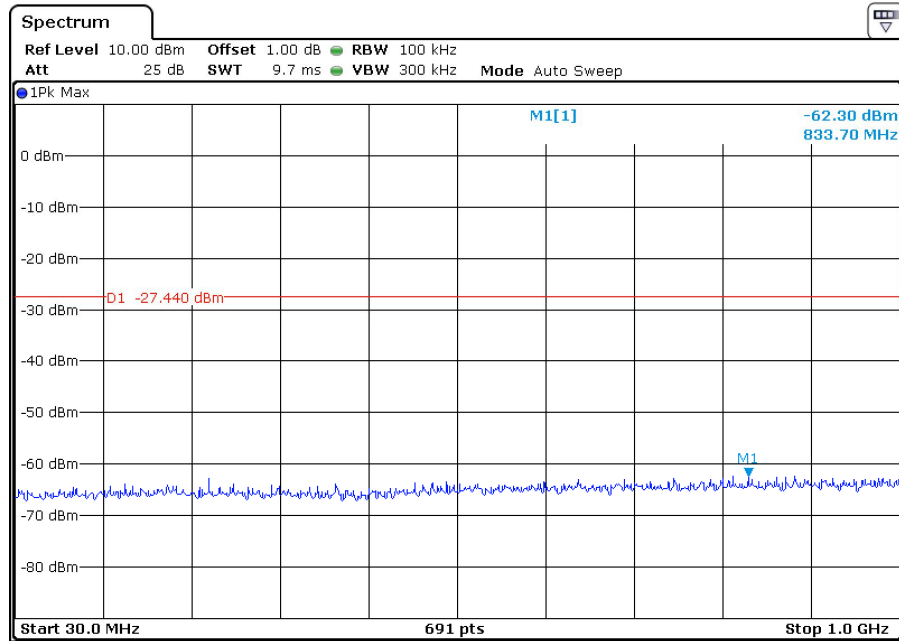


Limit: 20dB below the highest level of the desired power in the passband

Spurious Emissions at Antenna Terminals

EUT: HG02429A
Op Condition: Operated, TX Mode (2441MHz)
Test Specification: FCC2.1051 & 15.247(d)
Comment: 3.7VDC

Test Result
☒ Passed
☐ Not Passed

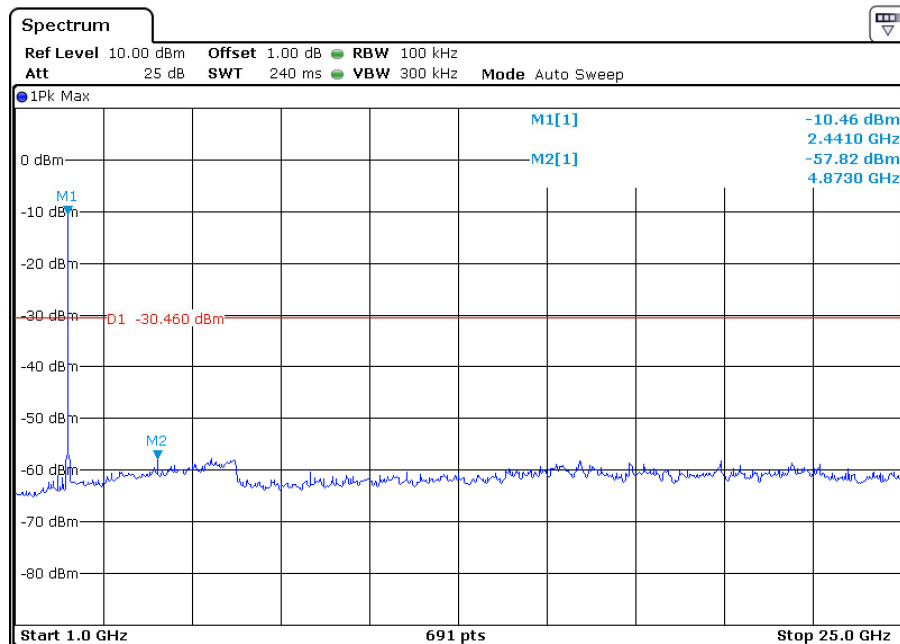
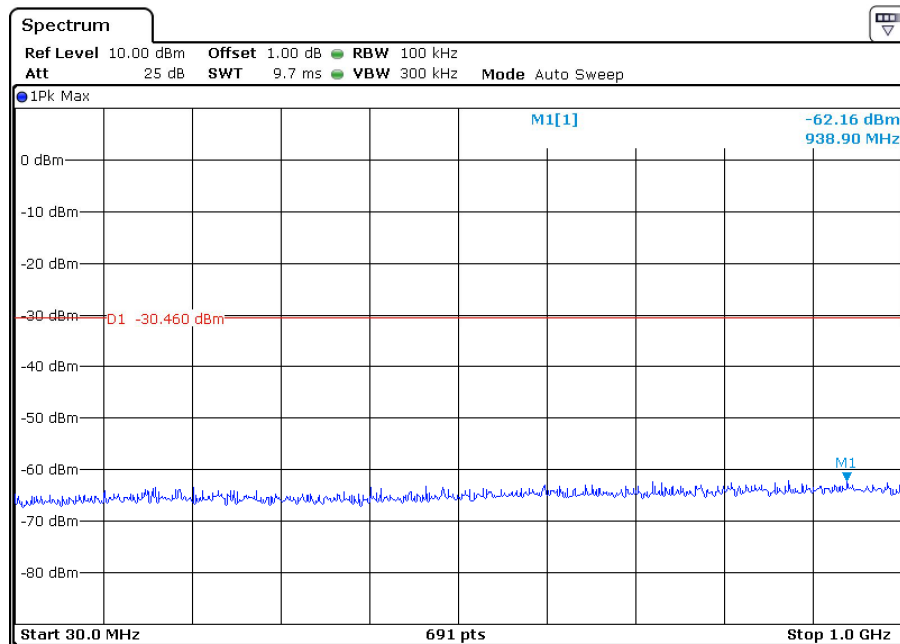


Limit: 20dB below the highest level of the desired power in the passband

Spurious Emissions at Antenna Terminals

EUT: HG02429A
Op Condition: Operated, TX Mode (2480MHz)
Test Specification: FCC2.1051 & 15.247(d)
Comment: 3.7VDC

Test Result
☒ Passed
☐ Not Passed

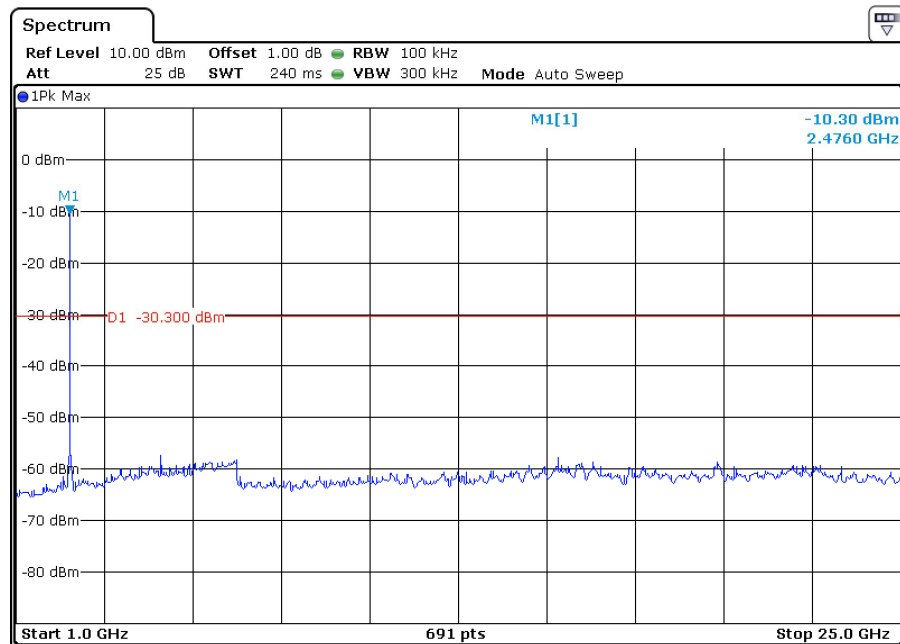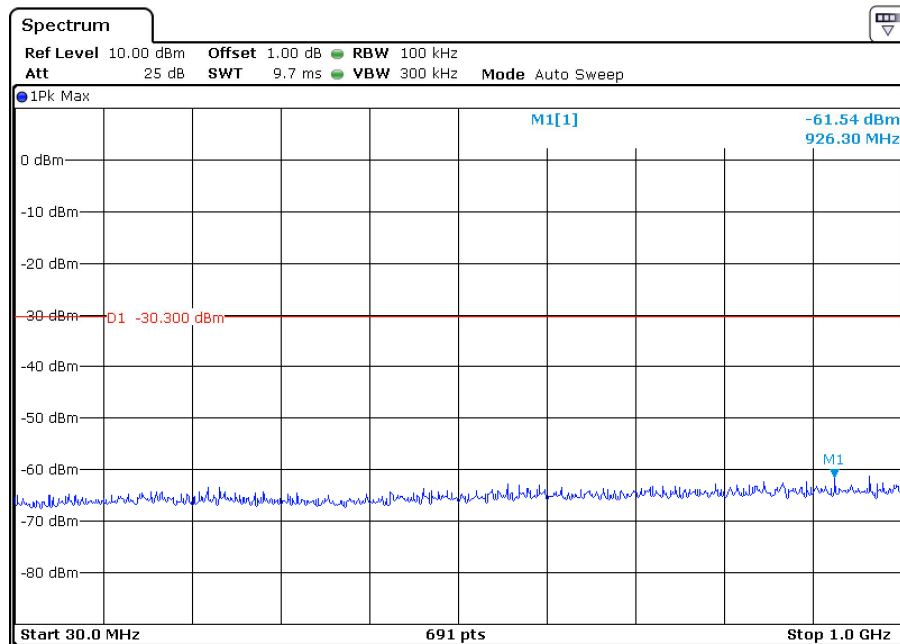


Limit: 20dB below the highest level of the desired power in the passband

7.5 100kHz Bandwidth of band edges

EUT: HG02429A
 Op Condition: Operated, TX Mode (2402MHz)
 Test Specification: FCC15.247(d), Conducted
 Comment: 3.7VDC

Test Result
☒ Passed
☐ Not Passed

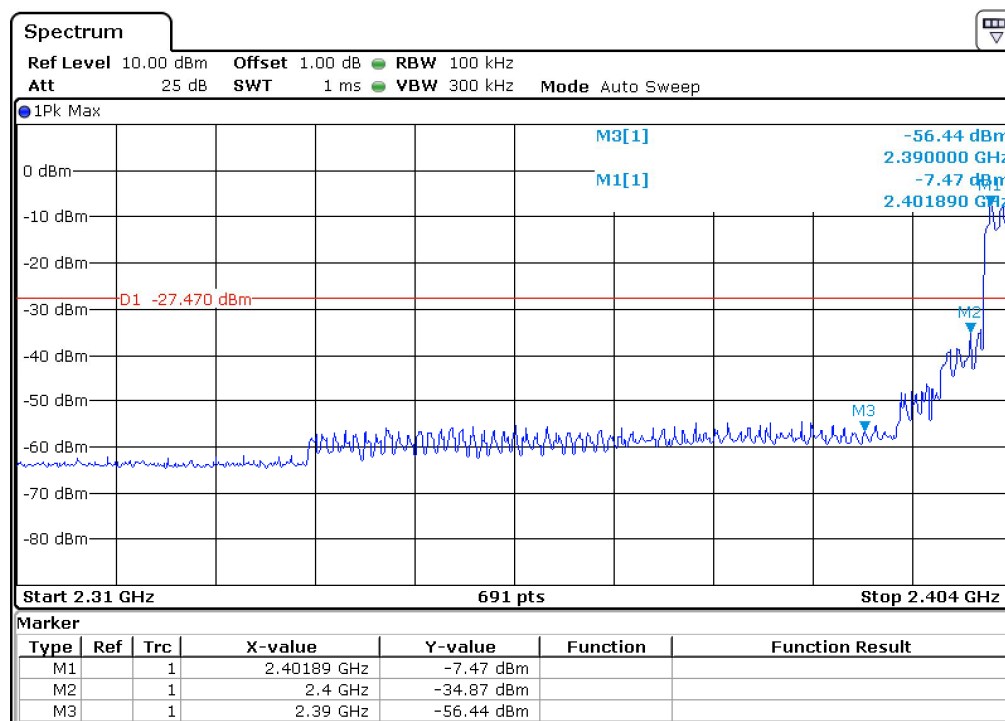

Band edges	Limit
27.40 dB	> 20dB

100kHz Bandwidth of band edges

EUT: HG02429A
Op Condition: Operated, TX Mode (2402MHz)
Test Specification: FCC15.247(d), Radiated
Comment: 3.7VDC


Test Result
☒ Passed
☐ Not Passed

Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector
2390.000	40.04	74	-33.96	Peak
2390.000	30.68	54	-23.32	Average

100kHz Bandwidth of band edges

EUT: HG02429A
Op Condition: Operated, TX Mode (2480MHz)
Test Specification: FCC15.247(d), Conducted
Comment: 3.7VDC

Test Result
☒ Passed
☐ Not Passed

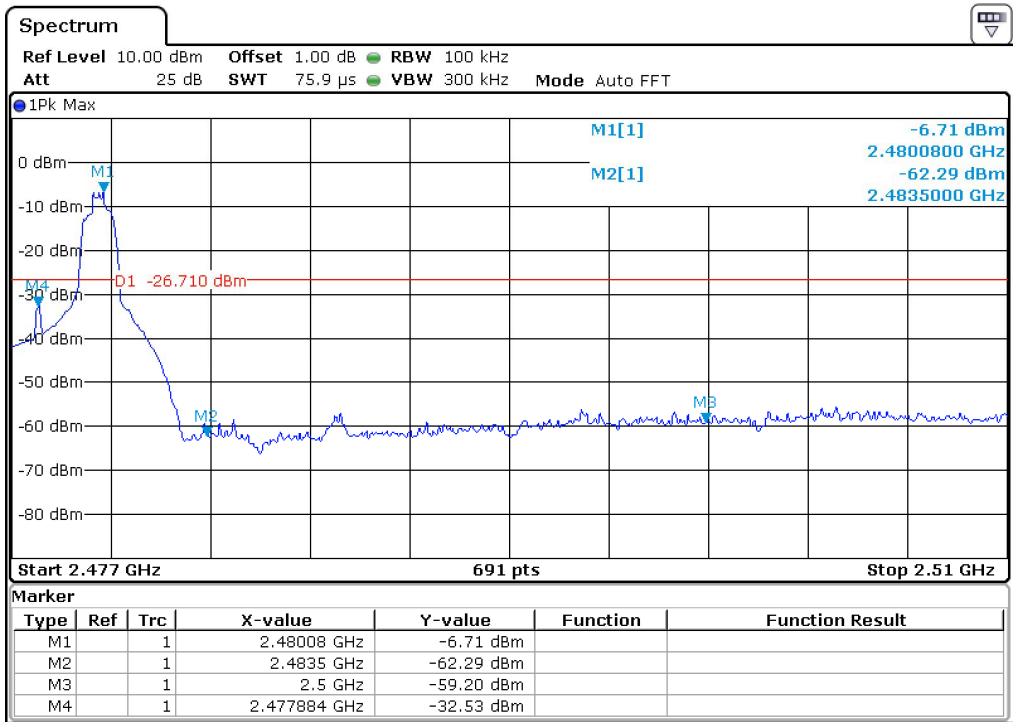

Band edges	Limit
55.58 dB	> 20dB

100kHz Bandwidth of band edges

EUT: HG02429A
Op Condition: Operated, TX Mode (2480MHz)
Test Specification: FCC15.247(d), Radiated
Comment: 3.7VDC


Test Result
☒ Passed
☐ Not Passed

Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector
2483.500	34.62	74	-39.38	Peak
2483.500	23.94	54	-30.06	Average

7.6 Minimum. Number of Hopping Frequencies

EUT: HG02429A
Op Condition: Operated, TX Mode (2402-2480MHz)
Test Specification: FCC15.247(a)(1)
Comment: 3.7VDC

Test Result
☒ Passed
☐ Not Passed

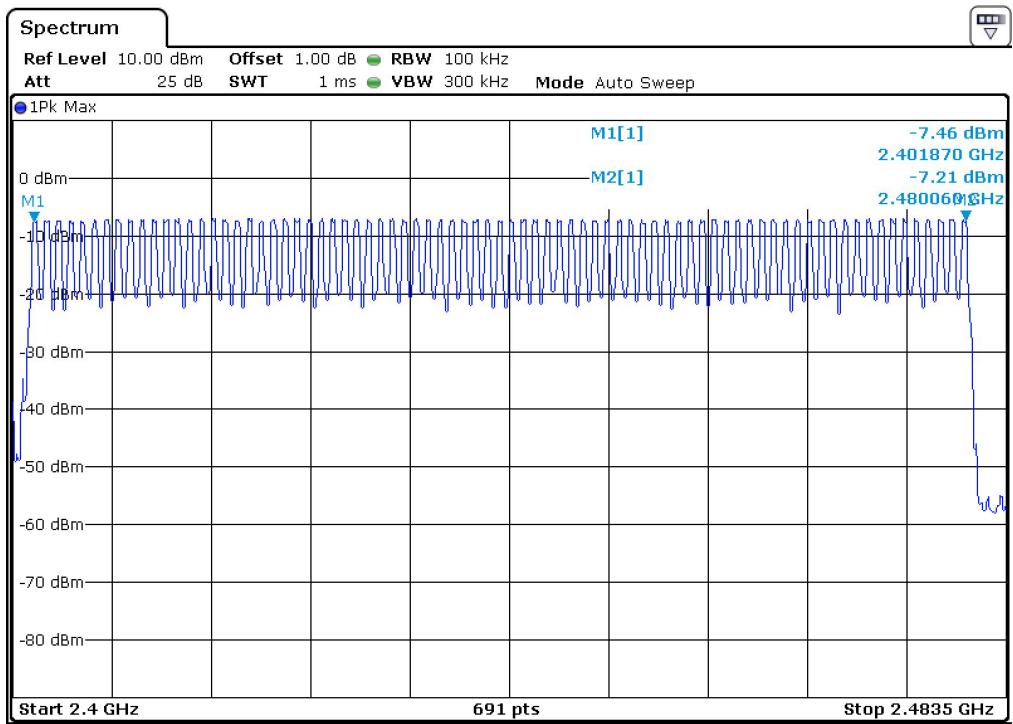


Hopping Channels	Limit
79	≥ 15

7.7 Minimum Hopping Channel Carrier Frequency Separation

EUT: HG02429A
Op Condition: Operated, TX Mode (2402-2480MHz)
Test Specification: FCC15.247(a)(1)
Comment: 3.7VDC

Test Result
☒ Passed
☐ Not Passed

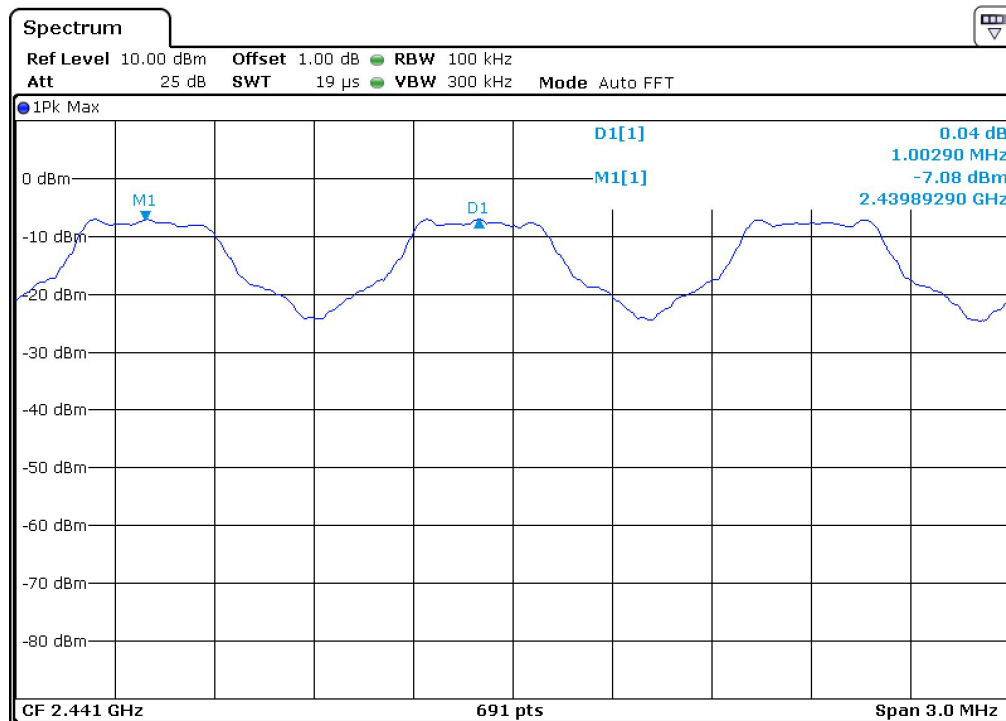



Chanal Separation	Limit
1002.90 kHz	853.867 kHz

Limit: 2/3 of 20dB bandwidth of hopping channel

7.8 Average Channel Occupancy Time

EUT: HG02429A
Op Condition: Operated, TX Mode (2402MHz)
Test Specification: FCC15.247(a)(1)
Comment: 3.7VDC

Test Result
☒ Passed
☐ Not Passed

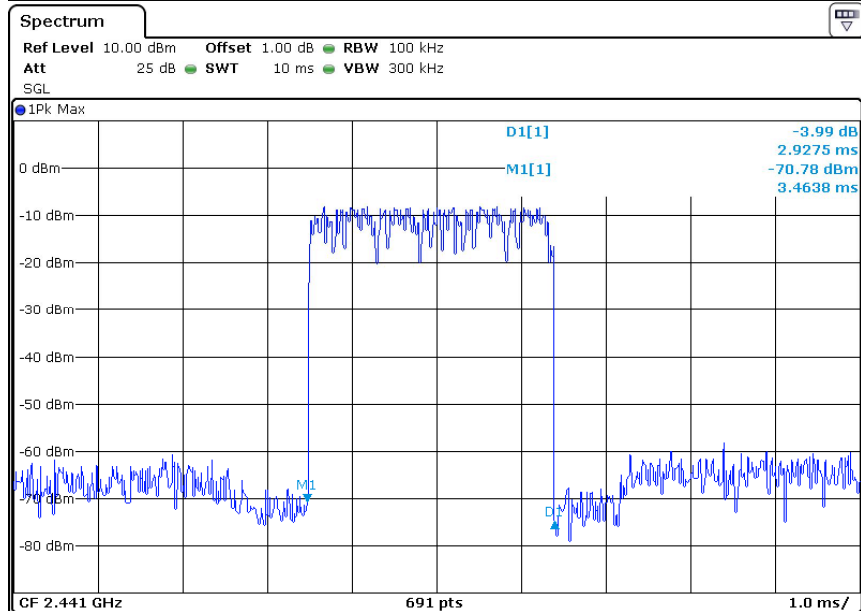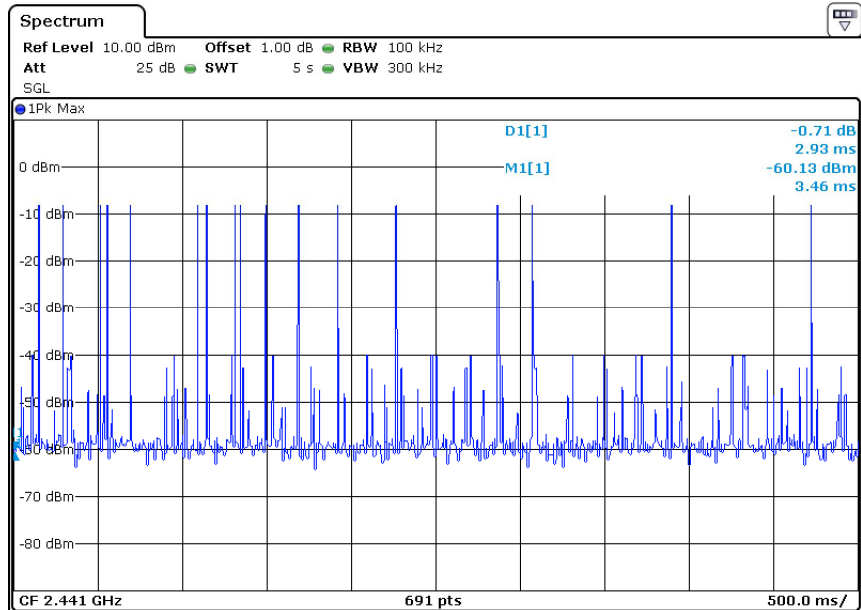

Average time of occupancy	Limit
Number of hops in 5 sec.: 17 Period: 0.4 x 79 Ch. = 31.6 sec. Total number of hops in 31.6 sec.: (17/5)*31.6=108 Time of single pulse: 2.928 ms Average time of occupancy: 2.928 ms x 108 = 0.3162 sec.	0.4 Seconds

7.9 Antenna Requirement

EUT: HG02429A
Op Condition: Operated, TX Mode
Test Specification: FCC15.203 & 15.247(b)
Comment: 3.7VDC

Test Result	
☒	Passed
☐	Not Passed



Limit

For intentional device, according to FCC Title 47 Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC Title 47 Part 15.247(b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


Antenna Connector Construction

The antenna used in this product is PCB antenna, and the maximum gain of this antenna is 0.0 dBi.


8 Appendix A - Photographs of EUT

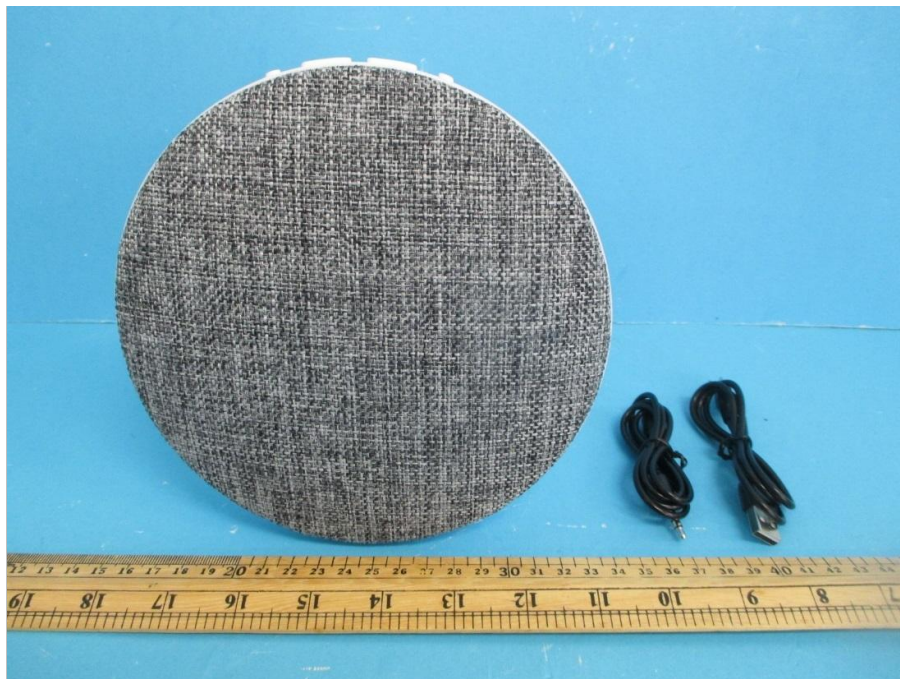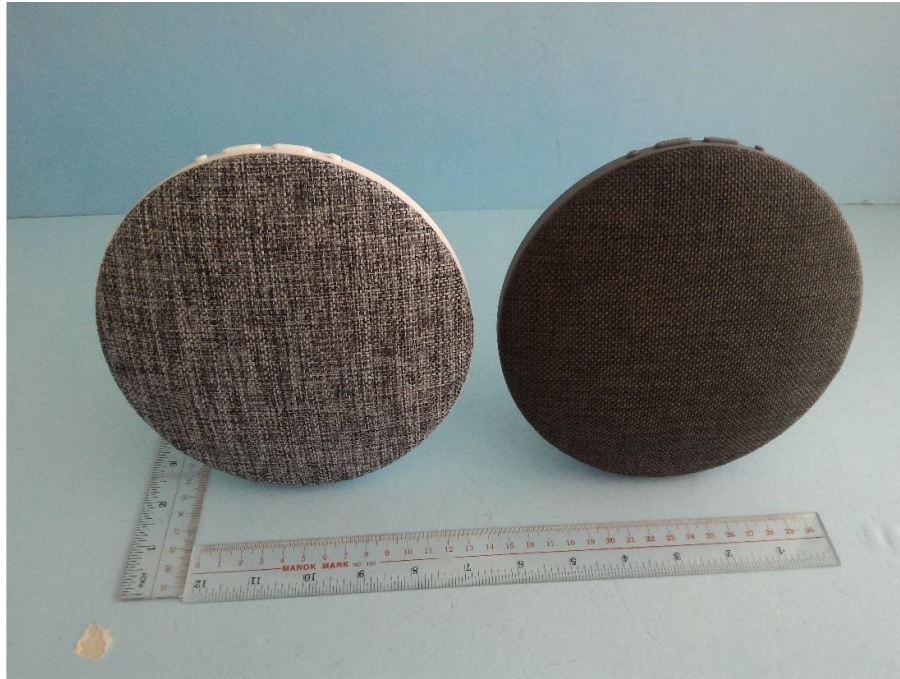

Appendix A

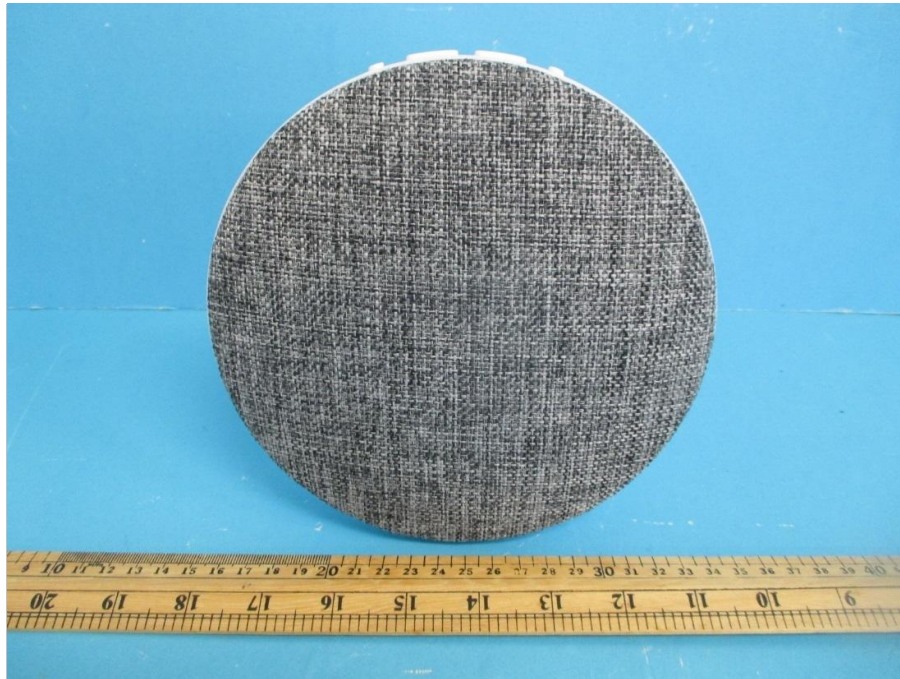


Appendix A

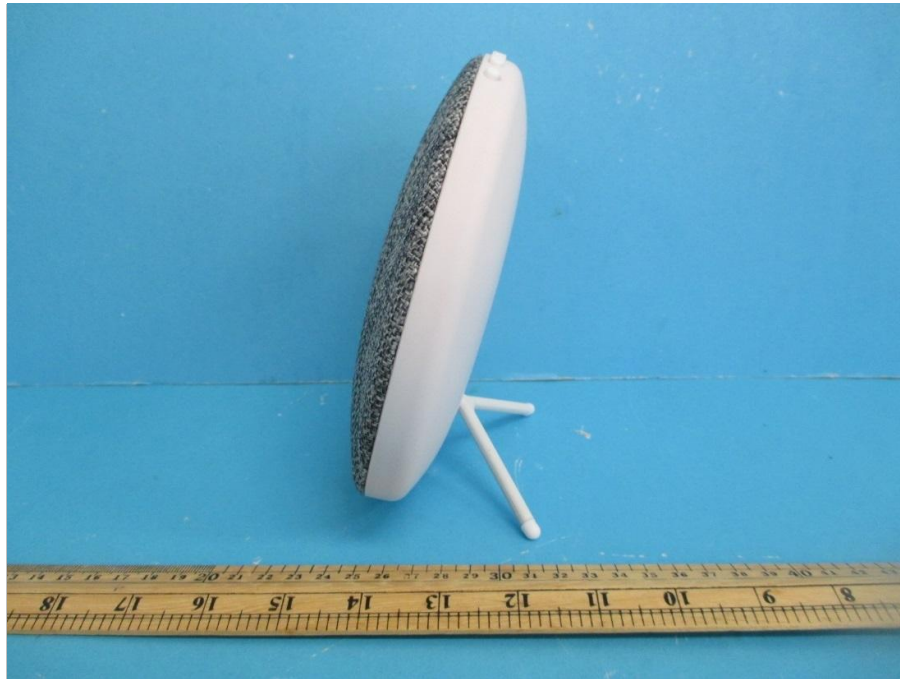


Appendix A




Appendix A

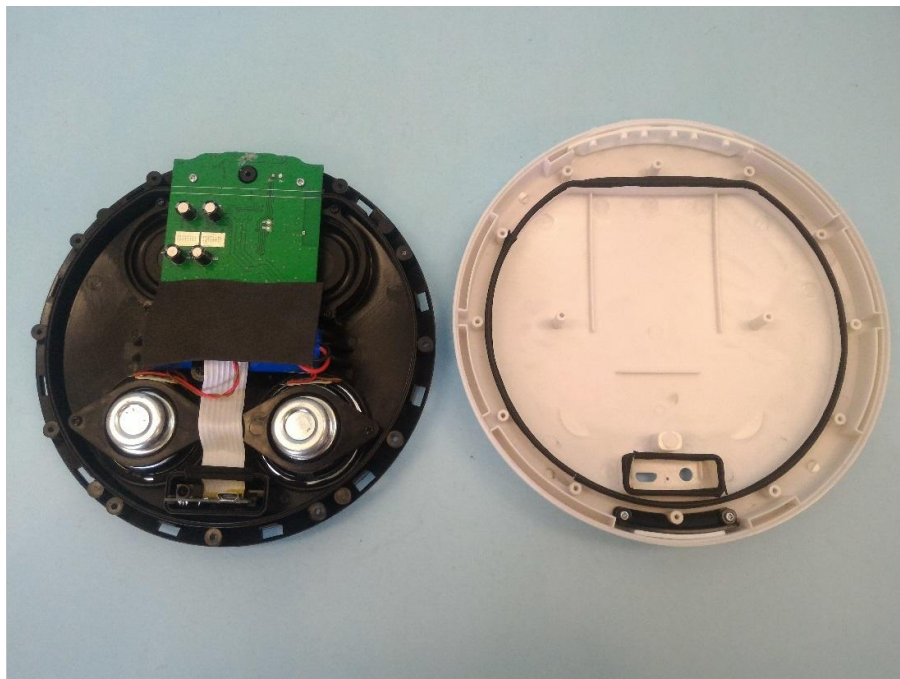



Appendix A

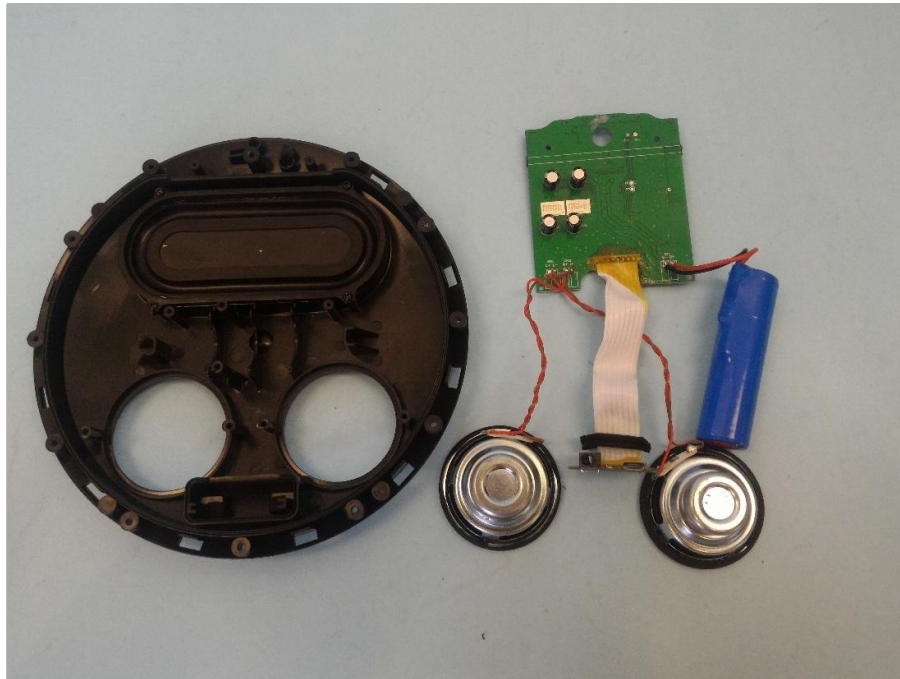


Appendix A

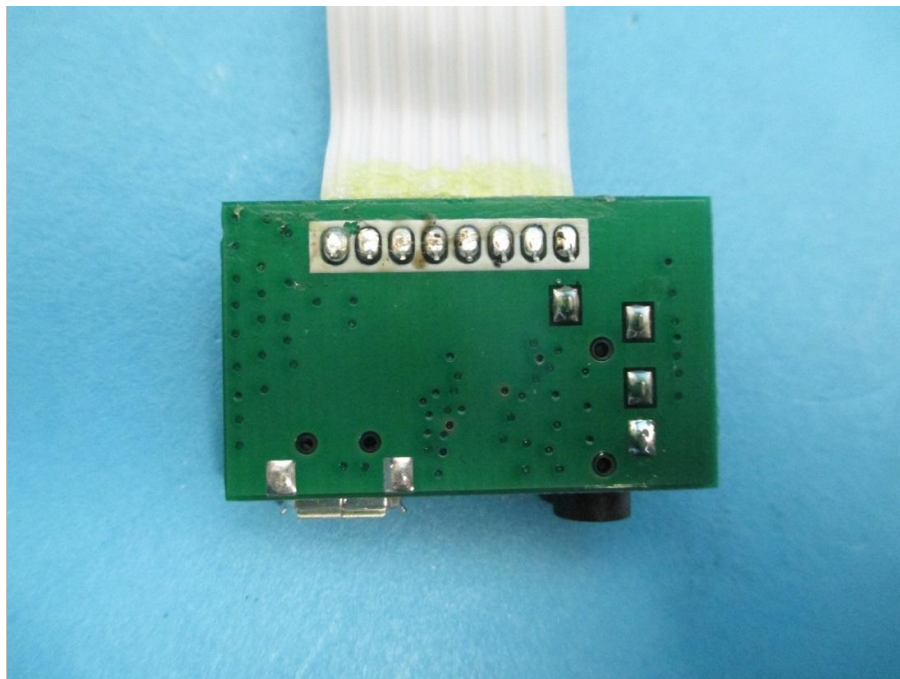

Appendix A

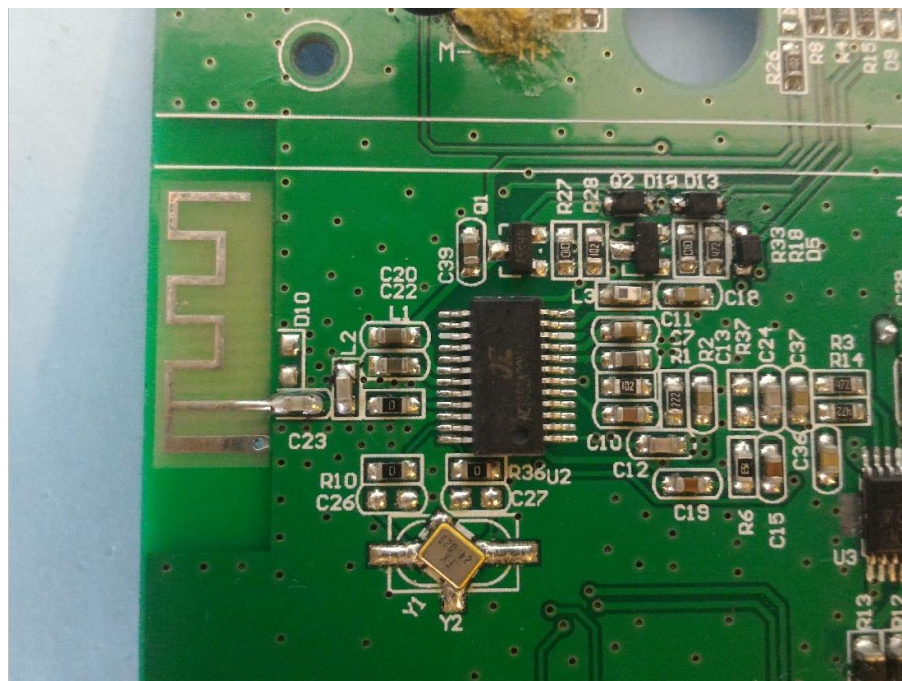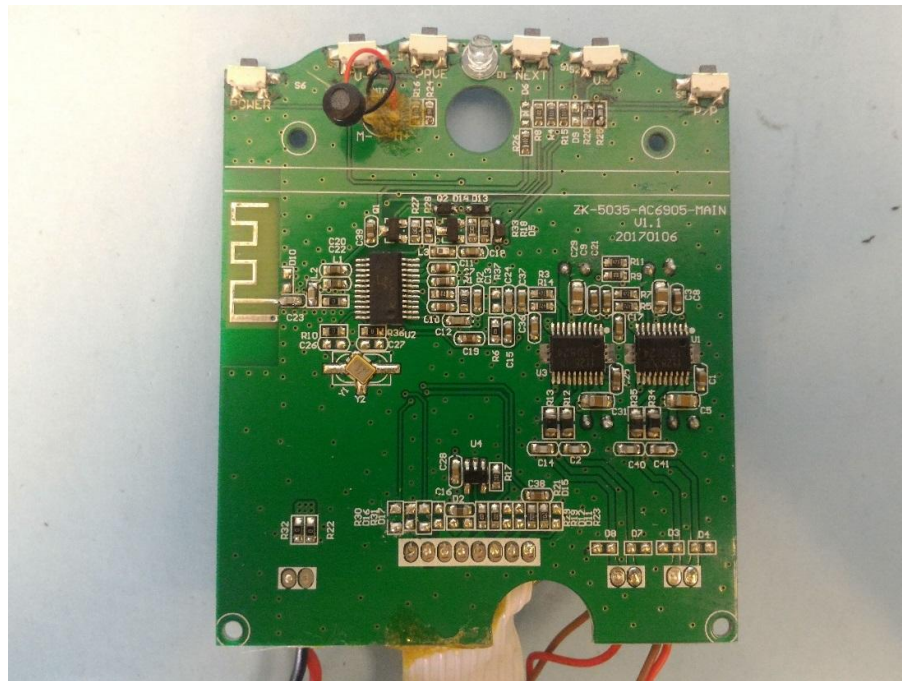

Appendix A

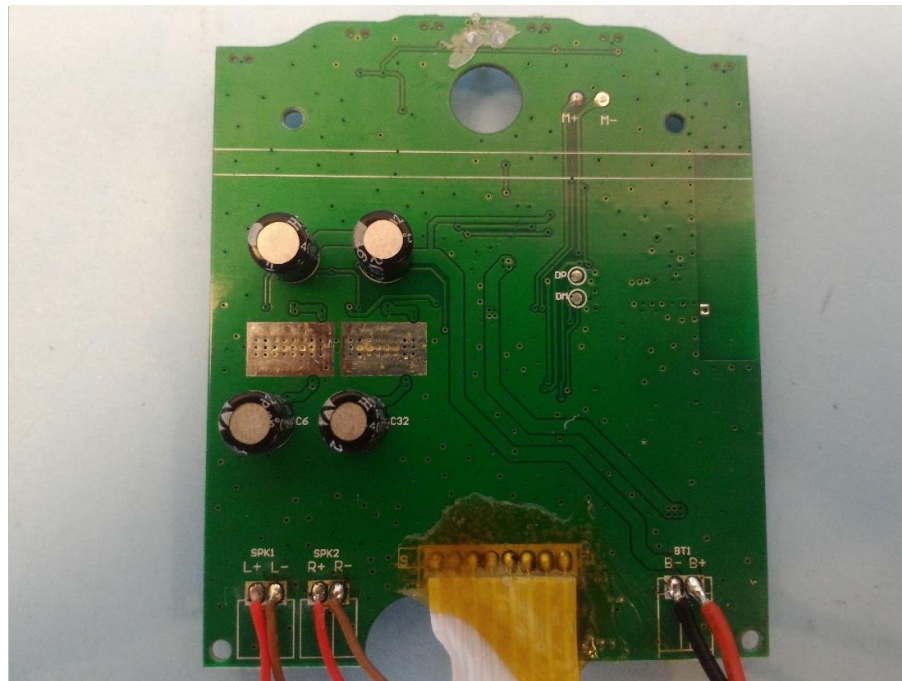


9 Appendix B - Setup Photographs of EUT

Spurious Radiated Emission



20dB & 99% Bandwidth, Peak Output Power,
Spurious Emissions at Antenna Terminals,
100kHz Bandwidth of band edges, Min. No. of Hopping Frequencies,
Min. Hopping Channel Carrier Frequency Separation, Average Time of Occupancy

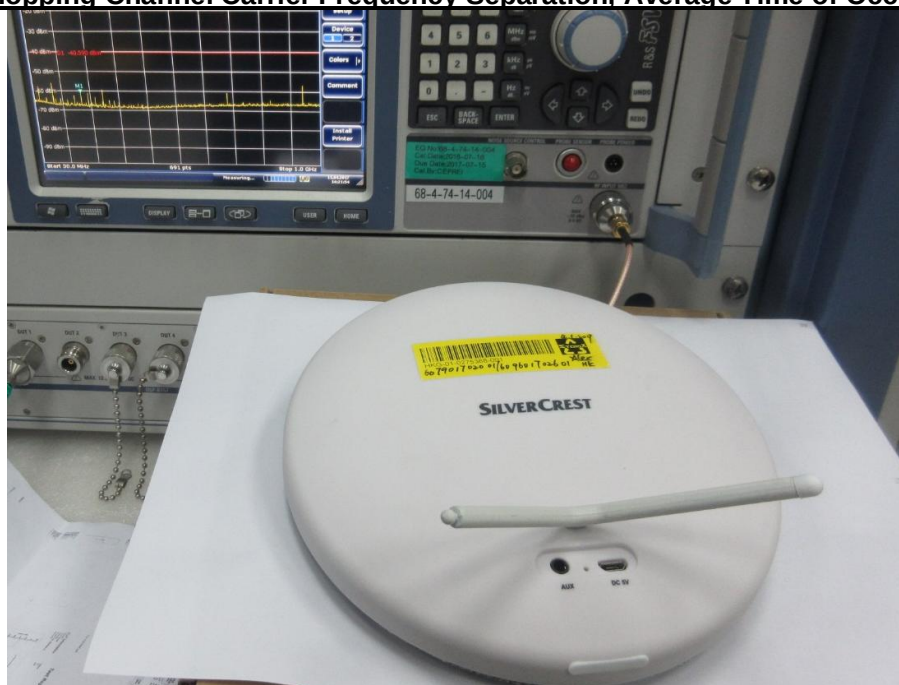

10 Appendix C - General Product Information

Radiofrequency radiation exposure evaluation

According to KDB 447498 D01v06 section 4.3.1, For frequencies between 100 MHz to 6GHz and test separation distances ≤ 50 mm, the Numeric threshold is determined as

Step a)

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR

>> The fundamental frequency of the EUT is 2402-2480MHz,
the test separation distance is ≤ 50 mm.
(Manufacturer specified the separation distance is: 5mm)

Step a)

>> Numeric threshold (2402MHz), $\text{mW} / 5\text{mm} \cdot \sqrt{2.402\text{GHz}} \leq 3.0$
Numeric threshold (2402MHz) $\leq 9.678\text{mW}$

>> Numeric threshold (2440MHz), $\text{mW} / 5\text{mm} \cdot \sqrt{2.441\text{GHz}} \leq 3.0$
Numeric threshold (2440MHz) $\leq 9.601\text{mW}$

>> Numeric threshold (2480MHz), $\text{mW} / 5\text{mm} \cdot \sqrt{2.480\text{GHz}} \leq 3.0$
Numeric threshold (2480MHz) $\leq 9.525\text{mW}$

>> The power of EUT measured (2402MHz) is: $-6.22\text{dBm} = 0.239\text{mW}$
The power of EUT measured (2440MHz) is: $-6.05\text{dBm} = 0.248\text{mW}$
The power of EUT measured (2480MHz) is: $-5.87\text{dBm} = 0.259\text{mW}$
Which is smaller than the Numeric threshold.
Therefore, the device is exempt from stand-alone SAR test requirements.

Appendix C



LIDL US LLC, 3500 S Clark Street, Arlington, VA 22202

To: TÜV SÜD HKG Ltd.

Attention: **Mr. Edmond Fung**

From: **David Matter**

Fax No:

Date: April 12, 2017

Total Page (Cover Included): 1

Declaration Letter

Subject:

We:

Officially notify TÜV SÜD HKG Ltd. that the <<Additional Model>> have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction, with <<PRODUCT>>, <<Main Test Model>>. The difference lies only on different color of the different models.

<<Additional Model >>: HG02429B

<<Main Test Model >>: HG02429A

<<Product>>: Bluetooth Speaker

Applicant:

04/12/2017

(Date)

Matter Digitally signed by Matter
DN: cn=Matter, o=LIDL, ou=LLC,
email=david.matter@lidl.us, c=US
Date: 2017.04.05 19:23:56 -04'00'

(Applicant's authorized signature and company Chop)