

FCC Test Report

Product Name	Klipsch Heritage Wireless TableTop Bluetooth Small
Model No.	the Three
FCC ID.	2AJAATHETHREE

Applicant	DONGGUAN MEILOON ACOUSTIC EQUIPMENTS CO., LTD.
Address	77, Yuanlin Road, Fenghuanggang Ind. Estate, Tangxia Town, Guangdong Province, Dongguan City, 523727, China

Date of Receipt	Aug. 18, 2016
Issued Date	Oct. 26, 2016
Report No.	1680410R-RFUSP23V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report

Issued Date: Oct. 26, 2016

Report No.: 1680410R-RFUSP23V00



Product Name	Klipsch Heritage Wireless TableTop Bluetooth Small
Applicant	DONGGUAN MEILOON ACOUSTIC EQUIPMENTS CO., LTD.
Address	77, Yuanlin Road, Fenghuanggang Ind. Estate, Tangxia Town, Guangdong Province, Dongguan City, 523727, China
Manufacturer	Klipsch Group, Inc.
Model No.	the Three
FCC ID.	2AJAATHETHREE
EUT Rated Voltage	AC 100-240V~50/60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	Klipsch
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2015 ANSI C63.4: 2014, ANSI C63.10: 2013 KDB 558074 D01 DTS Meas Guidance v03r05
Test Result	Complied

Documented By :

Joanne Lin

(Senior Adm. Specialist / Joanne Lin)

Tested By :

Bruce Lan

(Assistant Engineer / Bruce Lan)

Approved By :

Vincent Lin

(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description	5
1.2. Operational Description	7
1.3. Tested System Details	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
1.7. List of Test Equipment	10
2. CONDUCTED EMISSION	11
2.1. Test Setup	11
2.2. Limits	12
2.3. Test Procedure	12
2.4. Uncertainty	12
2.5. Test Result of Conducted Emission	13
3. PEAK POWER OUTPUT	15
3.1. Test Setup	15
3.2. Limit	15
3.3. Test Procedure	15
3.4. Uncertainty	15
3.5. Test Result of Peak Power Output	16
4. RADIATED EMISSION	18
4.1. Test Setup	18
4.2. Limits	19
4.3. Test Procedure	20
4.4. Uncertainty	20
4.5. Test Result of Radiated Emission	21
5. RF ANTENNA CONDUCTED TEST	29
5.1. Test Setup	29
5.2. Limits	29
5.3. Test Procedure	29
5.4. Uncertainty	29
5.5. Test Result of RF Antenna Conducted Test	30
6. BAND EDGE	32
6.1. Test Setup	32
6.2. Limit	32
6.3. Test Procedure	33
6.4. Uncertainty	33
6.5. Test Result of Band Edge	34
7. CHANNEL NUMBER	46
7.1. Test Setup	46
7.2. Limit	46
7.3. Test Procedure	46
7.4. Uncertainty	46
7.5. Test Result of Channel Number	47
8. CHANNEL SEPARATION	49
8.1. Test Setup	49
8.2. Limit	49
8.3. Test Procedure	49
8.4. Uncertainty	49
8.5. Test Result of Channel Separation	50
9. DWELL TIME	54
9.1. Test Setup	54
9.2. Limit	54
9.3. Test Procedure	54
9.4. Uncertainty	54
9.5. Test Result of Dwell Time	55
10. OCCUPIED BANDWIDTH	59
10.1. Test Setup	59

10.2.	Limits.....	59
10.3.	Test Procedure	59
10.4.	Uncertainty	59
10.5.	Test Result of Occupied Bandwidth	60
11.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	64
Attachment 1: EUT Test Photographs		
Attachment 2: EUT Detailed Photographs		

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Klipsch Heritage Wireless TableTop Bluetooth Small
Trade Name	Klipsch
Model No.	the Three
FCC ID.	2AJAATHETHREE
Frequency Range	2402-2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	IFA Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
Contain Module	Fihonest / JS-BTM513

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Meiloon	N/A	IFA	0.5dBi for 2.4 GHz

Note:

The antenna of EUT conforms to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is a Klipsch Heritage Wireless TableTop Bluetooth Small with a built-in Bluetooth V3.0, V2.1+EDR transceiver, this report for Bluetooth V3.0, V2.1+EDR.
2. The WLAN module of EUT has been made in FCC ID:2AAWQ-CAPRICA2L.
3. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
4. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test
5. Bluetooth operation was evaluated at both 1Mb/s and 3Mb/s data rates. 2Mb/s data rate was found, through pre-testing, to produce emissions similar to those for 3Mb/s.

Test Mode	Mode 1: Transmit - 1Mbps (GFSK) Mode 2: Transmit - 3Mbps (8DPSK)
-----------	---


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	Latitude E5440	HG26TZ1	Non-Shielded, 0.8m
2 Test Fixture	CSR	N/A	N/A	N/A
3 iPod nano	Apple	A1199	5U7047U8VQ5	N/A
4 DVD PLAYER	Pioneer	DV-600AV	GJKD006482LS	Non-Shielded, 0.8m

Signal Cable Type	Signal cable Description
A USB Cable	Shielded, 0.8m
B Signal Cable	Non-Shielded, 0.5m
C USB Cable	Shielded, 1m
D USB Cable	Shielded, 1.5m
E Audio Cable	Non-Shielded, 1m
F RCA Cable	Non-Shielded, 1.8m

1.4. Configuration of Tested System

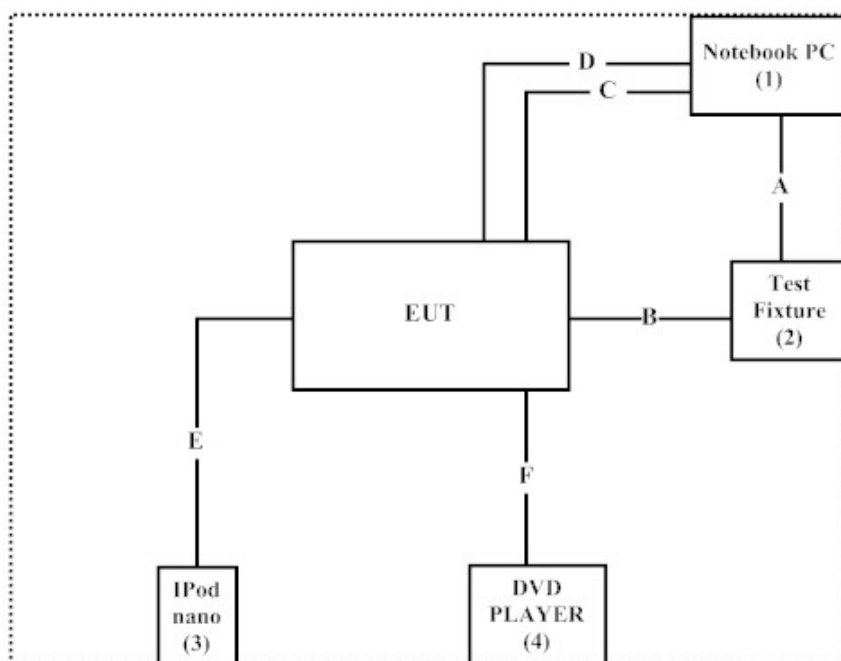

1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software "Blue Test v2.5.0" on the Notebook PC.
3. Configure the test mode, the test channel, and the data rate.
4. Press "OK" to start the continuous Transmit.
5. Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site: <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>
The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site: <http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng,
Linkou Dist. New Taipei City 24451,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

1.7. List of Test Equipment

For Conducted measurements /CB3

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
	Temperature Chamber	WIT GROUP	TH-1S-B	EQ-201-0014	2016/10/1	2017/9/29
X	Spectrum Analyzer	Agilent	N9010A	MY48030495	2016/7/22	2017/7/21
	Power Meter	Anritsu	ML2495A	6K00003357	2016/6/23	2017/6/22
X	Power Sensor	Agilent	U2021XA	MY53400007	2015/11/26	2016/11/24
X	Power Sensor	Agilent	U2021XA	MY53400006	2015/11/26	2016/11/24
X	Power Sensor	Agilent	U2021XA	MY53360005	2015/11/26	2016/11/24
X	Power Sensor	Agilent	U2021XA	MY53400008	2015/11/26	2016/11/24
	Signal Generator	Agilent	N5182B	MY53050685	2016/5/31	2017/5/30
	Analog Signal Geator	Agilent	E8257DK/E825	MY44320633	2016/9/13	2017/9/12


For Radiated measurements /Site3/CB10/CB8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSP40	100170	2016/1/5	2017/1/3
	Loop Antenna	TESEQ	HLA6121	37133	2016/3/18	2017/3/17
X	Bi-Log Antenna	Schaffner Chase	CBL6112B	2707	2016/6/11	2017/6/10
X	Horn Antenna	ETS-Lindgren	3117	00203761	2015/10/15	2016/10/13
	Horn Antenna	Schwarzbeck	BBHA9170	209	2016/4/14	2017/4/13
X	Pre-Amplifier	QuieTek	QTK-LK-E-I-A	N/A	2016/6/16	2017/6/15
X	Pre-Amplifier	EMCI	EMC012630SE	980210	2016/1/26	2017/1/24
X	Filter	MicroTRON	BRM50701	019	2015/10/20	2016/10/18
	Filter	Microwave Circuits	N0257881	36681	2015/12/7	2016/12/5
X	EMI Test Receiver	R&S	ESCS 30	838251/001	2016/7/21	2017/7/20
X	Coaxial Cable	QTK(Arnist)	RG 214	LC003-RG	2016/6/16	2017/6/15
X	Coaxial signal switch	Anritsu	MP59B	6201415889	2016/6/16	2017/6/15

- Note:
- All equipments are calibrated every one year.
- The test instruments marked with "X" are used to measure the final test results.
- Test Software version : QuieTek EMI 2.0 V2.1.113

2. Conducted Emission

2.1. Test Setup

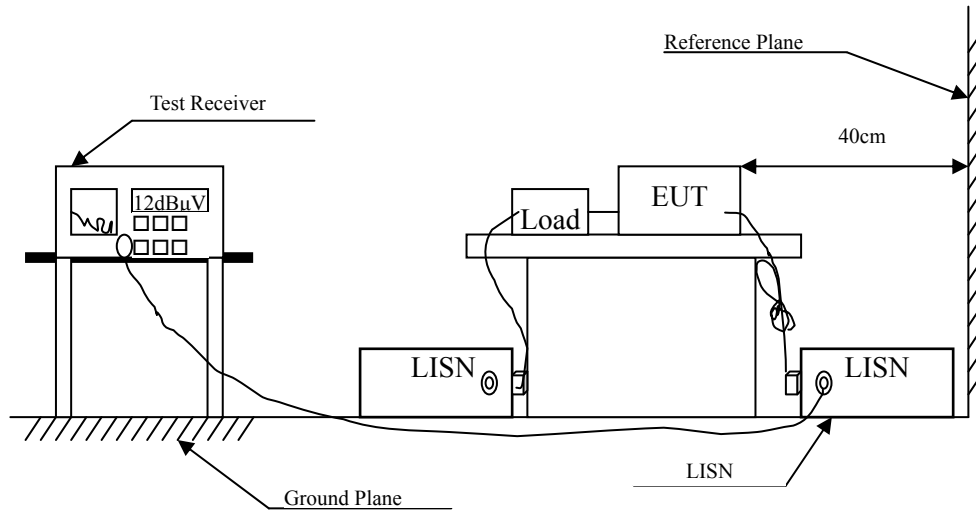

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

2.4. Uncertainty

± 2.26 dB

2.5. Test Result of Conducted Emission

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test date : 2016/10/13
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V	Margin dB	Limit dB μ V
LINE 1					
Quasi-Peak					
0.154	9.687	38.660	48.346	-17.540	65.886
0.486	9.675	25.090	34.765	-21.635	56.400
1.084	9.704	11.830	21.534	-34.466	56.000
11.701	9.916	29.490	39.406	-20.594	60.000
15.537	9.962	21.940	31.902	-28.098	60.000
20.224	10.032	17.930	27.962	-32.038	60.000
Average					
0.154	9.687	22.640	32.326	-23.560	55.886
0.486	9.675	17.000	26.675	-19.725	46.400
1.084	9.704	3.360	13.064	-32.936	46.000
11.701	9.916	8.600	18.516	-31.484	50.000
15.537	9.962	4.940	14.902	-35.098	50.000
20.224	10.032	2.710	12.742	-37.258	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Conducted Emission Test
Power Line : Line 2
Test date : 2016/10/13
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)


Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V	dB	dB μ V
LINE 2					
Quasi-Peak					
0.150	9.734	39.040	48.774	-17.226	66.000
0.236	9.737	24.460	34.197	-29.346	63.543
0.498	9.746	23.500	33.246	-22.811	56.057
10.236	9.989	16.330	26.319	-33.681	60.000
12.291	10.032	23.660	33.692	-26.308	60.000
13.931	10.070	23.590	33.660	-26.340	60.000
Average					
0.150	9.734	23.060	32.794	-23.206	56.000
0.236	9.737	11.900	21.637	-31.906	53.543
0.498	9.746	15.960	25.706	-20.351	46.057
10.236	9.989	8.020	18.009	-31.991	50.000
12.291	10.032	22.980	33.012	-16.988	50.000
13.931	10.070	4.980	15.050	-34.950	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

3.1. Test Setup

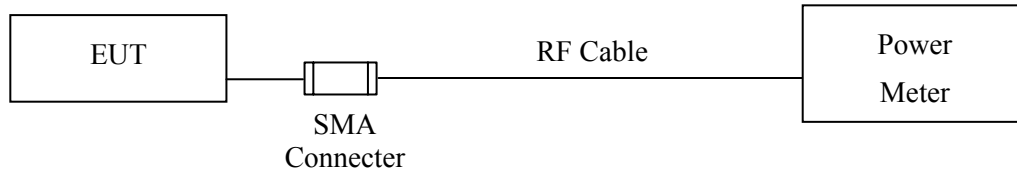

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

3.4. Uncertainty

± 1.19 dB

3.5. Test Result of Peak Power Output

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
 Test Item : Peak Power Output
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	5.23	1 Watt= 30 dBm	Pass
Channel 39	2441.00	5.47	1 Watt= 30 dBm	Pass
Channel 78	2480.00	5.26	1 Watt= 30 dBm	Pass


Product : Klipsch Heritage Wireless TableTop Bluetooth Small
 Test Item : Peak Power Output
 Test Site : No.3 OATS
 Test date : 2016/10/13
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	6.59	1 Watt= 20.97 dBm	Pass
Channel 39	2441.00	6.57	1 Watt= 20.97 dBm	Pass
Channel 78	2480.00	6.16	1 Watt= 20.97 dBm	Pass


4. Radiated Emission

4.1. Test Setup

Below 1GHz

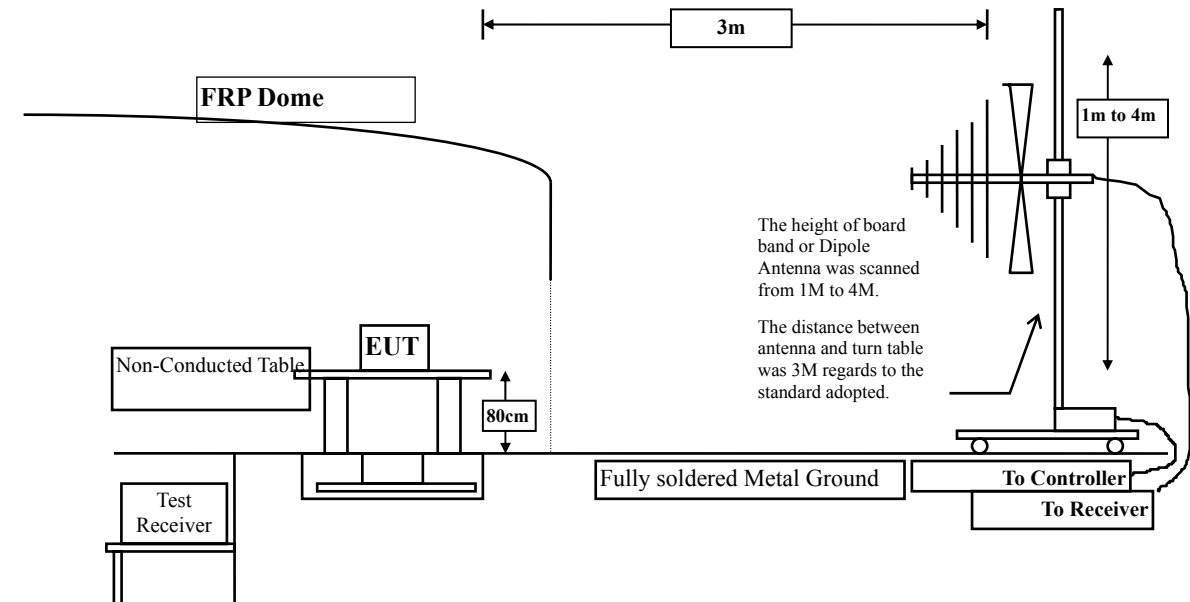

Above 1GHz

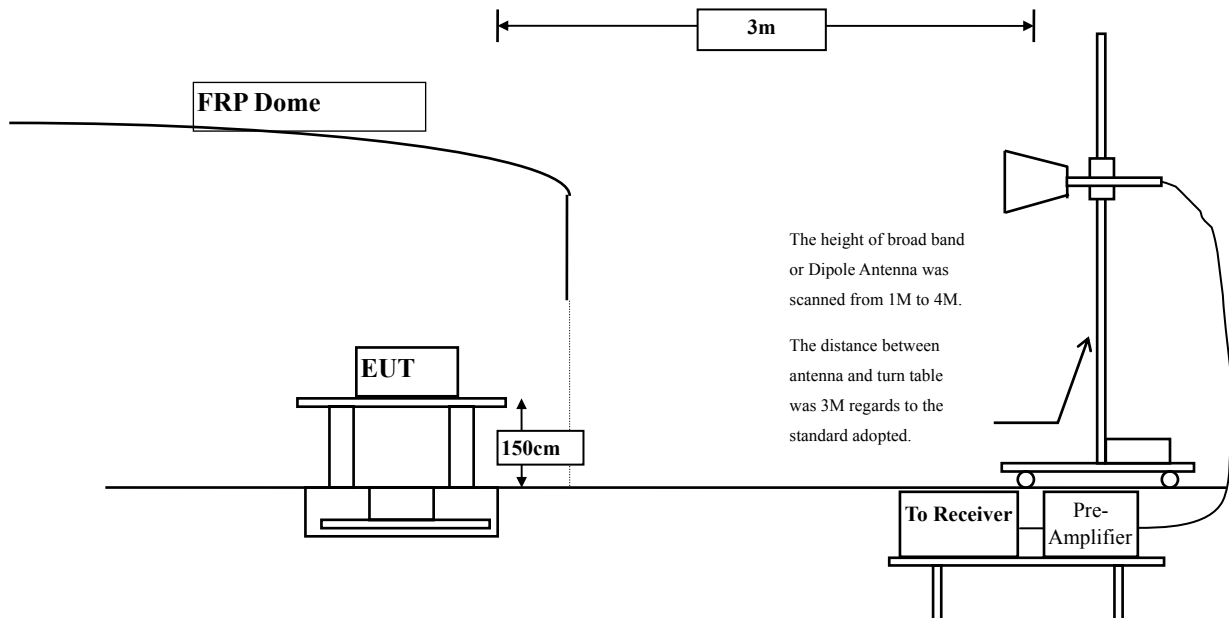

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBμV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks:
1. RF Voltage (dBμV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

4.5. Test Result of Radiated Emission

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Harmonic Radiated Emission
Test Site : No.3 OATS
Test date : 2016/10/13
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector:					
4804.000	2.511	42.680	45.190	-28.810	74.000
7206.000	9.511	40.130	49.641	-24.359	74.000
9608.000	10.394	38.710	49.104	-24.896	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4804.000	2.923	43.100	46.022	-27.978	74.000
7206.000	9.988	39.490	49.479	-24.521	74.000
9608.000	10.847	38.250	49.097	-24.903	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Harmonic Radiated Emission
Test Site : No.3 OATS
Test date : 2016/10/13
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector:					
4882.000	2.025	42.350	44.375	-29.625	74.000
7323.000	9.762	40.160	49.921	-24.079	74.000
9764.000	9.682	37.770	47.451	-26.549	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4882.000	2.488	42.530	45.018	-28.982	74.000
7323.000	10.375	39.830	50.204	-23.796	74.000
9764.000	10.315	38.260	48.575	-25.425	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Harmonic Radiated Emission
Test Site : No.3 OATS
Test date : 2016/10/13
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level	dB	dBμV/m
	dB	dBμV	dBμV/m		

Horizontal

Peak Detector:

4960.000	2.582	42.240	44.822	-29.178	74.000
7440.000	10.555	38.940	49.495	-24.505	74.000
9920.000	10.206	37.900	48.106	-25.894	74.000

Average

Detector:

--

Vertical

Peak Detector:

4960.000	3.398	43.820	47.219	-26.781	74.000
7440.000	11.214	39.820	51.034	-22.966	74.000
9920.000	11.245	38.370	49.615	-24.385	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Harmonic Radiated Emission
Test Site : No.3 OATS
Test date : 2016/10/13
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)(2402MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4804.000	2.511	41.270	43.780	-30.220	74.000
7206.000	9.511	37.680	47.191	-26.809	74.000
9608.000	10.394	37.920	48.314	-25.686	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4804.000	2.923	40.650	43.572	-30.428	74.000
7206.000	9.988	37.900	47.889	-26.111	74.000
9608.000	10.847	38.150	48.997	-25.003	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2016/10/13
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector:					
4882.000	2.025	41.110	43.135	-30.865	74.000
7323.000	9.762	38.380	48.141	-25.859	74.000
9764.000	9.682	38.030	47.711	-26.289	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4882.000	2.488	40.220	42.708	-31.292	74.000
7323.000	10.375	37.700	48.074	-25.926	74.000
9764.000	10.315	37.580	47.895	-26.105	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Harmonic Radiated Emission
Test Site : No.3 OATS
Test date : 2016/10/13
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level	dB	dBμV/m
	dB	dBμV	dBμV/m		

Horizontal

Peak Detector:

4960.000	2.582	40.850	43.432	-30.568	74.000
7440.000	10.555	38.240	48.795	-25.205	74.000
9920.000	10.206	38.120	48.326	-25.674	74.000

Average

Detector:

--

Vertical

Peak Detector:

4960.000	3.398	40.200	43.599	-30.401	74.000
7440.000	11.214	37.880	49.094	-24.906	74.000
9920.000	11.245	38.590	49.835	-24.165	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test date : 2016/10/13
Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
174.797	-9.622	44.697	35.075	-8.425	43.500
254.928	-5.423	45.694	40.272	-5.728	46.000
384.261	1.255	38.191	39.446	-6.554	46.000
558.580	2.348	31.729	34.077	-11.923	46.000
717.435	3.813	28.365	32.177	-13.823	46.000
797.565	6.398	29.908	36.306	-9.694	46.000
Vertical					
100.290	-5.949	43.682	37.733	-5.767	43.500
254.928	-5.088	40.471	35.384	-10.616	46.000
391.290	-0.859	31.307	30.449	-15.551	46.000
499.536	-0.194	30.744	30.549	-15.451	46.000
717.435	-1.199	37.636	36.436	-9.564	46.000
834.116	1.550	34.455	36.006	-9.994	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test date : 2016/10/13
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)


Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
122.150	-7.303	40.897	33.594	-9.906	43.500
208.480	-10.485	46.006	35.520	-7.980	43.500
327.790	-4.488	45.484	40.996	-5.004	46.000
696.390	3.367	33.271	36.638	-9.362	46.000
797.270	6.393	27.123	33.517	-12.483	46.000
882.630	6.700	25.043	31.743	-14.257	46.000
Vertical					
108.570	-3.762	40.635	36.873	-6.627	43.500
202.660	-5.573	42.122	36.550	-6.950	43.500
337.490	-1.825	39.283	37.458	-8.542	46.000
455.830	-3.712	35.648	31.936	-14.064	46.000
608.120	2.175	29.757	31.932	-14.068	46.000
768.170	2.383	27.422	29.806	-16.194	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna Conducted Test

5.1. Test Setup

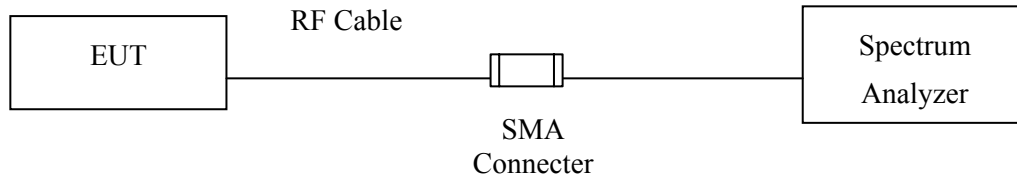

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

5.4. Uncertainty

$\pm 1.20\text{dB}$

5.5. Test Result of RF Antenna Conducted Test

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : RF Antenna Conducted Test
Test Site : No.3 OATS
Test date : 2016/10/13
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Figure Channel 00:

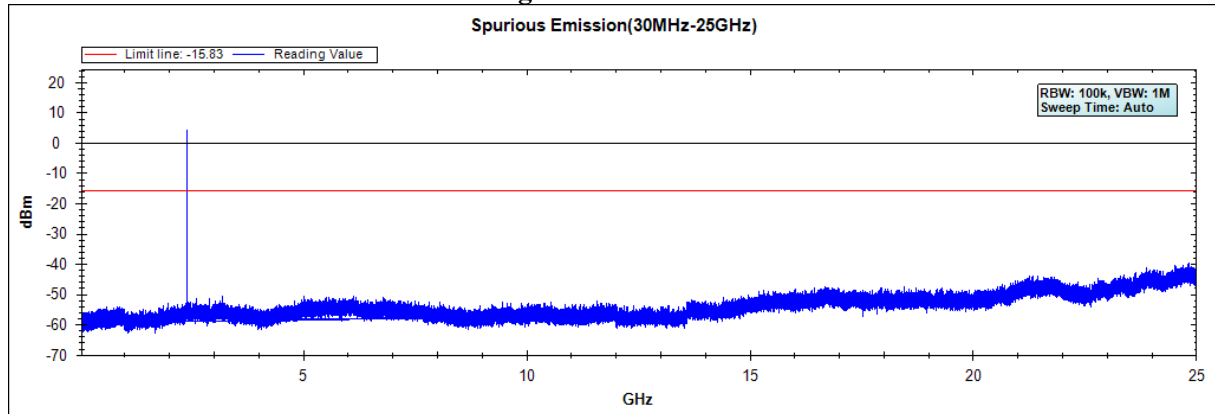


Figure Channel 39:


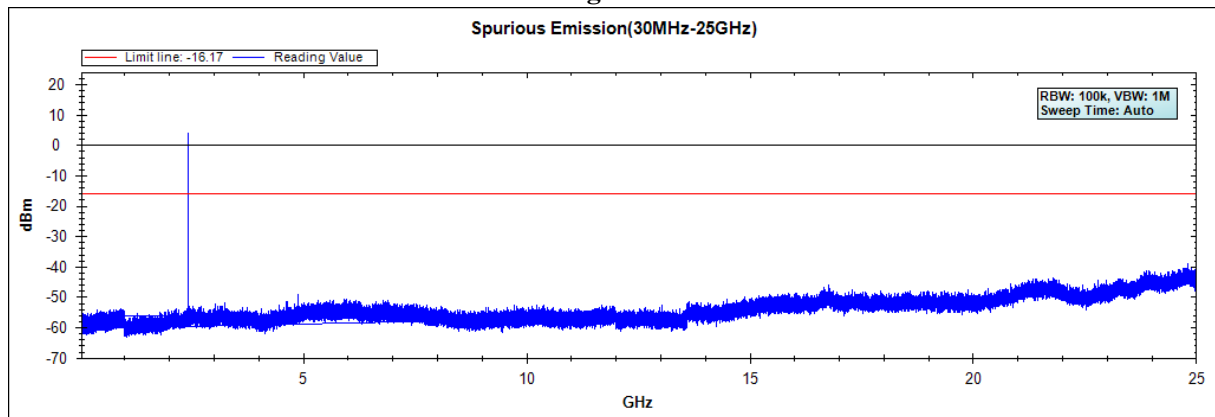


Figure Channel 78:

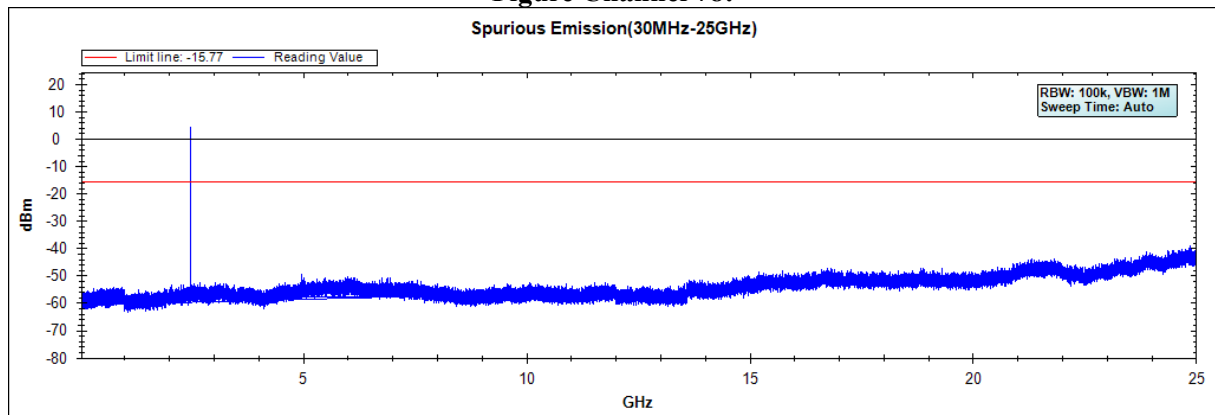

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : RF Antenna Conducted Test
Test Site : No.3 OATS
Test date : 2016/10/13
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Figure Channel 00:

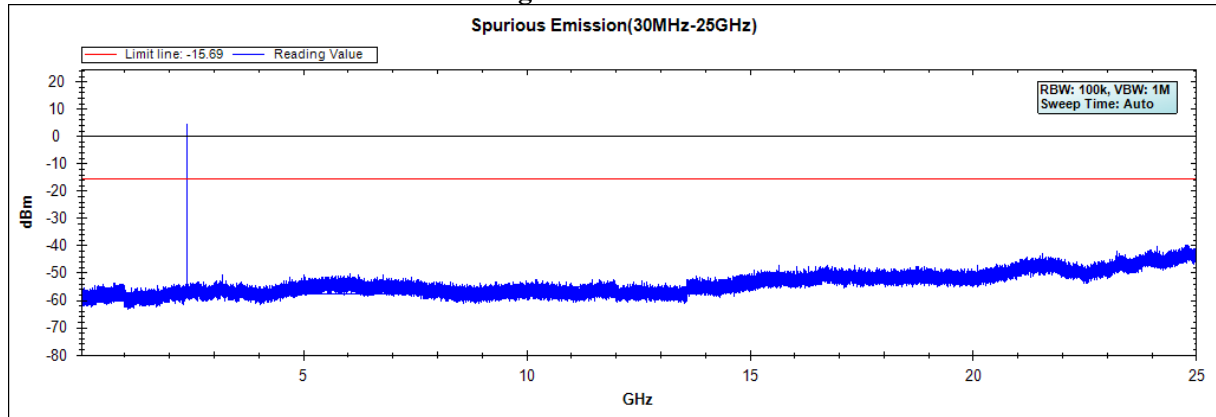


Figure Channel 39:


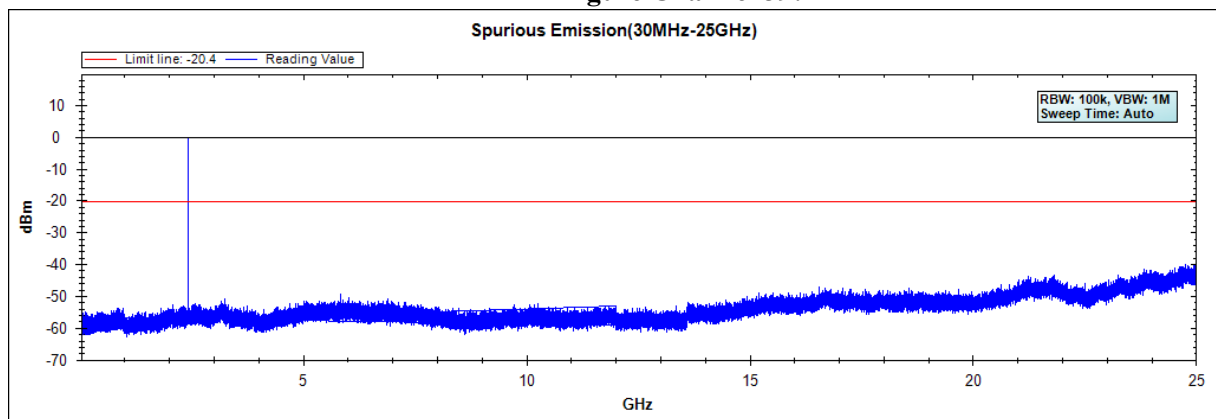


Figure Channel 78:

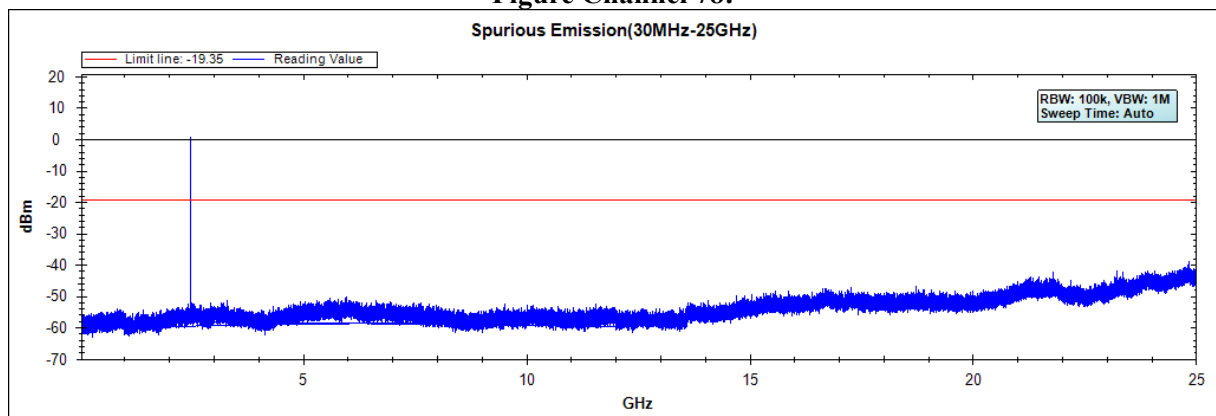


Note: The above test pattern is synthesized by multiple of the frequency range.

6. Band Edge


6.1. Test Setup

RF Radiated Measurement:

Above 1GHz

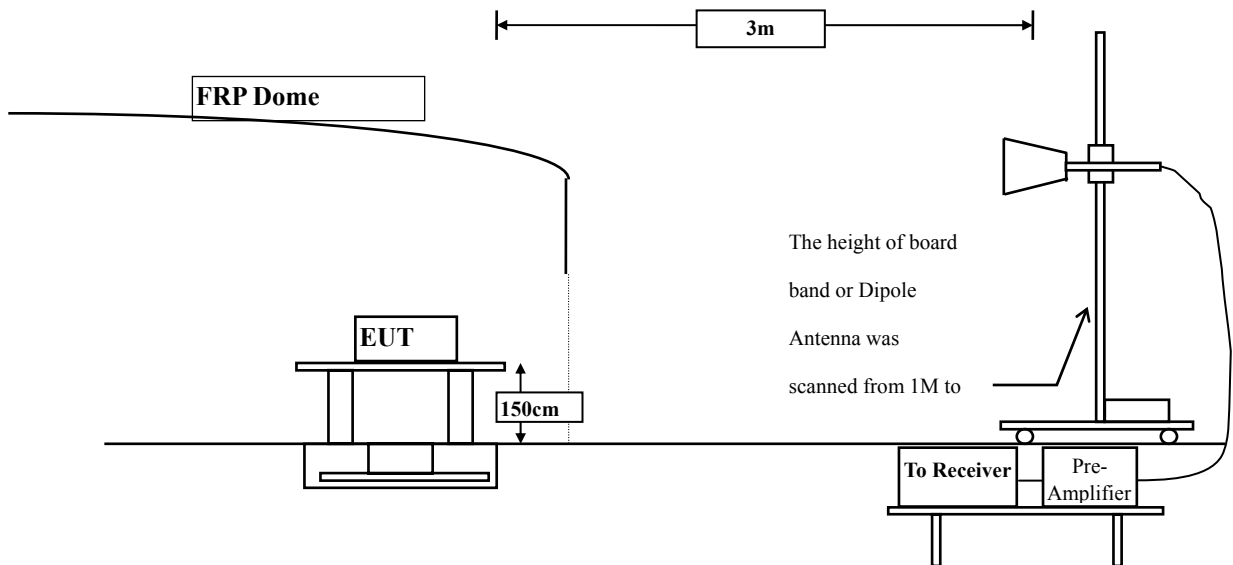

RF Conducted Measurement

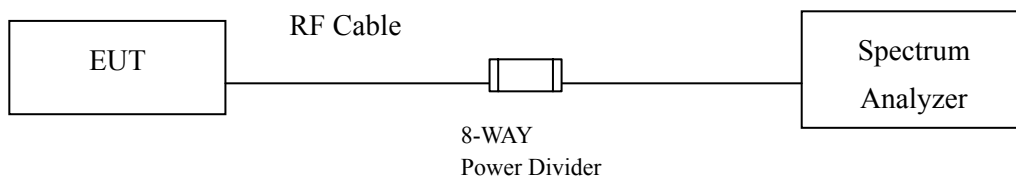

6.2. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

6.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

6.5. Test Result of Band Edge

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2016/10/13
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2375.942	-2.749	48.875	46.126	74.00	54.00	Pass
00 (Peak)	2390.000	-2.687	45.703	43.016	74.00	54.00	Pass
00 (Peak)	2400.000	-2.660	72.928	70.268	--	--	--
00 (Peak)	2402.174	-2.657	105.913	103.256	--	--	--
00 (Average)	2376.087	-2.748	39.689	36.940	74.00	54.00	Pass
00 (Average)	2390.000	-2.687	33.488	30.801	74.00	54.00	Pass
00 (Average)	2400.000	-2.660	53.779	51.119	--	--	--
00 (Average)	2402.029	-2.657	91.489	88.832	--	--	--

Figure Channel 00:

Horizontal (Peak)


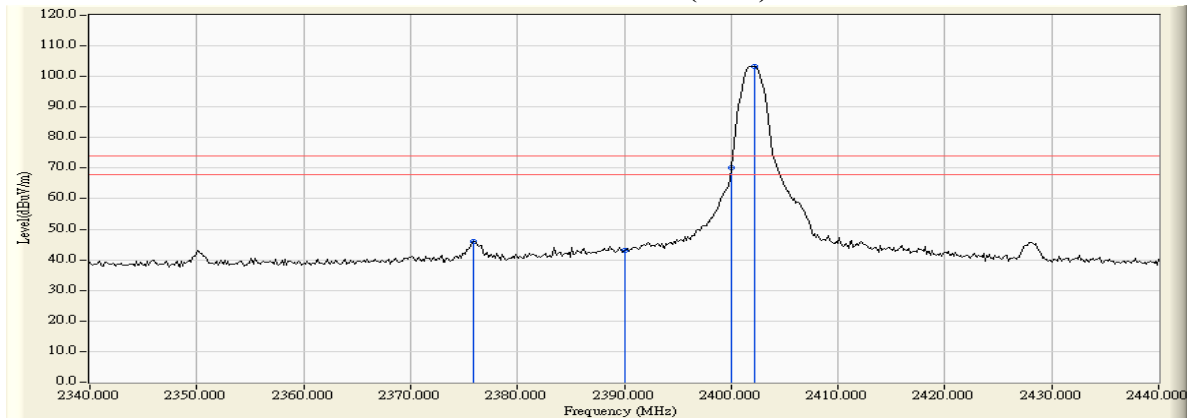


Figure Channel 00:

Horizontal (Average)

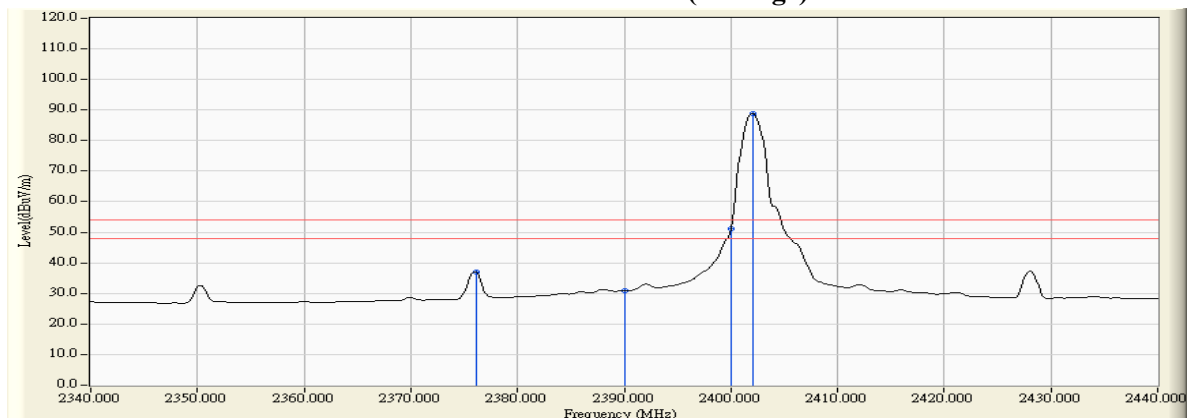

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2016/10/13
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2376.087	-4.112	47.380	43.268	74.00	54.00	Pass
00 (Peak)	2390.000	-4.159	45.680	41.521	74.00	54.00	Pass
00 (Peak)	2400.000	-4.171	71.020	66.849	--	--	--
00 (Peak)	2402.174	-4.171	103.639	99.468	--	--	--
00 (Average)	2376.087	-4.112	37.382	33.270	74.00	54.00	Pass
00 (Average)	2390.000	-4.159	32.194	28.035	74.00	54.00	Pass
00 (Average)	2400.000	-4.171	52.127	47.956	--	--	--
00 (Average)	2402.029	-4.171	88.238	84.067	--	--	--

Figure Channel 00:

VERTICAL (Peak)


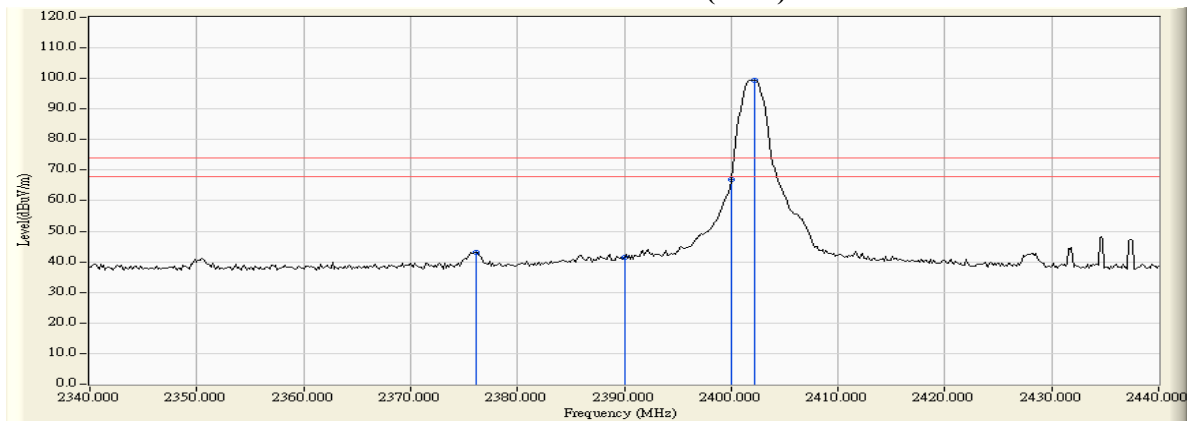


Figure Channel 00:

VERTICAL (Average)

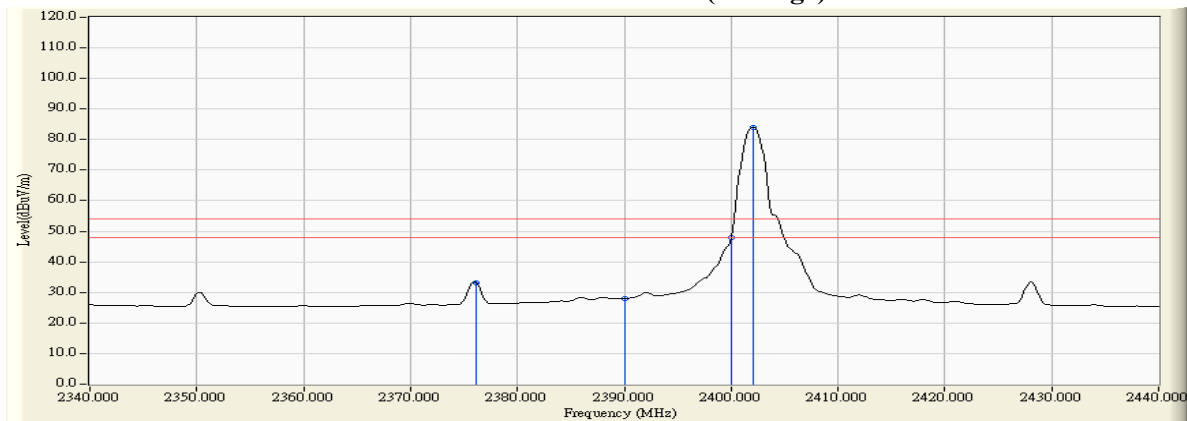

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * " , means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Band Edge
Test Site : No.3 OATS
Test date : 2016/10/13
Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2479.877	-2.605	104.887	102.282	--	--	Pass
78 (Peak)	2483.500	-2.601	55.679	53.077	74.00	54.00	Pass
78 (Average)	2480.022	-2.605	90.010	87.405	--	--	Pass
78 (Average)	2483.500	-2.601	40.817	38.215	74.00	54.00	Pass

Figure Channel 78:

Horizontal (Peak)


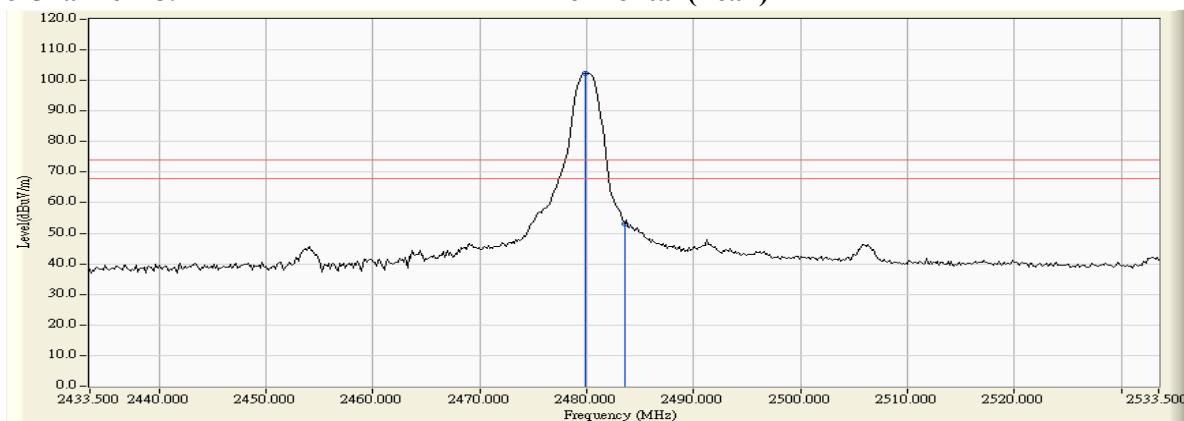


Figure Channel 78:

Horizontal (Average)

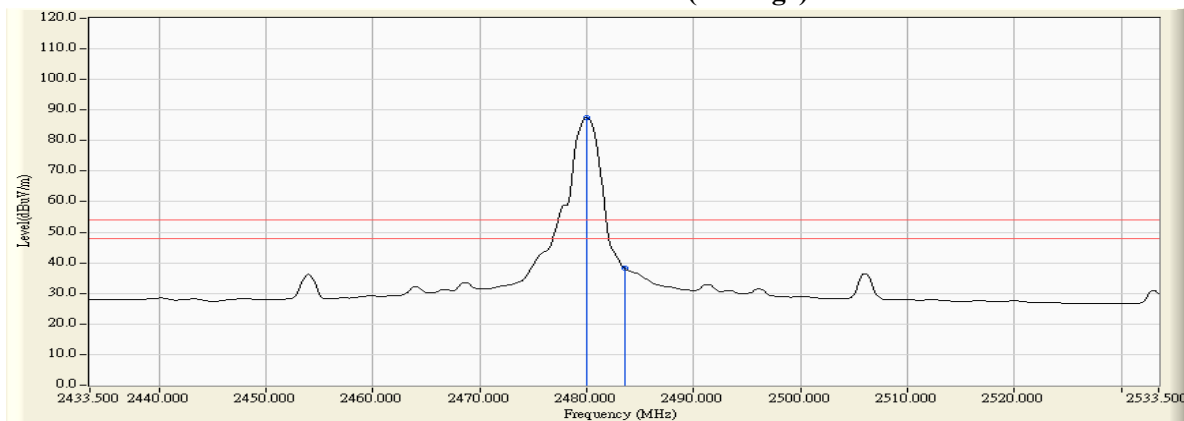

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2016/10/13
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2479.877	-3.978	101.605	97.627	--	--	Pass
78 (Peak)	2483.500	-3.966	52.659	48.692	74.00	54.00	Pass
78 (Average)	2479.877	-3.978	87.053	83.075	--	--	Pass
78 (Average)	2483.500	-3.966	38.481	34.514	74.00	54.00	Pass

Figure Channel 78:

VERTICAL (Peak)


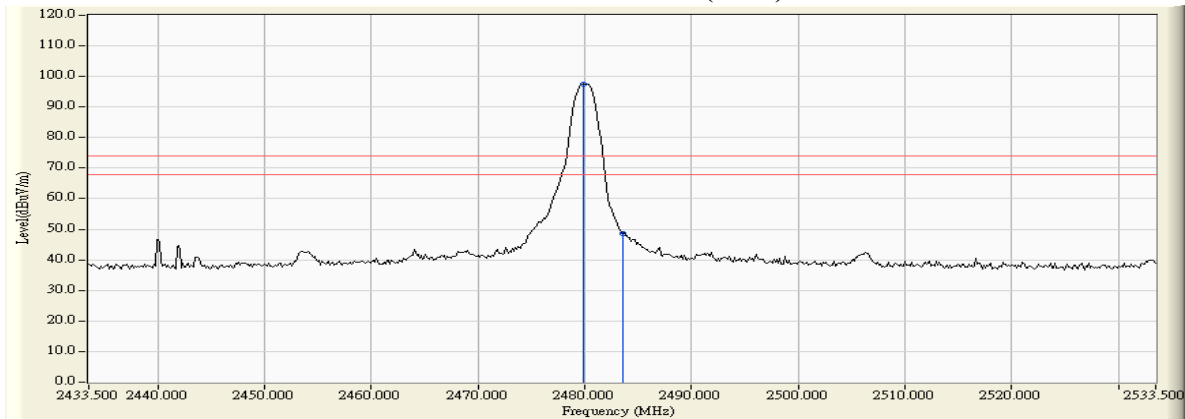


Figure Channel 78:

VERTICAL (Average)

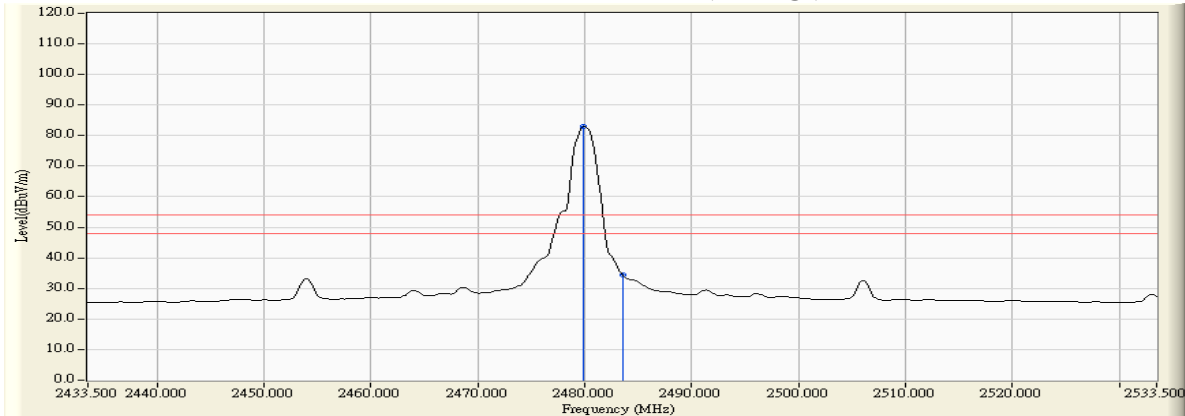

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Band Edge
Test Site : No.3 OATS
Test date : 2016/10/13
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2376.377	-2.748	46.809	44.062	74.00	54.00	Pass
00 (Peak)	2390.000	-2.687	45.957	43.270	74.00	54.00	Pass
00 (Peak)	2400.000	-2.660	77.234	74.574	74.00	54.00	Pass
00 (Peak)	2402.029	-2.657	104.538	101.881	--	--	--
00 (Average)	2376.087	-2.748	36.212	33.463	74.00	54.00	Pass
00 (Average)	2390.000	-2.687	32.943	30.256	74.00	54.00	Pass
00 (Average)	2400.000	-2.660	54.475	51.815	--	--	--
00 (Average)	2402.319	-2.657	85.768	83.111	--	--	--

Figure Channel 00: Horizontal (Peak)


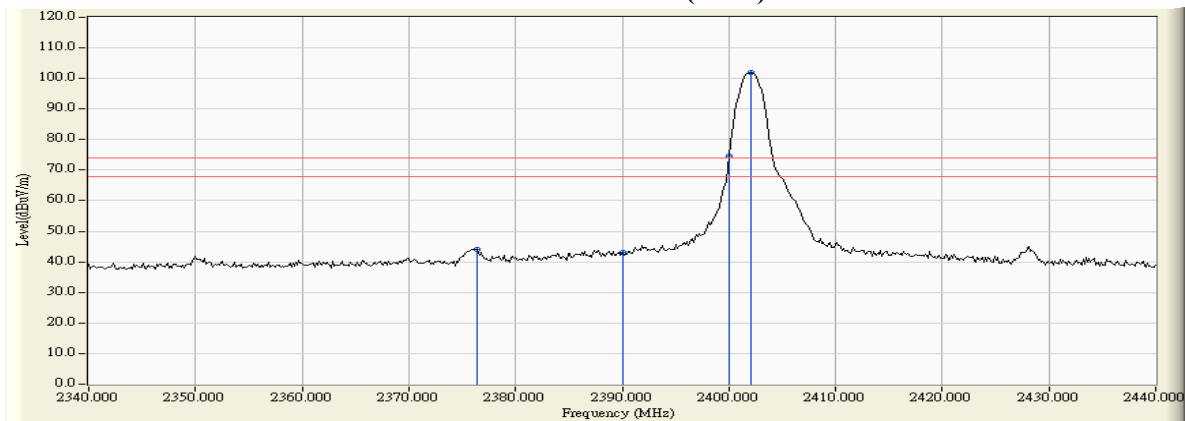


Figure Channel 00: Horizontal (Average)

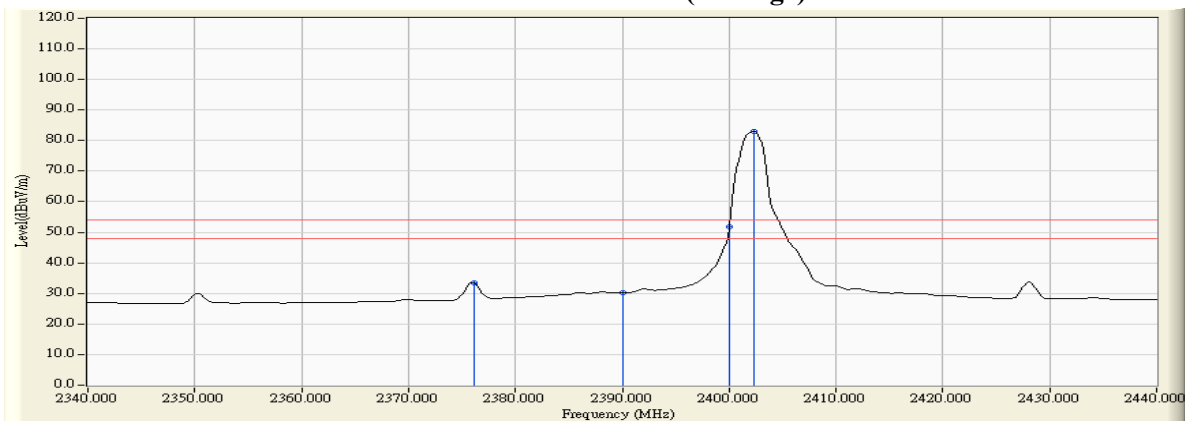

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2016/10/13
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2376.087	-4.112	46.480	42.368	74.00	54.00	Pass
00 (Peak)	2390.000	-4.159	45.276	41.117	74.00	54.00	Pass
00 (Peak)	2400.000	-4.171	75.051	70.880	74.00	54.00	Pass
00 (Peak)	2402.029	-4.171	101.960	97.789	--	--	--
00 (Average)	2375.942	-4.111	34.448	30.336	74.00	54.00	Pass
00 (Average)	2390.000	-4.159	31.868	27.709	74.00	54.00	Pass
00 (Average)	2400.000	-4.171	53.208	49.037	--	--	--
00 (Average)	2402.029	-4.171	84.637	80.466	--	--	--

Figure Channel 00:

VERTICAL (Peak)


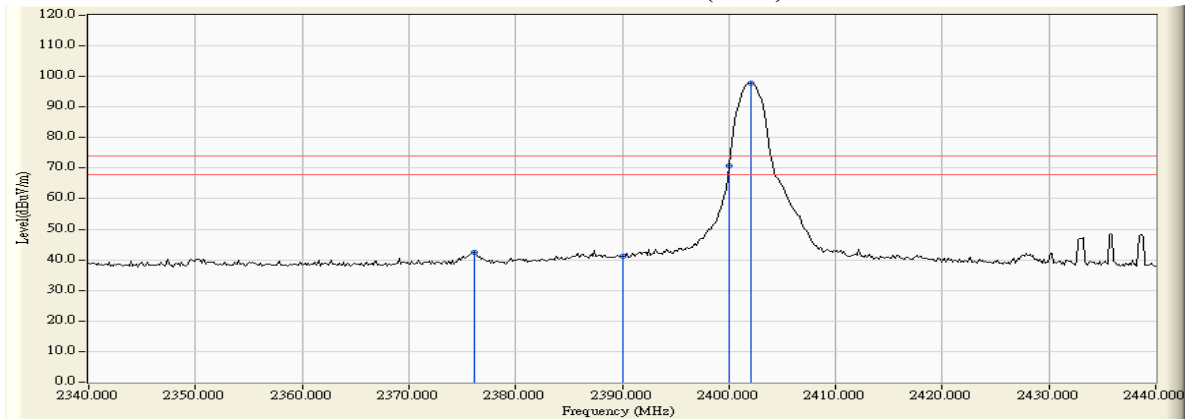


Figure Channel 00:

VERTICAL (Average)

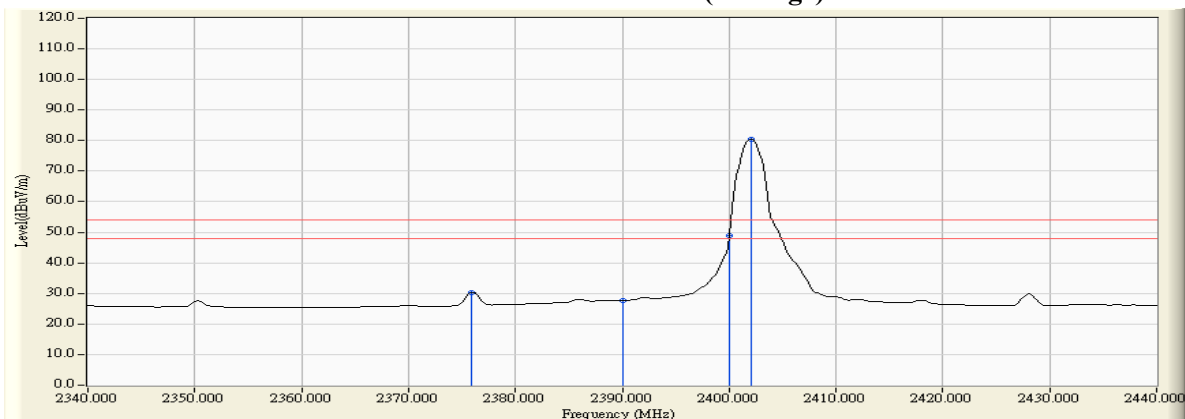

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2016/10/13
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2480.022	-2.605	102.848	100.243	--	--	Pass
78 (Peak)	2483.500	-2.601	54.189	51.587	74.00	54.00	Pass
78 (Average)	2479.877	-2.605	85.643	83.038	--	--	Pass
78 (Average)	2483.500	-2.601	39.328	36.726	74.00	54.00	Pass

Figure Channel 00:

Horizontal (Peak)


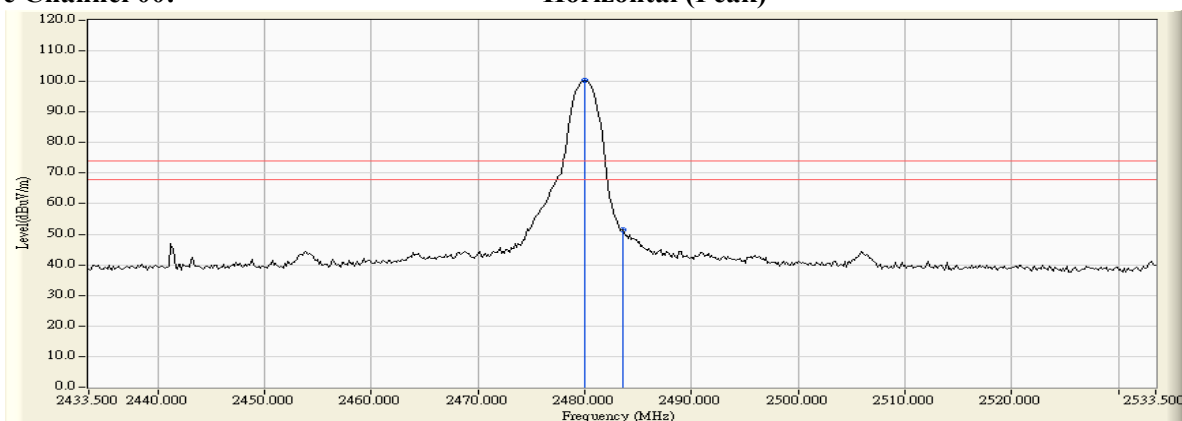


Figure Channel 00:

Horizontal (Average)

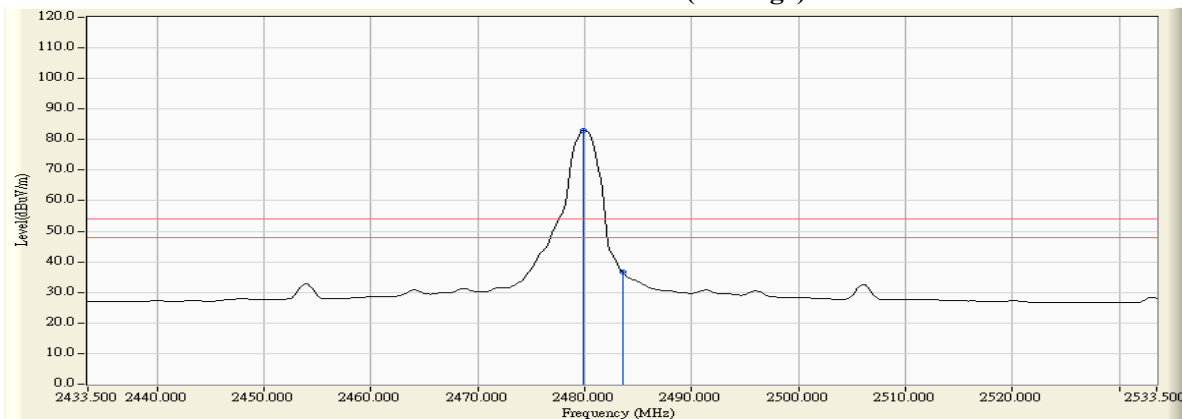

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Band Edge
Test Site : No.3 OATS
Test date : 2016/10/13
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2480.022	-3.978	99.576	95.598	--	--	Pass
78 (Peak)	2483.500	-3.966	51.256	47.289	74.00	54.00	Pass
78 (Average)	2479.877	-3.978	83.319	79.341	--	--	Pass
78 (Average)	2483.500	-3.966	36.829	32.862	74.00	54.00	Pass

Figure Channel 78:

VERTICAL (Peak)


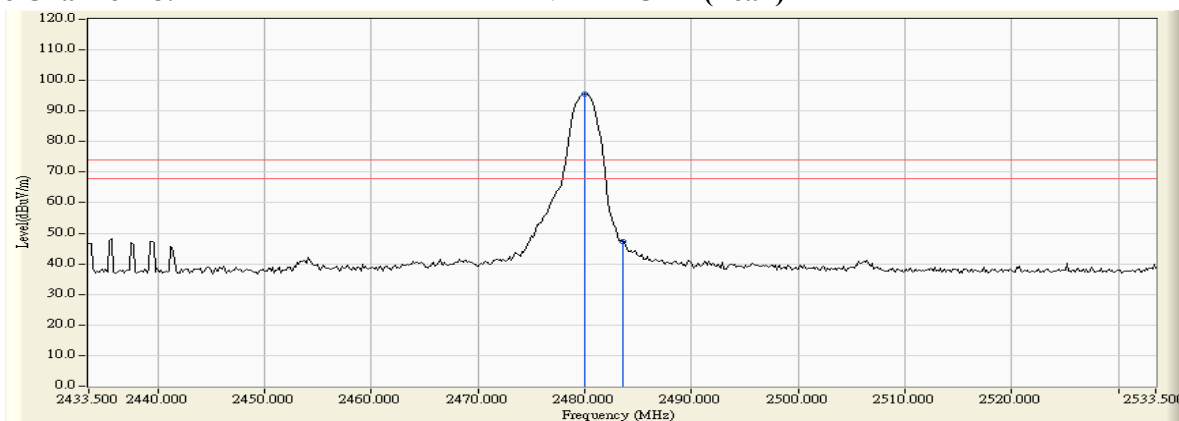


Figure Channel 78:

VERTICAL (Average)

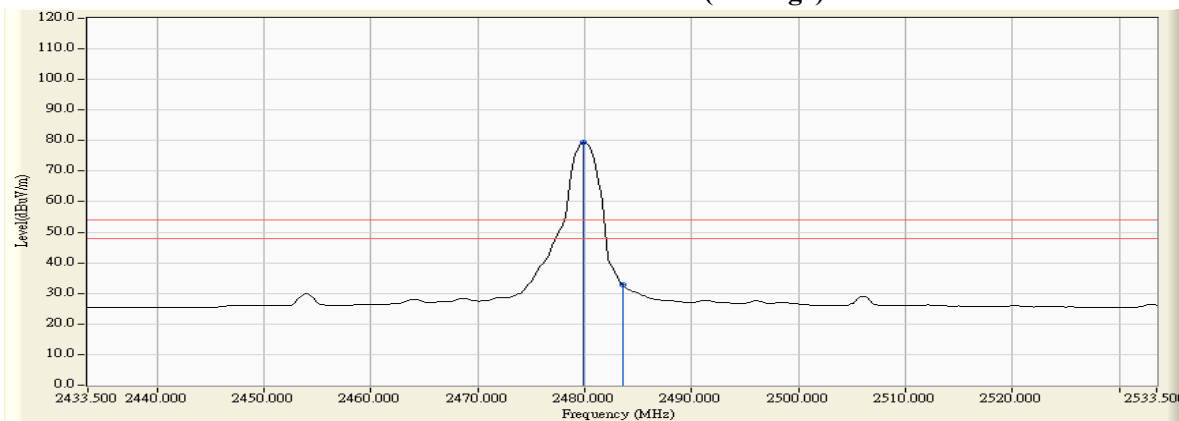

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Band Edge
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(Hopping off)

Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel 00:


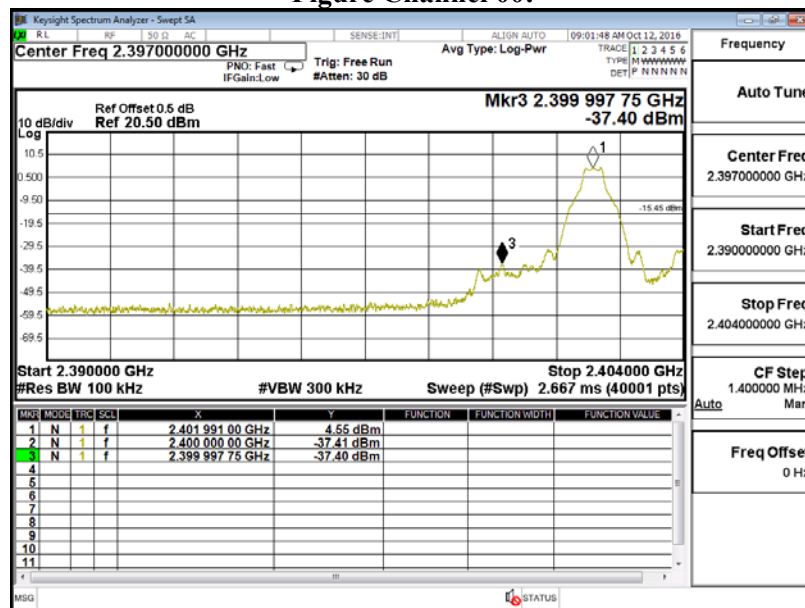


Figure Channel 78:

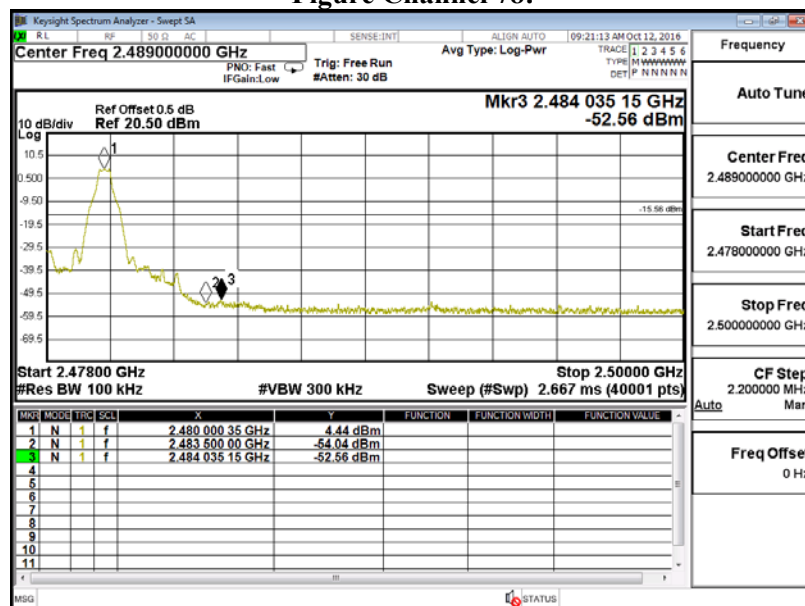

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Band Edge
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (Hopping off)

Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel 00:


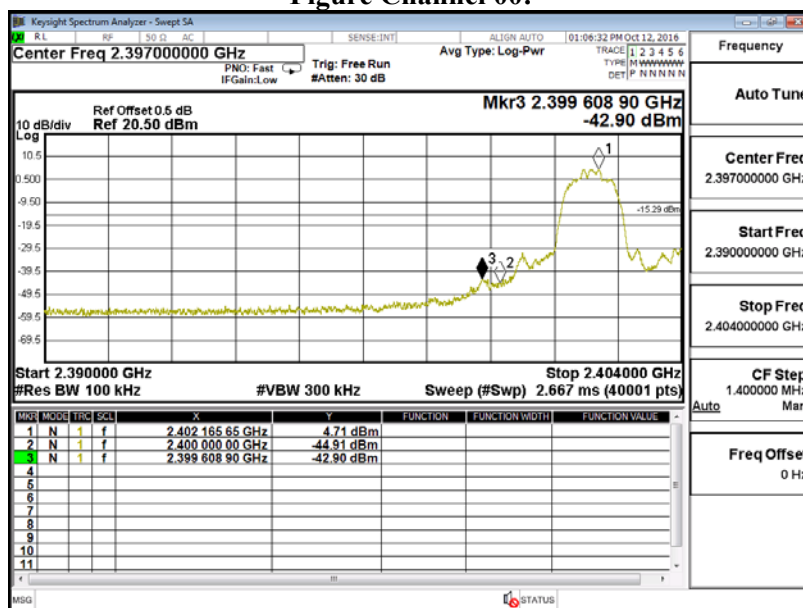


Figure Channel 78:

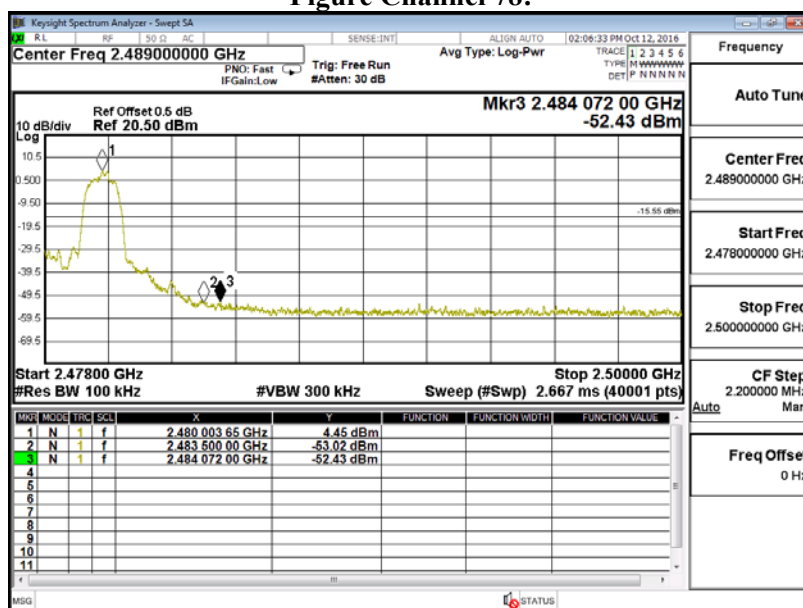

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Band Edge
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(Hopping on)

Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel 00 Hopping:


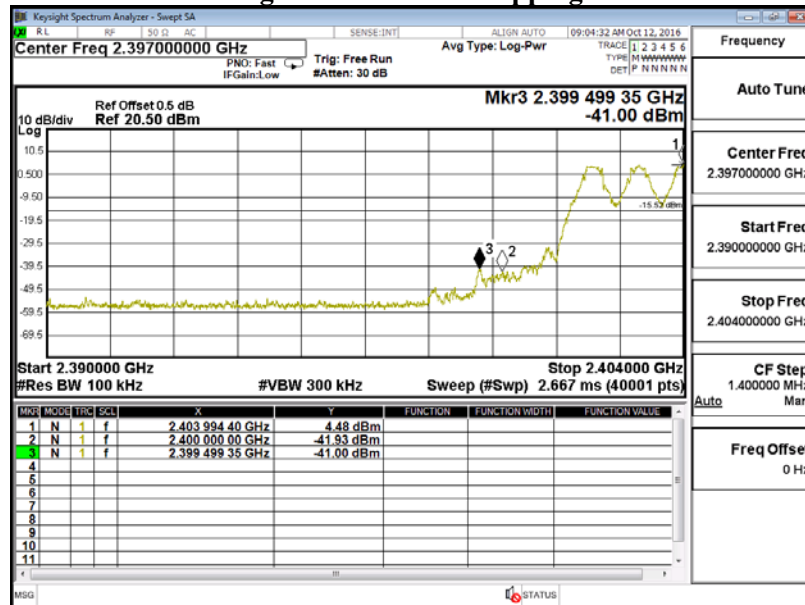


Figure Channel 78 Hopping:

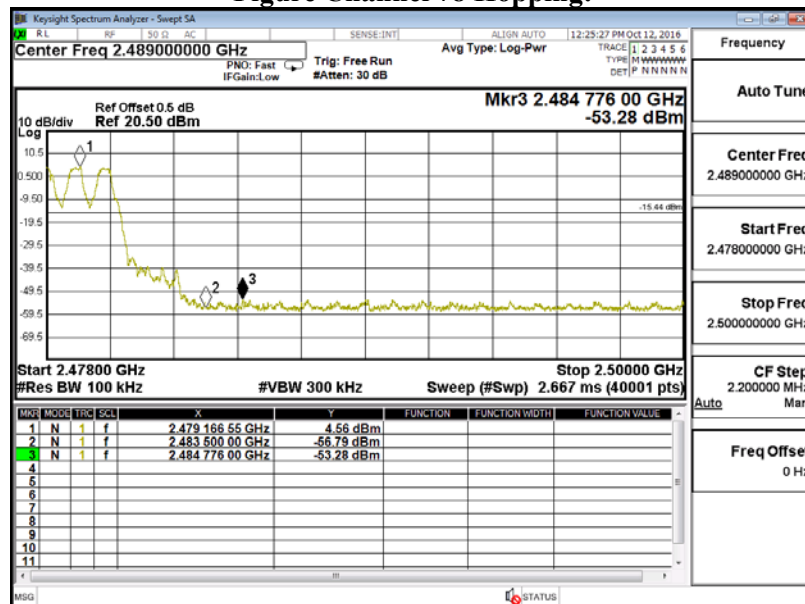

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Band Edge
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (Hopping on)

Measurement Level Δ (dB)	Result
> 20	PASS

Figure Channel 00 Hopping:



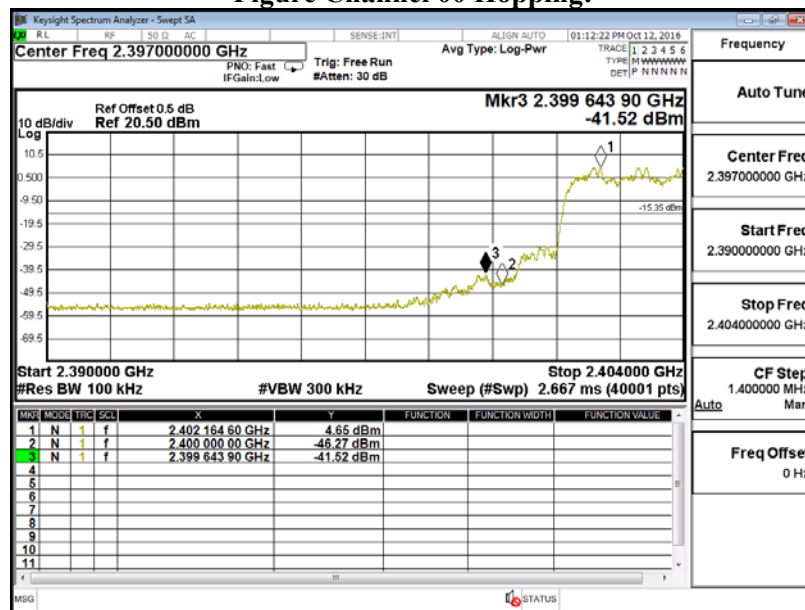


Figure Channel 78 Hopping:

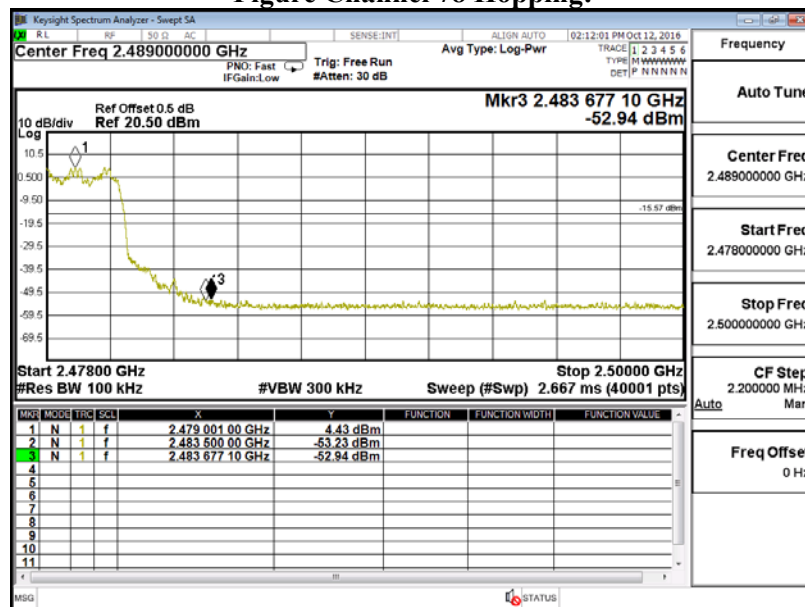

7. Channel Number

7.1. Test Setup

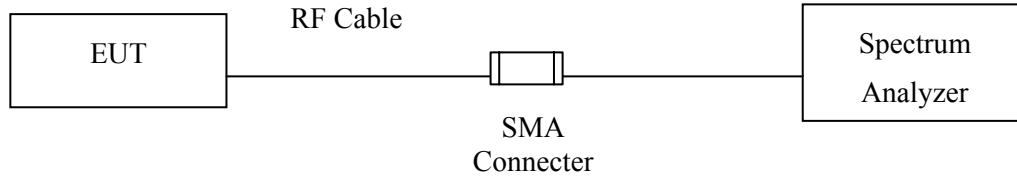

7.2. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

7.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

7.4. Uncertainty


N/A

7.5. Test Result of Channel Number


Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Channel Number
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

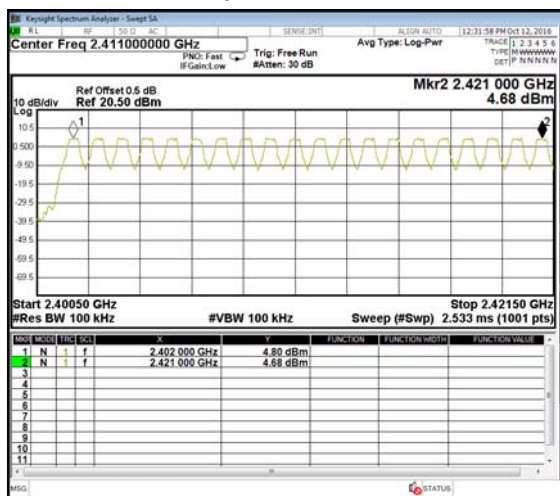


2422-2441MHz

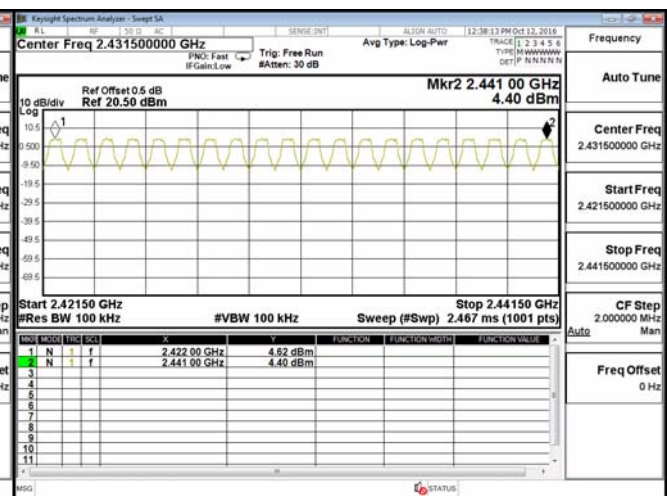

2442-2461MHz

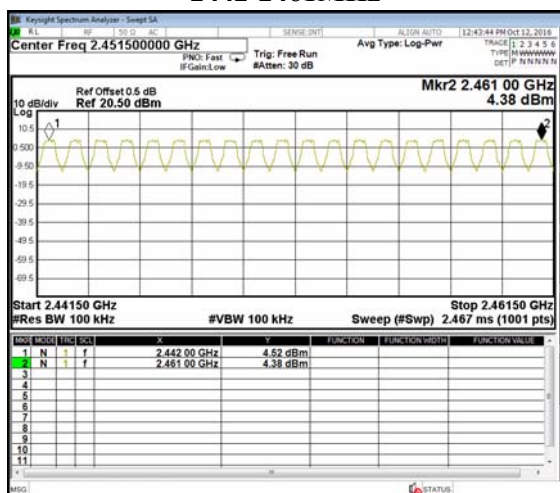


2462-2480MHz

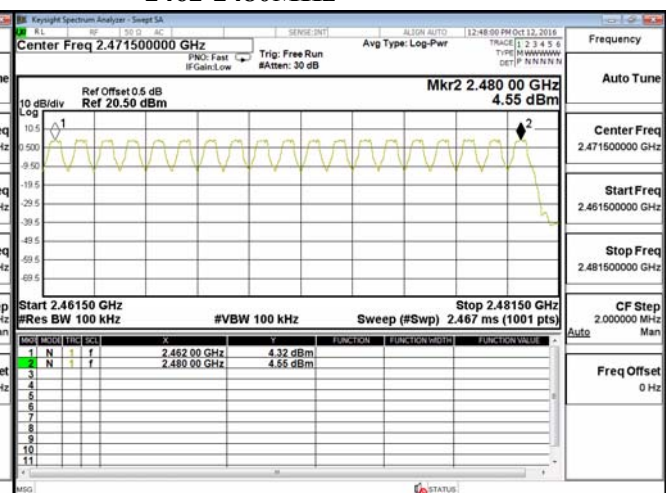


Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Channel Number
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

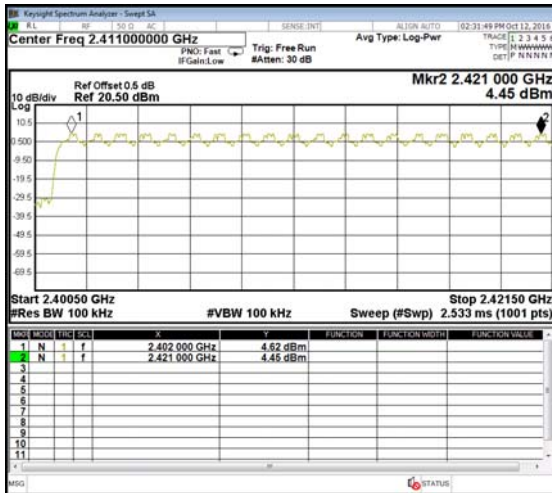


2422-2441MHz

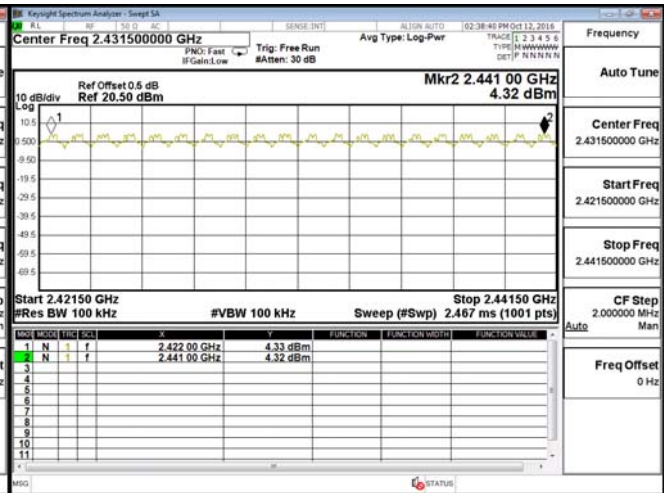

2442-2461MHz

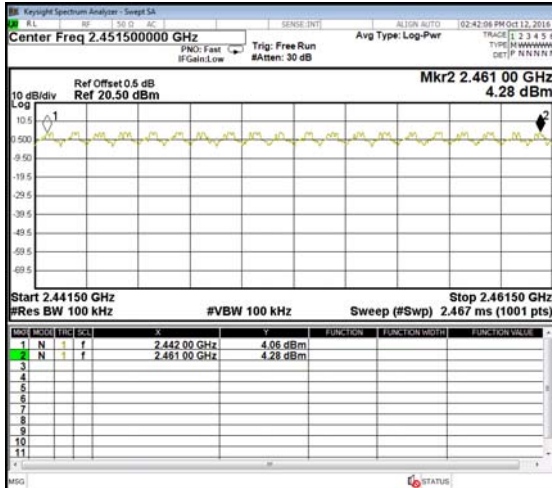


2462-2480MHz

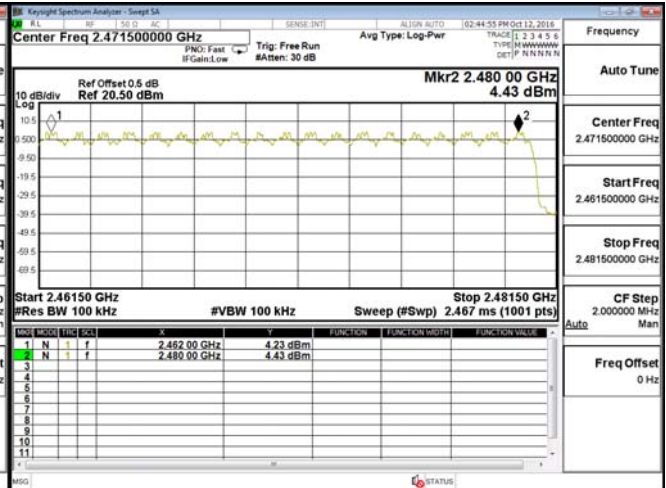

8. Channel Separation

8.1. Test Setup

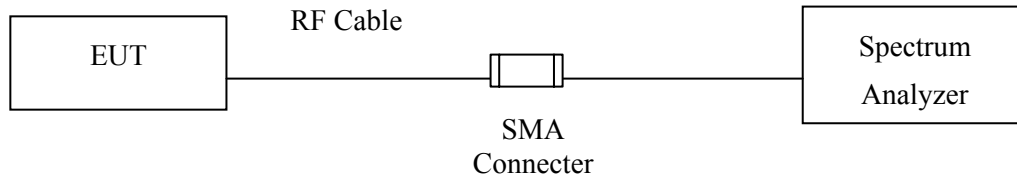

8.2. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

8.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

8.4. Uncertainty

$\pm 283\text{Hz}$


8.5. Test Result of Channel Separation

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Channel Separation
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	628.0	Pass
39	2441	1000	>25 kHz	626.0	Pass
78	2480	1000	>25 kHz	622.0	Pass

NOTE: The 20dB Bandwidth is refer to section 10.


Channel 00 (2402MHz)

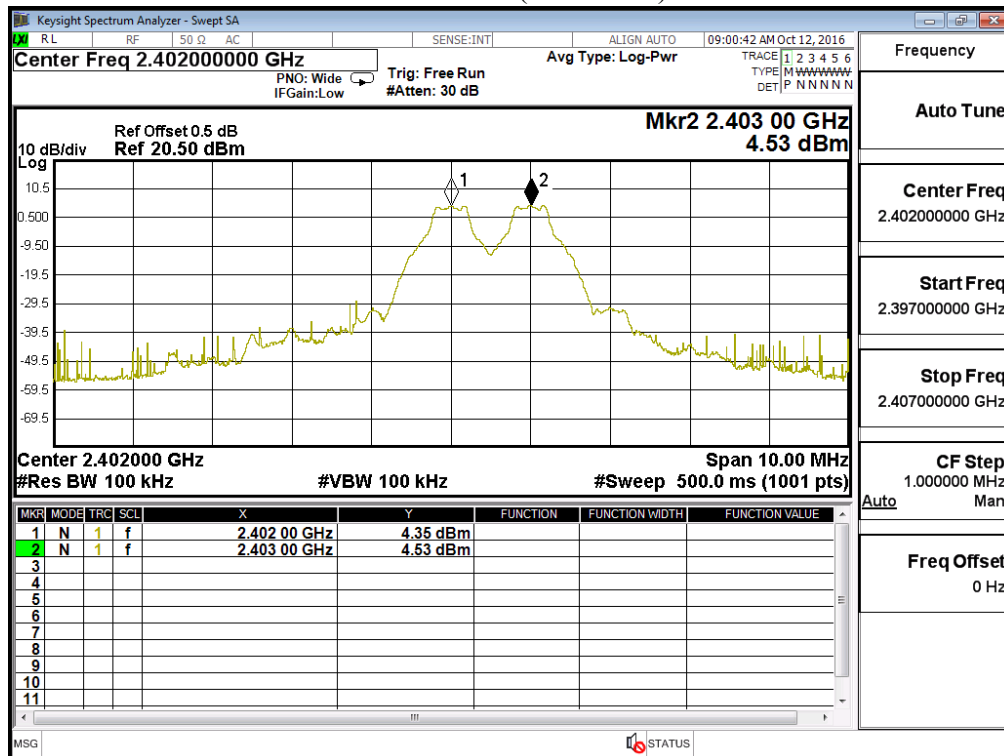

Channel 39 (2441MHz)

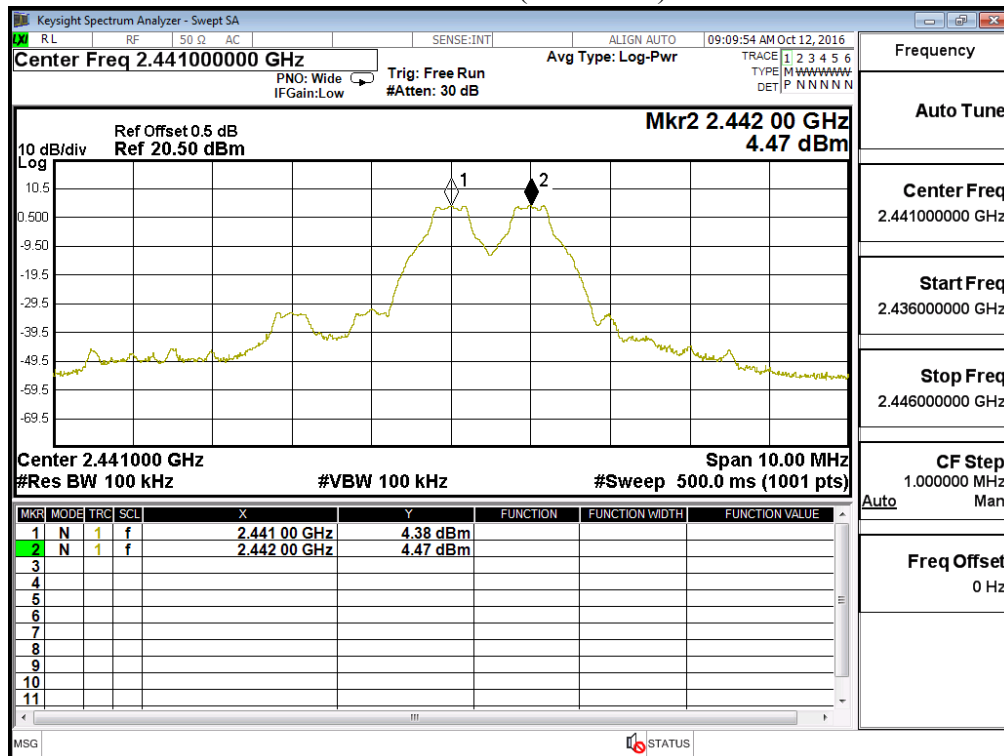

Channel 78 (2480MHz)

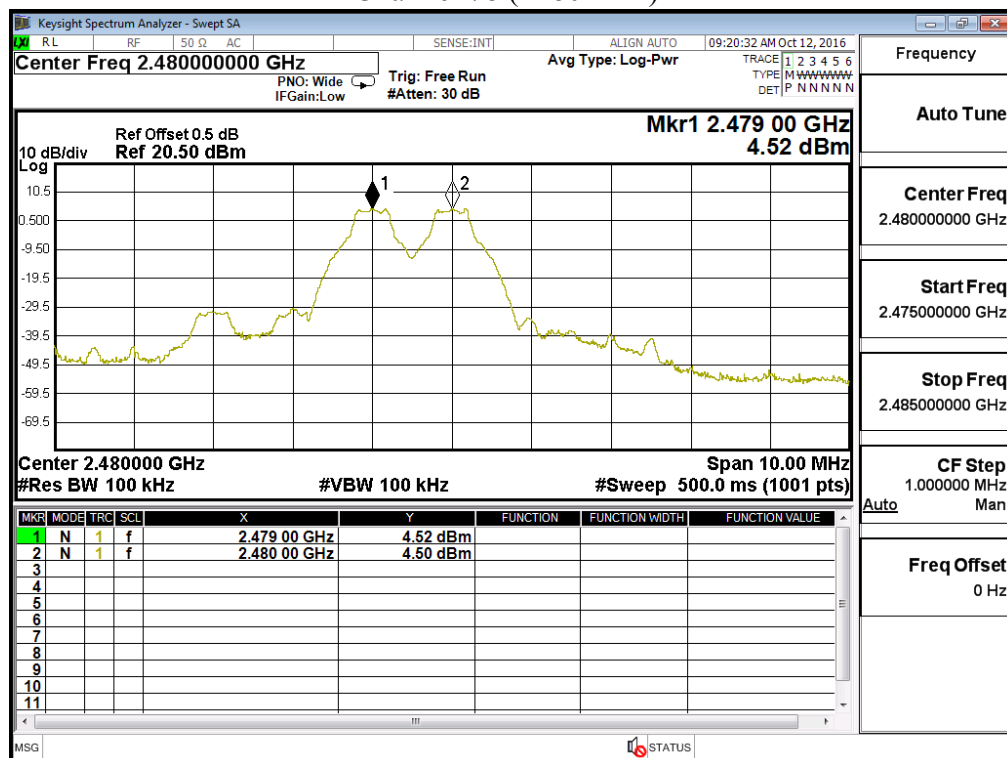


Product : Klipsch Heritage Wireless TableTop Bluetooth Small
 Test Item : Channel Separation
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	864.0	Pass
39	2441	1000	>25 kHz	850.0	Pass
78	2480	1000	>25 kHz	838.0	Pass

NOTE: The 20dB Bandwidth is refer to section 10.


Channel 00 (2402MHz)

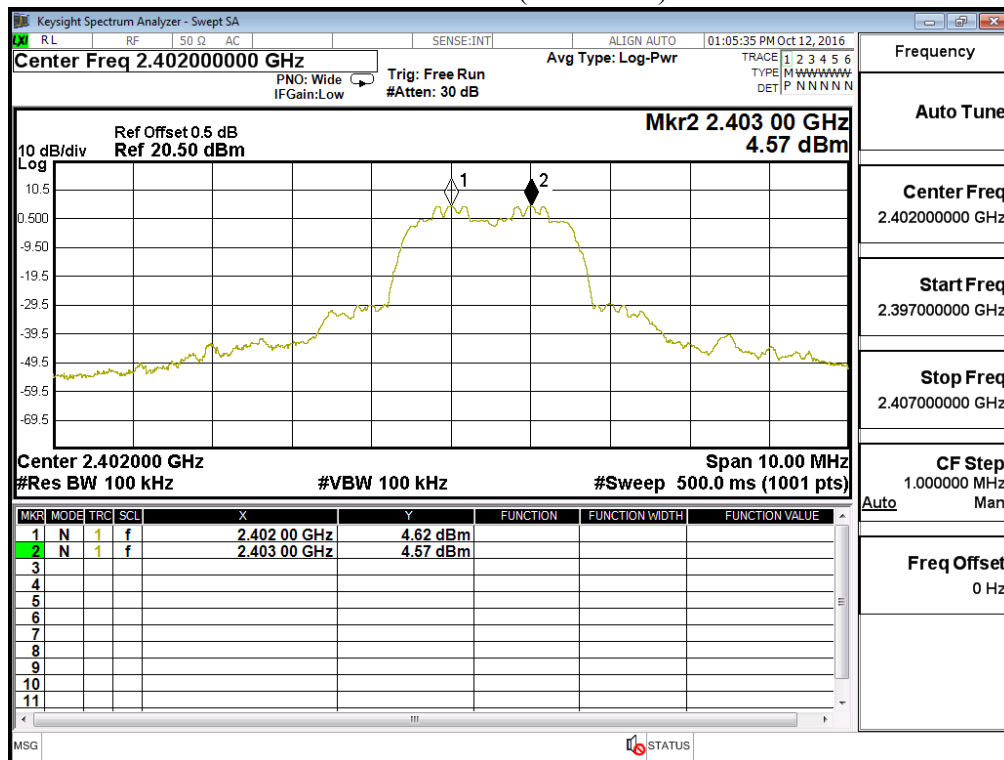

Channel 39 (2441MHz)

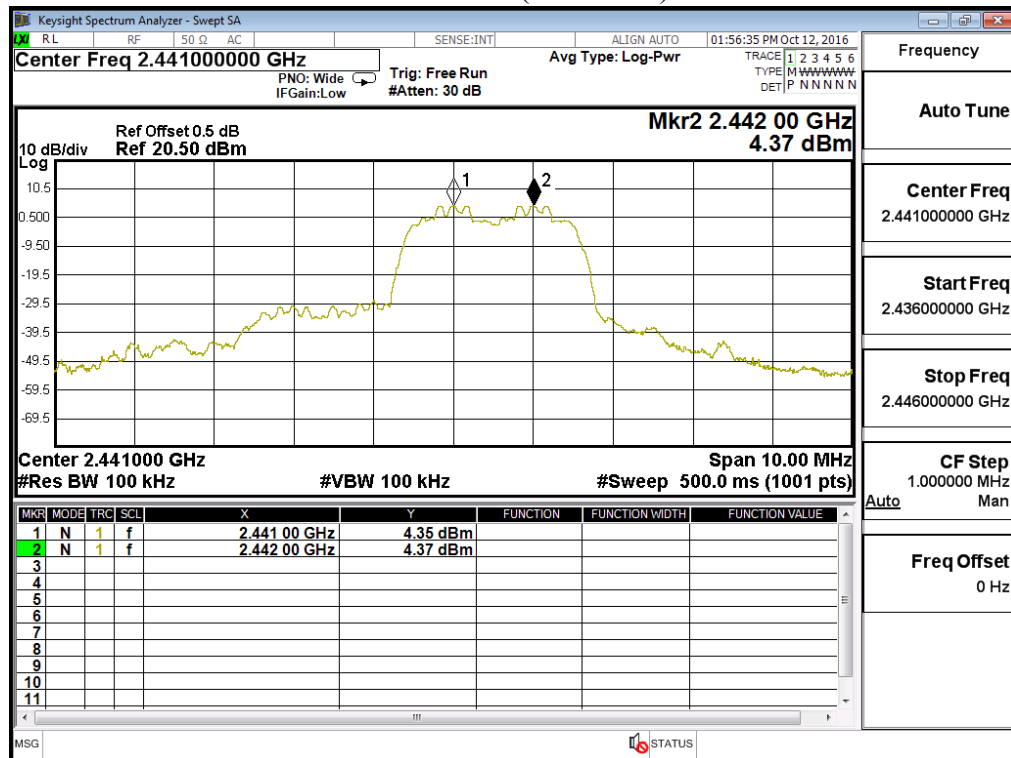


Channel 78 (2480MHz)

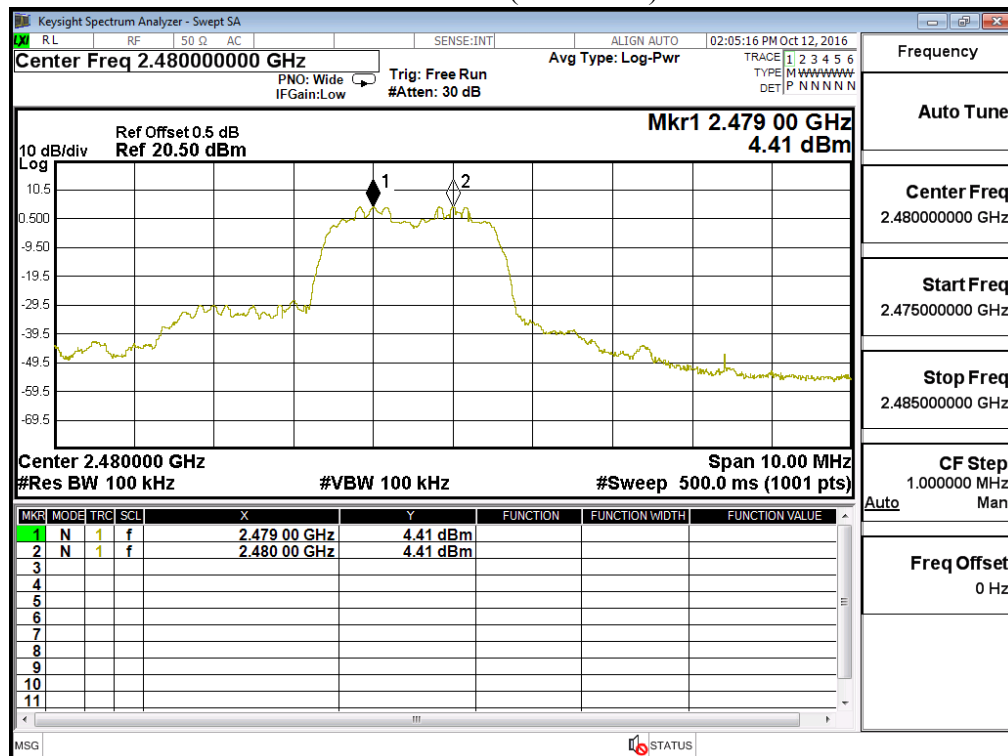

9. Dwell Time

9.1. Test Setup

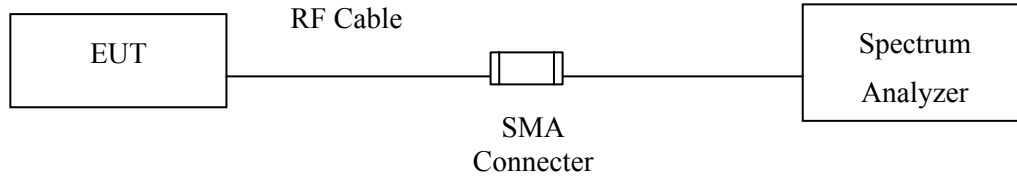

9.2. Limit

The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

9.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

9.4. Uncertainty

$\pm 25\text{msec}$

9.5. Test Result of Dwell Time


Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Dwell Time
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (Channel 00,39,78 –DH5)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.897	13	50	0.75	0.301	0.4	Pass
2441	2.897	13	50	0.75	0.301	0.4	Pass
2480	2.897	13	50	0.75	0.301	0.4	Pass


Duty cycle = ((Time slot length(ms)*Hopping of Number) / Sweep time (ms)

Dwell time = (Duty cycle /79) * (79*0.4)


CH 00 Time Interval between hops

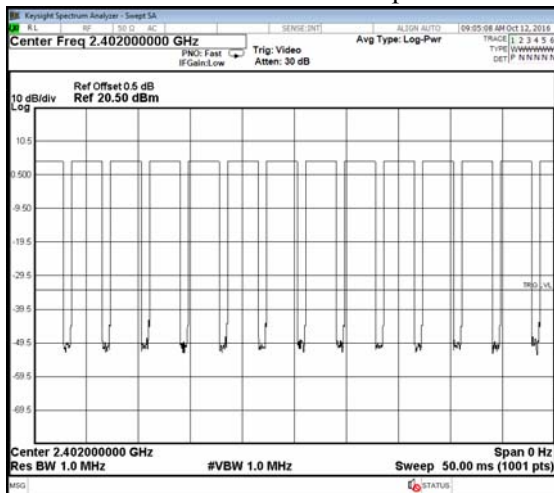


CH 00 Transmission Time

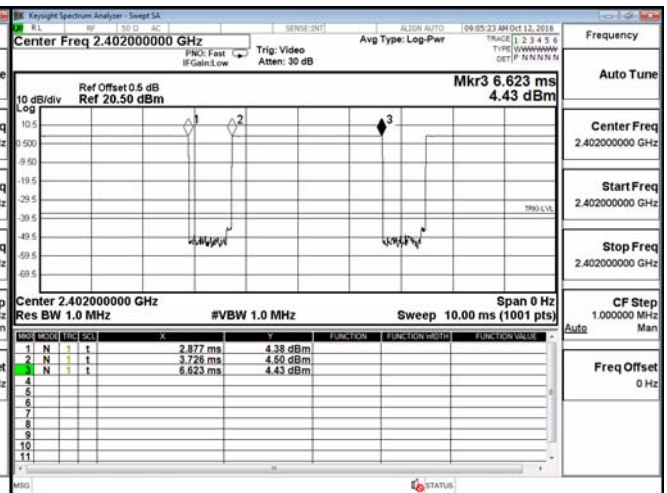


CH39 Time Interval between hops

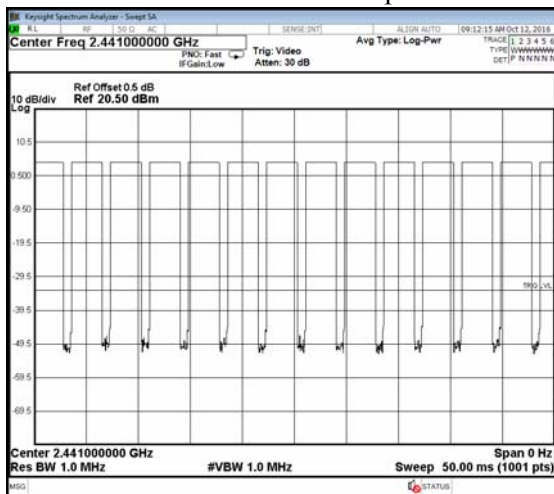


CH 39Transmission Time

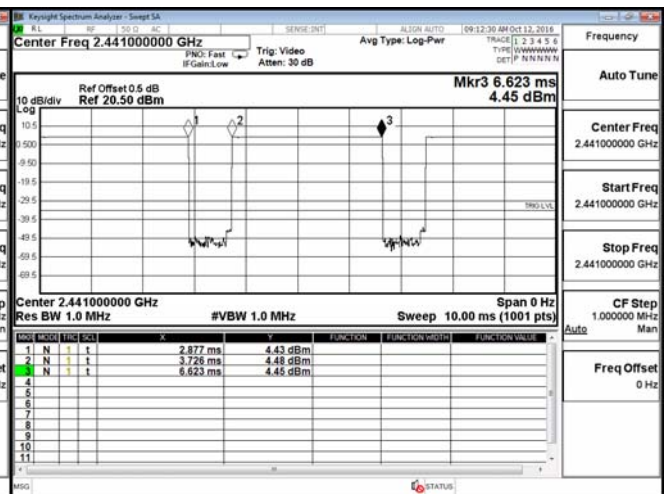

CH 78 Time Interval between hops

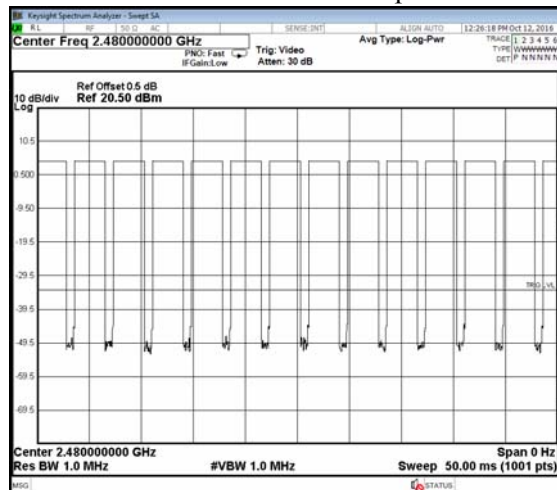

CH 78 Transmission Time

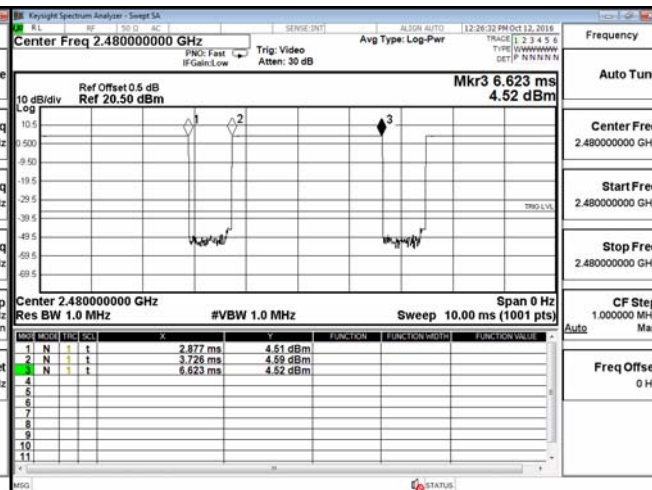

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Dwell Time
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (Channel 00,39,78 –DH5)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.907	13	50	0.76	0.302	0.4	Pass
2441	2.907	13	50	0.76	0.302	0.4	Pass
2480	2.907	13	50	0.76	0.302	0.4	Pass


Duty cycle = ((Time slot length(ms)*Hopping of Number) / Sweep time (ms))

Dwell time = (Duty cycle /79) * (79*0.4)


CH 00 Time Interval between hops

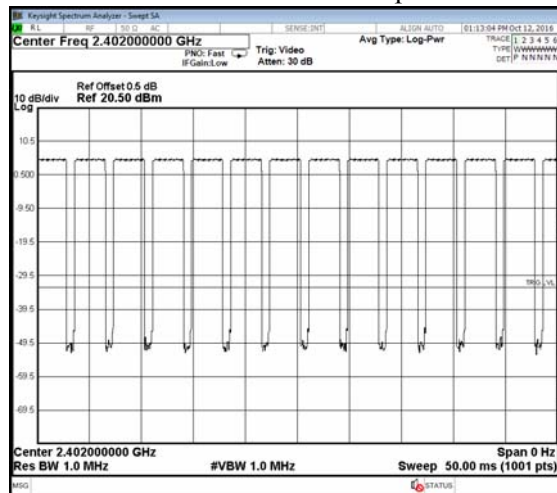


CH 00 Transmission Time

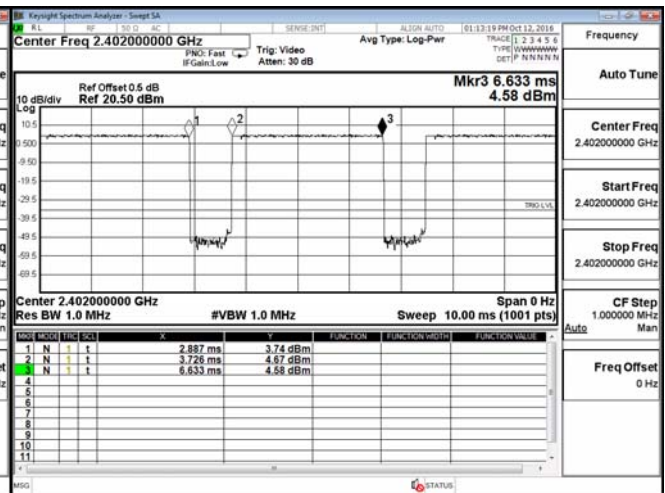


CH39 Time Interval between hops

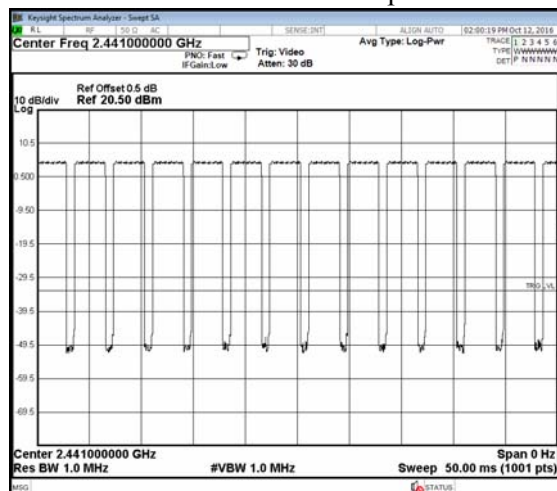


CH 39Transmission Time

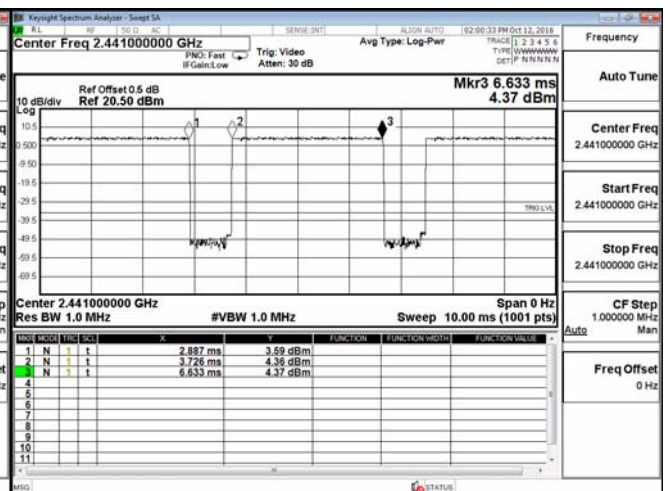

CH 78 Time Interval between hops

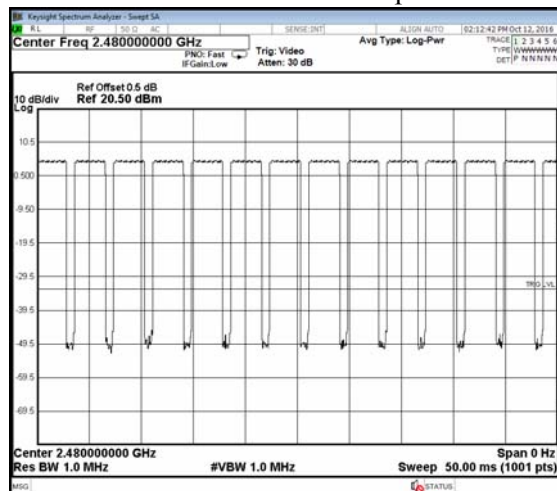

CH 78 Transmission Time

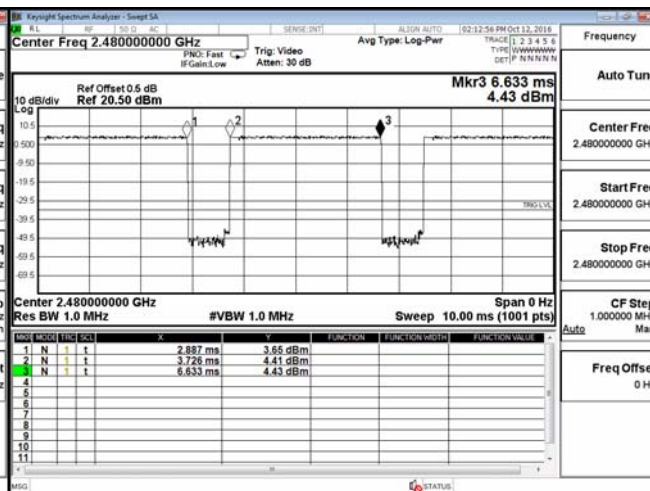


Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.

10. Occupied Bandwidth

10.1. Test Setup

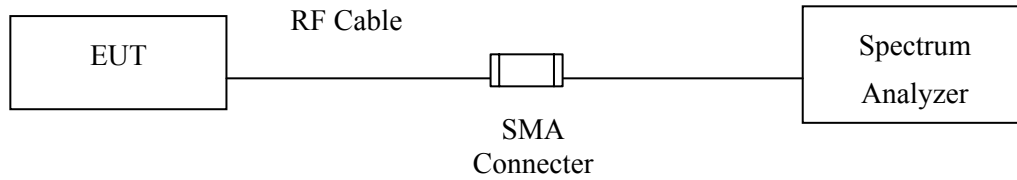

10.2. Limits

N/A

10.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

10.4. Uncertainty

$\pm 283\text{Hz}$

10.5. Test Result of Occupied Bandwidth

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Occupied Bandwidth Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	942	--	NA
39	2441	939	--	NA
78	2480	933	--	NA

Figure Channel 00:

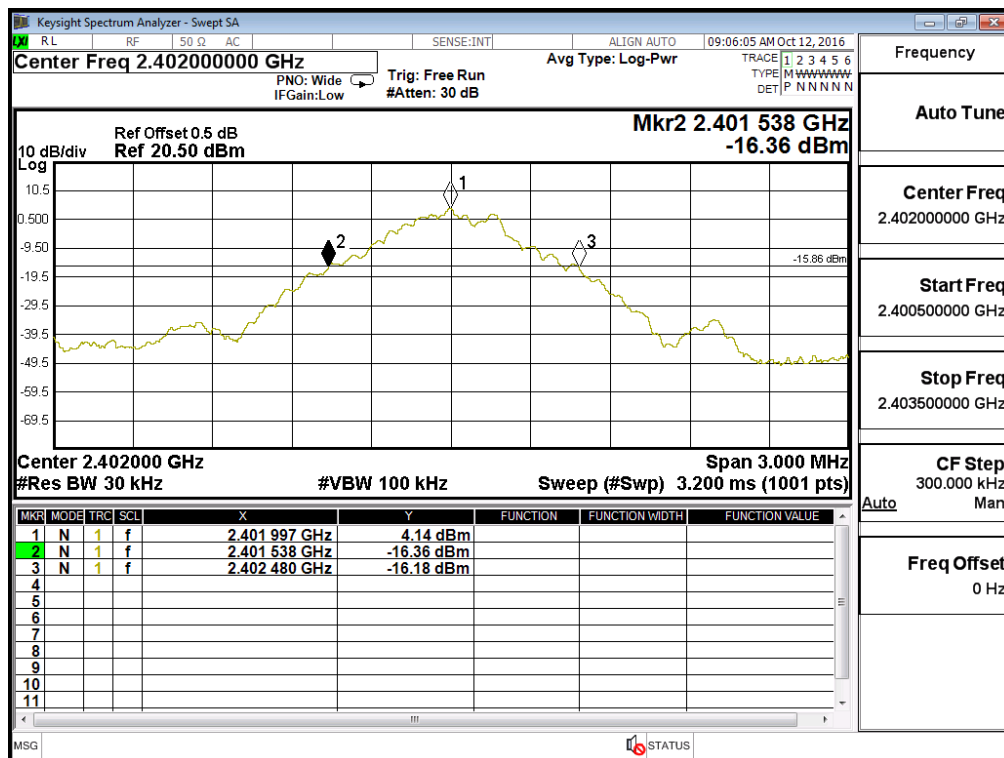


Figure Channel 39:


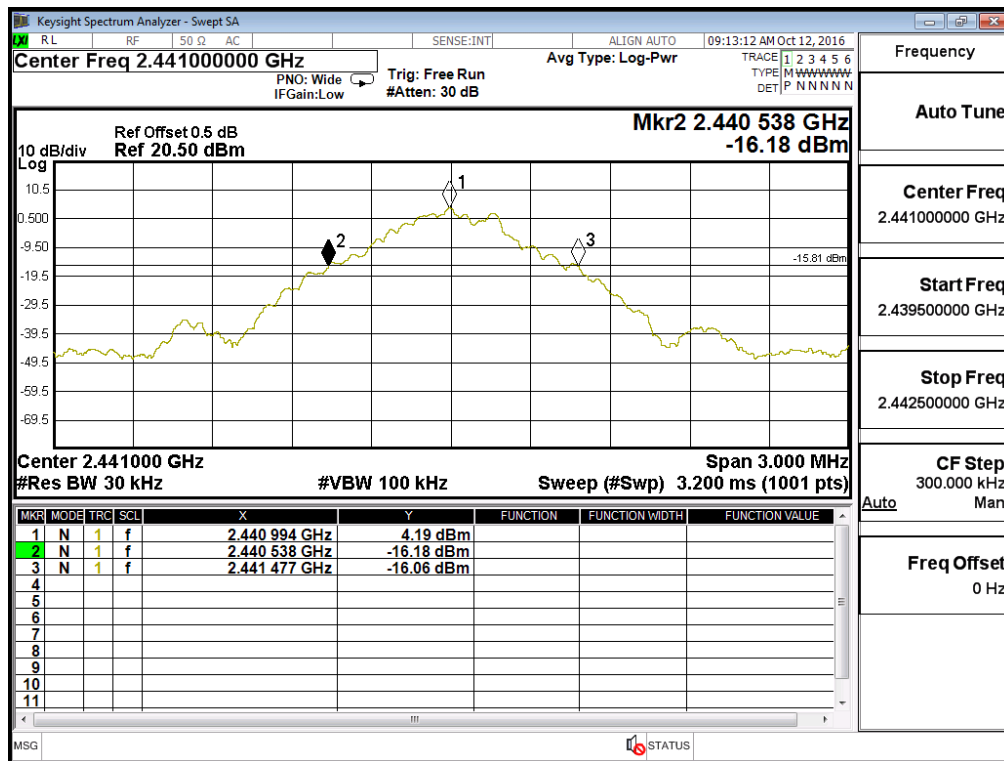


Figure Channel 78:

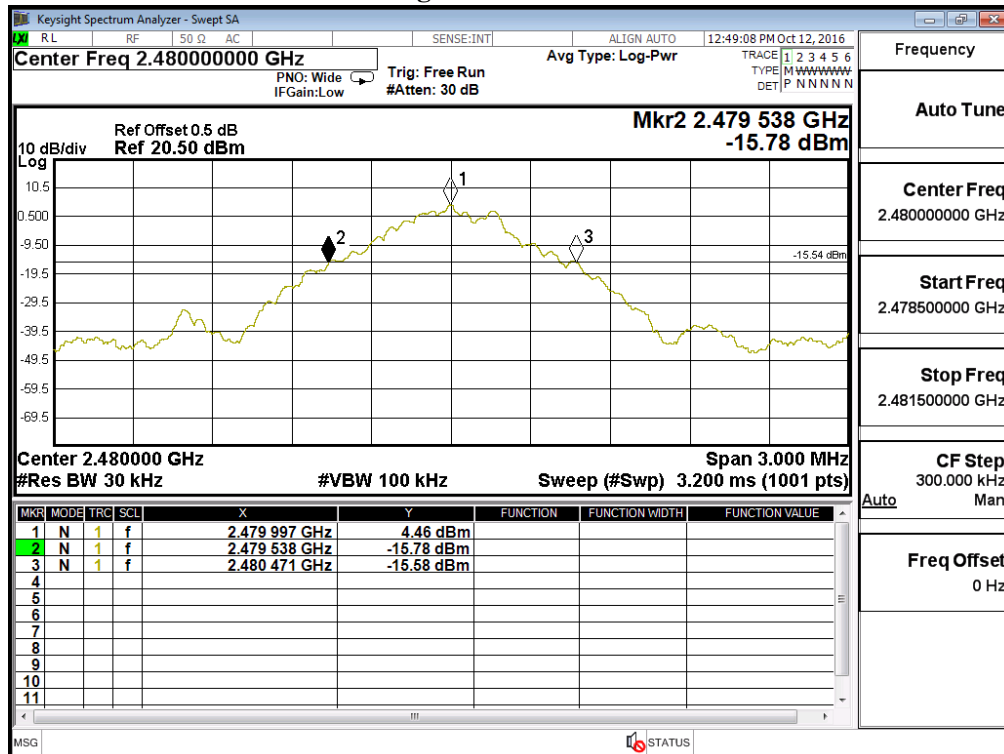

Product : Klipsch Heritage Wireless TableTop Bluetooth Small
Test Item : Occupied Bandwidth Data
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1296	--	NA
39	2441	1275	--	NA
78	2480	1257	--	NA

Figure Channel 00:

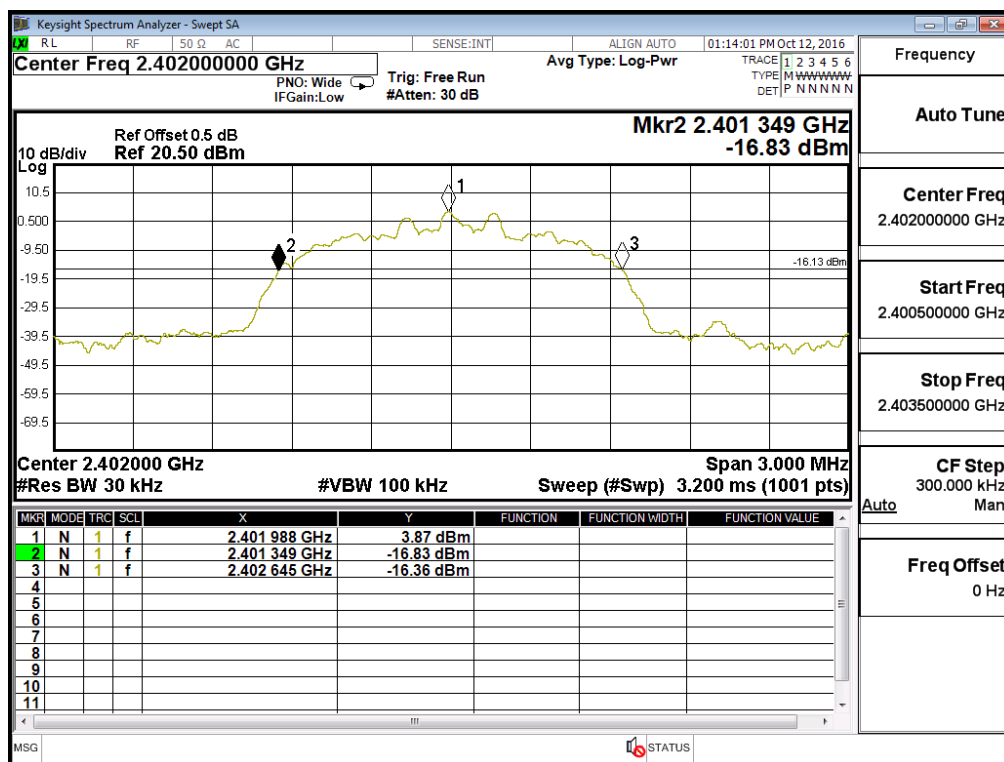


Figure Channel 39:


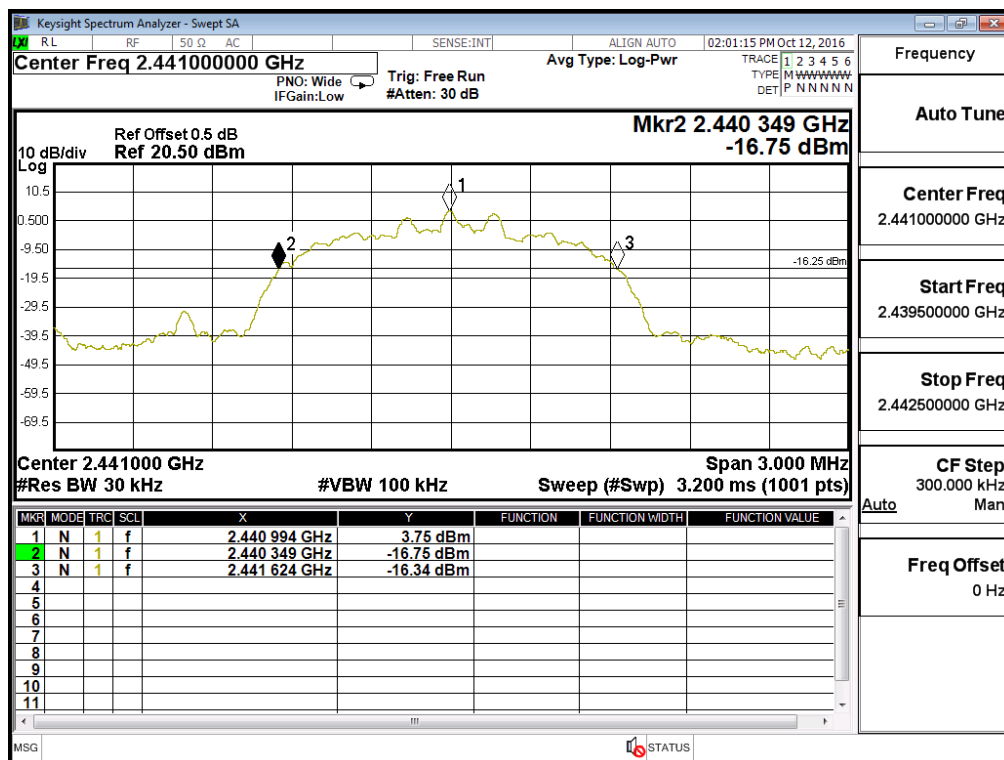


Figure Channel 78:

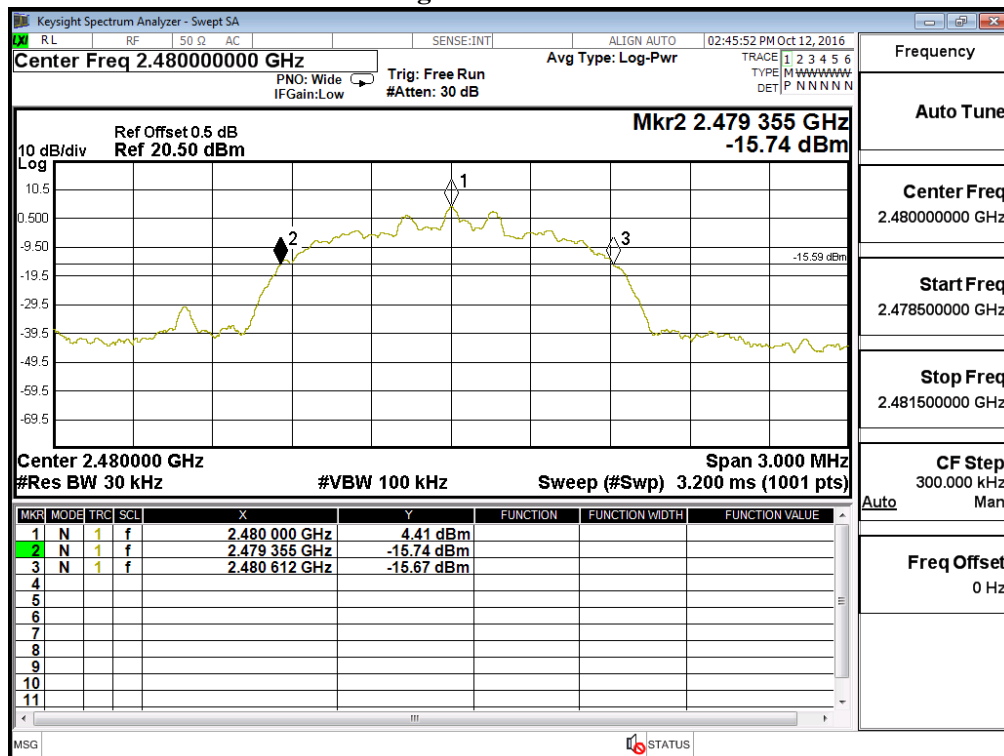

11. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs