


FCC Co-Location Test Report

FCC ID : 2AJAC-AN530API
Equipment : Araknis Networks 530-series Wi-Fi 7 BE9400
Indoor Wireless Access Point
Model No. : AN-530-AP-I
Brand Name :
Araknis Networks or  or 
Applicant : Snap One, LLC
Address : 1800 Continental Blvd Suite 200-300
Charlotte, North Carolina 28273 USA
Standard : 47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
Received Date : May 06, 2025
Tested Date : Nov. 14 ~ Nov. 20, 2025

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Manager

Approved by:



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	The Equipment List	6
1.3	Test Standards	7
1.4	Reference Guidance	7
1.5	Deviation from Test Standard and Measurement Procedure.....	7
1.6	Measurement Uncertainty	7
2	TEST CONFIGURATION.....	8
2.1	Testing Facility	8
2.2	The Worst Test Modes and Channel Details	8
3	TRANSMITTER TEST RESULTS	9
3.1	Unwanted Emissions into Restricted Frequency Bands	9
4	TEST LABORATORY INFORMATION	12

Appendix A. Unwanted Emissions Into Restricted Frequency Bands

Release Record

Report No.	Version	Description	Issued Date
FR542802-01CO	Rev. 01	Initial issue	Feb. 23, 2026

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2.763GHz 52.41 (Margin -1.59dB) - AV	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

Operating Frequency	802.11b/g/n/ax/be: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax/be: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz, 5745 ~ 5825 MHz 5925 MHz ~ 6425 MHz; 6425 MHz ~ 6525 MHz; 6525 MHz ~ 6875 MHz; 6875 MHz ~ 7125 MHz
Modulation Type	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax/be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM/ 4096QAM)

1.1.2 Source of Front End Module

Source A	INTEGRATE_5GHz_FEM/TR/LNA/PA SKY85797-11 MCM-16 SKYWORKS;	INTEGRATE_6GHz_FEM/TR/LNA/PA SKY85798-11 MCM-16 SKYWORKS;
Source B	INTEGRATE_5GHz_WIFI FEM QPF4559TR13 LAMINATE-16 QORVO	INTEGRATE_6GHz_WIFI FEM QPF4659TR13 LAMINATE-16 QORVO

1.1.3 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
					2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
1	AWAN	2-1	PIFA	UFL	5.4	---	---	---	---
2		2-2			4	---	---	---	---
3		5-1			---	4.7	4.9	4.9	6.2
4		5-2			---	5.2	5.3	5.9	5.8

Ant. No.	Brand	Model	Type	Connector	Operating Frequencies (MHz) / Gain (dBi)			
					5925~6425	6425~6525	6525~6875	6875~7125
1	AWAN	6-1	PIFA	UFL	5.2	5	5.5	6.8
2		6-2			6.2	7.5	7.4	7.3

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter 54Vdc from PoE
--------------------------	--------------------------------------

Note: The above power supplies are not bundled in market.

1.2 The Equipment List

Test Item	Radiated Emission below 1 GHz				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Nov. 20, 2025				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 11, 2025	Mar. 10, 2026
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2025	Nov. 16, 2026
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jul. 04, 2025	Jul. 03, 2026
Preamplifier	EMC	EMC02325	980187	Jun. 24, 2025	Jun. 23, 2026
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 01, 2025	Sep. 30, 2026
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 19, 2025	Sep. 18, 2026
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 19, 2025	Sep. 18, 2026
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 19, 2025	Sep. 18, 2026
Measurement Software	Sporton	SENSE-EMI	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission above 1 GHz				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Nov. 14, 2025				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Mar. 27, 2025	Mar. 26, 2026
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 20, 2024	Dec. 19, 2025
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 18, 2024	Nov. 17, 2025
Preamplifier	EMC	EMC118A45SE	980897	Aug. 08, 2025	Aug. 07, 2026
Preamplifier	EMC	EMC184045SE	980903	Aug. 08, 2025	Aug. 07, 2026
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 19, 2025	Sep. 18, 2026
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 19, 2025	Sep. 18, 2026
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 19, 2025	Sep. 18, 2026
Attenuator	Pasternack	PE7005-10	10-3	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER 7.5-18G	STI	STI15-9722	STI-HP7.5G-B	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER	WI	WHK3.1-18G-10SS	43	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER	K&L	11SH10-7000/T18000-O/OP	21	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER 3.1-18G	WHK	WHK3.1/18G-10SS	39	Oct. 01, 2025	Sep. 30, 2026
Measurement Software	Sporton	SENSE-EMI	V5.11	NA	NA
Measurement Software	Sporton	SENSE-15407_NII	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.3 Test Standards

47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
ANSI C63.10-2020
ANSI C63.4-2014 + C63.4a-2017

1.4 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
FCC KDB 412172 D01 Determining ERP and EIRP v01r01
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03

1.5 Deviation from Test Standard and Measurement Procedure

None

1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Unwanted Emission $\leq$ 1GHz	± 3.96 dB
Unwanted Emission $>$ 1GHz	± 4.51 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISSED#: 10807C
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode
Unwanted Emissions below 1GHz	Source A Mode 1: 11B CH06 + 11A CH40 + EHT320_OFDMA CH159 (adapter Mode) Mode 2: 11B CH06 + 11A CH40 + EHT320_OFDMA CH159 (POE Mode) Source B Mode 1: 11B CH06 + 11A CH40 + EHT320_OFDMA CH159 (adapter Mode) Mode 2: 11B CH06 + 11A CH40 + EHT320_OFDMA CH159 (POE Mode)
Unwanted Emissions above 1GHz	Source A 11B CH06 + 11A CH40 + EHT320_OFDMA CH159 Source B 11B CH06 + 11A CH40 + EHT320_OFDMA CH159
NOTE: The selected channel is the maximum power channel of Wi-Fi mode.	

3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9~90 kHz, 110~490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Un-restricted band emissions above 1GHz Limit		
Operating Band	PK Limit	AV Limit
5.925 – 7.125 GHz	e.i.r.p. -7 dBm [88.2 dBuV/m@3m]	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).		

3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.1.3 Test Setup

Radiated Emissions below 1 GHz

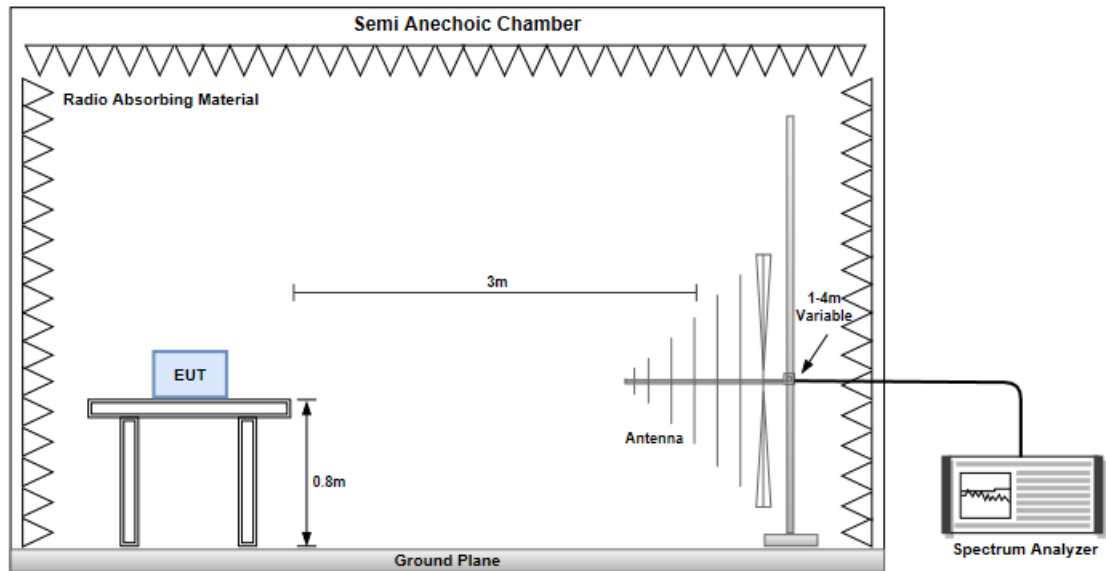

Radiated Emissions above 1 GHz

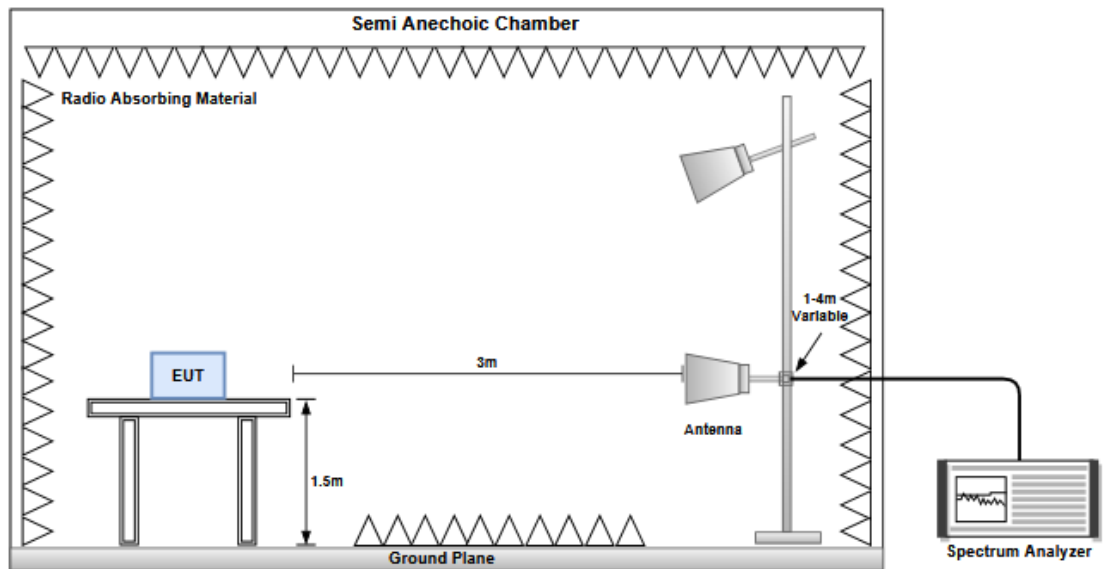

3.1.4 Test Results

Refer to Appendix A.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <https://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==




Source A
Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	950.1M	38.84	46.00	-7.16	Vertical
Mode 2	Pass	PK	927.2M	38.46	46.00	-7.54	Vertical




Mode 1

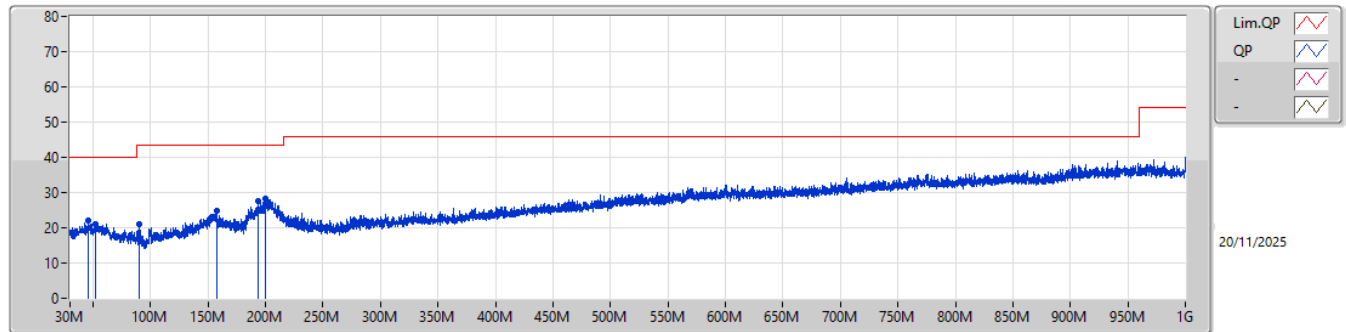


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	45.6M	22.18	40.00	-17.82	-8.55	3	Horizontal	-	-	-	30.73	18.66	0.74	27.95		
PK	52.1M	21.18	40.00	-18.82	-8.44	3	Horizontal	-	-	-	29.62	18.71	0.79	27.94		
PK	90.3M	21.08	43.50	-22.42	-14.60	3	Horizontal	-	-	-	35.68	12.50	1.04	28.14		
PK	157.3M	24.78	43.50	-18.72	-8.45	3	Horizontal	-	-	-	33.23	18.40	1.40	28.25		
PK	194M	27.43	43.50	-16.07	-11.36	3	Horizontal	-	-	-	38.79	15.30	1.63	28.29		
PK	200.2M	28.34	43.50	-15.16	-11.52	3	Horizontal	-	-	-	39.86	15.10	1.68	28.30		

Mode 1

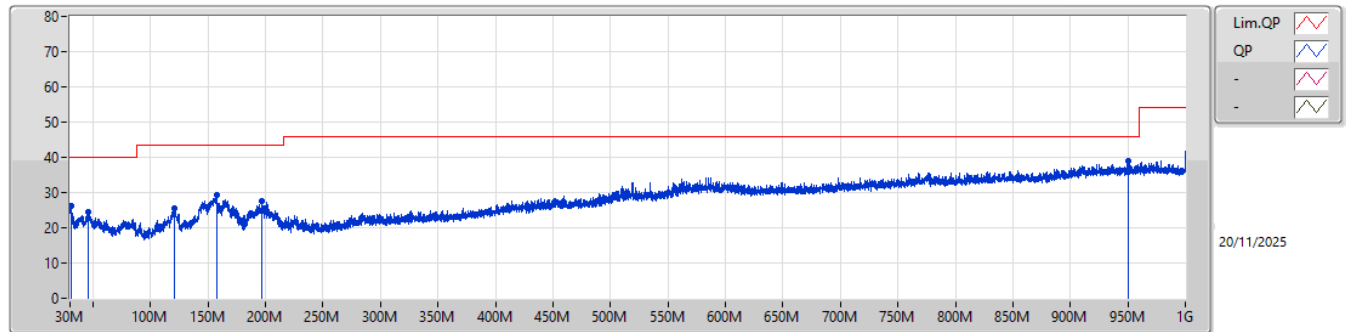


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	31.5M	26.16	40.00	-13.84	-10.27	3	Vertical	-	-	-	36.43	17.15	0.57	27.99		
PK	45.8M	24.62	40.00	-15.38	-8.52	3	Vertical	-	-	-	33.14	18.68	0.74	27.94		
PK	120.6M	25.67	43.50	-17.83	-10.98	3	Vertical	-	-	-	36.65	16.00	1.23	28.21		
PK	157.5M	29.32	43.50	-14.18	-8.45	3	Vertical	-	-	-	37.77	18.40	1.40	28.25		
PK	196.9M	27.64	43.50	-15.86	-11.52	3	Vertical	-	-	-	39.16	15.12	1.66	28.30		
PK	950.1M	38.84	46.00	-7.16	7.18	3	Vertical	-	-	-	31.66	28.90	5.25	26.97		

Mode 2

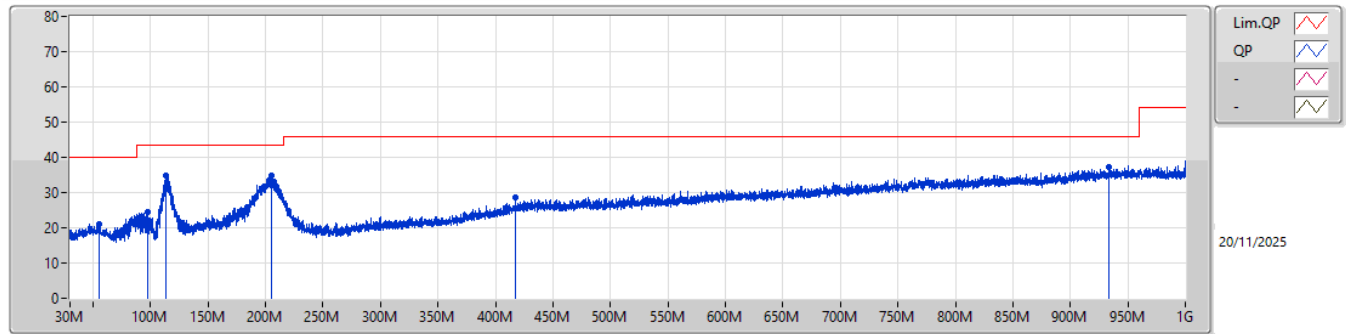

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	54.9M	21.09	40.00	-18.91	-8.62	3	Horizontal	-	-	-	29.71	18.52	0.82	27.96		
PK	97.6M	24.50	43.50	-19.00	-13.67	3	Horizontal	-	-	-	38.17	13.40	1.11	28.18		
PK	113.9M	34.68	43.50	-8.82	-11.42	3	Horizontal	-	-	-	46.10	15.59	1.20	28.21		
PK	205.1M	34.71	43.50	-8.79	-11.60	3	Horizontal	-	-	-	46.31	15.00	1.70	28.30		
PK	417.2M	28.48	46.00	-17.52	-4.21	3	Horizontal	-	-	-	32.69	21.09	2.81	28.11		
PK	933.6M	37.26	46.00	-8.74	6.95	3	Horizontal	-	-	-	30.31	28.77	5.22	27.04		

Mode 2

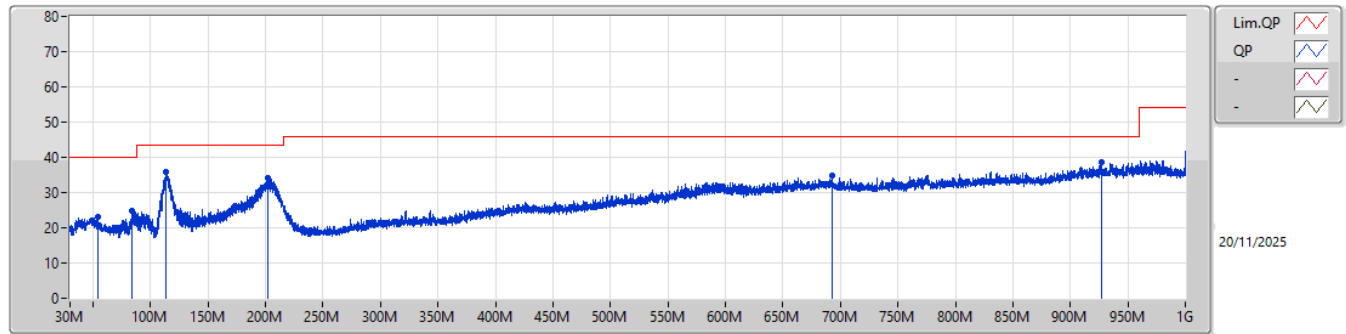

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	54.1M	22.98	40.00	-17.02	-8.46	3	Vertical	-	-	-	31.44	18.68	0.81	27.95		
PK	84.3M	24.77	40.00	-15.23	-14.43	3	Vertical	-	-	-	39.20	12.67	1.01	28.11		
PK	113.9M	35.79	43.50	-7.71	-11.42	3	Vertical	-	-	-	47.21	15.59	1.20	28.21		
PK	201.8M	34.25	43.50	-9.25	-11.55	3	Vertical	-	-	-	45.80	15.06	1.69	28.30		
PK	692.5M	34.87	46.00	-11.13	2.07	3	Vertical	-	-	-	32.80	25.75	4.06	27.74		
PK	927.2M	38.46	46.00	-7.54	6.79	3	Vertical	-	-	-	31.67	28.64	5.21	27.06		




Source B

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	1G	49.67	54.00	-4.33	Vertical
Mode 2	Pass	QP	172.6M	40.32	43.50	-3.18	Vertical




Mode 1

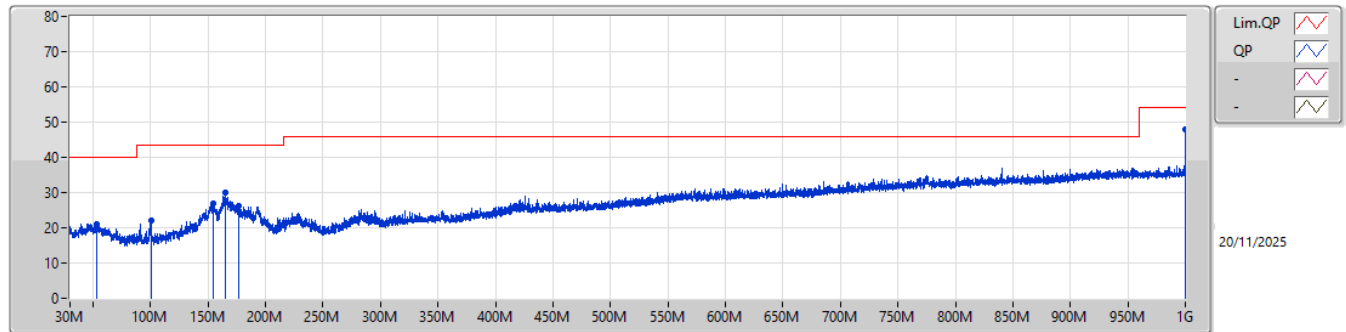

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	53.1M	21.17	40.00	-18.83	-8.36	3	Horizontal	-	-	-	29.53	18.79	0.80	27.95		
PK	100.5M	22.05	43.50	-21.45	-13.16	3	Horizontal	-	-	-	35.21	13.90	1.13	28.19		
PK	154.2M	26.74	43.50	-16.76	-8.35	3	Horizontal	-	-	-	35.09	18.52	1.38	28.25		
PK	165.6M	30.12	43.50	-13.38	-8.82	3	Horizontal	-	-	-	38.94	18.00	1.44	28.26		
PK	177.2M	26.21	43.50	-17.29	-9.70	3	Horizontal	-	-	-	35.91	17.06	1.51	28.27		
PK	1G	47.92	54.00	-6.08	7.84	3	Horizontal	-	-	-	40.08	29.10	5.53	26.79		


Mode 1

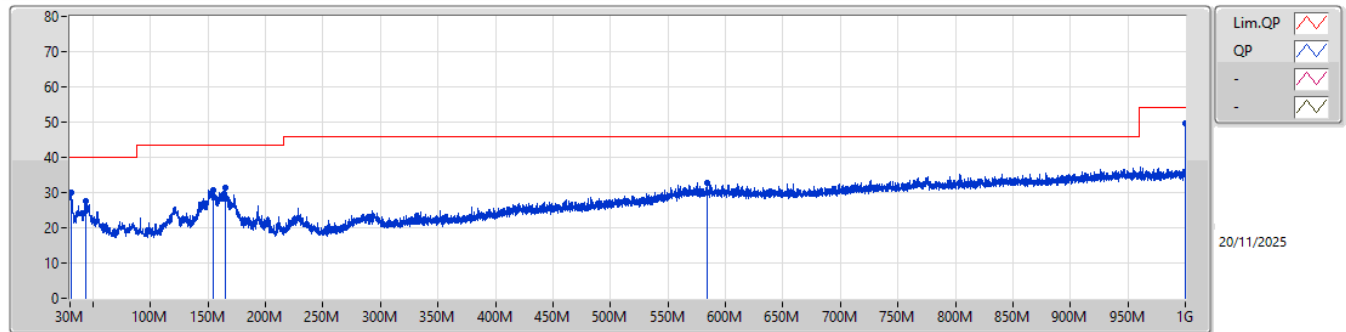

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	30.7M	30.00	40.00	-10.00	-10.25	3	Vertical	-	-	-	40.25	17.19	0.56	28.00		
PK	44.1M	27.73	40.00	-12.27	-8.89	3	Vertical	-	-	-	36.62	18.33	0.73	27.95		
PK	154.4M	30.62	43.50	-12.88	-8.33	3	Vertical	-	-	-	38.95	18.54	1.38	28.25		
PK	165.1M	31.55	43.50	-11.95	-8.82	3	Vertical	-	-	-	40.37	18.00	1.44	28.26		
PK	584.2M	32.72	46.00	-13.28	-0.20	3	Vertical	-	-	-	32.92	24.18	3.54	27.92		
PK	1G	49.67	54.00	-4.33	7.84	3	Vertical	-	-	-	41.83	29.10	5.53	26.79		




Mode 2

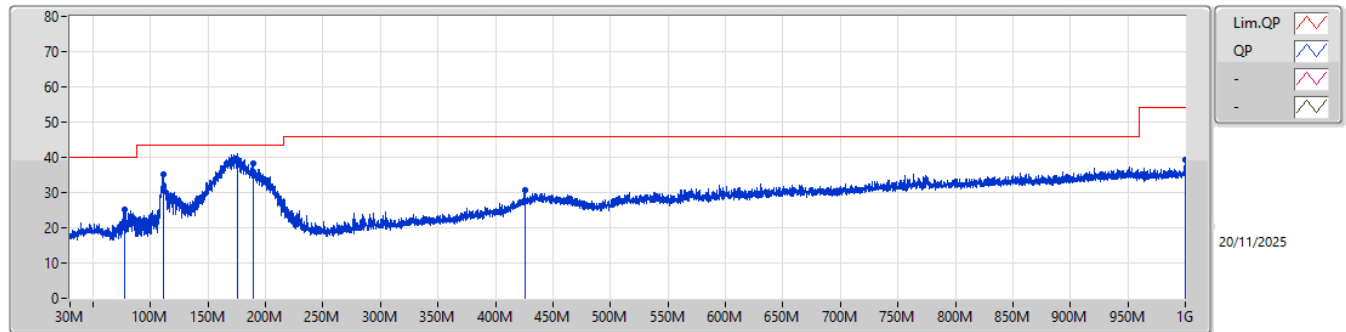

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	77.4M	25.20	40.00	-14.80	-12.97	3	Horizontal	-	-	-	38.17	14.14	0.96	28.07		
PK	110.8M	35.24	43.50	-8.26	-11.80	3	Horizontal	-	-	-	47.04	15.22	1.18	28.20		
QP	176M	39.34	43.50	-4.16	-9.56	3	Horizontal	82	1.55	-	48.90	17.20	1.51	28.27		
PK	189.8M	38.36	43.50	-5.14	-11.09	3	Horizontal	-	-	-	49.45	15.60	1.60	28.29		
PK	425.3M	30.58	46.00	-15.42	-3.94	3	Horizontal	-	-	-	34.52	21.31	2.85	28.10		
PK	999.9M	39.37	54.00	-14.63	7.84	3	Horizontal	-	-	-	31.53	29.10	5.53	26.79		

Mode 2

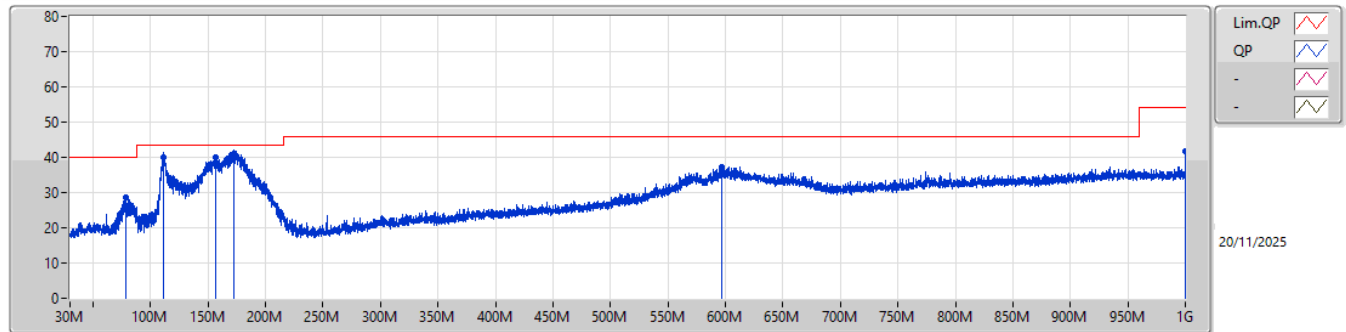


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	78.6M	28.66	40.00	-11.34	-13.20	3	Vertical	-	-	-	41.86	13.90	0.98	28.08		
QP	111.6M	40.14	43.50	-3.36	-11.63	3	Vertical	52	1.00	-	51.77	15.38	1.19	28.20		
PK	156.4M	40.01	43.50	-3.49	-8.46	3	Vertical	-	-	-	48.47	18.40	1.39	28.25		
QP	172.6M	40.32	43.50	-3.18	-9.20	3	Vertical	8	1.00	-	49.52	17.58	1.49	28.27		
PK	597.2M	37.39	46.00	-8.61	0.15	3	Vertical	-	-	-	37.24	24.49	3.56	27.90		
PK	999.9M	41.73	54.00	-12.27	7.84	3	Vertical	-	-	-	33.89	29.10	5.53	26.79		



Source A
Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	2.763G	50.42	54.00	-3.58	Horizontal


Mode 1

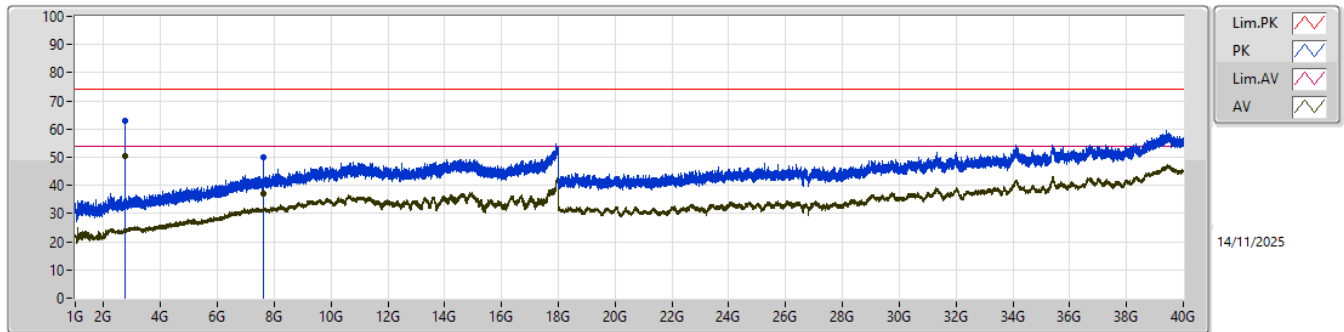

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
AV	2.763G	50.42	54.00	-3.58	-3.13	3	Horizontal	17	1.96	-	53.55	27.96	5.52	36.61		
PK	2.763G	62.99	74.00	-11.01	-3.13	3	Horizontal	17	1.96	-	66.12	27.96	5.52	36.61		
AV	7.637G	37.02	54.00	-16.98	6.12	3	Horizontal	25	1.00	-	30.90	36.20	9.43	39.51		
PK	7.637G	49.85	74.00	-24.15	6.12	3	Horizontal	25	1.00	-	43.73	36.20	9.43	39.51		



Mode 1

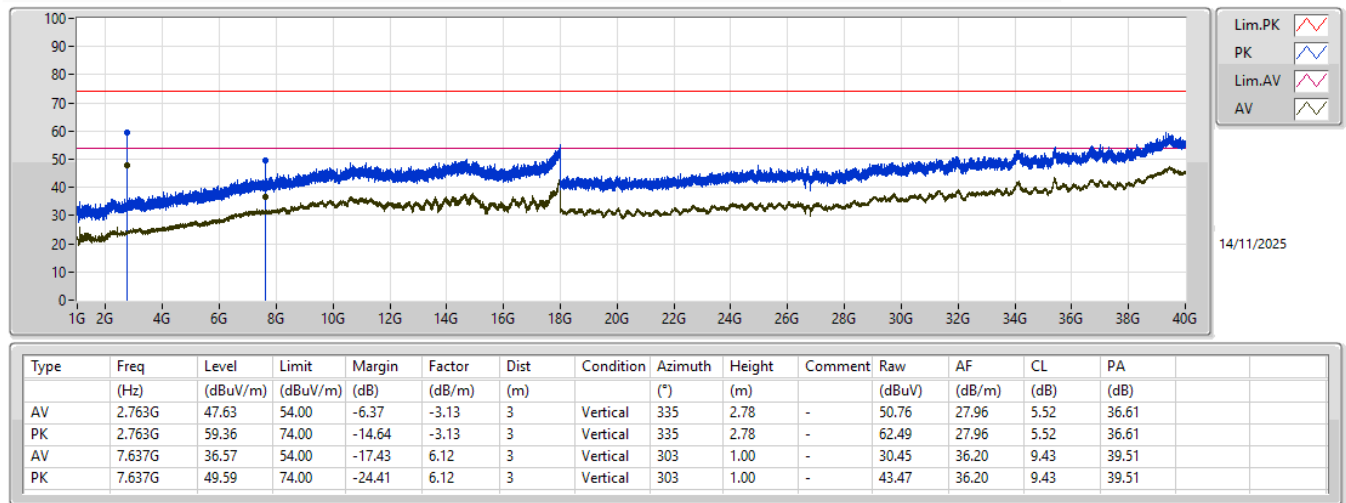




Source B
Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	2.763G	52.41	54.00	-1.59	Horizontal



Mode 1

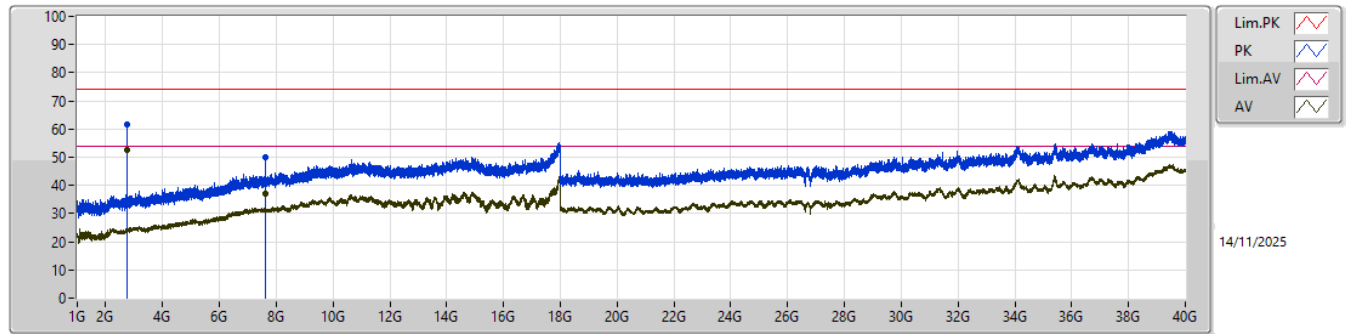

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
AV	2.763G	52.41	54.00	-1.59	-3.13	3	Horizontal	35	2.02	-	55.54	27.96	5.52	36.61		
PK	2.763G	61.58	74.00	-12.42	-3.13	3	Horizontal	35	2.02	-	64.71	27.96	5.52	36.61		
AV	7.637G	37.05	54.00	-16.95	6.12	3	Horizontal	60	1.00	-	30.93	36.20	9.43	39.51		
PK	7.637G	49.88	74.00	-24.12	6.12	3	Horizontal	60	1.00	-	43.76	36.20	9.43	39.51		

Mode 1

