


FCC Test Report

FCC ID : 2AJAC-AN830API
Equipment : Araknis Networks 830-series Wi-Fi 7 BE18000
Indoor Wireless Access Point
Model No. : AN-830-AP-I
Brand Name :
Araknis Networks,  
Applicant : Snap One, LLC
Address : 1800 Continental Blvd Suite 200-300
Charlotte, North Carolina 28273 USA
Standard : 47 CFR FCC Part 15.407
Equipment Class / Type : ☒ 6ID: Indoor access point
☐ 6PP: Subordinate device
☐ 6XD: Client device
Received Date : Nov. 13, 2025
Tested Date : Dec. 01, 2025 ~ Jan. 10, 2026

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Manager

Approved by:


Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	10
1.3	Test Setup Chart	10
1.4	The Equipment List	12
1.5	Test Standards	14
1.6	Reference Guidance	14
1.7	Deviation from Test Standard and Measurement Procedure.....	14
1.8	Measurement Uncertainty	14
2	TEST CONFIGURATION.....	15
2.1	Testing Facility	15
2.2	Test Worst Modes and Channel Details.....	16
3	TRANSMITTER TEST RESULTS	18
3.1	Emission Bandwidth	18
3.2	RF Output Power.....	19
3.3	Power Spectral Density	20
3.4	Unwanted Emissions.....	21
3.5	In-Band Emissions	24
3.6	Frequency Stability.....	26
3.7	Contention Based Protocol.....	27
3.8	AC Power Line Conducted Emissions	29
4	TEST LABORATORY INFORMATION	30
Appendix A. Emission Bandwidth		
Appendix B. RF Output Power		
Appendix C. Power Spectral Density		
Appendix D. Unwanted Emissions		
Appendix E. In-Band Emissions		
Appendix F. Frequency Stability		
Appendix G. Contention Based Protocol		
Appendix H. AC Power Line Conducted Emissions		

Release Record

Report No.	Version	Description	Issued Date
FR5N1304AO	Rev. 01	Initial issue	Mar. 17, 2026

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.222MHz 55.99 (Margin -6.75dB) - QP	Pass
15.407(b)(5) 15.209	Unwanted Emission	[dBuV/m at 3m]: 800.18MHz 42.75 (Margin -3.25dB) - PK	Pass
15.407(b)(6)	In-Band Emissions (Mask)	Meet the requirement of limit	Pass
15.407(a)(10)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)(5)	RF Output Power (e.i.r.p)	Max Power [dBm]: Non-beamforming mode 5925-6425MHz: 27.33 6425-6525MHz: 21.09 6525-6875MHz: 27.50 6875-7125MHz: 24.92 Beamforming mode 5925-6425MHz: 27.33 6425-6525MHz: 21.09 6525-6875MHz: 27.50 6875-7125MHz: 24.92	Pass
15.407(a)(5)	Power Spectral Density (e.i.r.p)	Meet the requirement of limit	Pass
15.407(d)(6)	Contention Based Protocol	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5925 ~ 7125	ax (HE20)	5955 ~ 7115	1 ~ 233 [59]	4	MCS 0-11
5925 ~ 7125	ax (HE40)	5965 ~ 7085	3 ~ 227 [29]	4	MCS 0-11
5925 ~ 7125	ax (HE80)	5985 ~ 7025	7 ~ 215 [14]	4	MCS 0-11
5925 ~ 7125	ax (HE160)	6025 ~ 6985	15 ~ 207 [7]	4	MCS 0-11
5925 ~ 7125	be (EHT20)	5955 ~ 7115	1 ~ 233 [59]	4	MCS 0-13
5925 ~ 7125	be (EHT40)	5965 ~ 7085	3 ~ 227 [29]	4	MCS 0-13
5925 ~ 7125	be (EHT80)	5985 ~ 7025	7 ~ 215 [14]	4	MCS 0-13
5925 ~ 7125	be (EHT160)	6025 ~ 6985	15 ~ 207 [7]	4	MCS 0-13
5925 ~ 7125	be (EHT320)	6105 ~ 6905	31 ~ 191 [6]	4	MCS 0-13

Note: OFDM/OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM and 4096QAM modulation.

1.1.2 Antenna Details

Ant. No.	Brand / Model	Type	Connector	Operating Frequencies (MHz) / Gain (dBi)			
				5925~6425	6425~6525	6525~6875	6875~7125
7	AWAN / 7102A1324000	IFA	UF.L	5.72	5.67	6.71	6.23
8	AWAN / 7102A1325000	IFA	UF.L	5.9	5.93	6.68	6.52
9	AWAN / 7102A1326000	IFA	UF.L	5.8	5.98	5.74	5.73
10	AWAN / 7102A1327000	IFA	UF.L	5	5.46	5.48	6.11

1.1.3 Configuration of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter 56Vdc from PoE	
Beamforming	☒ Support	☐ Not support
RU Configuration	☒ Full RU	☐ Partial RU
Channel Puncturing	☐ Support	☒ Not support

Note: The above power supplies are not bundled in market.

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	Wall Mount	---

1.1.5 Channel List

ax HE20 / be EHT20							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	61	6255	121	6555	181	6855
5	5975	65	6275	125	6575	185	6875
9	5995	69	6295	129	6595	189	6895
13	6015	73	6315	133	6615	193	6915
17	6035	77	6335	137	6635	197	6935
21	6055	81	6355	141	6655	201	6955
25	6075	85	6375	145	6675	205	6975
29	6095	89	6395	149	6695	209	6995
33	6115	93	6415	153	6715	213	7015
37	6135	97	6435	157	6735	217	7035
41	6155	101	6455	161	6755	221	7055
45	6175	105	6475	165	6775	225	7075
49	6195	109	6495	169	6795	229	7095
53	6215	113	6515	173	6815	233	7115
57	6235	117	6535	177	6835	---	---

ax HE40 / be EHT40							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	5965	67	6285	131	6605	195	6925
11	6005	75	6325	139	6645	203	6965
19	6045	83	6365	147	6685	211	7005
27	6085	91	6405	155	6725	219	7045
35	6125	99	6445	163	6765	227	7085
43	6165	107	6485	171	6805	---	---
51	6205	115	6525	179	6845	---	---
59	6245	123	6565	187	6885	---	---

ax HE80 / be EHT80							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	5985	71	6305	135	6625	199	6945
23	6065	87	6385	151	6705	215	7025
39	6145	103	6465	167	6785	---	---
55	6225	119	6545	183	6865	---	---

ax HE160 / be EHT160							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
15	6025	79	6345	143	6665	207	6985
47	6185	111	6505	175	6825	---	---

be EHT320							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	---	---
31	6105	95	6425	159	6745	---	---
63	6265	127	6585	191	6905	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	QSPR, Version: 6.00.00215.1		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	be EHT20-OFDMA	82.64%	0.83
	be EHT40-OFDMA	79.49%	1.00
	be EHT80-OFDMA	67.21%	1.73
	be EHT160-OFDMA	55.45%	2.56
	be EHT320-OFDMA	56.43%	2.49

1.1.7 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)	Power Index
be EHT20-OFDMA	5955	4
be EHT20-OFDMA	6175	4.5
be EHT20-OFDMA	6415	4.5
be EHT20-OFDMA	6435	4
be EHT20-OFDMA	6475	4
be EHT20-OFDMA	6515	4
be EHT20-OFDMA	6535	4
be EHT20-OFDMA	6715	3.5
be EHT20-OFDMA	6855	4
be EHT20-OFDMA	6875	4
be EHT20-OFDMA	6895	4.5
be EHT20-OFDMA	7015	4.5
be EHT20-OFDMA	7095	4.5
be EHT20-OFDMA	7115	-1
be EHT40-OFDMA	5965	6.5
be EHT40-OFDMA	6165	7.5
be EHT40-OFDMA	6405	7.5
be EHT40-OFDMA	6445	7
be EHT40-OFDMA	6485	7
be EHT40-OFDMA	6525	7
be EHT40-OFDMA	6565	7
be EHT40-OFDMA	6725	7
be EHT40-OFDMA	6845	7
be EHT40-OFDMA	6885	7
be EHT40-OFDMA	6925	7.5

be EHT40-OFDMA	7005	7.5
be EHT40-OFDMA	7085	7.5
be EHT80-OFDMA	5985	9
be EHT80-OFDMA	6145	10.5
be EHT80-OFDMA	6385	10.5
be EHT80-OFDMA	6465	9.5
be EHT80-OFDMA	6545	9.5
be EHT80-OFDMA	6625	9.5
be EHT80-OFDMA	6705	9.5
be EHT80-OFDMA	6785	9.5
be EHT80-OFDMA	6865	9.5
be EHT80-OFDMA	6945	10
be EHT80-OFDMA	7025	10
be EHT160-OFDMA	6025	12.5
be EHT160-OFDMA	6185	13
be EHT160-OFDMA	6345	13
be EHT160-OFDMA	6505	12
be EHT160-OFDMA	6665	12
be EHT160-OFDMA	6825	12
be EHT160-OFDMA	6985	12.5
be EHT320-OFDMA	6105	15.5
be EHT320-OFDMA	6265	15.5
be EHT320-OFDMA	6425	14.5
be EHT320-OFDMA	6585	15
be EHT320-OFDMA	6745	15
be EHT320-OFDMA	6905	15.5


1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Laptop	DELL	Latitude 3440	DoC	---
2	RJ45 load	ICC	---	---	---
3	Adapter	APD	WA-48B12FU	---	Provided by applicant. Remarks: 100-240Vac, 50-60Hz, 1.5A 12.0Vdc, 4.0A, 48.0W
4	POE	EnGenius	EPA5018XBT	---	Provided by applicant. Remarks: 100-240Vac, 50-60Hz, 1.5A 56.0Vdc, 1.7A

1.3 Test Setup Chart

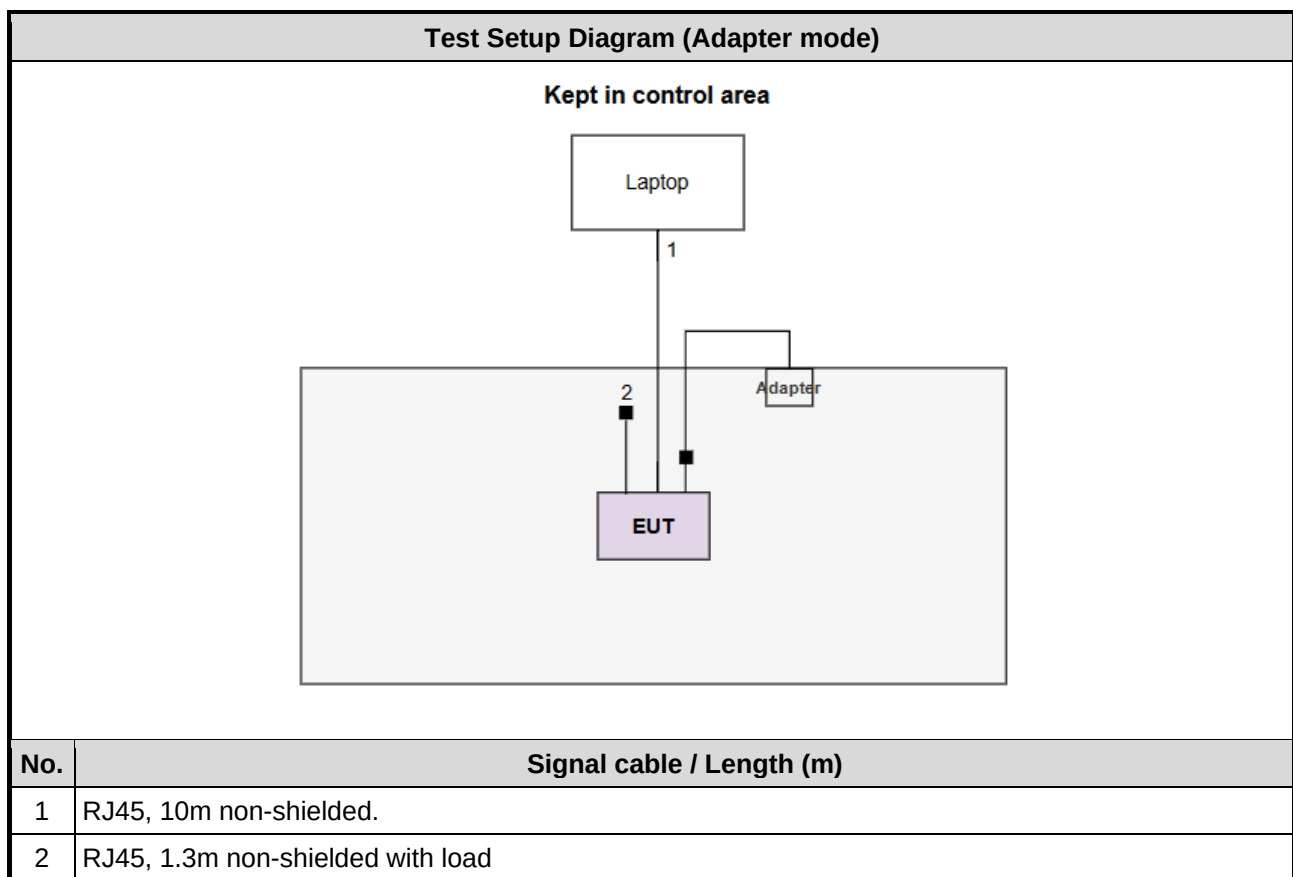

Test Setup Diagram (POE mode)

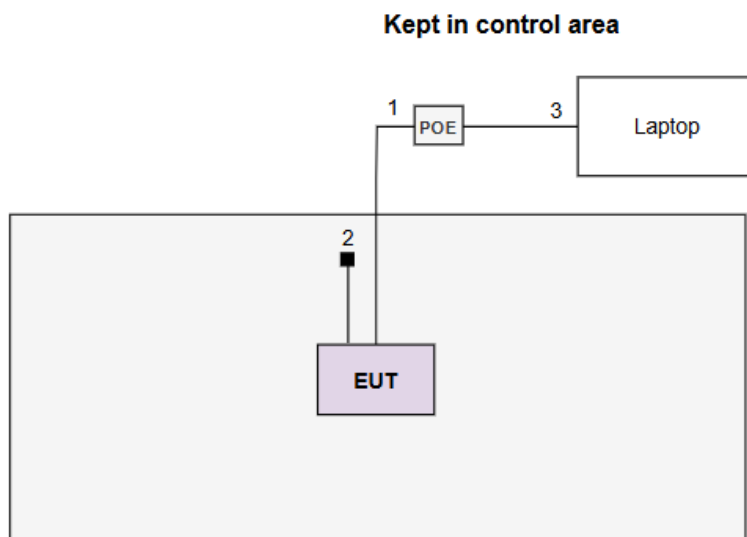

No.	Signal cable / Length (m)
1	RJ45, 10m non-shielded.
2	RJ45, 1.3m non-shielded with load
3	RJ45, 1.3m non-shielded.

1.4 The Equipment List

Test Item	Radiated Emission below 1 GHz				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Dec. 23, 2025				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 11, 2025	Mar. 10, 2026
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2025	Nov. 16, 2026
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jul. 04, 2025	Jul. 03, 2026
Preamplifier	EMC	EMC02325	980187	Jun. 24, 2025	Jun. 23, 2026
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 01, 2025	Sep. 30, 2026
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 19, 2025	Sep. 18, 2026
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 19, 2025	Sep. 18, 2026
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 19, 2025	Sep. 18, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission above 1 GHz				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Dec. 01 ~ Dec. 14, 2025				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Mar. 27, 2025	Mar. 26, 2026
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 20, 2024	Dec. 19, 2025
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Jan. 09, 2025	Jan. 08, 2026
Preamplifier	EMC	EMC118A45SE	980897	Aug. 08, 2025	Aug. 07, 2026
Preamplifier	EMC	EMC184045SE	980903	Aug. 08, 2025	Aug. 07, 2026
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 19, 2025	Sep. 18, 2026
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 19, 2025	Sep. 18, 2026
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 19, 2025	Sep. 18, 2026
Attenuator	Pasternack	PE7005-10	10-3	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER 7.5-18G	STI	STI15-9722	STI-HP7.5G-B	Sep. 19, 2025	Sep. 18, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Dec. 22, 2025				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 25, 2025	Feb. 24, 2026
LISN	R&S	ENV216	101579	May 07, 2025	May 06, 2026
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Mar. 21, 2025	Mar. 20, 2026
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Oct. 07, 2025	Oct. 06, 2026
50 ohm terminal	NA	50	3	Jul. 30, 2025	Jul. 29, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Dec. 04 ~ Dec. 13, 2025				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101910	Apr. 18, 2025	Apr. 17, 2026
Power Meter	Anritsu	ML2495A	1241002	Nov. 21, 2025	Nov. 20, 2026
Power Sensor	Anritsu	MA2411B	1207366	Nov. 21, 2025	Nov. 20, 2026
Attenuator	Pasternack	PE7005-10	10-2	Oct. 03, 2025	Oct. 02, 2026
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Jun. 26, 2025	Jun. 25, 2026
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 27, 2024	Dec. 26, 2025
Measurement Software	Sporton	SENSE-15407_NII	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Contention Based Protocol				
Test Site	(TH01-WS)				
Tested Date	Jan. 10, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV3044	101747	Mar. 18, 2025	Mar. 17, 2026
AWGN Signal Generator	R&S	SMW200A	109619	Aug. 04, 2025	Aug. 03, 2026
RF CABLE	woken	woken-S05	S/N:S05-141231-105	Oct. 09, 2025	Oct. 08, 2026
RF CABLE	woken	woken-S05	S/N:S05-141231-106	Oct. 09, 2025	Oct. 08, 2026
RF CABLE	EMC	EMC105SFF-SM-S M-2000	210816	Oct. 09, 2025	Oct. 08, 2026
Combiner(1x4)	MCLI	PS4-14	24939	Oct. 09, 2025	Oct. 08, 2026
Attenuator	woken	PE7013-20	20-1	Oct. 11, 2025	Oct. 10, 2026
Measurement Software	NA	NA	NA	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.407
ANSI C63.10-2020
ANSI C63.4-2014 + C63.4a-2017

1.6 Reference Guidance

FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
FCC KDB 412172 D01 Determining ERP and EIRP v01r01
FCC KDB 662911 D01 Multiple Transmitter Output v02r01

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Frequency error	$\pm 1 \times 10^{-9}$
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.96 dB
Radiated emission > 1 GHz	± 4.51 dB
Time	$\pm 0.1\%$
Temperature	± 0.4 °C

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807C
- CAB identifier: TW2732

2.2 Test Worst Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration	
Non-beamforming mode					
AC Power Line Conducted Emissions	be EHT320-OFDMA	6105	MCS 0	1, 2	
Unwanted Emissions ≤1GHz	be EHT320-OFDMA	6105	MCS 0	1, 2	
Unwanted Emissions >1GHz RF Output Power Emission Bandwidth Power Spectral Density In-Band Emissions	be EHT20-OFDMA	5955 / 6175 / 6415 / 6435 / 6475 / 6515 / 6535 / 6715 / 6855 / 6875 / 6895 / 7015 / 7095 / 7115	MCS 0	1	
	be EHT40-OFDMA	5965 / 6165 / 6405 / 6445 / 6485 / 6525 / 6565 / 6725 / 6845 / 6885 / 6925 / 7005 / 7085	MCS 0		
	be EHT80-OFDMA	5985 / 6145 / 6385 / 6465 / 6545 / 6625 / 6705 / 6785 / 6865 / 6945 / 7025	MCS 0		
	be EHT160-OFDMA	6025 / 6185 / 6345 / 6505 / 6665 / 6825 / 6985	MCS 0		
	be EHT320-OFDMA	6105 / 6265 / 6425 / 6585 / 6745 / 6905	MCS 0		
Contention Based Protocol	be EHT20-OFDMA	6195 / 6475 / 6695 / 6995	MCS 0	1	
	be EHT320-OFDMA	6105 / 6425 / 6905	MCS 0		
Frequency Stability	Un-modulation	6475 / 7015	---	1	
Beamforming mode					
RF Output Power	be EHT20-OFDMA	5955 / 6175 / 6415 / 6435 / 6475 / 6515 / 6535 / 6715 / 6855 / 6875 / 6895 / 7015 / 7095 / 7115	MCS 0	1	
	be EHT40-OFDMA	5965 / 6165 / 6405 / 6445 / 6485 / 6525 / 6565 / 6725 / 6845 / 6885 / 6925 / 7005 / 7085	MCS 0		
	be EHT80-OFDMA	5985 / 6145 / 6385 / 6465 / 6545 / 6625 / 6705 / 6785 / 6865 / 6945 / 7025	MCS 0		
	be EHT160-OFDMA	6025 / 6185 / 6345 / 6505 / 6665 / 6825 / 6985	MCS 0		
	be EHT320-OFDMA	6105 / 6265 / 6425 / 6585 / 6745 / 6905	MCS 0		
NOTE:					
1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.					
2. Beamforming mode is calculated not measured. The calculation method is conducted power of non-beamforming – specific factor as below					
Frequency Band		5.925~6.425GHz	6.425~6.525 GHz	6.525~6.875GHz	6.875~7.125GHz
Specific factor (dB)		2.39	2.89	2.54	2.07

-
3. The test configurations are listed as the follows:
Test configuration 1: Adapter mode
Test configuration 2: POE mode

3 Transmitter Test Results

3.1 Emission Bandwidth

3.1.1 Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

3.1.2 Test Procedures


26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW.
2. Set VBW $\geq$ 3 RBW.
3. Sample detection and single sweep mode shall be used.
4. Use the 99 % power bandwidth function of the instrument.

3.1.3 Test Setup



3.1.4 Test Result

Ambient Condition	23-25°C / 61-64%	Tested By	Aska Huang
-------------------	------------------	-----------	------------

Refer to Appendix A.

3.2 RF Output Power

3.2.1 Limit

Frequency Band	Operating Mode	Maximum EIRP Limit
5925 ~ 7125 MHz	☒ Indoor access point	30 dBm
	☐ Subordinate device	30 dBm
	☐ Client devices	24 dBm

3.2.2 Test Procedures


Method PM-G (Measurement using a gated RF average power meter)

1. Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
2. $EIRP = \text{Measured conducted power} + \text{Antenna gain}$

Spectrum analyzer (For channel that extends across the 6.525 / 6.875 GHz boundary)

1. Set RBW = 1MHz, VBW = 3MHz, Sweep time = Auto, Detector = RMS.
2. Trace average at least 100 traces in power averaging mode.
3. Compute power by integrating the spectrum across the 26 dB EBW.
4. Add $10 \log(1/X, X:\text{duty cycle})$ if duty cycle is <98%.
5. $EIRP = \text{Measured conducted power} + \text{Antenna gain}$

3.2.3 Test Setup

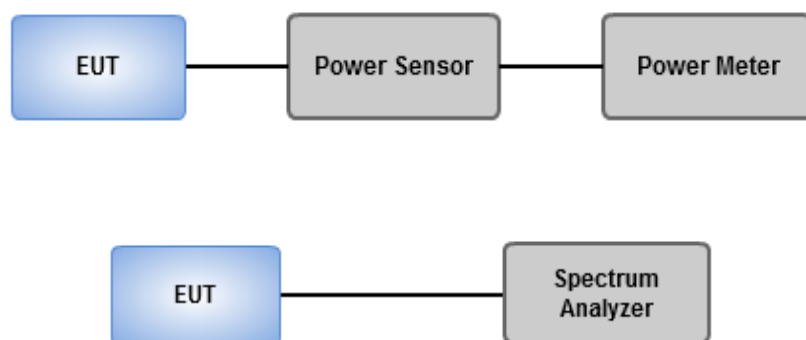

3.2.4 Test Result

Ambient Condition	23-25°C / 61-64%	Tested By	Aska Huang
-------------------	------------------	-----------	------------

Refer to Appendix B.

3.3 Power Spectral Density

3.3.1 Limit

Frequency Band	Operating Mode	Limit
5925 ~ 7125 MHz	☒ Indoor access point	EIRP: 5 dBm / 1 MHz
	☐ Subordinate device	EIRP: 5 dBm / 1 MHz
	☐ Client devices	EIRP: -1 dBm / 1 MHz

3.3.2 Test Procedures


Duty cycle $\geq$ 98 %

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.
4. EIRP PSD = Measured conducted power density + Antenna gain

Duty cycle < 98 %

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (total on/off period of the transmitted signal).
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.
6. EIRP PSD = Measured conducted power density + Antenna gain

3.3.3 Test Setup



3.3.4 Test Result

Ambient Condition	23-25°C / 61-64%	Tested By	Aska Huang
-------------------	------------------	-----------	------------

Refer to Appendix C.

3.4 Unwanted Emissions

3.4.1 Limit of Unwanted Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit		
Operating Band	PK Limit	AV Limit
5.925 – 7.125 GHz	e.i.r.p. -7 dBm [88.2 dBuV/m@3m]	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Radiated Emissions below 1 GHz

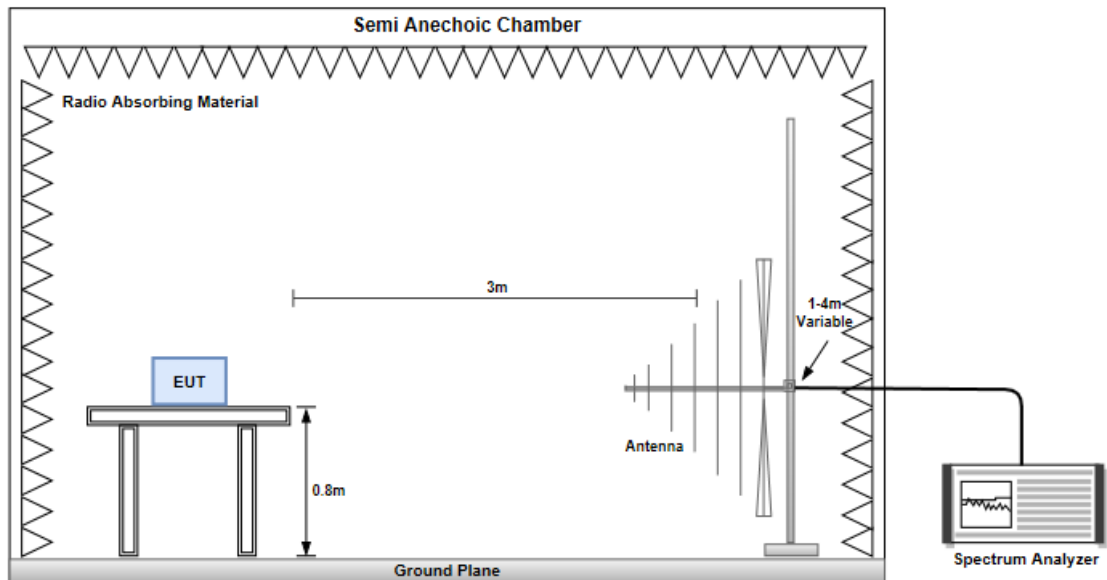

Radiated Emissions above 1 GHz

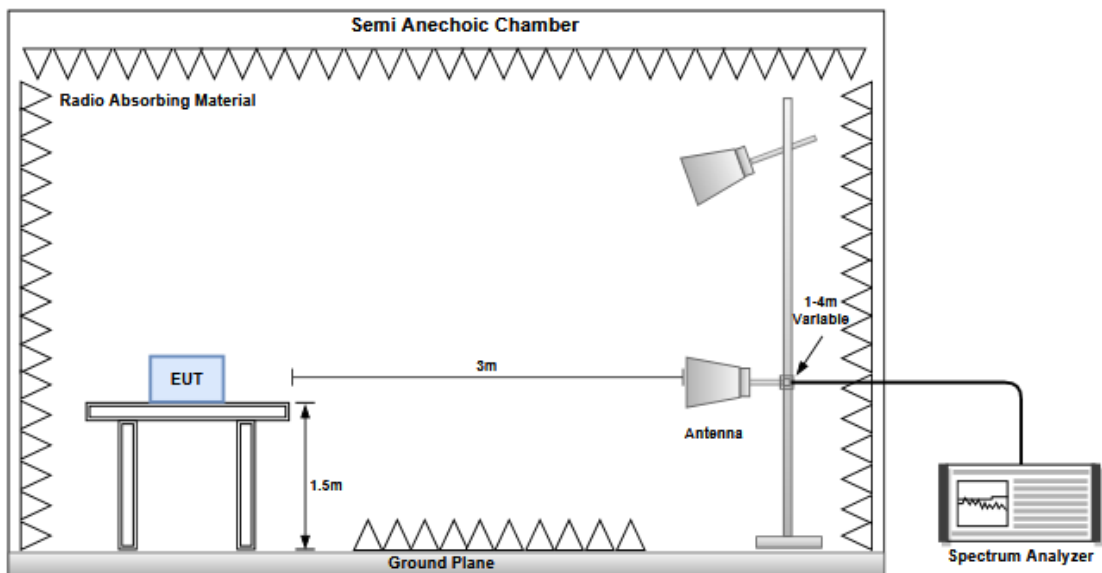


3.4.4 Test Results

Refer to Appendix D.

3.5 In-Band Emissions

3.5.1 Limit


Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

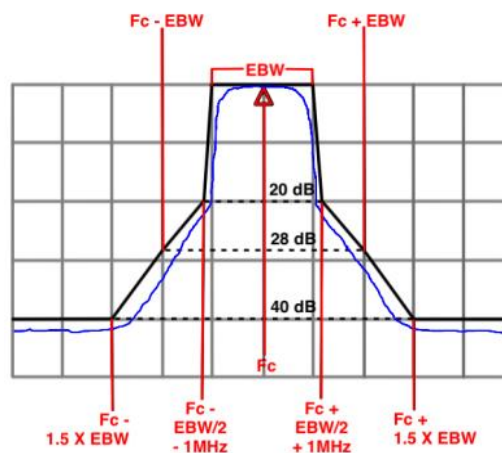

3.5.2 Test Procedures

1. Connect output of the antenna port to a spectrum analyzer
2. Set the reference level of the measuring equipment
3. Measure the 26 dB EBW
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

3.5.3 Test Setup



3.5.4 Test Results

Ambient Condition	23-25°C / 61-64%	Tested By	Aska Huang
--------------------------	------------------	------------------	------------

Refer to Appendix E.

3.6 Frequency Stability


3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 20 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under normal and extreme condition for temperature and voltage.

3.6.3 Test Setup

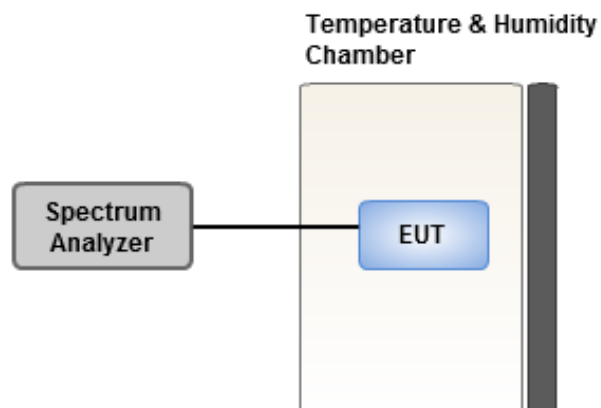

3.6.4 Test Result of Frequency Stability

Ambient Condition	23-25°C / 61-64%	Tested By	Aska Huang
-------------------	------------------	-----------	------------

Refer to Appendix F.

3.7 Contention Based Protocol


3.7.1 Limit

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty

3.7.2 Test Procedure

1. Configure the EUT to transmit with a constant duty cycle
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer, as shown in Figure. Ensure that the attenuator 1 provides enough attenuation to not overload the signal analyzer receiver.
4. Monitoring the signal analyzer, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 D02 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a splitter, to the signal analyzer and the EUT as shown in Figure.
7. Transmit the AWGN signal (RF ON) at the EUT's antenna port and verify its characteristics and signal power level on the signal analyzer.
8. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

3.7.3 Test Setup

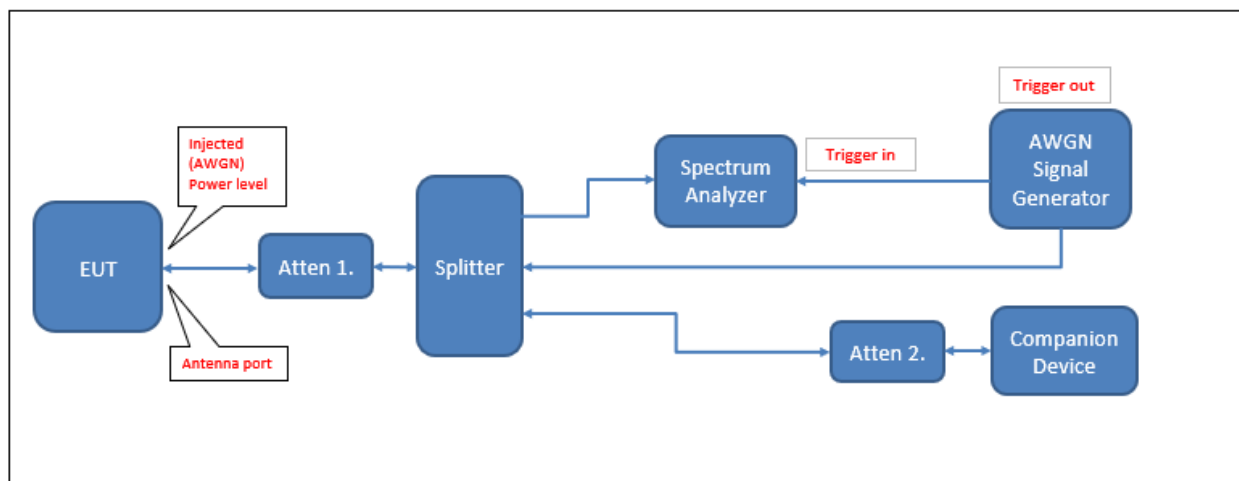

3.7.4 Test Result

Ambient Condition	22°C / 65%	Tested By	Jack Li
EUT FW version	0.8.00		

Refer to Appendix G.

3.8 AC Power Line Conducted Emissions

3.8.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.8.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.8.3 Test Setup

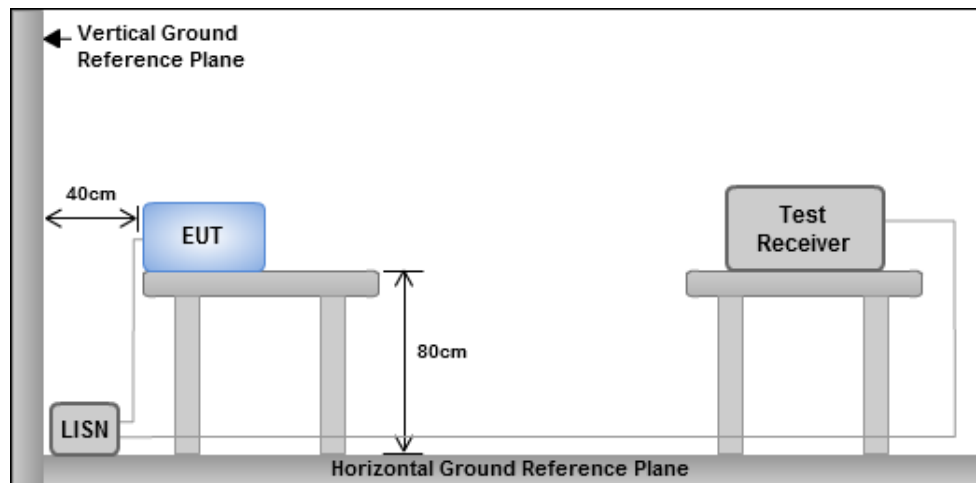

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.8.4 Test Result

Refer to Appendix H.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <https://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	23.166M	19.09M	19M1D1D	22.77M	19.05M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	45.144M	38.154M	38M2D1D	43.164M	38.012M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	91.608M	78.075M	78M1D1D	88.704M	77.677M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	174.24M	157.394M	157MD1D	170.544M	156.561M
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	343.2M	316.31M	316MD1D	336.864M	314.796M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	23.232M	19.088M	19M1D1D	22.638M	19.053M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	44.748M	38.146M	38M1D1D	43.164M	38.048M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	91.344M	78.074M	78M1D1D	88.968M	77.979M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	23.49M	19.096M	19M1D1D	22.902M	19.034M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	45.012M	38.162M	38M2D1D	43.68M	38M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	91.56M	78.078M	78M1D1D	87.912M	77.891M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	175.44M	157.568M	158MD1D	170.016M	156.88M
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	345.312M	316.94M	317MD1D	337.92M	315.771M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	23.43M	19.106M	19M1D1D	22.638M	19.031M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	44.484M	38.141M	38M1D1D	43.296M	38.025M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	91.608M	78.126M	78M1D1D	89.232M	77.93M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	173.184M	157.29M	157MD1D	171.6M	157.122M

Max-N dB = Maximum 26dB down bandwidth
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 26dB down bandwidth
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	Inf	22.968M	19.068M	22.77M	19.09M	23.034M	19.05M	23.1M	19.076M
6175MHz	Pass	Inf	22.836M	19.052M	22.836M	19.066M	23.166M	19.053M	23.034M	19.068M
6415MHz	Pass	Inf	23.1M	19.065M	22.77M	19.065M	22.902M	19.06M	23.1M	19.085M
6435MHz	Pass	Inf	23.034M	19.088M	23.166M	19.069M	22.77M	19.079M	22.902M	19.064M
6475MHz	Pass	Inf	23.166M	19.053M	23.166M	19.061M	23.166M	19.086M	23.034M	19.088M
6515MHz	Pass	Inf	23.232M	19.067M	22.638M	19.079M	23.232M	19.065M	23.232M	19.083M
6535MHz	Pass	Inf	23.298M	19.055M	23.166M	19.056M	22.968M	19.073M	23.166M	19.096M
6715MHz	Pass	Inf	23.166M	19.084M	22.968M	19.058M	23.034M	19.058M	23.034M	19.088M
6855MHz	Pass	Inf	22.902M	19.07M	23.43M	19.075M	23.034M	19.07M	23.1M	19.083M
6875MHz Straddle 6.525-6.875GHz	Pass	Inf	23.49M	19.034M	23.4M	19.079M	23.16M	19.055M	22.98M	19.042M
6895MHz	Pass	Inf	22.968M	19.062M	22.638M	19.092M	22.968M	19.071M	23.034M	19.079M
7015MHz	Pass	Inf	22.968M	19.058M	22.704M	19.059M	22.968M	19.062M	22.77M	19.106M
7095MHz	Pass	Inf	22.968M	19.064M	22.704M	19.064M	22.704M	19.045M	23.43M	19.095M
7115MHz	Pass	Inf	23.166M	19.031M	23.232M	19.079M	22.836M	19.092M	23.166M	19.068M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	Inf	44.616M	38.095M	44.352M	38.089M	43.296M	38.087M	44.088M	38.08M
6165MHz	Pass	Inf	45.144M	38.154M	44.88M	38.022M	44.748M	38.012M	43.164M	38.083M
6405MHz	Pass	Inf	43.956M	38.132M	44.484M	38.079M	43.692M	38.106M	43.956M	38.075M
6445MHz	Pass	Inf	44.616M	38.133M	43.56M	38.05M	44.748M	38.048M	43.164M	38.078M
6485MHz	Pass	Inf	44.352M	38.146M	44.616M	38.08M	43.692M	38.079M	44.484M	38.113M
6525MHz Straddle 6.525-6.875GHz	Pass	Inf	44.76M	38.111M	44.52M	38.038M	44.04M	38.094M	43.68M	38.047M
6565MHz	Pass	Inf	44.484M	38.128M	43.824M	38.126M	43.692M	38.063M	43.824M	38.074M
6725MHz	Pass	Inf	44.748M	38.104M	45.012M	38.08M	43.956M	38.039M	44.484M	38.078M
6845MHz	Pass	Inf	44.352M	38.133M	43.956M	38.056M	43.824M	38.065M	43.956M	38.06M
6885MHz Straddle 6.525-6.875GHz	Pass	Inf	44.7M	38.162M	44.4M	38M	43.74M	38.095M	44.1M	38.096M
6925MHz	Pass	Inf	43.956M	38.102M	43.296M	38.037M	43.956M	38.101M	43.428M	38.086M
7005MHz	Pass	Inf	44.484M	38.141M	44.088M	38.108M	43.956M	38.091M	43.692M	38.079M
7085MHz	Pass	Inf	44.088M	38.136M	44.22M	38.106M	44.484M	38.025M	43.692M	38.063M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	Inf	88.968M	77.828M	88.704M	77.863M	90.024M	77.882M	89.232M	77.677M
6145MHz	Pass	Inf	89.76M	78.034M	90.816M	77.925M	90.024M	77.985M	89.232M	77.886M
6385MHz	Pass	Inf	89.76M	78.021M	90.288M	77.923M	91.608M	78.075M	88.968M	77.86M
6465MHz	Pass	Inf	90.288M	78.032M	91.344M	77.979M	90.552M	78.074M	88.968M	78.038M
6545MHz Straddle 6.525-6.875GHz	Pass	Inf	90.36M	78.033M	91.56M	77.932M	90.84M	78.06M	90M	77.996M
6625MHz	Pass	Inf	90.288M	77.96M	90.816M	77.908M	90.816M	77.981M	88.704M	77.934M
6705MHz	Pass	Inf	90.024M	77.942M	87.912M	77.945M	90.288M	77.942M	89.232M	77.891M
6785MHz	Pass	Inf	90.024M	77.928M	88.44M	77.967M	89.76M	78.078M	90.024M	77.944M
6865MHz Straddle 6.525-6.875GHz	Pass	Inf	91.32M	78.016M	89.52M	77.943M	90.12M	78.024M	89.52M	77.92M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
6945MHz	Pass	Inf	89.76M	78.015M	90.552M	77.93M	90.288M	78.072M	89.232M	78.005M
7025MHz	Pass	Inf	90.288M	78.126M	91.608M	77.95M	90.816M	77.986M	89.496M	77.999M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	Inf	172.128M	156.861M	171.072M	156.76M	171.6M	156.595M	170.544M	156.561M
6185MHz	Pass	Inf	173.184M	157.32M	171.072M	157.136M	172.128M	157.26M	170.544M	157.326M
6345MHz	Pass	Inf	174.24M	157.394M	172.128M	157.233M	171.072M	157.262M	172.128M	156.979M
6505MHz Straddle 6.525-6.875GHz	Pass	Inf	175.44M	157.361M	172.56M	157.568M	172.8M	157.086M	173.04M	157.08M
6665MHz	Pass	Inf	172.128M	157.376M	170.016M	157.418M	171.6M	157.133M	170.544M	156.88M
6825MHz Straddle 6.525-6.875GHz	Pass	Inf	174.72M	157.519M	172.56M	157.299M	172.56M	157.207M	172.56M	157.172M
6985MHz	Pass	Inf	171.6M	157.29M	171.6M	157.139M	173.184M	157.122M	172.128M	157.191M
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	Inf	336.864M	315.04M	337.92M	315.144M	338.976M	314.992M	337.92M	314.796M
6265MHz	Pass	Inf	343.2M	316.31M	340.032M	316.019M	341.088M	316.137M	337.92M	315.323M
6425MHz Straddle 6.525-6.875GHz	Pass	Inf	341.088M	316.565M	340.032M	315.826M	341.088M	316.447M	343.2M	316.94M
6585MHz Straddle 6.525-6.875GHz	Pass	Inf	342.144M	316.473M	342.144M	316.836M	343.2M	316.761M	342.144M	316.174M
6745MHz Straddle 6.525-6.875GHz	Pass	Inf	342.144M	316.877M	340.032M	315.771M	340.032M	316.088M	342.144M	316.302M
6905MHz Straddle 6.525-6.875GHz	Pass	Inf	345.312M	316.209M	337.92M	315.967M	343.2M	316.423M	341.088M	316.17M

Port X-N dB = 26dB down bandwidth



Port X-OBW = Port X 99% occupied bandwidth



5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5955MHz

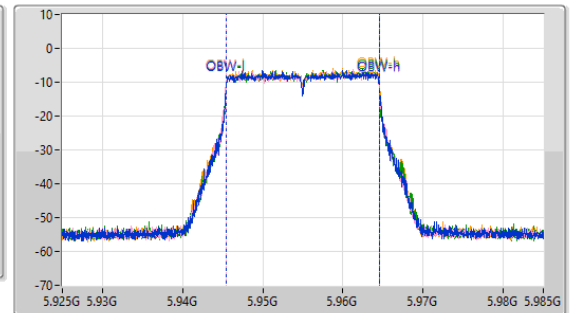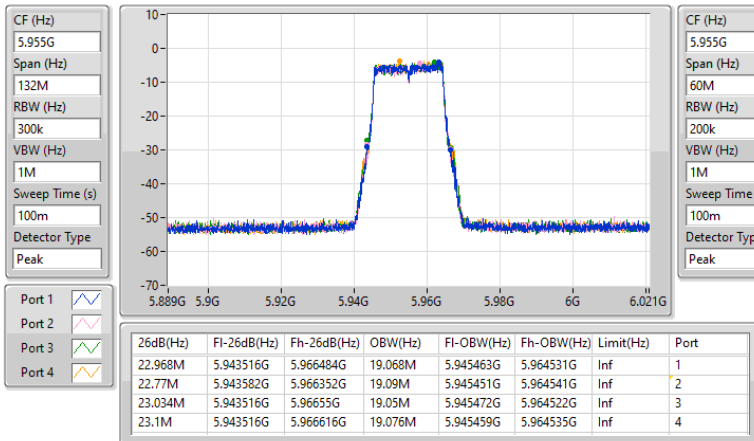

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6175MHz

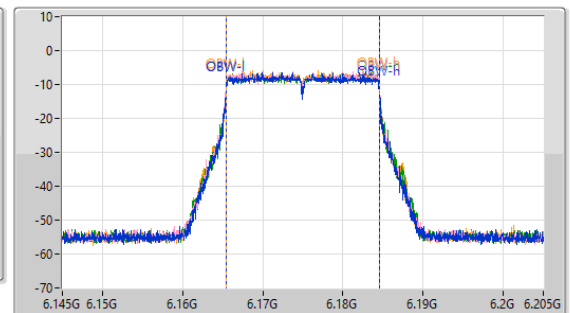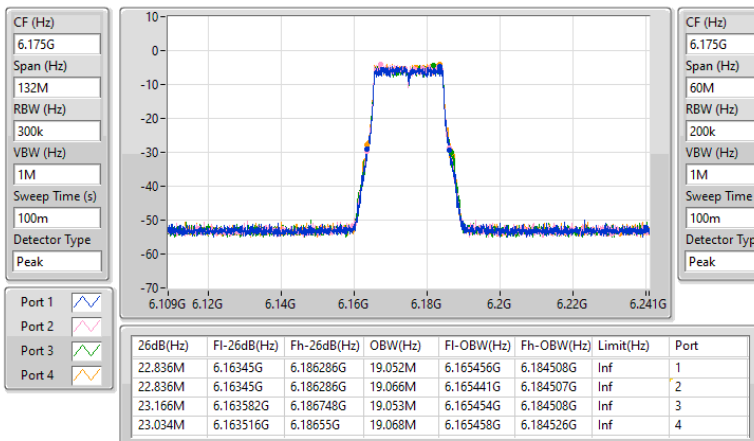




5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6415MHz

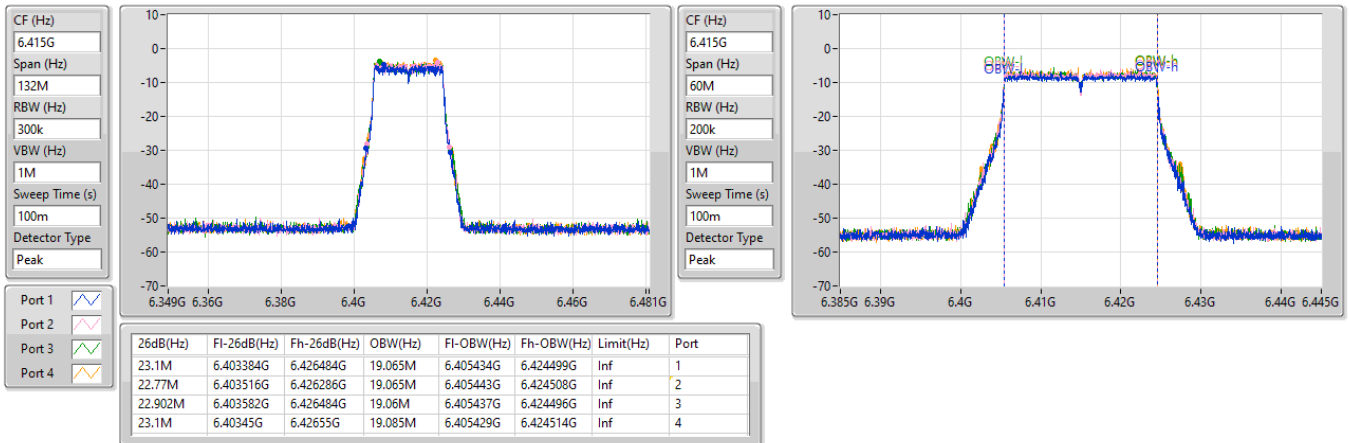

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6435MHz


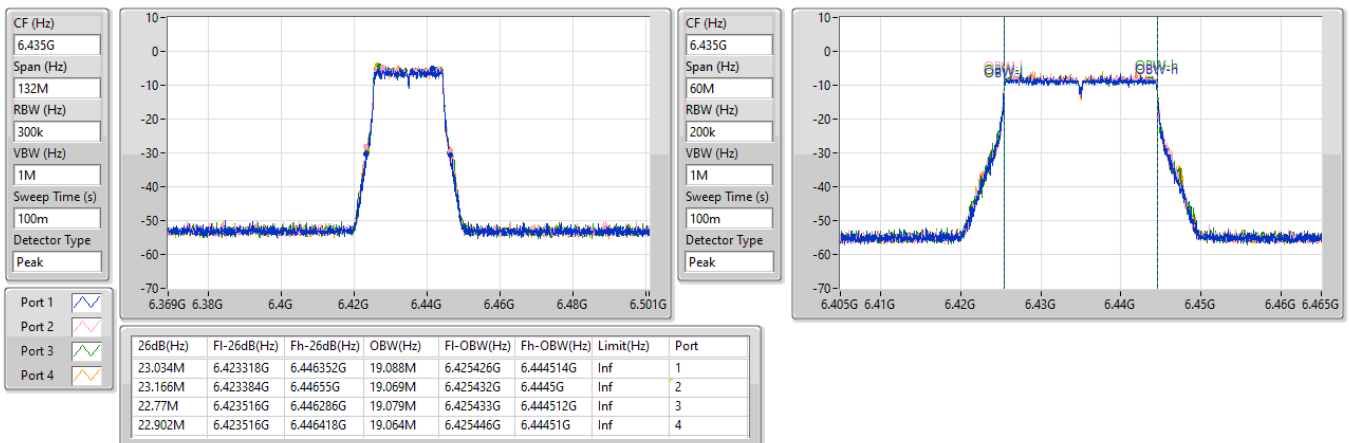




6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6475MHz

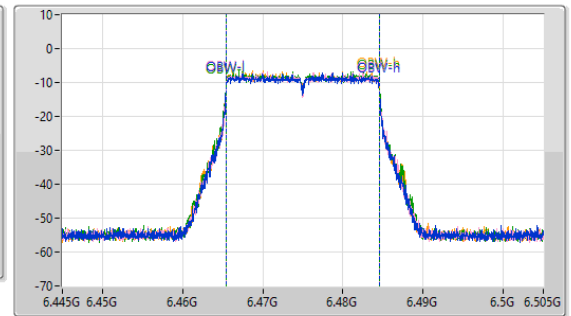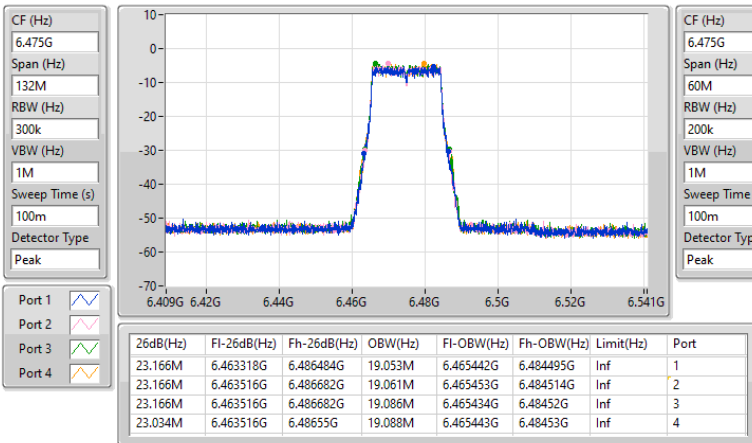

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6515MHz

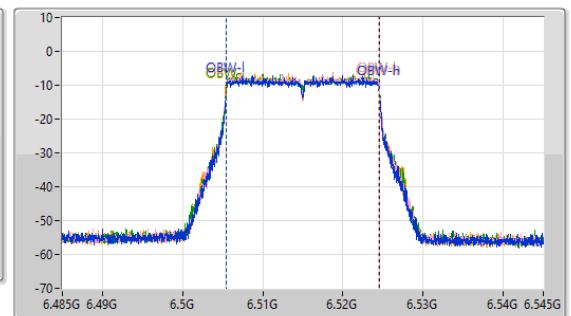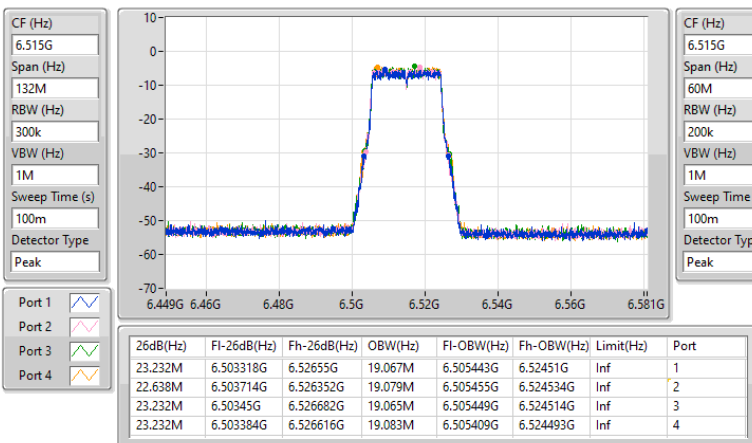




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6535MHz

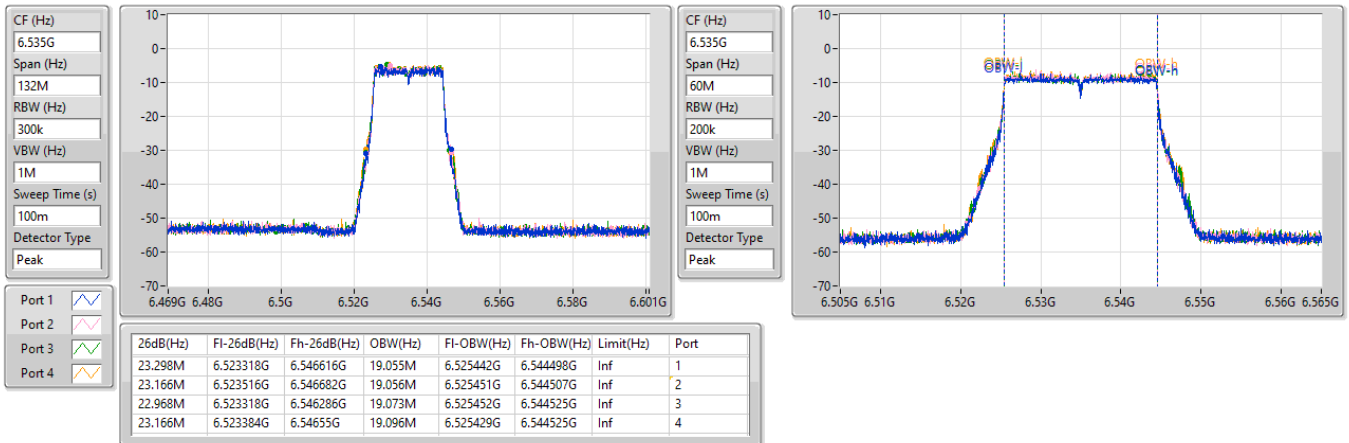

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6715MHz


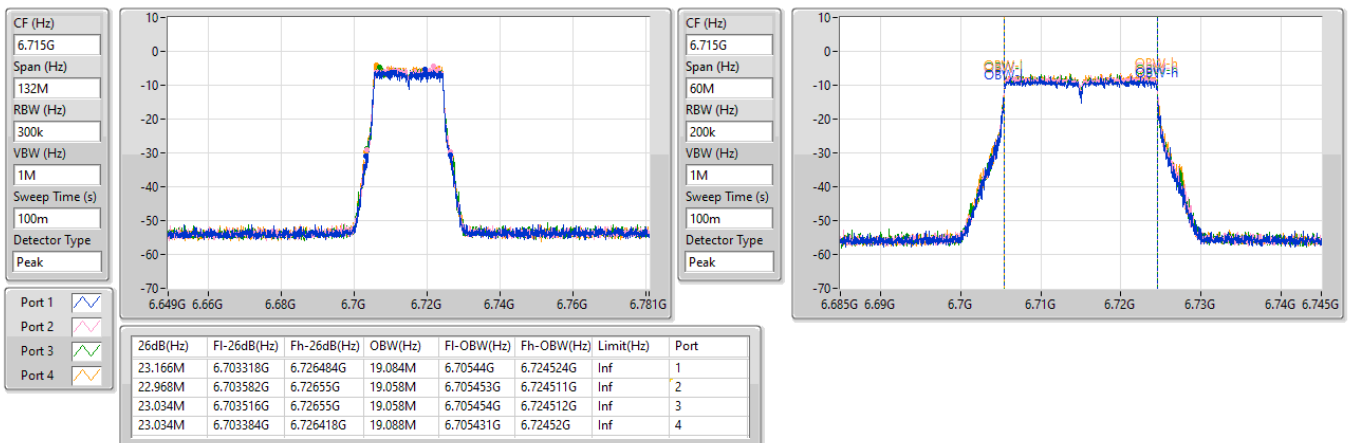




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6855MHz

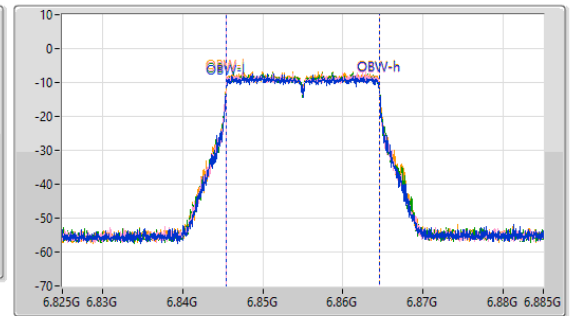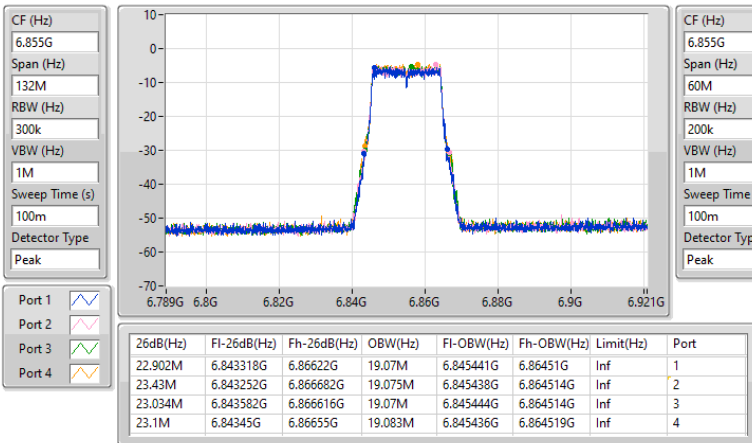

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6875MHz Straddle 6.525-6.875GHz

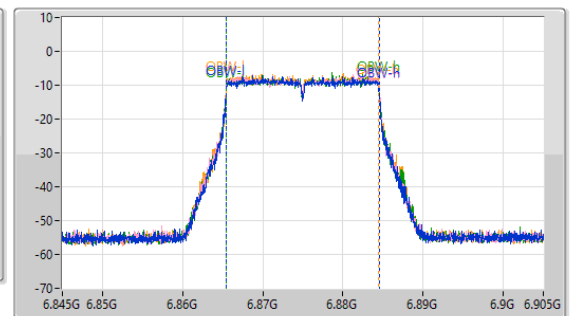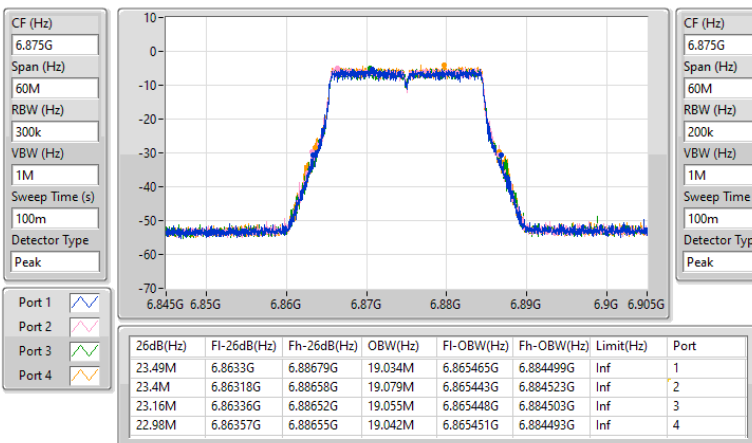




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6895MHz

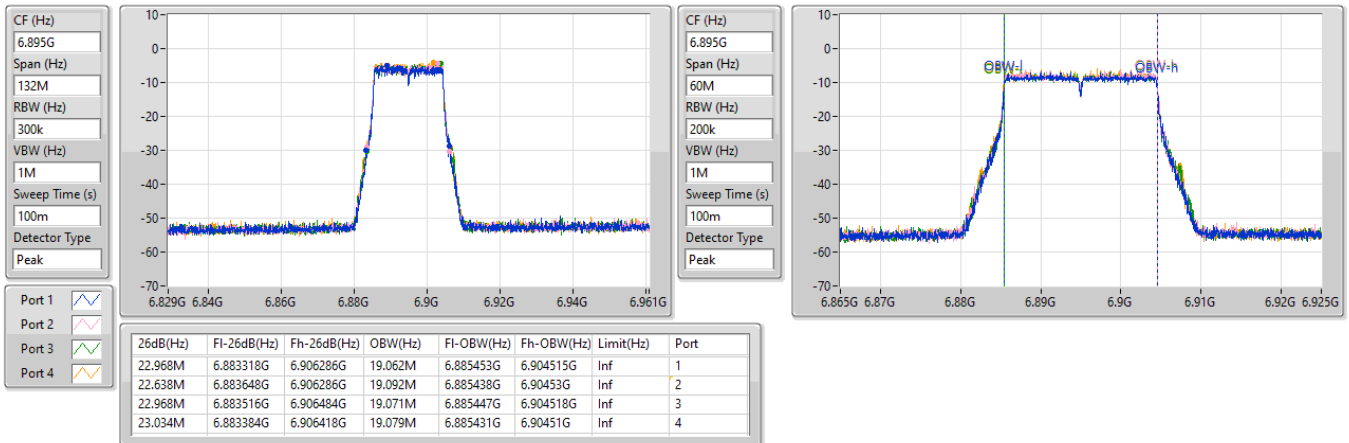

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

7015MHz

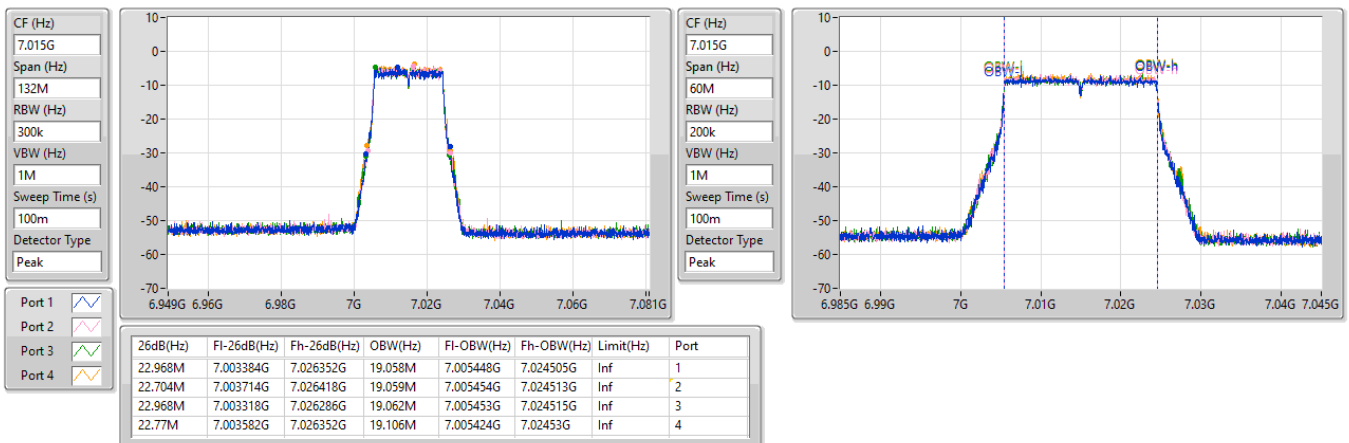




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


7095MHz

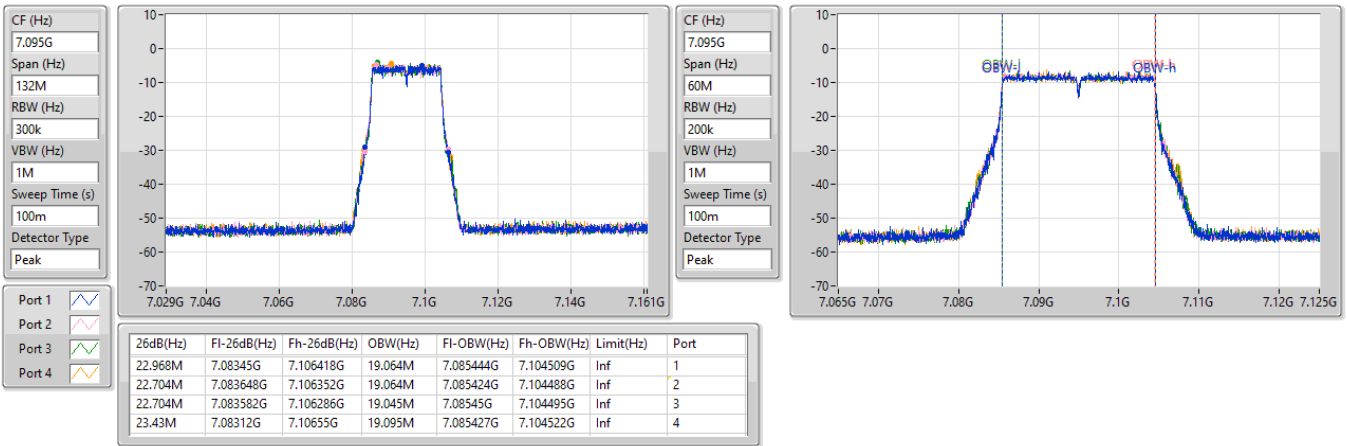

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

7115MHz


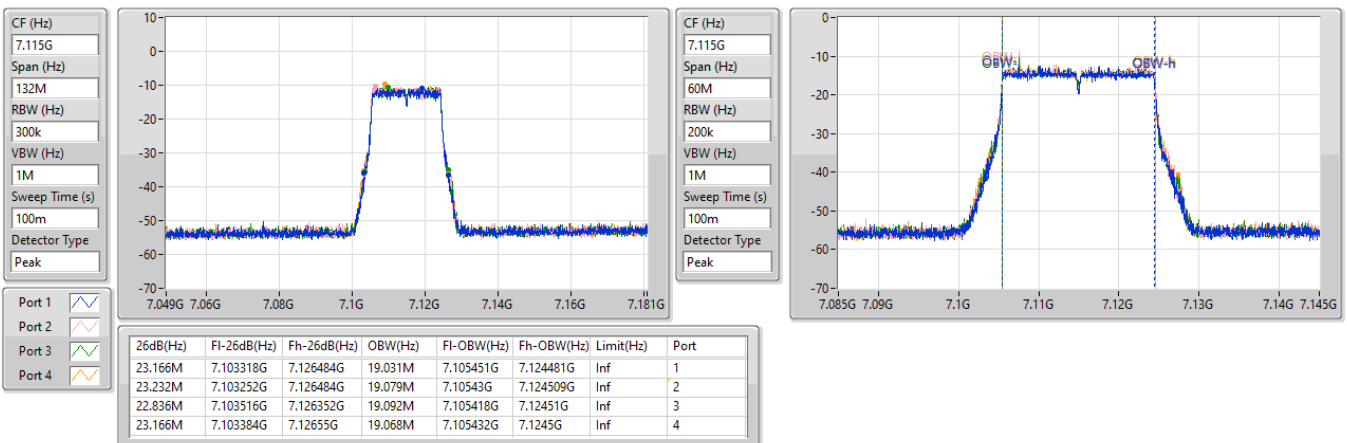




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



5965MHz

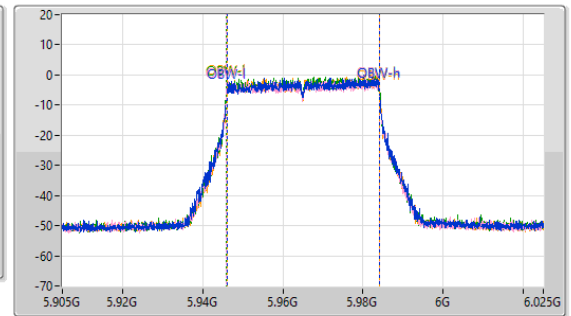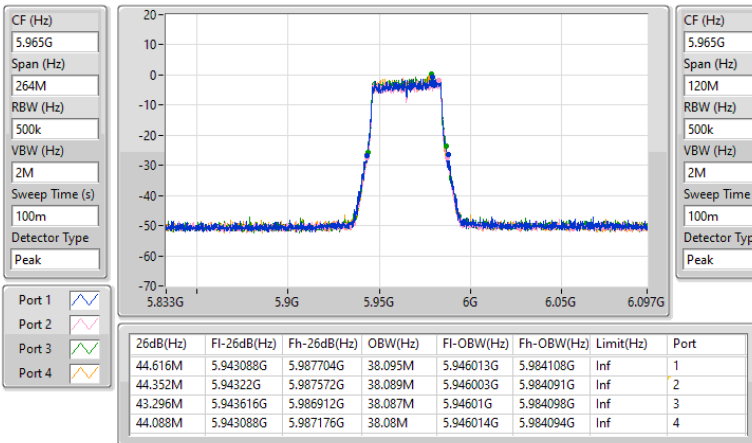

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6165MHz

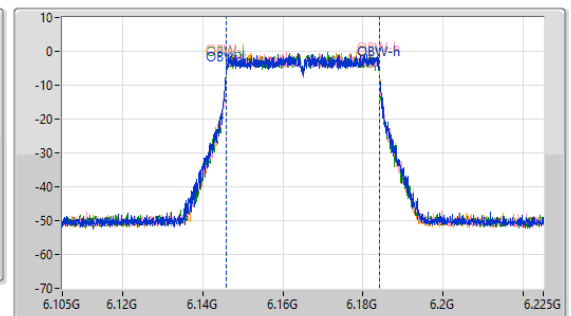
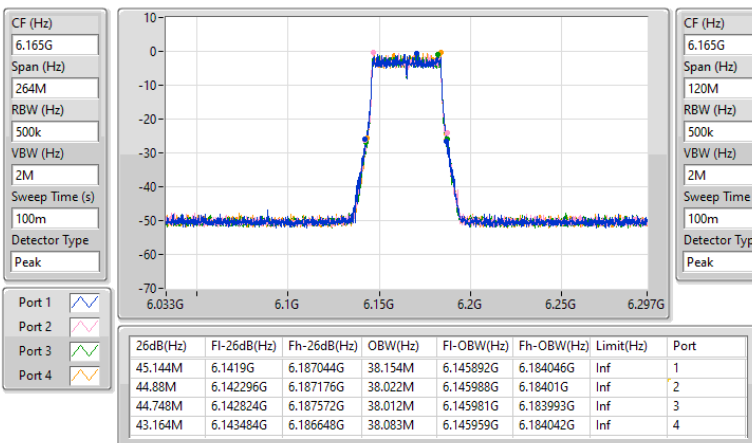




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6405MHz

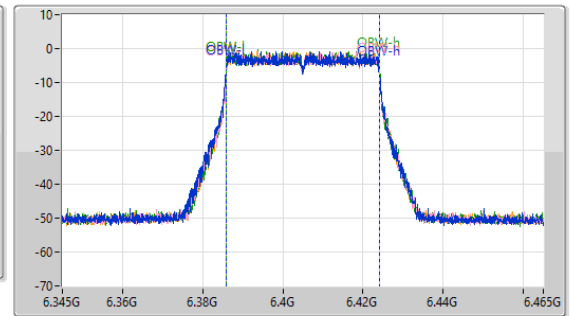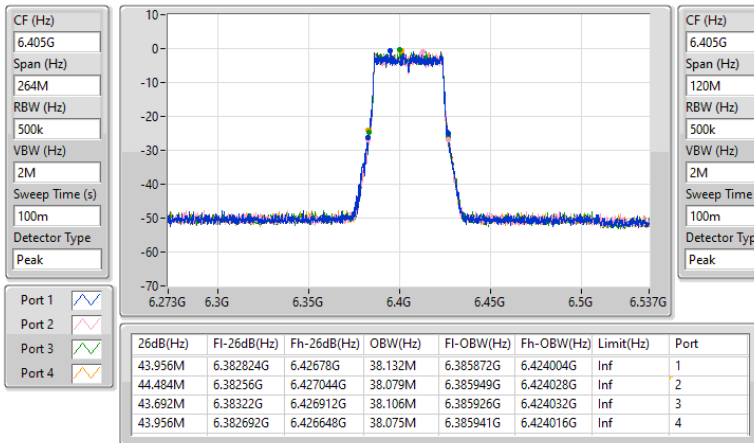

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6445MHz

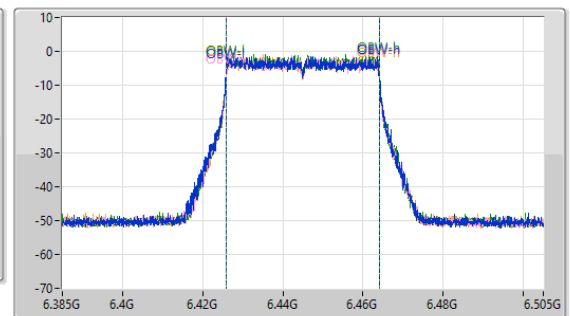
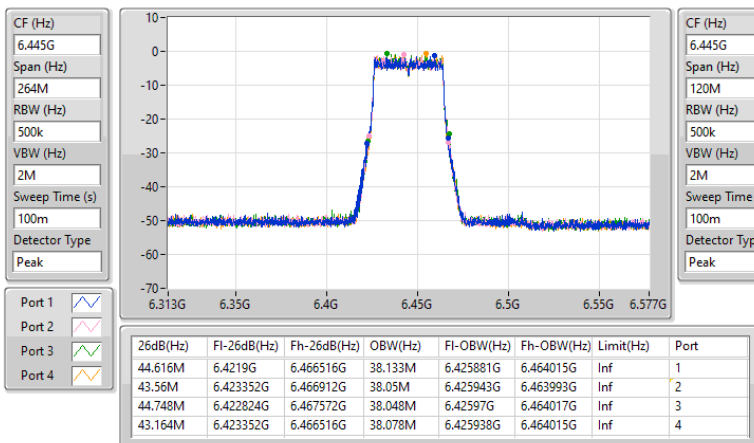




6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6485MHz

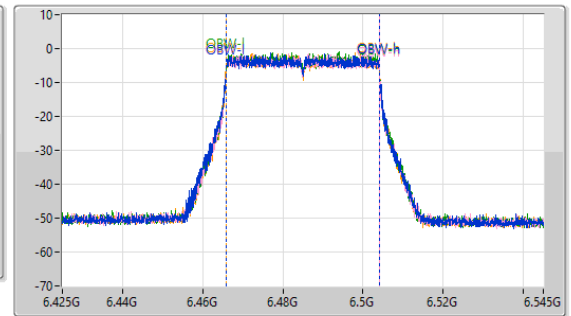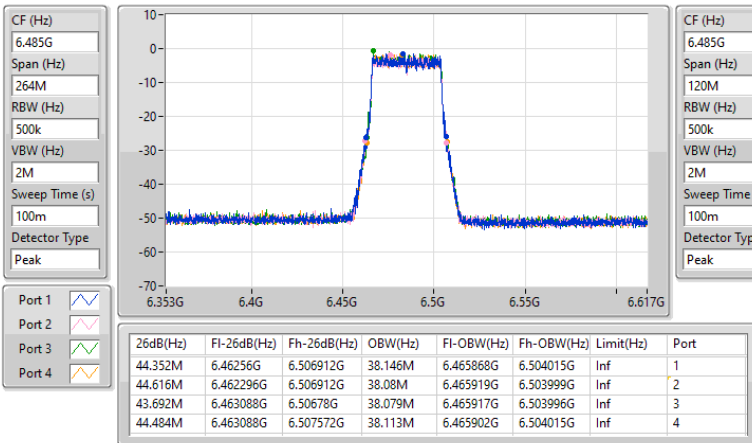

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6525MHz Straddle 6.525-6.875GHz

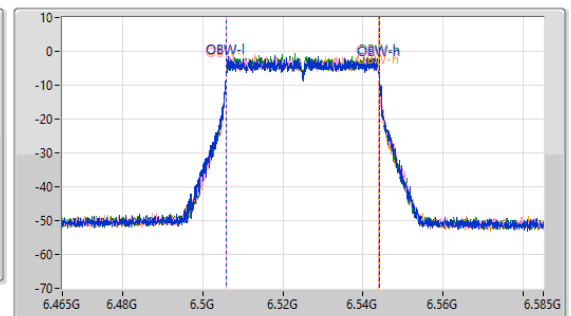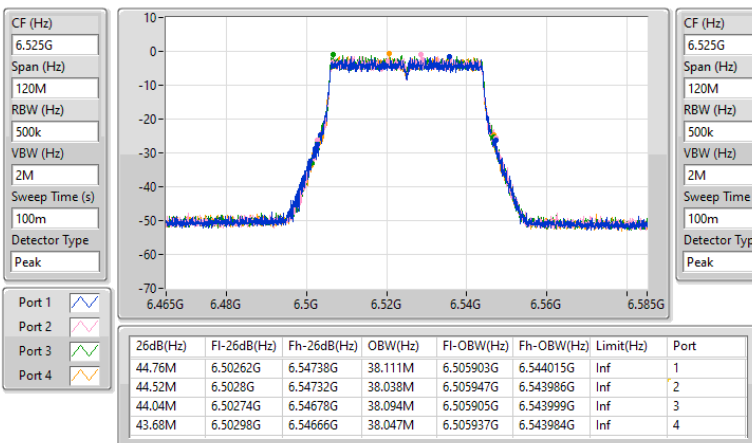




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6565MHz

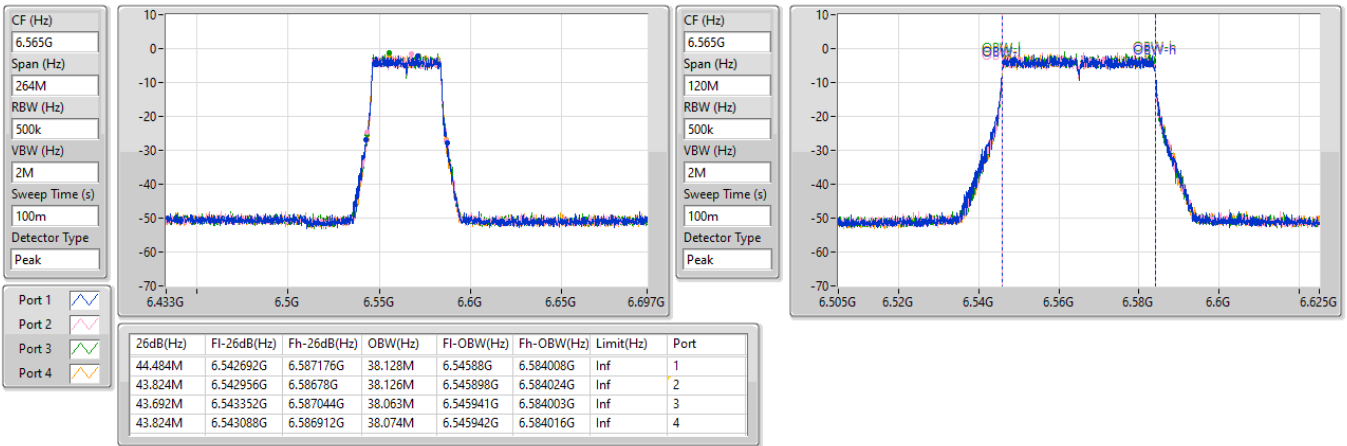

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6725MHz

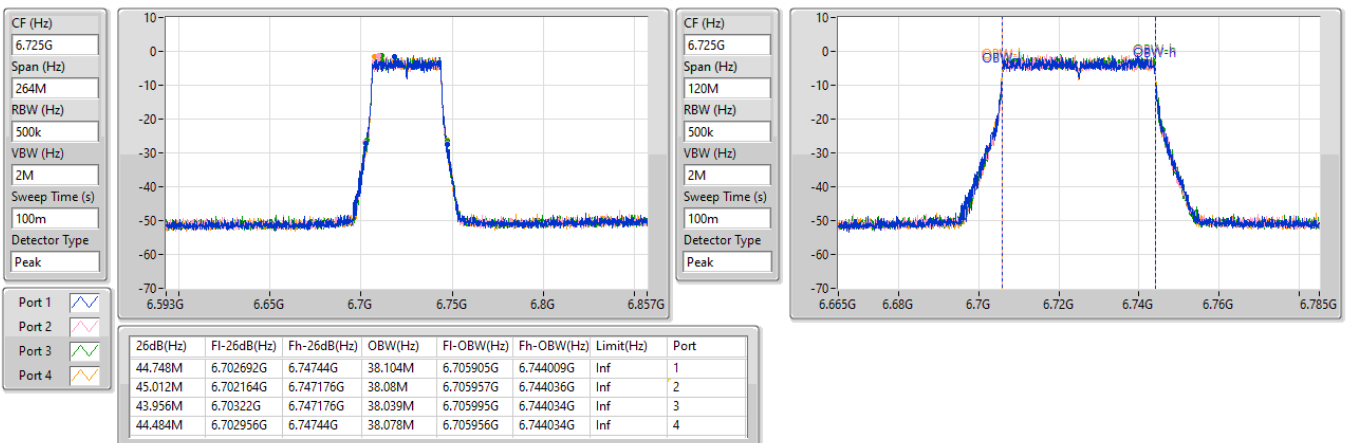




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6845MHz

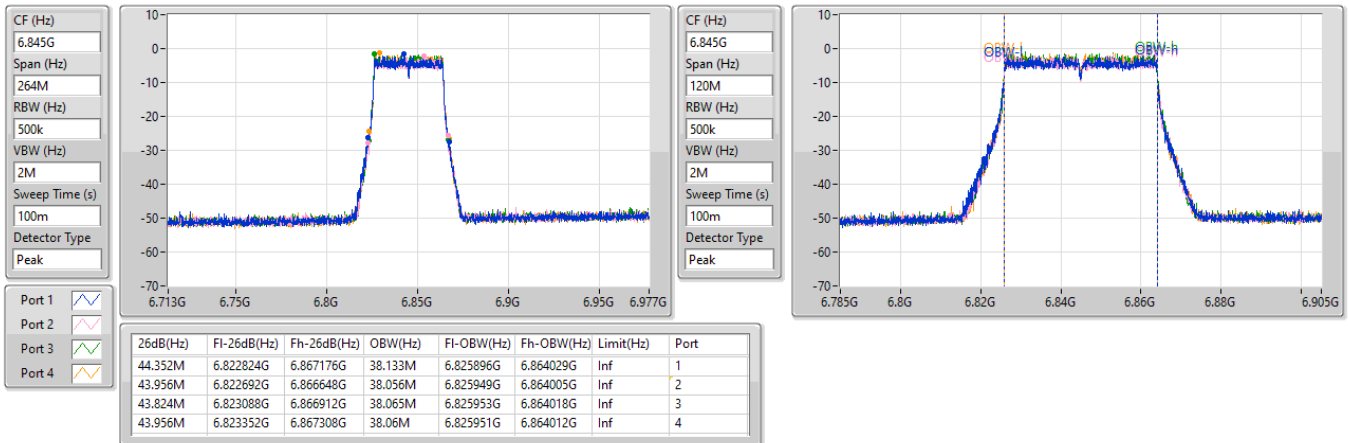

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6885MHz Straddle 6.525-6.875GHz

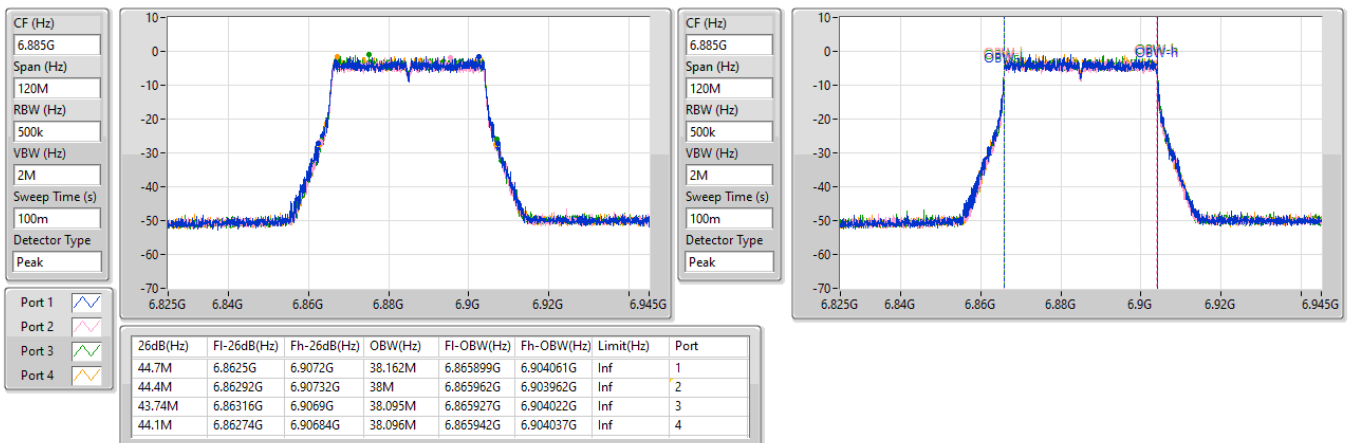




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6925MHz

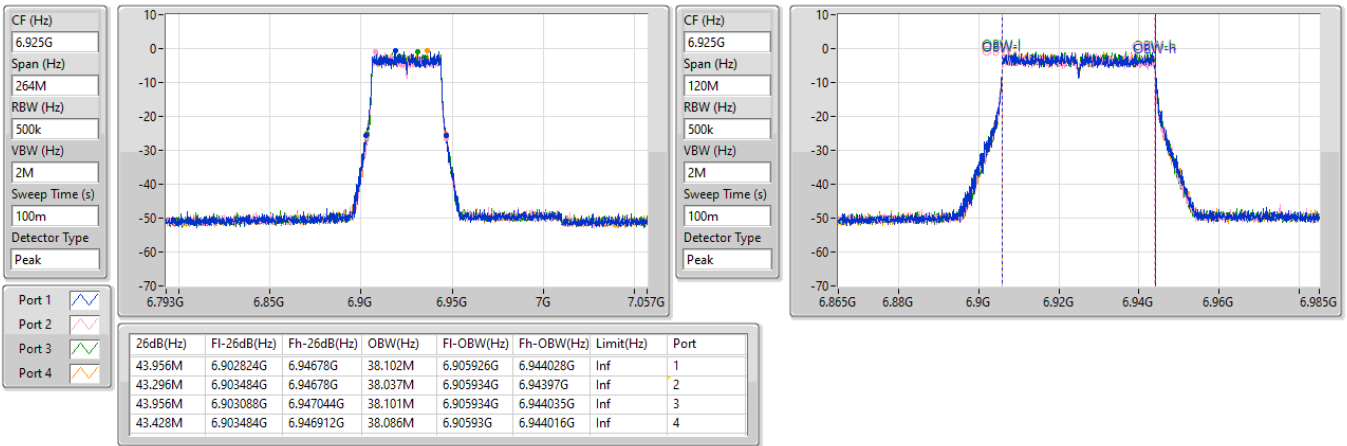

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

7005MHz


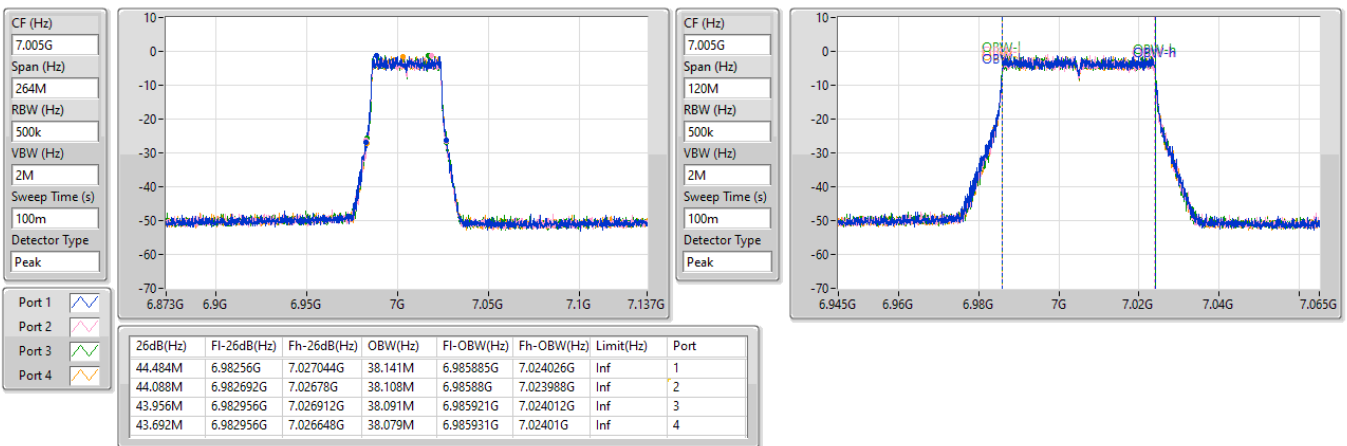




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



7085MHz

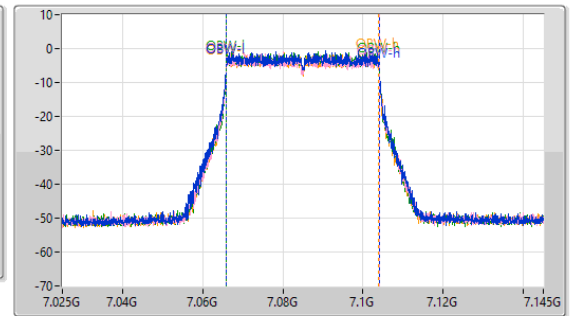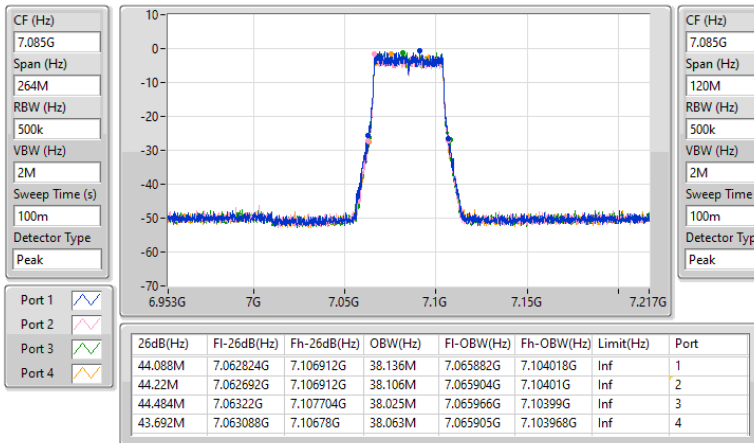

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5985MHz

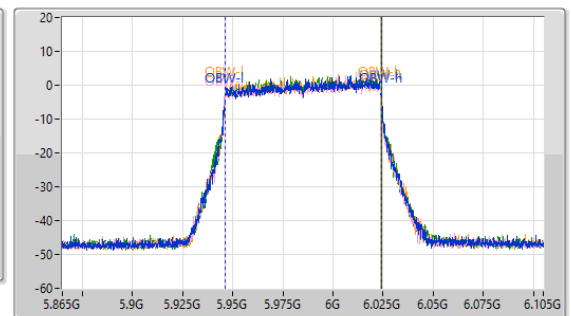
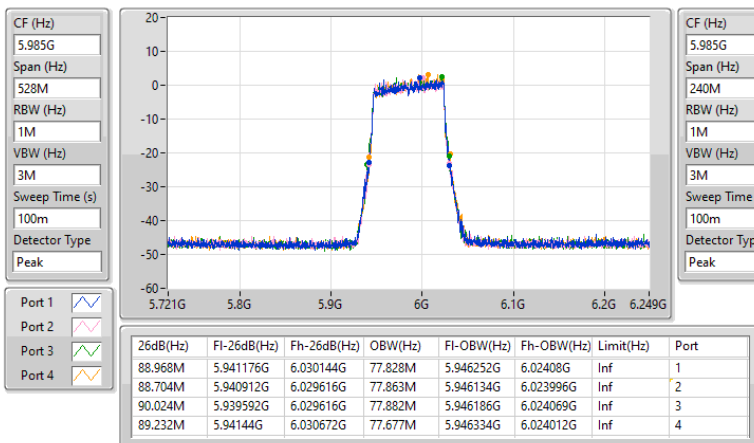




5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6145MHz

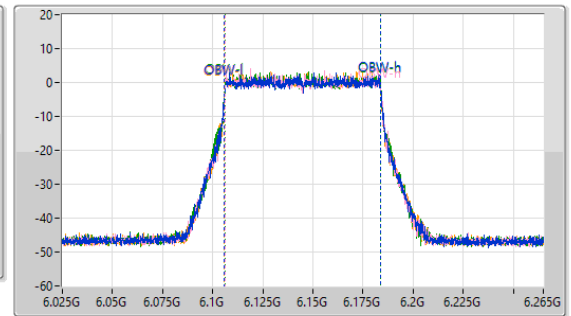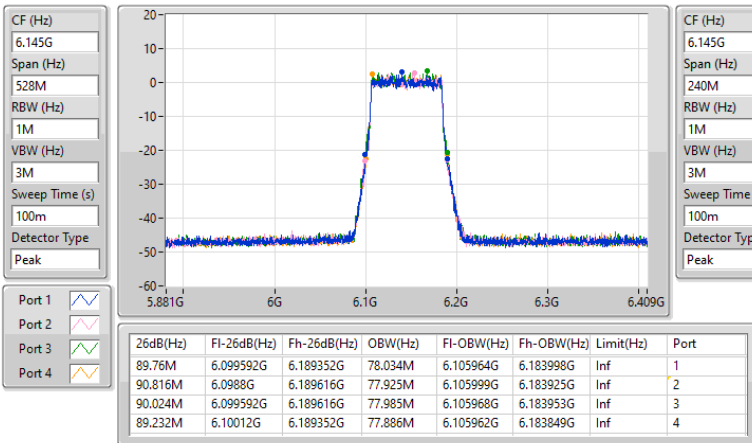

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6385MHz

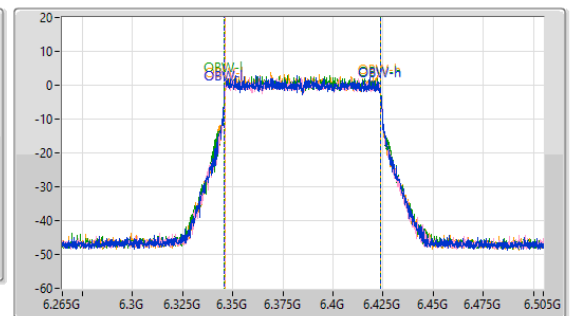
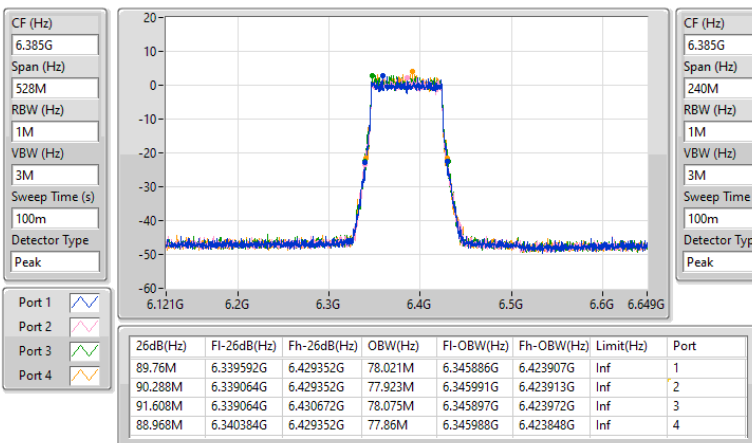




6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6465MHz

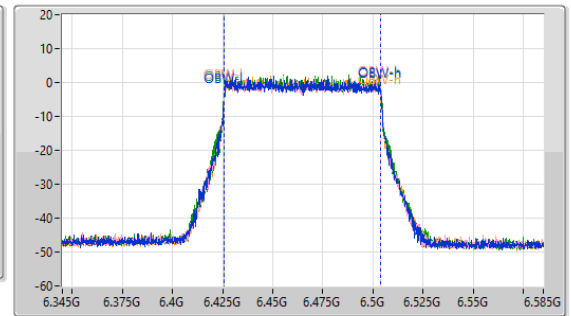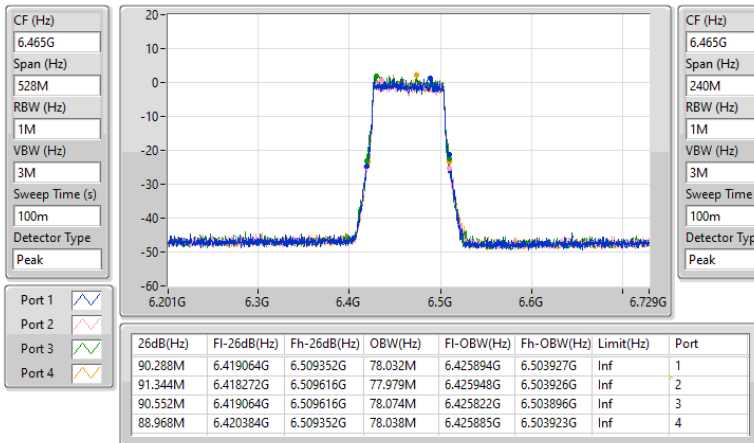

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6545MHz Straddle 6.525-6.875GHz

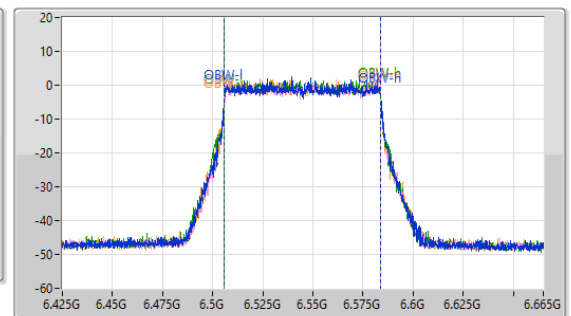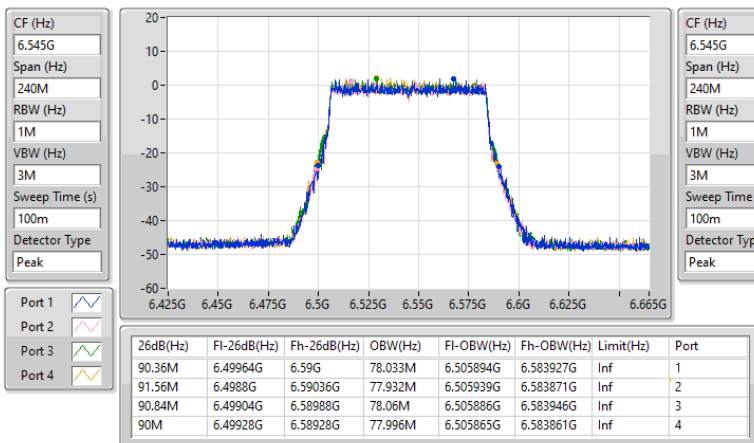




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


6625MHz

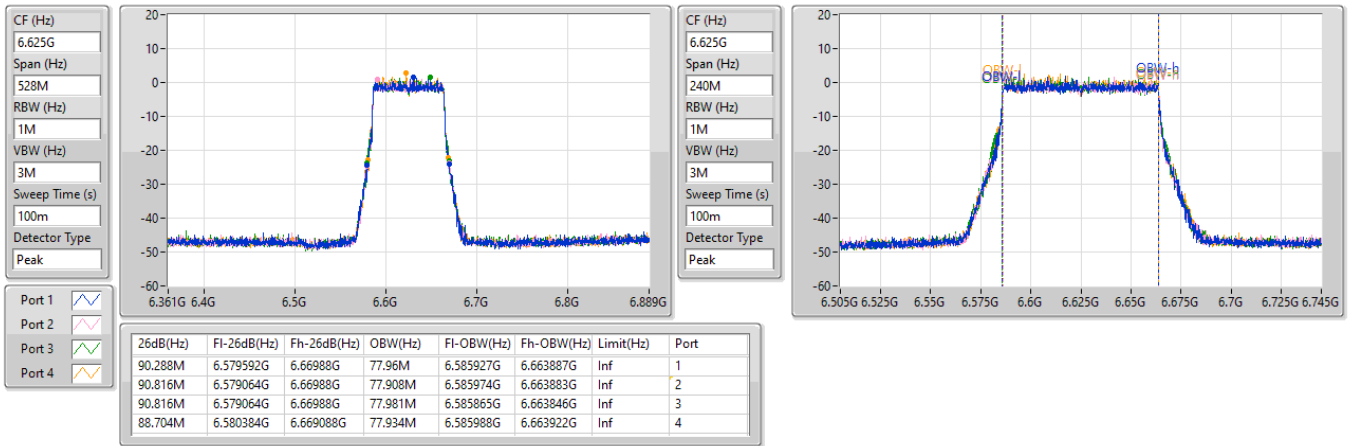

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6705MHz


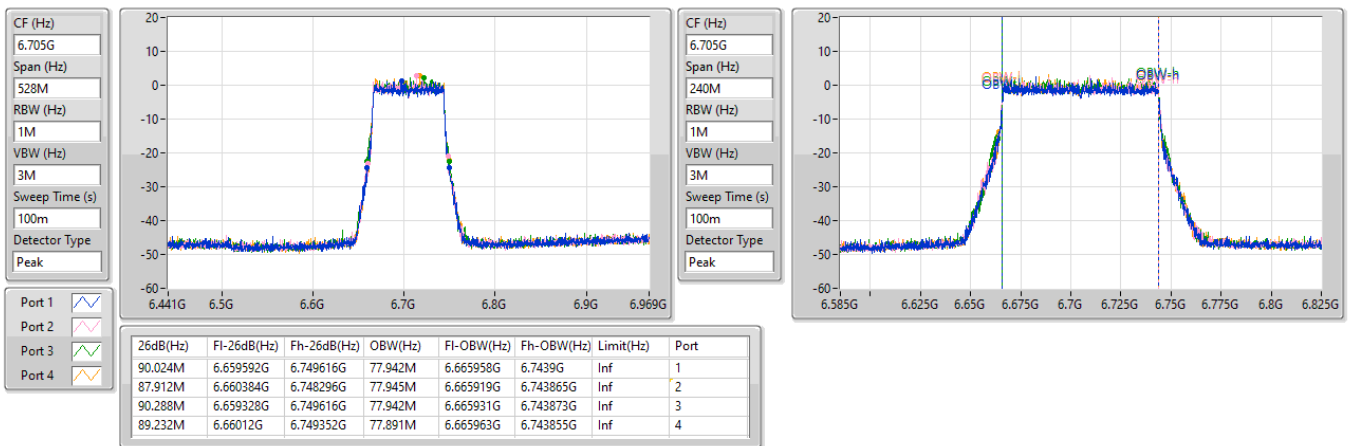




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6785MHz

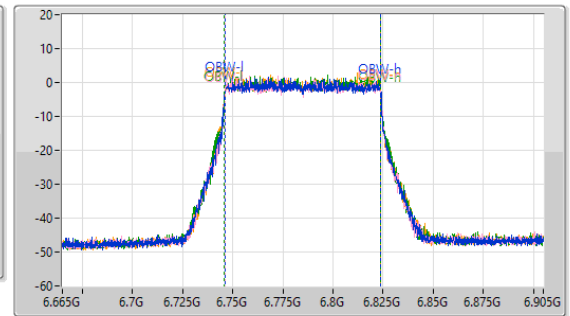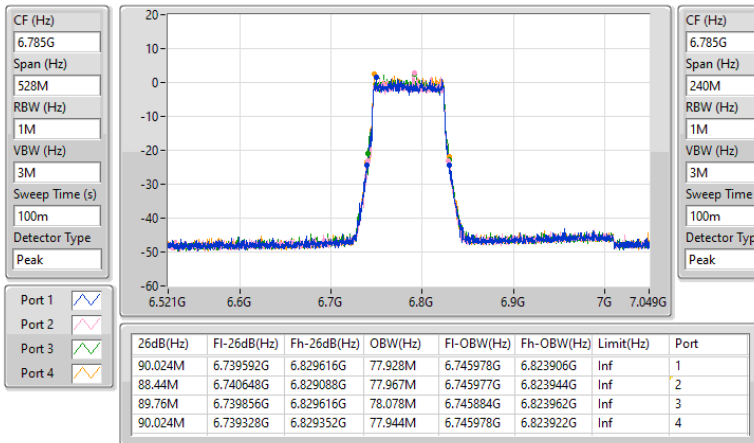

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6865MHz Straddle 6.525-6.875GHz

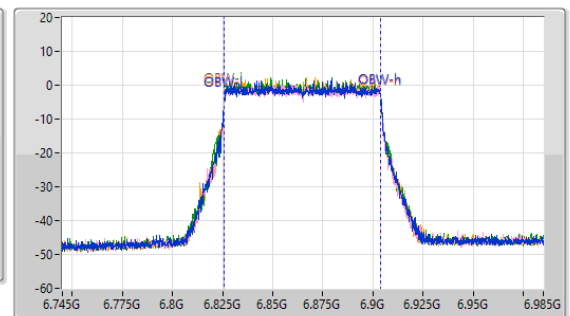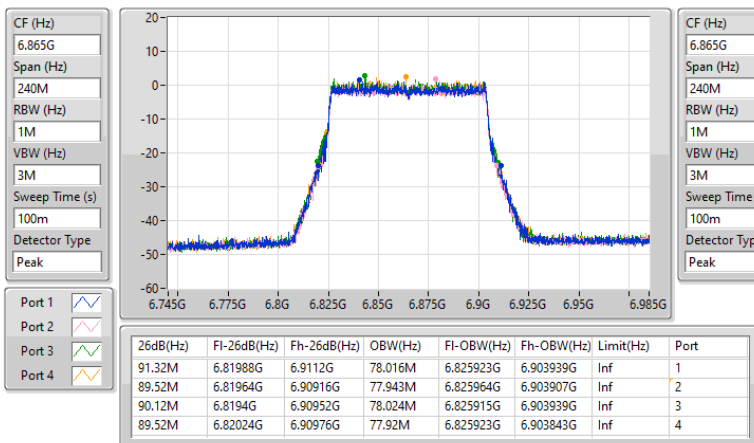




6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


6945MHz

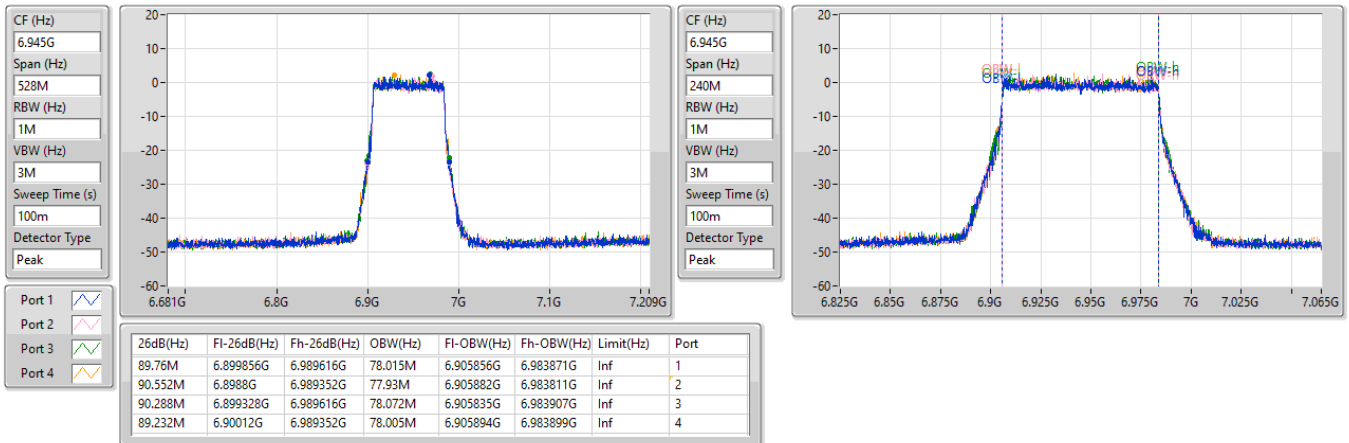

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

7025MHz


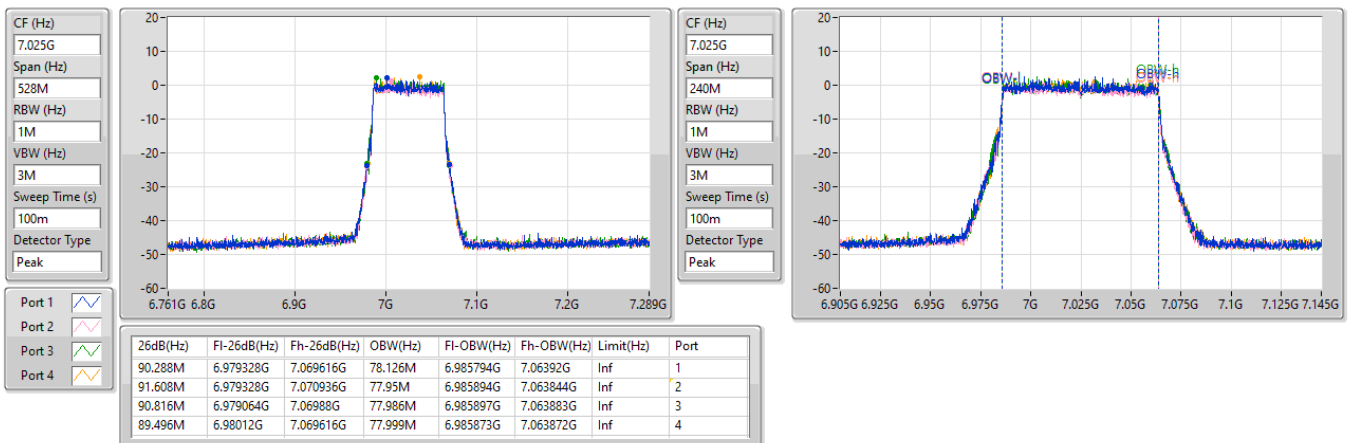




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW



6025MHz

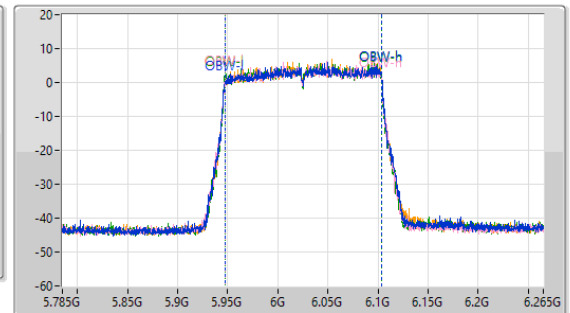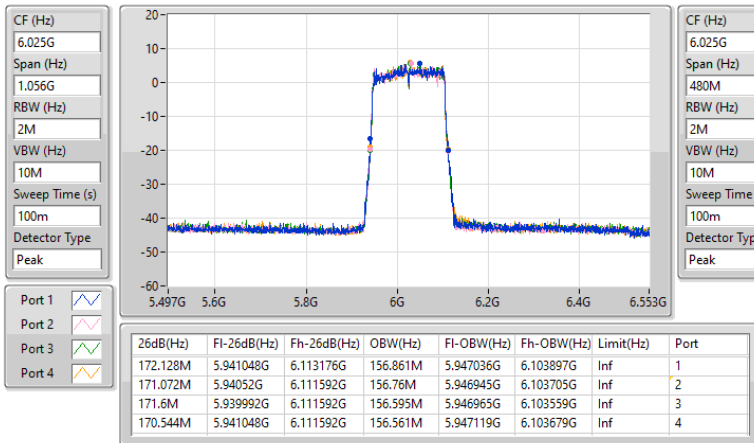

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6185MHz

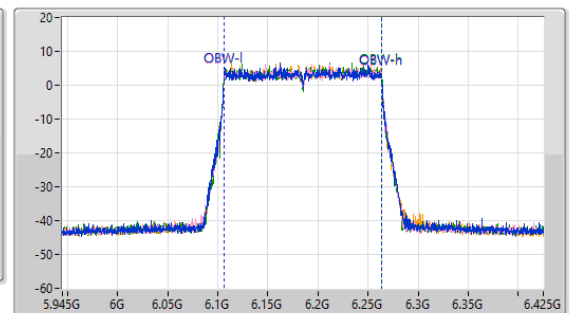
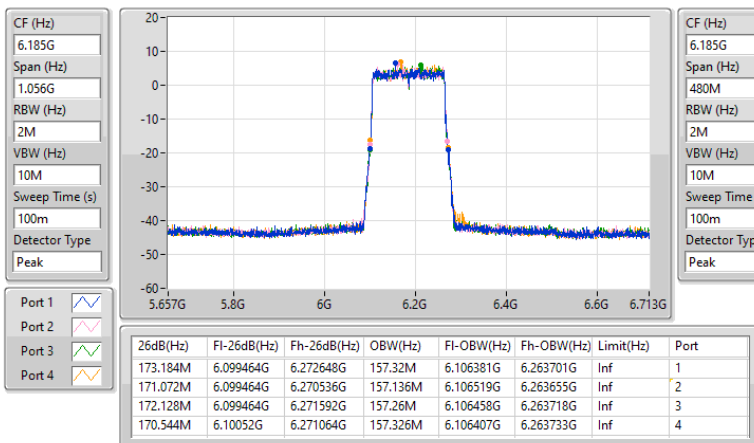




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW



6345MHz

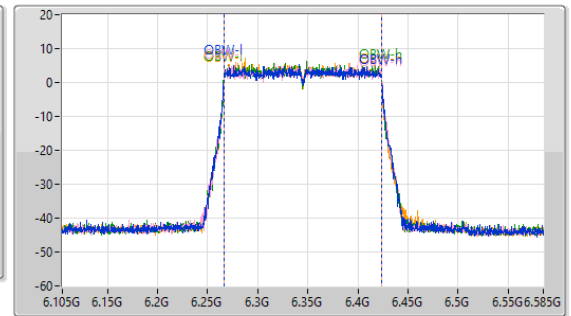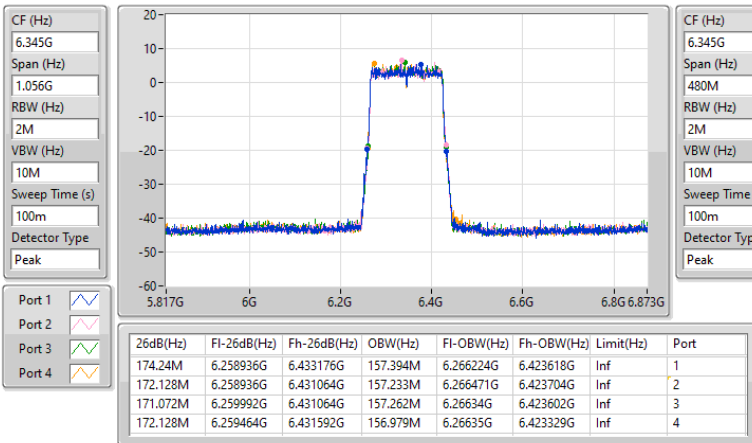

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6505MHz Straddle 6.525-6.875GHz

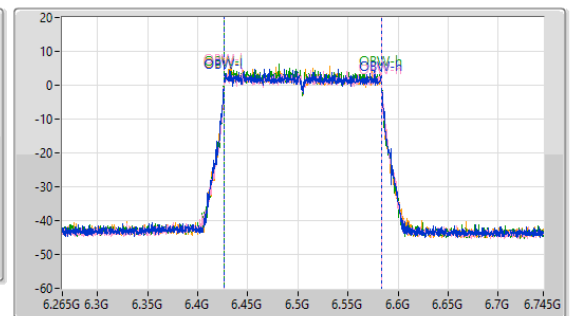
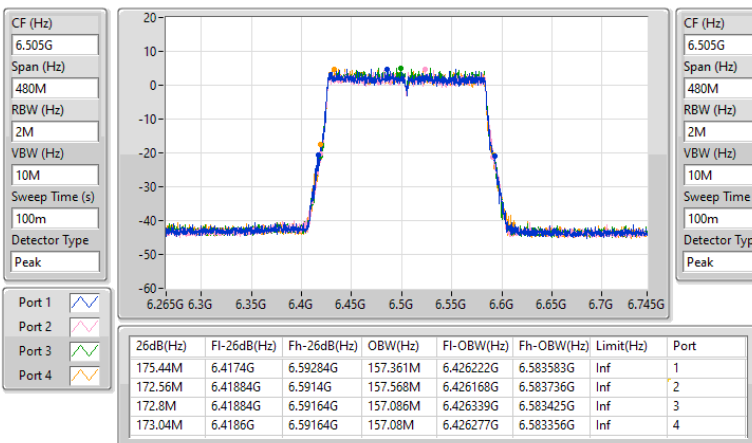




6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW



6665MHz

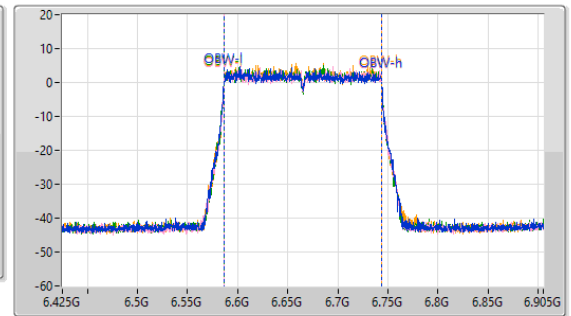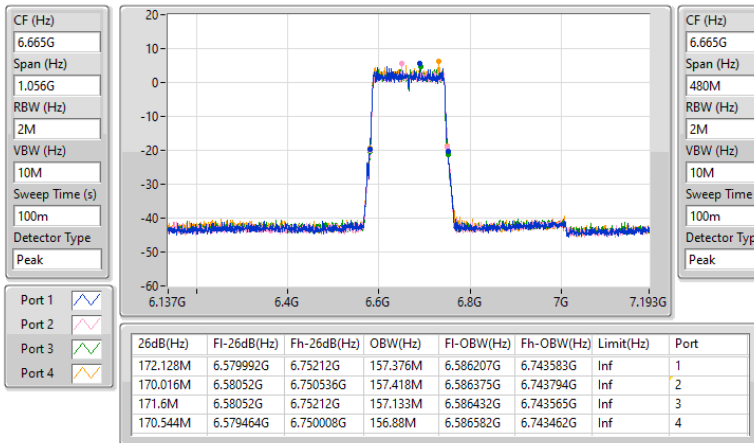

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6825MHz Straddle 6.525-6.875GHz

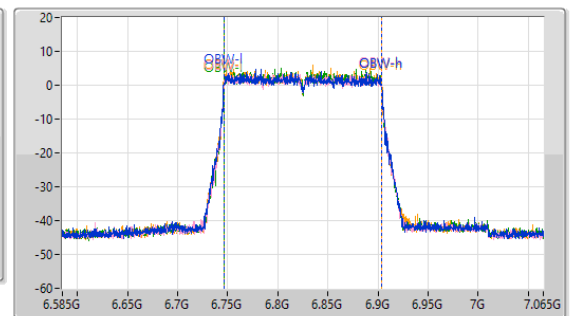
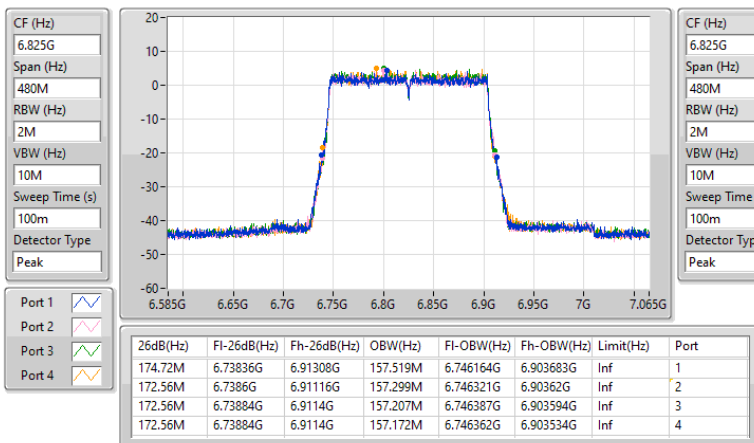




6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW



6985MHz

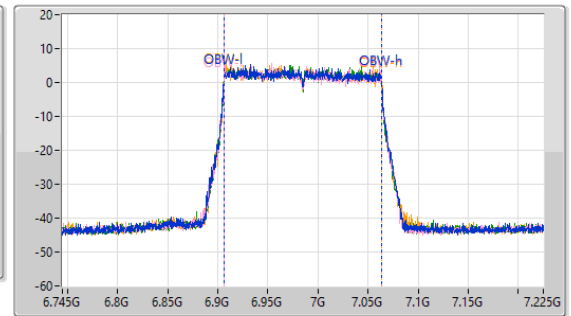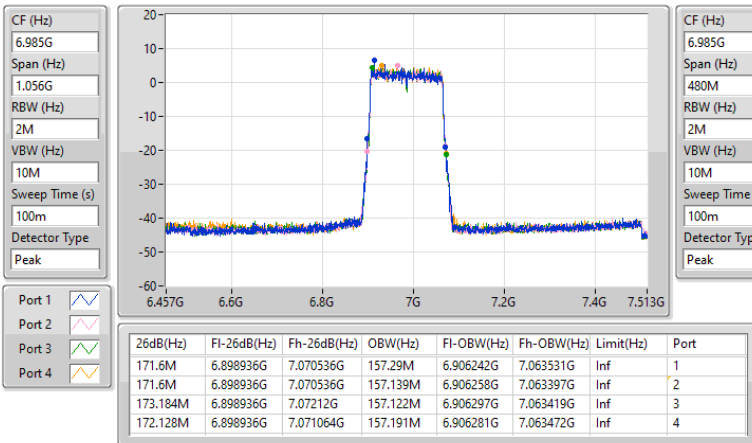

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6105MHz

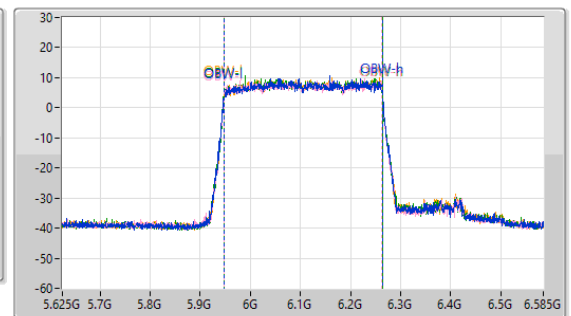
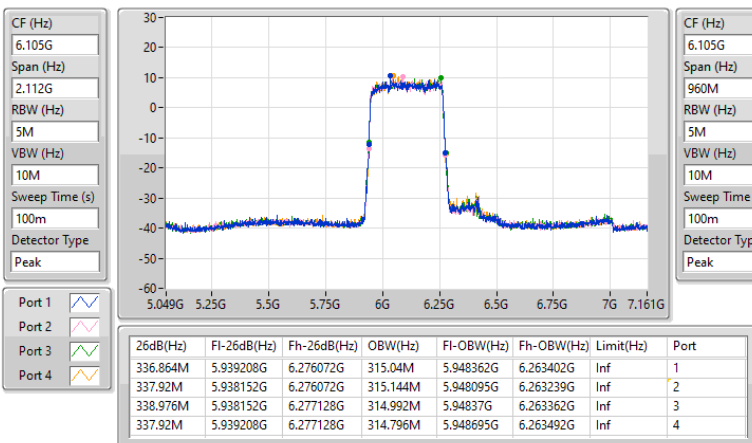




5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW



6265MHz

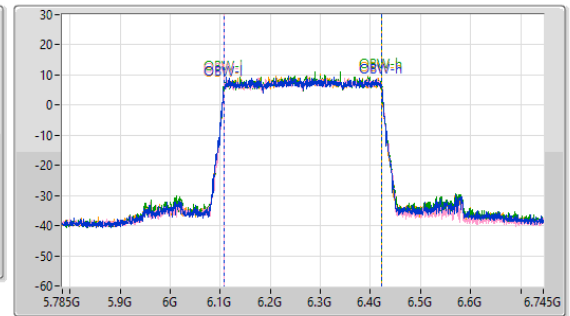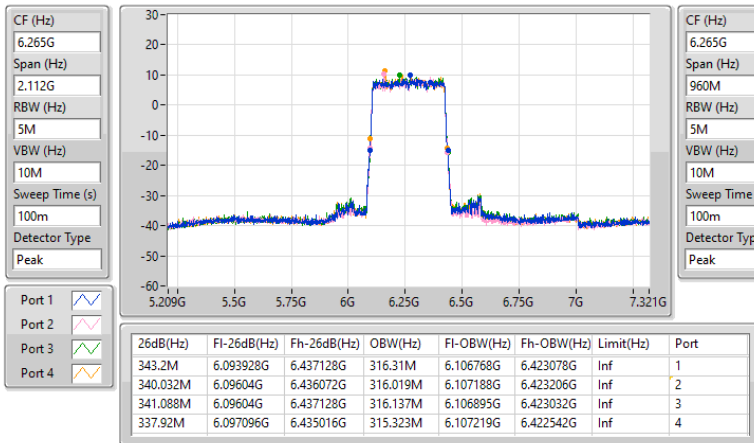

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6425MHz Straddle 6.525-6.875GHz

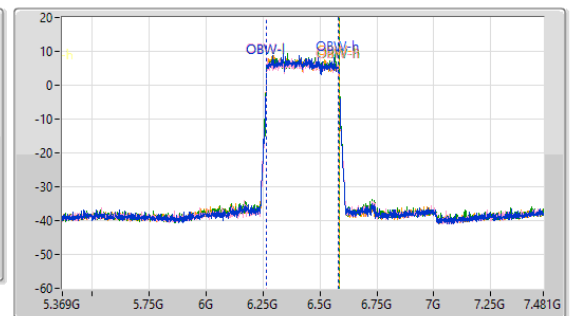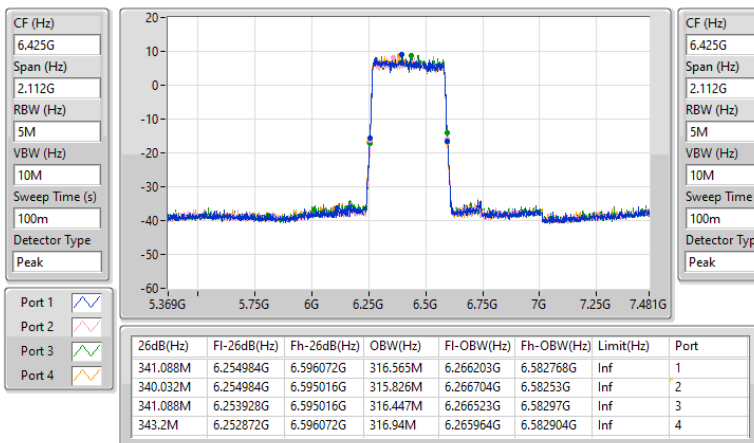




6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW


6585MHz Straddle 6.525-6.875GHz

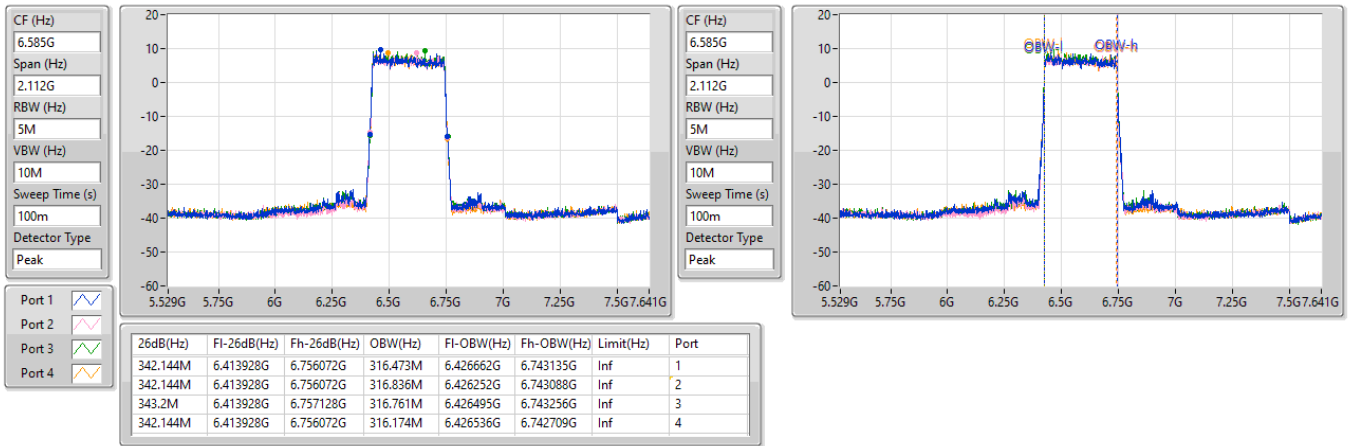

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6745MHz Straddle 6.525-6.875GHz

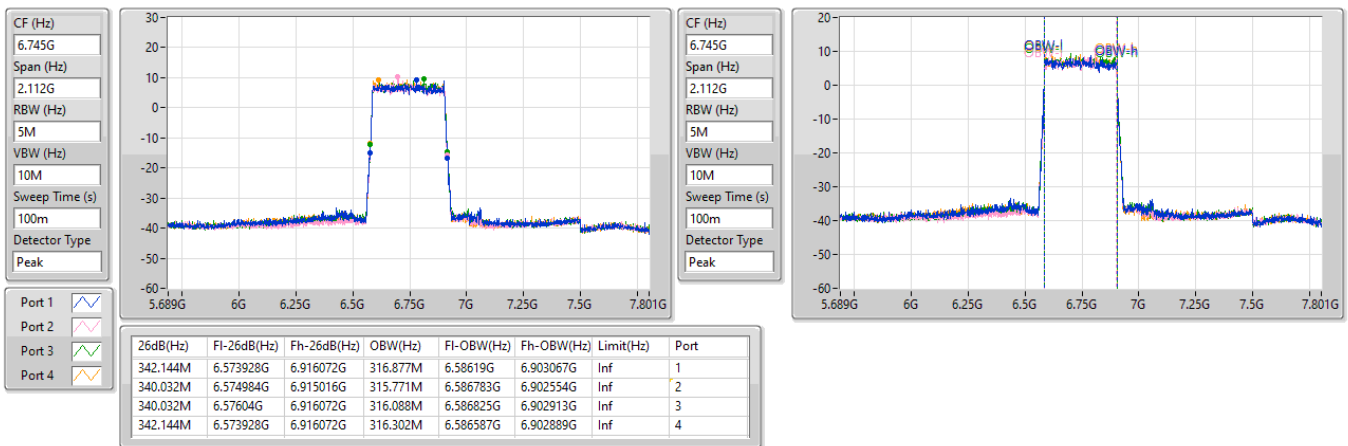




6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6905MHz Straddle 6.525-6.875GHz

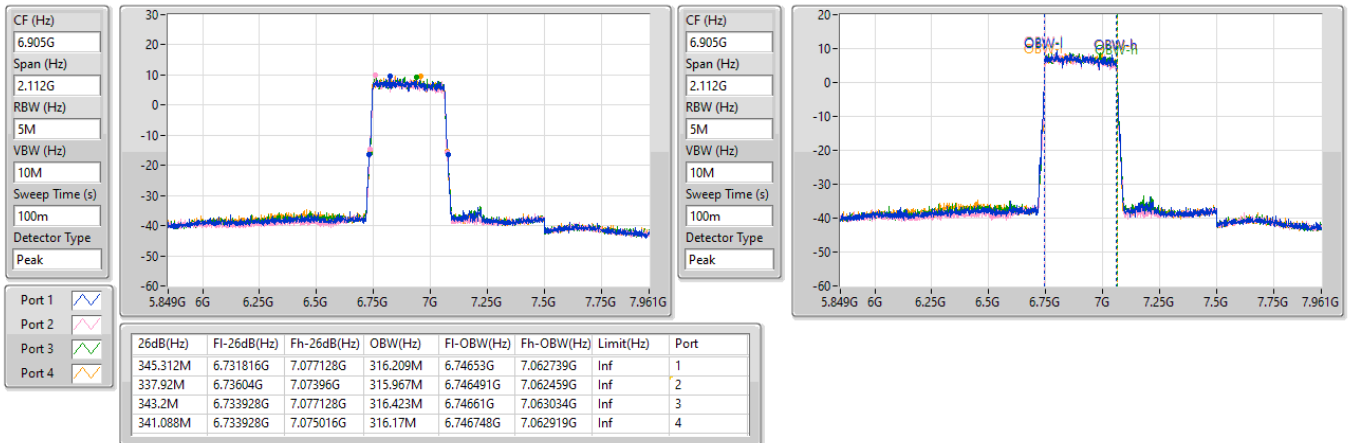

Non-beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	10.06	0.01014	15.96	0.03945
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	12.95	0.01972	18.85	0.07674
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	16.12	0.04093	22.02	0.15922
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	18.91	0.07780	24.81	0.30269
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	21.43	0.13900	27.33	0.54075
6.425-6.525GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	9.56	0.00904	15.54	0.03581
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	12.43	0.01750	18.41	0.06934
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	15.11	0.03243	21.09	0.12853
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	9.24	0.00839	15.95	0.03936
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	12.26	0.01683	18.97	0.07889
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	15.06	0.03206	21.77	0.15031
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	17.93	0.06209	24.64	0.29107
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	20.79	0.11995	27.50	0.56234
6.875-7.125GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	9.66	0.00925	16.18	0.04150
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	12.58	0.01811	19.10	0.08128
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	15.32	0.03404	21.84	0.15276
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	18.40	0.06918	24.92	0.31046

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	5.90	3.78	3.72	3.77	4.03	9.85	Inf	15.75	30.00
6175MHz	Pass	5.90	3.61	4.18	3.95	4.31	10.04	Inf	15.94	30.00
6415MHz	Pass	5.90	3.52	4.19	4.06	4.33	10.06	Inf	15.96	30.00
6435MHz	Pass	5.98	3.25	3.61	3.62	3.67	9.56	Inf	15.54	30.00
6475MHz	Pass	5.98	3.13	3.32	3.65	3.56	9.44	Inf	15.42	30.00
6515MHz	Pass	5.98	2.87	3.26	3.31	3.52	9.27	Inf	15.25	30.00
6535MHz	Pass	6.71	2.85	3.29	3.26	3.45	9.24	Inf	15.95	30.00
6715MHz	Pass	6.71	2.14	3.08	3.03	3.46	8.97	Inf	15.68	30.00
6855MHz	Pass	6.71	2.65	3.1	3.17	3.53	9.14	Inf	15.85	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	6.71	2.85	3.17	3.11	3.49	9.18	Inf	15.89	30.00
6895MHz	Pass	6.52	3.28	3.7	3.59	3.89	9.64	Inf	16.16	30.00
7015MHz	Pass	6.52	3.37	3.71	3.52	3.93	9.66	Inf	16.18	30.00
7095MHz	Pass	6.52	3.45	3.63	3.56	3.68	9.60	Inf	16.12	30.00
7115MHz	Pass	6.52	-2.89	-2.43	-2.35	-2.29	3.54	Inf	10.06	30.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	5.90	6.79	6.32	7.05	6.79	12.77	Inf	18.67	30.00
6165MHz	Pass	5.90	6.89	6.91	6.85	7.06	12.95	Inf	18.85	30.00
6405MHz	Pass	5.90	6.67	6.67	6.96	6.95	12.84	Inf	18.74	30.00
6445MHz	Pass	5.98	6.28	6.31	6.65	6.39	12.43	Inf	18.41	30.00
6485MHz	Pass	5.98	6.21	5.93	6.48	6.21	12.23	Inf	18.21	30.00
6525MHz Straddle 6.525-6.875GHz	Pass	6.71	5.97	6.09	6.37	6.13	12.16	Inf	18.87	30.00
6565MHz	Pass	6.71	5.84	5.97	6.18	6.01	12.02	Inf	18.73	30.00
6725MHz	Pass	6.71	6.01	6.08	6.51	6.32	12.26	Inf	18.97	30.00
6845MHz	Pass	6.71	5.75	5.56	6.22	6.26	11.98	Inf	18.69	30.00
6885MHz Straddle 6.525-6.875GHz	Pass	6.71	5.95	5.55	6.12	6.13	11.96	Inf	18.67	30.00
6925MHz	Pass	6.52	6.55	6.2	6.52	6.51	12.47	Inf	18.99	30.00
7005MHz	Pass	6.52	6.65	6.31	6.65	6.61	12.58	Inf	19.10	30.00
7085MHz	Pass	6.52	6.78	6.15	6.61	6.33	12.49	Inf	19.01	30.00
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.90	9.76	9.49	9.93	9.86	15.78	Inf	21.68	30.00
6145MHz	Pass	5.90	10.01	10.02	10.22	10.14	16.12	Inf	22.02	30.00
6385MHz	Pass	5.90	9.81	9.79	10.21	10.14	16.01	Inf	21.91	30.00
6465MHz	Pass	5.98	9.02	8.79	9.47	9.03	15.11	Inf	21.09	30.00
6545MHz Straddle 6.525-6.875GHz	Pass	6.71	8.68	8.54	9.02	8.76	14.77	Inf	21.48	30.00
6625MHz	Pass	6.71	8.65	8.63	8.88	8.91	14.79	Inf	21.50	30.00
6705MHz	Pass	6.71	8.57	8.88	9.35	9.31	15.06	Inf	21.77	30.00
6785MHz	Pass	6.71	8.71	8.62	9.24	9.22	14.98	Inf	21.69	30.00
6865MHz Straddle 6.525-6.875GHz	Pass	6.71	8.71	8.36	9.1	9.03	14.83	Inf	21.54	30.00



Conducted Output Power(Average)

Appendix B

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6945MHz	Pass	6.52	9.22	9.21	9.36	9.41	15.32	Inf	21.84	30.00
7025MHz	Pass	6.52	9.35	8.95	9.39	9.38	15.29	Inf	21.81	30.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.90	12.66	12.51	12.78	12.66	18.67	Inf	24.57	30.00
6185MHz	Pass	5.90	12.82	12.81	12.84	13.08	18.91	Inf	24.81	30.00
6345MHz	Pass	5.90	12.56	12.59	12.92	12.79	18.74	Inf	24.64	30.00
6505MHz Straddle 6.525-6.875GHz	Pass	6.71	11.52	11.21	12.05	11.54	17.61	Inf	24.32	30.00
6665MHz	Pass	6.71	11.29	11.36	11.57	11.92	17.56	Inf	24.27	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	6.71	11.66	11.56	12.19	12.17	17.93	Inf	24.64	30.00
6985MHz	Pass	6.52	12.57	12.16	12.32	12.45	18.40	Inf	24.92	30.00
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.90	15.38	15.14	15.53	15.56	21.43	Inf	27.33	30.00
6265MHz	Pass	5.90	15.33	15.18	15.41	15.46	21.37	Inf	27.27	30.00
6425MHz Straddle 6.525-6.875GHz	Pass	6.71	14.32	14.12	14.56	14.61	20.43	Inf	27.14	30.00
6585MHz Straddle 6.525-6.875GHz	Pass	6.71	14.51	14.23	14.91	14.69	20.61	Inf	27.32	30.00
6745MHz Straddle 6.525-6.875GHz	Pass	6.71	14.54	14.33	15.06	14.92	20.74	Inf	27.45	30.00
6905MHz Straddle 6.525-6.875GHz	Pass	6.71	14.71	14.42	15.02	14.92	20.79	Inf	27.50	30.00

DG = Directional Gain; Port X = Port X output power

Beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	7.67	0.00585	15.96	0.03945
802.11be EHT40-BF_Nss1,(MCS0)_4TX	10.56	0.01138	18.85	0.07674
802.11be EHT80-BF_Nss1,(MCS0)_4TX	13.73	0.02360	22.02	0.15922
802.11be EHT160-BF_Nss1,(MCS0)_4TX	16.52	0.04487	24.81	0.30269
802.11be EHT320-BF_Nss1,(MCS0)_4TX	19.04	0.08017	27.33	0.54075
6.425-6.525GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	6.67	0.00465	15.54	0.03581
802.11be EHT40-BF_Nss1,(MCS0)_4TX	9.54	0.00899	18.41	0.06934
802.11be EHT80-BF_Nss1,(MCS0)_4TX	12.22	0.01667	21.09	0.12853
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	6.70	0.00468	15.95	0.03936
802.11be EHT40-BF_Nss1,(MCS0)_4TX	9.72	0.00938	18.97	0.07889
802.11be EHT80-BF_Nss1,(MCS0)_4TX	12.52	0.01786	21.77	0.15031
802.11be EHT160-BF_Nss1,(MCS0)_4TX	15.39	0.03459	24.64	0.29107
802.11be EHT320-BF_Nss1,(MCS0)_4TX	18.25	0.06683	27.50	0.56234
6.875-7.125GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	7.59	0.00574	16.18	0.04150
802.11be EHT40-BF_Nss1,(MCS0)_4TX	10.51	0.01125	19.10	0.08128
802.11be EHT80-BF_Nss1,(MCS0)_4TX	13.25	0.02113	21.84	0.15276
802.11be EHT160-BF_Nss1,(MCS0)_4TX	16.33	0.04295	24.92	0.31046

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	8.29	1.39	1.33	1.38	1.64	7.46	Inf	15.75	30.00
6175MHz	Pass	8.29	1.22	1.79	1.56	1.92	7.65	Inf	15.94	30.00
6415MHz	Pass	8.29	1.13	1.8	1.67	1.94	7.67	Inf	15.96	30.00
6435MHz	Pass	8.87	0.36	0.72	0.73	0.78	6.67	Inf	15.54	30.00
6475MHz	Pass	8.87	0.24	0.43	0.76	0.67	6.55	Inf	15.42	30.00
6515MHz	Pass	8.87	-0.02	0.37	0.42	0.63	6.38	Inf	15.25	30.00
6535MHz	Pass	9.25	0.31	0.75	0.72	0.91	6.70	Inf	15.95	30.00
6715MHz	Pass	9.25	-0.4	0.54	0.49	0.92	6.43	Inf	15.68	30.00
6855MHz	Pass	9.25	0.11	0.56	0.63	0.99	6.60	Inf	15.85	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	9.25	0.31	0.63	0.57	0.95	6.64	Inf	15.89	30.00
6895MHz	Pass	8.59	1.21	1.63	1.52	1.82	7.57	Inf	16.16	30.00
7015MHz	Pass	8.59	1.3	1.64	1.45	1.86	7.59	Inf	16.18	30.00
7095MHz	Pass	8.59	1.38	1.56	1.49	1.61	7.53	Inf	16.12	30.00
7115MHz	Pass	8.59	-4.96	-4.5	-4.42	-4.36	1.47	Inf	10.06	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	8.29	4.4	3.93	4.66	4.4	10.38	Inf	18.67	30.00
6165MHz	Pass	8.29	4.5	4.52	4.46	4.67	10.56	Inf	18.85	30.00
6405MHz	Pass	8.29	4.28	4.28	4.57	4.56	10.45	Inf	18.74	30.00
6445MHz	Pass	8.87	3.39	3.42	3.76	3.5	9.54	Inf	18.41	30.00
6485MHz	Pass	8.87	3.32	3.04	3.59	3.32	9.34	Inf	18.21	30.00
6525MHz Straddle 6.525-6.875GHz	Pass	9.25	3.08	3.2	3.48	3.24	9.27	Inf	18.52	30.00
6565MHz	Pass	9.25	3.3	3.43	3.64	3.47	9.48	Inf	18.73	30.00
6725MHz	Pass	9.25	3.47	3.54	3.97	3.78	9.72	Inf	18.97	30.00
6845MHz	Pass	9.25	3.21	3.02	3.68	3.72	9.44	Inf	18.69	30.00
6885MHz Straddle 6.525-6.875GHz	Pass	9.25	3.41	3.01	3.58	3.59	9.42	Inf	18.67	30.00
6925MHz	Pass	8.59	4.48	4.13	4.45	4.44	10.40	Inf	18.99	30.00
7005MHz	Pass	8.59	4.58	4.24	4.58	4.54	10.51	Inf	19.10	30.00
7085MHz	Pass	8.59	4.71	4.08	4.54	4.26	10.42	Inf	19.01	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	8.29	7.37	7.1	7.54	7.47	13.39	Inf	21.68	30.00
6145MHz	Pass	8.29	7.62	7.63	7.83	7.75	13.73	Inf	22.02	30.00
6385MHz	Pass	8.29	7.42	7.4	7.82	7.75	13.62	Inf	21.91	30.00
6465MHz	Pass	8.87	6.13	5.9	6.58	6.14	12.22	Inf	21.09	30.00
6545MHz Straddle 6.525-6.875GHz	Pass	9.25	5.79	5.65	6.13	5.87	11.88	Inf	21.13	30.00
6625MHz	Pass	9.25	6.11	6.09	6.34	6.37	12.25	Inf	21.50	30.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6705MHz	Pass	9.25	6.03	6.34	6.81	6.77	12.52	Inf	21.77	30.00
6785MHz	Pass	9.25	6.17	6.08	6.7	6.68	12.44	Inf	21.69	30.00
6865MHz Straddle 6.525-6.875GHz	Pass	9.25	6.17	5.82	6.56	6.49	12.29	Inf	21.54	30.00
6945MHz	Pass	8.59	7.15	7.14	7.29	7.34	13.25	Inf	21.84	30.00
7025MHz	Pass	8.59	7.28	6.88	7.32	7.31	13.22	Inf	21.81	30.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	8.29	10.27	10.12	10.39	10.27	16.28	Inf	24.57	30.00
6185MHz	Pass	8.29	10.43	10.42	10.45	10.69	16.52	Inf	24.81	30.00
6345MHz	Pass	8.29	10.17	10.2	10.53	10.4	16.35	Inf	24.64	30.00
6505MHz Straddle 6.525-6.875GHz	Pass	9.25	8.63	8.32	9.16	8.65	14.72	Inf	23.97	30.00
6665MHz	Pass	9.25	8.75	8.82	9.03	9.38	15.02	Inf	24.27	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	9.25	9.12	9.02	9.65	9.63	15.39	Inf	24.64	30.00
6985MHz	Pass	8.59	10.5	10.09	10.25	10.38	16.33	Inf	24.92	30.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	8.29	12.99	12.75	13.14	13.17	19.04	Inf	27.33	30.00
6265MHz	Pass	8.29	12.94	12.79	13.02	13.07	18.98	Inf	27.27	30.00
6425MHz Straddle 6.525-6.875GHz	Pass	9.25	11.43	11.23	11.67	11.72	17.54	Inf	26.79	30.00
6585MHz Straddle 6.525-6.875GHz	Pass	9.25	11.62	11.34	12.02	11.8	17.72	Inf	26.97	30.00
6745MHz Straddle 6.525-6.875GHz	Pass	9.25	12	11.79	12.52	12.38	18.20	Inf	27.45	30.00
6905MHz Straddle 6.525-6.875GHz	Pass	9.25	12.17	11.88	12.48	12.38	18.25	Inf	27.50	30.00

DG = Directional Gain; Port X = Port X output power
Directional Gain refers to antenna report.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-3.50	4.79
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-3.48	4.81
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-3.40	4.89
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-3.41	4.88
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-3.62	4.67
6.425-6.525GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-4.02	4.85
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-4.08	4.79
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-4.31	4.56
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-4.42	4.83
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-4.39	4.86
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-4.52	4.73
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-4.55	4.70
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-4.39	4.86
6.875-7.125GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-4.04	4.55
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-3.98	4.61
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-3.97	4.62
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-3.77	4.82

RBW = 1MHz

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	8.29	-9.41	-9.49	-9.38	-9.02	-3.50	Inf	4.79	5.00
6175MHz	Pass	8.29	-9.70	-9.25	-9.33	-9.19	-3.65	Inf	4.64	5.00
6415MHz	Pass	8.29	-9.90	-9.29	-9.46	-9.07	-3.54	Inf	4.75	5.00
6435MHz	Pass	8.87	-10.18	-9.87	-9.77	-9.61	-4.02	Inf	4.85	5.00
6475MHz	Pass	8.87	-10.47	-10.14	-9.80	-9.87	-4.12	Inf	4.75	5.00
6515MHz	Pass	8.87	-10.58	-10.21	-9.97	-9.88	-4.32	Inf	4.55	5.00
6535MHz	Pass	9.25	-10.59	-10.25	-10.13	-9.83	-4.42	Inf	4.83	5.00
6715MHz	Pass	9.25	-11.31	-10.31	-10.43	-9.96	-4.72	Inf	4.53	5.00
6855MHz	Pass	9.25	-10.68	-10.30	-10.28	-9.85	-4.51	Inf	4.74	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	9.25	-10.52	-10.10	-10.34	-10.06	-4.48	Inf	4.77	5.00
6895MHz	Pass	8.59	-10.06	-9.58	-10.00	-9.43	-4.04	Inf	4.55	5.00
7015MHz	Pass	8.59	-10.06	-9.80	-9.96	-9.53	-4.05	Inf	4.54	5.00
7095MHz	Pass	8.59	-9.94	-9.80	-9.97	-9.63	-4.08	Inf	4.51	5.00
7115MHz	Pass	8.59	-16.14	-15.76	-15.64	-15.68	-10.04	Inf	-1.45	5.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	8.29	-9.12	-9.84	-8.88	-9.03	-3.48	Inf	4.81	5.00
6165MHz	Pass	8.29	-9.17	-9.37	-9.37	-9.34	-3.65	Inf	4.64	5.00
6405MHz	Pass	8.29	-9.60	-9.64	-9.42	-9.27	-3.72	Inf	4.57	5.00
6445MHz	Pass	8.87	-9.86	-9.98	-9.72	-9.63	-4.08	Inf	4.79	5.00
6485MHz	Pass	8.87	-9.95	-10.15	-9.84	-10.17	-4.28	Inf	4.59	5.00
6525MHz Straddle 6.525-6.875GHz	Pass	9.25	-10.26	-10.10	-10.07	-9.76	-4.39	Inf	4.86	5.00
6565MHz	Pass	9.25	-10.53	-10.28	-10.32	-10.35	-4.61	Inf	4.64	5.00
6725MHz	Pass	9.25	-10.25	-10.17	-9.73	-9.96	-4.43	Inf	4.82	5.00
6845MHz	Pass	9.25	-10.33	-10.83	-10.07	-10.01	-4.67	Inf	4.58	5.00
6885MHz Straddle 6.525-6.875GHz	Pass	9.25	-10.31	-10.75	-10.15	-10.12	-4.58	Inf	4.67	5.00
6925MHz	Pass	8.59	-9.35	-9.99	-9.48	-9.49	-4.07	Inf	4.52	5.00
7005MHz	Pass	8.59	-9.42	-9.87	-9.85	-9.91	-3.98	Inf	4.61	5.00
7085MHz	Pass	8.59	-9.29	-10.05	-9.84	-9.90	-4.07	Inf	4.52	5.00
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	8.29	-8.92	-9.27	-9.10	-9.16	-3.40	Inf	4.89	5.00
6145MHz	Pass	8.29	-8.97	-9.11	-8.75	-8.94	-3.44	Inf	4.85	5.00
6385MHz	Pass	8.29	-9.33	-9.48	-8.91	-8.81	-3.50	Inf	4.79	5.00
6465MHz	Pass	8.87	-9.94	-10.35	-9.80	-9.99	-4.31	Inf	4.56	5.00
6545MHz Straddle 6.525-6.875GHz	Pass	9.25	-10.58	-10.45	-9.97	-10.36	-4.65	Inf	4.60	5.00
6625MHz	Pass	9.25	-10.70	-10.58	-10.35	-10.03	-4.69	Inf	4.56	5.00
6705MHz	Pass	9.25	-10.77	-10.00	-9.76	-9.66	-4.52	Inf	4.73	5.00
6785MHz	Pass	9.25	-10.40	-10.54	-9.90	-9.68	-4.69	Inf	4.56	5.00
6865MHz Straddle 6.525-6.875GHz	Pass	9.25	-10.25	-10.64	-10.16	-10.09	-4.74	Inf	4.51	5.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6945MHz	Pass	8.59	-9.89	-9.54	-9.42	-9.65	-4.04	Inf	4.55	5.00
7025MHz	Pass	8.59	-9.39	-10.07	-9.52	-9.50	-3.97	Inf	4.62	5.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	8.29	-8.90	-9.34	-8.72	-9.35	-3.41	Inf	4.88	5.00
6185MHz	Pass	8.29	-8.99	-9.19	-8.86	-8.74	-3.47	Inf	4.82	5.00
6345MHz	Pass	8.29	-9.44	-9.23	-8.94	-9.23	-3.67	Inf	4.62	5.00
6505MHz Straddle 6.525-6.875GHz	Pass	9.25	-10.37	-10.46	-9.72	-10.07	-4.72	Inf	4.53	5.00
6665MHz	Pass	9.25	-10.58	-10.60	-10.42	-10.07	-4.63	Inf	4.62	5.00
6825MHz Straddle 6.525-6.875GHz	Pass	9.25	-10.37	-10.43	-9.70	-9.69	-4.55	Inf	4.70	5.00
6985MHz	Pass	8.59	-9.14	-9.64	-9.31	-9.39	-3.77	Inf	4.82	5.00
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	8.29	-9.47	-9.65	-9.03	-8.75	-3.62	Inf	4.67	5.00
6265MHz	Pass	8.29	-9.39	-9.52	-8.85	-8.99	-3.66	Inf	4.63	5.00
6425MHz Straddle 6.525-6.875GHz	Pass	9.25	-10.35	-10.54	-10.44	-9.99	-4.70	Inf	4.55	5.00
6585MHz Straddle 6.525-6.875GHz	Pass	9.25	-10.04	-10.92	-9.74	-9.76	-4.39	Inf	4.86	5.00
6745MHz Straddle 6.525-6.875GHz	Pass	9.25	-10.03	-10.32	-9.61	-9.66	-4.40	Inf	4.85	5.00
6905MHz Straddle 6.525-6.875GHz	Pass	9.25	-10.06	-10.30	-9.56	-9.50	-4.44	Inf	4.81	5.00


DG = Directional Gain; RBW = 1MHz

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Directional Gain refers to antenna report.

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5955MHz

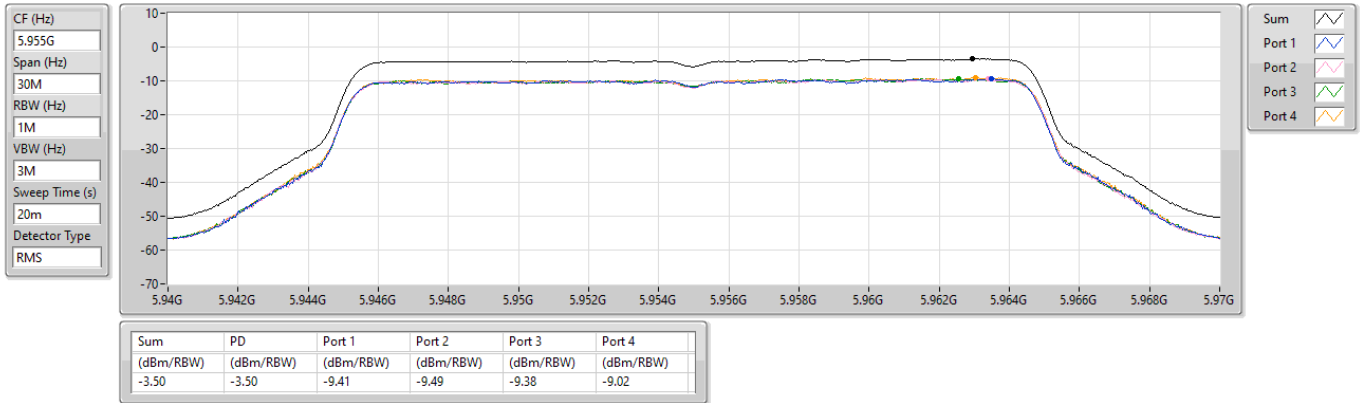

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6175MHz

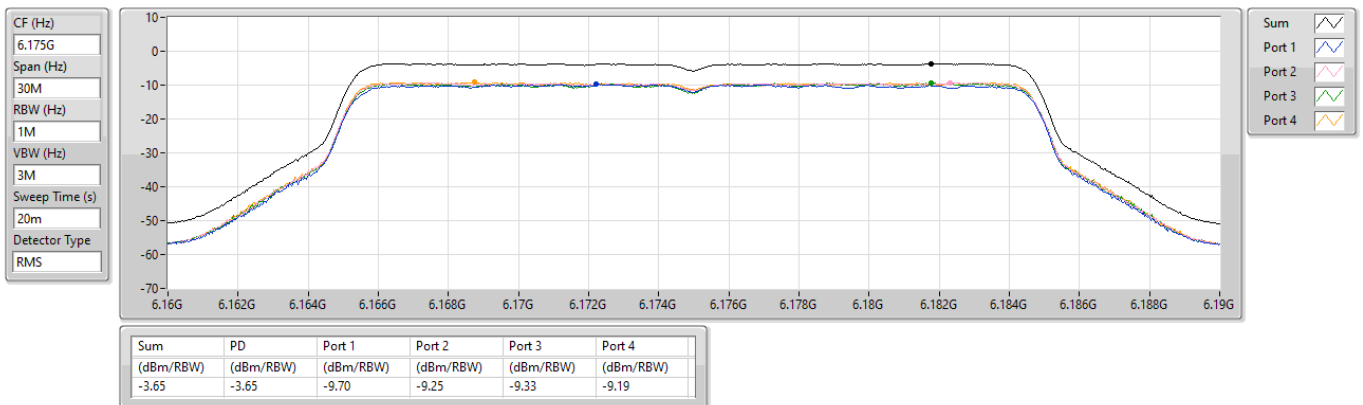




5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6415MHz

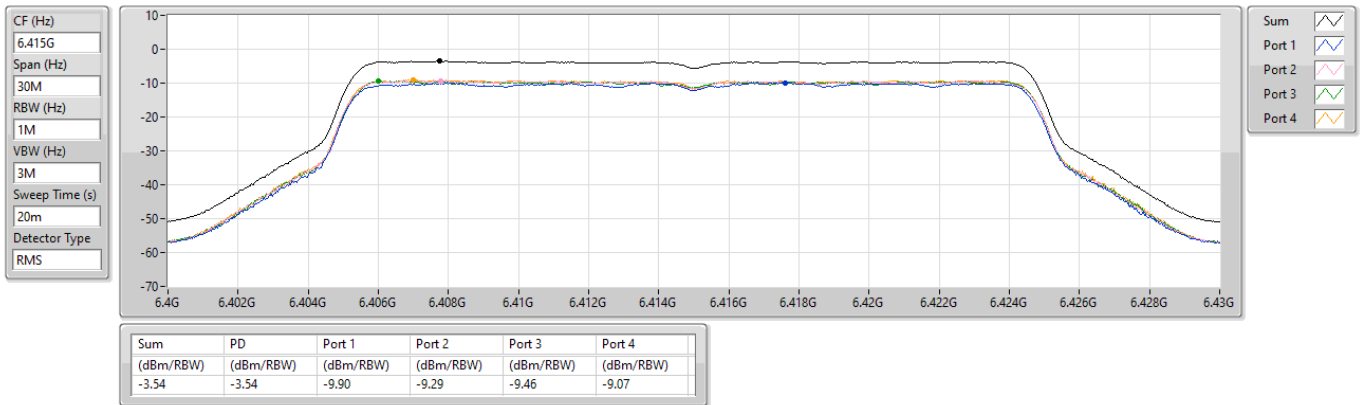

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6435MHz

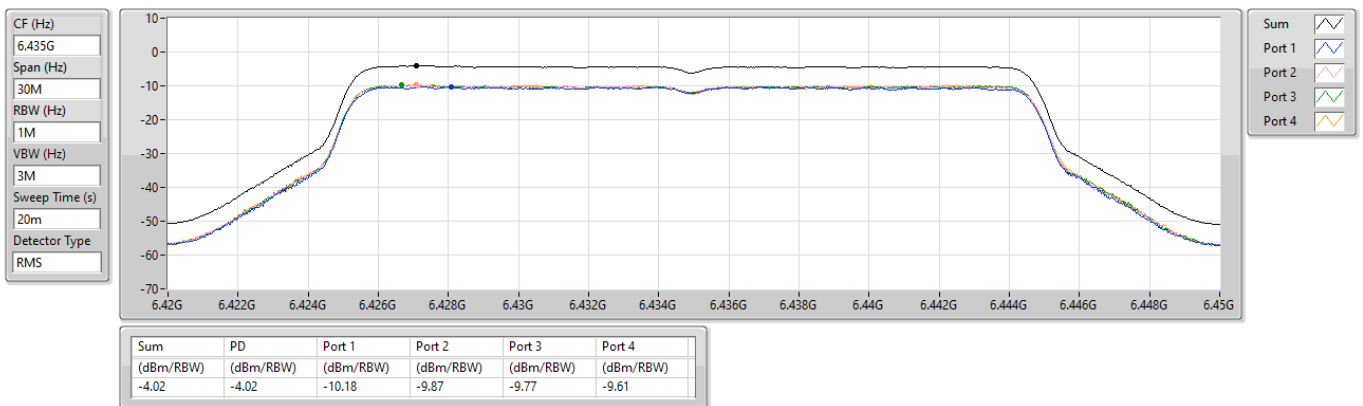




6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6475MHz

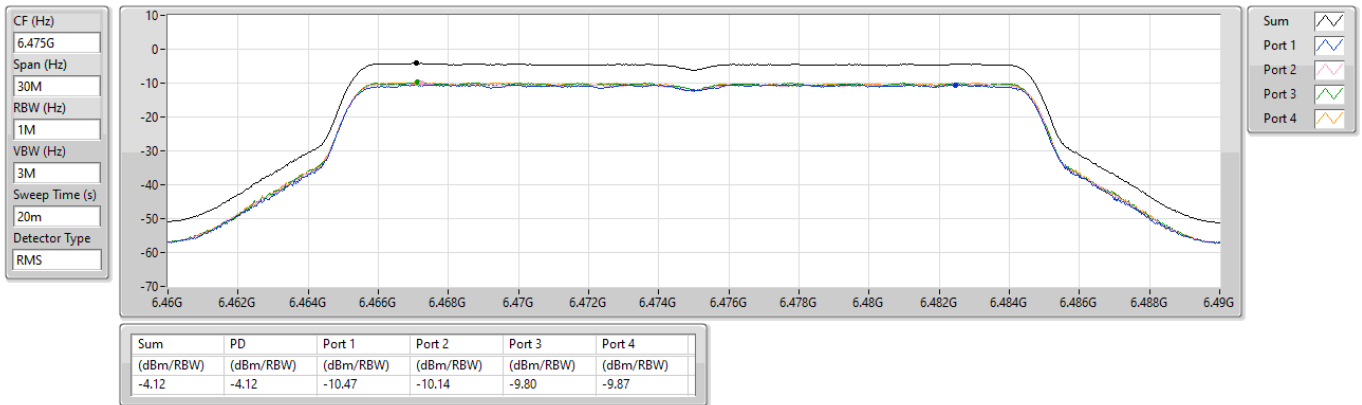

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6515MHz

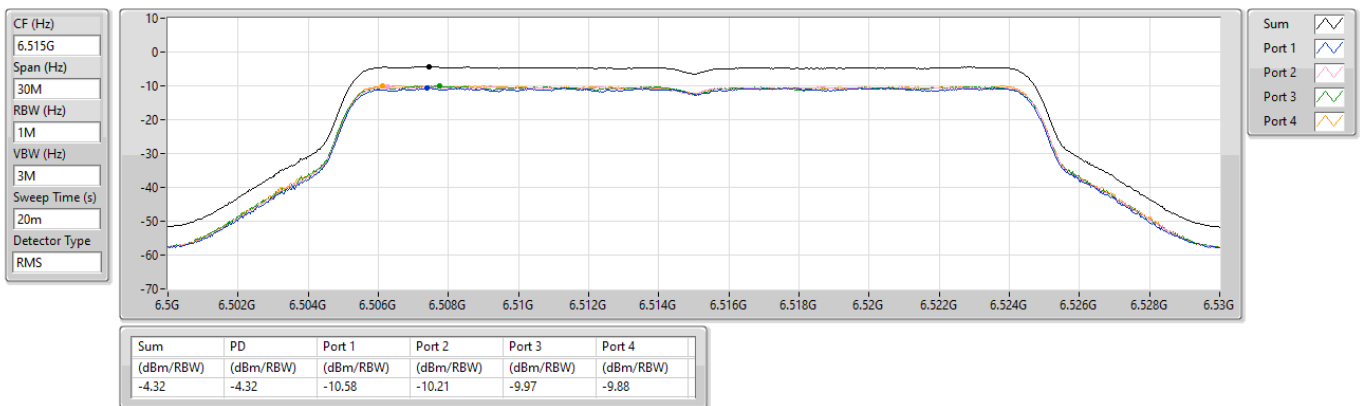




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6535MHz

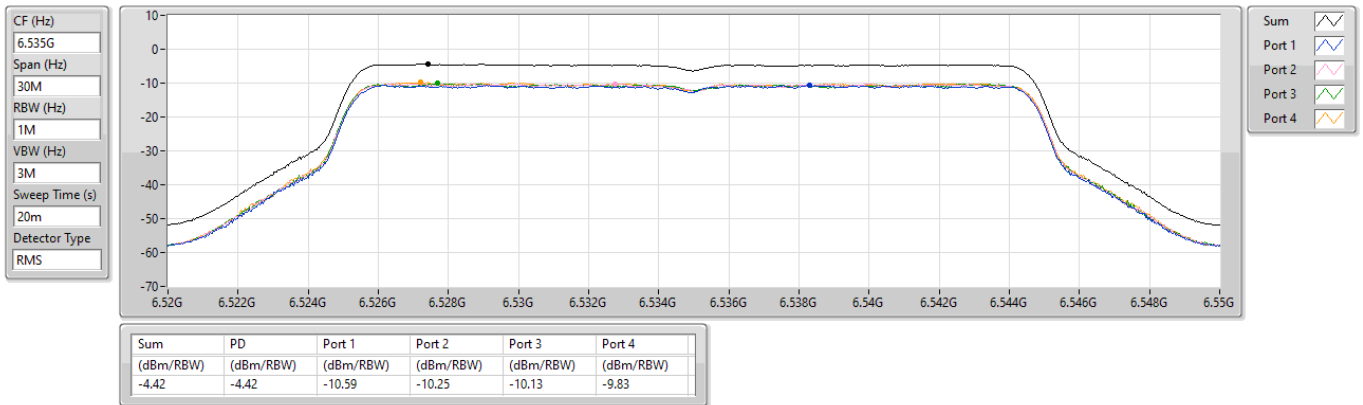

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6715MHz

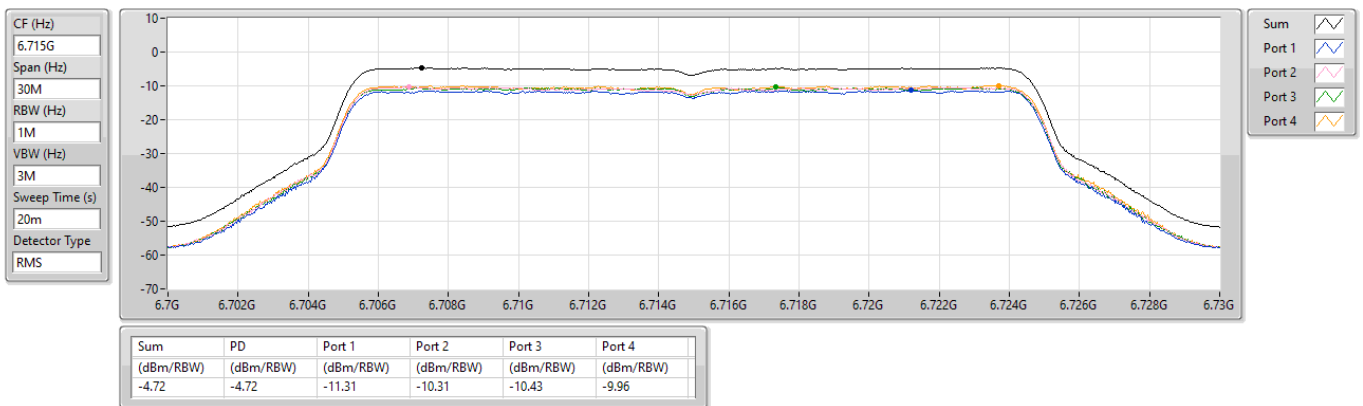




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6855MHz

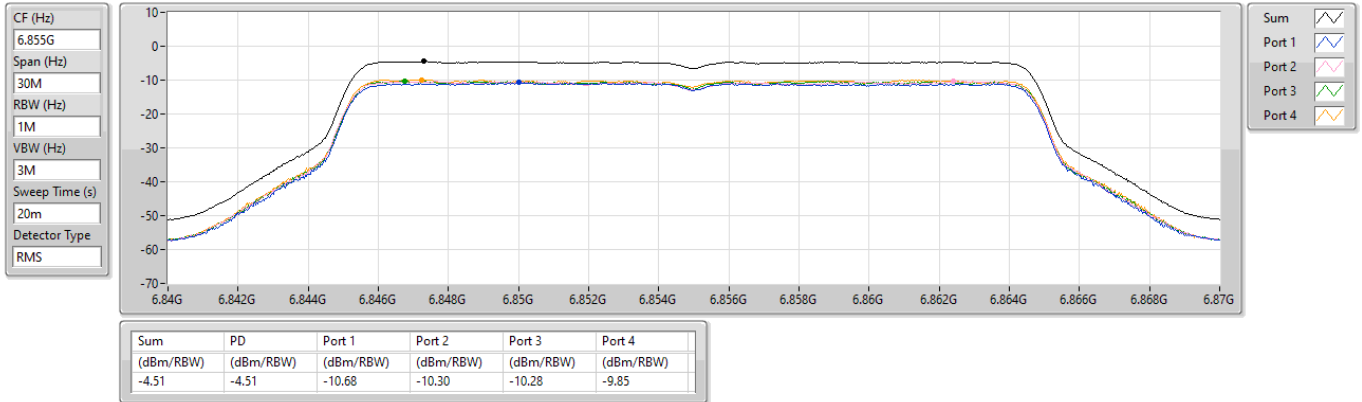

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6875MHz Straddle 6.525-6.875GHz

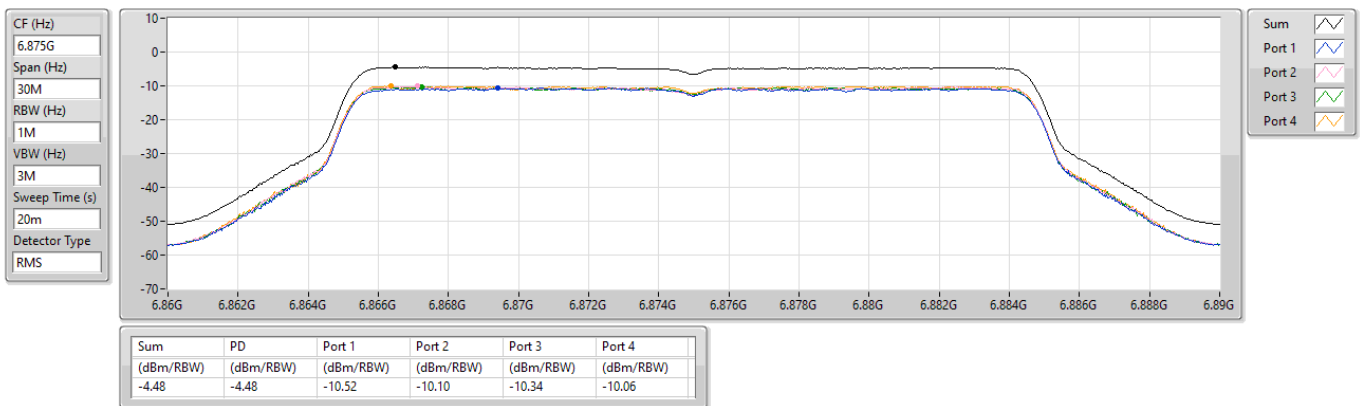

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6895MHz

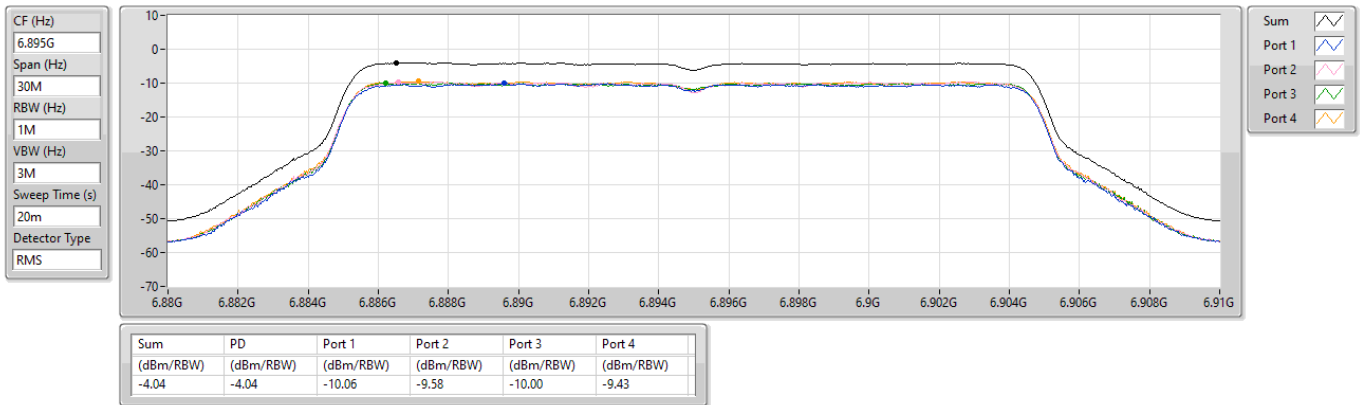

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

7015MHz

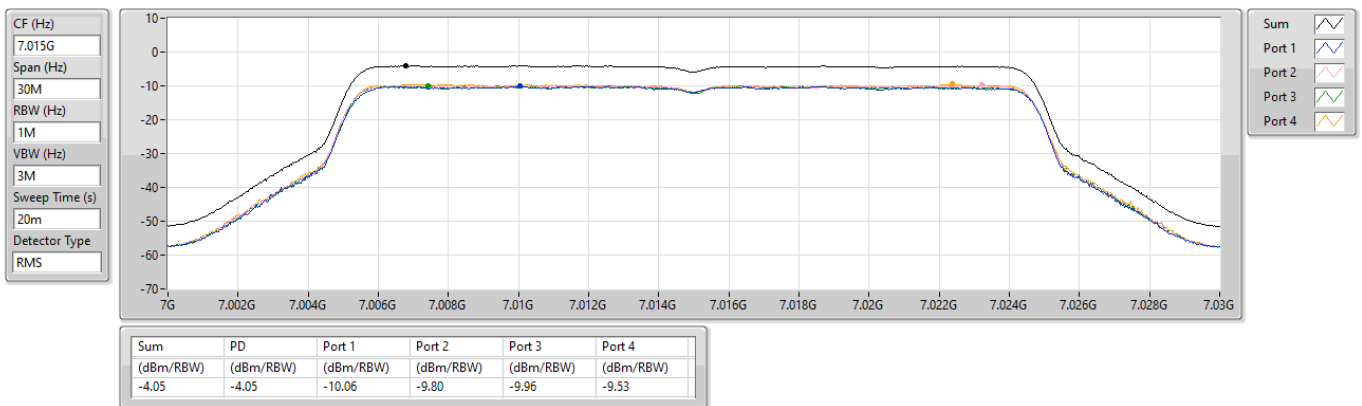




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


7095MHz

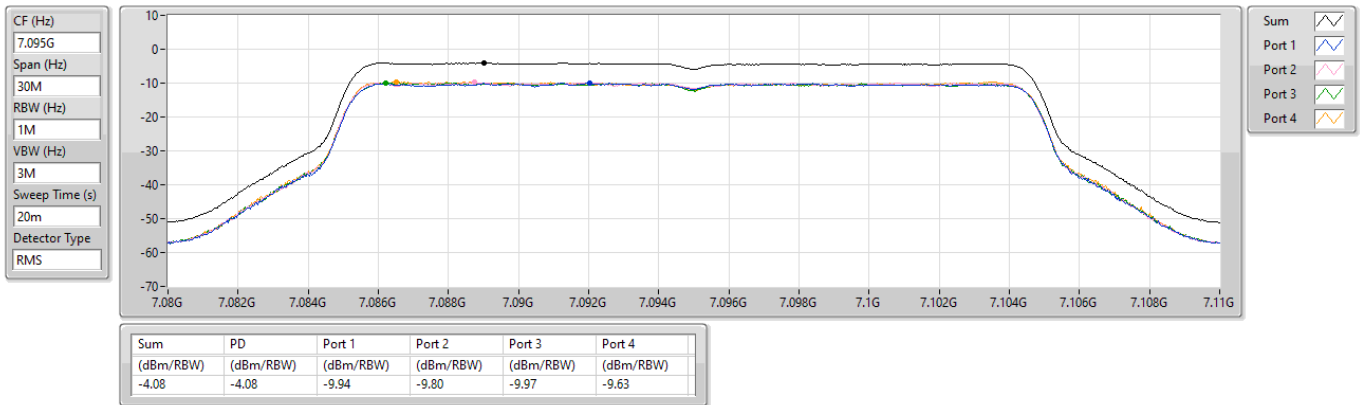

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

7115MHz

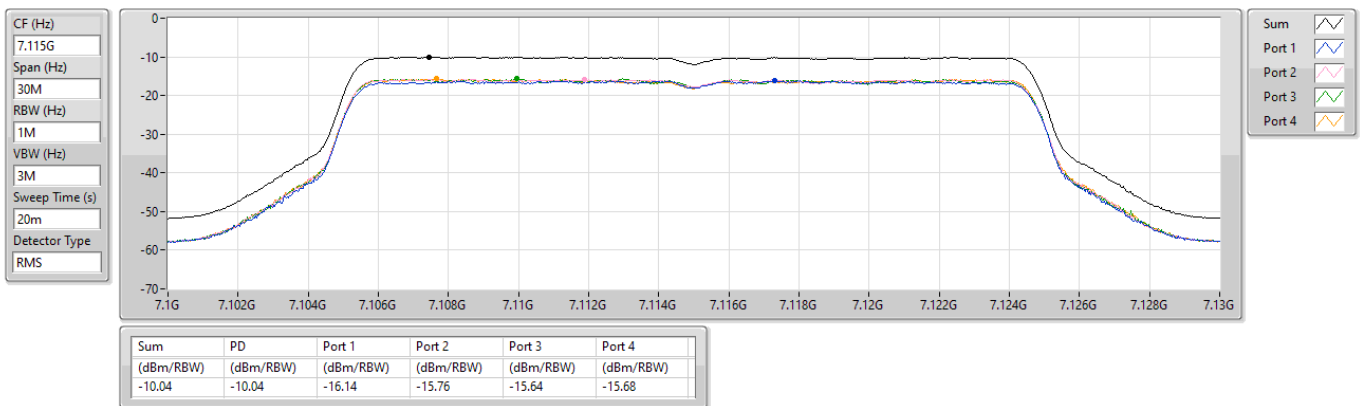




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5965MHz

CF (Hz)
5.965G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

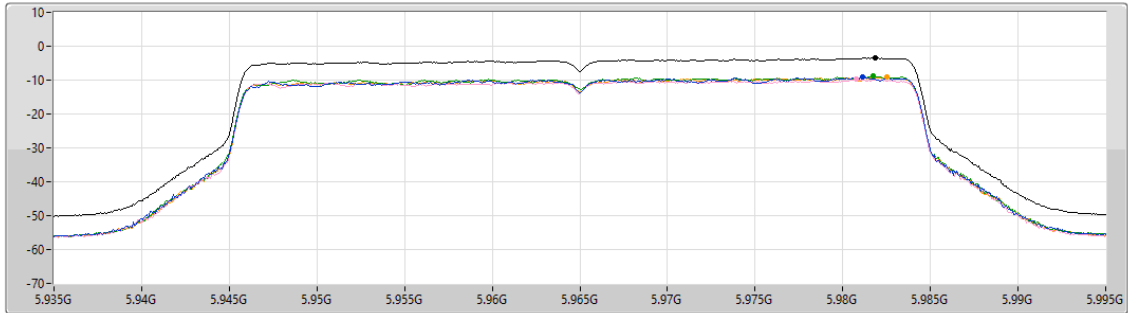


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.48	-3.48	-9.12	-9.84	-8.88	-9.03

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6165MHz

CF (Hz)
6.165G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

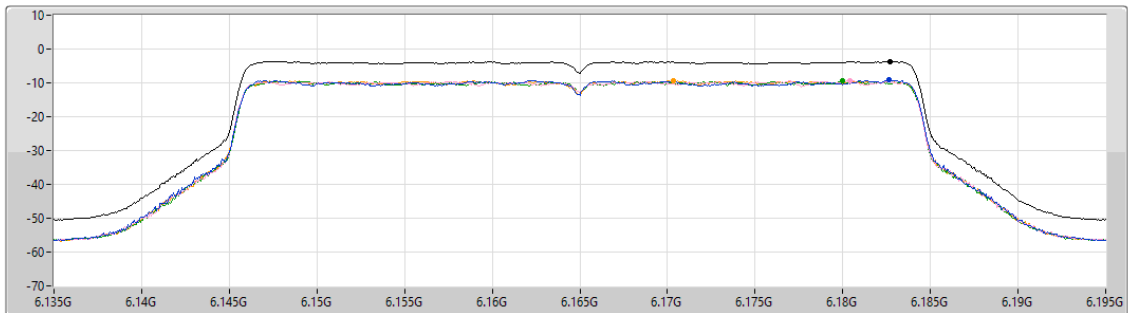

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.65	-3.65	-9.17	-9.37	-9.37	-9.34




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6405MHz

CF (Hz)
6.405G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

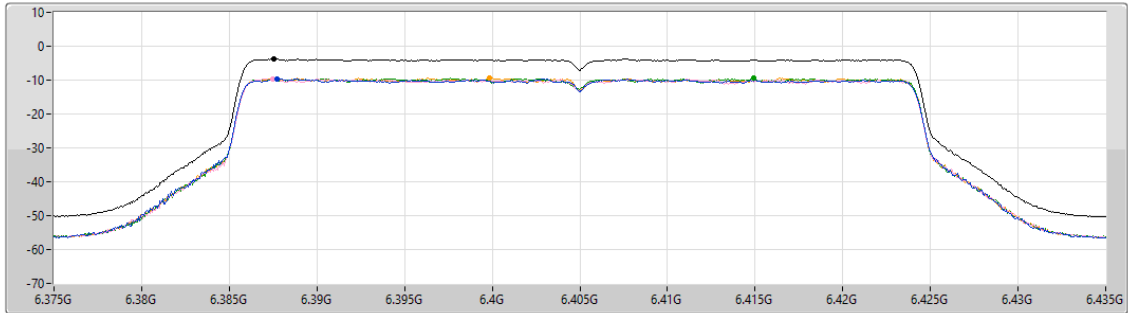

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.72	-3.72	-9.60	-9.64	-9.42	-9.27

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6445MHz

CF (Hz)
6.445G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

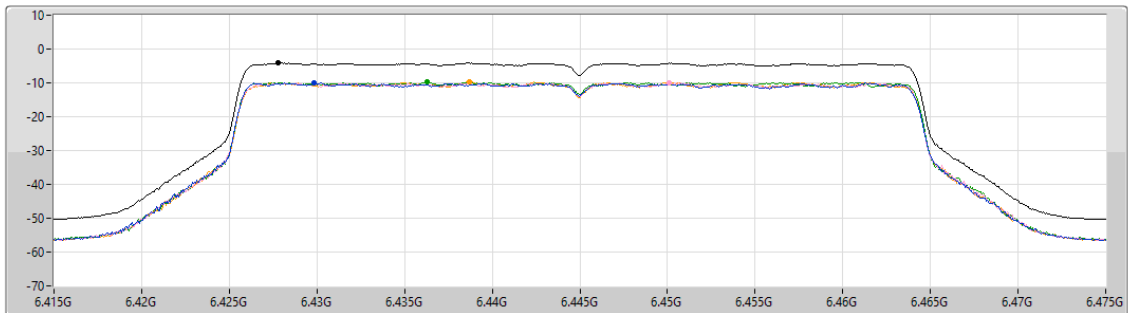

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.08	-4.08	-9.86	-9.98	-9.72	-9.63



6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6485MHz

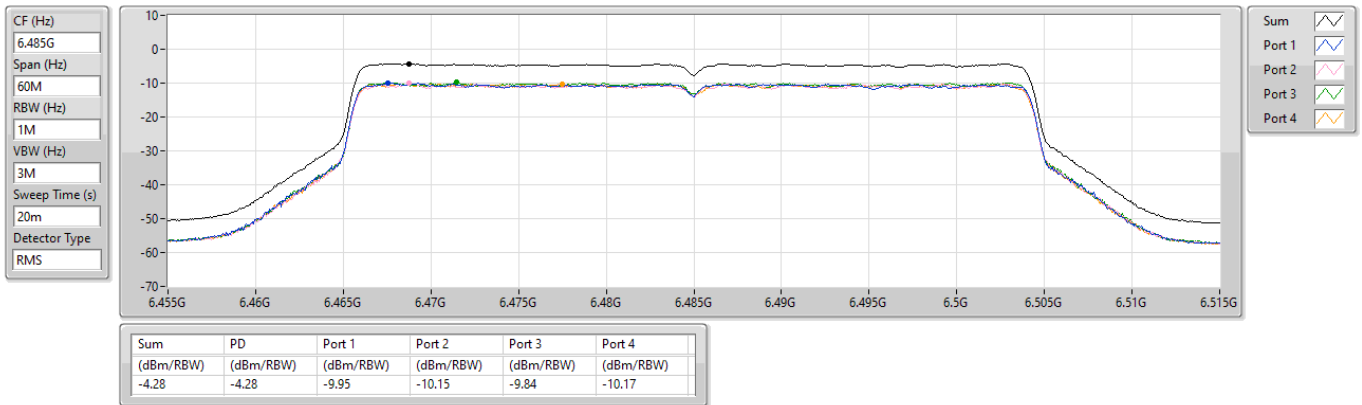

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6525MHz Straddle 6.525-6.875GHz

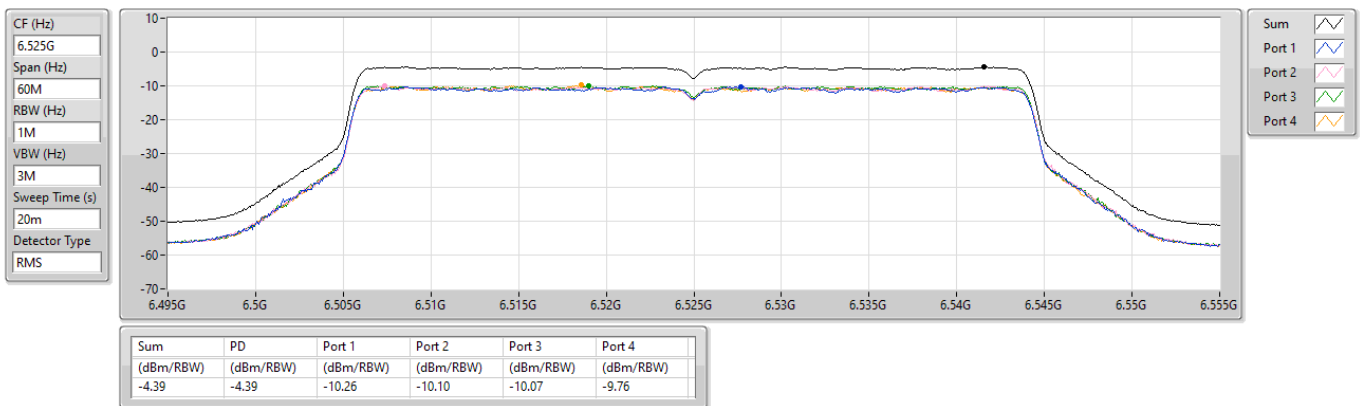




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6565MHz

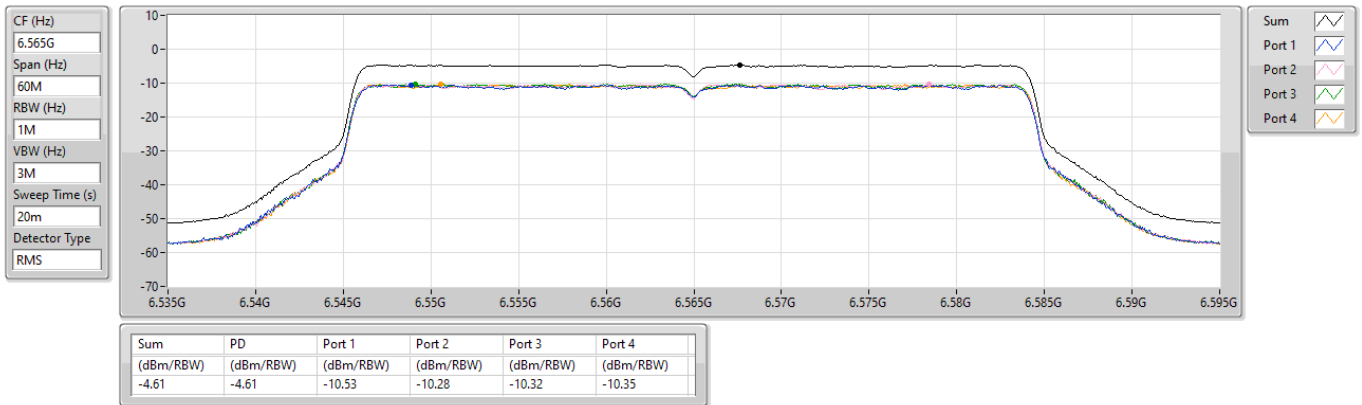

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6725MHz

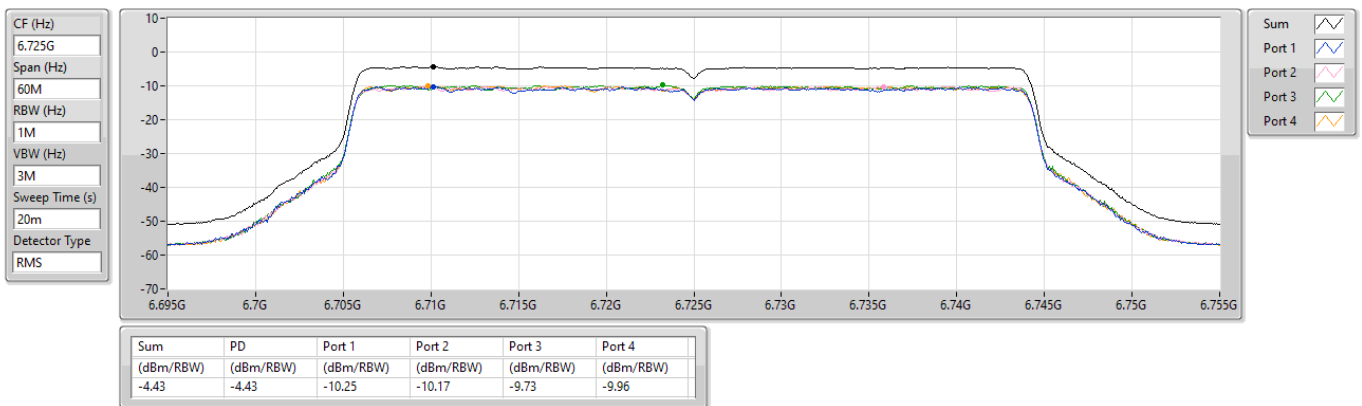




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6845MHz

CF (Hz)
6.845G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

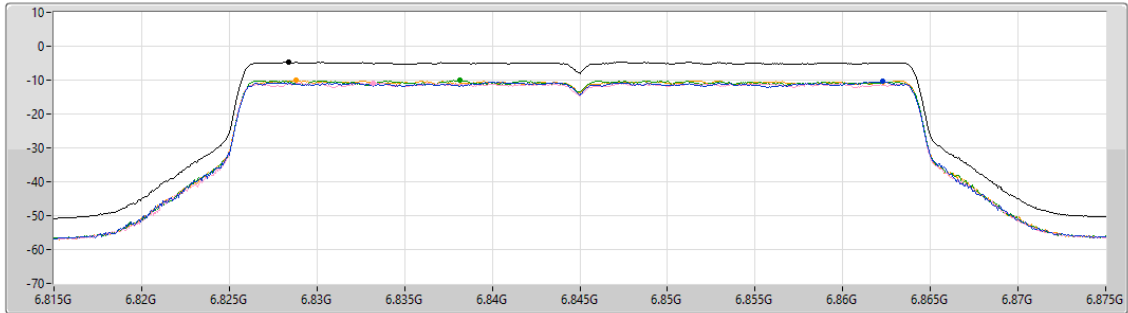

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.67	-4.67	-10.33	-10.83	-10.07	-10.01

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6885MHz Straddle 6.525-6.875GHz

CF (Hz)
6.885G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

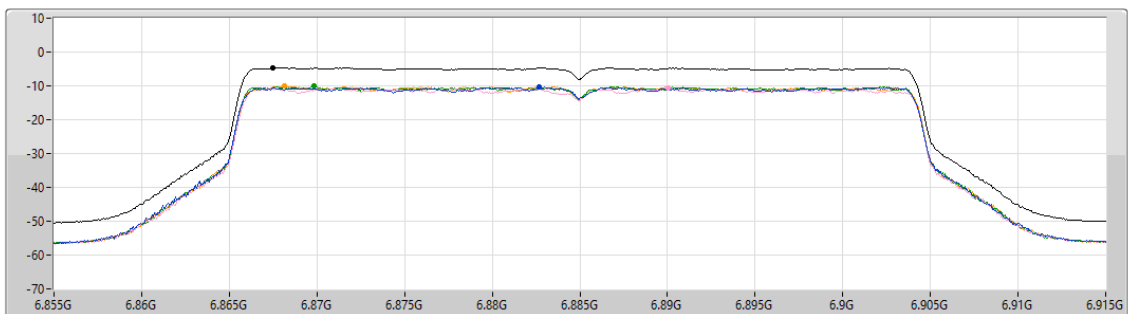

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.58	-4.58	-10.31	-10.75	-10.15	-10.12



6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6925MHz

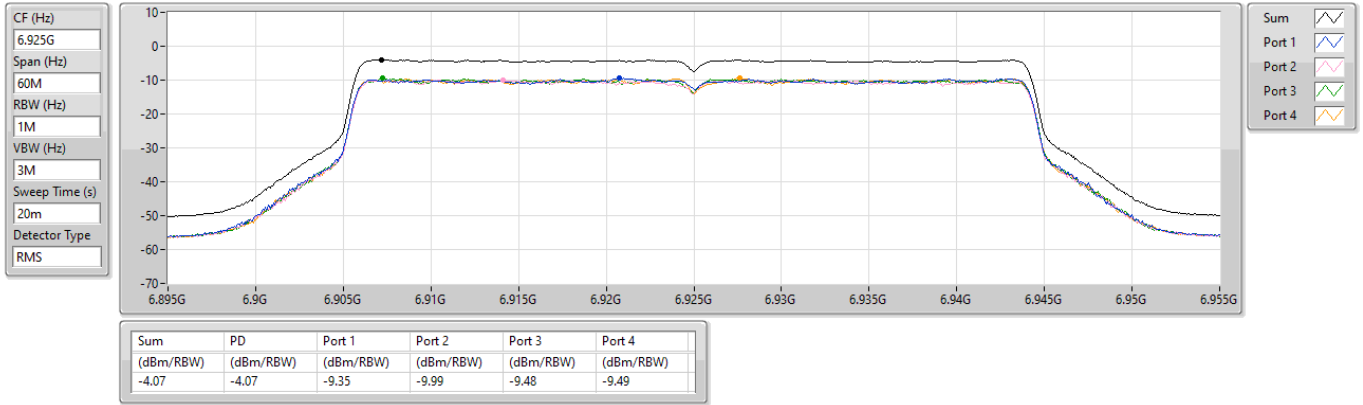

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

7005MHz

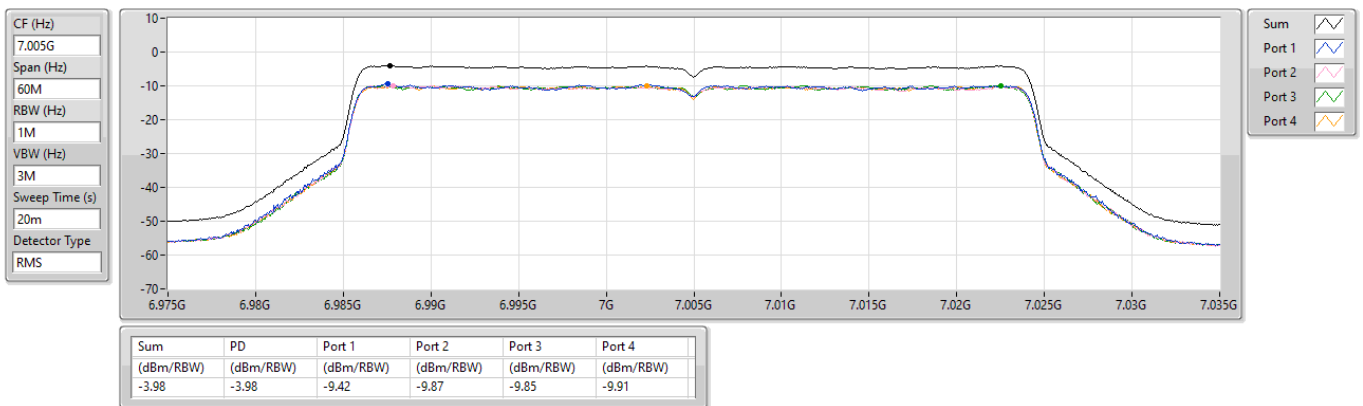




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


7085MHz

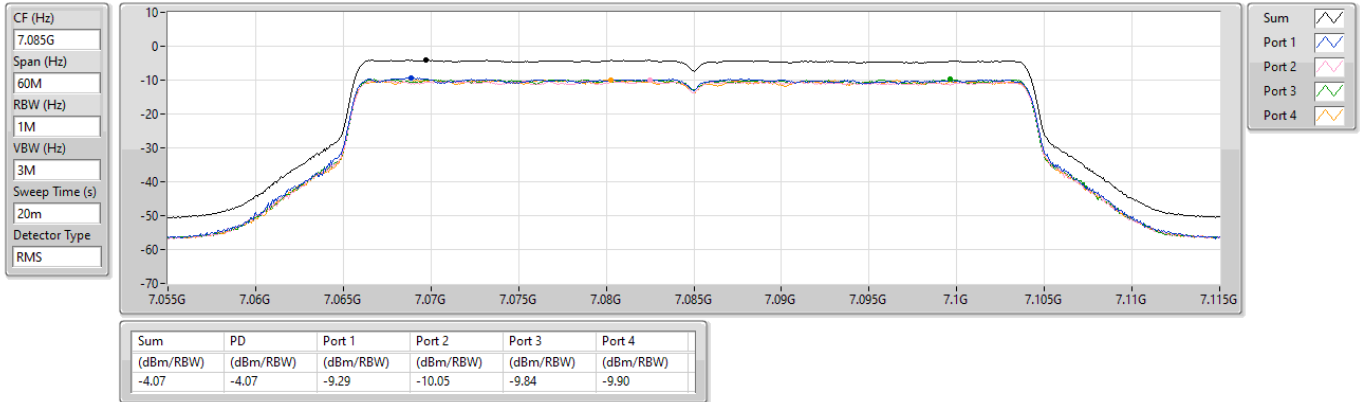

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5985MHz

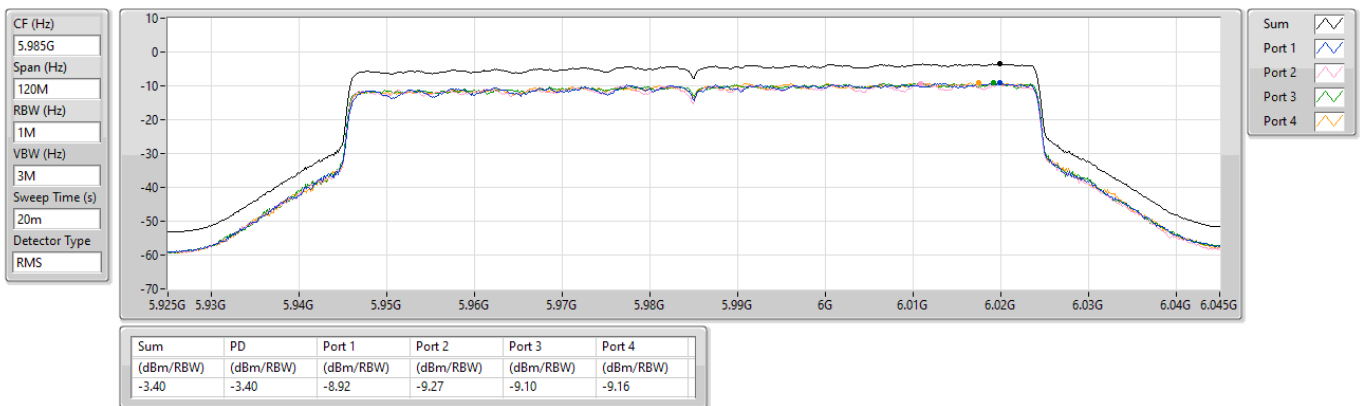




5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6145MHz

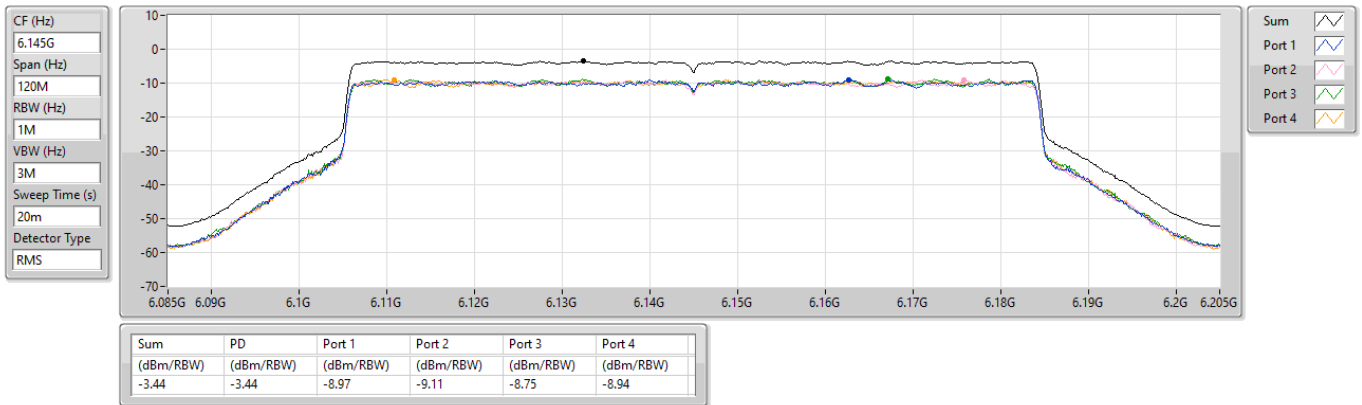

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6385MHz

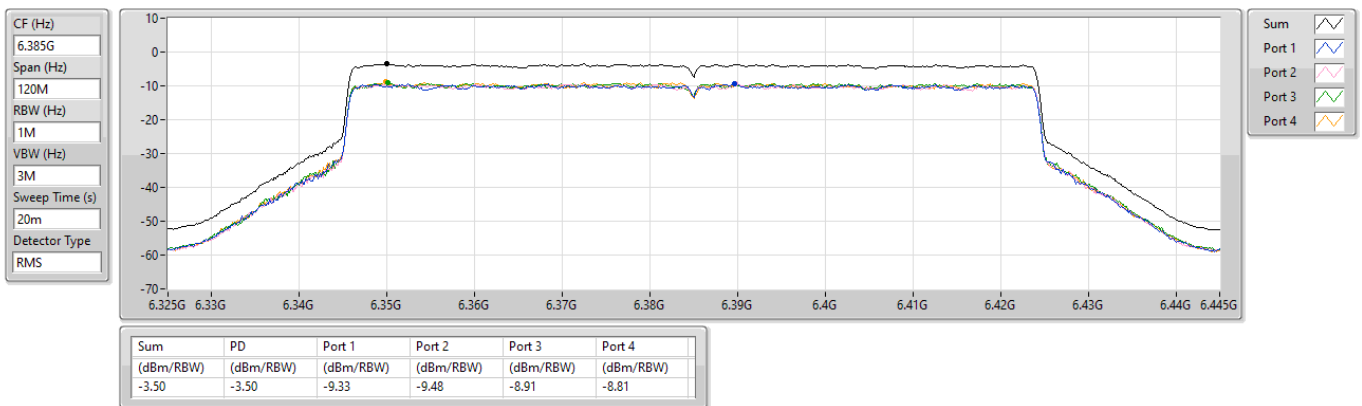




6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6465MHz

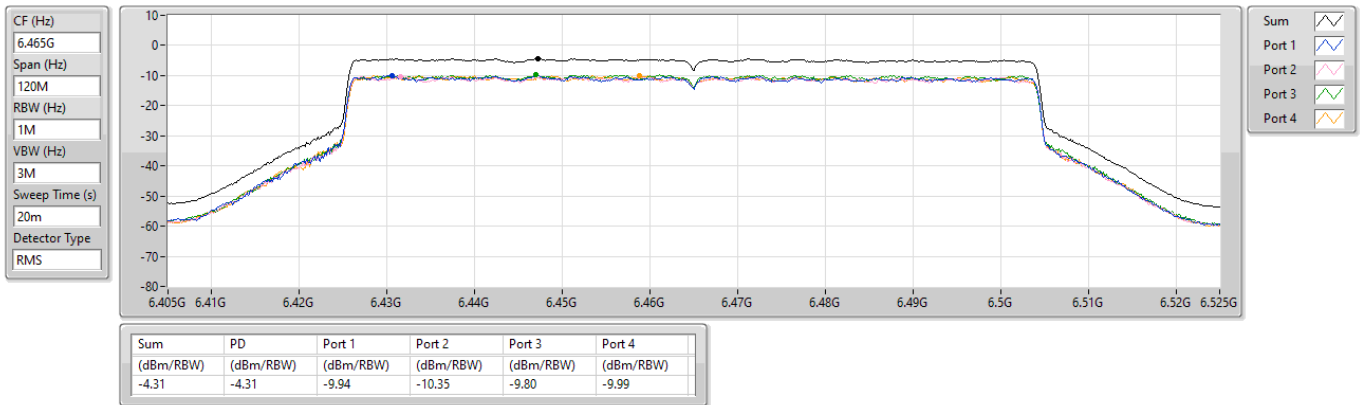

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6545MHz Straddle 6.525-6.875GHz

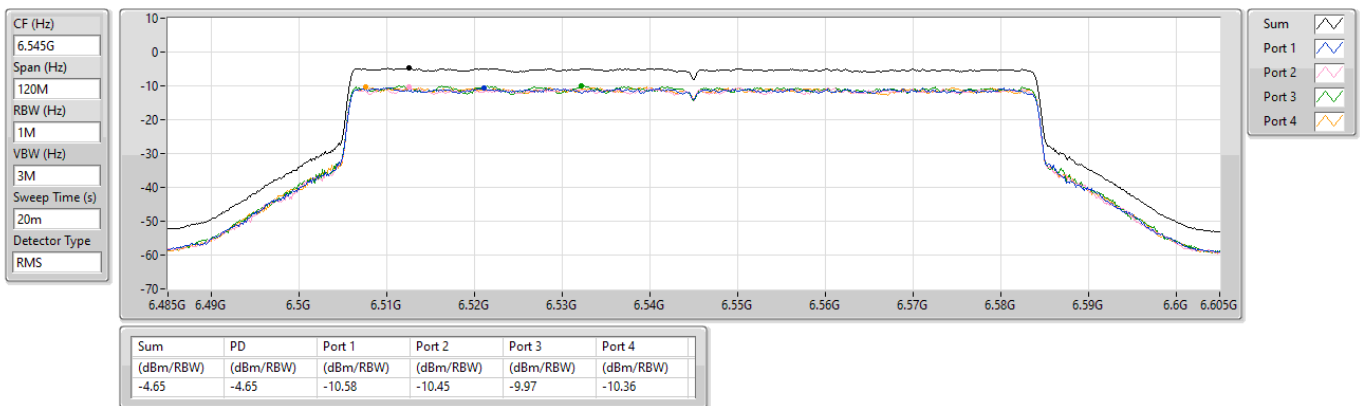

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6625MHz

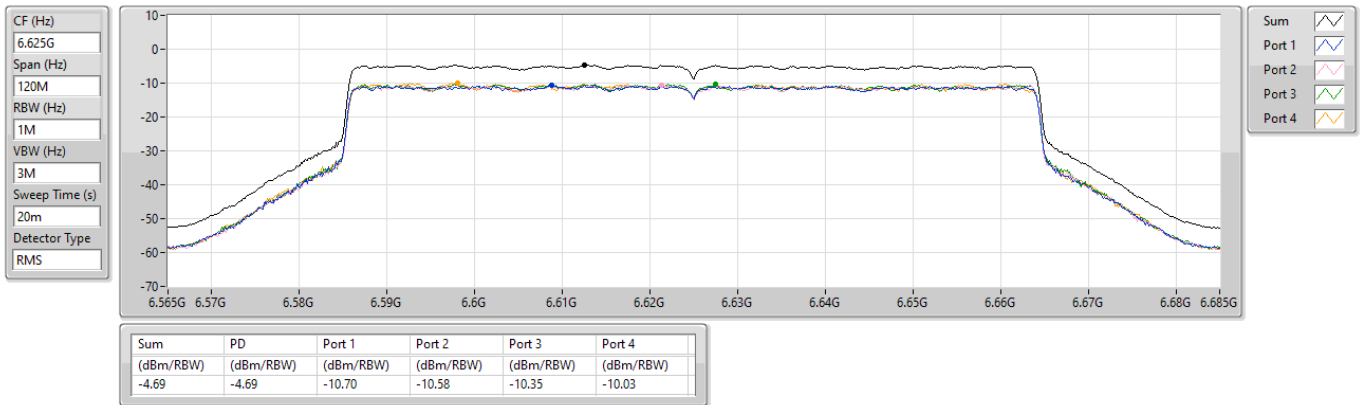

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6705MHz

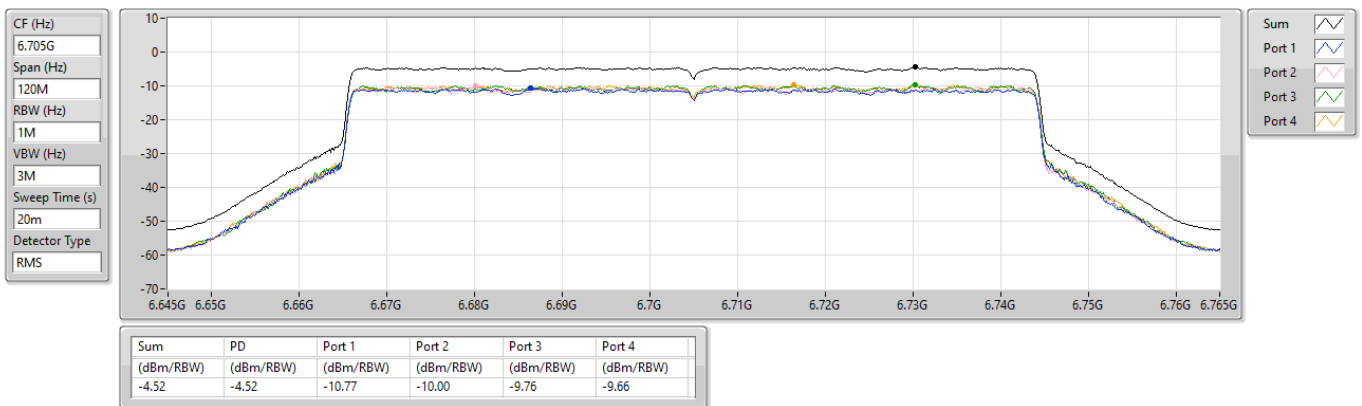

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6785MHz

CF (Hz)
6.785G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

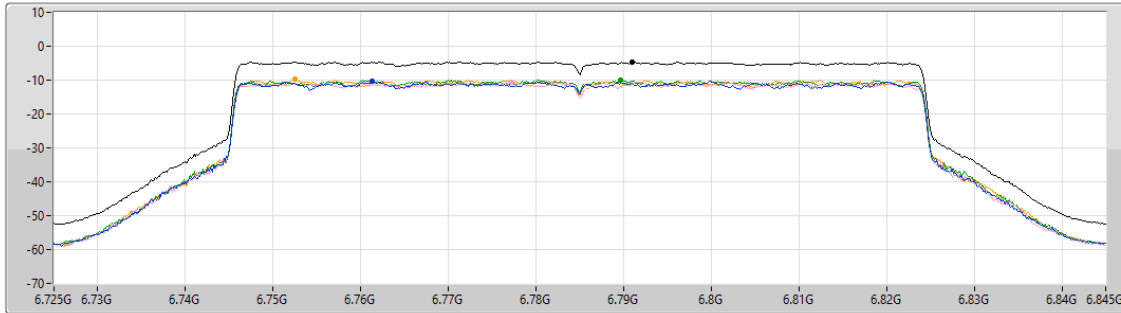

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.69	-4.69	-10.40	-10.54	-9.90	-9.68

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6865MHz Straddle 6.525-6.875GHz

CF (Hz)
6.865G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

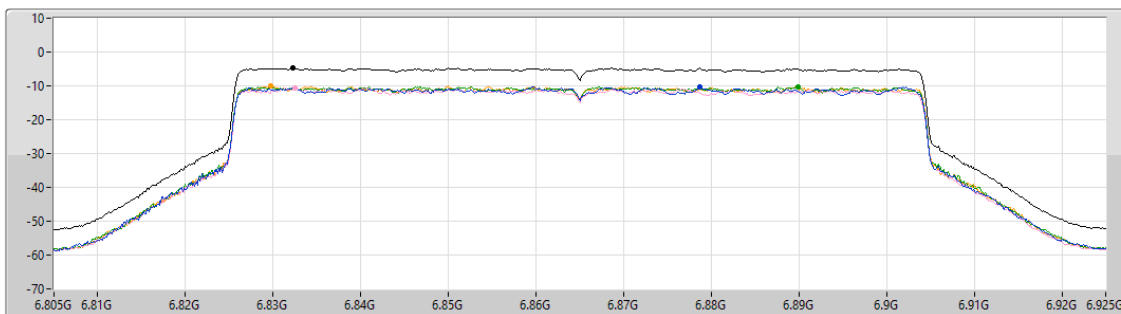

Sum

Port 1

Port 2

Port 3

Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.74	-4.74	-10.25	-10.64	-10.16	-10.09



6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6945MHz

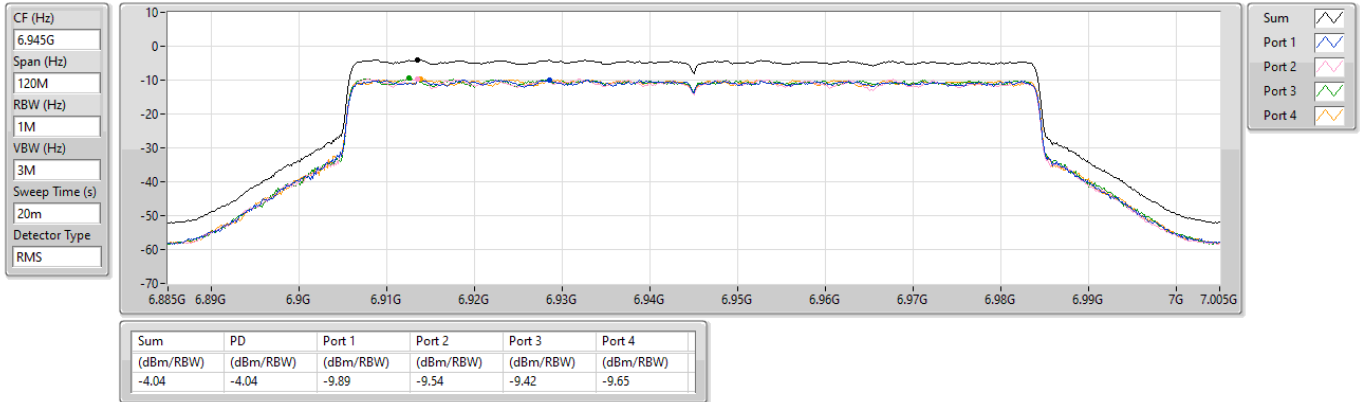

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

7025MHz

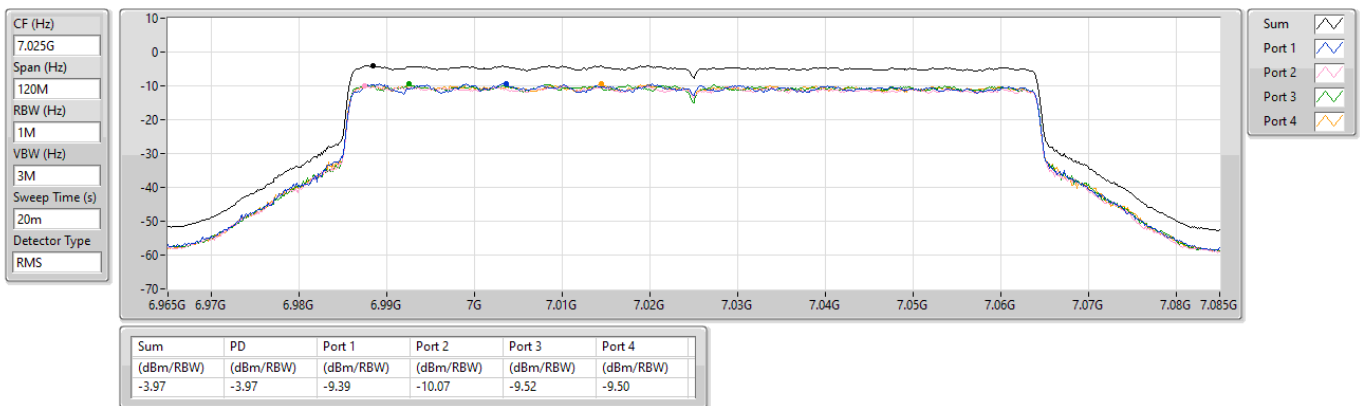




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6025MHz

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

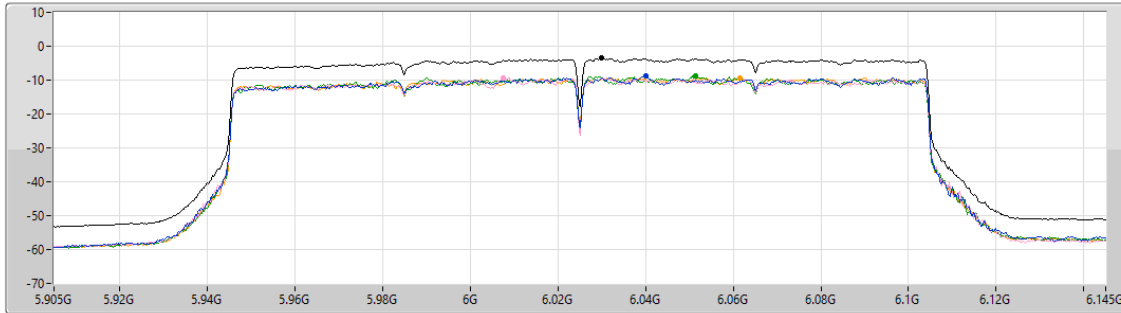

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.41	-3.41	-8.90	-9.34	-8.72	-9.35

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6185MHz

CF (Hz)
6.185G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

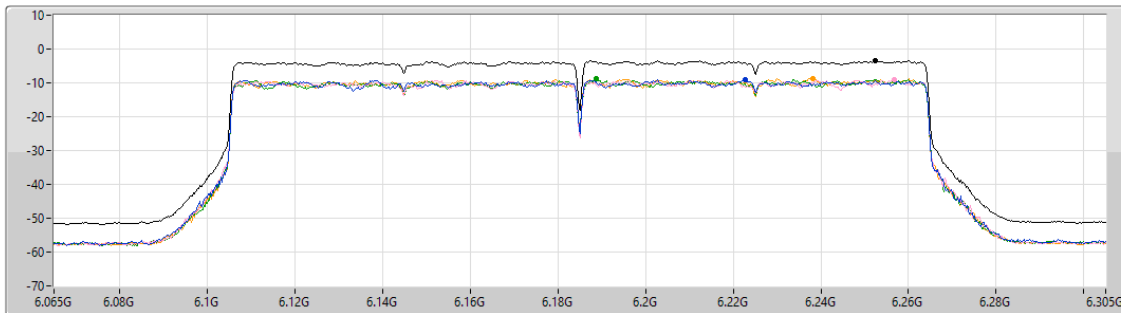

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.47	-3.47	-8.99	-9.19	-8.86	-8.74



5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


6345MHz

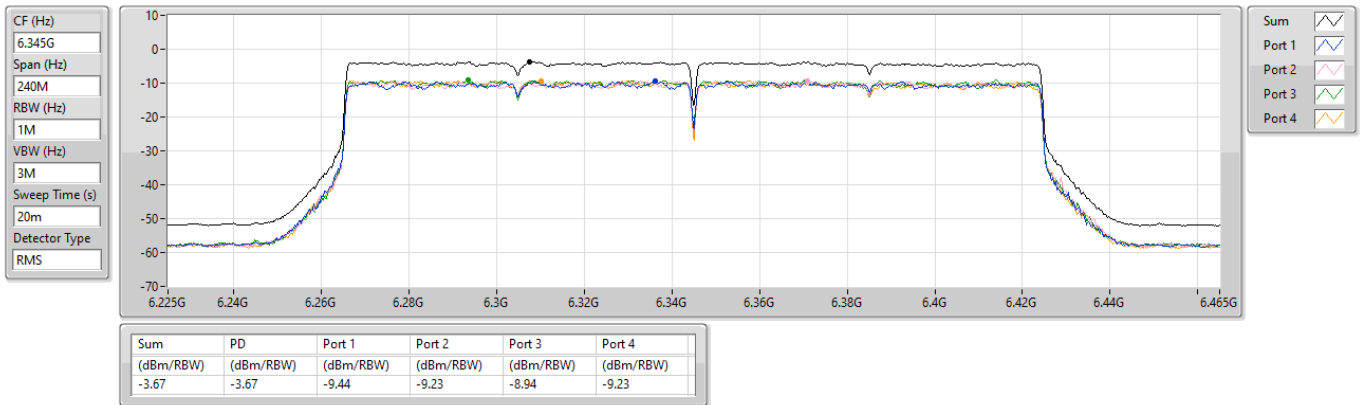

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6505MHz Straddle 6.525-6.875GHz

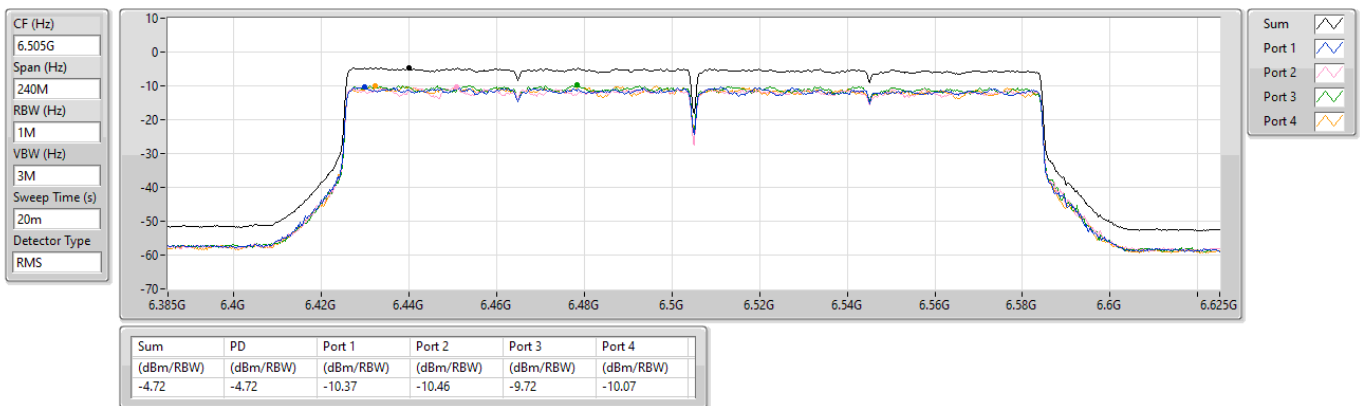




6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6665MHz

CF (Hz)
6.665G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

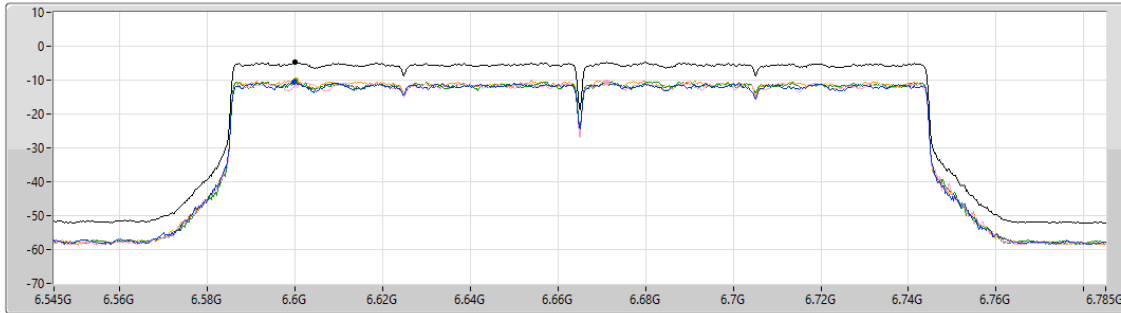

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.63	-4.63	-10.58	-10.60	-10.42	-10.07

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6825MHz Straddle 6.525-6.875GHz

CF (Hz)
6.825G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

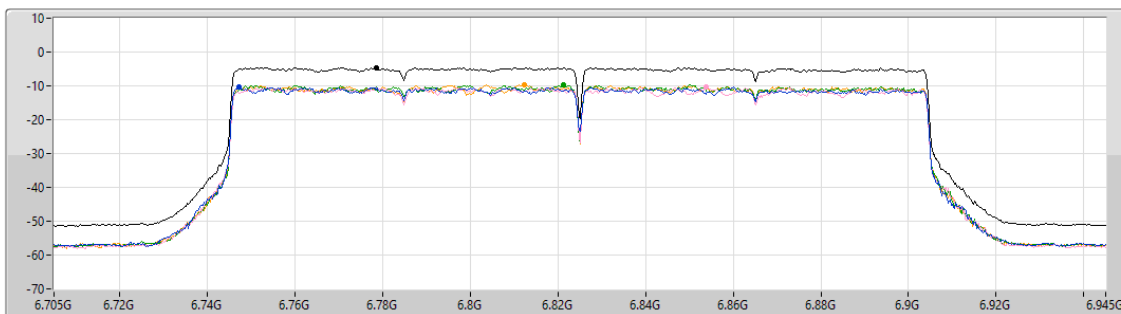


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.55	-4.55	-10.37	-10.43	-9.70	-9.69

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


6985MHz

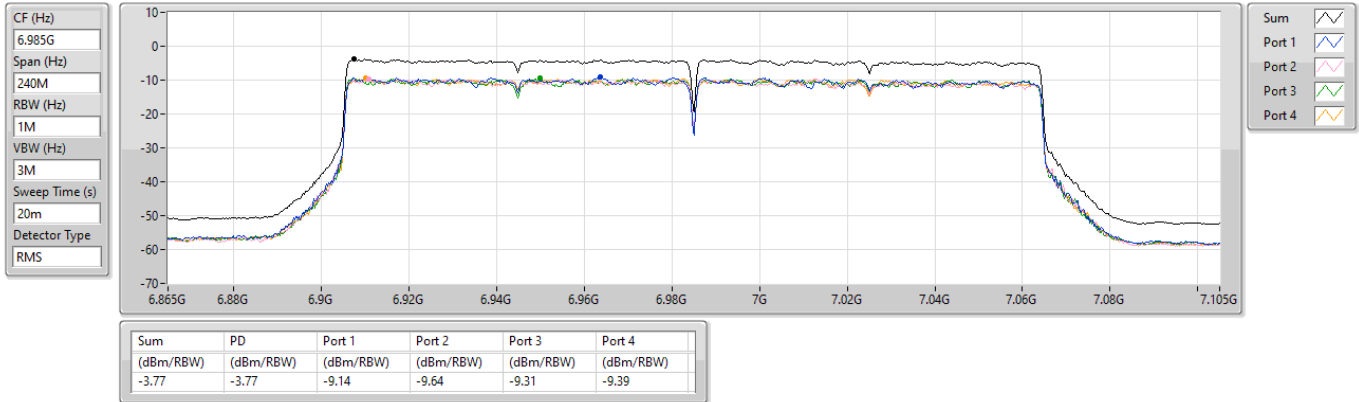

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6105MHz

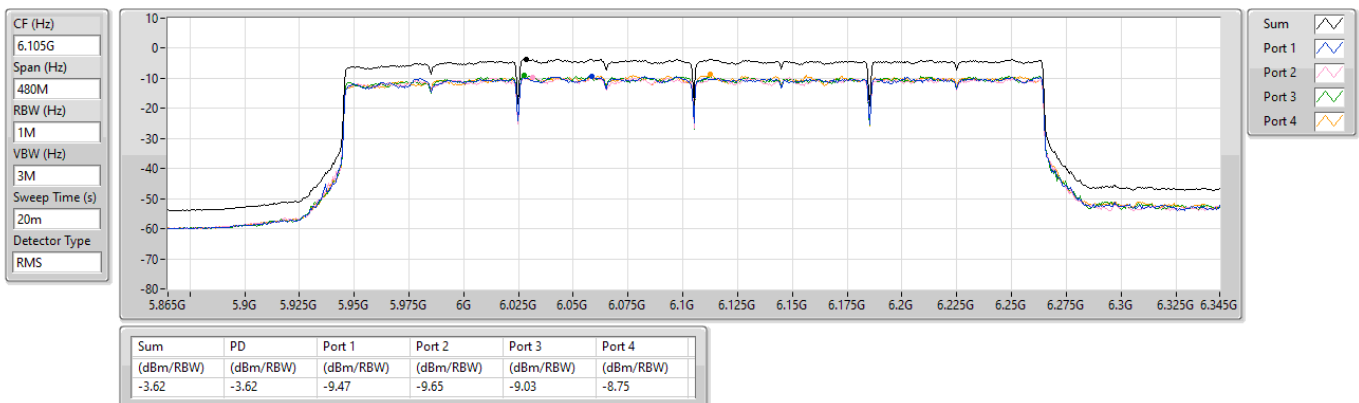




5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD


6265MHz

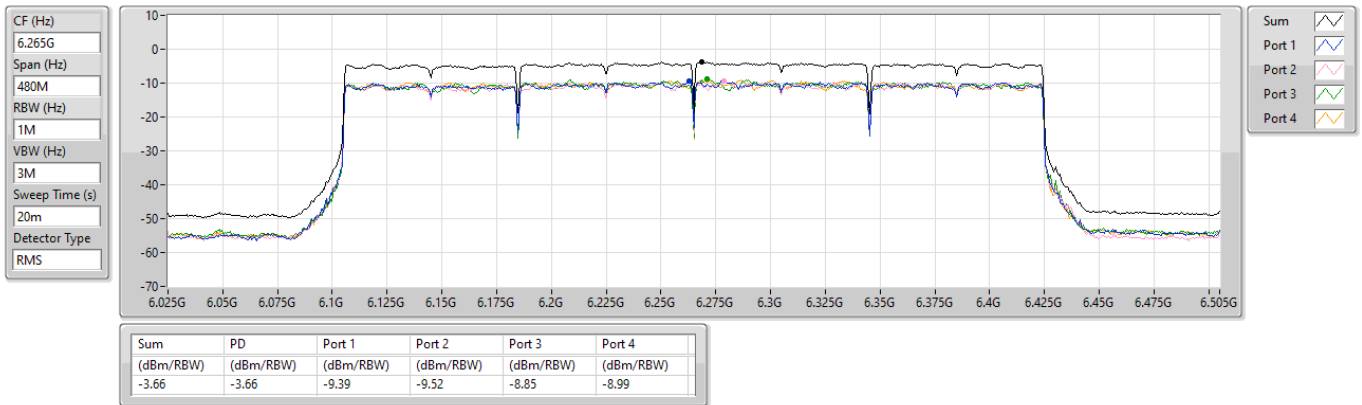

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6425MHz Straddle 6.525-6.875GHz

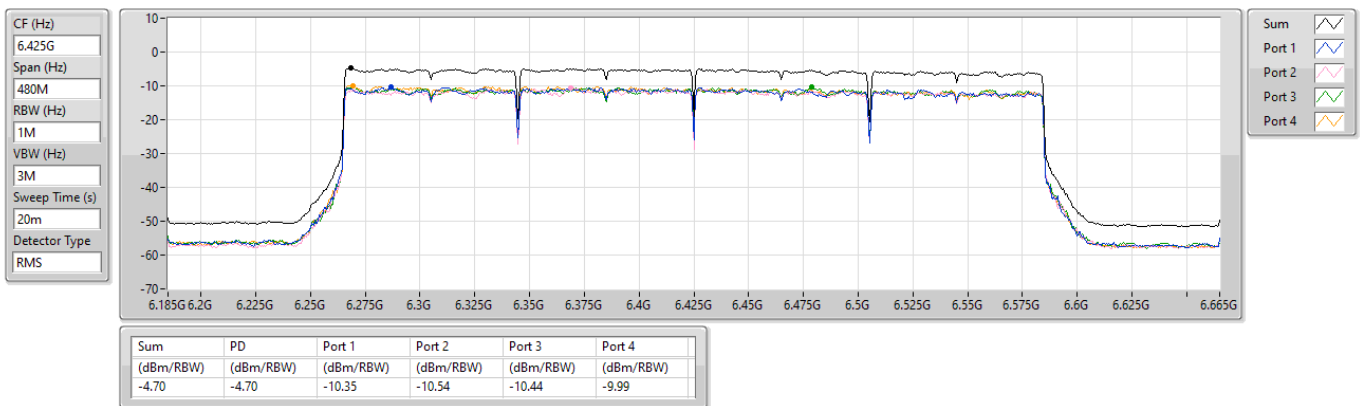




6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD


6585MHz Straddle 6.525-6.875GHz

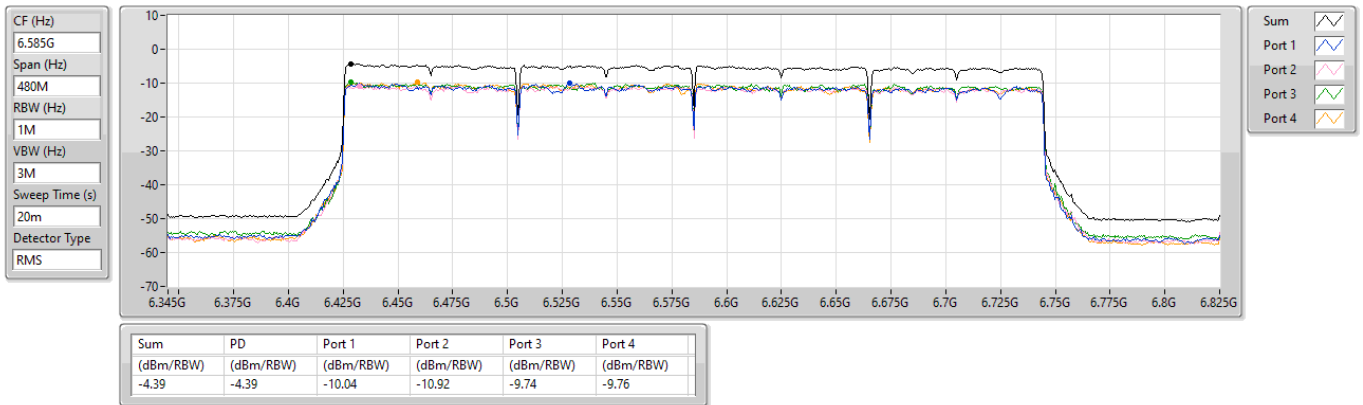

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6745MHz Straddle 6.525-6.875GHz

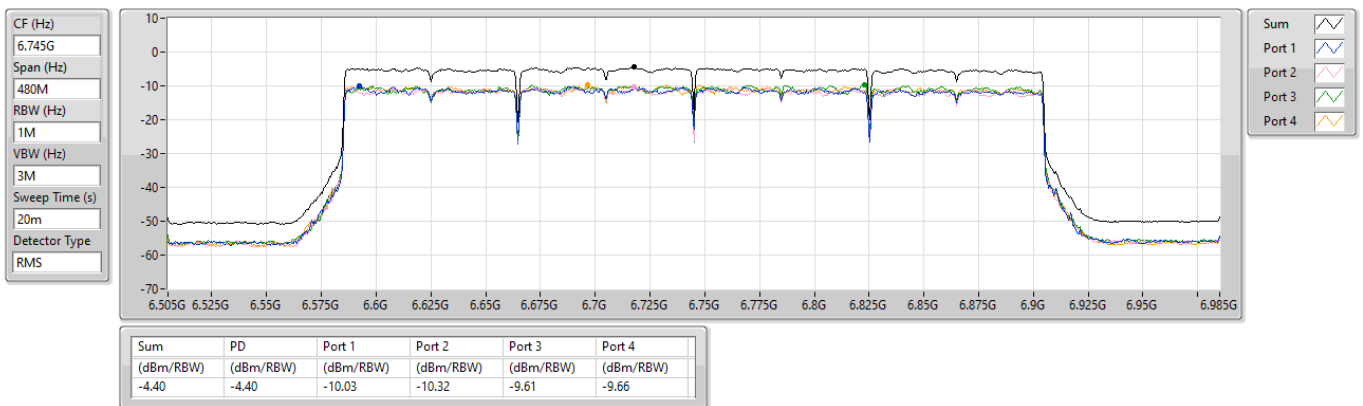




6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD


6905MHz Straddle 6.525-6.875GHz

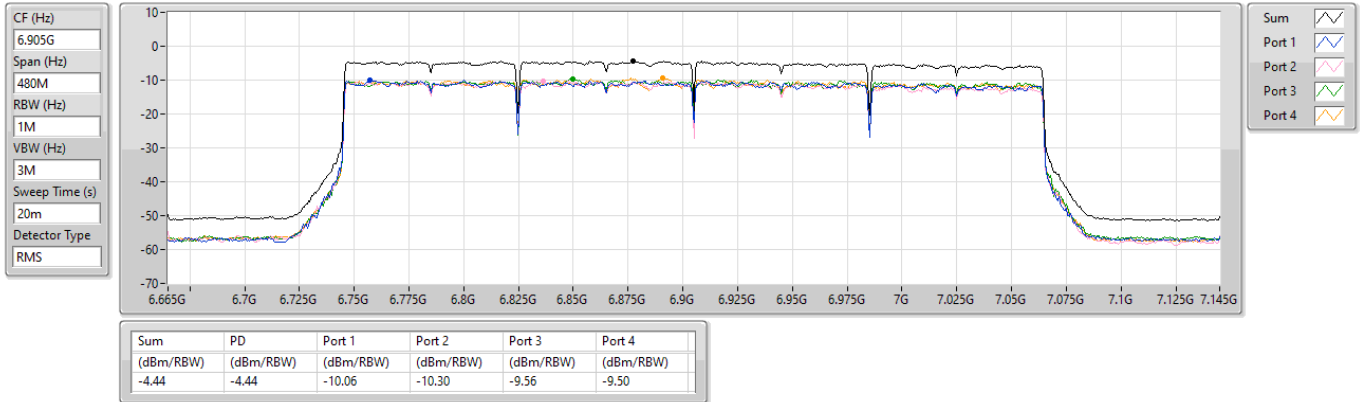



POE mode

Unwanted Emissions (Below 1GHz)

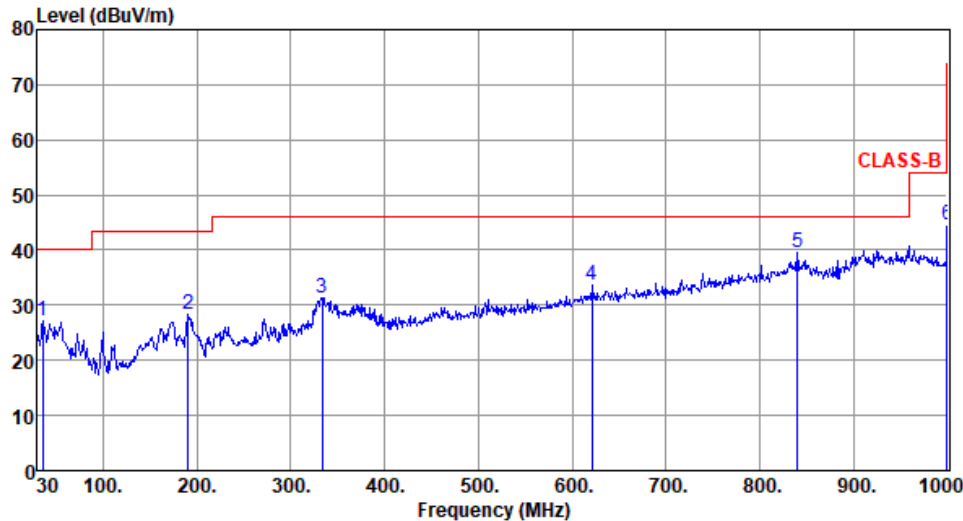Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105																																																																						
Polarization	Horizontal																																																																								
Test By :Hugo Zhen Temperature(°C):23 Humidity(%):59																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>35.82</td><td>27.06</td><td>40.00</td><td>-12.94</td><td>36.87</td><td>-9.81</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>191.02</td><td>28.25</td><td>43.50</td><td>-15.25</td><td>39.43</td><td>-11.18</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>333.61</td><td>31.33</td><td>46.00</td><td>-14.67</td><td>37.89</td><td>-6.56</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>620.73</td><td>33.72</td><td>46.00</td><td>-12.28</td><td>32.81</td><td>0.91</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>839.95</td><td>39.65</td><td>46.00</td><td>-6.35</td><td>34.60</td><td>5.05</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>1000.00</td><td>44.54</td><td>54.00</td><td>-9.46</td><td>36.70</td><td>7.84</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	35.82	27.06	40.00	-12.94	36.87	-9.81	Peak	---	---	2	191.02	28.25	43.50	-15.25	39.43	-11.18	Peak	---	---	3	333.61	31.33	46.00	-14.67	37.89	-6.56	Peak	---	---	4	620.73	33.72	46.00	-12.28	32.81	0.91	Peak	---	---	5	839.95	39.65	46.00	-6.35	34.60	5.05	Peak	---	---	6	1000.00	44.54	54.00	-9.46	36.70	7.84	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	35.82	27.06	40.00	-12.94	36.87	-9.81	Peak	---	---																																																																
2	191.02	28.25	43.50	-15.25	39.43	-11.18	Peak	---	---																																																																
3	333.61	31.33	46.00	-14.67	37.89	-6.56	Peak	---	---																																																																
4	620.73	33.72	46.00	-12.28	32.81	0.91	Peak	---	---																																																																
5	839.95	39.65	46.00	-6.35	34.60	5.05	Peak	---	---																																																																
6	1000.00	44.54	54.00	-9.46	36.70	7.84	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									



Modulation	be EHT320-OFDMA		Test Freq. (MHz)		6105																																																																																														
Polarization	Vertical																																																																																																		
Test By :Hugo Zhen Temperature(°C):23 Humidity(%):59																																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>36.79</td><td>36.05</td><td>40.00</td><td>-3.95</td><td>45.81</td><td>-9.76</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>55.22</td><td>31.43</td><td>40.00</td><td>-8.57</td><td>40.05</td><td>-8.62</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>172.59</td><td>30.18</td><td>43.50</td><td>-13.32</td><td>39.38</td><td>-9.20</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>381.14</td><td>30.97</td><td>46.00</td><td>-15.03</td><td>36.09</td><td>-5.12</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>840.92</td><td>38.28</td><td>46.00</td><td>-7.72</td><td>33.21</td><td>5.07</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>1000.00</td><td>46.94</td><td>54.00</td><td>-7.06</td><td>39.10</td><td>7.84</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	36.79	36.05	40.00	-3.95	45.81	-9.76	Peak	---	---	2	55.22	31.43	40.00	-8.57	40.05	-8.62	Peak	---	---	3	172.59	30.18	43.50	-13.32	39.38	-9.20	Peak	---	---	4	381.14	30.97	46.00	-15.03	36.09	-5.12	Peak	---	---	5	840.92	38.28	46.00	-7.72	33.21	5.07	Peak	---	---	6	1000.00	46.94	54.00	-7.06	39.10	7.84	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level			reading			High	Table																																																																																										
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																										
1	36.79	36.05	40.00	-3.95	45.81	-9.76	Peak	---	---																																																																																										
2	55.22	31.43	40.00	-8.57	40.05	-8.62	Peak	---	---																																																																																										
3	172.59	30.18	43.50	-13.32	39.38	-9.20	Peak	---	---																																																																																										
4	381.14	30.97	46.00	-15.03	36.09	-5.12	Peak	---	---																																																																																										
5	840.92	38.28	46.00	-7.72	33.21	5.07	Peak	---	---																																																																																										
6	1000.00	46.94	54.00	-7.06	39.10	7.84	Peak	---	---																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			



Adapter mode

Unwanted Emissions (Below 1GHz)

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Horizontal		

Test By :Hugo Zhen

Temperature(°C):23

Humidity(%):59

The graph shows the emission level in dBuV/m on the y-axis (0 to 80) against frequency in MHz on the x-axis (30 to 1000). A red line indicates the CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 200 MHz, and 50 dBuV/m from 200 to 1000 MHz. A blue line shows the measured emission level, which is generally below the limit. Six peaks are identified and numbered 1 through 6.


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	47.46	28.97	40.00	-11.03	37.57	-8.60	Peak	---	---
2	82.38	26.61	40.00	-13.39	40.69	-14.08	Peak	---	---
3	189.08	30.87	43.50	-12.63	41.96	-11.09	Peak	---	---
4	346.22	31.47	46.00	-14.53	37.85	-6.38	Peak	---	---
5	800.18	42.75	46.00	-3.25	38.40	4.35	Peak	---	---
6	1000.00	47.51	54.00	-6.49	39.67	7.84	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

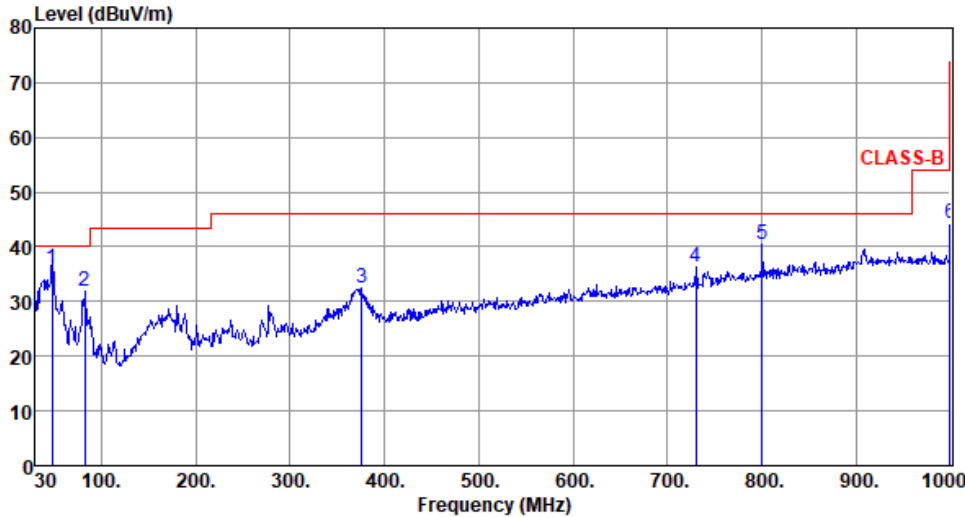

Modulation	be EHT320-OFDMA		Test Freq. (MHz)		6105																																																																																				
Polarization	Vertical																																																																																								
Test By :Hugo Zhen Temperature(°C):23 Humidity(%):59																																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>47.46</td><td>36.04</td><td>40.00</td><td>-3.96</td><td>44.64</td><td>-8.60</td><td>QP</td><td>100</td><td>26</td></tr><tr><td>2</td><td>82.38</td><td>31.83</td><td>40.00</td><td>-8.17</td><td>45.91</td><td>-14.08</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>376.29</td><td>32.57</td><td>46.00</td><td>-13.43</td><td>37.90</td><td>-5.33</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>730.34</td><td>36.34</td><td>46.00</td><td>-9.66</td><td>33.10</td><td>3.24</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>800.18</td><td>40.56</td><td>46.00</td><td>-5.44</td><td>36.21</td><td>4.35</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>1000.00</td><td>44.35</td><td>54.00</td><td>-9.65</td><td>36.51</td><td>7.84</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	47.46	36.04	40.00	-3.96	44.64	-8.60	QP	100	26	2	82.38	31.83	40.00	-8.17	45.91	-14.08	Peak	---	---	3	376.29	32.57	46.00	-13.43	37.90	-5.33	Peak	---	---	4	730.34	36.34	46.00	-9.66	33.10	3.24	Peak	---	---	5	800.18	40.56	46.00	-5.44	36.21	4.35	Peak	---	---	6	1000.00	44.35	54.00	-9.65	36.51	7.84	Peak	---	---
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																
1	47.46	36.04	40.00	-3.96	44.64	-8.60	QP	100	26																																																																																
2	82.38	31.83	40.00	-8.17	45.91	-14.08	Peak	---	---																																																																																
3	376.29	32.57	46.00	-13.43	37.90	-5.33	Peak	---	---																																																																																
4	730.34	36.34	46.00	-9.66	33.10	3.24	Peak	---	---																																																																																
5	800.18	40.56	46.00	-5.44	36.21	4.35	Peak	---	---																																																																																
6	1000.00	44.35	54.00	-9.65	36.51	7.84	Peak	---	---																																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																									

Unwanted Emissions (Above 1GHz) for be EHT20-OFDMA

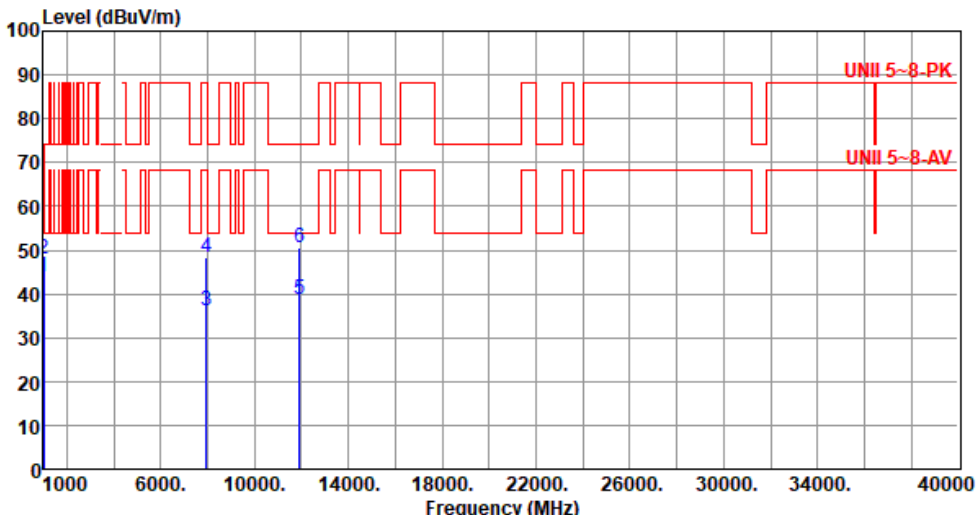Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>43.96</td><td>54.00</td><td>-10.04</td><td>51.64</td><td>-7.68</td><td>Average</td><td>128</td><td>138</td></tr><tr><td>2</td><td>1000.10</td><td>47.96</td><td>74.00</td><td>-26.04</td><td>55.64</td><td>-7.68</td><td>Peak</td><td>128</td><td>138</td></tr><tr><td>3</td><td>7940.00</td><td>36.16</td><td>68.20</td><td>-32.04</td><td>29.32</td><td>6.84</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>4</td><td>7940.00</td><td>48.49</td><td>88.20</td><td>-39.71</td><td>41.65</td><td>6.84</td><td>Peak</td><td>100</td><td>200</td></tr><tr><td>5</td><td>11910.00</td><td>38.73</td><td>54.00</td><td>-15.27</td><td>30.65</td><td>8.08</td><td>Average</td><td>100</td><td>222</td></tr><tr><td>6</td><td>11910.00</td><td>50.72</td><td>74.00</td><td>-23.28</td><td>42.64</td><td>8.08</td><td>Peak</td><td>100</td><td>222</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.96	54.00	-10.04	51.64	-7.68	Average	128	138	2	1000.10	47.96	74.00	-26.04	55.64	-7.68	Peak	128	138	3	7940.00	36.16	68.20	-32.04	29.32	6.84	Average	100	200	4	7940.00	48.49	88.20	-39.71	41.65	6.84	Peak	100	200	5	11910.00	38.73	54.00	-15.27	30.65	8.08	Average	100	222	6	11910.00	50.72	74.00	-23.28	42.64	8.08	Peak	100	222
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	43.96	54.00	-10.04	51.64	-7.68	Average	128	138																																																																
2	1000.10	47.96	74.00	-26.04	55.64	-7.68	Peak	128	138																																																																
3	7940.00	36.16	68.20	-32.04	29.32	6.84	Average	100	200																																																																
4	7940.00	48.49	88.20	-39.71	41.65	6.84	Peak	100	200																																																																
5	11910.00	38.73	54.00	-15.27	30.65	8.08	Average	100	222																																																																
6	11910.00	50.72	74.00	-23.28	42.64	8.08	Peak	100	222																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6175
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6175
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6415																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.10</td><td>44.26</td><td>54.00</td><td>-9.74</td><td>51.94</td><td>-7.68</td><td>Average</td><td>128</td><td>135</td></tr><tr><td>2</td><td>1000.10</td><td>48.26</td><td>74.00</td><td>-25.74</td><td>55.94</td><td>-7.68</td><td>Peak</td><td>128</td><td>135</td></tr><tr><td>3</td><td>8553.33</td><td>35.61</td><td>68.20</td><td>-32.59</td><td>28.66</td><td>6.95</td><td>Average</td><td>100</td><td>202</td></tr><tr><td>4</td><td>8553.33</td><td>48.49</td><td>88.20</td><td>-39.71</td><td>41.54</td><td>6.95</td><td>Peak</td><td>100</td><td>202</td></tr><tr><td>5</td><td>12830.00</td><td>37.91</td><td>68.20</td><td>-30.29</td><td>29.71</td><td>8.20</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>6</td><td>12830.00</td><td>50.93</td><td>88.20</td><td>-37.27</td><td>42.73</td><td>8.20</td><td>Peak</td><td>100</td><td>218</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	44.26	54.00	-9.74	51.94	-7.68	Average	128	135	2	1000.10	48.26	74.00	-25.74	55.94	-7.68	Peak	128	135	3	8553.33	35.61	68.20	-32.59	28.66	6.95	Average	100	202	4	8553.33	48.49	88.20	-39.71	41.54	6.95	Peak	100	202	5	12830.00	37.91	68.20	-30.29	29.71	8.20	Average	100	218	6	12830.00	50.93	88.20	-37.27	42.73	8.20	Peak	100	218
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	44.26	54.00	-9.74	51.94	-7.68	Average	128	135																																																																
2	1000.10	48.26	74.00	-25.74	55.94	-7.68	Peak	128	135																																																																
3	8553.33	35.61	68.20	-32.59	28.66	6.95	Average	100	202																																																																
4	8553.33	48.49	88.20	-39.71	41.54	6.95	Peak	100	202																																																																
5	12830.00	37.91	68.20	-30.29	29.71	8.20	Average	100	218																																																																
6	12830.00	50.93	88.20	-37.27	42.73	8.20	Peak	100	218																																																																



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6415
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6435																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>44.26</td><td>54.00</td><td>-9.74</td><td>51.94</td><td>-7.68</td><td>Average</td><td>128</td><td>133</td></tr><tr><td>2</td><td>1000.10</td><td>48.04</td><td>74.00</td><td>-25.96</td><td>55.72</td><td>-7.68</td><td>Peak</td><td>128</td><td>133</td></tr><tr><td>3</td><td>8580.00</td><td>36.99</td><td>68.20</td><td>-31.21</td><td>29.94</td><td>7.05</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>4</td><td>8580.00</td><td>48.89</td><td>88.20</td><td>-39.31</td><td>41.84</td><td>7.05</td><td>Peak</td><td>100</td><td>200</td></tr><tr><td>5</td><td>12870.00</td><td>39.07</td><td>68.20</td><td>-29.13</td><td>30.84</td><td>8.23</td><td>Average</td><td>100</td><td>226</td></tr><tr><td>6</td><td>12870.00</td><td>50.92</td><td>88.20</td><td>-37.28</td><td>42.69</td><td>8.23</td><td>Peak</td><td>100</td><td>226</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	44.26	54.00	-9.74	51.94	-7.68	Average	128	133	2	1000.10	48.04	74.00	-25.96	55.72	-7.68	Peak	128	133	3	8580.00	36.99	68.20	-31.21	29.94	7.05	Average	100	200	4	8580.00	48.89	88.20	-39.31	41.84	7.05	Peak	100	200	5	12870.00	39.07	68.20	-29.13	30.84	8.23	Average	100	226	6	12870.00	50.92	88.20	-37.28	42.69	8.23	Peak	100	226
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	44.26	54.00	-9.74	51.94	-7.68	Average	128	133																																																																
2	1000.10	48.04	74.00	-25.96	55.72	-7.68	Peak	128	133																																																																
3	8580.00	36.99	68.20	-31.21	29.94	7.05	Average	100	200																																																																
4	8580.00	48.89	88.20	-39.31	41.84	7.05	Peak	100	200																																																																
5	12870.00	39.07	68.20	-29.13	30.84	8.23	Average	100	226																																																																
6	12870.00	50.92	88.20	-37.28	42.69	8.23	Peak	100	226																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6435
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6475
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6475
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6515																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>44.26</td><td>54.00</td><td>-9.74</td><td>51.94</td><td>-7.68</td><td>Average</td><td>128</td><td>134</td></tr><tr><td>2</td><td>1000.10</td><td>47.66</td><td>74.00</td><td>-26.34</td><td>55.34</td><td>-7.68</td><td>Peak</td><td>128</td><td>134</td></tr><tr><td>3</td><td>8686.67</td><td>36.73</td><td>68.20</td><td>-31.47</td><td>29.48</td><td>7.25</td><td>Average</td><td>100</td><td>199</td></tr><tr><td>4</td><td>8686.67</td><td>48.80</td><td>88.20</td><td>-39.40</td><td>41.55</td><td>7.25</td><td>Peak</td><td>100</td><td>199</td></tr><tr><td>5</td><td>13030.00</td><td>38.52</td><td>68.20</td><td>-29.68</td><td>30.48</td><td>8.04</td><td>Average</td><td>100</td><td>229</td></tr><tr><td>6</td><td>13030.00</td><td>50.95</td><td>88.20</td><td>-37.25</td><td>42.91</td><td>8.04</td><td>Peak</td><td>100</td><td>229</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	44.26	54.00	-9.74	51.94	-7.68	Average	128	134	2	1000.10	47.66	74.00	-26.34	55.34	-7.68	Peak	128	134	3	8686.67	36.73	68.20	-31.47	29.48	7.25	Average	100	199	4	8686.67	48.80	88.20	-39.40	41.55	7.25	Peak	100	199	5	13030.00	38.52	68.20	-29.68	30.48	8.04	Average	100	229	6	13030.00	50.95	88.20	-37.25	42.91	8.04	Peak	100	229
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	44.26	54.00	-9.74	51.94	-7.68	Average	128	134																																																																
2	1000.10	47.66	74.00	-26.34	55.34	-7.68	Peak	128	134																																																																
3	8686.67	36.73	68.20	-31.47	29.48	7.25	Average	100	199																																																																
4	8686.67	48.80	88.20	-39.40	41.55	7.25	Peak	100	199																																																																
5	13030.00	38.52	68.20	-29.68	30.48	8.04	Average	100	229																																																																
6	13030.00	50.95	88.20	-37.25	42.91	8.04	Peak	100	229																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6515
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6535
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6535
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6715
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6715
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6875																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>43.78</td><td>54.00</td><td>-10.22</td><td>51.46</td><td>-7.68</td><td>Average</td><td>128</td><td>137</td></tr><tr><td>2</td><td>1000.10</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>55.49</td><td>-7.68</td><td>Peak</td><td>128</td><td>137</td></tr><tr><td>3</td><td>9166.67</td><td>37.45</td><td>54.00</td><td>-16.55</td><td>29.46</td><td>7.99</td><td>Average</td><td>100</td><td>202</td></tr><tr><td>4</td><td>9166.67</td><td>49.48</td><td>74.00</td><td>-24.52</td><td>41.49</td><td>7.99</td><td>Peak</td><td>100</td><td>202</td></tr><tr><td>5</td><td>13750.00</td><td>38.71</td><td>68.20</td><td>-29.49</td><td>30.49</td><td>8.22</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>6</td><td>13750.00</td><td>50.71</td><td>88.20</td><td>-37.49</td><td>42.49</td><td>8.22</td><td>Peak</td><td>100</td><td>223</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.78	54.00	-10.22	51.46	-7.68	Average	128	137	2	1000.10	47.81	74.00	-26.19	55.49	-7.68	Peak	128	137	3	9166.67	37.45	54.00	-16.55	29.46	7.99	Average	100	202	4	9166.67	49.48	74.00	-24.52	41.49	7.99	Peak	100	202	5	13750.00	38.71	68.20	-29.49	30.49	8.22	Average	100	223	6	13750.00	50.71	88.20	-37.49	42.49	8.22	Peak	100	223
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	43.78	54.00	-10.22	51.46	-7.68	Average	128	137																																																																
2	1000.10	47.81	74.00	-26.19	55.49	-7.68	Peak	128	137																																																																
3	9166.67	37.45	54.00	-16.55	29.46	7.99	Average	100	202																																																																
4	9166.67	49.48	74.00	-24.52	41.49	7.99	Peak	100	202																																																																
5	13750.00	38.71	68.20	-29.49	30.49	8.22	Average	100	223																																																																
6	13750.00	50.71	88.20	-37.49	42.49	8.22	Peak	100	223																																																																



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6875
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6895																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>43.81</td><td>54.00</td><td>-10.19</td><td>51.49</td><td>-7.68</td><td>Average</td><td>128</td><td>137</td></tr><tr><td>2</td><td>1000.10</td><td>48.04</td><td>74.00</td><td>-25.96</td><td>55.72</td><td>-7.68</td><td>Peak</td><td>128</td><td>137</td></tr><tr><td>3</td><td>9193.33</td><td>37.65</td><td>54.00</td><td>-16.35</td><td>29.56</td><td>8.09</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4</td><td>9193.33</td><td>49.53</td><td>74.00</td><td>-24.47</td><td>41.44</td><td>8.09</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>13790.00</td><td>38.75</td><td>68.20</td><td>-29.45</td><td>30.50</td><td>8.25</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>6</td><td>13790.00</td><td>51.08</td><td>88.20</td><td>-37.12</td><td>42.83</td><td>8.25</td><td>Peak</td><td>100</td><td>221</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.81	54.00	-10.19	51.49	-7.68	Average	128	137	2	1000.10	48.04	74.00	-25.96	55.72	-7.68	Peak	128	137	3	9193.33	37.65	54.00	-16.35	29.56	8.09	Average	100	208	4	9193.33	49.53	74.00	-24.47	41.44	8.09	Peak	100	208	5	13790.00	38.75	68.20	-29.45	30.50	8.25	Average	100	221	6	13790.00	51.08	88.20	-37.12	42.83	8.25	Peak	100	221
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	43.81	54.00	-10.19	51.49	-7.68	Average	128	137																																																																
2	1000.10	48.04	74.00	-25.96	55.72	-7.68	Peak	128	137																																																																
3	9193.33	37.65	54.00	-16.35	29.56	8.09	Average	100	208																																																																
4	9193.33	49.53	74.00	-24.47	41.44	8.09	Peak	100	208																																																																
5	13790.00	38.75	68.20	-29.45	30.50	8.25	Average	100	221																																																																
6	13790.00	51.08	88.20	-37.12	42.83	8.25	Peak	100	221																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6895
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7015
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7015
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115						
Polarization	Horizontal								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66									
Level (dBuV/m) 100 90 80 70 60 50 40 30 20 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) UNII 5-8-PK UNII 5-8-AV 4 6 3 5									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	1000.10	44.59	54.00	-9.41	52.27	-7.68	Average	128	139
2	1000.10	48.83	74.00	-25.17	56.51	-7.68	Peak	128	139
3	9486.67	37.67	54.00	-16.33	29.43	8.24	Average	100	208
4	9486.67	49.73	74.00	-24.27	41.49	8.24	Peak	100	208
5	14230.00	39.73	68.20	-28.47	30.78	8.95	Average	100	228
6	14230.00	51.10	88.20	-37.10	42.15	8.95	Peak	100	228

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

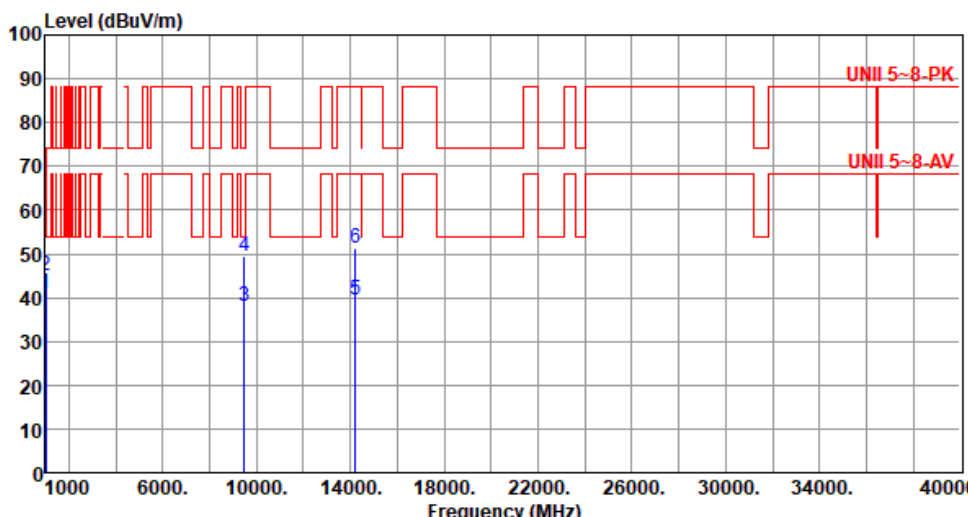

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115						
Polarization	Vertical								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.10	40.83	54.00	-13.17	48.51	-7.68	Average	311	172
2	1000.10	45.20	74.00	-28.80	52.88	-7.68	Peak	311	172
3	9486.67	38.10	54.00	-15.90	29.86	8.24	Average	100	65
4	9486.67	49.59	74.00	-24.41	41.35	8.24	Peak	100	65
5	14230.00	39.44	68.20	-28.76	30.49	8.95	Average	100	69
6	14230.00	51.37	88.20	-36.83	42.42	8.95	Peak	100	69

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Unwanted Emissions (Above 1GHz) for be EHT40-OFDMA

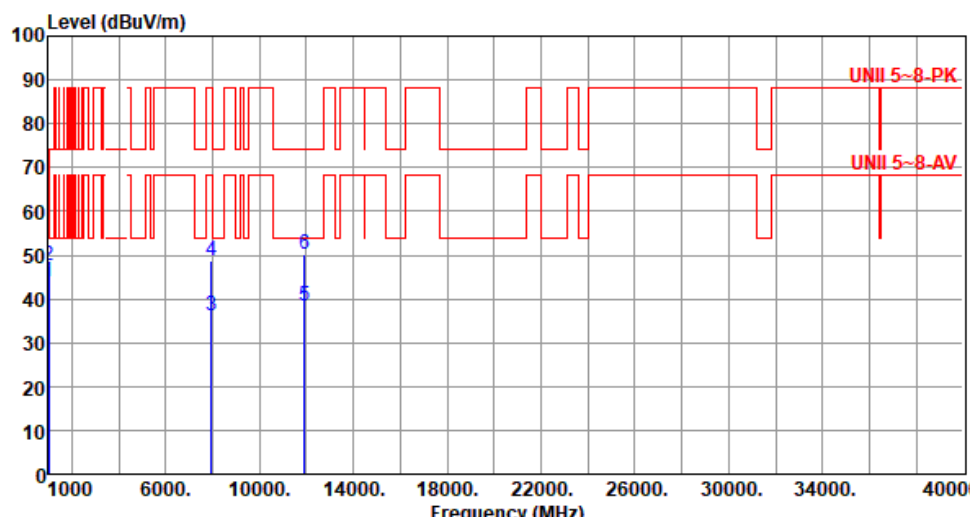Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>43.94</td><td>54.00</td><td>-10.06</td><td>51.62</td><td>-7.68</td><td>Average</td><td>128</td><td>139</td></tr><tr><td>2</td><td>1000.10</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>55.42</td><td>-7.68</td><td>Peak</td><td>128</td><td>139</td></tr><tr><td>3</td><td>7953.33</td><td>36.23</td><td>68.20</td><td>-31.97</td><td>29.34</td><td>6.89</td><td>Average</td><td>100</td><td>202</td></tr><tr><td>4</td><td>7953.33</td><td>48.61</td><td>88.20</td><td>-39.59</td><td>41.72</td><td>6.89</td><td>Peak</td><td>100</td><td>202</td></tr><tr><td>5</td><td>11930.00</td><td>38.50</td><td>54.00</td><td>-15.50</td><td>30.41</td><td>8.09</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>6</td><td>11930.00</td><td>50.36</td><td>74.00</td><td>-23.64</td><td>42.27</td><td>8.09</td><td>Peak</td><td>100</td><td>221</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.94	54.00	-10.06	51.62	-7.68	Average	128	139	2	1000.10	47.74	74.00	-26.26	55.42	-7.68	Peak	128	139	3	7953.33	36.23	68.20	-31.97	29.34	6.89	Average	100	202	4	7953.33	48.61	88.20	-39.59	41.72	6.89	Peak	100	202	5	11930.00	38.50	54.00	-15.50	30.41	8.09	Average	100	221	6	11930.00	50.36	74.00	-23.64	42.27	8.09	Peak	100	221
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	43.94	54.00	-10.06	51.62	-7.68	Average	128	139																																																																
2	1000.10	47.74	74.00	-26.26	55.42	-7.68	Peak	128	139																																																																
3	7953.33	36.23	68.20	-31.97	29.34	6.89	Average	100	202																																																																
4	7953.33	48.61	88.20	-39.59	41.72	6.89	Peak	100	202																																																																
5	11930.00	38.50	54.00	-15.50	30.41	8.09	Average	100	221																																																																
6	11930.00	50.36	74.00	-23.64	42.27	8.09	Peak	100	221																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6165
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6165
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6405																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>43.74</td><td>54.00</td><td>-10.26</td><td>51.42</td><td>-7.68</td><td>Average</td><td>128</td><td>134</td></tr><tr><td>2</td><td>1000.10</td><td>47.65</td><td>74.00</td><td>-26.35</td><td>55.33</td><td>-7.68</td><td>Peak</td><td>128</td><td>134</td></tr><tr><td>3</td><td>8540.00</td><td>36.24</td><td>68.20</td><td>-31.96</td><td>29.36</td><td>6.88</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4</td><td>8540.00</td><td>48.73</td><td>88.20</td><td>-39.47</td><td>41.85</td><td>6.88</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>12810.00</td><td>38.61</td><td>68.20</td><td>-29.59</td><td>30.48</td><td>8.13</td><td>Average</td><td>100</td><td>224</td></tr><tr><td>6</td><td>12810.00</td><td>50.31</td><td>88.20</td><td>-37.89</td><td>42.18</td><td>8.13</td><td>Peak</td><td>100</td><td>224</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.74	54.00	-10.26	51.42	-7.68	Average	128	134	2	1000.10	47.65	74.00	-26.35	55.33	-7.68	Peak	128	134	3	8540.00	36.24	68.20	-31.96	29.36	6.88	Average	100	208	4	8540.00	48.73	88.20	-39.47	41.85	6.88	Peak	100	208	5	12810.00	38.61	68.20	-29.59	30.48	8.13	Average	100	224	6	12810.00	50.31	88.20	-37.89	42.18	8.13	Peak	100	224
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	43.74	54.00	-10.26	51.42	-7.68	Average	128	134																																																																
2	1000.10	47.65	74.00	-26.35	55.33	-7.68	Peak	128	134																																																																
3	8540.00	36.24	68.20	-31.96	29.36	6.88	Average	100	208																																																																
4	8540.00	48.73	88.20	-39.47	41.85	6.88	Peak	100	208																																																																
5	12810.00	38.61	68.20	-29.59	30.48	8.13	Average	100	224																																																																
6	12810.00	50.31	88.20	-37.89	42.18	8.13	Peak	100	224																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6405
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6445
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6445
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6485
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6485
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			

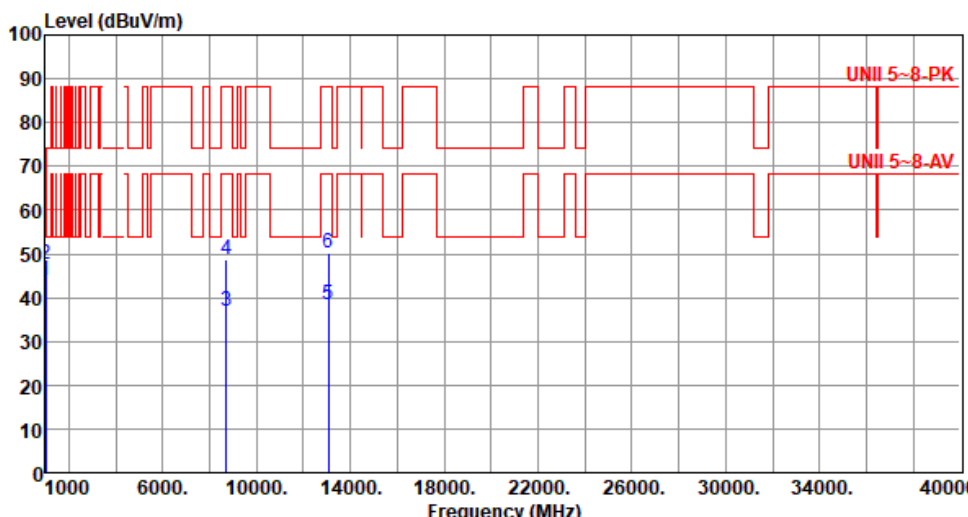

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6525						
Polarization	Horizontal								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62									
Level (dBuV/m) 									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.10	43.87	54.00	-10.13	51.55	-7.68	Average	128	141
2	1000.10	47.69	74.00	-26.31	55.37	-7.68	Peak	128	141
3	8700.00	36.76	68.20	-31.44	29.49	7.27	Average	100	217
4	8700.00	48.53	88.20	-39.67	41.26	7.27	Peak	100	217
5	13050.00	38.40	68.20	-29.80	30.42	7.98	Average	100	225
6	13050.00	50.35	88.20	-37.85	42.37	7.98	Peak	100	225

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6525
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6565
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6565
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.10</td><td>43.54</td><td>54.00</td><td>-10.46</td><td>51.22</td><td>-7.68</td><td>Average</td><td>128</td><td>139</td></tr><tr><td>2</td><td>1000.10</td><td>47.73</td><td>74.00</td><td>-26.27</td><td>55.41</td><td>-7.68</td><td>Peak</td><td>128</td><td>139</td></tr><tr><td>3</td><td>8966.67</td><td>36.48</td><td>68.20</td><td>-31.72</td><td>29.25</td><td>7.23</td><td>Average</td><td>100</td><td>217</td></tr><tr><td>4</td><td>8966.67</td><td>48.42</td><td>88.20</td><td>-39.78</td><td>41.19</td><td>7.23</td><td>Peak</td><td>100</td><td>217</td></tr><tr><td>5</td><td>13450.00</td><td>38.84</td><td>68.20</td><td>-29.36</td><td>30.49</td><td>8.35</td><td>Average</td><td>100</td><td>231</td></tr><tr><td>6</td><td>13450.00</td><td>51.28</td><td>88.20</td><td>-36.92</td><td>42.93</td><td>8.35</td><td>Peak</td><td>100</td><td>231</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.54	54.00	-10.46	51.22	-7.68	Average	128	139	2	1000.10	47.73	74.00	-26.27	55.41	-7.68	Peak	128	139	3	8966.67	36.48	68.20	-31.72	29.25	7.23	Average	100	217	4	8966.67	48.42	88.20	-39.78	41.19	7.23	Peak	100	217	5	13450.00	38.84	68.20	-29.36	30.49	8.35	Average	100	231	6	13450.00	51.28	88.20	-36.92	42.93	8.35	Peak	100	231
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	43.54	54.00	-10.46	51.22	-7.68	Average	128	139																																																																
2	1000.10	47.73	74.00	-26.27	55.41	-7.68	Peak	128	139																																																																
3	8966.67	36.48	68.20	-31.72	29.25	7.23	Average	100	217																																																																
4	8966.67	48.42	88.20	-39.78	41.19	7.23	Peak	100	217																																																																
5	13450.00	38.84	68.20	-29.36	30.49	8.35	Average	100	231																																																																
6	13450.00	51.28	88.20	-36.92	42.93	8.35	Peak	100	231																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6885
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6885
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>43.86</td><td>54.00</td><td>-10.14</td><td>51.54</td><td>-7.68</td><td>Average</td><td>128</td><td>141</td></tr><tr><td>2</td><td>1000.10</td><td>47.96</td><td>74.00</td><td>-26.04</td><td>55.64</td><td>-7.68</td><td>Peak</td><td>128</td><td>141</td></tr><tr><td>3</td><td>9233.33</td><td>37.73</td><td>68.20</td><td>-30.47</td><td>29.48</td><td>8.25</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>4</td><td>9233.33</td><td>49.74</td><td>88.20</td><td>-38.46</td><td>41.49</td><td>8.25</td><td>Peak</td><td>100</td><td>221</td></tr><tr><td>5</td><td>13850.00</td><td>38.62</td><td>68.20</td><td>-29.58</td><td>30.41</td><td>8.21</td><td>Average</td><td>100</td><td>217</td></tr><tr><td>6</td><td>13850.00</td><td>51.16</td><td>88.20</td><td>-37.04</td><td>42.95</td><td>8.21</td><td>Peak</td><td>100</td><td>217</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.86	54.00	-10.14	51.54	-7.68	Average	128	141	2	1000.10	47.96	74.00	-26.04	55.64	-7.68	Peak	128	141	3	9233.33	37.73	68.20	-30.47	29.48	8.25	Average	100	221	4	9233.33	49.74	88.20	-38.46	41.49	8.25	Peak	100	221	5	13850.00	38.62	68.20	-29.58	30.41	8.21	Average	100	217	6	13850.00	51.16	88.20	-37.04	42.95	8.21	Peak	100	217
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	43.86	54.00	-10.14	51.54	-7.68	Average	128	141																																																																
2	1000.10	47.96	74.00	-26.04	55.64	-7.68	Peak	128	141																																																																
3	9233.33	37.73	68.20	-30.47	29.48	8.25	Average	100	221																																																																
4	9233.33	49.74	88.20	-38.46	41.49	8.25	Peak	100	221																																																																
5	13850.00	38.62	68.20	-29.58	30.41	8.21	Average	100	217																																																																
6	13850.00	51.16	88.20	-37.04	42.95	8.21	Peak	100	217																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>40.57</td><td>54.00</td><td>-13.43</td><td>48.25</td><td>-7.68</td><td>Average</td><td>311</td><td>174</td></tr><tr><td>2</td><td>1000.10</td><td>44.43</td><td>74.00</td><td>-29.57</td><td>52.11</td><td>-7.68</td><td>Peak</td><td>311</td><td>174</td></tr><tr><td>3</td><td>9233.33</td><td>35.68</td><td>68.20</td><td>-32.52</td><td>27.43</td><td>8.25</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>4</td><td>9233.33</td><td>47.56</td><td>88.20</td><td>-40.64</td><td>39.31</td><td>8.25</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>5</td><td>13850.00</td><td>38.95</td><td>68.20</td><td>-29.25</td><td>30.74</td><td>8.21</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>6</td><td>13850.00</td><td>50.96</td><td>88.20</td><td>-37.24</td><td>42.75</td><td>8.21</td><td>Peak</td><td>100</td><td>62</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.57	54.00	-13.43	48.25	-7.68	Average	311	174	2	1000.10	44.43	74.00	-29.57	52.11	-7.68	Peak	311	174	3	9233.33	35.68	68.20	-32.52	27.43	8.25	Average	100	49	4	9233.33	47.56	88.20	-40.64	39.31	8.25	Peak	100	49	5	13850.00	38.95	68.20	-29.25	30.74	8.21	Average	100	62	6	13850.00	50.96	88.20	-37.24	42.75	8.21	Peak	100	62
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	40.57	54.00	-13.43	48.25	-7.68	Average	311	174																																																																
2	1000.10	44.43	74.00	-29.57	52.11	-7.68	Peak	311	174																																																																
3	9233.33	35.68	68.20	-32.52	27.43	8.25	Average	100	49																																																																
4	9233.33	47.56	88.20	-40.64	39.31	8.25	Peak	100	49																																																																
5	13850.00	38.95	68.20	-29.25	30.74	8.21	Average	100	62																																																																
6	13850.00	50.96	88.20	-37.24	42.75	8.21	Peak	100	62																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>40.46</td><td>54.00</td><td>-13.54</td><td>48.14</td><td>-7.68</td><td>Average</td><td>311</td><td>177</td></tr><tr><td>2</td><td>1000.10</td><td>44.79</td><td>74.00</td><td>-29.21</td><td>52.47</td><td>-7.68</td><td>Peak</td><td>311</td><td>177</td></tr><tr><td>3</td><td>9340.00</td><td>38.21</td><td>54.00</td><td>-15.79</td><td>29.69</td><td>8.52</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>4</td><td>9340.00</td><td>50.46</td><td>74.00</td><td>-23.54</td><td>41.94</td><td>8.52</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>5</td><td>14010.00</td><td>39.14</td><td>68.20</td><td>-29.06</td><td>30.48</td><td>8.66</td><td>Average</td><td>100</td><td>81</td></tr><tr><td>6</td><td>14010.00</td><td>50.85</td><td>88.20</td><td>-37.35</td><td>42.19</td><td>8.66</td><td>Peak</td><td>100</td><td>81</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.46	54.00	-13.54	48.14	-7.68	Average	311	177	2	1000.10	44.79	74.00	-29.21	52.47	-7.68	Peak	311	177	3	9340.00	38.21	54.00	-15.79	29.69	8.52	Average	100	61	4	9340.00	50.46	74.00	-23.54	41.94	8.52	Peak	100	61	5	14010.00	39.14	68.20	-29.06	30.48	8.66	Average	100	81	6	14010.00	50.85	88.20	-37.35	42.19	8.66	Peak	100	81
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	40.46	54.00	-13.54	48.14	-7.68	Average	311	177																																																																
2	1000.10	44.79	74.00	-29.21	52.47	-7.68	Peak	311	177																																																																
3	9340.00	38.21	54.00	-15.79	29.69	8.52	Average	100	61																																																																
4	9340.00	50.46	74.00	-23.54	41.94	8.52	Peak	100	61																																																																
5	14010.00	39.14	68.20	-29.06	30.48	8.66	Average	100	81																																																																
6	14010.00	50.85	88.20	-37.35	42.19	8.66	Peak	100	81																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			

Unwanted Emissions (Above 1GHz) for be EHT80-OFDMA

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.10</td><td>40.81</td><td>54.00</td><td>-13.19</td><td>48.49</td><td>-7.68</td><td>Average</td><td>311</td><td>173</td></tr><tr><td>2</td><td>1000.10</td><td>45.17</td><td>74.00</td><td>-28.83</td><td>52.85</td><td>-7.68</td><td>Peak</td><td>311</td><td>173</td></tr><tr><td>3</td><td>7980.00</td><td>36.49</td><td>68.20</td><td>-31.71</td><td>29.54</td><td>6.95</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>4</td><td>7980.00</td><td>48.59</td><td>88.20</td><td>-39.61</td><td>41.64</td><td>6.95</td><td>Peak</td><td>100</td><td>68</td></tr><tr><td>5</td><td>11970.00</td><td>38.87</td><td>54.00</td><td>-15.13</td><td>30.75</td><td>8.12</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>6</td><td>11970.00</td><td>50.32</td><td>74.00</td><td>-23.68</td><td>42.20</td><td>8.12</td><td>Peak</td><td>100</td><td>77</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.81	54.00	-13.19	48.49	-7.68	Average	311	173	2	1000.10	45.17	74.00	-28.83	52.85	-7.68	Peak	311	173	3	7980.00	36.49	68.20	-31.71	29.54	6.95	Average	100	68	4	7980.00	48.59	88.20	-39.61	41.64	6.95	Peak	100	68	5	11970.00	38.87	54.00	-15.13	30.75	8.12	Average	100	77	6	11970.00	50.32	74.00	-23.68	42.20	8.12	Peak	100	77
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	40.81	54.00	-13.19	48.49	-7.68	Average	311	173																																																																
2	1000.10	45.17	74.00	-28.83	52.85	-7.68	Peak	311	173																																																																
3	7980.00	36.49	68.20	-31.71	29.54	6.95	Average	100	68																																																																
4	7980.00	48.59	88.20	-39.61	41.64	6.95	Peak	100	68																																																																
5	11970.00	38.87	54.00	-15.13	30.75	8.12	Average	100	77																																																																
6	11970.00	50.32	74.00	-23.68	42.20	8.12	Peak	100	77																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>40.47</td><td>54.00</td><td>-13.53</td><td>48.15</td><td>-7.68</td><td>Average</td><td>311</td><td>174</td></tr><tr><td>2</td><td>1000.10</td><td>44.51</td><td>74.00</td><td>-29.49</td><td>52.19</td><td>-7.68</td><td>Peak</td><td>311</td><td>174</td></tr><tr><td>3</td><td>8193.33</td><td>36.23</td><td>54.00</td><td>-17.77</td><td>29.46</td><td>6.77</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>4</td><td>8193.33</td><td>47.95</td><td>74.00</td><td>-26.05</td><td>41.18</td><td>6.77</td><td>Peak</td><td>100</td><td>63</td></tr><tr><td>5</td><td>12290.00</td><td>38.54</td><td>54.00</td><td>-15.46</td><td>30.47</td><td>8.07</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>6</td><td>12290.00</td><td>50.25</td><td>74.00</td><td>-23.75</td><td>42.18</td><td>8.07</td><td>Peak</td><td>100</td><td>55</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.47	54.00	-13.53	48.15	-7.68	Average	311	174	2	1000.10	44.51	74.00	-29.49	52.19	-7.68	Peak	311	174	3	8193.33	36.23	54.00	-17.77	29.46	6.77	Average	100	63	4	8193.33	47.95	74.00	-26.05	41.18	6.77	Peak	100	63	5	12290.00	38.54	54.00	-15.46	30.47	8.07	Average	100	55	6	12290.00	50.25	74.00	-23.75	42.18	8.07	Peak	100	55
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	40.47	54.00	-13.53	48.15	-7.68	Average	311	174																																																																
2	1000.10	44.51	74.00	-29.49	52.19	-7.68	Peak	311	174																																																																
3	8193.33	36.23	54.00	-17.77	29.46	6.77	Average	100	63																																																																
4	8193.33	47.95	74.00	-26.05	41.18	6.77	Peak	100	63																																																																
5	12290.00	38.54	54.00	-15.46	30.47	8.07	Average	100	55																																																																
6	12290.00	50.25	74.00	-23.75	42.18	8.07	Peak	100	55																																																																



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6385																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.10</td><td>43.60</td><td>54.00</td><td>-10.40</td><td>51.28</td><td>-7.68</td><td>Average</td><td>128</td><td>144</td></tr><tr><td>2</td><td>1000.10</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>55.19</td><td>-7.68</td><td>Peak</td><td>128</td><td>144</td></tr><tr><td>3</td><td>8513.33</td><td>36.13</td><td>68.20</td><td>-32.07</td><td>29.41</td><td>6.72</td><td>Average</td><td>100</td><td>263</td></tr><tr><td>4</td><td>8513.33</td><td>48.10</td><td>88.20</td><td>-40.10</td><td>41.38</td><td>6.72</td><td>Peak</td><td>100</td><td>263</td></tr><tr><td>5</td><td>12770.00</td><td>38.56</td><td>68.20</td><td>-29.64</td><td>30.64</td><td>7.92</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>6</td><td>12770.00</td><td>50.59</td><td>88.20</td><td>-37.61</td><td>42.67</td><td>7.92</td><td>Peak</td><td>100</td><td>244</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.60	54.00	-10.40	51.28	-7.68	Average	128	144	2	1000.10	47.51	74.00	-26.49	55.19	-7.68	Peak	128	144	3	8513.33	36.13	68.20	-32.07	29.41	6.72	Average	100	263	4	8513.33	48.10	88.20	-40.10	41.38	6.72	Peak	100	263	5	12770.00	38.56	68.20	-29.64	30.64	7.92	Average	100	244	6	12770.00	50.59	88.20	-37.61	42.67	7.92	Peak	100	244
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	43.60	54.00	-10.40	51.28	-7.68	Average	128	144																																																																
2	1000.10	47.51	74.00	-26.49	55.19	-7.68	Peak	128	144																																																																
3	8513.33	36.13	68.20	-32.07	29.41	6.72	Average	100	263																																																																
4	8513.33	48.10	88.20	-40.10	41.38	6.72	Peak	100	263																																																																
5	12770.00	38.56	68.20	-29.64	30.64	7.92	Average	100	244																																																																
6	12770.00	50.59	88.20	-37.61	42.67	7.92	Peak	100	244																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6385
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6465
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6465
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>43.93</td><td>54.00</td><td>-10.07</td><td>51.61</td><td>-7.68</td><td>Average</td><td>128</td><td>143</td></tr><tr><td>2</td><td>1000.10</td><td>48.26</td><td>74.00</td><td>-25.74</td><td>55.94</td><td>-7.68</td><td>Peak</td><td>128</td><td>143</td></tr><tr><td>3</td><td>8833.33</td><td>37.04</td><td>68.20</td><td>-31.16</td><td>29.46</td><td>7.58</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>4</td><td>8833.33</td><td>48.95</td><td>88.20</td><td>-39.25</td><td>41.37</td><td>7.58</td><td>Peak</td><td>100</td><td>254</td></tr><tr><td>5</td><td>13250.00</td><td>38.14</td><td>54.00</td><td>-15.86</td><td>30.18</td><td>7.96</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>6</td><td>13250.00</td><td>50.90</td><td>74.00</td><td>-23.10</td><td>42.94</td><td>7.96</td><td>Peak</td><td>100</td><td>278</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.93	54.00	-10.07	51.61	-7.68	Average	128	143	2	1000.10	48.26	74.00	-25.74	55.94	-7.68	Peak	128	143	3	8833.33	37.04	68.20	-31.16	29.46	7.58	Average	100	254	4	8833.33	48.95	88.20	-39.25	41.37	7.58	Peak	100	254	5	13250.00	38.14	54.00	-15.86	30.18	7.96	Average	100	278	6	13250.00	50.90	74.00	-23.10	42.94	7.96	Peak	100	278
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	43.93	54.00	-10.07	51.61	-7.68	Average	128	143																																																																
2	1000.10	48.26	74.00	-25.74	55.94	-7.68	Peak	128	143																																																																
3	8833.33	37.04	68.20	-31.16	29.46	7.58	Average	100	254																																																																
4	8833.33	48.95	88.20	-39.25	41.37	7.58	Peak	100	254																																																																
5	13250.00	38.14	54.00	-15.86	30.18	7.96	Average	100	278																																																																
6	13250.00	50.90	74.00	-23.10	42.94	7.96	Peak	100	278																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>40.59</td><td>54.00</td><td>-13.41</td><td>48.27</td><td>-7.68</td><td>Average</td><td>311</td><td>178</td></tr><tr><td>2</td><td>1000.10</td><td>44.99</td><td>74.00</td><td>-29.01</td><td>52.67</td><td>-7.68</td><td>Peak</td><td>311</td><td>178</td></tr><tr><td>3</td><td>8940.00</td><td>36.93</td><td>68.20</td><td>-31.27</td><td>29.65</td><td>7.28</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>4</td><td>8940.00</td><td>49.26</td><td>88.20</td><td>-38.94</td><td>41.98</td><td>7.28</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>5</td><td>13410.00</td><td>38.98</td><td>68.20</td><td>-29.22</td><td>30.74</td><td>8.24</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>6</td><td>13410.00</td><td>50.98</td><td>88.20</td><td>-37.22</td><td>42.74</td><td>8.24</td><td>Peak</td><td>100</td><td>79</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.59	54.00	-13.41	48.27	-7.68	Average	311	178	2	1000.10	44.99	74.00	-29.01	52.67	-7.68	Peak	311	178	3	8940.00	36.93	68.20	-31.27	29.65	7.28	Average	100	65	4	8940.00	49.26	88.20	-38.94	41.98	7.28	Peak	100	65	5	13410.00	38.98	68.20	-29.22	30.74	8.24	Average	100	79	6	13410.00	50.98	88.20	-37.22	42.74	8.24	Peak	100	79
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	40.59	54.00	-13.41	48.27	-7.68	Average	311	178																																																																
2	1000.10	44.99	74.00	-29.01	52.67	-7.68	Peak	311	178																																																																
3	8940.00	36.93	68.20	-31.27	29.65	7.28	Average	100	65																																																																
4	8940.00	49.26	88.20	-38.94	41.98	7.28	Peak	100	65																																																																
5	13410.00	38.98	68.20	-29.22	30.74	8.24	Average	100	79																																																																
6	13410.00	50.98	88.20	-37.22	42.74	8.24	Peak	100	79																																																																



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6865
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6865																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>40.59</td><td>54.00</td><td>-13.41</td><td>48.27</td><td>-7.68</td><td>Average</td><td>311</td><td>177</td></tr><tr><td>2</td><td>1000.10</td><td>44.80</td><td>74.00</td><td>-29.20</td><td>52.48</td><td>-7.68</td><td>Peak</td><td>311</td><td>177</td></tr><tr><td>3</td><td>9153.33</td><td>37.68</td><td>54.00</td><td>-16.32</td><td>29.75</td><td>7.93</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>4</td><td>9153.33</td><td>49.66</td><td>74.00</td><td>-24.34</td><td>41.73</td><td>7.93</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>5</td><td>13730.00</td><td>38.49</td><td>68.20</td><td>-29.71</td><td>30.25</td><td>8.24</td><td>Average</td><td>100</td><td>89</td></tr><tr><td>6</td><td>13730.00</td><td>50.91</td><td>88.20</td><td>-37.29</td><td>42.67</td><td>8.24</td><td>Peak</td><td>100</td><td>89</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.59	54.00	-13.41	48.27	-7.68	Average	311	177	2	1000.10	44.80	74.00	-29.20	52.48	-7.68	Peak	311	177	3	9153.33	37.68	54.00	-16.32	29.75	7.93	Average	100	67	4	9153.33	49.66	74.00	-24.34	41.73	7.93	Peak	100	67	5	13730.00	38.49	68.20	-29.71	30.25	8.24	Average	100	89	6	13730.00	50.91	88.20	-37.29	42.67	8.24	Peak	100	89
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	40.59	54.00	-13.41	48.27	-7.68	Average	311	177																																																																
2	1000.10	44.80	74.00	-29.20	52.48	-7.68	Peak	311	177																																																																
3	9153.33	37.68	54.00	-16.32	29.75	7.93	Average	100	67																																																																
4	9153.33	49.66	74.00	-24.34	41.73	7.93	Peak	100	67																																																																
5	13730.00	38.49	68.20	-29.71	30.25	8.24	Average	100	89																																																																
6	13730.00	50.91	88.20	-37.29	42.67	8.24	Peak	100	89																																																																



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>40.69</td><td>54.00</td><td>-13.31</td><td>48.37</td><td>-7.68</td><td>Average</td><td>311</td><td>174</td></tr><tr><td>2</td><td>1000.10</td><td>44.81</td><td>74.00</td><td>-29.19</td><td>52.49</td><td>-7.68</td><td>Peak</td><td>311</td><td>174</td></tr><tr><td>3</td><td>9260.00</td><td>37.73</td><td>68.20</td><td>-30.47</td><td>29.37</td><td>8.36</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>4</td><td>9260.00</td><td>49.84</td><td>88.20</td><td>-38.36</td><td>41.48</td><td>8.36</td><td>Peak</td><td>100</td><td>63</td></tr><tr><td>5</td><td>13890.00</td><td>38.87</td><td>68.20</td><td>-29.33</td><td>30.47</td><td>8.40</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>6</td><td>13890.00</td><td>51.03</td><td>88.20</td><td>-37.17</td><td>42.63</td><td>8.40</td><td>Peak</td><td>100</td><td>77</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.69	54.00	-13.31	48.37	-7.68	Average	311	174	2	1000.10	44.81	74.00	-29.19	52.49	-7.68	Peak	311	174	3	9260.00	37.73	68.20	-30.47	29.37	8.36	Average	100	63	4	9260.00	49.84	88.20	-38.36	41.48	8.36	Peak	100	63	5	13890.00	38.87	68.20	-29.33	30.47	8.40	Average	100	77	6	13890.00	51.03	88.20	-37.17	42.63	8.40	Peak	100	77
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	40.69	54.00	-13.31	48.37	-7.68	Average	311	174																																																																
2	1000.10	44.81	74.00	-29.19	52.49	-7.68	Peak	311	174																																																																
3	9260.00	37.73	68.20	-30.47	29.37	8.36	Average	100	63																																																																
4	9260.00	49.84	88.20	-38.36	41.48	8.36	Peak	100	63																																																																
5	13890.00	38.87	68.20	-29.33	30.47	8.40	Average	100	77																																																																
6	13890.00	51.03	88.20	-37.17	42.63	8.40	Peak	100	77																																																																



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.10</td><td>40.69</td><td>54.00</td><td>-13.31</td><td>48.37</td><td>-7.68</td><td>Average</td><td>311</td><td>177</td></tr><tr><td>2</td><td>1000.10</td><td>44.96</td><td>74.00</td><td>-29.04</td><td>52.64</td><td>-7.68</td><td>Peak</td><td>311</td><td>177</td></tr><tr><td>3</td><td>9366.67</td><td>38.48</td><td>54.00</td><td>-15.52</td><td>29.96</td><td>8.52</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>4</td><td>9366.67</td><td>50.24</td><td>74.00</td><td>-23.76</td><td>41.72</td><td>8.52</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>5</td><td>14050.00</td><td>39.10</td><td>68.20</td><td>-29.10</td><td>30.37</td><td>8.73</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>6</td><td>14050.00</td><td>51.70</td><td>88.20</td><td>-36.50</td><td>42.97</td><td>8.73</td><td>Peak</td><td>100</td><td>71</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.69	54.00	-13.31	48.37	-7.68	Average	311	177	2	1000.10	44.96	74.00	-29.04	52.64	-7.68	Peak	311	177	3	9366.67	38.48	54.00	-15.52	29.96	8.52	Average	100	66	4	9366.67	50.24	74.00	-23.76	41.72	8.52	Peak	100	66	5	14050.00	39.10	68.20	-29.10	30.37	8.73	Average	100	71	6	14050.00	51.70	88.20	-36.50	42.97	8.73	Peak	100	71
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	40.69	54.00	-13.31	48.37	-7.68	Average	311	177																																																																
2	1000.10	44.96	74.00	-29.04	52.64	-7.68	Peak	311	177																																																																
3	9366.67	38.48	54.00	-15.52	29.96	8.52	Average	100	66																																																																
4	9366.67	50.24	74.00	-23.76	41.72	8.52	Peak	100	66																																																																
5	14050.00	39.10	68.20	-29.10	30.37	8.73	Average	100	71																																																																
6	14050.00	51.70	88.20	-36.50	42.97	8.73	Peak	100	71																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Unwanted Emissions (Above 1GHz) for be EHT160-OFDMA

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>44.05</td><td>54.00</td><td>-9.95</td><td>51.73</td><td>-7.68</td><td>Average</td><td>128</td><td>141</td></tr><tr><td>2</td><td>1000.10</td><td>47.69</td><td>74.00</td><td>-26.31</td><td>55.37</td><td>-7.68</td><td>Peak</td><td>128</td><td>141</td></tr><tr><td>3</td><td>8033.33</td><td>36.72</td><td>54.00</td><td>-17.28</td><td>29.67</td><td>7.05</td><td>Average</td><td>100</td><td>264</td></tr><tr><td>4</td><td>8033.33</td><td>48.87</td><td>74.00</td><td>-25.13</td><td>41.82</td><td>7.05</td><td>Peak</td><td>100</td><td>264</td></tr><tr><td>5</td><td>12050.00</td><td>39.01</td><td>54.00</td><td>-14.99</td><td>30.74</td><td>8.27</td><td>Average</td><td>100</td><td>277</td></tr><tr><td>6</td><td>12050.00</td><td>50.90</td><td>74.00</td><td>-23.10</td><td>42.63</td><td>8.27</td><td>Peak</td><td>100</td><td>277</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	44.05	54.00	-9.95	51.73	-7.68	Average	128	141	2	1000.10	47.69	74.00	-26.31	55.37	-7.68	Peak	128	141	3	8033.33	36.72	54.00	-17.28	29.67	7.05	Average	100	264	4	8033.33	48.87	74.00	-25.13	41.82	7.05	Peak	100	264	5	12050.00	39.01	54.00	-14.99	30.74	8.27	Average	100	277	6	12050.00	50.90	74.00	-23.10	42.63	8.27	Peak	100	277
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	44.05	54.00	-9.95	51.73	-7.68	Average	128	141																																																																
2	1000.10	47.69	74.00	-26.31	55.37	-7.68	Peak	128	141																																																																
3	8033.33	36.72	54.00	-17.28	29.67	7.05	Average	100	264																																																																
4	8033.33	48.87	74.00	-25.13	41.82	7.05	Peak	100	264																																																																
5	12050.00	39.01	54.00	-14.99	30.74	8.27	Average	100	277																																																																
6	12050.00	50.90	74.00	-23.10	42.63	8.27	Peak	100	277																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>43.73</td><td>54.00</td><td>-10.27</td><td>51.41</td><td>-7.68</td><td>Average</td><td>128</td><td>142</td></tr><tr><td>2</td><td>1000.10</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>55.42</td><td>-7.68</td><td>Peak</td><td>128</td><td>142</td></tr><tr><td>3</td><td>8460.00</td><td>35.95</td><td>54.00</td><td>-18.05</td><td>29.47</td><td>6.48</td><td>Average</td><td>100</td><td>207</td></tr><tr><td>4</td><td>8460.00</td><td>48.30</td><td>74.00</td><td>-25.70</td><td>41.82</td><td>6.48</td><td>Peak</td><td>100</td><td>207</td></tr><tr><td>5</td><td>12690.00</td><td>38.14</td><td>54.00</td><td>-15.86</td><td>30.32</td><td>7.82</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>6</td><td>12690.00</td><td>50.66</td><td>74.00</td><td>-23.34</td><td>42.84</td><td>7.82</td><td>Peak</td><td>100</td><td>227</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.73	54.00	-10.27	51.41	-7.68	Average	128	142	2	1000.10	47.74	74.00	-26.26	55.42	-7.68	Peak	128	142	3	8460.00	35.95	54.00	-18.05	29.47	6.48	Average	100	207	4	8460.00	48.30	74.00	-25.70	41.82	6.48	Peak	100	207	5	12690.00	38.14	54.00	-15.86	30.32	7.82	Average	100	227	6	12690.00	50.66	74.00	-23.34	42.84	7.82	Peak	100	227
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	43.73	54.00	-10.27	51.41	-7.68	Average	128	142																																																																
2	1000.10	47.74	74.00	-26.26	55.42	-7.68	Peak	128	142																																																																
3	8460.00	35.95	54.00	-18.05	29.47	6.48	Average	100	207																																																																
4	8460.00	48.30	74.00	-25.70	41.82	6.48	Peak	100	207																																																																
5	12690.00	38.14	54.00	-15.86	30.32	7.82	Average	100	227																																																																
6	12690.00	50.66	74.00	-23.34	42.84	7.82	Peak	100	227																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>41.17</td><td>54.00</td><td>-12.83</td><td>48.85</td><td>-7.68</td><td>Average</td><td>311</td><td>177</td></tr><tr><td>2</td><td>1000.10</td><td>45.15</td><td>74.00</td><td>-28.85</td><td>52.83</td><td>-7.68</td><td>Peak</td><td>311</td><td>177</td></tr><tr><td>3</td><td>8460.00</td><td>35.95</td><td>54.00</td><td>-18.05</td><td>29.47</td><td>6.48</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>4</td><td>8460.00</td><td>48.34</td><td>74.00</td><td>-25.66</td><td>41.86</td><td>6.48</td><td>Peak</td><td>100</td><td>62</td></tr><tr><td>5</td><td>12690.00</td><td>38.57</td><td>54.00</td><td>-15.43</td><td>30.75</td><td>7.82</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>6</td><td>12690.00</td><td>50.20</td><td>74.00</td><td>-23.80</td><td>42.38</td><td>7.82</td><td>Peak</td><td>100</td><td>72</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	41.17	54.00	-12.83	48.85	-7.68	Average	311	177	2	1000.10	45.15	74.00	-28.85	52.83	-7.68	Peak	311	177	3	8460.00	35.95	54.00	-18.05	29.47	6.48	Average	100	62	4	8460.00	48.34	74.00	-25.66	41.86	6.48	Peak	100	62	5	12690.00	38.57	54.00	-15.43	30.75	7.82	Average	100	72	6	12690.00	50.20	74.00	-23.80	42.38	7.82	Peak	100	72
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	41.17	54.00	-12.83	48.85	-7.68	Average	311	177																																																																
2	1000.10	45.15	74.00	-28.85	52.83	-7.68	Peak	311	177																																																																
3	8460.00	35.95	54.00	-18.05	29.47	6.48	Average	100	62																																																																
4	8460.00	48.34	74.00	-25.66	41.86	6.48	Peak	100	62																																																																
5	12690.00	38.57	54.00	-15.43	30.75	7.82	Average	100	72																																																																
6	12690.00	50.20	74.00	-23.80	42.38	7.82	Peak	100	72																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.10</td><td>40.73</td><td>54.00</td><td>-13.27</td><td>48.41</td><td>-7.68</td><td>Average</td><td>311</td><td>175</td></tr><tr><td>2</td><td>1000.10</td><td>44.66</td><td>74.00</td><td>-29.34</td><td>52.34</td><td>-7.68</td><td>Peak</td><td>311</td><td>175</td></tr><tr><td>3</td><td>8673.33</td><td>36.58</td><td>68.20</td><td>-31.62</td><td>29.34</td><td>7.24</td><td>Average</td><td>100</td><td>81</td></tr><tr><td>4</td><td>8673.33</td><td>48.62</td><td>88.20</td><td>-39.58</td><td>41.38</td><td>7.24</td><td>Peak</td><td>100</td><td>81</td></tr><tr><td>5</td><td>13010.00</td><td>39.07</td><td>68.20</td><td>-29.13</td><td>30.97</td><td>8.10</td><td>Average</td><td>100</td><td>74</td></tr><tr><td>6</td><td>13010.00</td><td>50.77</td><td>88.20</td><td>-37.43</td><td>42.67</td><td>8.10</td><td>Peak</td><td>100</td><td>74</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.73	54.00	-13.27	48.41	-7.68	Average	311	175	2	1000.10	44.66	74.00	-29.34	52.34	-7.68	Peak	311	175	3	8673.33	36.58	68.20	-31.62	29.34	7.24	Average	100	81	4	8673.33	48.62	88.20	-39.58	41.38	7.24	Peak	100	81	5	13010.00	39.07	68.20	-29.13	30.97	8.10	Average	100	74	6	13010.00	50.77	88.20	-37.43	42.67	8.10	Peak	100	74
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	40.73	54.00	-13.27	48.41	-7.68	Average	311	175																																																																
2	1000.10	44.66	74.00	-29.34	52.34	-7.68	Peak	311	175																																																																
3	8673.33	36.58	68.20	-31.62	29.34	7.24	Average	100	81																																																																
4	8673.33	48.62	88.20	-39.58	41.38	7.24	Peak	100	81																																																																
5	13010.00	39.07	68.20	-29.13	30.97	8.10	Average	100	74																																																																
6	13010.00	50.77	88.20	-37.43	42.67	8.10	Peak	100	74																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>48.36</td><td>-7.68</td><td>Average</td><td>311</td><td>177</td></tr><tr><td>2</td><td>1000.10</td><td>44.64</td><td>74.00</td><td>-29.36</td><td>52.32</td><td>-7.68</td><td>Peak</td><td>311</td><td>177</td></tr><tr><td>3</td><td>8886.67</td><td>37.17</td><td>68.20</td><td>-31.03</td><td>29.66</td><td>7.51</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>4</td><td>8886.67</td><td>49.13</td><td>88.20</td><td>-39.07</td><td>41.62</td><td>7.51</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>5</td><td>13330.00</td><td>38.57</td><td>54.00</td><td>-15.43</td><td>30.41</td><td>8.16</td><td>Average</td><td>100</td><td>75</td></tr><tr><td>6</td><td>13330.00</td><td>50.47</td><td>74.00</td><td>-23.53</td><td>42.31</td><td>8.16</td><td>Peak</td><td>100</td><td>75</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.68	54.00	-13.32	48.36	-7.68	Average	311	177	2	1000.10	44.64	74.00	-29.36	52.32	-7.68	Peak	311	177	3	8886.67	37.17	68.20	-31.03	29.66	7.51	Average	100	61	4	8886.67	49.13	88.20	-39.07	41.62	7.51	Peak	100	61	5	13330.00	38.57	54.00	-15.43	30.41	8.16	Average	100	75	6	13330.00	50.47	74.00	-23.53	42.31	8.16	Peak	100	75
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	40.68	54.00	-13.32	48.36	-7.68	Average	311	177																																																																
2	1000.10	44.64	74.00	-29.36	52.32	-7.68	Peak	311	177																																																																
3	8886.67	37.17	68.20	-31.03	29.66	7.51	Average	100	61																																																																
4	8886.67	49.13	88.20	-39.07	41.62	7.51	Peak	100	61																																																																
5	13330.00	38.57	54.00	-15.43	30.41	8.16	Average	100	75																																																																
6	13330.00	50.47	74.00	-23.53	42.31	8.16	Peak	100	75																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6825
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6825
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			

Unwanted Emissions (Above 1GHz) for be EHT320-OFDMA

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			

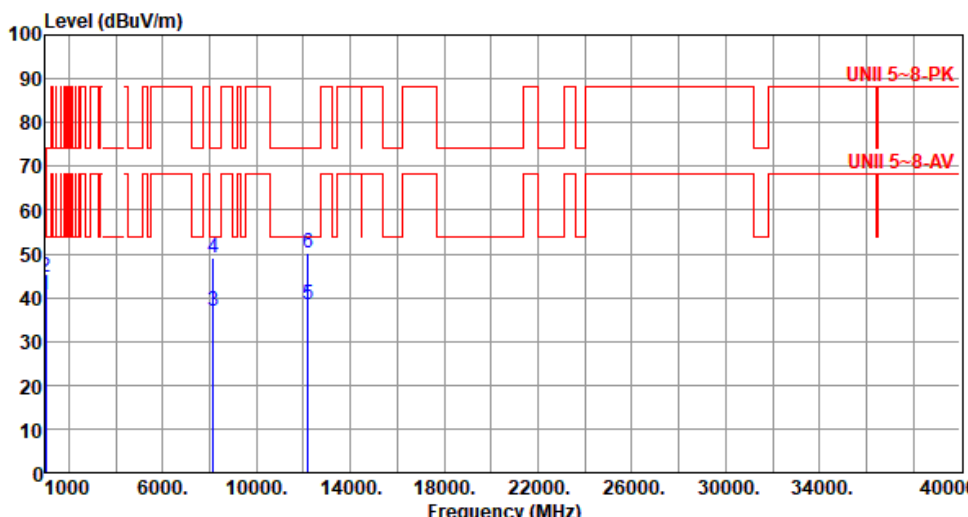

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>48.45</td><td>-7.68</td><td>Average</td><td>311</td><td>177</td></tr><tr><td>2</td><td>1000.10</td><td>44.69</td><td>74.00</td><td>-29.31</td><td>52.37</td><td>-7.68</td><td>Peak</td><td>311</td><td>177</td></tr><tr><td>3</td><td>8140.00</td><td>36.73</td><td>54.00</td><td>-17.27</td><td>29.77</td><td>6.96</td><td>Average</td><td>100</td><td>82</td></tr><tr><td>4</td><td>8140.00</td><td>48.92</td><td>74.00</td><td>-25.08</td><td>41.96</td><td>6.96</td><td>Peak</td><td>100</td><td>82</td></tr><tr><td>5</td><td>12210.00</td><td>38.43</td><td>54.00</td><td>-15.57</td><td>30.33</td><td>8.10</td><td>Average</td><td>100</td><td>99</td></tr><tr><td>6</td><td>12210.00</td><td>50.29</td><td>74.00</td><td>-23.71</td><td>42.19</td><td>8.10</td><td>Peak</td><td>100</td><td>99</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.77	54.00	-13.23	48.45	-7.68	Average	311	177	2	1000.10	44.69	74.00	-29.31	52.37	-7.68	Peak	311	177	3	8140.00	36.73	54.00	-17.27	29.77	6.96	Average	100	82	4	8140.00	48.92	74.00	-25.08	41.96	6.96	Peak	100	82	5	12210.00	38.43	54.00	-15.57	30.33	8.10	Average	100	99	6	12210.00	50.29	74.00	-23.71	42.19	8.10	Peak	100	99
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	40.77	54.00	-13.23	48.45	-7.68	Average	311	177																																																																
2	1000.10	44.69	74.00	-29.31	52.37	-7.68	Peak	311	177																																																																
3	8140.00	36.73	54.00	-17.27	29.77	6.96	Average	100	82																																																																
4	8140.00	48.92	74.00	-25.08	41.96	6.96	Peak	100	82																																																																
5	12210.00	38.43	54.00	-15.57	30.33	8.10	Average	100	99																																																																
6	12210.00	50.29	74.00	-23.71	42.19	8.10	Peak	100	99																																																																



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6265																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>43.73</td><td>54.00</td><td>-10.27</td><td>51.41</td><td>-7.68</td><td>Average</td><td>128</td><td>142</td></tr><tr><td>2</td><td>1000.10</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>55.49</td><td>-7.68</td><td>Peak</td><td>128</td><td>142</td></tr><tr><td>3</td><td>8353.33</td><td>36.91</td><td>54.00</td><td>-17.09</td><td>30.57</td><td>6.34</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>4</td><td>8353.33</td><td>47.10</td><td>74.00</td><td>-26.90</td><td>40.76</td><td>6.34</td><td>Peak</td><td>100</td><td>161</td></tr><tr><td>5</td><td>12530.00</td><td>38.28</td><td>54.00</td><td>-15.72</td><td>30.70</td><td>7.58</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>6</td><td>12530.00</td><td>48.33</td><td>74.00</td><td>-25.67</td><td>40.75</td><td>7.58</td><td>Peak</td><td>100</td><td>155</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.73	54.00	-10.27	51.41	-7.68	Average	128	142	2	1000.10	47.81	74.00	-26.19	55.49	-7.68	Peak	128	142	3	8353.33	36.91	54.00	-17.09	30.57	6.34	Average	100	161	4	8353.33	47.10	74.00	-26.90	40.76	6.34	Peak	100	161	5	12530.00	38.28	54.00	-15.72	30.70	7.58	Average	100	155	6	12530.00	48.33	74.00	-25.67	40.75	7.58	Peak	100	155
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	43.73	54.00	-10.27	51.41	-7.68	Average	128	142																																																																
2	1000.10	47.81	74.00	-26.19	55.49	-7.68	Peak	128	142																																																																
3	8353.33	36.91	54.00	-17.09	30.57	6.34	Average	100	161																																																																
4	8353.33	47.10	74.00	-26.90	40.76	6.34	Peak	100	161																																																																
5	12530.00	38.28	54.00	-15.72	30.70	7.58	Average	100	155																																																																
6	12530.00	48.33	74.00	-25.67	40.75	7.58	Peak	100	155																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6265
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6425																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>43.80</td><td>54.00</td><td>-10.20</td><td>51.48</td><td>-7.68</td><td>Average</td><td>128</td><td>140</td></tr><tr><td>2</td><td>1000.10</td><td>47.44</td><td>74.00</td><td>-26.56</td><td>55.12</td><td>-7.68</td><td>Peak</td><td>128</td><td>140</td></tr><tr><td>3</td><td>8566.67</td><td>36.41</td><td>68.20</td><td>-31.79</td><td>29.41</td><td>7.00</td><td>Average</td><td>100</td><td>250</td></tr><tr><td>4</td><td>8566.67</td><td>48.15</td><td>88.20</td><td>-40.05</td><td>41.15</td><td>7.00</td><td>Peak</td><td>100</td><td>250</td></tr><tr><td>5</td><td>12850.00</td><td>38.85</td><td>68.20</td><td>-29.35</td><td>30.58</td><td>8.27</td><td>Average</td><td>100</td><td>256</td></tr><tr><td>6</td><td>12850.00</td><td>50.89</td><td>88.20</td><td>-37.31</td><td>42.62</td><td>8.27</td><td>Peak</td><td>100</td><td>256</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.80	54.00	-10.20	51.48	-7.68	Average	128	140	2	1000.10	47.44	74.00	-26.56	55.12	-7.68	Peak	128	140	3	8566.67	36.41	68.20	-31.79	29.41	7.00	Average	100	250	4	8566.67	48.15	88.20	-40.05	41.15	7.00	Peak	100	250	5	12850.00	38.85	68.20	-29.35	30.58	8.27	Average	100	256	6	12850.00	50.89	88.20	-37.31	42.62	8.27	Peak	100	256
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	43.80	54.00	-10.20	51.48	-7.68	Average	128	140																																																																
2	1000.10	47.44	74.00	-26.56	55.12	-7.68	Peak	128	140																																																																
3	8566.67	36.41	68.20	-31.79	29.41	7.00	Average	100	250																																																																
4	8566.67	48.15	88.20	-40.05	41.15	7.00	Peak	100	250																																																																
5	12850.00	38.85	68.20	-29.35	30.58	8.27	Average	100	256																																																																
6	12850.00	50.89	88.20	-37.31	42.62	8.27	Peak	100	256																																																																



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6425																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>40.44</td><td>54.00</td><td>-13.56</td><td>48.12</td><td>-7.68</td><td>Average</td><td>311</td><td>178</td></tr><tr><td>2</td><td>1000.10</td><td>44.69</td><td>74.00</td><td>-29.31</td><td>52.37</td><td>-7.68</td><td>Peak</td><td>311</td><td>178</td></tr><tr><td>3</td><td>8566.67</td><td>36.45</td><td>68.20</td><td>-31.75</td><td>29.45</td><td>7.00</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>4</td><td>8566.67</td><td>48.28</td><td>88.20</td><td>-39.92</td><td>41.28</td><td>7.00</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>5</td><td>12850.00</td><td>38.55</td><td>68.20</td><td>-29.65</td><td>30.28</td><td>8.27</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>6</td><td>12850.00</td><td>51.10</td><td>88.20</td><td>-37.10</td><td>42.83</td><td>8.27</td><td>Peak</td><td>100</td><td>72</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.44	54.00	-13.56	48.12	-7.68	Average	311	178	2	1000.10	44.69	74.00	-29.31	52.37	-7.68	Peak	311	178	3	8566.67	36.45	68.20	-31.75	29.45	7.00	Average	100	61	4	8566.67	48.28	88.20	-39.92	41.28	7.00	Peak	100	61	5	12850.00	38.55	68.20	-29.65	30.28	8.27	Average	100	72	6	12850.00	51.10	88.20	-37.10	42.83	8.27	Peak	100	72
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.10	40.44	54.00	-13.56	48.12	-7.68	Average	311	178																																																																
2	1000.10	44.69	74.00	-29.31	52.37	-7.68	Peak	311	178																																																																
3	8566.67	36.45	68.20	-31.75	29.45	7.00	Average	100	61																																																																
4	8566.67	48.28	88.20	-39.92	41.28	7.00	Peak	100	61																																																																
5	12850.00	38.55	68.20	-29.65	30.28	8.27	Average	100	72																																																																
6	12850.00	51.10	88.20	-37.10	42.83	8.27	Peak	100	72																																																																



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			

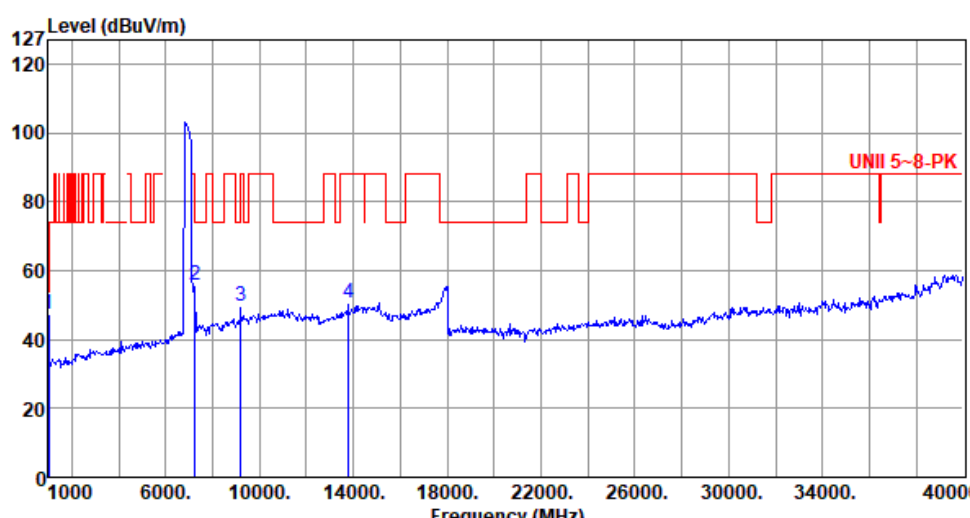

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905																																																		
Polarization	Horizontal-Peak Value																																																				
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>47.56</td><td>74.00</td><td>-26.44</td><td>55.24</td><td>-7.68</td><td>Peak</td><td>128</td><td>139</td></tr><tr><td>2</td><td>7250.00</td><td>55.93</td><td>74.00</td><td>-18.07</td><td>49.60</td><td>6.33</td><td>Peak</td><td>225</td><td>169</td></tr><tr><td>3</td><td>9206.67</td><td>49.54</td><td>88.20</td><td>-38.66</td><td>41.39</td><td>8.15</td><td>Peak</td><td>100</td><td>223</td></tr><tr><td>4</td><td>13810.00</td><td>50.66</td><td>88.20</td><td>-37.54</td><td>42.40</td><td>8.26</td><td>Peak</td><td>100</td><td>278</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	47.56	74.00	-26.44	55.24	-7.68	Peak	128	139	2	7250.00	55.93	74.00	-18.07	49.60	6.33	Peak	225	169	3	9206.67	49.54	88.20	-38.66	41.39	8.15	Peak	100	223	4	13810.00	50.66	88.20	-37.54	42.40	8.26	Peak	100	278
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	1000.10	47.56	74.00	-26.44	55.24	-7.68	Peak	128	139																																												
2	7250.00	55.93	74.00	-18.07	49.60	6.33	Peak	225	169																																												
3	9206.67	49.54	88.20	-38.66	41.39	8.15	Peak	100	223																																												
4	13810.00	50.66	88.20	-37.54	42.40	8.26	Peak	100	278																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905																																																	
Polarization	Horizontal-Average Value																																																			
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																				
Level (dBuV/m) <table><thead><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>43.95</td><td>54.00</td><td>-10.05</td><td>51.63</td><td>-7.68</td><td>Average</td><td>128</td><td>139</td></tr><tr><td>2</td><td>7250.00</td><td>46.04</td><td>54.00</td><td>-7.96</td><td>39.71</td><td>6.33</td><td>Average</td><td>225</td><td>169</td></tr><tr><td>3</td><td>9206.67</td><td>37.66</td><td>68.20</td><td>-30.54</td><td>29.51</td><td>8.15</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>4</td><td>13810.00</td><td>38.57</td><td>68.20</td><td>-29.63</td><td>30.31</td><td>8.26</td><td>Average</td><td>100</td><td>278</td></tr></tbody></table>				Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	43.95	54.00	-10.05	51.63	-7.68	Average	128	139	2	7250.00	46.04	54.00	-7.96	39.71	6.33	Average	225	169	3	9206.67	37.66	68.20	-30.54	29.51	8.15	Average	100	223	4	13810.00	38.57	68.20	-29.63	30.31	8.26	Average	100	278
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	1000.10	43.95	54.00	-10.05	51.63	-7.68	Average	128	139																																											
2	7250.00	46.04	54.00	-7.96	39.71	6.33	Average	225	169																																											
3	9206.67	37.66	68.20	-30.54	29.51	8.15	Average	100	223																																											
4	13810.00	38.57	68.20	-29.63	30.31	8.26	Average	100	278																																											
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																				




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905
Polarization	Vertical-Peak Value		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBUV/m)			




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905																																																		
Polarization	Vertical -Average Value																																																				
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																																					
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.10</td><td>40.63</td><td>54.00</td><td>-13.37</td><td>48.31</td><td>-7.68</td><td>Average</td><td>311</td><td>179</td></tr><tr><td>2</td><td>7250.00</td><td>49.18</td><td>54.00</td><td>-4.82</td><td>42.85</td><td>6.33</td><td>Average</td><td>243</td><td>96</td></tr><tr><td>3</td><td>9206.67</td><td>37.44</td><td>68.20</td><td>-30.76</td><td>29.29</td><td>8.15</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>4</td><td>13810.00</td><td>38.97</td><td>68.20</td><td>-29.23</td><td>30.71</td><td>8.26</td><td>Average</td><td>100</td><td>94</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.10	40.63	54.00	-13.37	48.31	-7.68	Average	311	179	2	7250.00	49.18	54.00	-4.82	42.85	6.33	Average	243	96	3	9206.67	37.44	68.20	-30.76	29.29	8.15	Average	100	67	4	13810.00	38.97	68.20	-29.23	30.71	8.26	Average	100	94
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	1000.10	40.63	54.00	-13.37	48.31	-7.68	Average	311	179																																												
2	7250.00	49.18	54.00	-4.82	42.85	6.33	Average	243	96																																												
3	9206.67	37.44	68.20	-30.76	29.29	8.15	Average	100	67																																												
4	13810.00	38.97	68.20	-29.23	30.71	8.26	Average	100	94																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

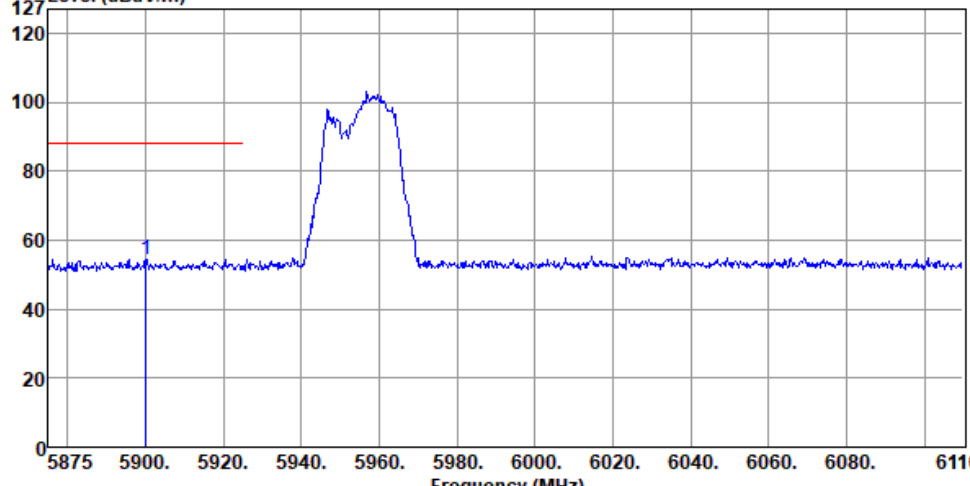


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955						
Polarization	Horizontal-Peak Value								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5900.15	54.55	88.20	-33.65	52.81	1.74	Peak	304	329
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

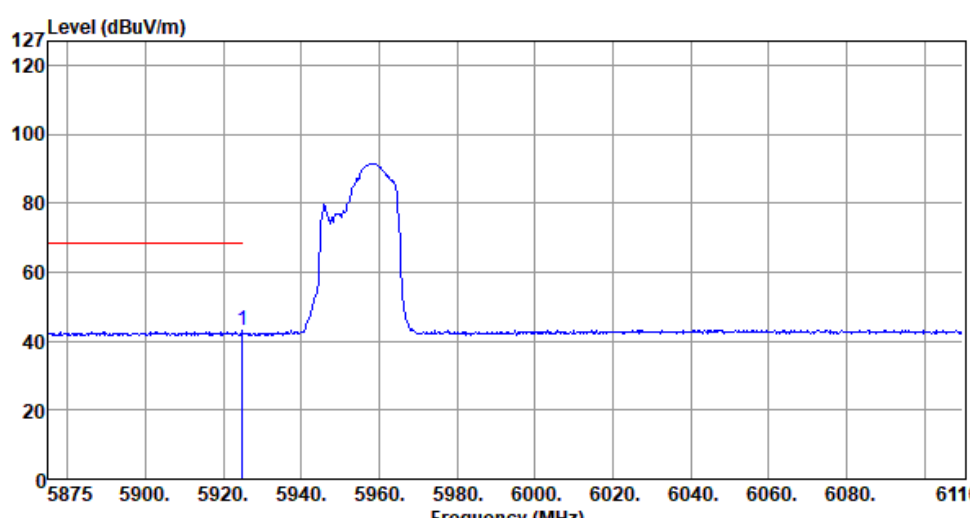


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																				
Polarization	Horizontal-Average Value																						
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5924.82</td><td>43.15</td><td>68.20</td><td>-25.05</td><td>41.40</td><td>1.75</td><td>Average</td><td>304</td><td>329</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5924.82	43.15	68.20	-25.05	41.40	1.75	Average	304	329
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5924.82	43.15	68.20	-25.05	41.40	1.75	Average	304	329														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							

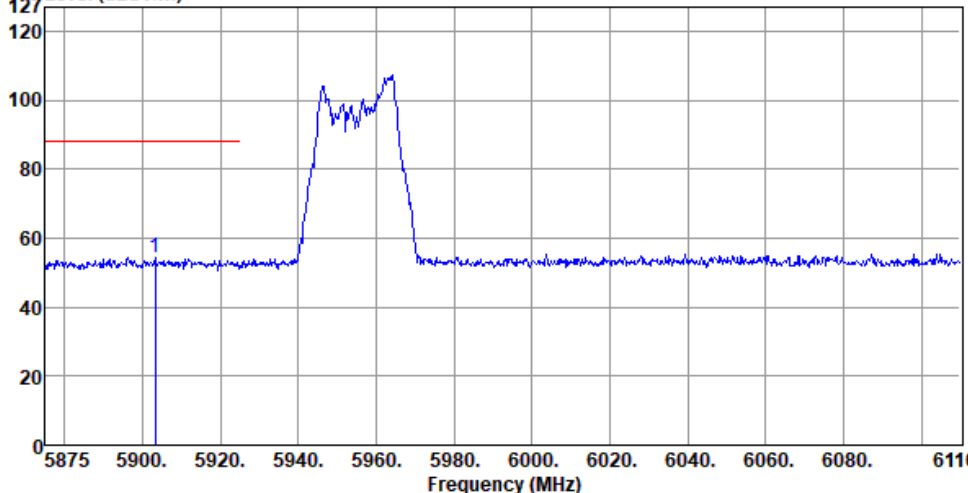

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																				
Polarization	Vertical-Peak Value																						
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5903.20</td><td>54.36</td><td>88.20</td><td>-33.84</td><td>52.62</td><td>1.74</td><td>Peak</td><td>232</td><td>123</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5903.20	54.36	88.20	-33.84	52.62	1.74	Peak	232	123
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5903.20	54.36	88.20	-33.84	52.62	1.74	Peak	232	123														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							

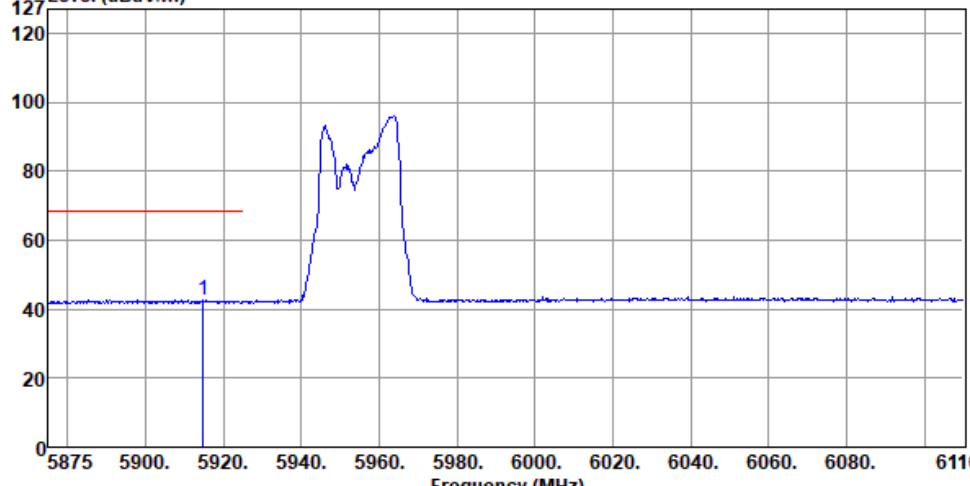

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																				
Polarization	Vertical -Average Value																						
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5914.72</td><td>42.63</td><td>68.20</td><td>-25.57</td><td>40.88</td><td>1.75</td><td>Average</td><td>232</td><td>123</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5914.72	42.63	68.20	-25.57	40.88	1.75	Average	232	123
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5914.72	42.63	68.20	-25.57	40.88	1.75	Average	232	123														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095
Polarization	Horizontal-Peak Value		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095						
Polarization	Horizontal-Average Value								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62									
Level (dBuV/m) UNII 5-8-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	7128.83	42.78	68.20	-25.42	36.78	6.00	Average	254	196
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095
Polarization	Vertical-Peak Value		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095
Polarization	Vertical -Average Value		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			

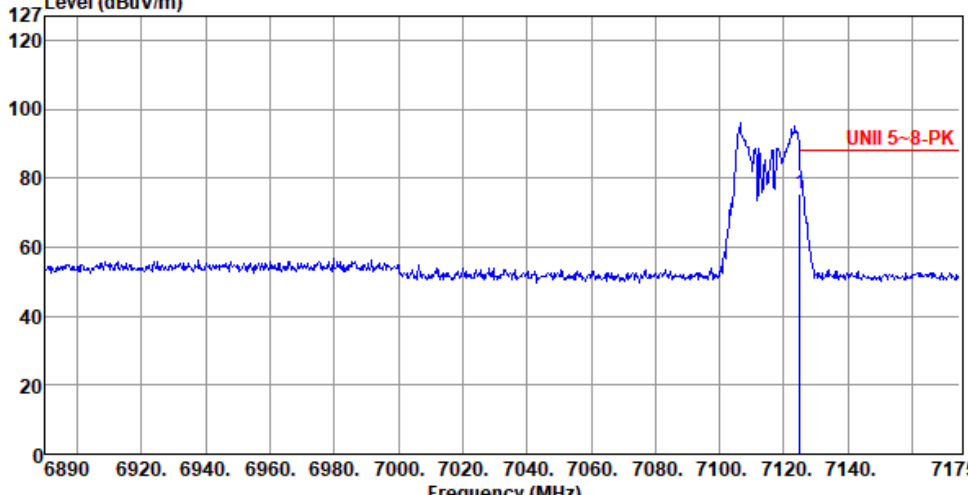

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115																														
Polarization	Horizontal-Peak Value																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>75.44</td><td>88.20</td><td>-12.76</td><td>69.47</td><td>5.97</td><td>BP-PK</td><td>267</td><td>252</td></tr></tbody></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	7125.00	75.44	88.20	-12.76	69.47	5.97	BP-PK	267	252
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	7125.00	75.44	88.20	-12.76	69.47	5.97	BP-PK	267	252																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115						
Polarization	Horizontal-Average Value								
Test By :Akun Chung Temperature(°C):24 Humidity(%):66									
Level (dBUV/m) UNII 5-8-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg
1	7125.00	62.78	68.20	-5.42	56.81	5.97	BP-AV	267	252
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115
Polarization	Vertical-Peak Value		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			

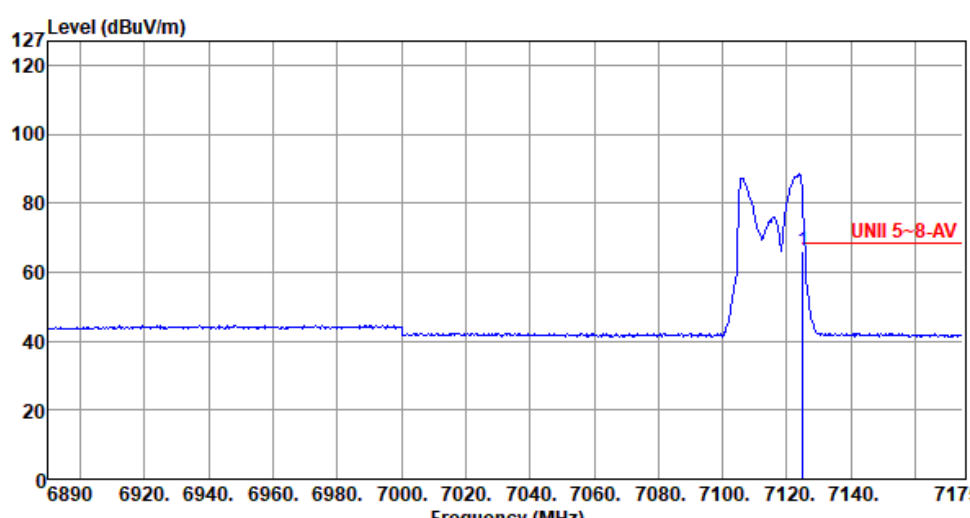


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115																																								
Polarization	Vertical -Average Value																																										
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz)																																											
<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.00</td><td>66.19</td><td>68.20</td><td>-2.01</td><td>60.22</td><td>5.97</td><td>BP-AV</td><td>216</td><td>244</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	7125.00	66.19	68.20	-2.01	60.22	5.97	BP-AV	216	244
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level			reading			High	Table																																		
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	7125.00	66.19	68.20	-2.01	60.22	5.97	BP-AV	216	244																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

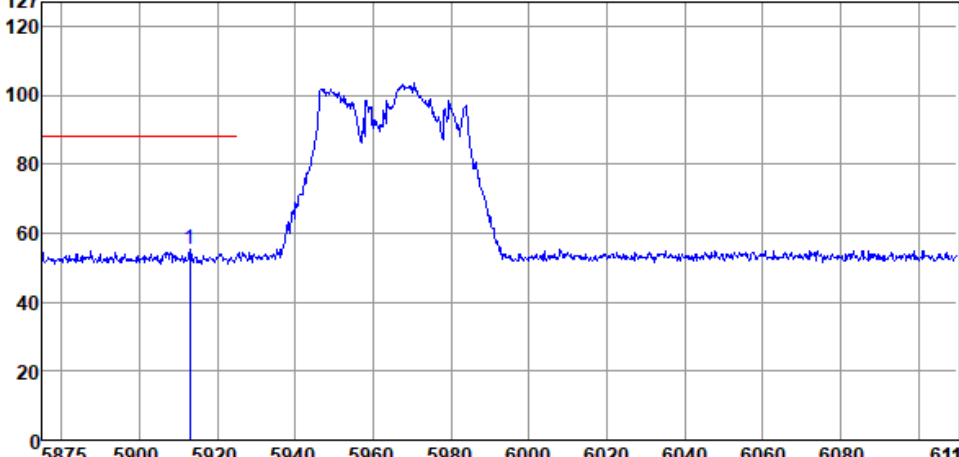

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965																														
Polarization	Horizontal-Peak Value																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5912.84</td><td>55.24</td><td>88.20</td><td>-32.96</td><td>53.49</td><td>1.75</td><td>Peak</td><td>299</td><td>330</td></tr></tbody></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5912.84	55.24	88.20	-32.96	53.49	1.75	Peak	299	330
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5912.84	55.24	88.20	-32.96	53.49	1.75	Peak	299	330																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	

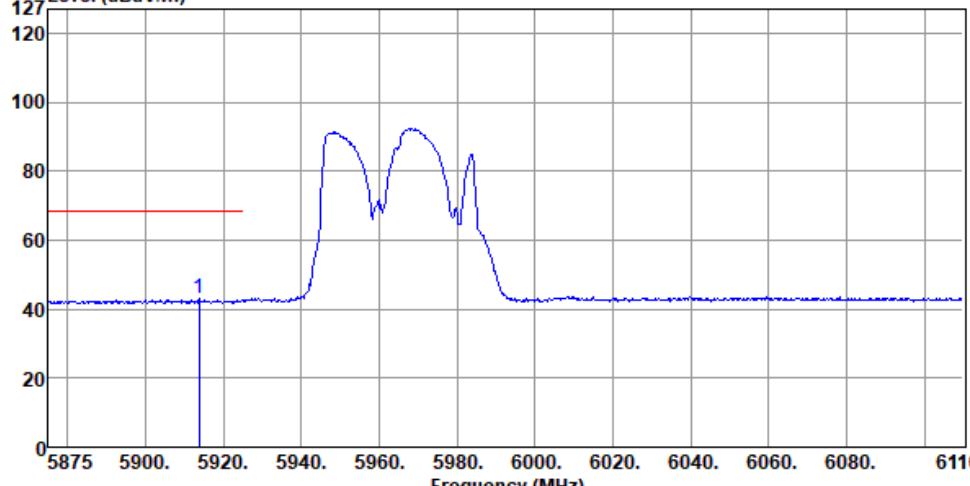


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965						
Polarization	Horizontal-Average Value								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5913.78	42.90	68.20	-25.30	41.15	1.75	Average	299	330

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor, cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965
Polarization	Vertical-Peak Value		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			

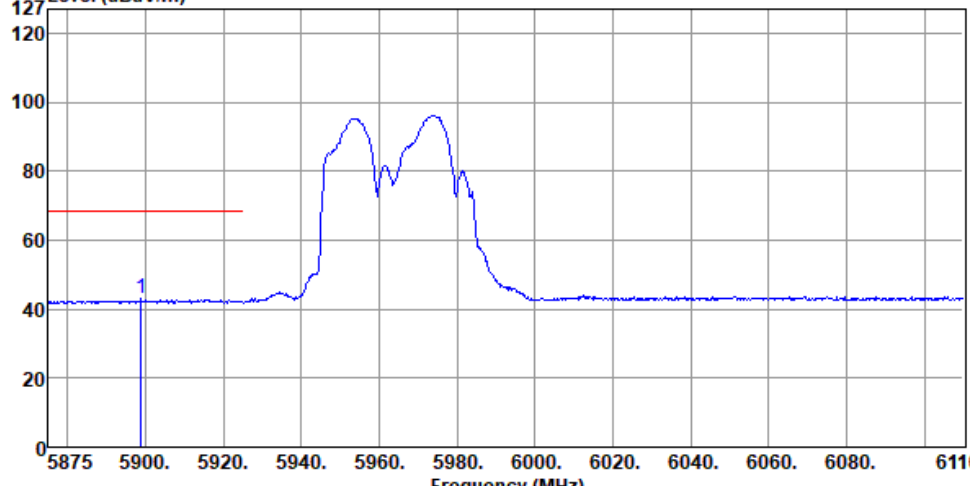

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965																										
Polarization	Vertical -Average Value																												
Test By :Akun Chung Temperature(°C):24 Humidity(%):62																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5898.74</td><td>43.08</td><td>68.20</td><td>-25.12</td><td>41.35</td><td>1.73</td><td>Average</td><td>225</td><td>123</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5898.74	43.08	68.20	-25.12	41.35	1.73	Average	225	123
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																				
1	5898.74	43.08	68.20	-25.12	41.35	1.73	Average	225	123																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																													



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085
Polarization	Horizontal-Peak Value		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085
Polarization	Horizontal-Average Value		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085
Polarization	Vertical-Peak Value		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085
Polarization	Vertical -Average Value		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985
Polarization	Horizontal-Peak Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985
Polarization	Horizontal-Average Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985
Polarization	Vertical-Peak Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985
Polarization	Vertical -Average Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025
Polarization	Horizontal-Peak Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025
Polarization	Horizontal-Average Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025
Polarization	Vertical-Peak Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025
Polarization	Vertical -Average Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60 40 20 0 6890 6920 6940 6960 6980 7000 7020 7040 7060 7080 7100 7120 7140 7175 Frequency (MHz) 127 120 100 80 60			




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025
Polarization	Horizontal-Peak Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			

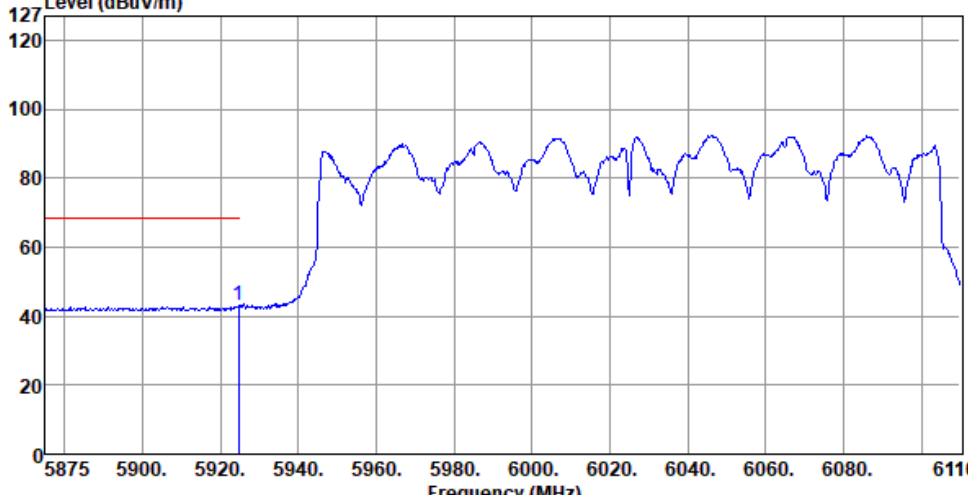

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025																																				
Polarization	Horizontal-Average Value																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5924.59</td><td>43.30</td><td>68.20</td><td>-24.90</td><td>41.55</td><td>1.75</td><td>Average</td><td>238</td><td>207</td></tr></tbody></table>											Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5924.59	43.30	68.20	-24.90	41.55	1.75	Average	238	207
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																														
1	5924.59	43.30	68.20	-24.90	41.55	1.75	Average	238	207																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																							

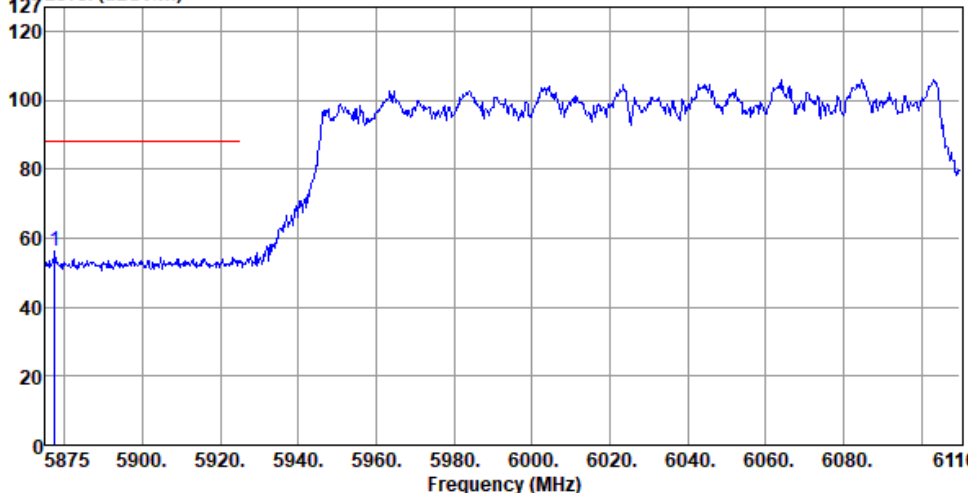

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025						
Polarization	Vertical-Peak Value								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5877.35	56.06	88.20	-32.14	54.42	1.64	Peak	211	354
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025
Polarization	Vertical -Average Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985
Polarization	Horizontal-Peak Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985
Polarization	Horizontal-Average Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			

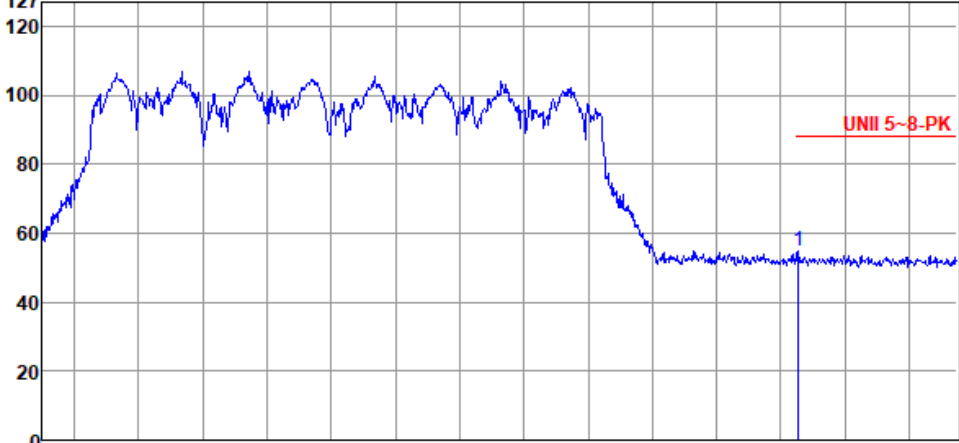

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985																											
Polarization	Vertical-Peak Value																													
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																														
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7125.41</td><td>54.77</td><td>88.20</td><td>-33.43</td><td>48.79</td><td>5.98</td><td>Peak</td><td>232 352</td></tr></tbody></table>				Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	7125.41	54.77	88.20	-33.43	48.79	5.98	Peak	232 352
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																						
1	7125.41	54.77	88.20	-33.43	48.79	5.98	Peak	232 352																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																														



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985
Polarization	Vertical -Average Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Horizontal-Peak Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Horizontal-Average Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Vertical-Peak Value		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105																																														
Polarization	Vertical -Average Value																																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):62																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5924.50</td><td>45.98</td><td>68.20</td><td>-22.22</td><td>44.23</td><td>1.75</td><td>Average</td><td>244</td><td>351</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5924.50	45.98	68.20	-22.22	44.23	1.75	Average	244	351
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																								
	MHz	level			reading			High	Table																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																								
1	5924.50	45.98	68.20	-22.22	44.23	1.75	Average	244	351																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																	



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905
Polarization	Horizontal-Peak Value		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905
Polarization	Horizontal-Average Value		
Test By :Akun Chung Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905
Polarization	Vertical-Peak Value		

Test By :Akun Chung

Temperature(°C):24

Humidity(%):62

Level (dBuV/m)

</



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905						
Polarization	Vertical -Average Value								
Test By :Akun Chung Temperature(°C):24 Humidity(%):62									
Level (dBuV/m) UNII 5-8-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	7145.50	48.01	68.20	-20.19	41.96	6.05	Average	243	96
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.42199G	-13.00	6.3743G	-62.09	-53.00	-9.09	2
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.1626G	-10.80	6.0672G	-63.34	-50.80	-12.54	1
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.40018G	-7.57	6.3394G	-37.25	-27.59	-9.66	4
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.31383G	-4.76	6.0706G	-54.65	-44.76	-9.89	4
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	Pass	6.2714G	-1.81	6.9882G	-50.86	-41.81	-9.05	1
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.5175G	-14.18	6.4659G	-67.54	-54.18	-13.36	1
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.42862G	-11.66	6.3744G	-60.52	-51.66	-8.86	2
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.44142G	-8.67	6.4194G	-39.19	-28.69	-10.50	4
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.8712G	-14.18	6.912G	-63.92	-54.18	-9.74	1
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.86238G	-11.79	6.912G	-61.70	-51.79	-9.91	1
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.51903G	-8.83	6.3742G	-58.43	-48.83	-9.60	2
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.69457G	-5.80	6.281G	-53.11	-45.80	-7.31	4
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	Pass	6.8539G	-1.77	6.3562G	-47.77	-41.77	-6.00	4
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	7.1125G	-19.69	7.0655G	-67.12	-59.69	-7.43	1
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	7.06742G	-11.77	6.9886G	-60.15	-51.77	-8.38	2
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.99463G	-8.70	6.979G	-38.96	-28.75	-10.21	4
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	7.00018G	-5.64	6.6002G	-53.28	-45.64	-7.64	4

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
5955MHz	Pass	5.96329G	-12.99	5.997G	-67.02	-52.99	-14.03	1
5955MHz	Pass	5.96369G	-13.04	5.9956G	-67.01	-53.04	-13.97	2
5955MHz	Pass	5.96369G	-12.85	6.0011G	-66.92	-52.85	-14.07	3
5955MHz	Pass	5.96379G	-12.66	6.0016G	-67.07	-52.66	-14.41	4
6175MHz	Pass	6.1725G	-13.24	6.2208G	-67.25	-53.24	-14.01	1
6175MHz	Pass	6.16641G	-12.83	6.2208G	-67.34	-52.83	-14.51	2
6175MHz	Pass	6.1786G	-12.94	6.2208G	-67.54	-52.94	-14.60	3
6175MHz	Pass	6.16911G	-12.71	6.2209G	-67.33	-52.71	-14.62	4
6415MHz	Pass	6.42389G	-13.78	6.3744G	-66.43	-53.78	-12.65	1
6415MHz	Pass	6.42199G	-13.00	6.3743G	-62.09	-53.00	-9.09	2
6415MHz	Pass	6.40621G	-12.84	6.3743G	-63.94	-52.84	-11.10	3
6415MHz	Pass	6.40711G	-12.53	6.3743G	-62.60	-52.53	-10.07	4
6435MHz	Pass	6.42661G	-13.92	6.3865G	-67.55	-53.92	-13.63	1
6435MHz	Pass	6.4325G	-13.40	6.3975G	-67.55	-53.40	-14.15	2
6435MHz	Pass	6.4363G	-13.45	6.3886G	-67.49	-53.45	-14.04	3
6435MHz	Pass	6.42871G	-13.32	6.3859G	-67.51	-53.32	-14.19	4
6475MHz	Pass	6.4794G	-14.20	6.4323G	-67.57	-54.20	-13.37	1
6475MHz	Pass	6.4763G	-13.86	6.4351G	-67.60	-53.86	-13.74	2
6475MHz	Pass	6.46761G	-13.40	6.4261G	-67.50	-53.40	-14.10	3
6475MHz	Pass	6.46751G	-13.13	6.4263G	-67.63	-53.13	-14.50	4
6515MHz	Pass	6.5175G	-14.18	6.4659G	-67.54	-54.18	-13.36	1
6515MHz	Pass	6.50621G	-13.87	6.4765G	-67.61	-53.87	-13.74	2
6515MHz	Pass	6.52269G	-13.71	6.476G	-67.56	-53.71	-13.85	3
6515MHz	Pass	6.50571G	-13.43	6.4801G	-67.75	-53.43	-14.32	4
6535MHz	Pass	6.5381G	-14.26	6.4957G	-67.68	-54.26	-13.42	1
6535MHz	Pass	6.54249G	-13.60	6.4907G	-67.72	-53.60	-14.12	2
6535MHz	Pass	6.52741G	-13.36	6.4954G	-67.58	-53.36	-14.22	3
6535MHz	Pass	6.52811G	-13.51	6.4893G	-67.81	-53.51	-14.30	4
6715MHz	Pass	6.70731G	-14.49	6.7584G	-65.31	-54.49	-10.82	1
6715MHz	Pass	6.71G	-13.46	6.7585G	-66.75	-53.46	-13.29	2
6715MHz	Pass	6.70751G	-13.69	6.7585G	-67.59	-53.69	-13.90	3
6715MHz	Pass	6.70721G	-13.26	6.6815G	-66.37	-52.17	-14.20	4
6855MHz	Pass	6.84871G	-14.19	6.9018G	-67.20	-54.19	-13.01	1
6855MHz	Pass	6.84611G	-13.87	6.9G	-67.22	-53.87	-13.35	2
6855MHz	Pass	6.84641G	-13.94	6.9048G	-67.22	-53.94	-13.28	3
6855MHz	Pass	6.86299G	-13.42	6.9039G	-67.22	-53.42	-13.80	4
6875MHz Straddle 6.525-6.875GHz	Pass	6.8712G	-14.18	6.912G	-63.92	-54.18	-9.74	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.88239G	-13.85	6.912G	-65.38	-53.85	-11.53	2
6875MHz Straddle 6.525-6.875GHz	Pass	6.86741G	-13.71	6.8352G	-66.22	-53.71	-12.51	3
6875MHz Straddle 6.525-6.875GHz	Pass	6.88129G	-13.72	6.912G	-66.97	-53.72	-13.25	4
6895MHz	Pass	6.88871G	-13.92	6.9383G	-67.38	-53.92	-13.46	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.88801G	-13.35	6.9386G	-67.29	-53.35	-13.94	2
6895MHz	Pass	6.88991G	-13.51	6.9388G	-67.21	-53.51	-13.70	3
6895MHz	Pass	6.88671G	-13.12	6.9443G	-67.36	-53.12	-14.24	4
7015MHz	Pass	7.0137G	-13.91	6.9778G	-67.49	-53.91	-13.58	1
7015MHz	Pass	7.0124G	-13.46	6.9802G	-67.47	-53.46	-14.01	2
7015MHz	Pass	7.00741G	-13.84	6.9792G	-67.35	-53.84	-13.51	3
7015MHz	Pass	7.0125G	-13.16	6.9788G	-67.60	-53.16	-14.44	4
7095MHz	Pass	7.0912G	-13.58	7.1424G	-65.88	-53.58	-12.30	1
7095MHz	Pass	7.10349G	-13.39	7.1424G	-64.00	-53.39	-10.61	2
7095MHz	Pass	7.08621G	-13.62	7.1388G	-67.83	-53.62	-14.21	3
7095MHz	Pass	7.08751G	-13.32	7.1425G	-67.49	-53.32	-14.17	4
7115MHz	Pass	7.1125G	-19.69	7.0655G	-67.12	-59.69	-7.43	1
7115MHz	Pass	7.10801G	-19.30	7.0655G	-67.98	-59.30	-8.68	2
7115MHz	Pass	7.1139G	-19.39	7.1502G	-68.25	-59.39	-8.86	3
7115MHz	Pass	7.10661G	-19.29	7.1629G	-68.18	-59.29	-8.89	4
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
5965MHz	Pass	5.98318G	-10.92	6.038G	-63.50	-50.92	-12.58	1
5965MHz	Pass	5.98238G	-11.61	6.037G	-64.70	-51.61	-13.09	2
5965MHz	Pass	5.98238G	-10.20	5.9878G	-43.27	-30.26	-13.01	3
5965MHz	Pass	5.98258G	-10.99	6.0346G	-64.63	-50.99	-13.64	4
6165MHz	Pass	6.1626G	-10.80	6.0672G	-63.34	-50.80	-12.54	1
6165MHz	Pass	6.169G	-10.87	6.067G	-63.46	-50.87	-12.59	2
6165MHz	Pass	6.15381G	-11.08	6.257G	-64.35	-51.08	-13.27	3
6165MHz	Pass	6.14862G	-10.47	6.1876G	-43.31	-30.48	-12.83	4
6405MHz	Pass	6.38862G	-10.92	6.382G	-44.15	-30.93	-13.22	1
6405MHz	Pass	6.39241G	-11.07	6.3314G	-64.36	-51.07	-13.29	2
6405MHz	Pass	6.4086G	-11.20	6.3148G	-64.25	-51.20	-13.05	3
6405MHz	Pass	6.39621G	-10.78	6.3086G	-64.38	-50.78	-13.60	4
6445MHz	Pass	6.42662G	-11.30	6.353G	-64.21	-51.30	-12.91	1
6445MHz	Pass	6.42862G	-11.66	6.3744G	-60.52	-51.66	-8.86	2
6445MHz	Pass	6.42882G	-11.30	6.3742G	-63.10	-51.30	-11.80	3
6445MHz	Pass	6.43381G	-11.31	6.3742G	-61.73	-51.31	-10.42	4
6485MHz	Pass	6.4826G	-11.56	6.3872G	-64.34	-51.56	-12.78	1
6485MHz	Pass	6.47121G	-11.84	6.3952G	-64.39	-51.84	-12.55	2
6485MHz	Pass	6.4824G	-11.39	6.4184G	-64.44	-51.39	-13.05	3
6485MHz	Pass	6.49979G	-11.64	6.3872G	-64.58	-51.64	-12.94	4
6525MHz Straddle 6.525-6.875GHz	Pass	6.5286G	-11.97	6.4428G	-64.47	-51.97	-12.50	1
6525MHz Straddle 6.525-6.875GHz	Pass	6.51021G	-11.82	6.451G	-63.86	-51.82	-12.04	2
6525MHz Straddle 6.525-6.875GHz	Pass	6.53539G	-11.49	6.4512G	-64.02	-51.49	-12.53	3
6525MHz Straddle 6.525-6.875GHz	Pass	6.51381G	-11.75	6.451G	-64.25	-51.75	-12.50	4
6565MHz	Pass	6.55001G	-11.91	6.466G	-64.66	-51.91	-12.75	1
6565MHz	Pass	6.58018G	-12.19	6.465G	-64.60	-52.19	-12.41	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6565MHz	Pass	6.54762G	-11.75	6.465G	-64.57	-51.75	-12.82	3
6565MHz	Pass	6.57219G	-11.77	6.47G	-64.81	-51.77	-13.04	4
6725MHz	Pass	6.73979G	-11.69	6.8118G	-64.42	-51.69	-12.73	1
6725MHz	Pass	6.73G	-11.86	6.8162G	-64.25	-51.86	-12.39	2
6725MHz	Pass	6.7224G	-11.37	6.8164G	-63.85	-51.37	-12.48	3
6725MHz	Pass	6.73379G	-11.48	6.8164G	-64.37	-51.48	-12.89	4
6845MHz	Pass	6.86238G	-11.79	6.912G	-61.70	-51.79	-9.91	1
6845MHz	Pass	6.83741G	-12.31	6.912G	-62.65	-52.31	-10.34	2
6845MHz	Pass	6.8474G	-11.49	6.9398G	-63.60	-51.49	-12.11	3
6845MHz	Pass	6.82982G	-11.66	6.9332G	-63.86	-51.66	-12.20	4
6885MHz Straddle 6.525-6.875GHz	Pass	6.8822G	-11.91	6.9792G	-63.84	-51.91	-11.93	1
6885MHz Straddle 6.525-6.875GHz	Pass	6.87381G	-12.22	6.9754G	-63.61	-52.22	-11.39	2
6885MHz Straddle 6.525-6.875GHz	Pass	6.8886G	-11.66	6.9588G	-63.67	-51.66	-12.01	3
6885MHz Straddle 6.525-6.875GHz	Pass	6.86682G	-11.52	6.9782G	-63.82	-51.52	-12.30	4
6925MHz	Pass	6.94238G	-11.00	6.9888G	-60.14	-49.83	-10.31	1
6925MHz	Pass	6.90742G	-11.39	6.9888G	-60.06	-50.75	-9.31	2
6925MHz	Pass	6.93239G	-11.35	7.0098G	-63.62	-51.35	-12.27	3
6925MHz	Pass	6.9224G	-11.24	7.0052G	-63.93	-51.24	-12.69	4
7005MHz	Pass	6.98642G	-11.45	6.9118G	-62.36	-51.45	-10.91	1
7005MHz	Pass	6.98902G	-11.56	6.912G	-62.87	-51.56	-11.31	2
7005MHz	Pass	7.0088G	-11.66	6.912G	-64.39	-51.66	-12.73	3
7005MHz	Pass	6.99401G	-11.66	6.9316G	-64.49	-51.66	-12.83	4
7085MHz	Pass	7.06762G	-11.11	6.9886G	-60.76	-51.11	-9.65	1
7085MHz	Pass	7.06742G	-11.77	6.9886G	-60.15	-51.77	-8.38	2
7085MHz	Pass	7.07241G	-11.12	6.989G	-63.16	-51.12	-12.04	3
7085MHz	Pass	7.07981G	-11.54	6.9888G	-63.69	-51.54	-12.15	4
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
5985MHz	Pass	6.02216G	-7.68	6.0306G	-37.48	-27.70	-9.78	1
5985MHz	Pass	6.02056G	-7.76	6.0306G	-39.24	-27.81	-11.43	2
5985MHz	Pass	6.02136G	-7.50	6.031G	-38.19	-27.30	-10.89	3
5985MHz	Pass	6.01177G	-7.50	6.0306G	-37.26	-27.20	-10.06	4
6145MHz	Pass	6.15939G	-7.53	6.191G	-38.72	-27.55	-11.17	1
6145MHz	Pass	6.11223G	-7.86	6.0986G	-39.16	-27.66	-11.50	2
6145MHz	Pass	6.1498G	-7.24	6.0986G	-38.69	-27.31	-11.38	3
6145MHz	Pass	6.10784G	-7.65	6.1906G	-37.14	-27.35	-9.79	4
6385MHz	Pass	6.39059G	-7.83	6.339G	-38.15	-27.85	-10.30	1
6385MHz	Pass	6.35103G	-8.02	6.4314G	-40.00	-28.07	-11.93	2
6385MHz	Pass	6.37021G	-7.37	6.3382G	-39.42	-27.27	-12.15	3
6385MHz	Pass	6.40018G	-7.57	6.3394G	-37.25	-27.59	-9.66	4
6465MHz	Pass	6.43983G	-8.93	6.4186G	-40.01	-28.98	-11.03	1
6465MHz	Pass	6.43903G	-9.15	6.2974G	-60.07	-49.15	-10.92	2
6465MHz	Pass	6.43143G	-8.15	6.4186G	-39.65	-28.17	-11.48	3

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6465MHz	Pass	6.44142G	-8.67	6.4194G	-39.19	-28.69	-10.50	4
6545MHz Straddle 6.525-6.875GHz	Pass	6.55099G	-9.13	6.3742G	-59.88	-49.13	-10.75	1
6545MHz Straddle 6.525-6.875GHz	Pass	6.51903G	-8.83	6.3742G	-58.43	-48.83	-9.60	2
6545MHz Straddle 6.525-6.875GHz	Pass	6.55339G	-8.66	6.3742G	-59.78	-48.66	-11.12	3
6545MHz Straddle 6.525-6.875GHz	Pass	6.52102G	-8.93	6.3742G	-59.09	-48.93	-10.16	4
6625MHz	Pass	6.60062G	-8.98	6.4262G	-60.52	-48.98	-11.54	1
6625MHz	Pass	6.59263G	-9.35	6.451G	-60.29	-49.35	-10.94	2
6625MHz	Pass	6.61421G	-8.95	6.5786G	-39.84	-28.75	-11.09	3
6625MHz	Pass	6.59263G	-8.93	6.6706G	-39.76	-28.98	-10.78	4
6705MHz	Pass	6.67983G	-9.23	6.8998G	-59.78	-49.23	-10.55	1
6705MHz	Pass	6.67983G	-8.67	6.7502G	-38.97	-28.72	-10.25	2
6705MHz	Pass	6.74136G	-8.43	6.8994G	-59.98	-48.43	-11.55	3
6705MHz	Pass	6.67223G	-8.00	6.659G	-39.22	-28.07	-11.15	4
6785MHz	Pass	6.80018G	-9.12	6.9798G	-59.62	-49.12	-10.50	1
6785MHz	Pass	6.7818G	-9.12	6.8302G	-38.98	-28.72	-10.26	2
6785MHz	Pass	6.82016G	-8.65	6.9702G	-59.52	-48.65	-10.87	3
6785MHz	Pass	6.789G	-8.56	6.985G	-59.71	-48.56	-11.15	4
6865MHz Straddle 6.525-6.875GHz	Pass	6.85301G	-8.98	7.0038G	-59.74	-48.98	-10.76	1
6865MHz Straddle 6.525-6.875GHz	Pass	6.85461G	-9.51	7.0086G	-59.95	-49.51	-10.44	2
6865MHz Straddle 6.525-6.875GHz	Pass	6.83983G	-9.00	7.003G	-58.96	-49.00	-9.96	3
6865MHz Straddle 6.525-6.875GHz	Pass	6.83943G	-8.77	7.003G	-59.28	-48.77	-10.51	4
6945MHz	Pass	6.95059G	-8.63	6.899G	-39.84	-28.65	-11.19	1
6945MHz	Pass	6.91263G	-8.63	7.1426G	-59.92	-48.63	-11.29	2
6945MHz	Pass	6.91143G	-8.39	6.8986G	-40.00	-28.44	-11.56	3
6945MHz	Pass	6.91263G	-8.49	6.8994G	-38.61	-28.19	-10.42	4
7025MHz	Pass	6.99983G	-8.31	6.835G	-59.69	-48.31	-11.38	1
7025MHz	Pass	6.99263G	-8.82	6.835G	-59.80	-48.82	-10.98	2
7025MHz	Pass	6.99823G	-8.54	6.9786G	-39.78	-28.34	-11.44	3
7025MHz	Pass	6.99463G	-8.70	6.979G	-38.96	-28.75	-10.21	4
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
6025MHz	Pass	6.04978G	-4.96	6.3746G	-55.04	-44.96	-10.08	1
6025MHz	Pass	6.03699G	-5.01	6.3746G	-55.32	-45.01	-10.31	2
6025MHz	Pass	6.04738G	-4.91	6.3154G	-55.29	-44.91	-10.38	3
6025MHz	Pass	6.03299G	-5.15	6.3754G	-55.30	-45.15	-10.15	4
6185MHz	Pass	6.16102G	-4.99	6.4498G	-55.31	-44.99	-10.32	1
6185MHz	Pass	6.19219G	-4.38	6.4426G	-55.74	-44.38	-11.36	2
6185MHz	Pass	6.25133G	-4.48	6.4586G	-55.38	-44.48	-10.90	3
6185MHz	Pass	6.23935G	-4.46	6.453G	-55.81	-44.46	-11.35	4
6345MHz	Pass	6.36738G	-4.85	6.0474G	-55.80	-44.85	-10.95	1
6345MHz	Pass	6.37377G	-4.88	6.617G	-55.94	-44.88	-11.06	2
6345MHz	Pass	6.33941G	-4.73	6.0322G	-55.07	-44.73	-10.34	3
6345MHz	Pass	6.31383G	-4.76	6.0706G	-54.65	-44.76	-9.89	4


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6505MHz Straddle 6.525-6.875GHz	Pass	6.43627G	-6.12	6.2202G	-55.74	-46.12	-9.62	1
6505MHz Straddle 6.525-6.875GHz	Pass	6.44746G	-6.25	6.8354G	-56.60	-46.25	-10.35	2
6505MHz Straddle 6.525-6.875GHz	Pass	6.43307G	-5.72	6.121G	-55.06	-45.72	-9.34	3
6505MHz Straddle 6.525-6.875GHz	Pass	6.49781G	-6.01	6.1202G	-53.97	-46.01	-7.96	4
6665MHz	Pass	6.59707G	-6.39	6.989G	-54.35	-46.39	-7.96	1
6665MHz	Pass	6.65941G	-6.48	6.989G	-54.80	-46.48	-8.32	2
6665MHz	Pass	6.59067G	-6.20	6.281G	-54.43	-46.20	-8.23	3
6665MHz	Pass	6.69457G	-5.80	6.281G	-53.11	-45.80	-7.31	4
6825MHz Straddle 6.525-6.875GHz	Pass	6.75947G	-6.18	6.4258G	-55.75	-46.18	-9.57	1
6825MHz Straddle 6.525-6.875GHz	Pass	6.84098G	-6.54	6.449G	-56.21	-46.54	-9.67	2
6825MHz Straddle 6.525-6.875GHz	Pass	6.77945G	-5.86	6.4402G	-54.97	-45.86	-9.11	3
6825MHz Straddle 6.525-6.875GHz	Pass	6.81781G	-6.06	6.441G	-53.47	-46.06	-7.41	4
6985MHz	Pass	6.92186G	-5.08	6.6866G	-55.52	-45.08	-10.44	1
6985MHz	Pass	6.91307G	-5.58	6.6602G	-55.63	-45.58	-10.05	2
6985MHz	Pass	6.97221G	-5.57	6.5994G	-54.84	-45.57	-9.27	3
6985MHz	Pass	7.00018G	-5.64	6.6002G	-53.28	-45.64	-7.64	4
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
6105MHz	Pass	6.2473G	-1.15	6.6218G	-52.03	-41.15	-10.88	1
6105MHz	Pass	6.0922G	-1.20	6.6138G	-51.51	-41.20	-10.31	2
6105MHz	Pass	6.0331G	-0.80	6.6138G	-51.63	-40.80	-10.83	3
6105MHz	Pass	6.0491G	-0.56	6.6122G	-51.51	-40.56	-10.95	4
6265MHz	Pass	6.2714G	-1.81	6.9882G	-50.86	-41.81	-9.05	1
6265MHz	Pass	6.2123G	-1.04	6.8058G	-51.95	-41.04	-10.91	2
6265MHz	Pass	6.2698G	-0.68	6.8042G	-50.45	-40.68	-9.77	3
6265MHz	Pass	6.2794G	-0.60	6.8138G	-50.74	-40.60	-10.14	4
6425MHz Straddle 6.525-6.875GHz	Pass	6.3691G	-2.00	6.9898G	-51.07	-42.00	-9.07	1
6425MHz Straddle 6.525-6.875GHz	Pass	6.3898G	-2.28	6.9898G	-51.29	-42.28	-9.01	2
6425MHz Straddle 6.525-6.875GHz	Pass	6.433G	-2.20	6.945G	-50.94	-42.20	-8.74	3
6425MHz Straddle 6.525-6.875GHz	Pass	6.2716G	-1.59	6.953G	-50.98	-41.59	-9.39	4
6585MHz Straddle 6.525-6.875GHz	Pass	6.4332G	-2.03	6.0426G	-49.62	-42.03	-7.59	1
6585MHz Straddle 6.525-6.875GHz	Pass	6.4459G	-2.34	6.0458G	-51.20	-42.34	-8.86	2
6585MHz Straddle 6.525-6.875GHz	Pass	6.5147G	-1.86	6.057G	-50.38	-41.86	-8.52	3
6585MHz Straddle 6.525-6.875GHz	Pass	6.5323G	-1.97	6.0554G	-49.27	-41.97	-7.30	4
6745MHz Straddle 6.525-6.875GHz	Pass	6.6139G	-2.31	6.2266G	-49.68	-42.31	-7.37	1
6745MHz Straddle 6.525-6.875GHz	Pass	6.7802G	-1.97	6.233G	-51.78	-41.97	-9.81	2
6745MHz Straddle 6.525-6.875GHz	Pass	6.6891G	-1.59	6.2314G	-50.14	-41.59	-8.55	3
6745MHz Straddle 6.525-6.875GHz	Pass	6.6939G	-1.67	6.217G	-48.71	-41.67	-7.04	4
6905MHz Straddle 6.525-6.875GHz	Pass	6.8602G	-1.41	6.3722G	-49.67	-41.41	-8.26	1
6905MHz Straddle 6.525-6.875GHz	Pass	6.8922G	-1.74	6.3562G	-49.51	-41.74	-7.77	2
6905MHz Straddle 6.525-6.875GHz	Pass	6.9114G	-1.71	6.3882G	-48.96	-41.71	-7.25	3
6905MHz Straddle 6.525-6.875GHz	Pass	6.8539G	-1.77	6.3562G	-47.77	-41.77	-6.00	4



5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


5955MHz_TX

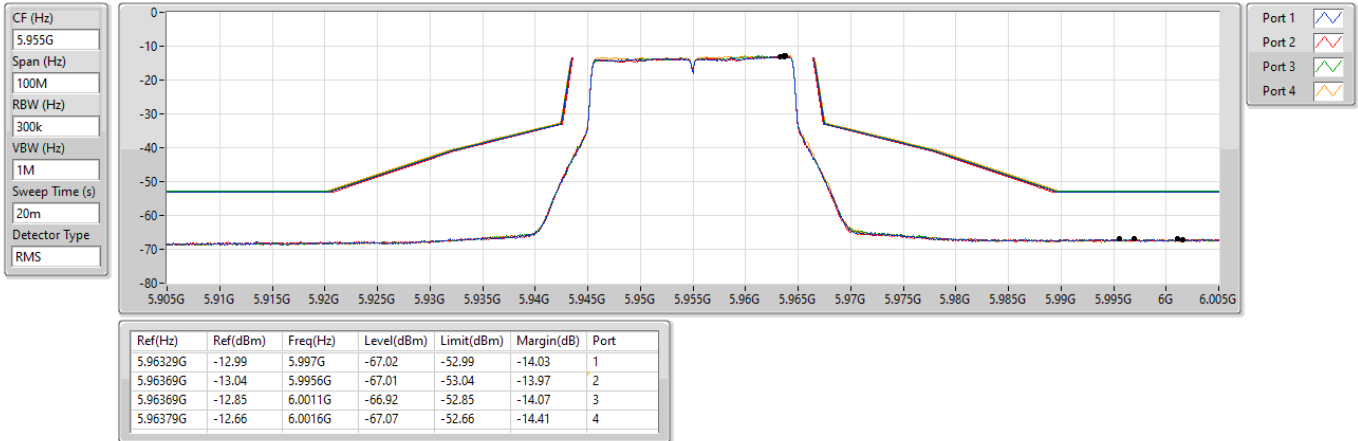

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

6175MHz_TX

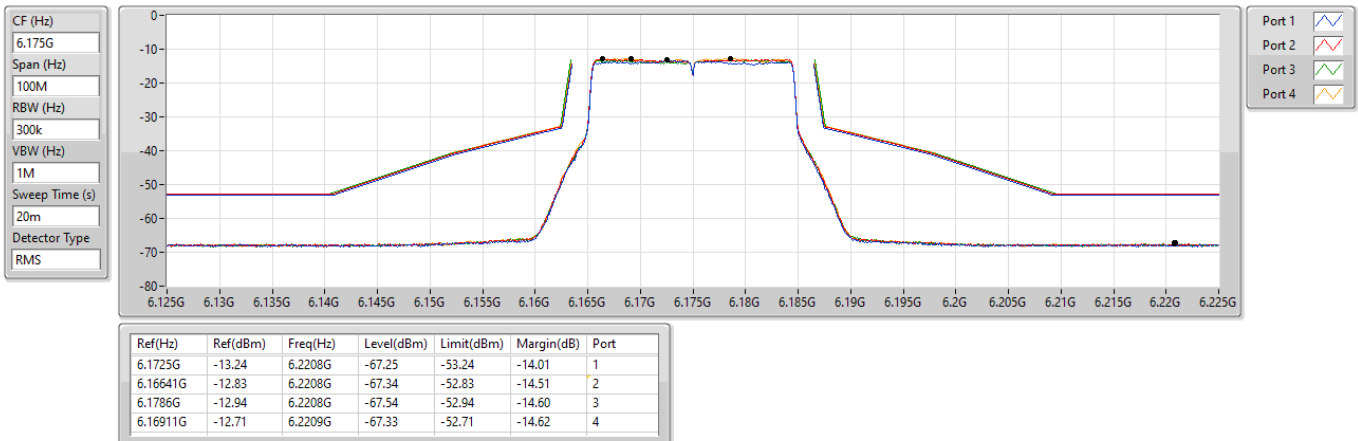




5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6415MHz_TX

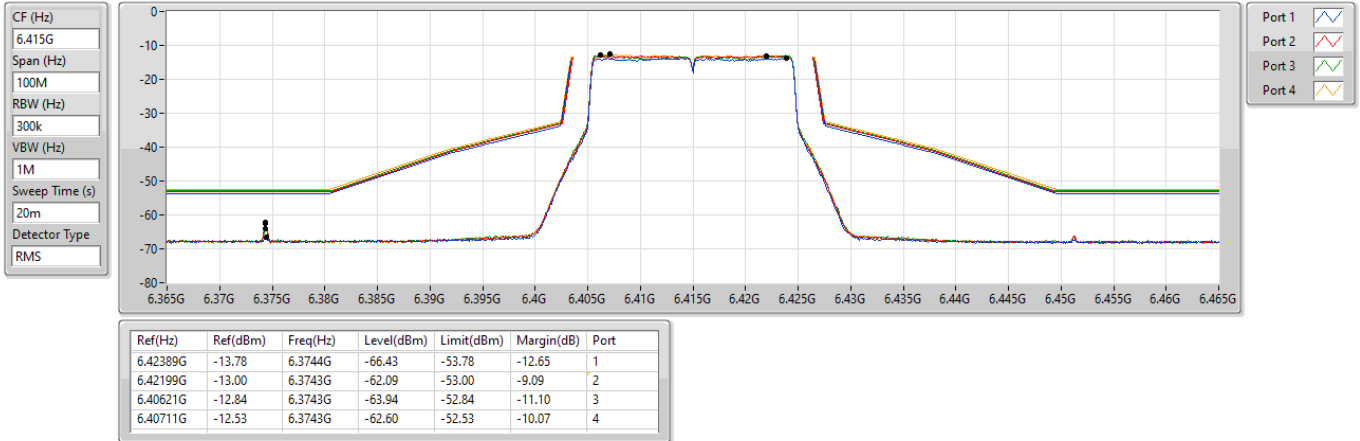

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

6435MHz_TX

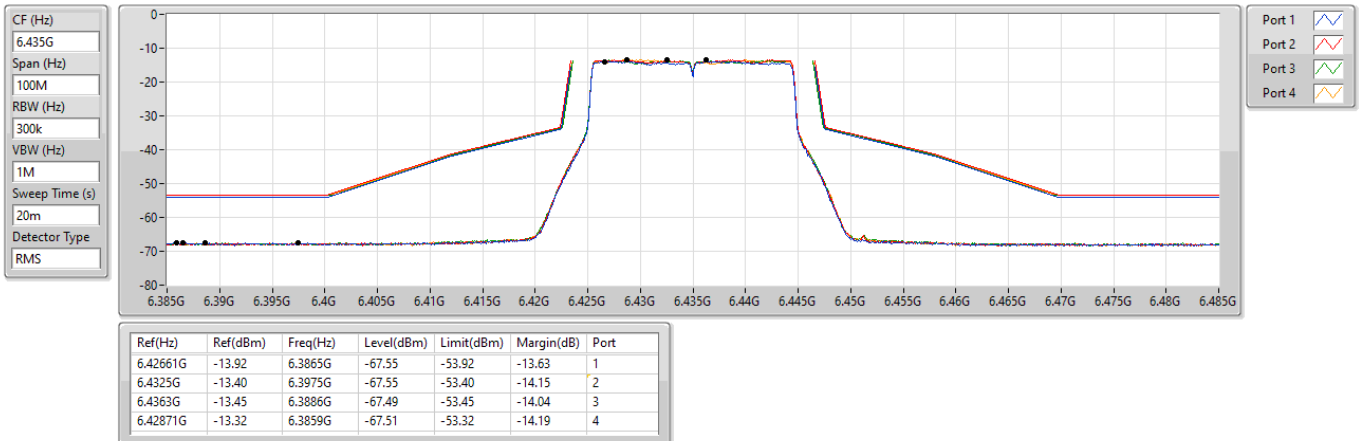




6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6475MHz_TX

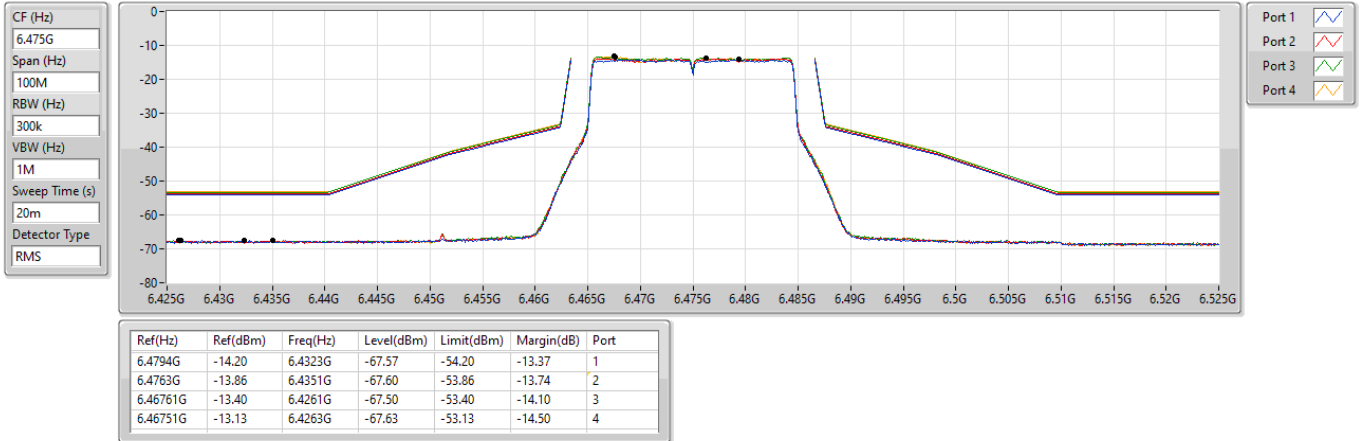

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6515MHz_TX

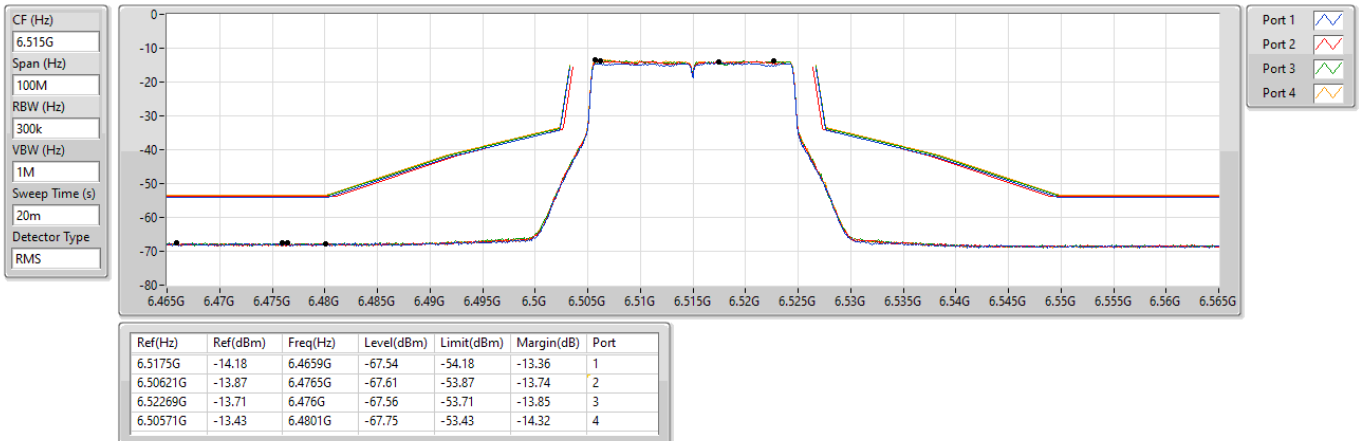

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6535MHz_TX

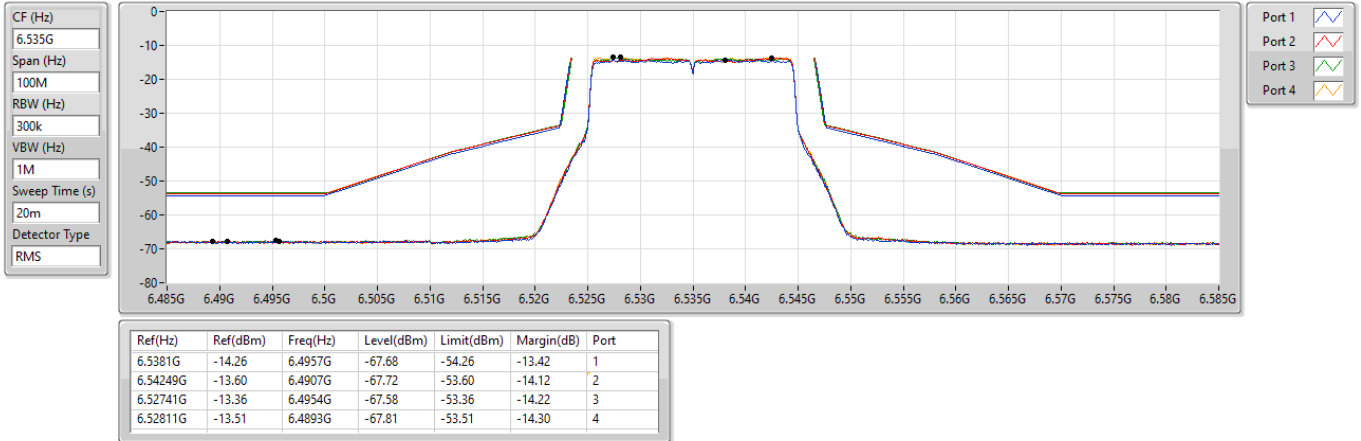

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6715MHz_TX

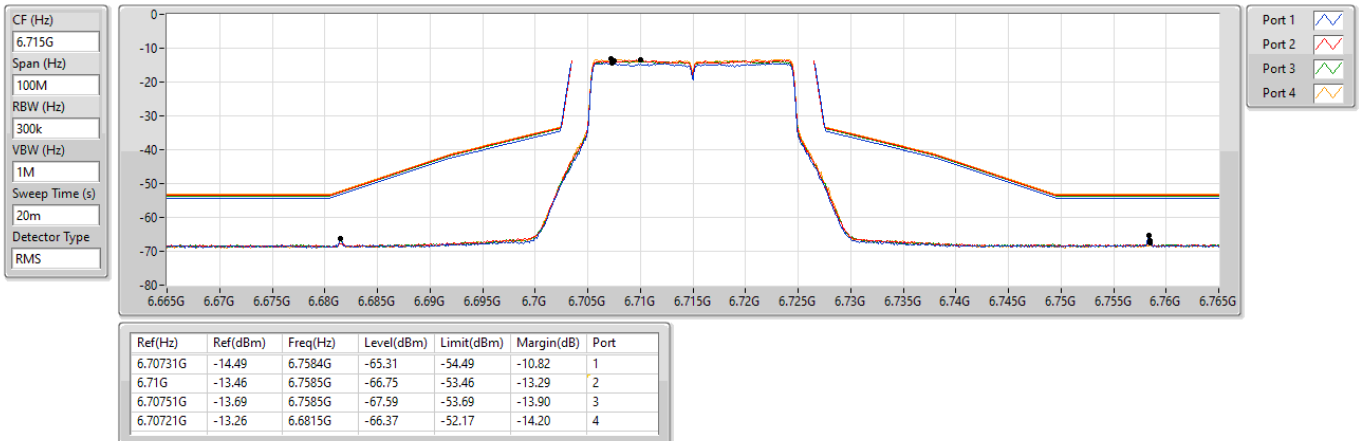

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6855MHz_TX

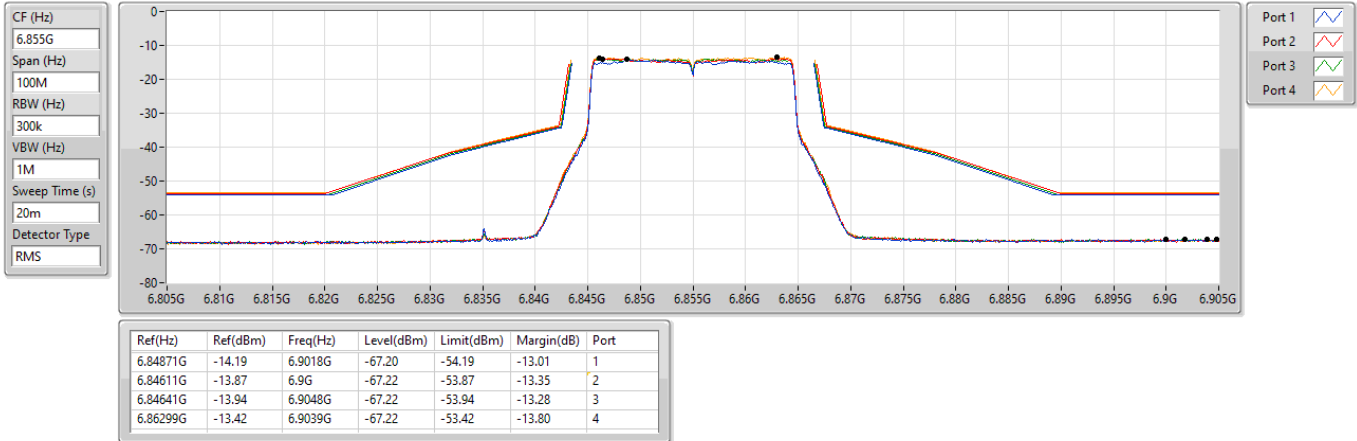

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

6875MHz Straddle 6.525-6.875GHz_TX

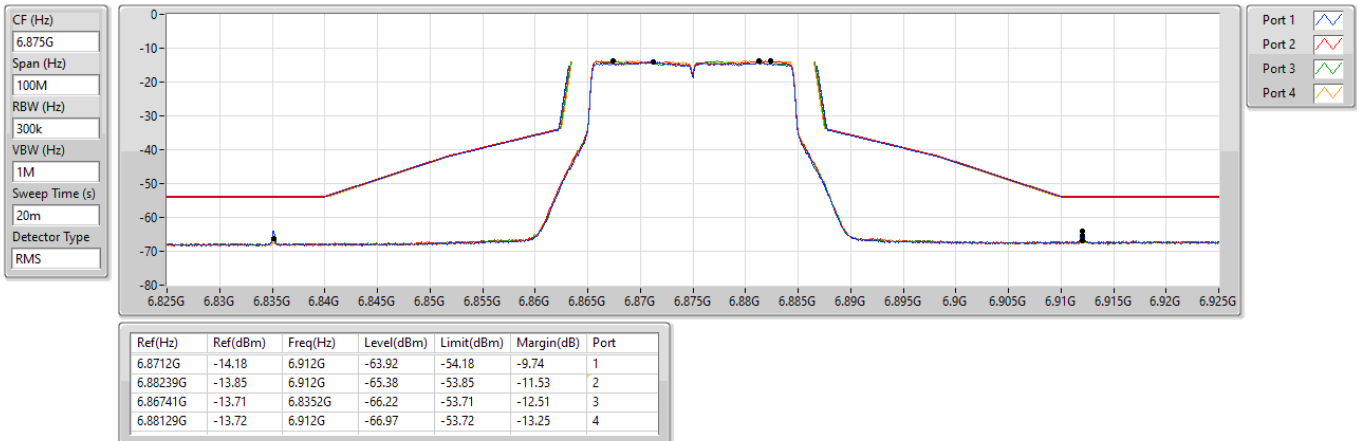




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6895MHz_TX

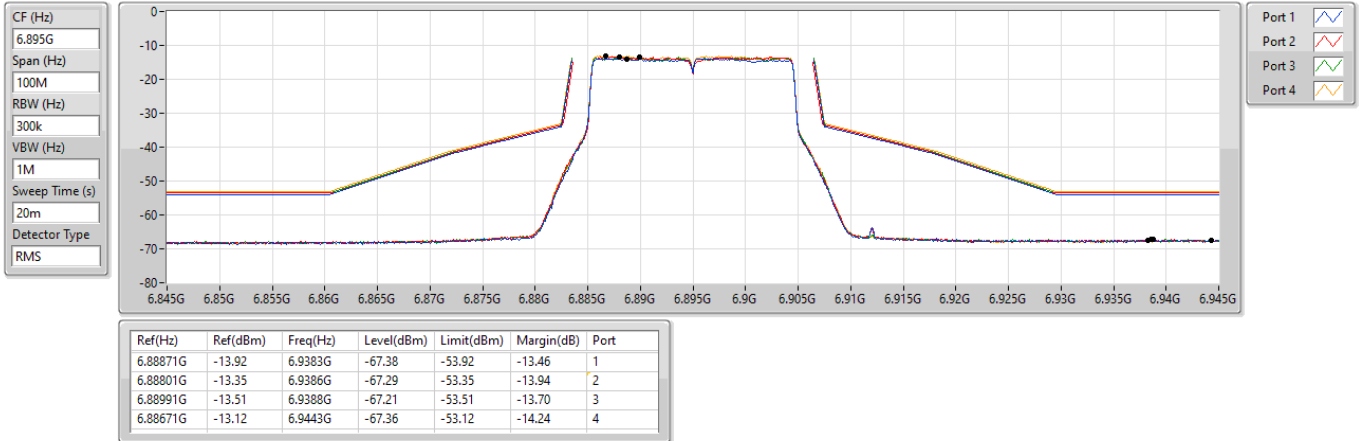

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

7015MHz_TX

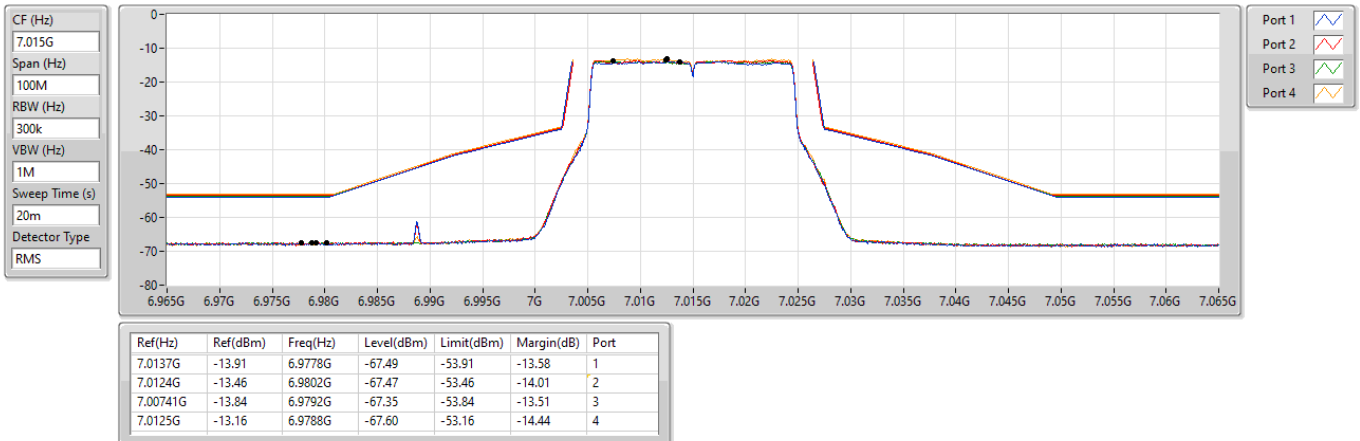




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7095MHz_TX

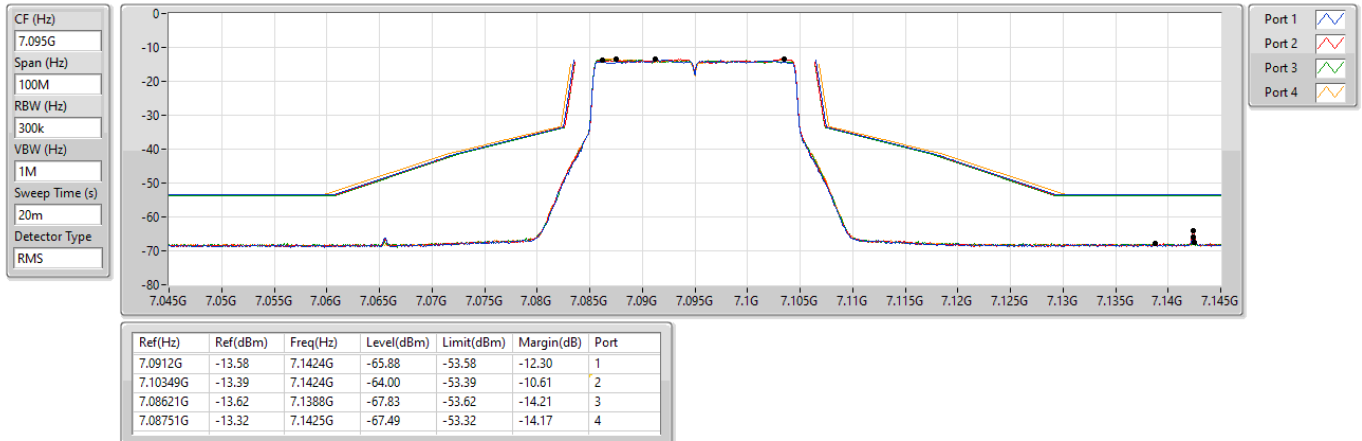

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

7115MHz_TX

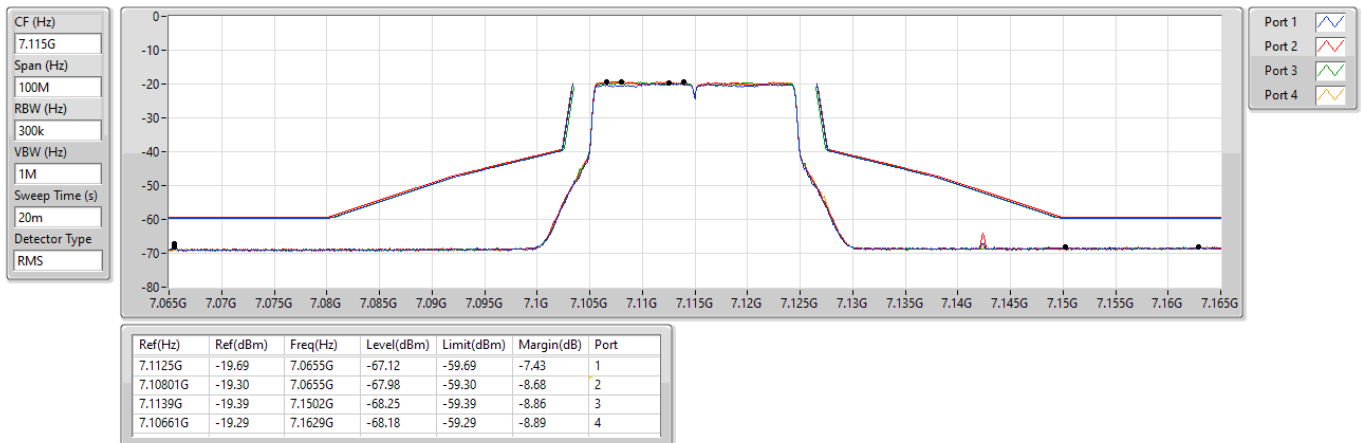




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


5965MHz_TX

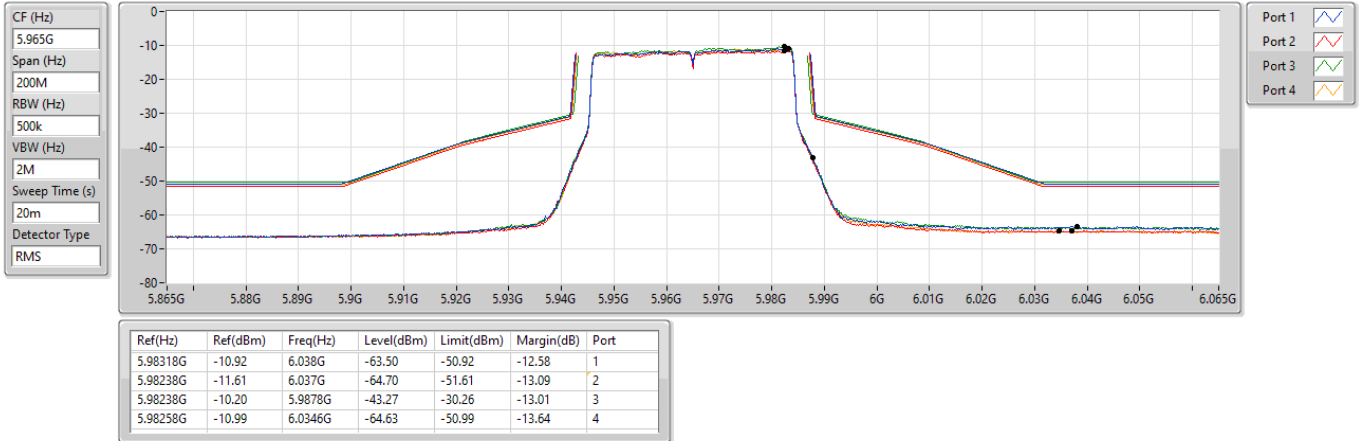

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6165MHz_TX

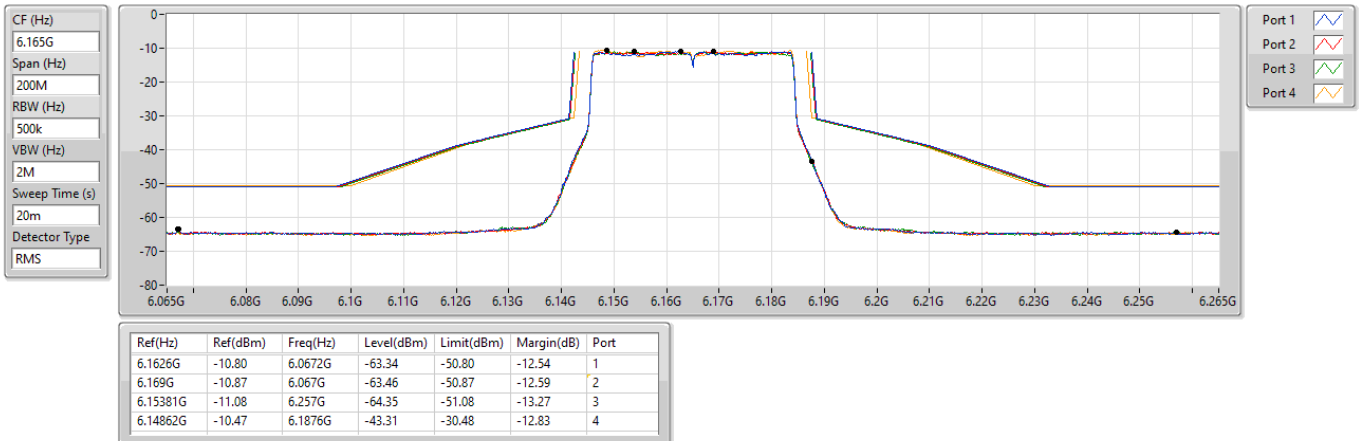

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK

6405MHz_TX

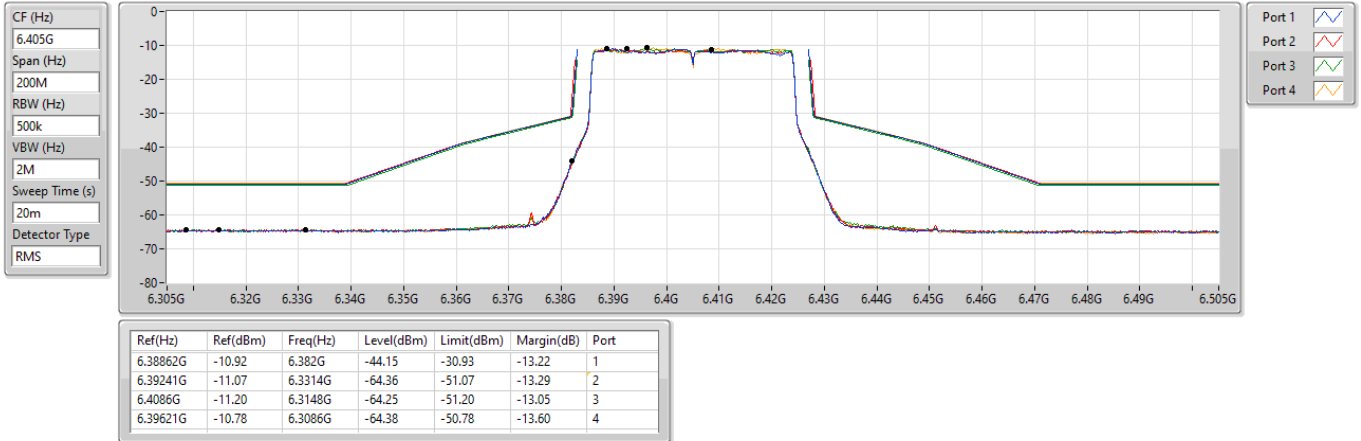

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK

6445MHz_TX

