




6.425-6.525GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

MASK


6485MHz\_TX

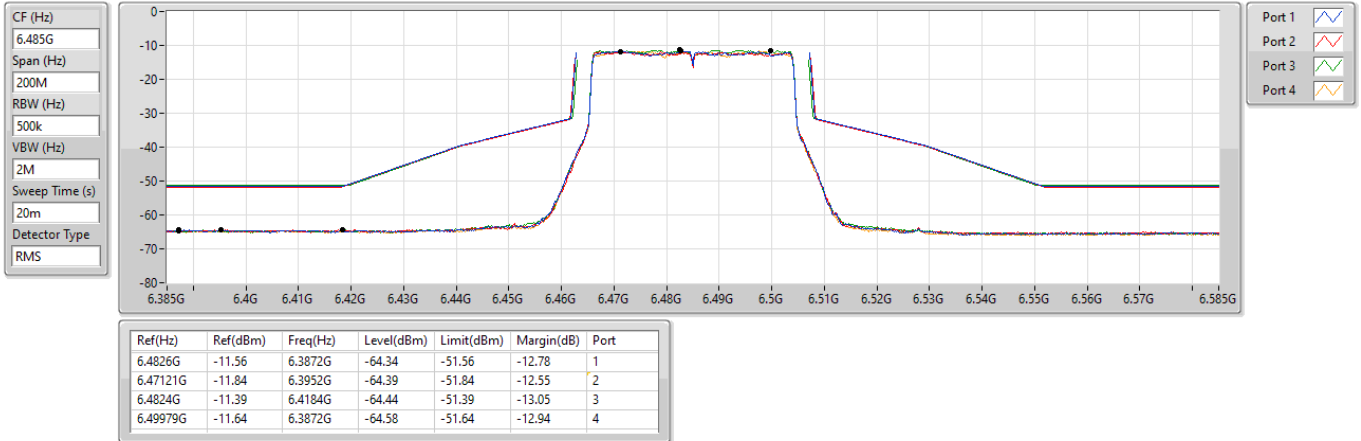

6.525-6.875GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

MASK


6525MHz Straddle 6.525-6.875GHz\_TX

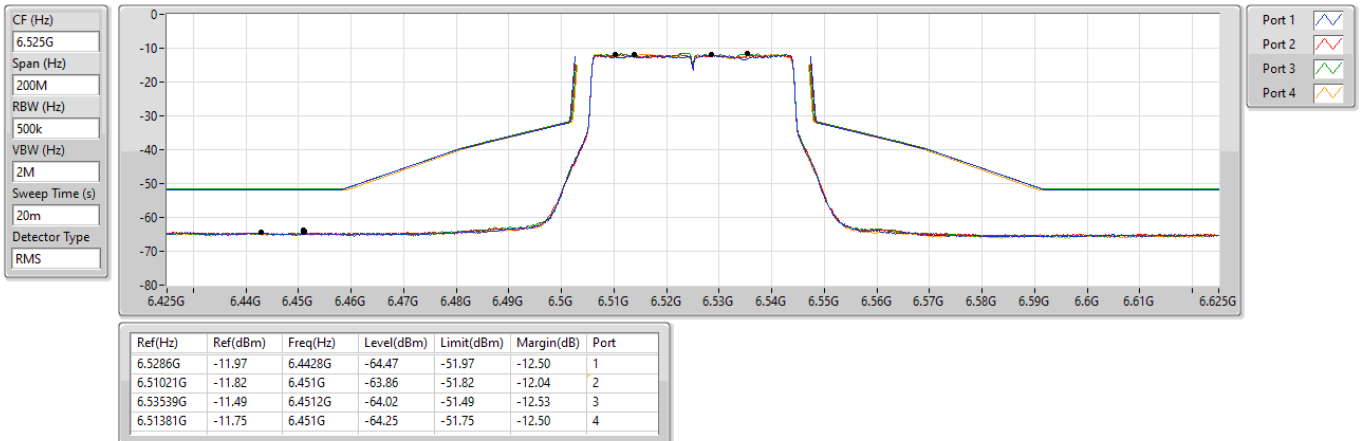

6.525-6.875GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

MASK


6565MHz\_TX

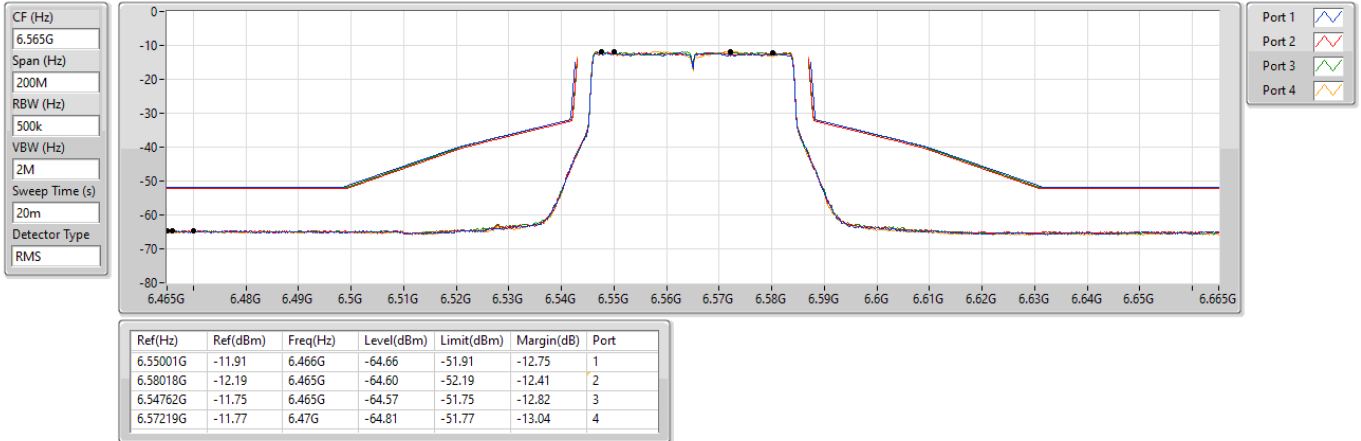

6.525-6.875GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

MASK

6725MHz\_TX

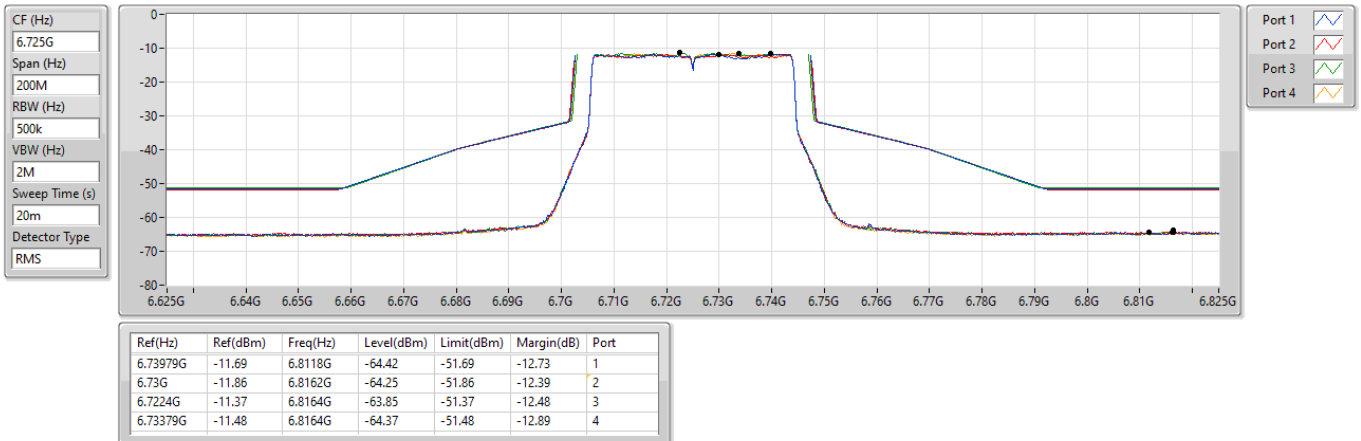




6.525-6.875GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

MASK


6845MHz\_TX

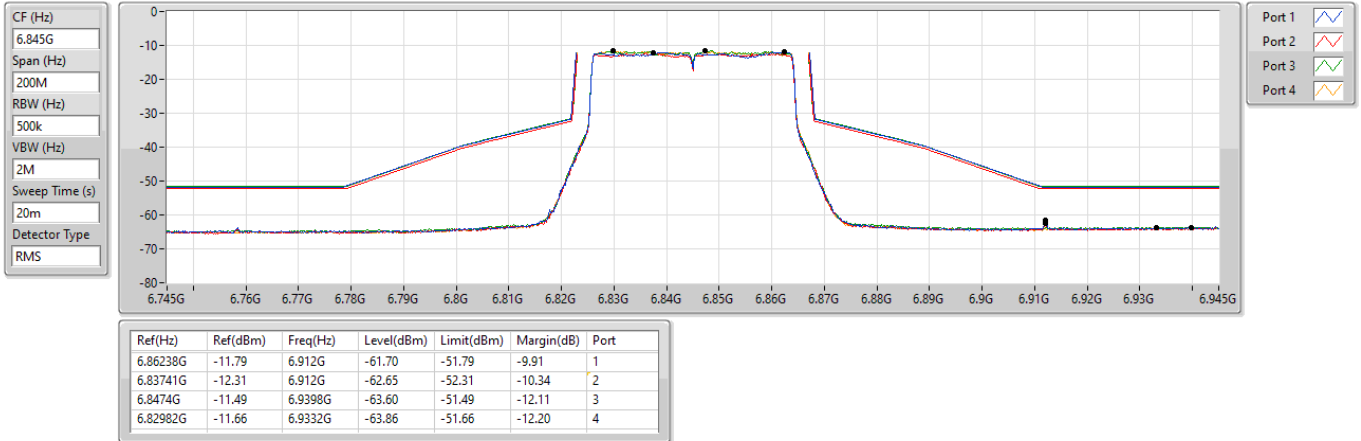

6.525-6.875GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

MASK

6885MHz Straddle 6.525-6.875GHz\_TX

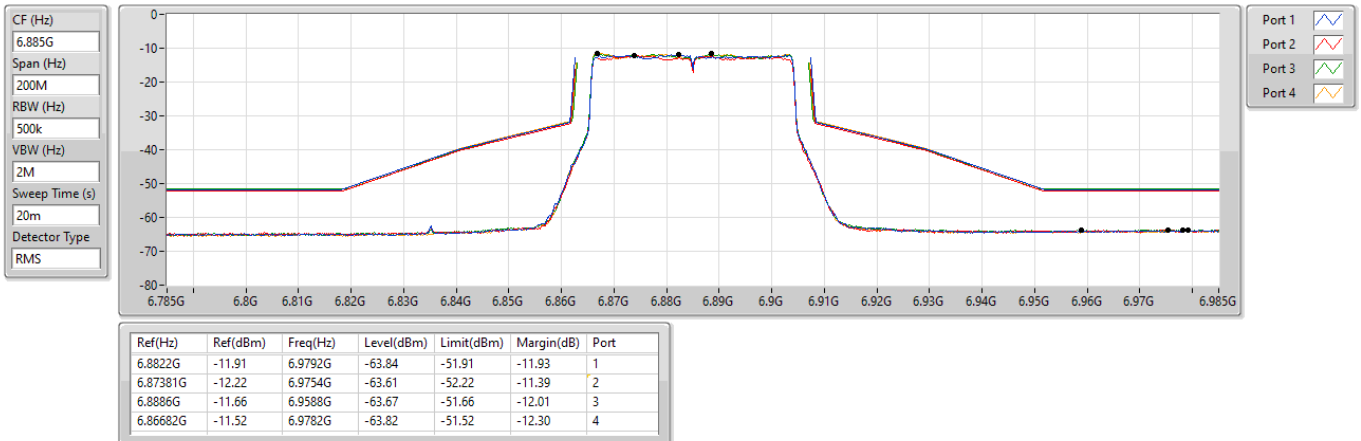




6.875-7.125GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

MASK


6925MHz\_TX

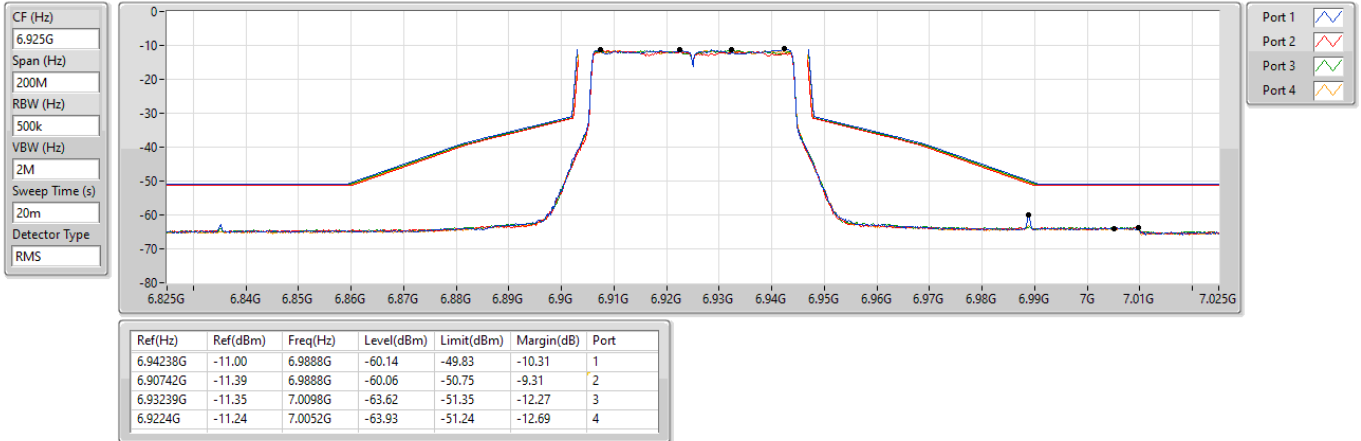

6.875-7.125GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

MASK

7005MHz\_TX

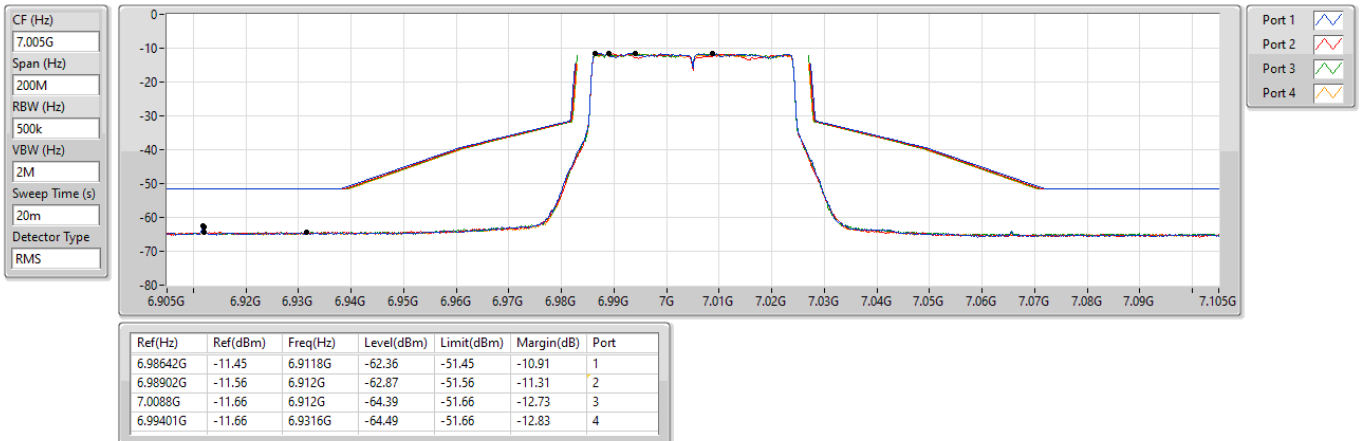




6.875-7.125GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

MASK


7085MHz\_TX

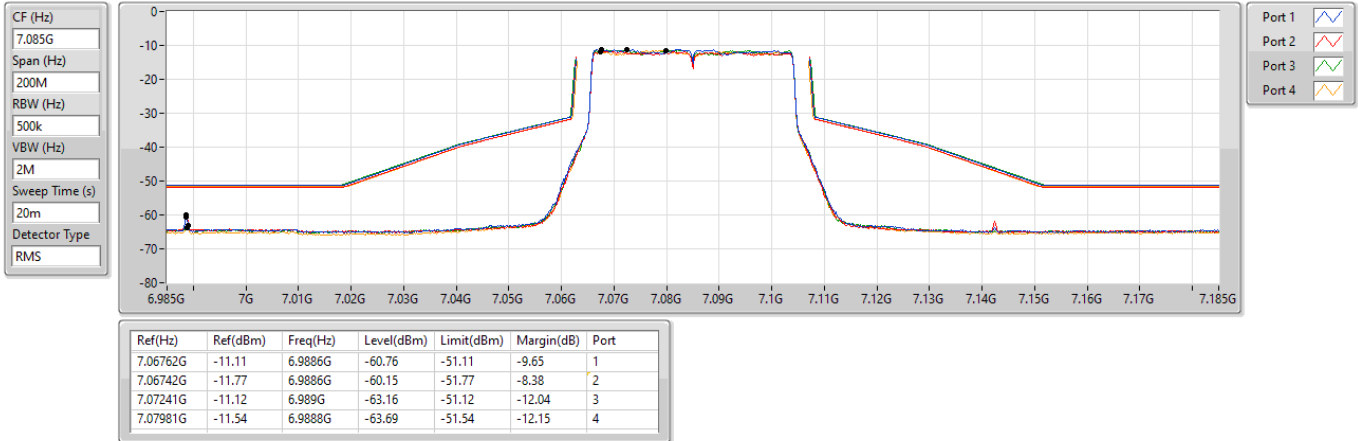

5.925-6.425GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

MASK

5985MHz\_TX

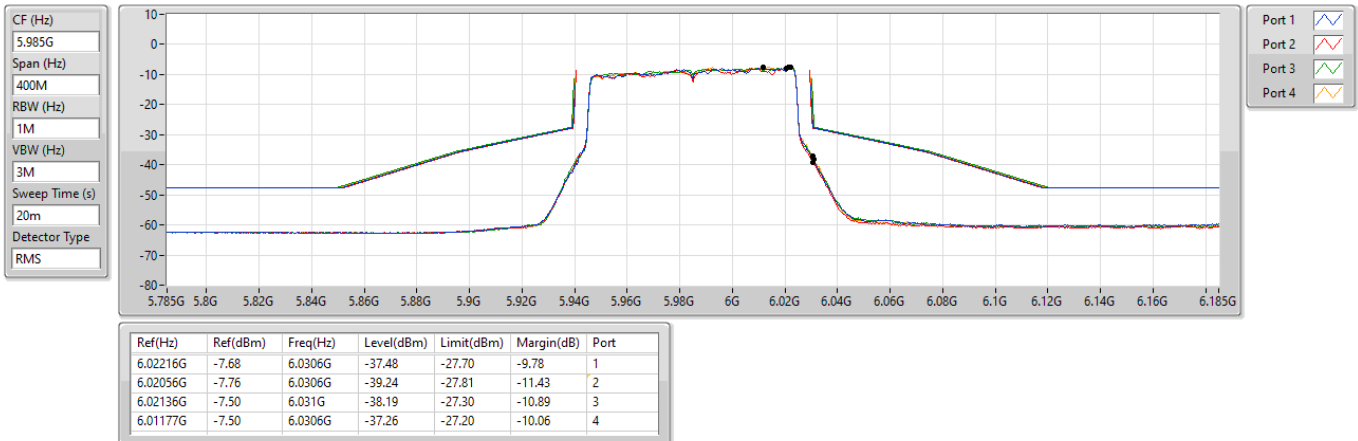




5.925-6.425GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

MASK


6145MHz\_TX

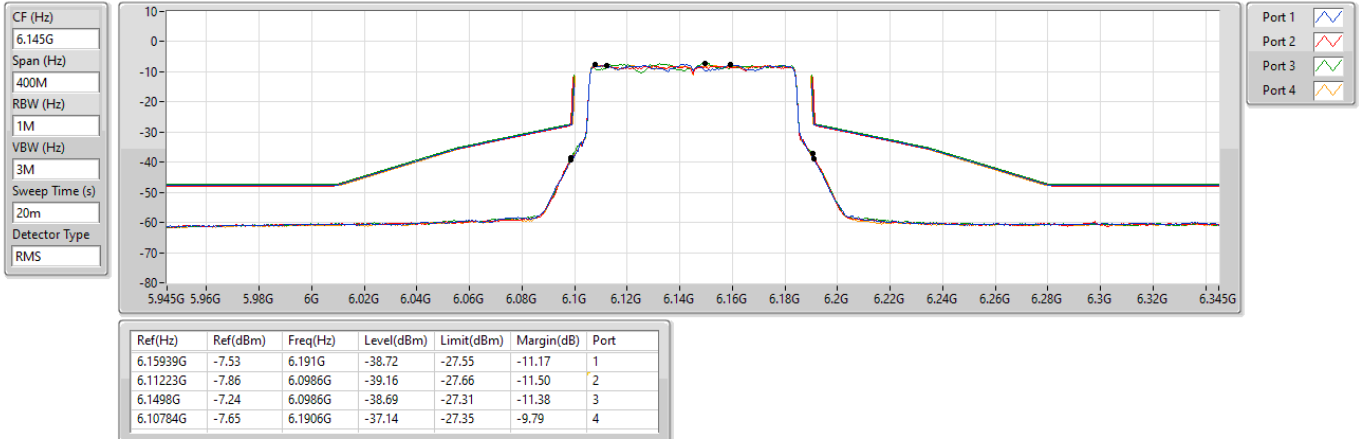

5.925-6.425GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

MASK


6385MHz\_TX

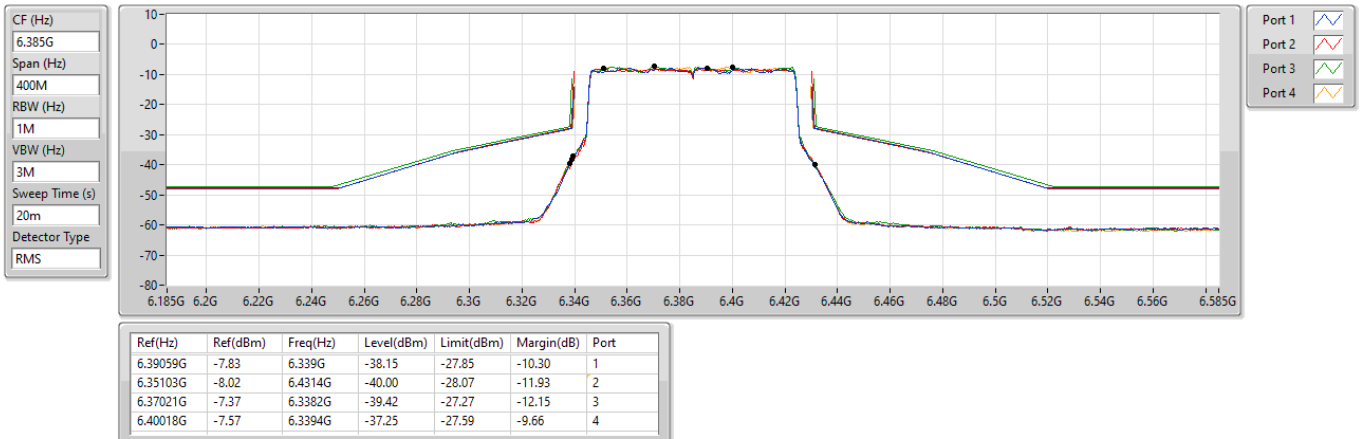

## 6.425-6.525GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

MASK


### 6465MHz\_TX

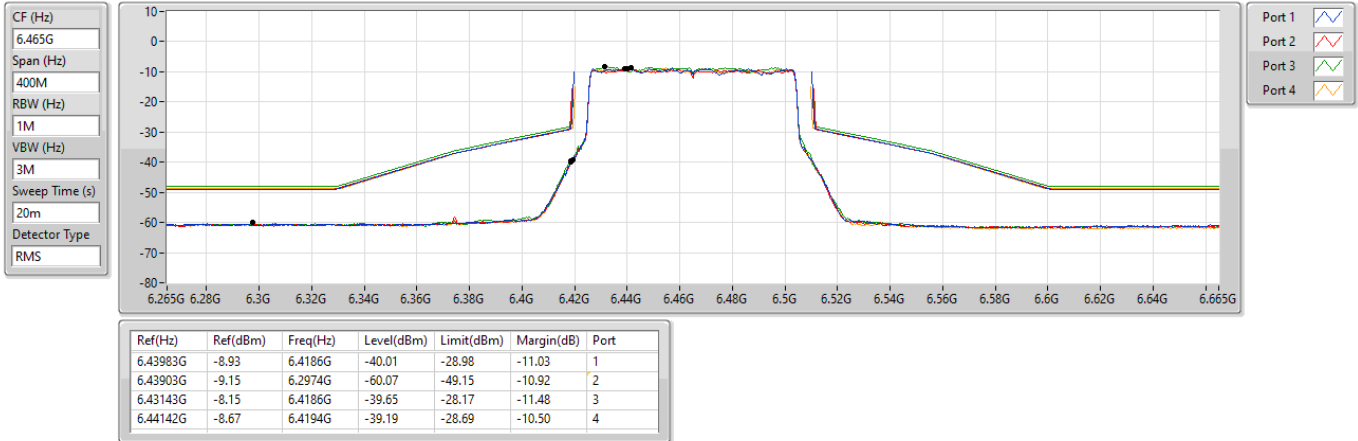

## 6.525-6.875GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

MASK

### 6545MHz Straddle 6.525-6.875GHz\_TX

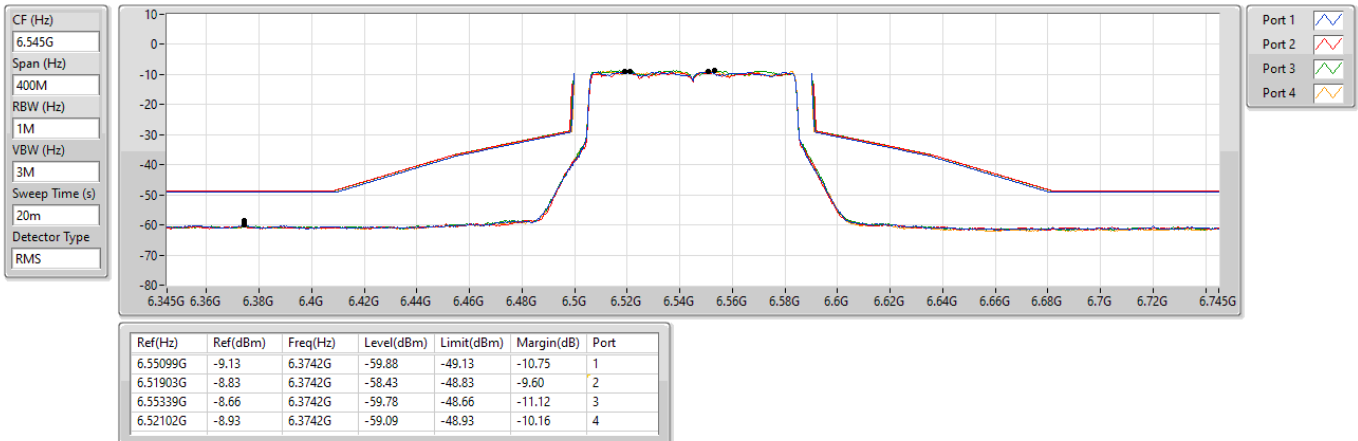




6.525-6.875GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

MASK


6625MHz\_TX

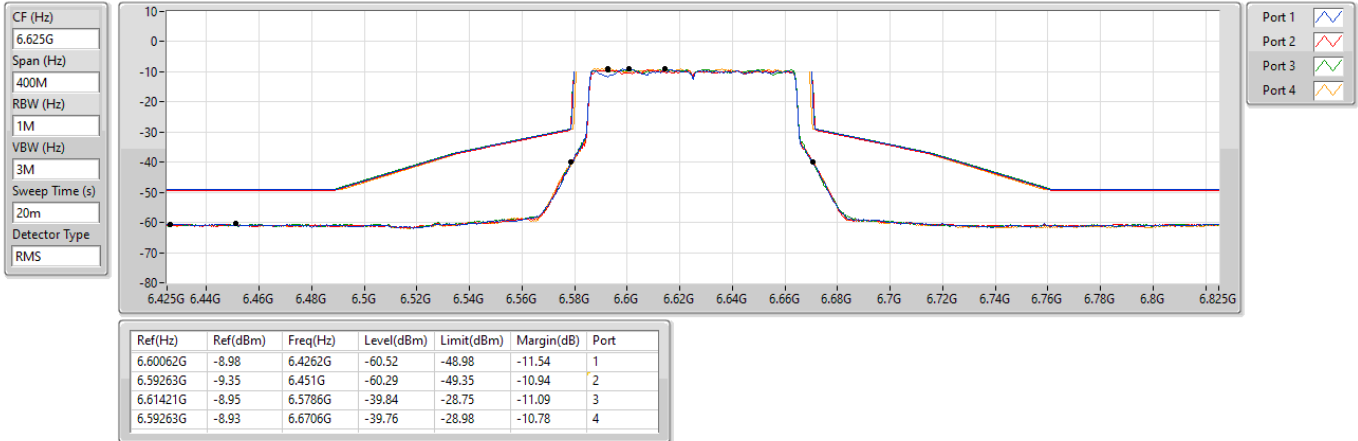

6.525-6.875GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

MASK


6705MHz\_TX

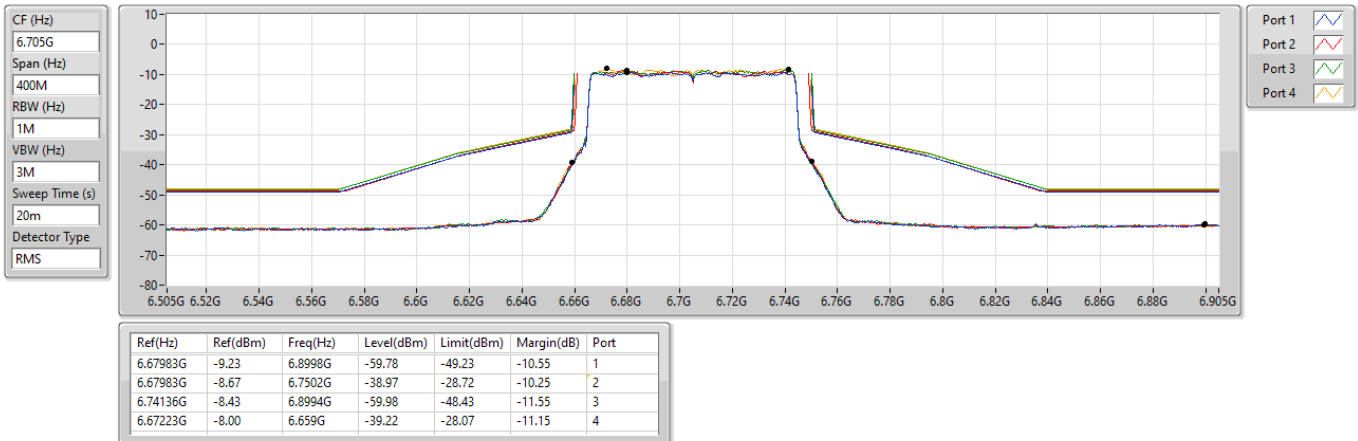

6.525-6.875GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

MASK


6785MHz\_TX

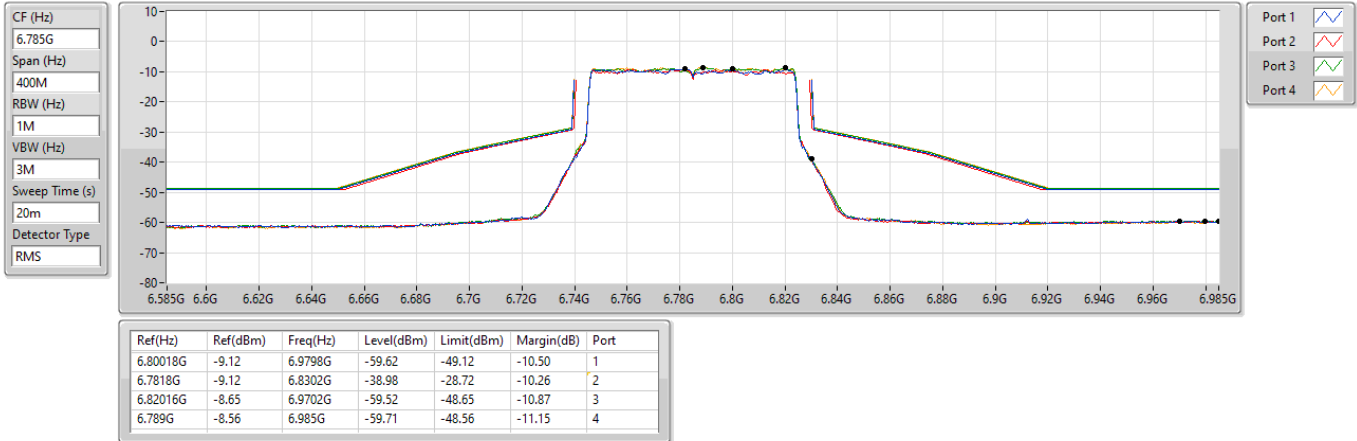

6.525-6.875GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

MASK

6865MHz Straddle 6.525-6.875GHz\_TX

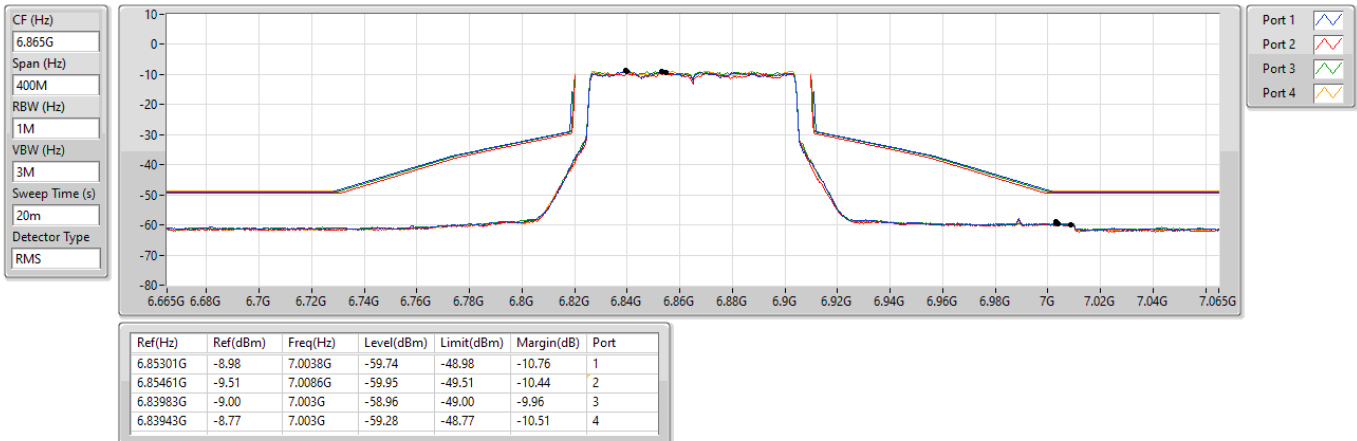




6.875-7.125GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

MASK


6945MHz\_TX

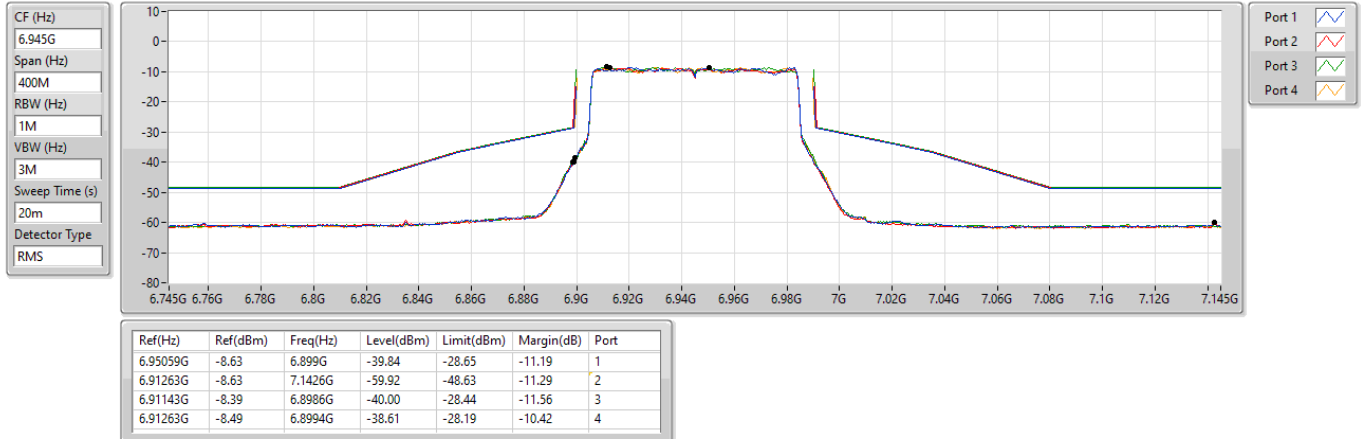

6.875-7.125GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

MASK


7025MHz\_TX

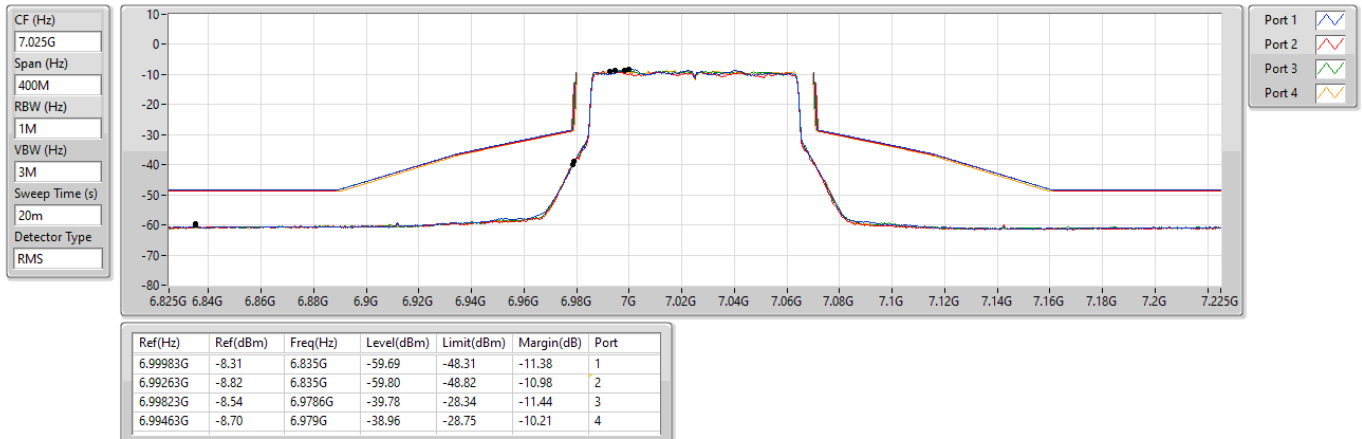

5.925-6.425GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

MASK


6025MHz\_TX

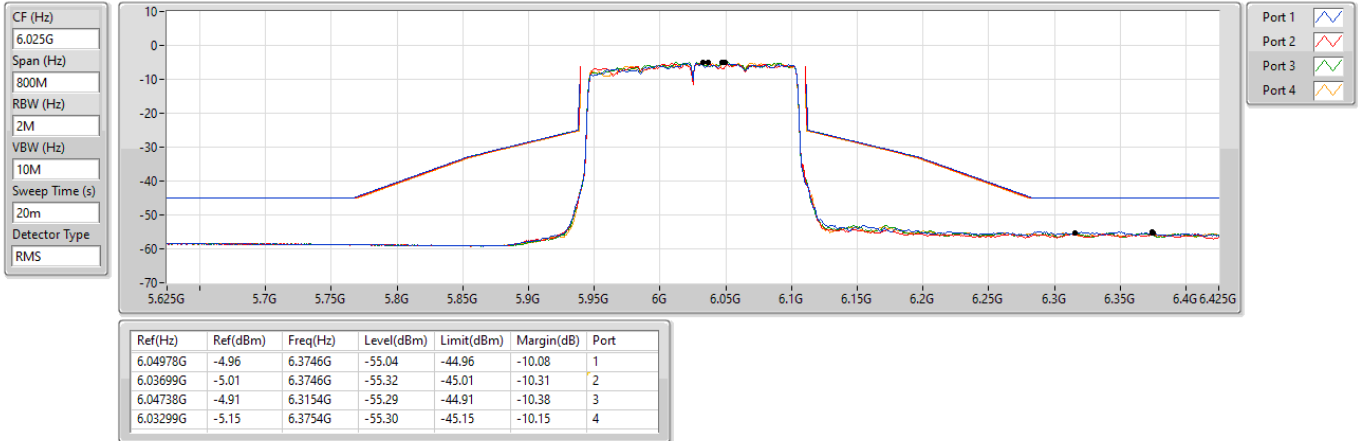

5.925-6.425GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

MASK


6185MHz\_TX

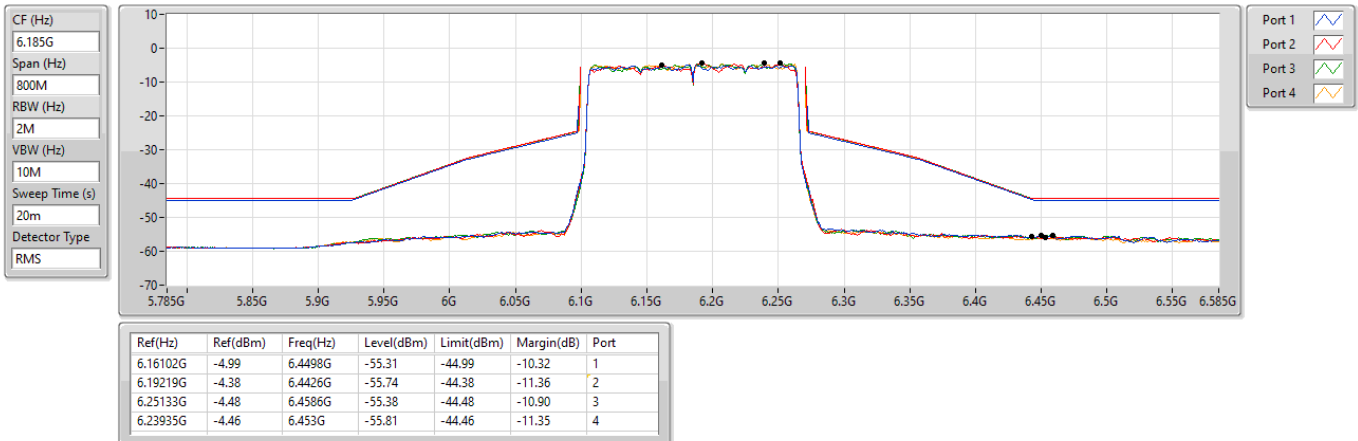

## 5.925-6.425GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

MASK


### 6345MHz\_TX

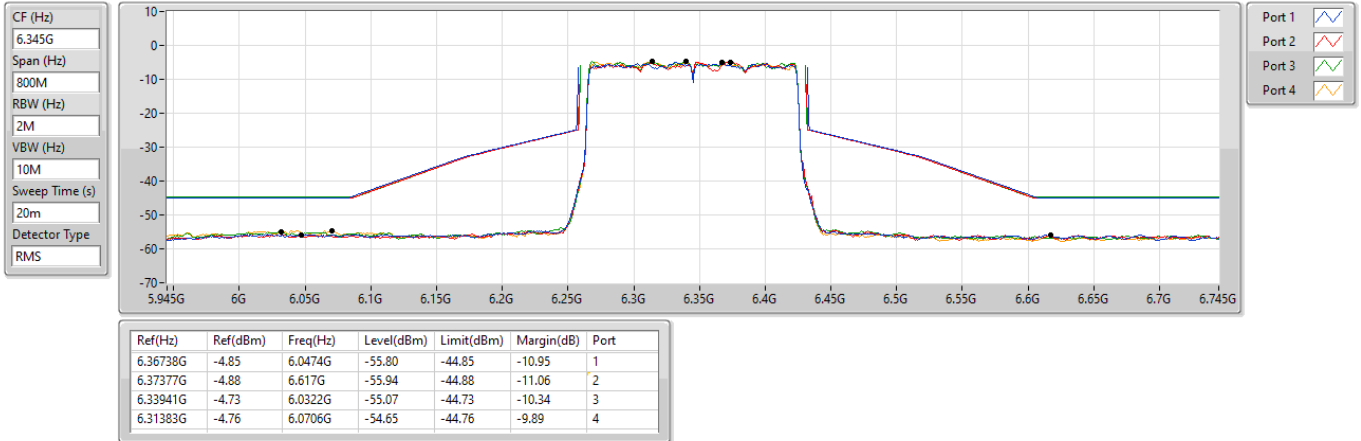

## 6.525-6.875GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

MASK


### 6505MHz Straddle 6.525-6.875GHz\_TX

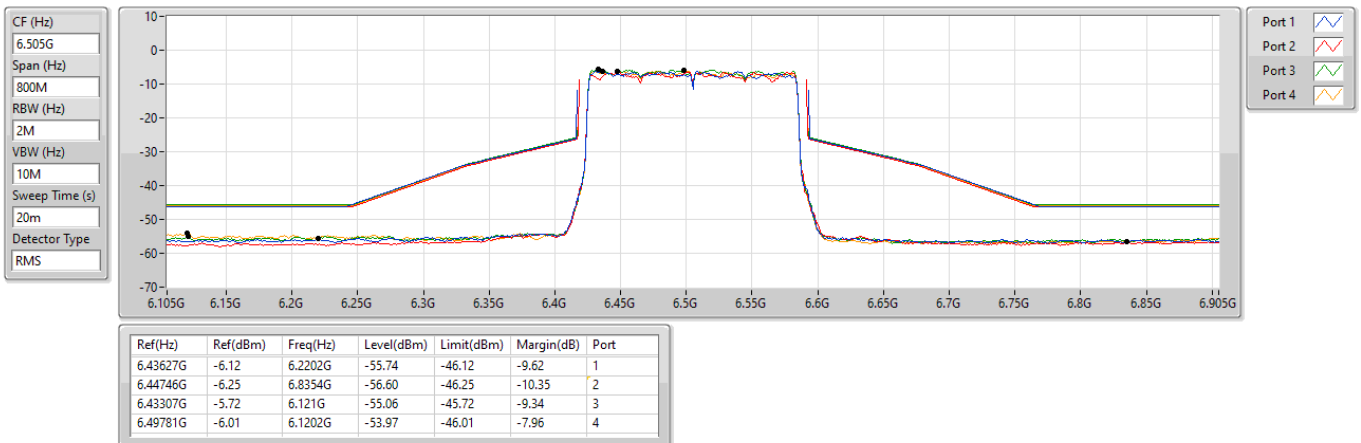

6.525-6.875GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

MASK


6665MHz\_TX

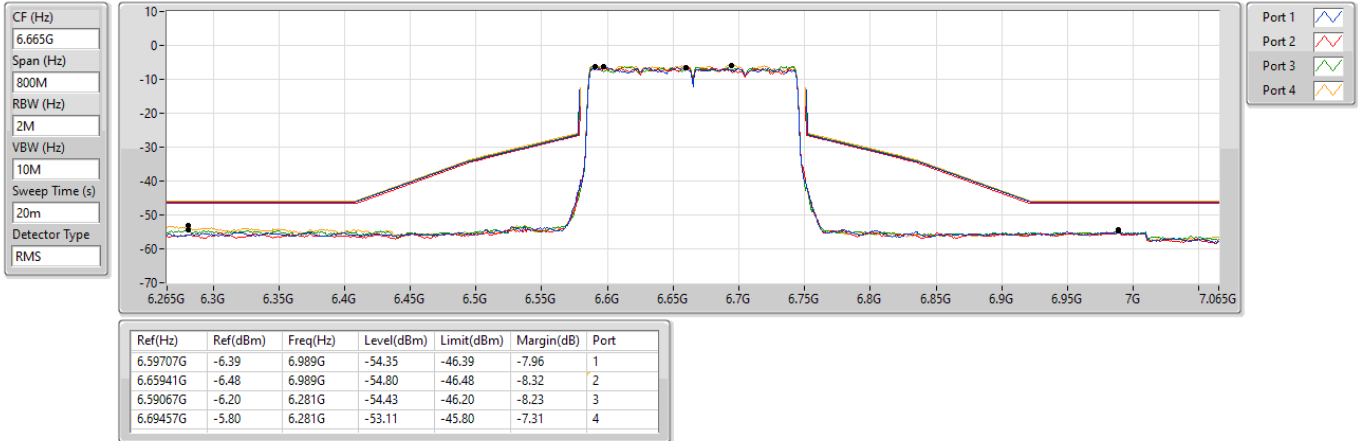

6.525-6.875GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

MASK


6825MHz Straddle 6.525-6.875GHz\_TX

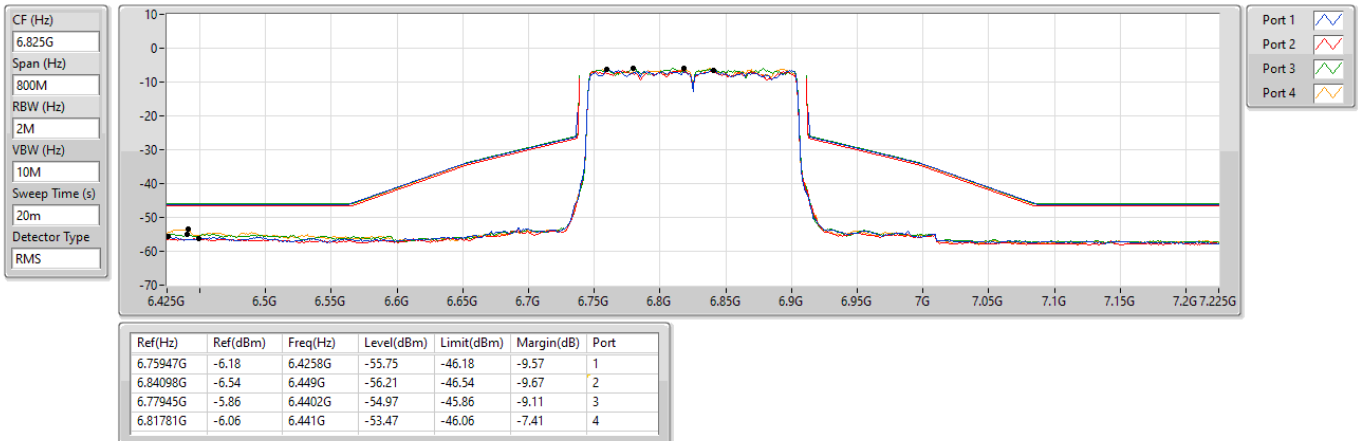

6.875-7.125GHz\_802.11be EHT160\_Nss1,(MCS0)\_4TX

MASK


6985MHz\_TX

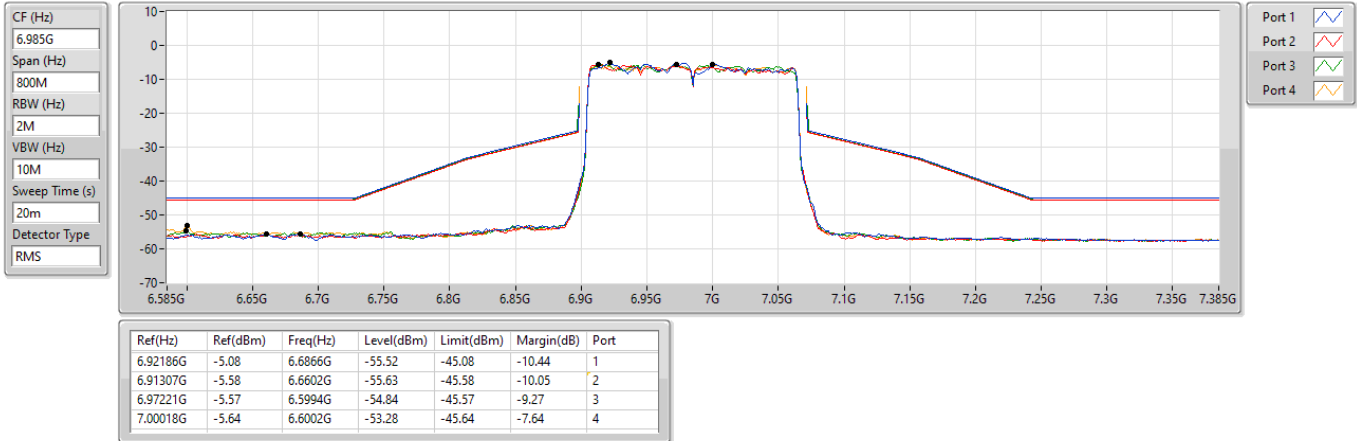

5.925-6.425GHz\_802.11be EHT320\_Nss1,(MCS0)\_4TX

MASK

6105MHz\_TX

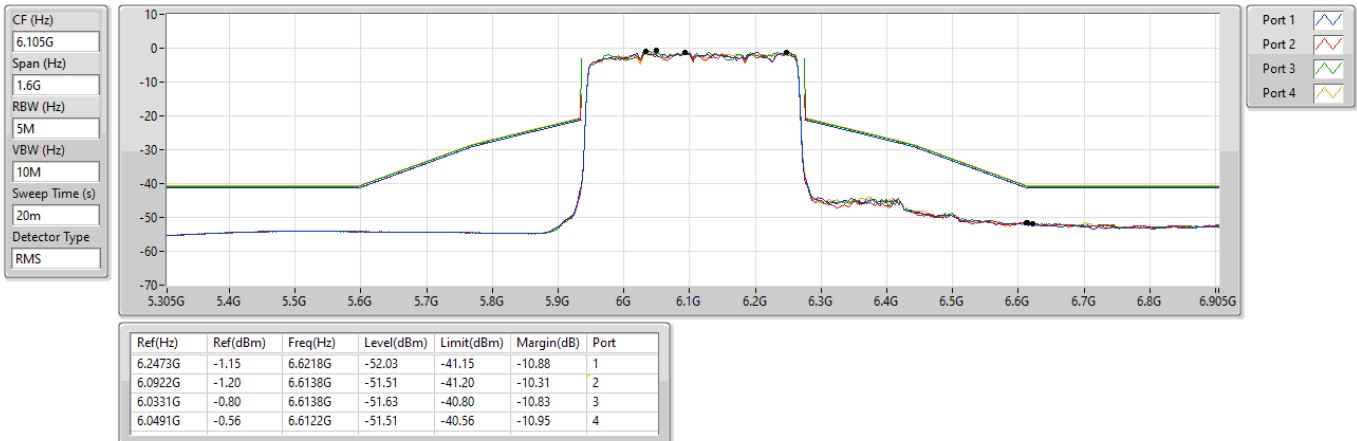




5.925-6.425GHz\_802.11be EHT320\_Nss1,(MCS0)\_4TX

MASK


6265MHz\_TX

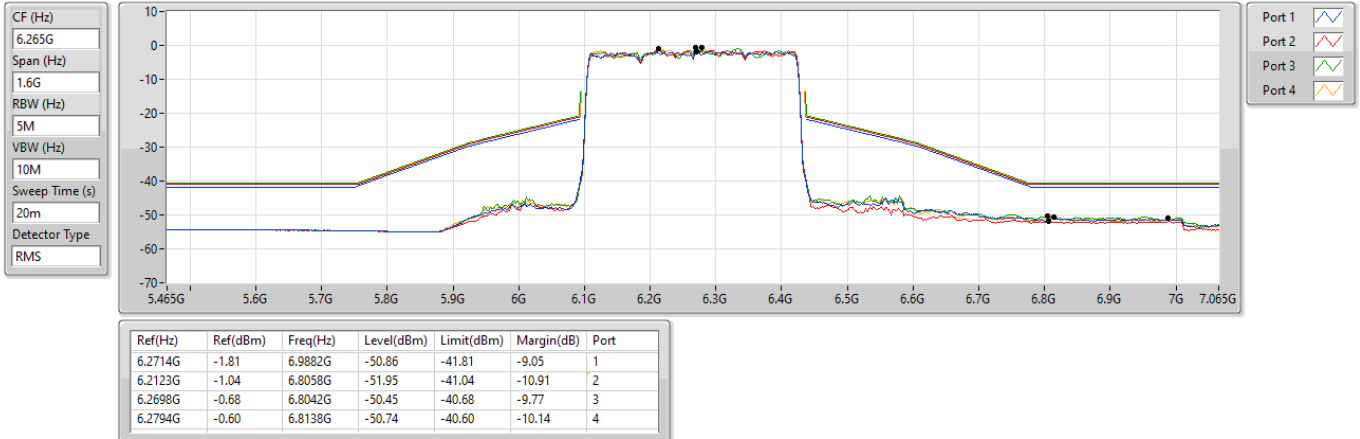

6.525-6.875GHz\_802.11be EHT320\_Nss1,(MCS0)\_4TX

MASK


6425MHz Straddle 6.525-6.875GHz\_TX

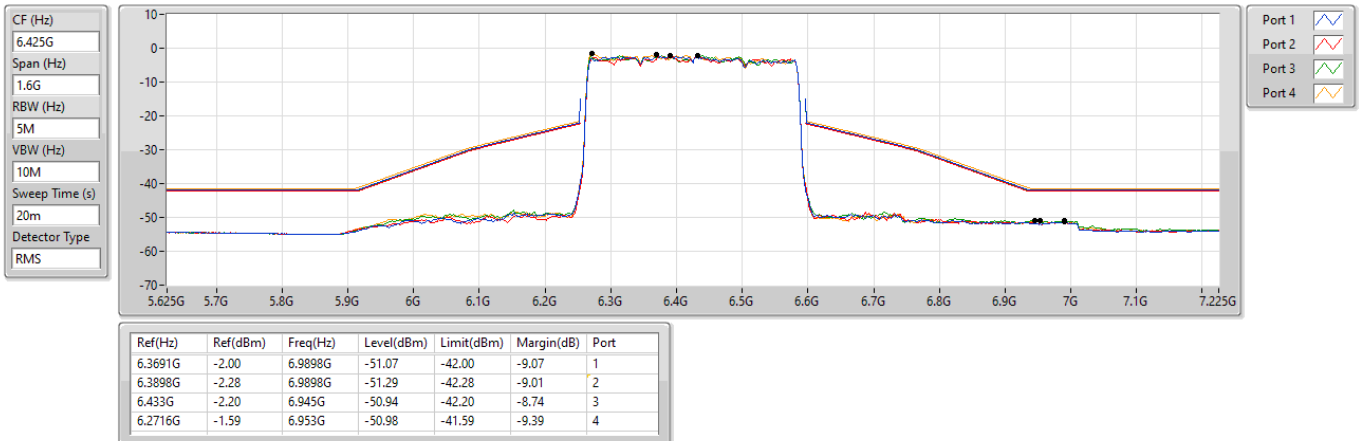

6.525-6.875GHz 802.11be EHT320\_Nss1,(MCS0)\_4TX

MASK


6585MHz Straddle 6.525-6.875GHz\_TX

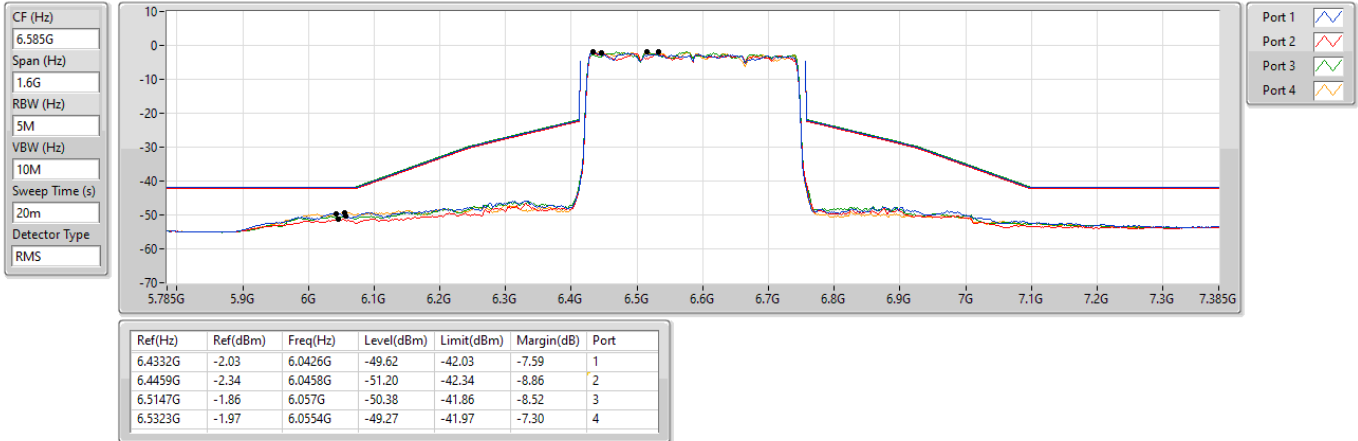

6.525-6.875GHz 802.11be EHT320\_Nss1,(MCS0)\_4TX

MASK

6745MHz Straddle 6.525-6.875GHz\_TX

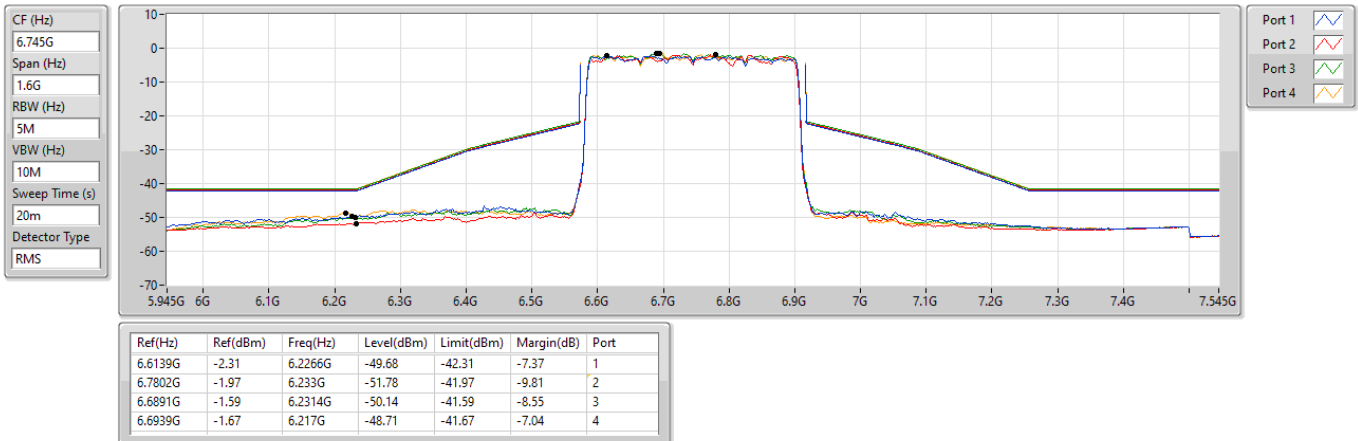




6.525-6.875GHz 802.11be EHT320\_Nss1,(MCS0)\_4TX

MASK

6905MHz Straddle 6.525-6.875GHz\_TX

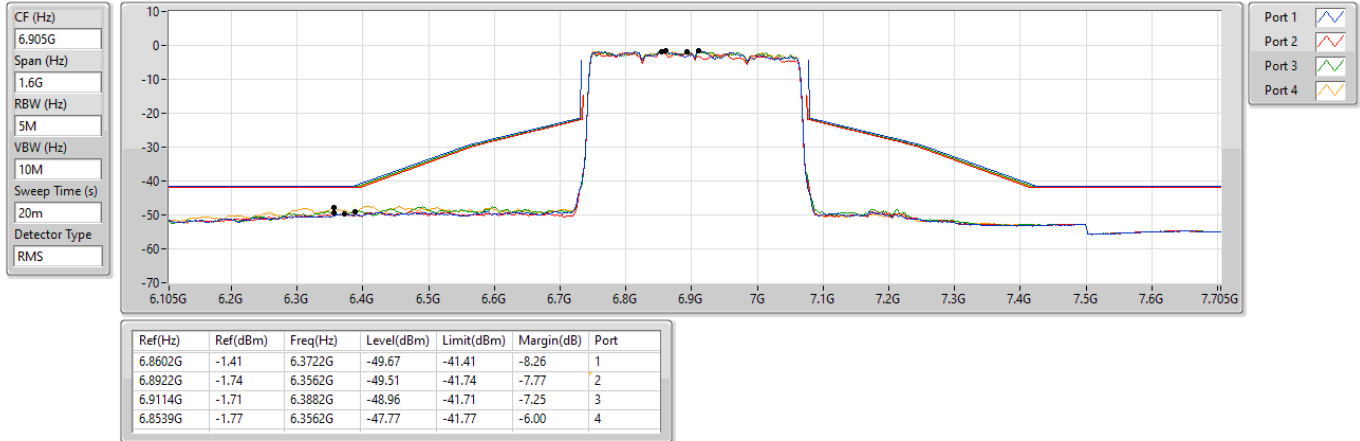



| Frequency:<br>6475 MHz | Frequency Drift (ppm) |           |               |            |
|------------------------|-----------------------|-----------|---------------|------------|
| Temperature (°C)       | 0 minute              | 2 minutes | 5 minutes     | 10 minutes |
| T20°C Vmax             | 4.14                  | 3.99      | 4.36          | 4.22       |
| T20°C Vmin             | 4.10                  | 4.47      | 4.32          | 4.41       |
| T50°C Vnom             | 5.15                  | 4.95      | 5.02          | 5.49       |
| T40°C Vnom             | 4.90                  | 5.13      | 5.08          | 5.16       |
| T30°C Vnom             | 4.46                  | 4.27      | 4.67          | 4.80       |
| T20°C Vnom             | 4.11                  | 3.77      | 4.29          | 3.98       |
| T10°C Vnom             | 1.93                  | 2.09      | 2.49          | 2.08       |
| T0°C Vnom              | 0.33                  | 0.94      | 0.99          | 0.65       |
| Vnom [V]: 120          | Vmax [V]: 138         |           | Vmin [V]: 102 |            |
| Tnom [°C]: 20          | Tmax [°C]: 50         |           | Tmin [°C]: 0  |            |

| Frequency:<br>7015 MHz | Frequency Drift (ppm) |           |               |            |
|------------------------|-----------------------|-----------|---------------|------------|
| Temperature (°C)       | 0 minute              | 2 minutes | 5 minutes     | 10 minutes |
| T20°C Vmax             | 3.65                  | 3.96      | 3.73          | 3.59       |
| T20°C Vmin             | 3.62                  | 3.67      | 3.51          | 3.85       |
| T50°C Vnom             | 4.76                  | 4.51      | 4.89          | 4.88       |
| T40°C Vnom             | 4.59                  | 4.68      | 5.03          | 4.86       |
| T30°C Vnom             | 4.21                  | 4.40      | 4.36          | 4.16       |
| T20°C Vnom             | 3.68                  | 3.49      | 4.06          | 3.82       |
| T10°C Vnom             | 1.49                  | 1.84      | 1.87          | 1.77       |
| T0°C Vnom              | 0.33                  | 0.50      | 0.82          | 0.54       |
| Vnom [V]: 120          | Vmax [V]: 138         |           | Vmin [V]: 102 |            |
| Tnom [°C]: 20          | Tmax [°C]: 50         |           | Tmin [°C]: 0  |            |

| Mode     | UNII Band | Center Frequency (MHz) | Incumbent Frequency (MHz) | Injected (AWGN) Power (dBm) | Antenna gain With path Loss (dBi) | Adjusted Power (dBm) | Detection limit (dBm) | EUT Tx Status |
|----------|-----------|------------------------|---------------------------|-----------------------------|-----------------------------------|----------------------|-----------------------|---------------|
| be EHT20 | 5         | 6195                   | 6194                      | -65.06                      | 5                                 | -70.06               | -62                   | Ceased        |
|          |           |                        |                           | -67.56                      | 5                                 | -72.56               | -62                   | Minimal       |
|          |           |                        |                           | -85.06                      | 5                                 | -90.06               | -62                   | Normal        |
|          | 6         | 6475                   | 6474                      | -64.62                      | 5.46                              | -70.08               | -62                   | Ceased        |
|          |           |                        |                           | -66.92                      | 5.46                              | -72.38               | -62                   | Minimal       |
|          |           |                        |                           | -82.62                      | 5.46                              | -88.08               | -62                   | Normal        |
|          | 7         | 6695                   | 6694                      | -64.63                      | 5.48                              | -70.11               | -62                   | Ceased        |
|          |           |                        |                           | -67.03                      | 5.48                              | -72.51               | -62                   | Minimal       |
|          |           |                        |                           | -84.63                      | 5.48                              | -90.11               | -62                   | Normal        |
|          | 8         | 6995                   | 6994                      | -65.09                      | 5.73                              | -70.82               | -62                   | Ceased        |
|          |           |                        |                           | -67.59                      | 5.73                              | -73.32               | -62                   | Minimal       |
|          |           |                        |                           | -85.09                      | 5.73                              | -90.82               | -62                   | Normal        |

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

| Mode      | UNII Band | Center Frequency (MHz) | Incumbent Frequency (MHz) | Injected (AWGN) Power (dBm) | Antenna gain with path Loss (dBi) | Adjusted Power (dBm) | Detection limit (dBm) | EUT Tx Status |
|-----------|-----------|------------------------|---------------------------|-----------------------------|-----------------------------------|----------------------|-----------------------|---------------|
| be EHT320 | 5         | 6105                   | 6100                      | -63.08                      | 5                                 | -68.08               | -62                   | Ceased        |
|           |           |                        |                           | -65.38                      | 5                                 | -70.38               | -62                   | Minimal       |
|           |           |                        |                           | -83.08                      | 5                                 | -88.08               | -62                   | Normal        |
|           | 5 / 6 / 7 | 6425                   | 6580                      | -64.54                      | 5                                 | -69.54               | -62                   | Ceased        |
|           |           |                        |                           | -66.94                      | 5                                 | -71.94               | -62                   | Minimal       |
|           |           |                        |                           | -84.54                      | 5                                 | -89.54               | -62                   | Normal        |
|           | 7 / 8     | 6905                   | 6900                      | -63.83                      | 5.48                              | -69.31               | -62                   | Ceased        |
|           |           |                        |                           | -66.63                      | 5.48                              | -72.11               | -62                   | Minimal       |
|           |           |                        |                           | -83.83                      | 5.48                              | -89.31               | -62                   | Normal        |


Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

| Mode     | UNII Band | Center Frequency (MHz) | Incumbent Frequency (MHz) | Injected (AWGN) Power (dBm) | Adjusted Power (dBm) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Detection Probability (%) | Limit (%) |
|----------|-----------|------------------------|---------------------------|-----------------------------|----------------------|---|---|---|---|---|---|---|---|---|----|---------------------------|-----------|
| be EHT20 | 5         | 6195                   | 6194                      | -65.06                      | -70.06               | V | V | V | V | V | V | V | V | X | V  | 90                        | 90        |
|          | 6         | 6475                   | 6474                      | -64.62                      | -70.08               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|          | 7         | 6695                   | 6694                      | -64.63                      | -70.11               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|          | 8         | 6995                   | 6994                      | -65.09                      | -70.82               | V | V | V | V | V | V | V | X | V | V  | 90                        | 90        |


| Mode      | UNII Band | Center Frequency (MHz) | Incumbent Frequency (MHz) | Injected (AWGN) Power (dBm) | Adjusted Power (dBm) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Detection Probability (%) | Limit (%) |
|-----------|-----------|------------------------|---------------------------|-----------------------------|----------------------|---|---|---|---|---|---|---|---|---|----|---------------------------|-----------|
| be EHT320 | 5         | 6105                   | 5950                      | -63.63                      | -68.63               | V | V | V | V | V | V | V | X | V | V  | 90                        | 90        |
|           |           |                        | 6100                      | -63.08                      | -68.08               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|           |           |                        | 6260                      | -63.63                      | -68.63               | V | V | V | V | V | V | V | V | X | V  | 90                        | 90        |
|           | 5 / 6 / 7 | 6425                   | 6270                      | -64.63                      | -69.63               | V | V | V | V | V | V | V | X | V | V  | 90                        | 90        |
|           |           |                        | 6420                      | -64.76                      | -69.76               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|           |           |                        | 6580                      | -64.54                      | -69.54               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|           | 7 / 8     | 6905                   | 6750                      | -64.35                      | -69.83               | V | V | V | V | V | V | V | X | V | V  | 90                        | 90        |
|           |           |                        | 6900                      | -63.83                      | -69.31               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|           |           |                        | 7060                      | -64.75                      | -70.23               | V | V | V | V | V | V | X | V | V | V  | 90                        | 90        |

## Test plot of Incumbent signal


BW: 20 MHz / Frequency: 6194 MHz

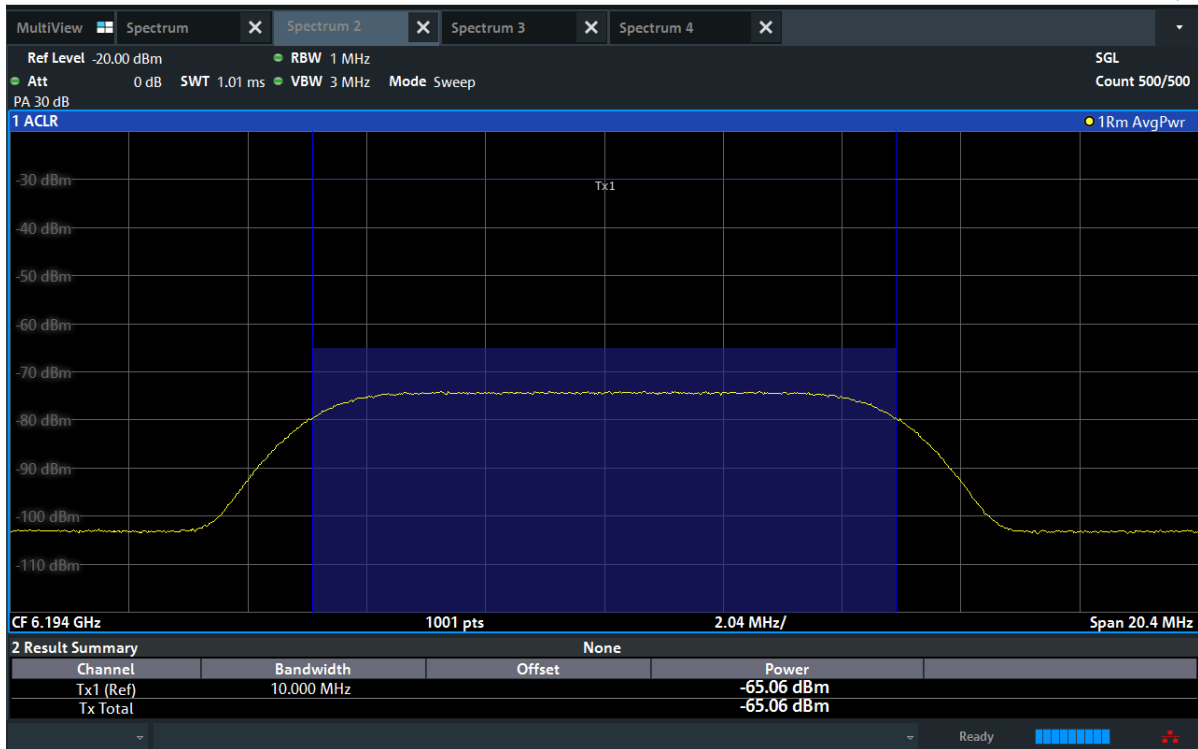


BW: 20 MHz / Frequency: 6474 MHz

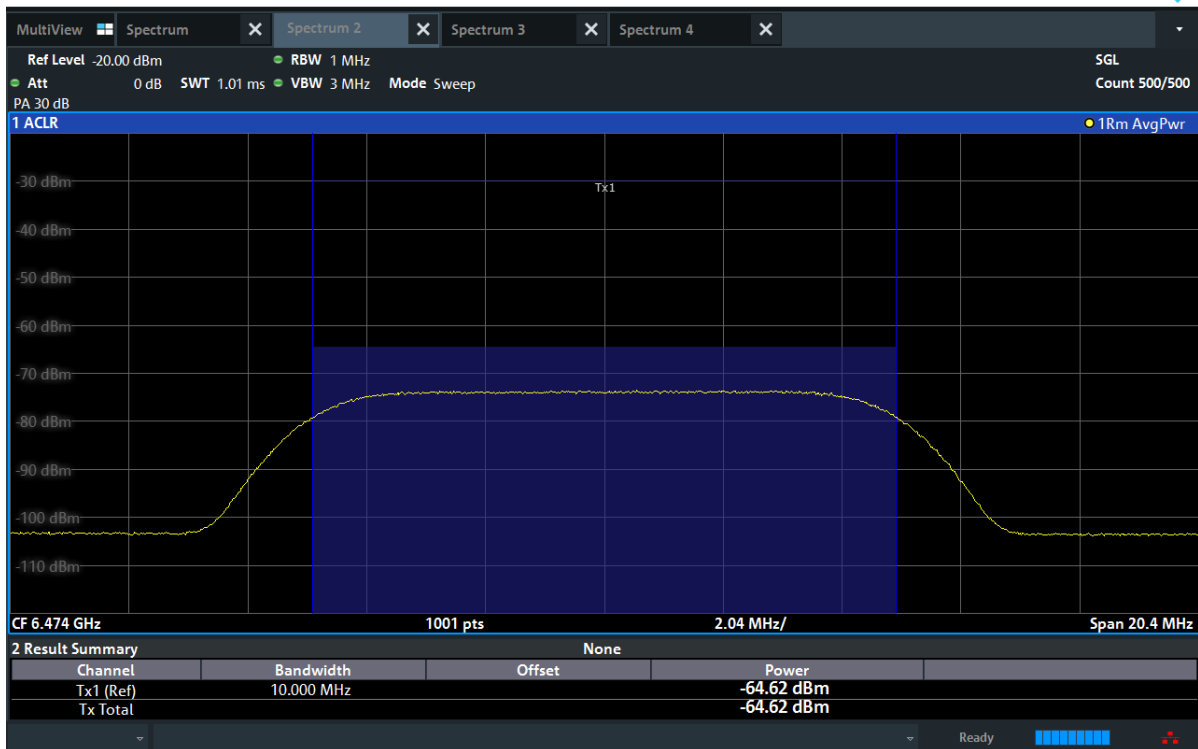


BW: 20 MHz / Frequency: 6694 MHz

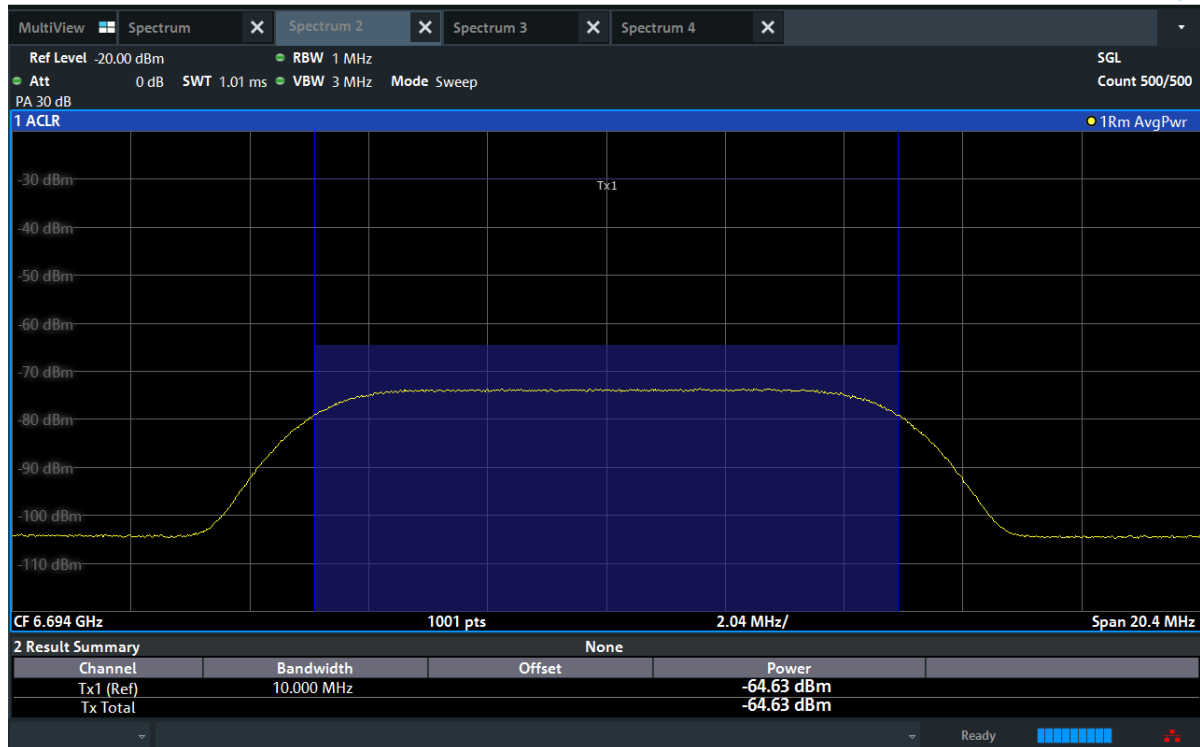


BW: 20 MHz / Frequency: 6994 MHz

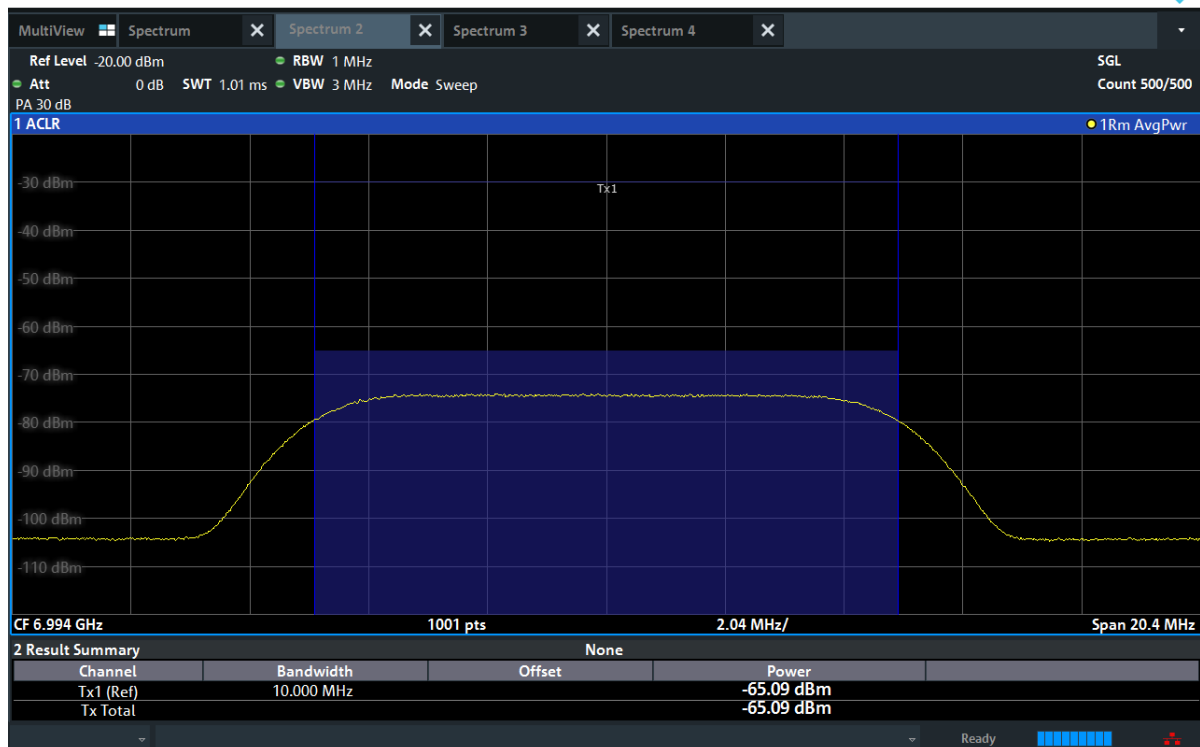


BW: 320 MHz / Frequency: 5950 MHz

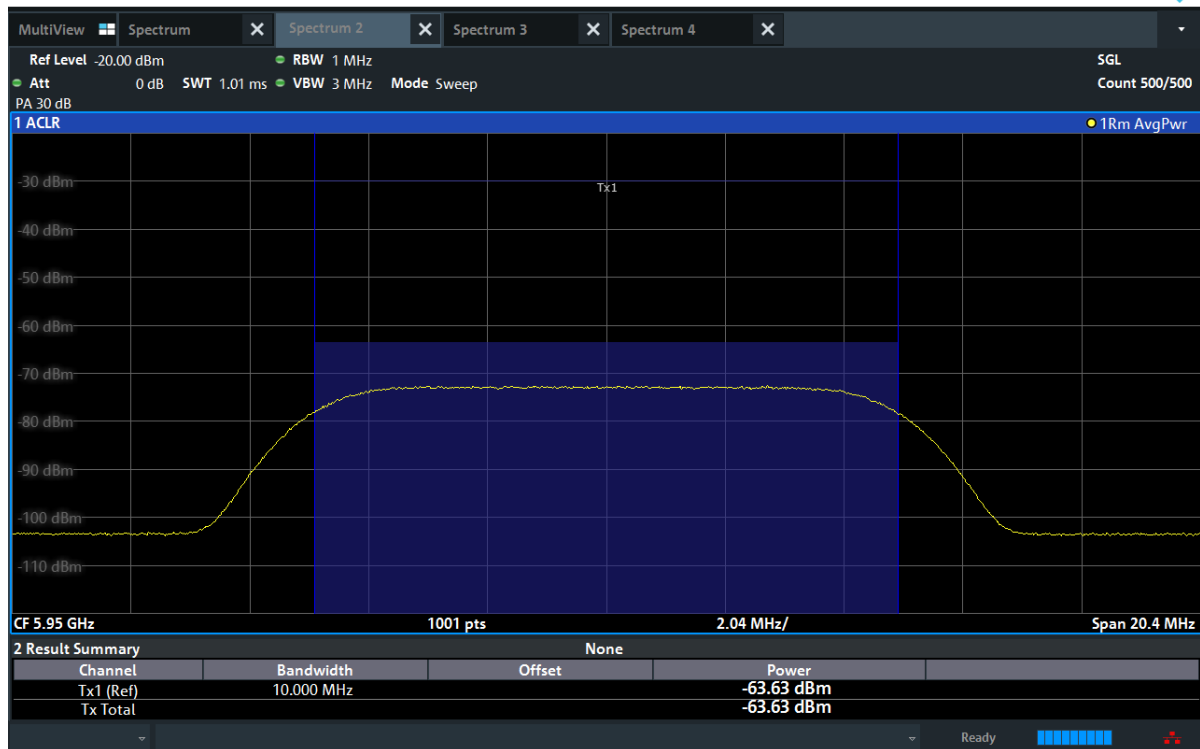


BW: 320 MHz / Frequency: 6100 MHz

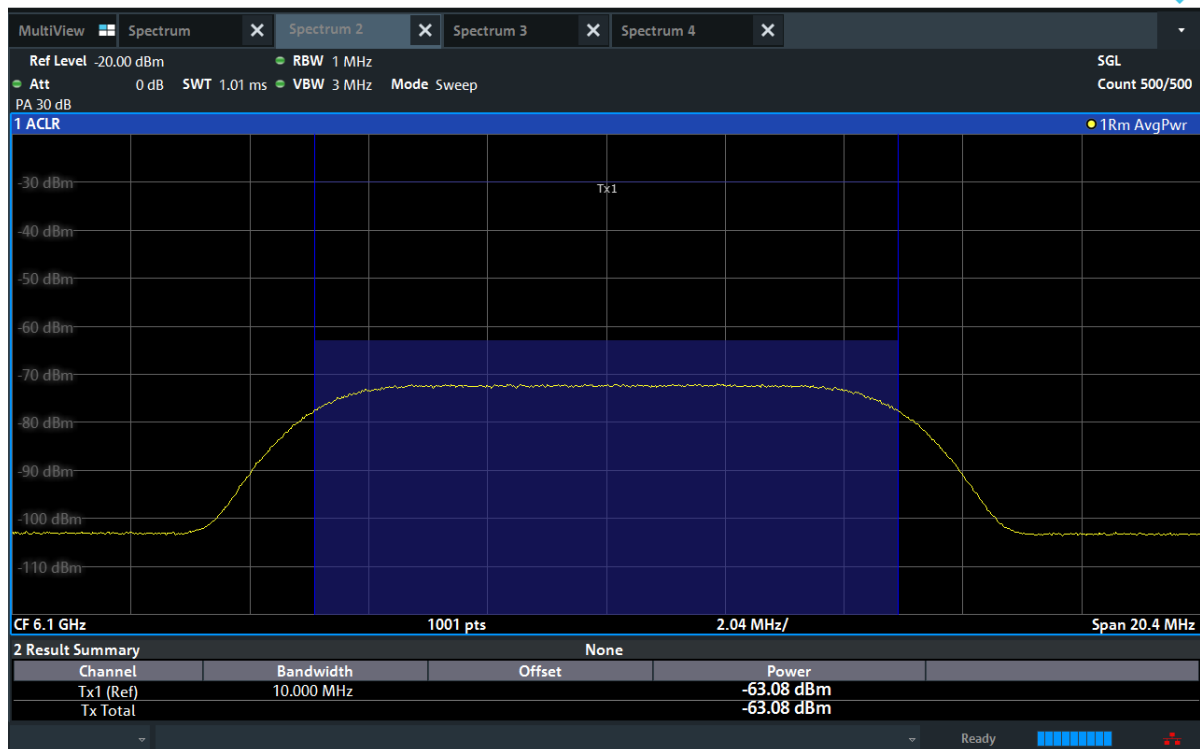


BW: 320 MHz / Frequency: 6260 MHz

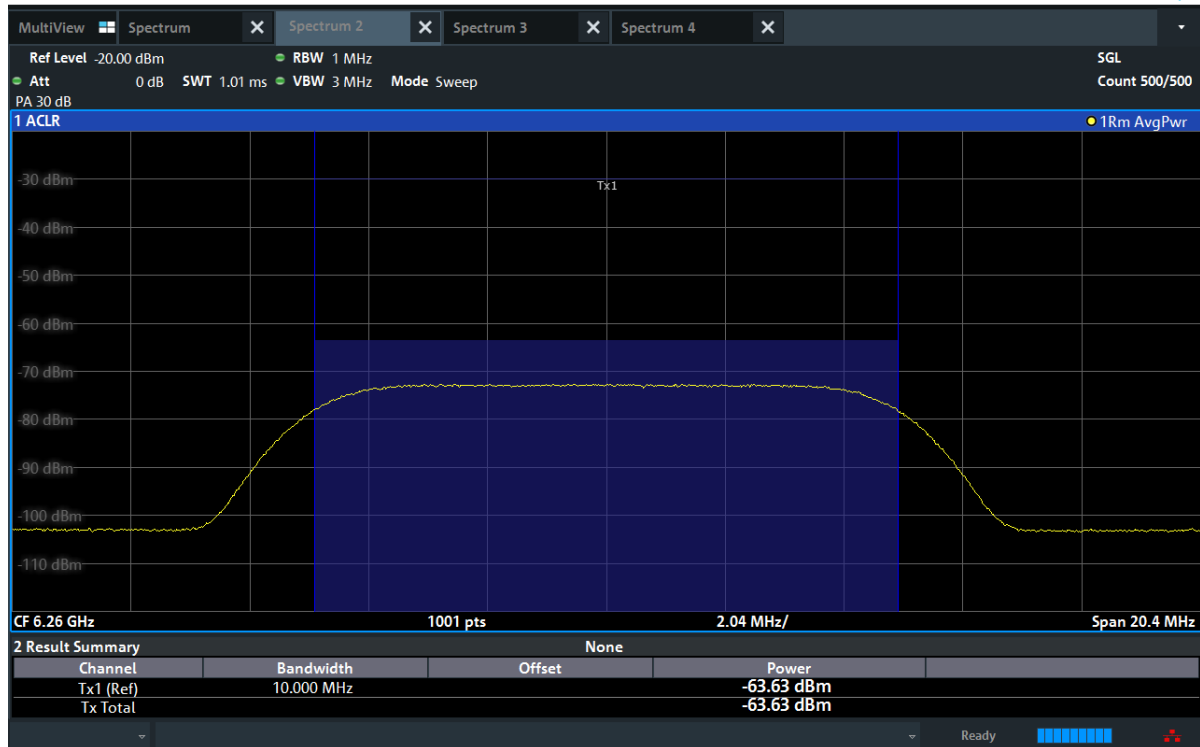


BW: 320 MHz / Frequency: 6270 MHz

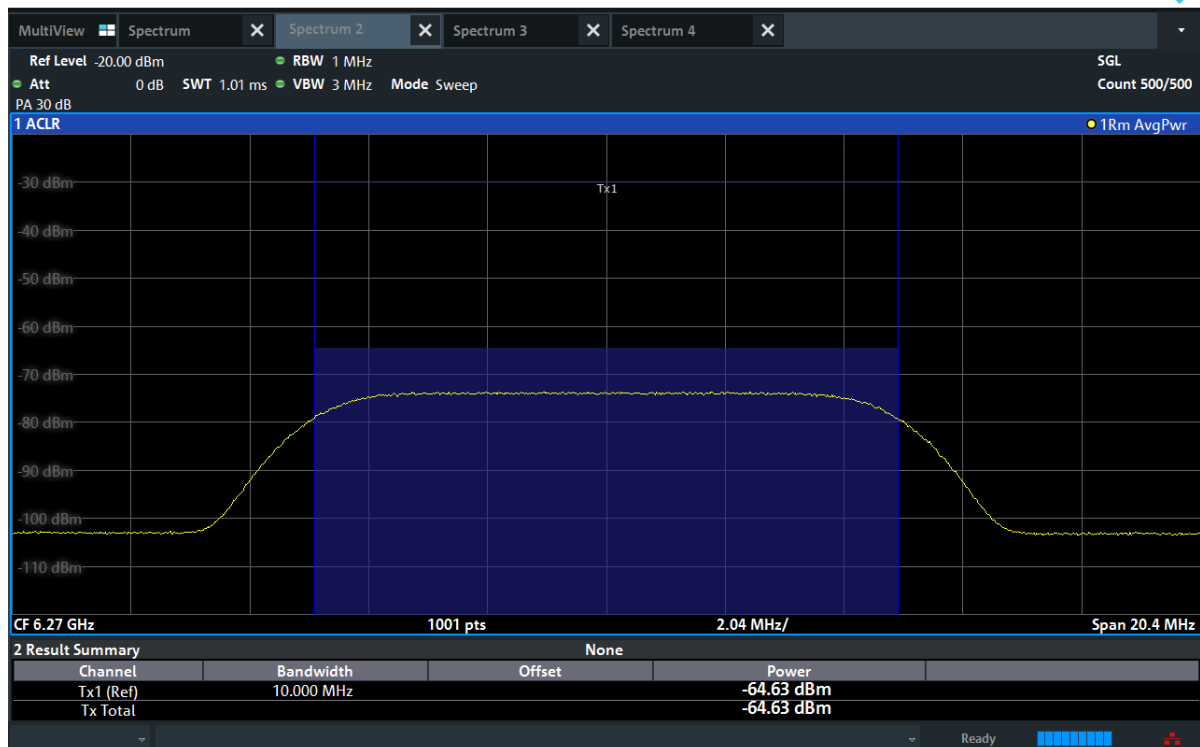


BW: 320 MHz / Frequency: 6420 MHz

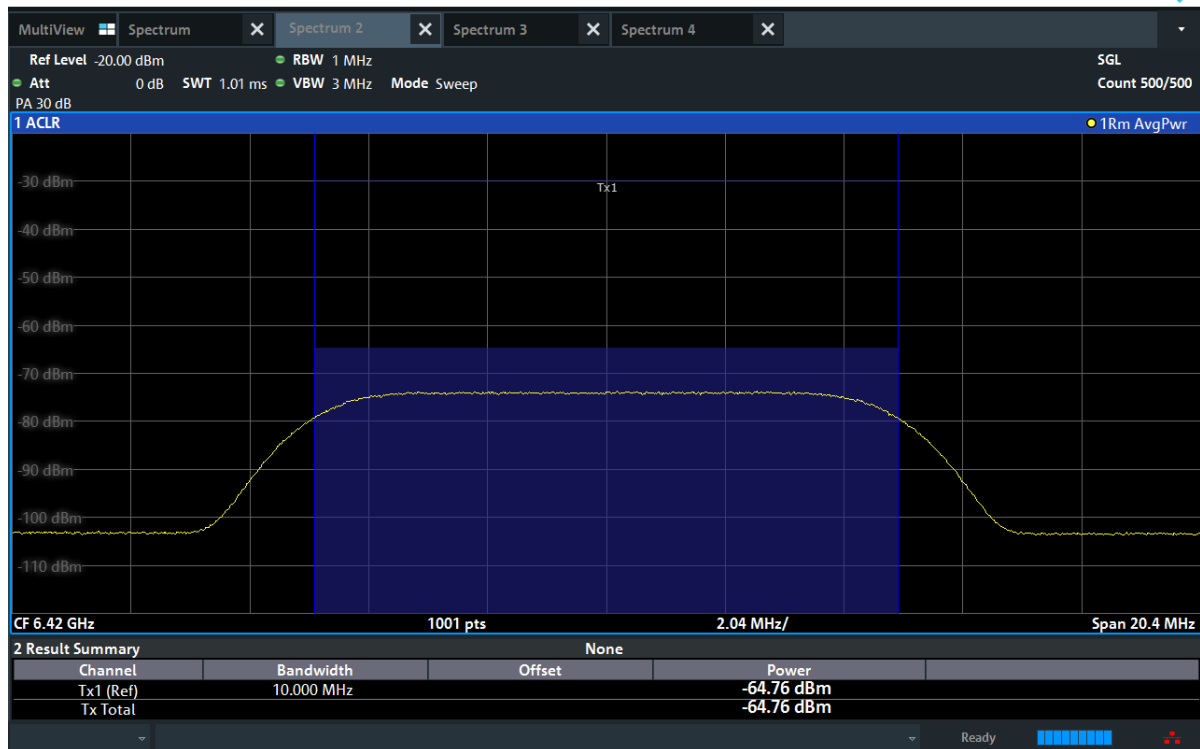


BW: 320 MHz / Frequency: 6580 MHz

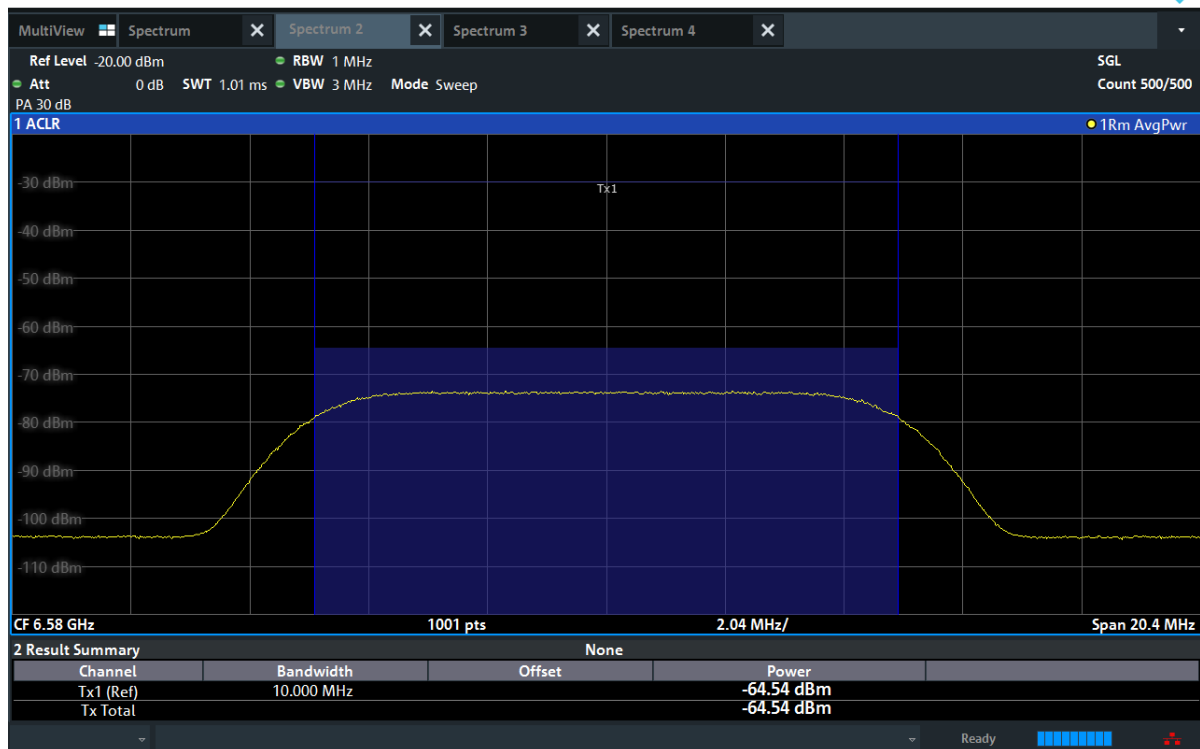


BW: 320 MHz / Frequency: 6750 MHz

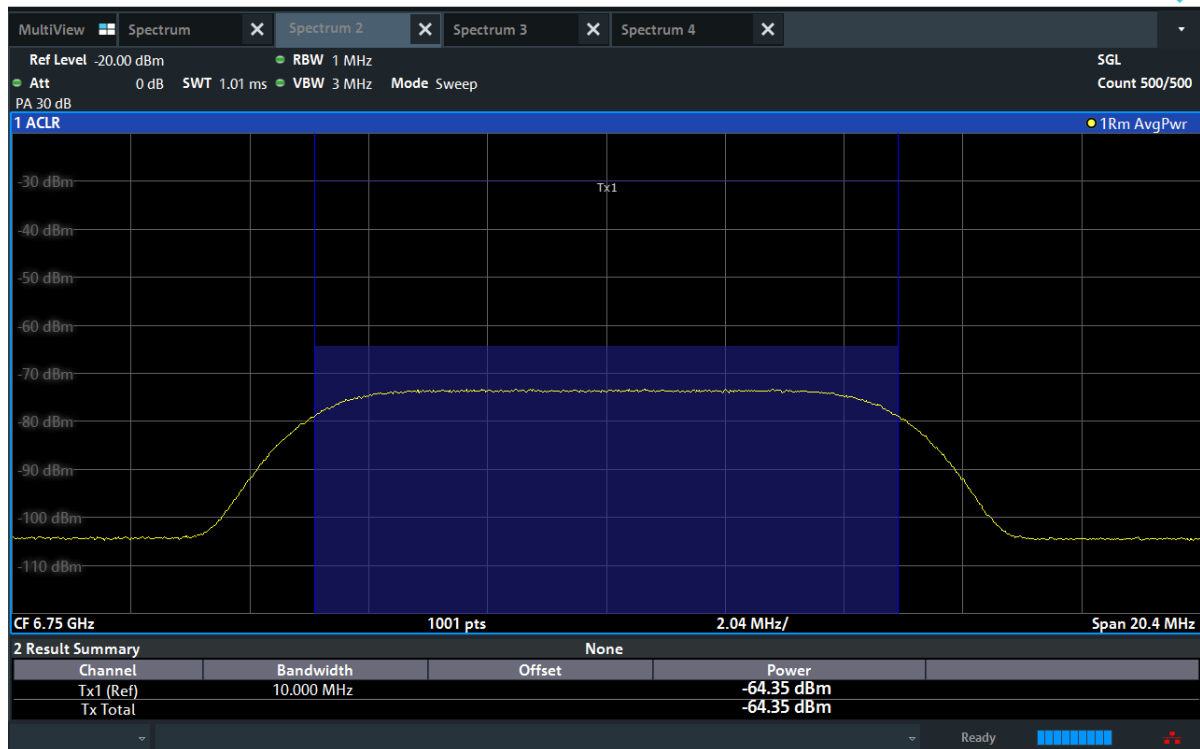

BW: 320 MHz / Frequency: 6900 MHz

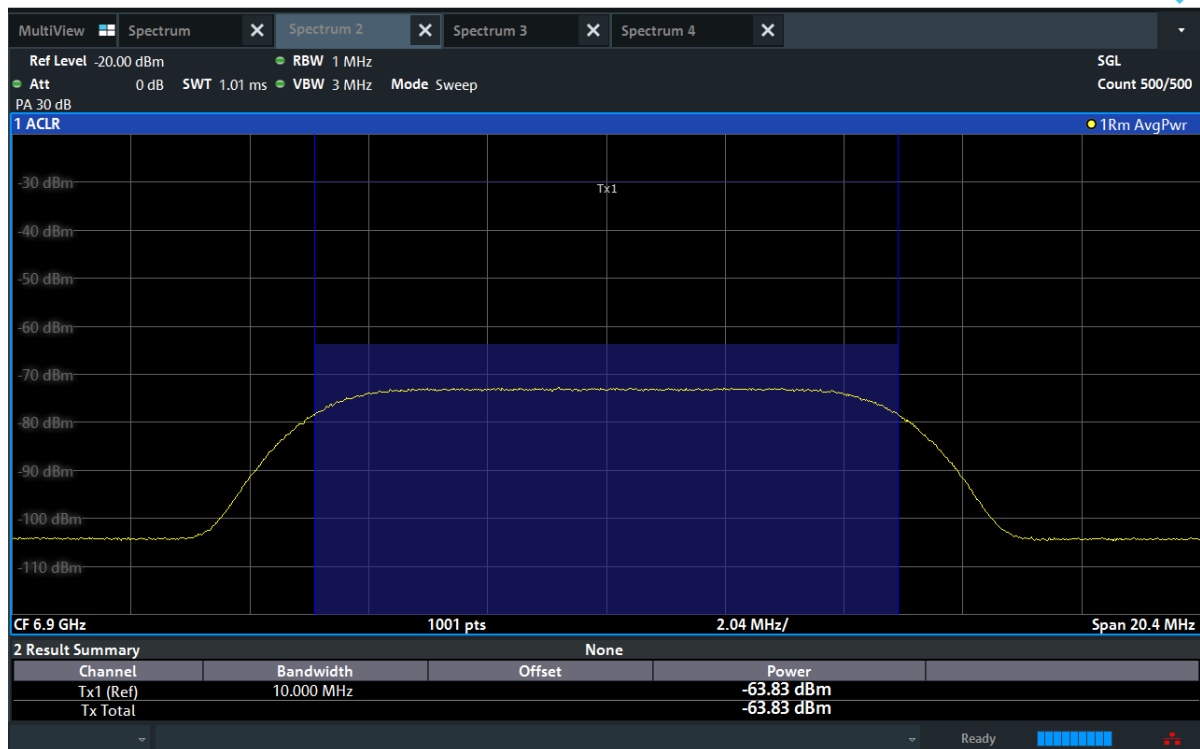


BW: 320 MHz / Frequency: 7060 MHz

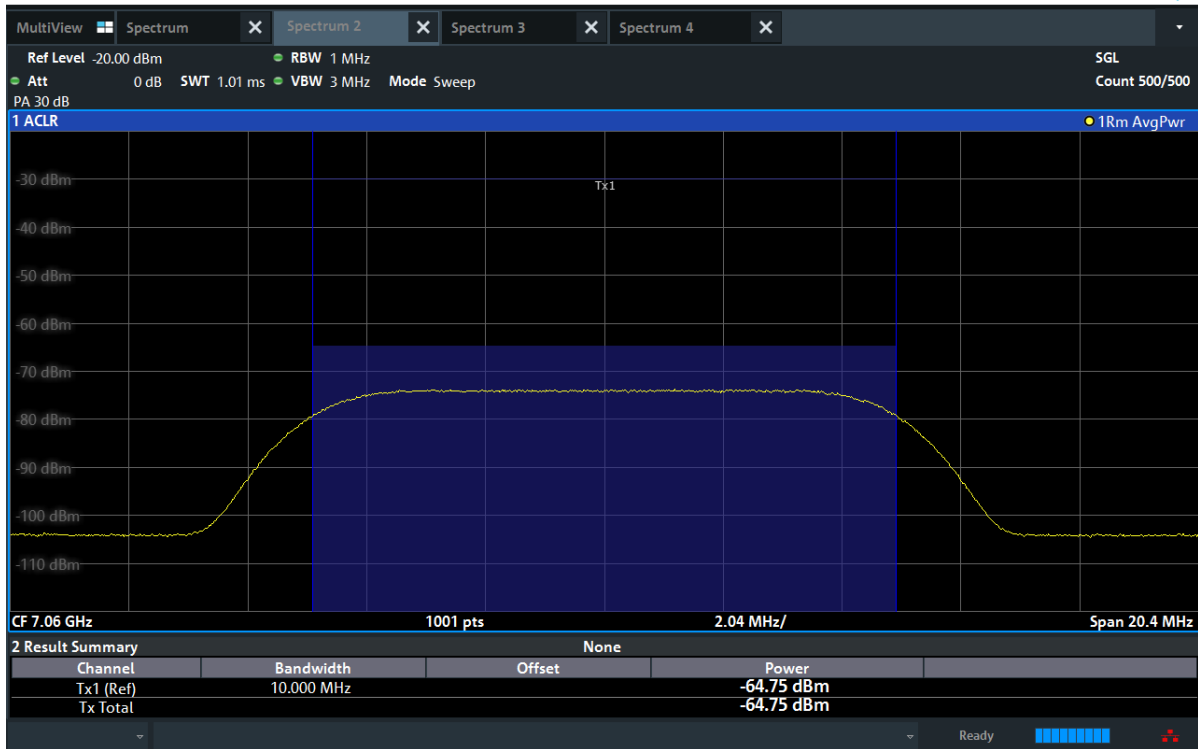


## Test plot of Contention Based Protocol EUT Normal transmission


BW: 20 MHz / Frequency: 6194 MHz

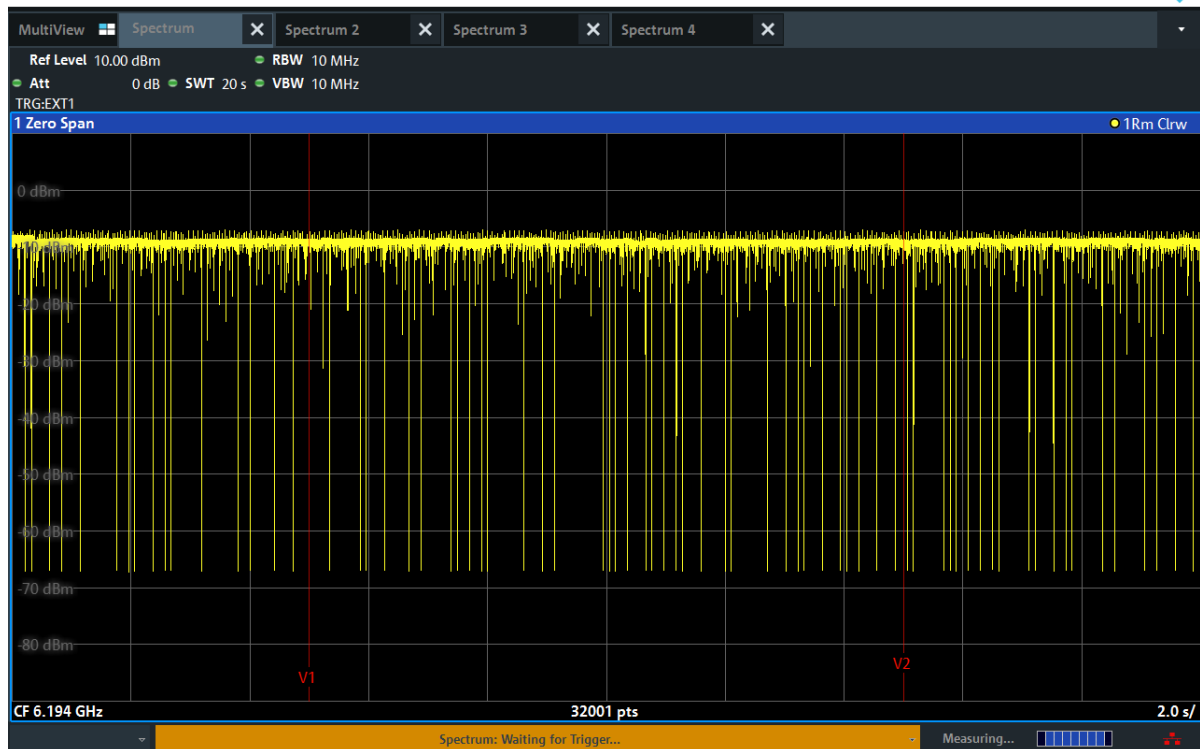


BW: 20 MHz / Frequency: 6474 MHz

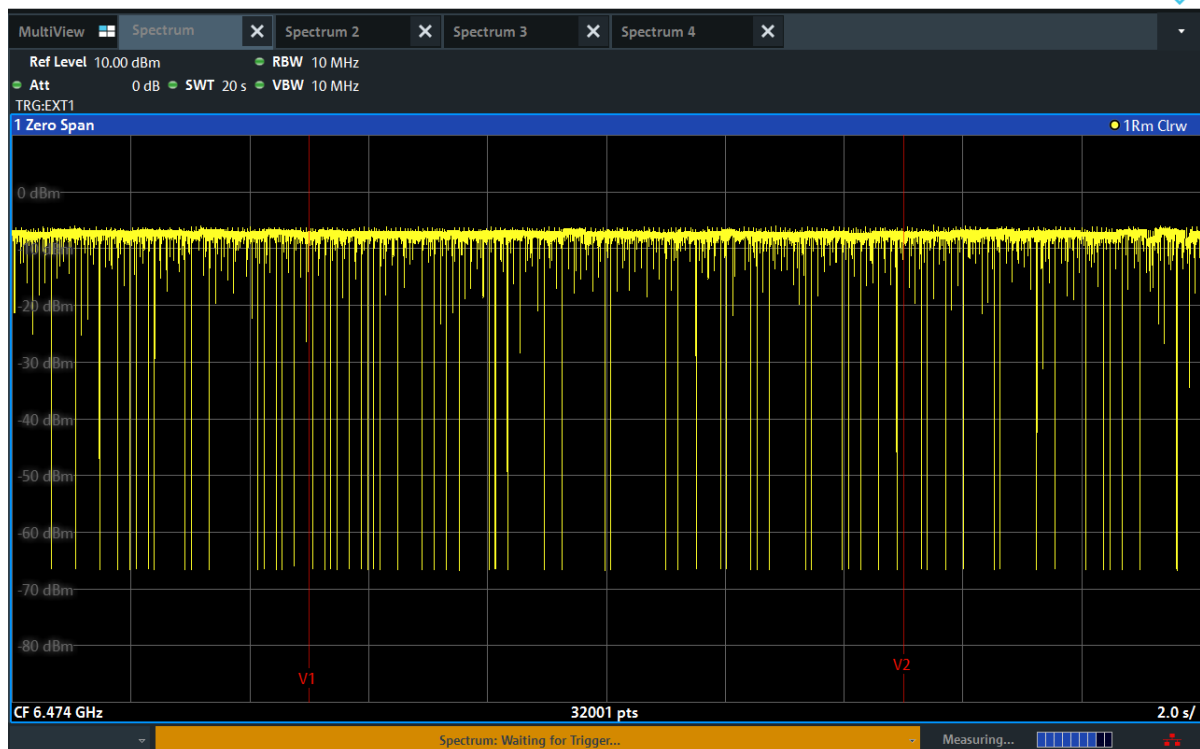


BW: 20 MHz / Frequency: 6694 MHz

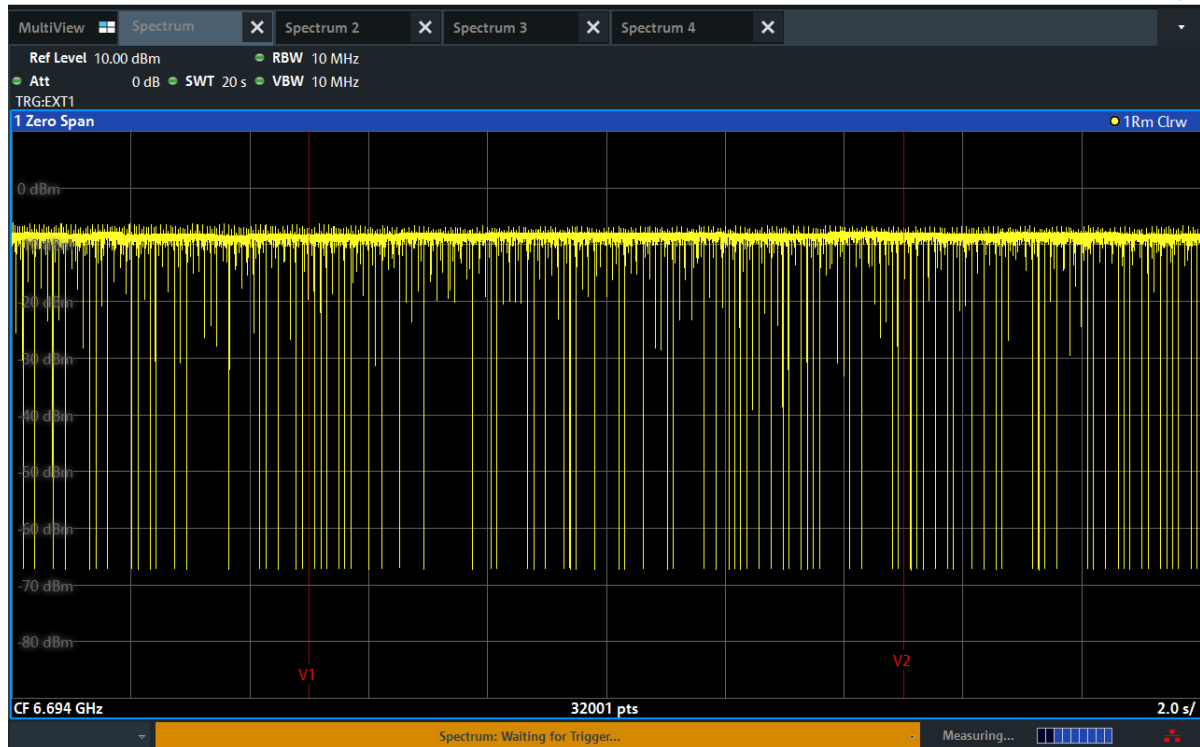

BW: 20 MHz / Frequency: 6994 MHz

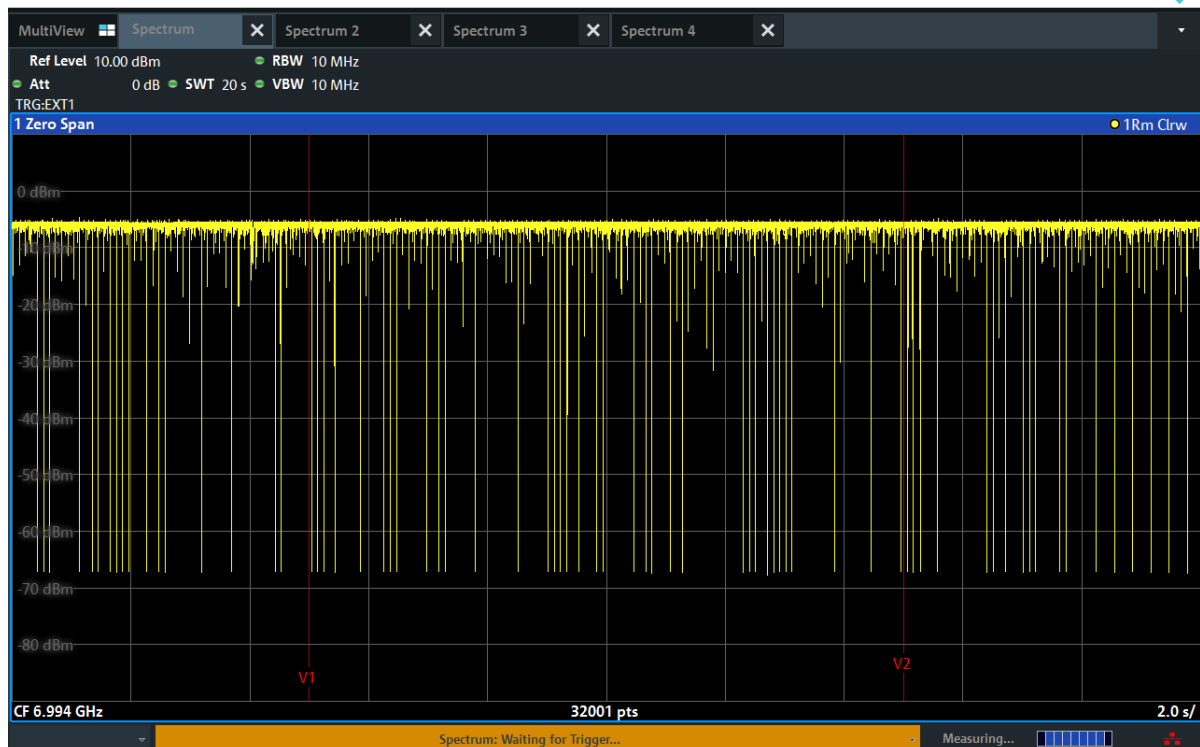


BW: 320 MHz / Frequency: 6100 MHz

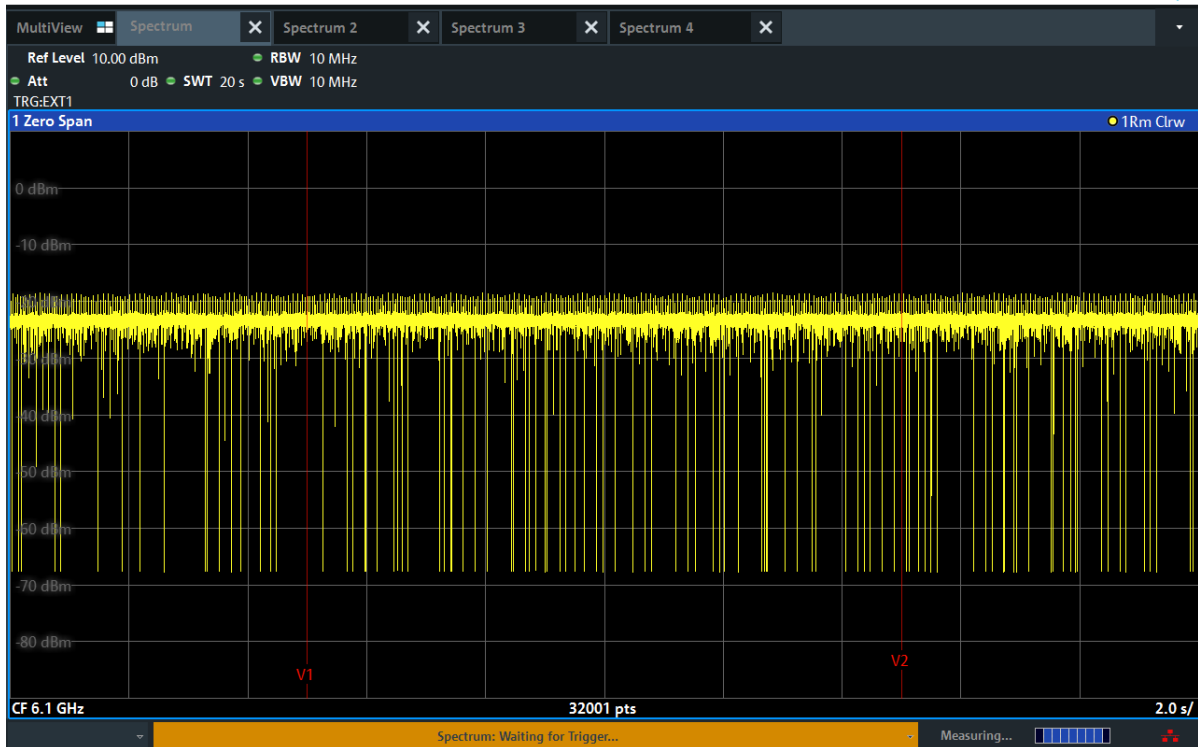


BW: 320 MHz / Frequency: 6580 MHz



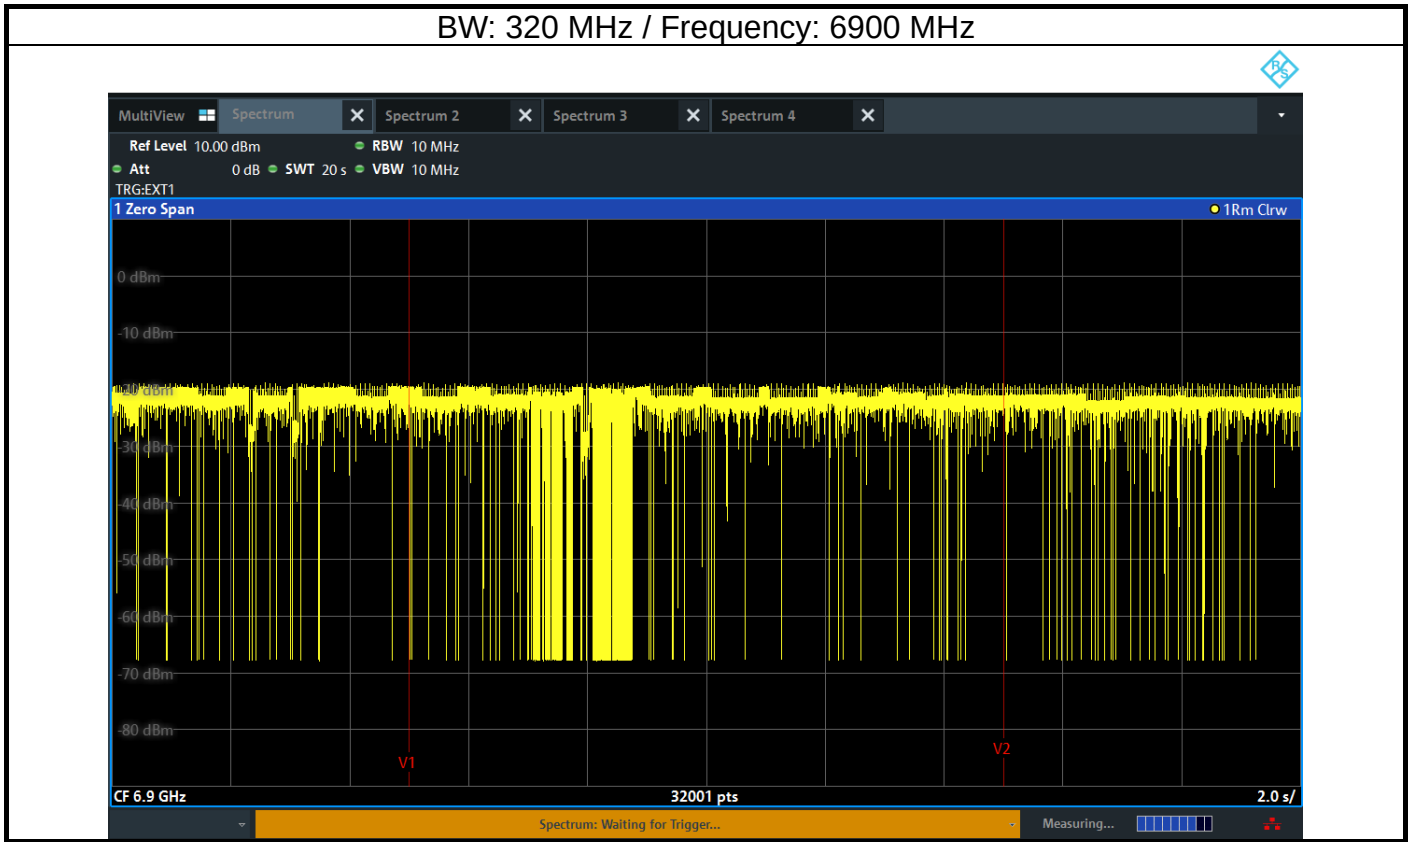


## EUT Minimal transmission


BW: 20 MHz / Frequency: 6194 MHz

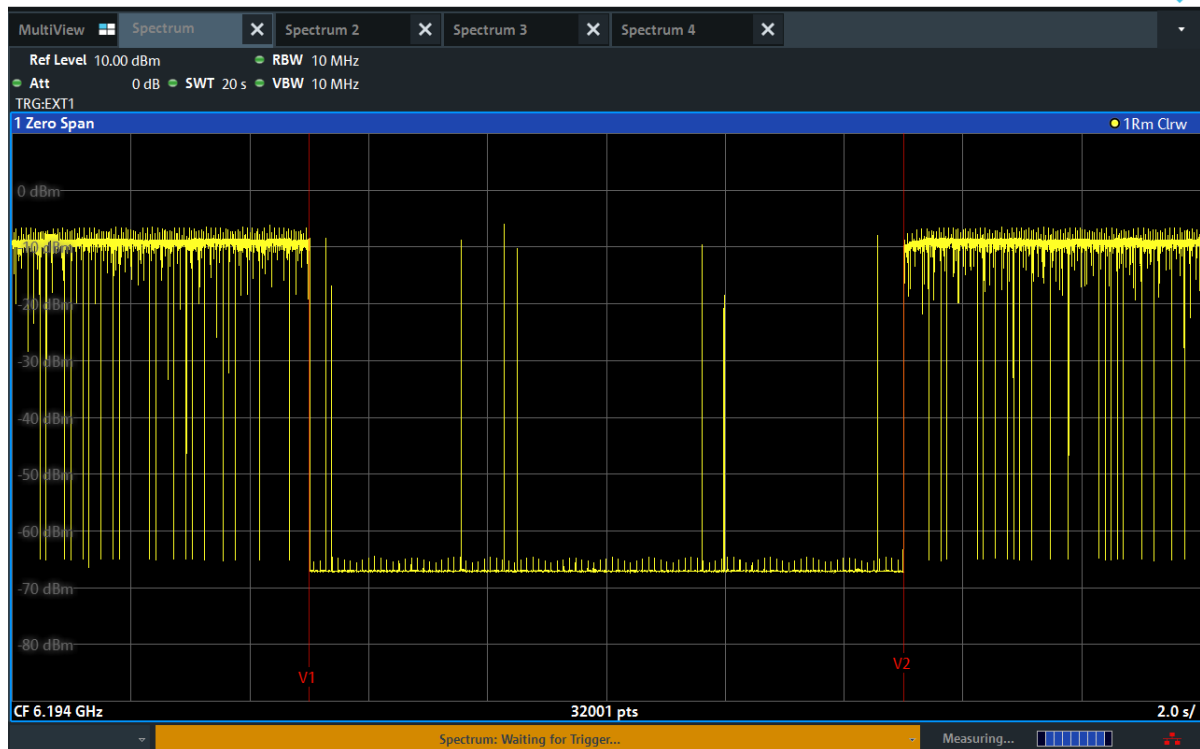


BW: 20 MHz / Frequency: 6474 MHz

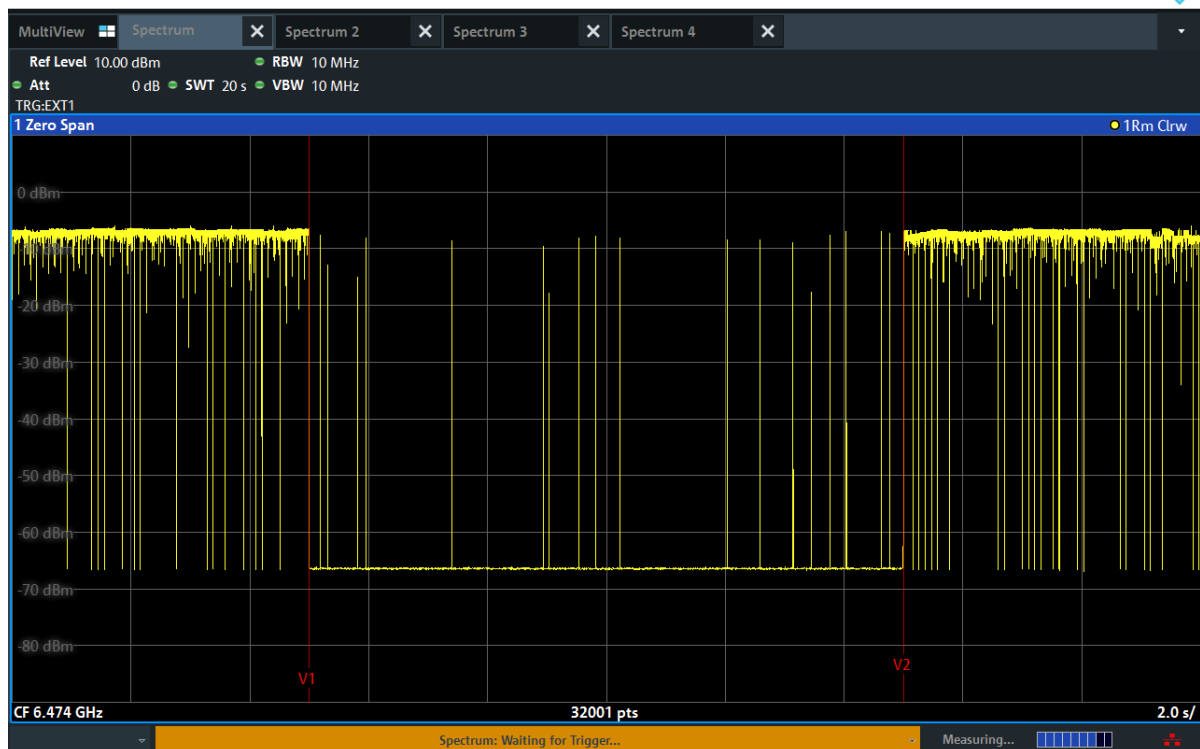


BW: 20 MHz / Frequency: 6694 MHz

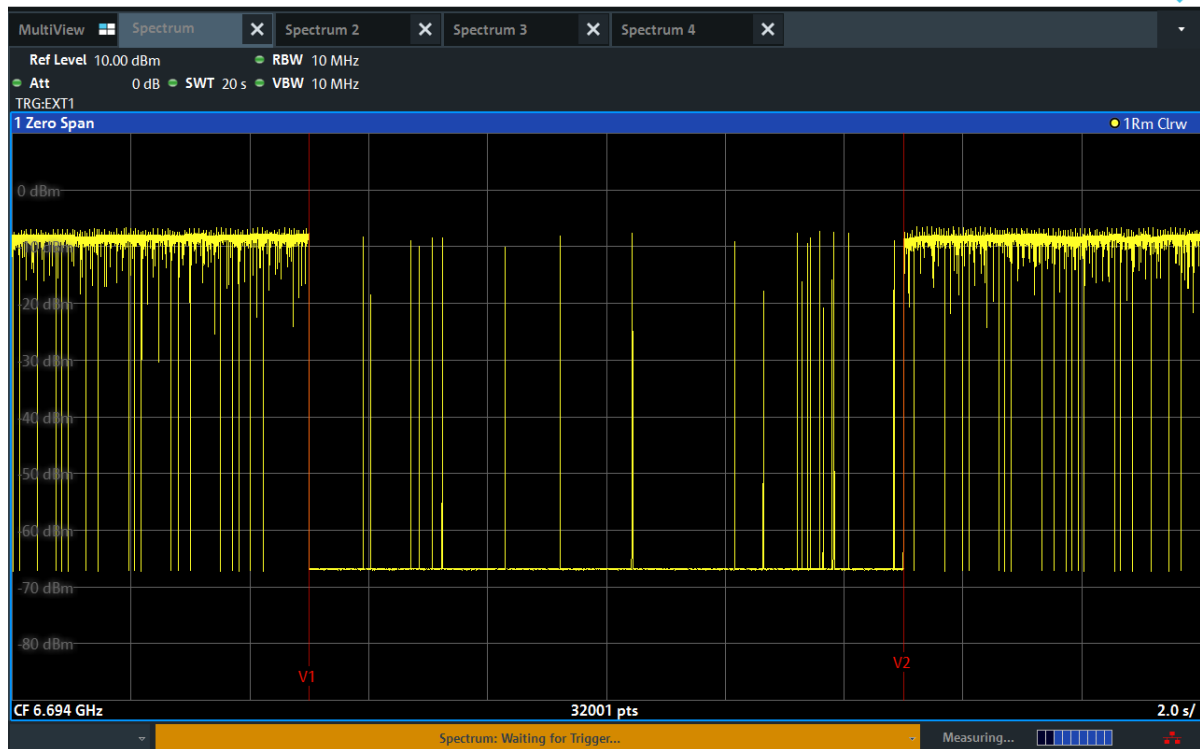


BW: 20 MHz / Frequency: 6994 MHz

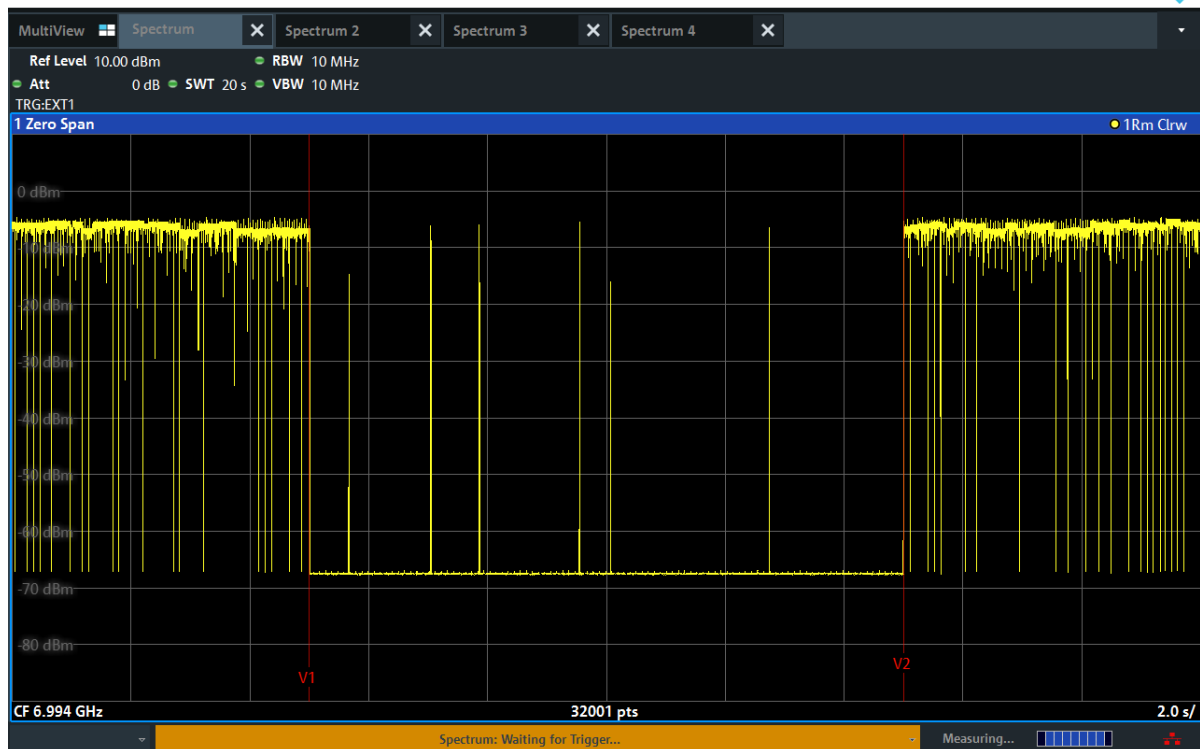


BW: 320 MHz / Frequency: 6100 MHz

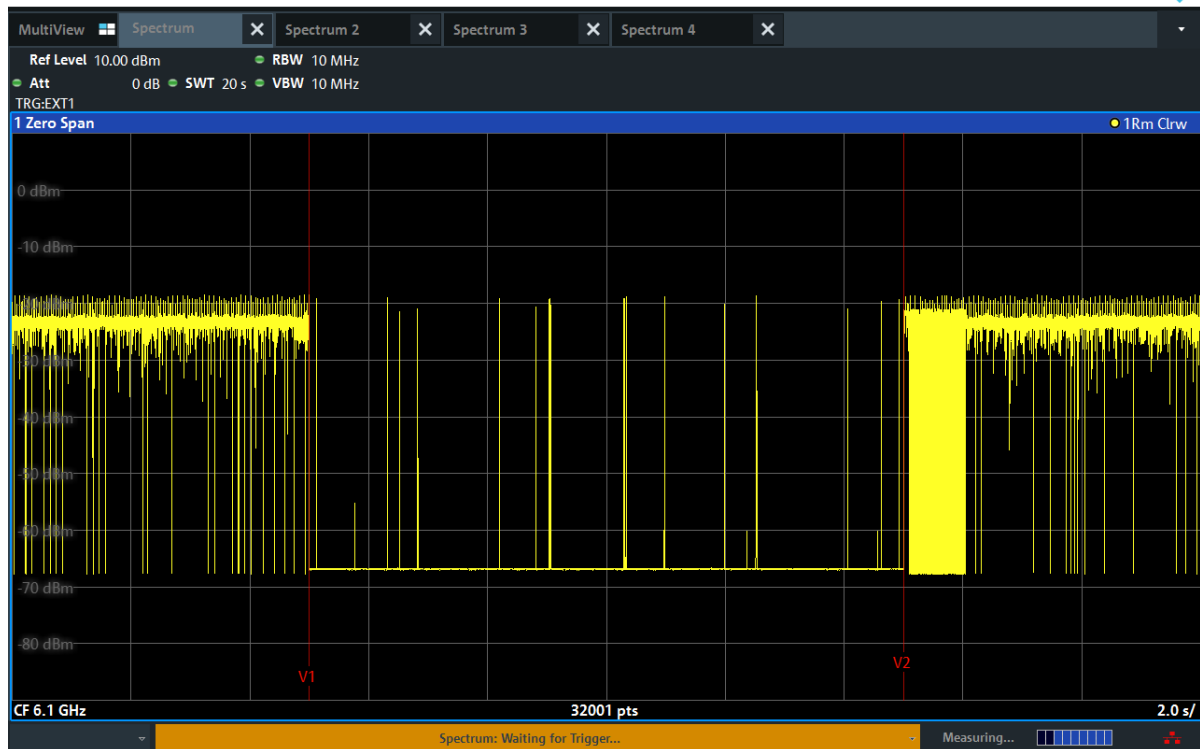


BW: 320 MHz / Frequency: 6580 MHz

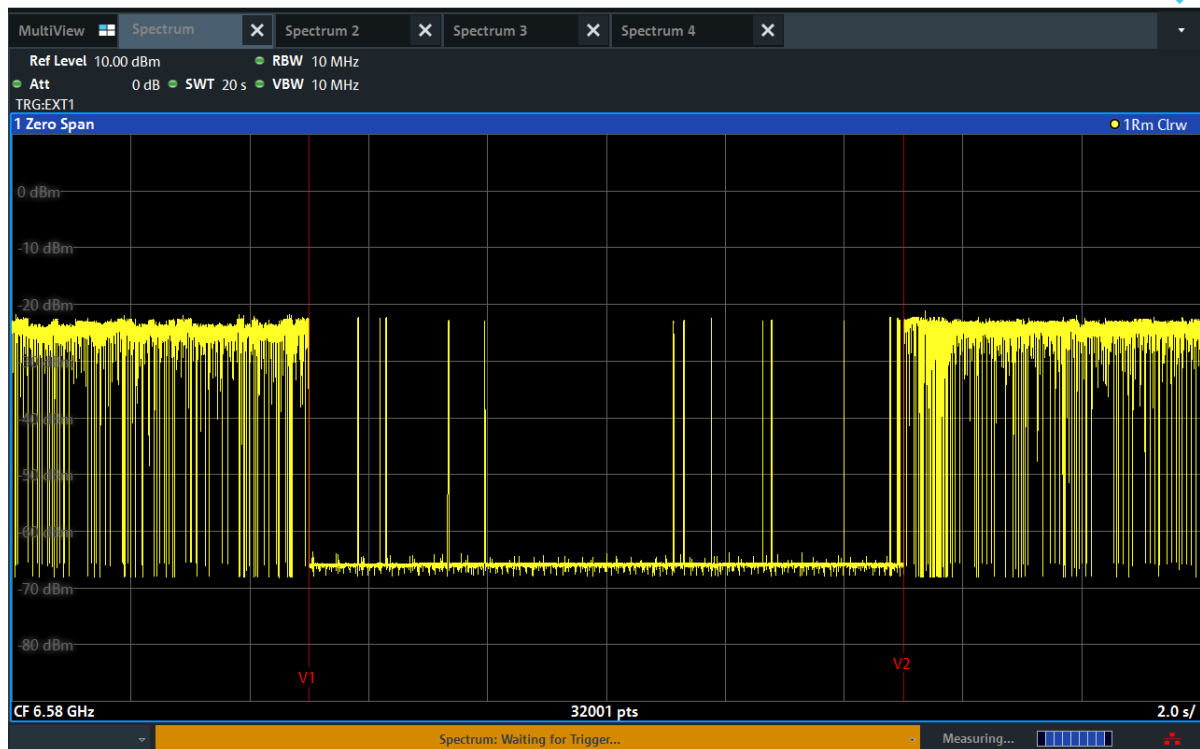

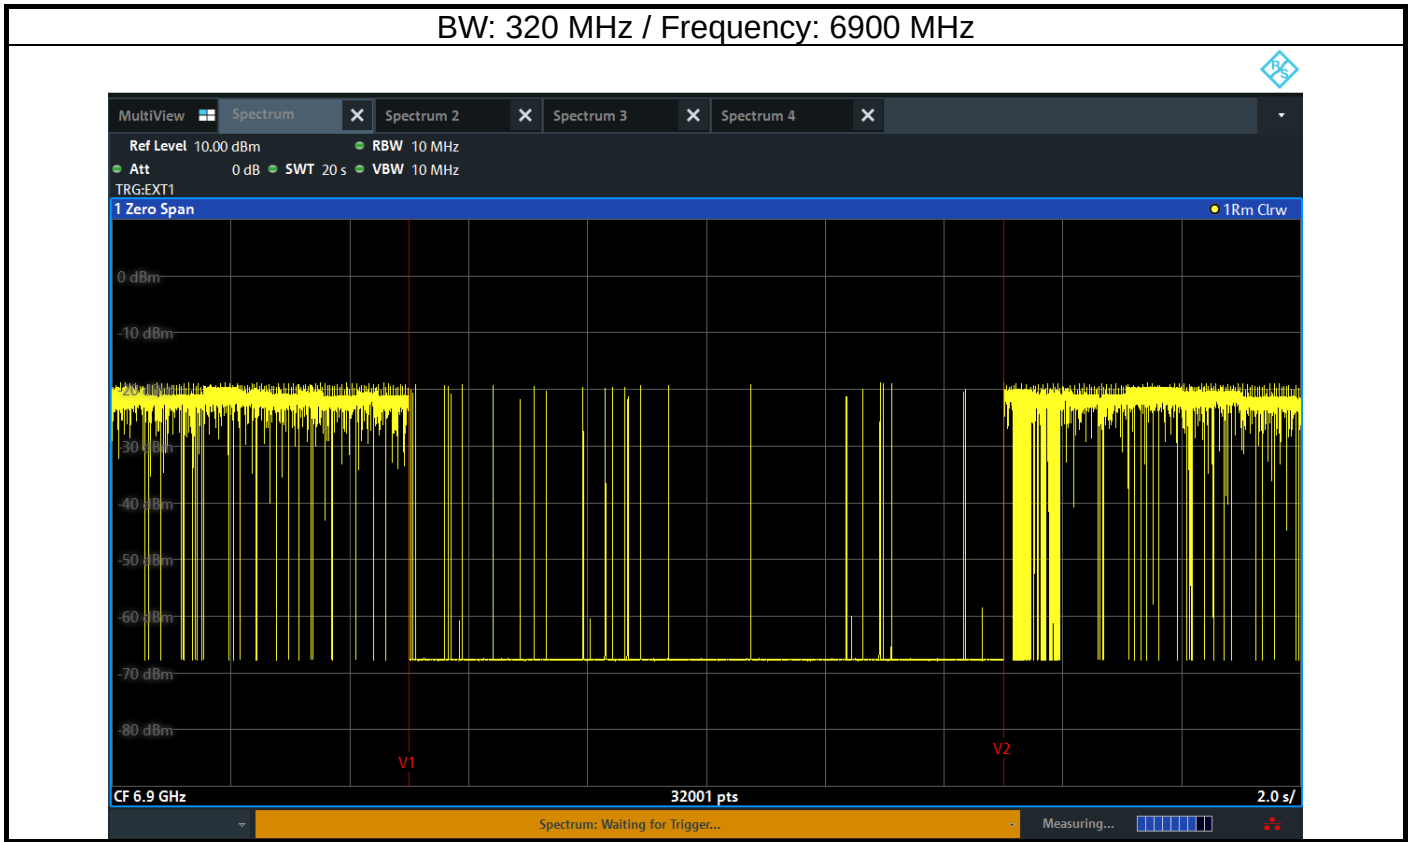


## EUT ceased transmission

BW: 20 MHz / Frequency: 6194 MHz

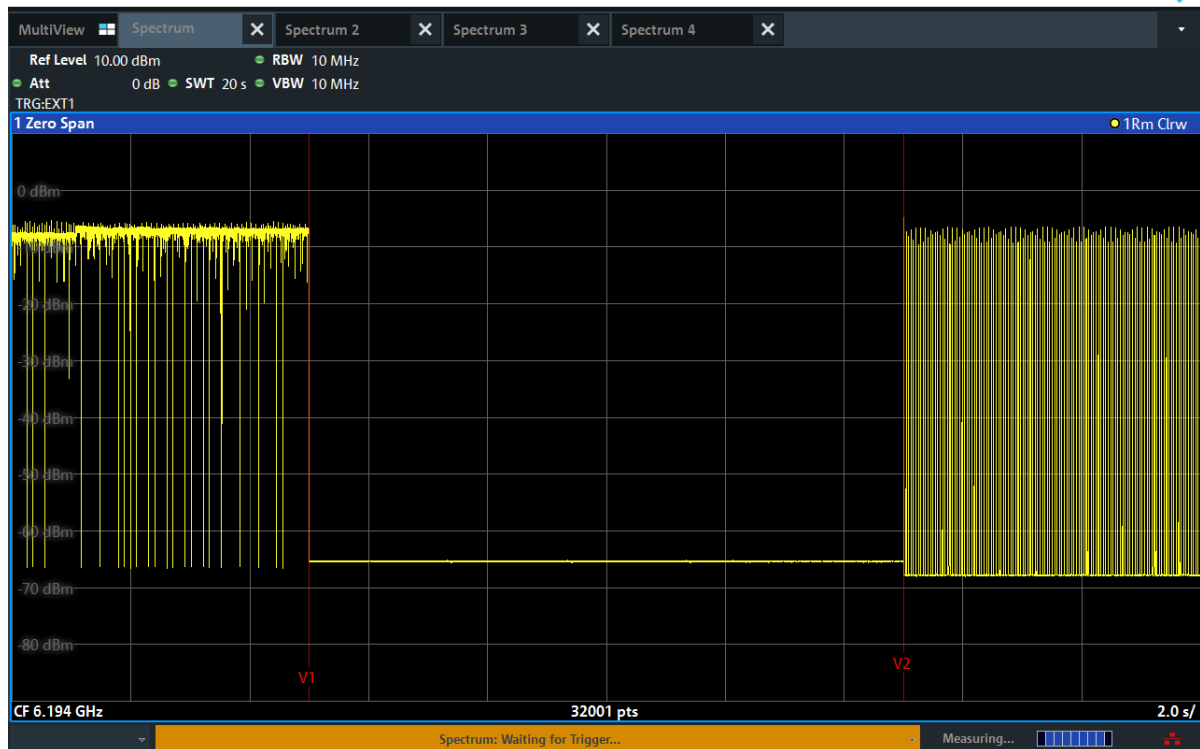


BW: 20 MHz / Frequency: 6474 MHz

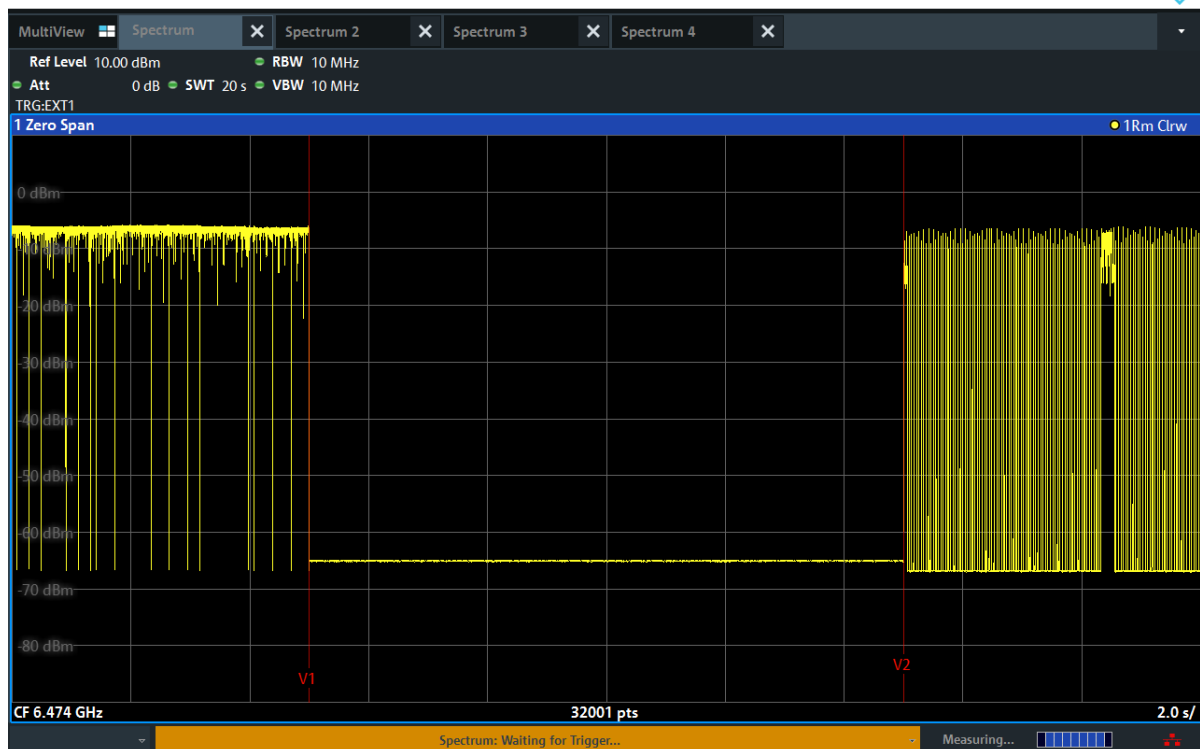


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 20 MHz / Frequency: 6694 MHz

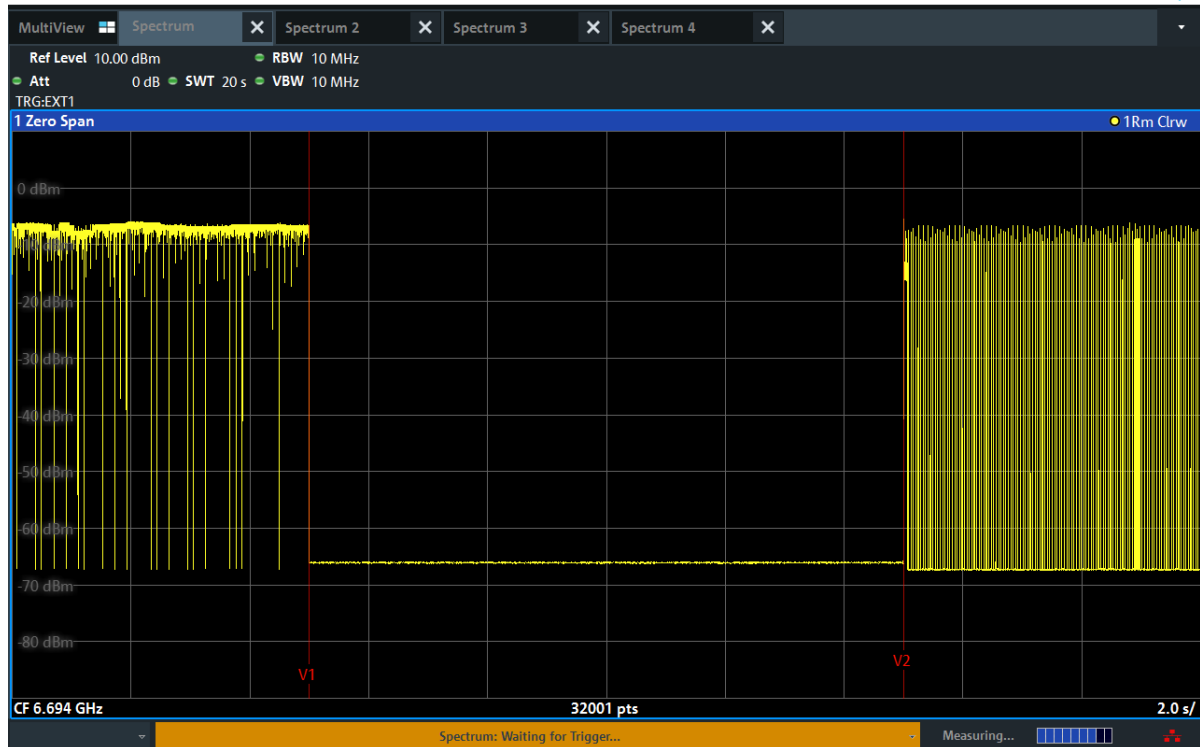


BW: 20 MHz / Frequency: 6994 MHz

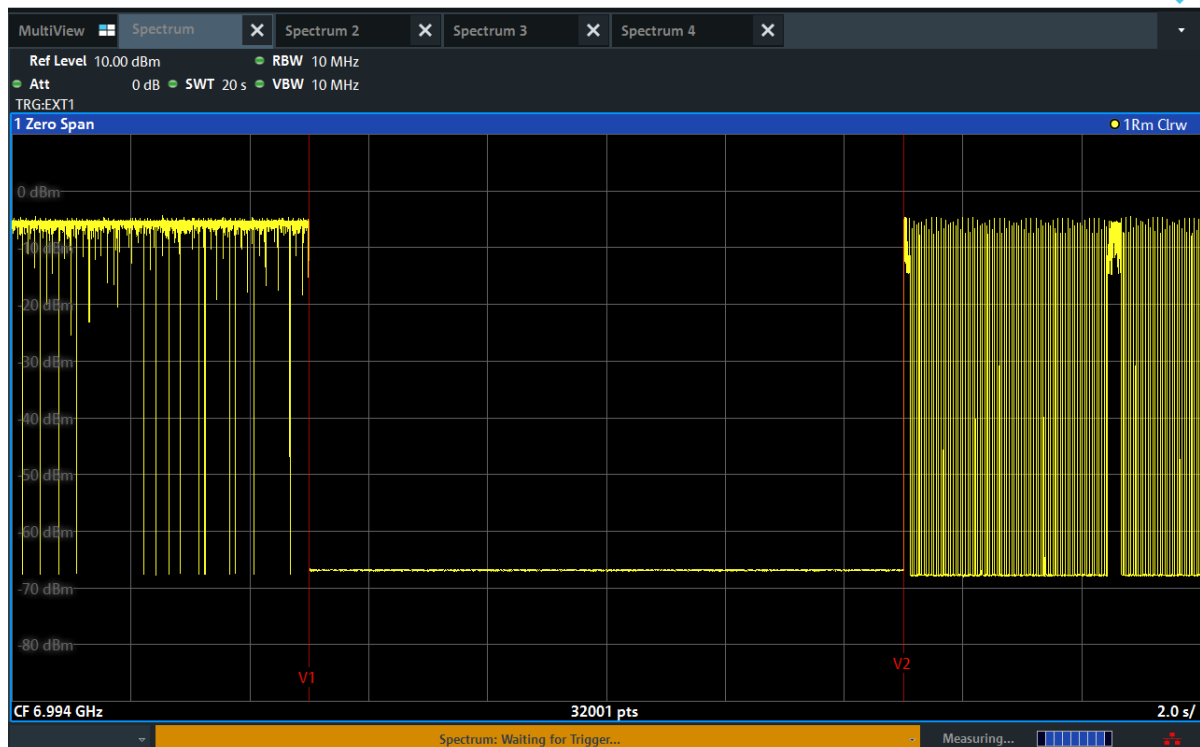


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 5950 MHz

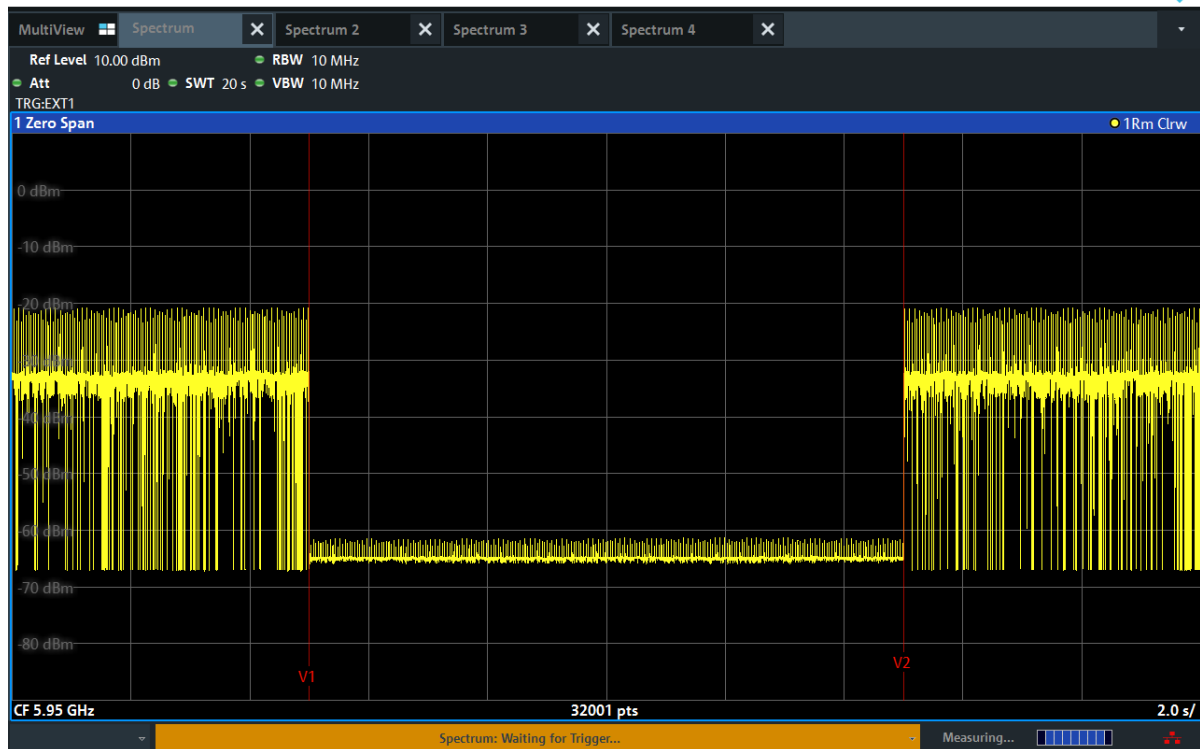


BW: 320 MHz / Frequency: 6100 MHz

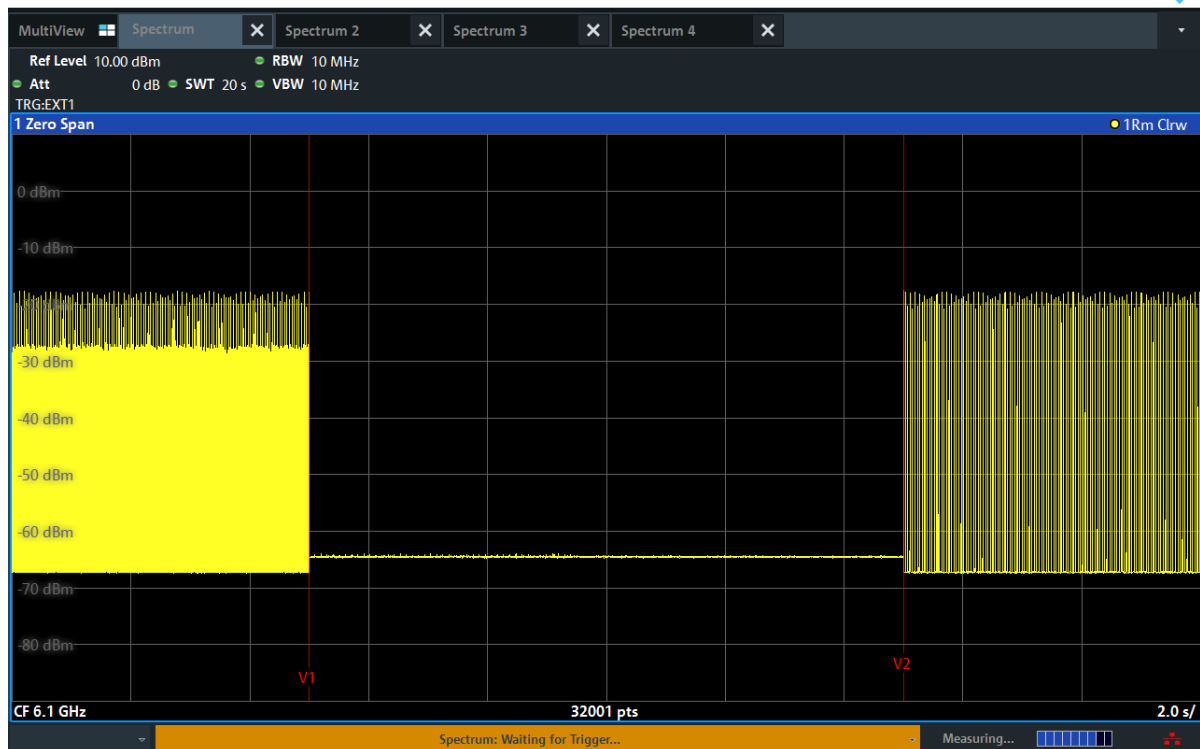


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 6260 MHz

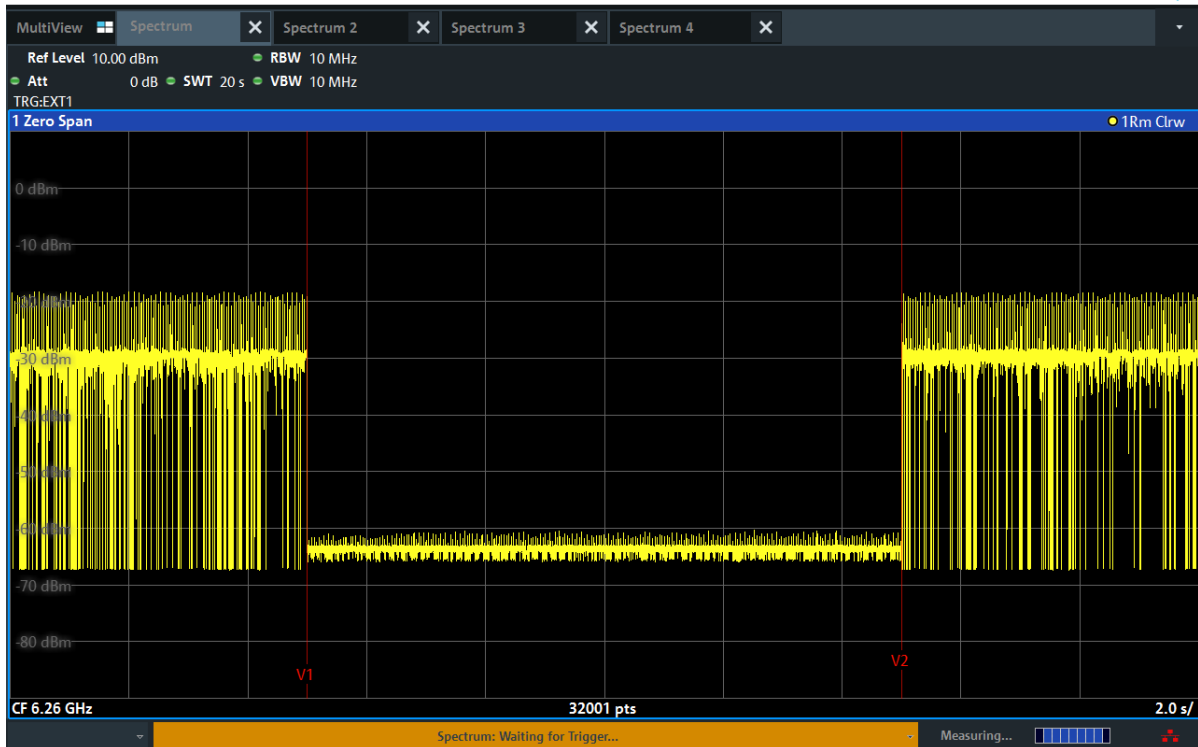


BW: 320 MHz / Frequency: 6270 MHz

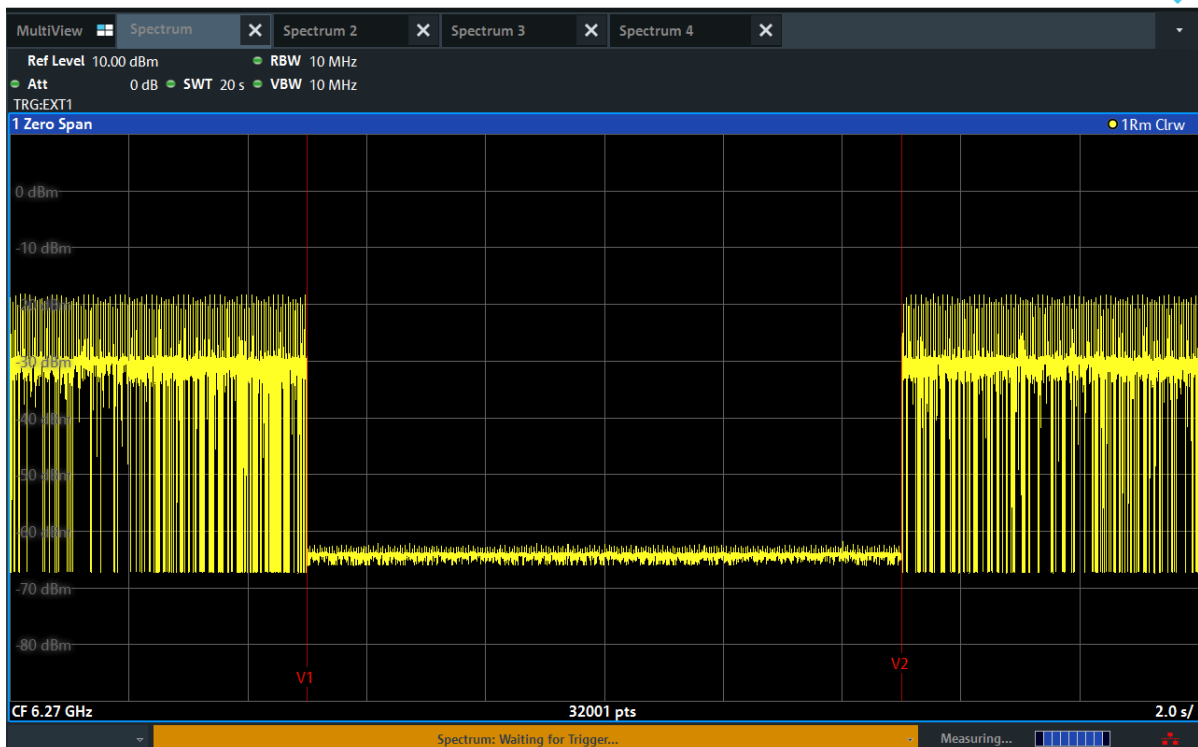


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 6420 MHz

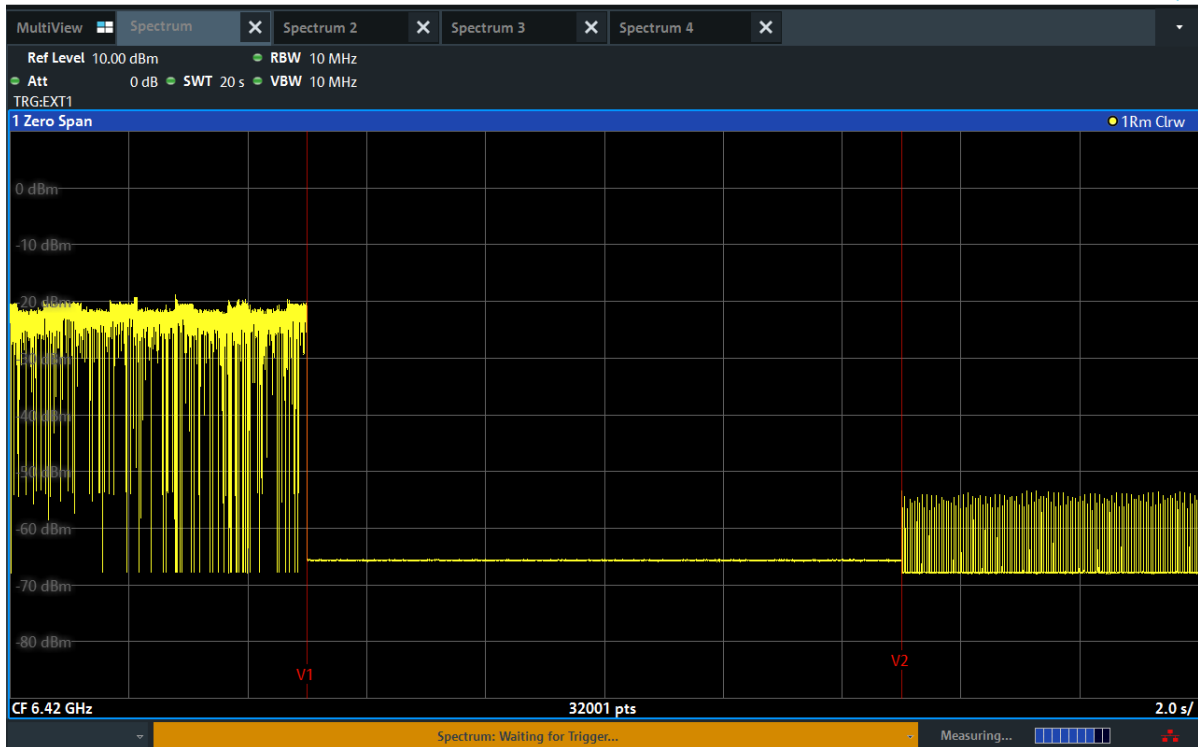


BW: 320 MHz / Frequency: 6580 MHz

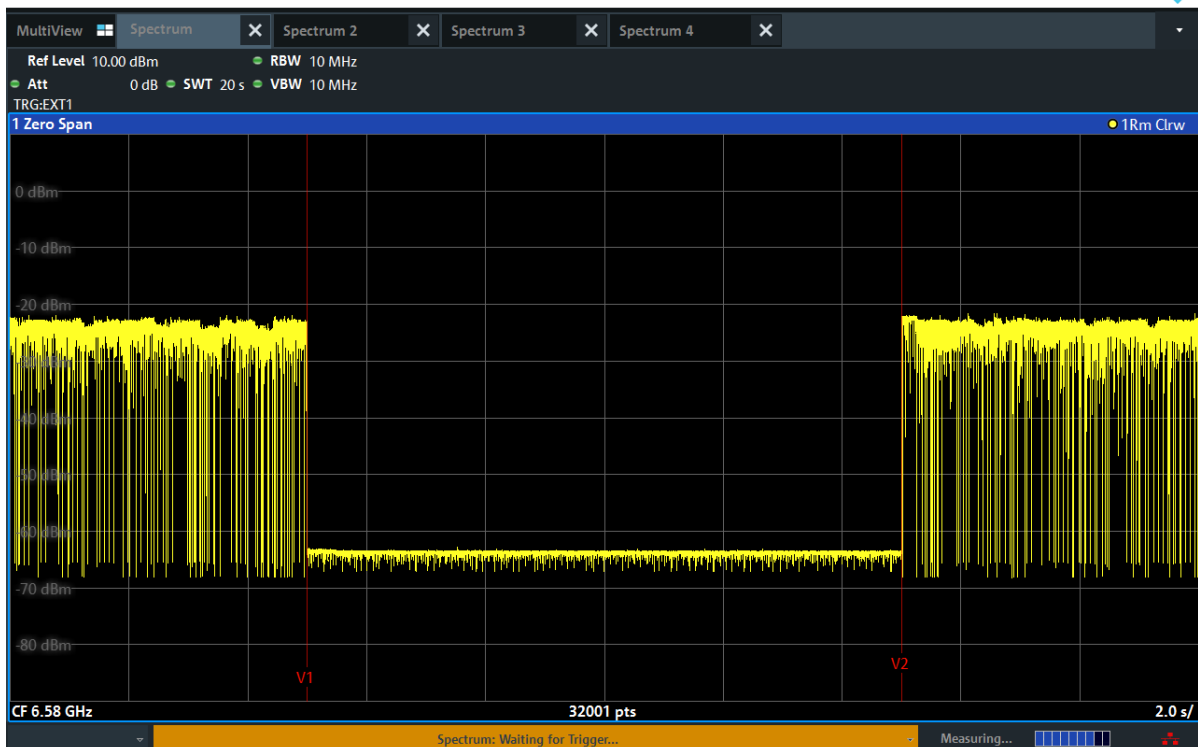


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.


BW: 320 MHz / Frequency: 6750 MHz

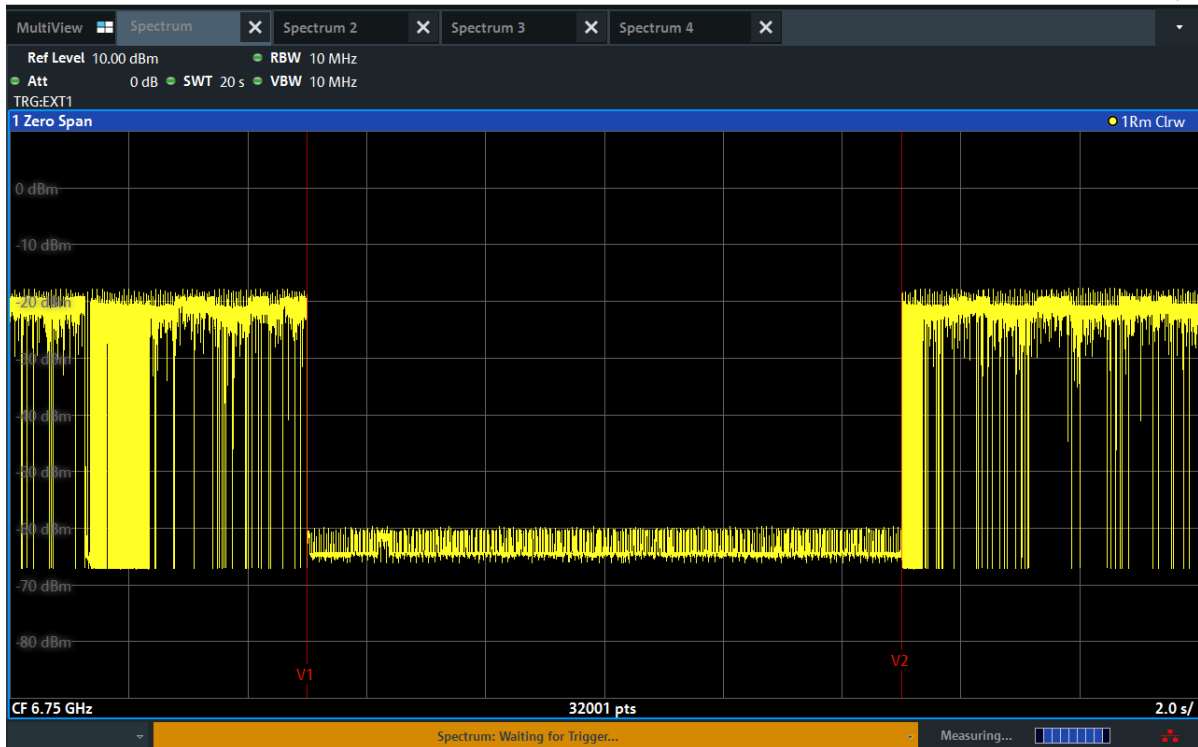

BW: 320 MHz / Frequency: 6900 MHz

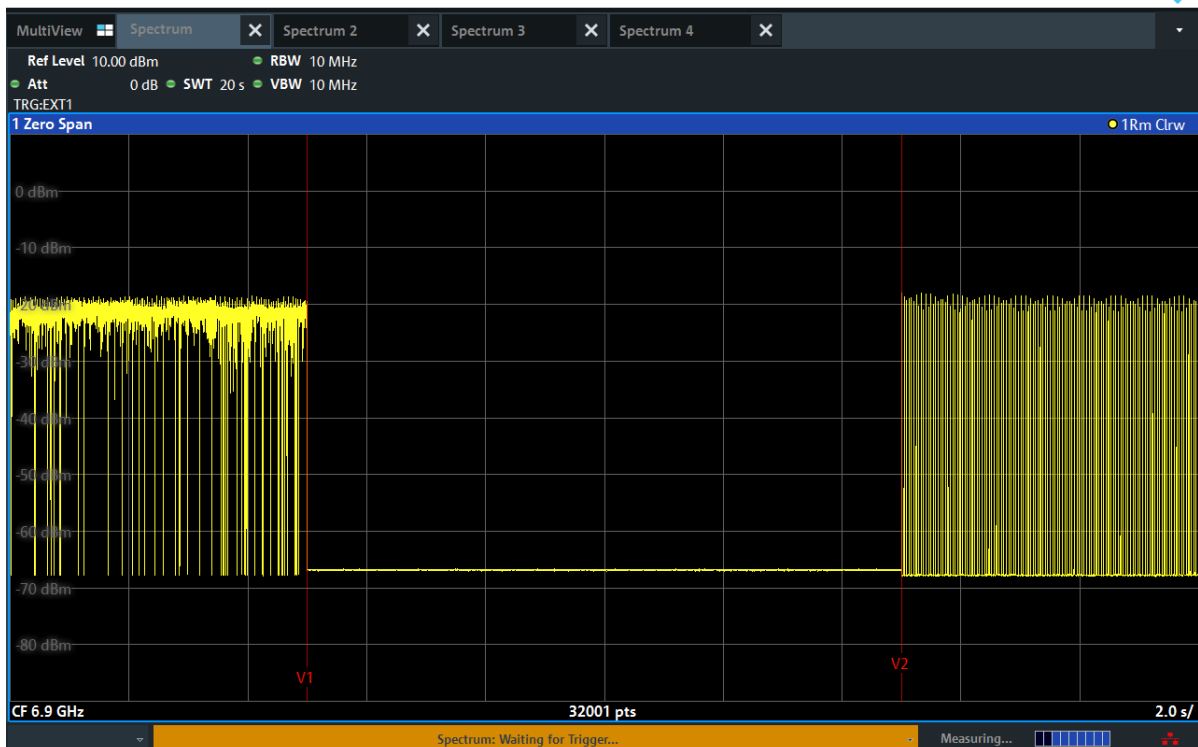

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

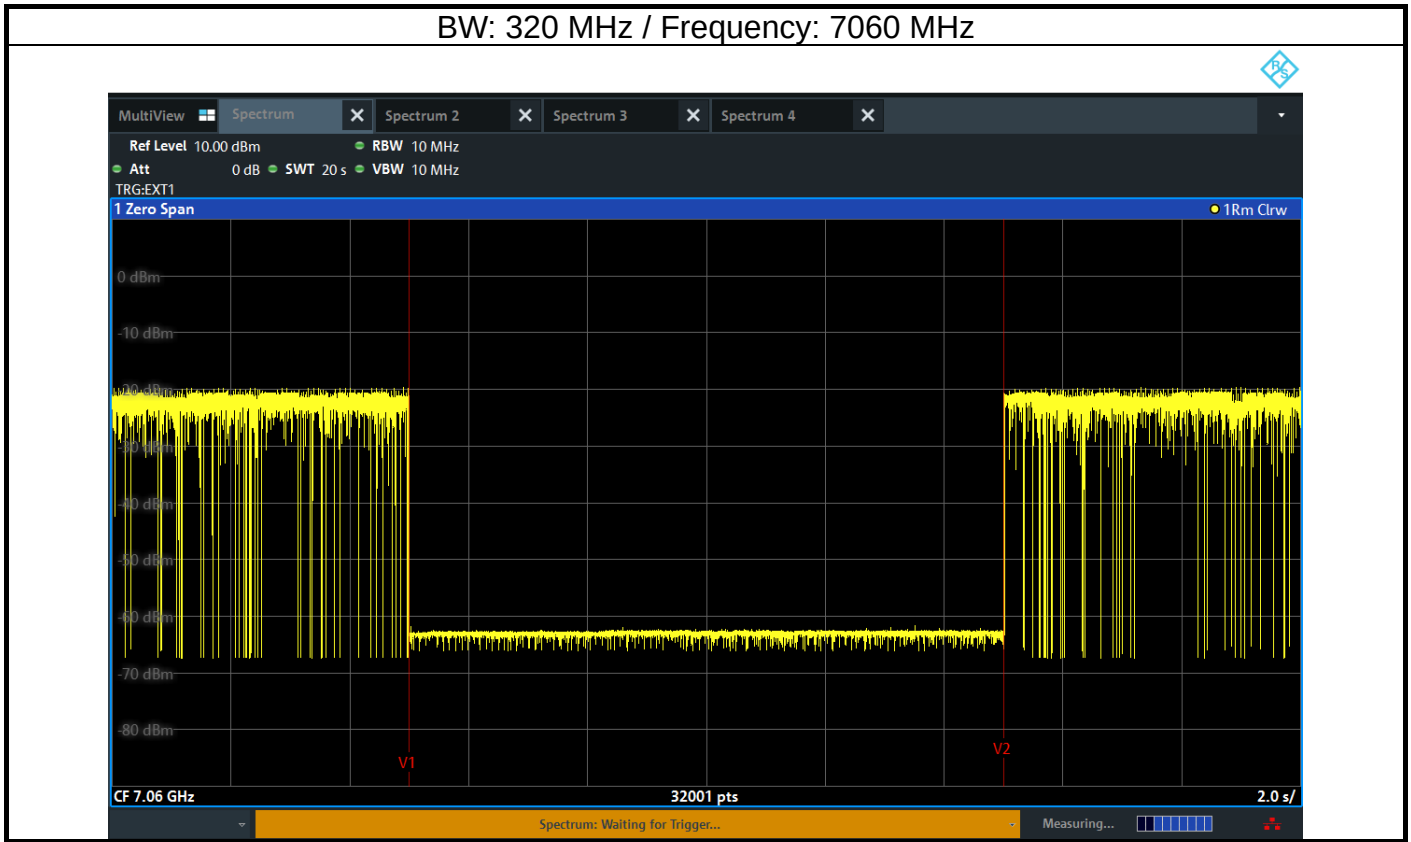

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.



## POE mode

|                 |                 |                  |      |
|-----------------|-----------------|------------------|------|
| Modulation Mode | be EHT320-OFDMA | Test Freq. (MHz) | 6105 |
| Power Phase     | Line            |                  |      |

Test by : Joe Liao      Temperature: 22°C      Humidity: 64%

|    | Freq   | Level | Limit | Over   | Read  | Factor | Cable | Aux  | Remark  |
|----|--------|-------|-------|--------|-------|--------|-------|------|---------|
|    | MHz    | dBuV  | dBuV  | dB     | Level | dB     | loss  | dB   |         |
| 1  | 0.222  | 43.74 | 52.74 | -9.00  | 33.89 | 9.64   | 0.04  | 0.17 | Average |
| 2* | 0.222  | 54.34 | 62.74 | -8.40  | 44.49 | 9.64   | 0.04  | 0.17 | QP      |
| 3  | 0.255  | 34.58 | 51.60 | -17.02 | 24.72 | 9.64   | 0.04  | 0.18 | Average |
| 4  | 0.255  | 51.15 | 61.60 | -10.45 | 41.29 | 9.64   | 0.04  | 0.18 | QP      |
| 5  | 0.381  | 26.68 | 48.25 | -21.57 | 16.78 | 9.64   | 0.04  | 0.22 | Average |
| 6  | 0.381  | 45.15 | 58.25 | -13.10 | 35.25 | 9.64   | 0.04  | 0.22 | QP      |
| 7  | 14.907 | 32.91 | 50.00 | -17.09 | 22.29 | 9.70   | 0.26  | 0.66 | Average |
| 8  | 14.907 | 38.75 | 60.00 | -21.25 | 28.13 | 9.70   | 0.26  | 0.66 | QP      |
| 9  | 19.326 | 31.68 | 50.00 | -18.32 | 20.99 | 9.69   | 0.30  | 0.70 | Average |
| 10 | 19.326 | 38.05 | 60.00 | -21.95 | 27.36 | 9.69   | 0.30  | 0.70 | QP      |
| 11 | 27.127 | 31.04 | 50.00 | -18.96 | 20.25 | 9.65   | 0.32  | 0.82 | Average |
| 12 | 27.127 | 36.95 | 60.00 | -23.05 | 26.16 | 9.65   | 0.32  | 0.82 | QP      |

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




|                 |                 |                  |      |
|-----------------|-----------------|------------------|------|
| Modulation Mode | be EHT320-OFDMA | Test Freq. (MHz) | 6105 |
| Power Phase     | Neutral         |                  |      |

Test by : Joe Liao

Temperature: 22°C

Humidity: 64%

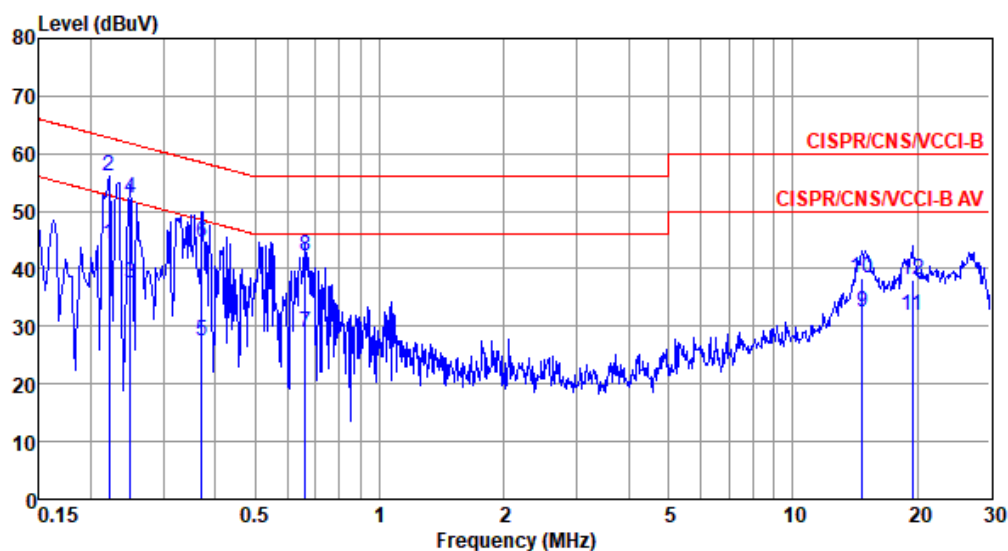

|    | Freq<br>MHz | Level<br>dBUV | Limit<br>Line<br>dBUV | Over<br>Limit<br>dB | Read<br>Level<br>dBUV | Factor<br>dB | Cable<br>loss<br>dB | Aux<br>dB | Remark  |
|----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1  | 0.222       | 44.17         | 52.74                 | -8.57               | 34.18                 | 9.64         | 0.04                | 0.31      | Average |
| 2* | 0.222       | 55.99         | 62.74                 | -6.75               | 46.00                 | 9.64         | 0.04                | 0.31      | QP      |
| 3  | 0.249       | 37.54         | 51.78                 | -14.24              | 27.54                 | 9.64         | 0.04                | 0.32      | Average |
| 4  | 0.249       | 52.34         | 61.78                 | -9.44               | 42.34                 | 9.64         | 0.04                | 0.32      | QP      |
| 5  | 0.371       | 27.44         | 48.47                 | -21.03              | 17.43                 | 9.63         | 0.04                | 0.34      | Average |
| 6  | 0.371       | 44.52         | 58.47                 | -13.95              | 34.51                 | 9.63         | 0.04                | 0.34      | QP      |
| 7  | 0.661       | 28.88         | 46.00                 | -17.12              | 18.79                 | 9.64         | 0.05                | 0.40      | Average |
| 8  | 0.661       | 42.29         | 56.00                 | -13.71              | 32.20                 | 9.64         | 0.05                | 0.40      | QP      |
| 9  | 14.750      | 32.54         | 50.00                 | -17.46              | 21.88                 | 9.76         | 0.26                | 0.64      | Average |
| 10 | 14.750      | 38.36         | 60.00                 | -21.64              | 27.70                 | 9.76         | 0.26                | 0.64      | QP      |
| 11 | 19.428      | 31.82         | 50.00                 | -18.18              | 21.02                 | 9.79         | 0.30                | 0.71      | Average |
| 12 | 19.428      | 38.15         | 60.00                 | -21.85              | 27.35                 | 9.79         | 0.30                | 0.71      | QP      |

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




## Adapter mode

|                 |                 |                  |      |
|-----------------|-----------------|------------------|------|
| Modulation Mode | be EHT320-OFDMA | Test Freq. (MHz) | 6105 |
| Power Phase     | Line            |                  |      |

Test by : Joe Liao

Temperature: 22°C

Humidity: 64%

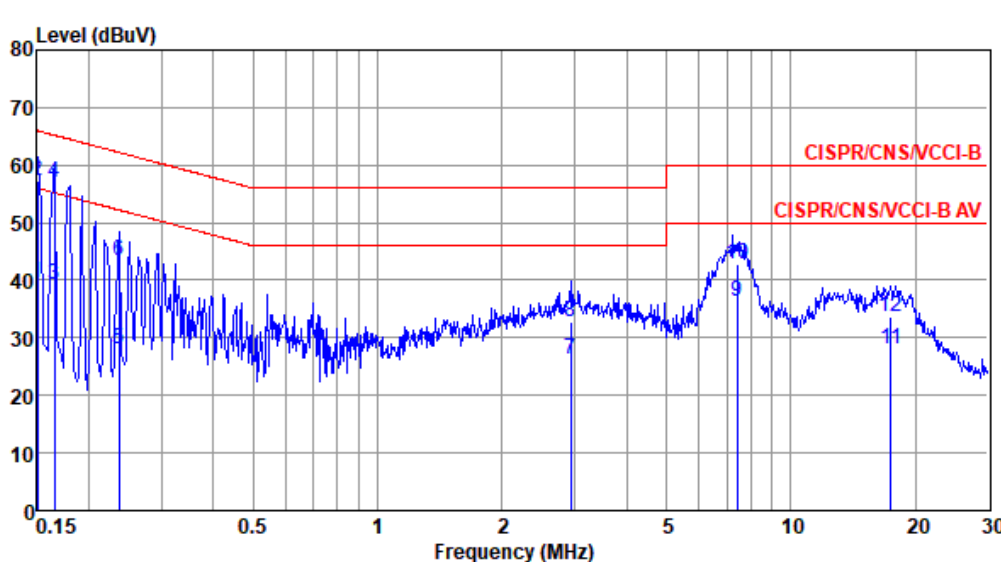

|    | Freq<br>MHz | Level<br>dBuV | Limit<br>Line<br>dBuV | Over<br>Limit<br>dB | Read<br>Level<br>dBuV | Factor<br>dB | Cable<br>loss<br>dB | Aux<br>dB | Remark  |
|----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1  | 0.150       | 39.67         | 56.00                 | -16.33              | 29.83                 | 9.65         | 0.03                | 0.16      | Average |
| 2  | 0.150       | 57.13         | 66.00                 | -8.87               | 47.29                 | 9.65         | 0.03                | 0.16      | QP      |
| 3  | 0.165       | 39.33         | 55.21                 | -15.88              | 29.49                 | 9.65         | 0.03                | 0.16      | Average |
| 4* | 0.165       | 56.88         | 65.21                 | -8.33               | 47.04                 | 9.65         | 0.03                | 0.16      | QP      |
| 5  | 0.237       | 28.06         | 52.22                 | -24.16              | 18.21                 | 9.64         | 0.04                | 0.17      | Average |
| 6  | 0.237       | 43.31         | 62.22                 | -18.91              | 33.46                 | 9.64         | 0.04                | 0.17      | QP      |
| 7  | 2.931       | 26.32         | 46.00                 | -19.68              | 16.06                 | 9.66         | 0.12                | 0.48      | Average |
| 8  | 2.931       | 32.79         | 56.00                 | -23.21              | 22.53                 | 9.66         | 0.12                | 0.48      | QP      |
| 9  | 7.407       | 36.43         | 50.00                 | -13.57              | 25.94                 | 9.70         | 0.20                | 0.59      | Average |
| 10 | 7.407       | 42.68         | 60.00                 | -17.32              | 32.19                 | 9.70         | 0.20                | 0.59      | QP      |
| 11 | 17.475      | 27.94         | 50.00                 | -22.06              | 17.27                 | 9.70         | 0.29                | 0.68      | Average |
| 12 | 17.475      | 33.76         | 60.00                 | -26.24              | 23.09                 | 9.70         | 0.29                | 0.68      | QP      |

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).




|                 |                 |                  |      |
|-----------------|-----------------|------------------|------|
| Modulation Mode | be EHT320-OFDMA | Test Freq. (MHz) | 6105 |
| Power Phase     | Neutral         |                  |      |

Test by : Joe Liao

Temperature: 22°C

Humidity: 64%

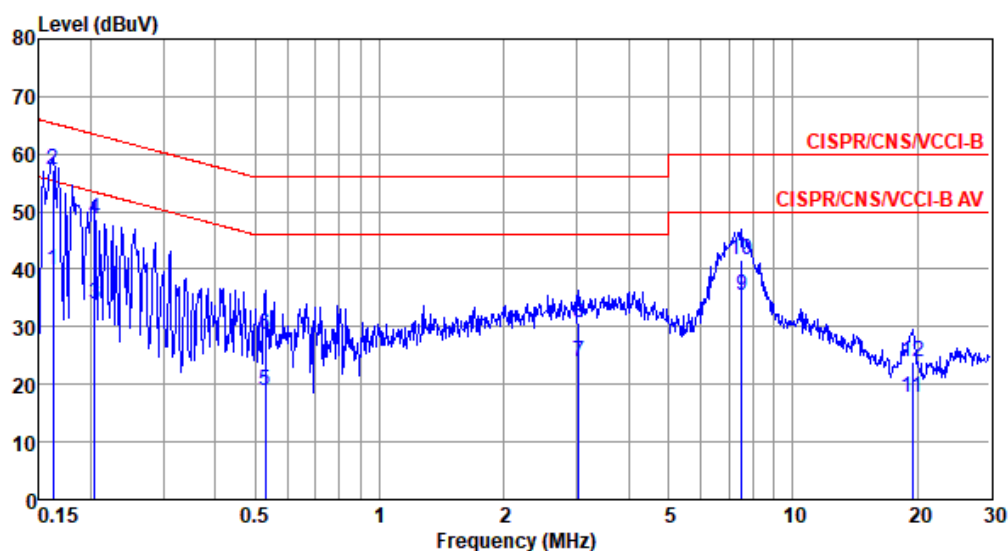

|    | Freq<br>MHz | Level<br>dBUV | Limit<br>Line<br>dBUV | Over<br>Limit<br>dB | Read<br>Level<br>dBUV | Factor<br>dB | Cable<br>loss<br>dB | Aux<br>dB | Remark  |
|----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1  | 0.162       | 39.94         | 55.34                 | -15.40              | 30.03                 | 9.64         | 0.03                | 0.24      | Average |
| 2* | 0.162       | 57.12         | 65.34                 | -8.22               | 47.21                 | 9.64         | 0.03                | 0.24      | QP      |
| 3  | 0.204       | 34.09         | 53.45                 | -19.36              | 24.11                 | 9.64         | 0.04                | 0.30      | Average |
| 4  | 0.204       | 48.58         | 63.45                 | -14.87              | 38.60                 | 9.64         | 0.04                | 0.30      | QP      |
| 5  | 0.529       | 18.92         | 46.00                 | -27.08              | 8.86                  | 9.63         | 0.05                | 0.38      | Average |
| 6  | 0.529       | 28.67         | 56.00                 | -27.33              | 18.61                 | 9.63         | 0.05                | 0.38      | QP      |
| 7  | 3.025       | 23.96         | 46.00                 | -22.04              | 13.62                 | 9.66         | 0.13                | 0.55      | Average |
| 8  | 3.025       | 30.66         | 56.00                 | -25.34              | 20.32                 | 9.66         | 0.13                | 0.55      | QP      |
| 9  | 7.526       | 35.45         | 50.00                 | -14.55              | 24.94                 | 9.70         | 0.21                | 0.60      | Average |
| 10 | 7.526       | 41.58         | 60.00                 | -18.42              | 31.07                 | 9.70         | 0.21                | 0.60      | QP      |
| 11 | 19.428      | 17.74         | 50.00                 | -32.26              | 6.94                  | 9.79         | 0.30                | 0.71      | Average |
| 12 | 19.428      | 23.96         | 60.00                 | -36.04              | 13.16                 | 9.79         | 0.30                | 0.71      | QP      |

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).