

# FCC Test Report

Report No.: AGC02253190301FE03

**FCC ID** : 2AJFD-SL82  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : Wireless Reflective Earbuds  
**BRAND NAME** : SLICK  
**MODEL NAME** : SL82  
**CLIENT** : Shantou Yihao Industrial Co,Ltd  
**DATE OF ISSUE** : Mar. 15, 2019  
**STANDARD(S)** : FCC Part 15.247  
**REPORT VERSION** : V1.0

## Attestation of Global Compliance (Shenzhen) Co., Ltd

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**REPORT REVISE RECORD**

| Report Version | Revise Time | Issued Date   | Valid Version | Notes           |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0           | /           | Mar. 15, 2019 | Valid         | Initial Release |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## TABLE OF CONTENTS

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. VERIFICATION OF CONFORMITY .....</b>                  | <b>5</b>  |
| <b>2. GENERAL INFORMATION.....</b>                          | <b>6</b>  |
| 2.1. PRODUCT DESCRIPTION .....                              | 6         |
| 2.2. TABLE OF CARRIER FREQUENCIES .....                     | 6         |
| 2.3. RECEIVER INPUT BANDWIDTH .....                         | 7         |
| 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE .....       | 7         |
| 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR ..... | 7         |
| 2.6. RELATED SUBMITTAL(S) / GRANT (S) .....                 | 8         |
| 2.7. TEST METHODOLOGY .....                                 | 8         |
| 2.8. SPECIAL ACCESSORIES.....                               | 8         |
| 2.9. EQUIPMENT MODIFICATIONS .....                          | 8         |
| <b>3. MEASUREMENT UNCERTAINTY.....</b>                      | <b>9</b>  |
| <b>4. DESCRIPTION OF TEST MODES.....</b>                    | <b>10</b> |
| <b>5. SYSTEM TEST CONFIGURATION .....</b>                   | <b>11</b> |
| 5.1. CONFIGURATION OF EUT SYSTEM .....                      | 11        |
| 5.2 EQUIPMENT USED IN TESTED SYSTEM.....                    | 11        |
| 5.3. SUMMARY OF TEST RESULTS.....                           | 11        |
| <b>6. TEST FACILITY .....</b>                               | <b>12</b> |
| <b>7. PEAK OUTPUT POWER.....</b>                            | <b>13</b> |
| 7.1. MEASUREMENT PROCEDURE.....                             | 13        |
| 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....      | 13        |
| 7.3. LIMITS AND MEASUREMENT RESULT .....                    | 14        |
| <b>8. 20DB BANDWIDTH .....</b>                              | <b>18</b> |
| 8.1. MEASUREMENT PROCEDURE.....                             | 18        |
| 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....      | 18        |
| 8.3. LIMITS AND MEASUREMENT RESULTS .....                   | 18        |
| <b>9. CONDUCTED SPURIOUS EMISSION .....</b>                 | <b>23</b> |
| 9.1. MEASUREMENT PROCEDURE .....                            | 23        |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

|                                                        |           |
|--------------------------------------------------------|-----------|
| 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... | 23        |
| 9.3. MEASUREMENT EQUIPMENT USED .....                  | 23        |
| 9.4. LIMITS AND MEASUREMENT RESULT .....               | 23        |
| <b>10. RADIATED EMISSION.....</b>                      | <b>31</b> |
| 10.1. MEASUREMENT PROCEDURE .....                      | 31        |
| 10.2. TEST SETUP.....                                  | 33        |
| 10.3. LIMITS AND MEASUREMENT RESULT .....              | 34        |
| <b>11. NUMBER OF HOPPING FREQUENCY .....</b>           | <b>44</b> |
| 11.1. MEASUREMENT PROCEDURE .....                      | 44        |
| 11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)..... | 44        |
| 11.3. MEASUREMENT EQUIPMENT USED .....                 | 44        |
| 11.4. LIMITS AND MEASUREMENT RESULT .....              | 44        |
| <b>12. TIME OF OCCUPANCY (DWELL TIME) .....</b>        | <b>45</b> |
| 12.1. MEASUREMENT PROCEDURE .....                      | 45        |
| 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)..... | 45        |
| 12.3. MEASUREMENT EQUIPMENT USED .....                 | 45        |
| 12.4. LIMITS AND MEASUREMENT RESULT .....              | 45        |
| <b>13. FREQUENCY SEPARATION.....</b>                   | <b>49</b> |
| 13.1. MEASUREMENT PROCEDURE .....                      | 49        |
| 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)..... | 49        |
| 13.3. MEASUREMENT EQUIPMENT USED .....                 | 49        |
| 13.4. LIMITS AND MEASUREMENT RESULT .....              | 49        |
| <b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>     | <b>50</b> |
| <b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>            | <b>51</b> |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


## 1. VERIFICATION OF CONFORMITY

|                                 |                                                                            |
|---------------------------------|----------------------------------------------------------------------------|
| <b>Applicant</b>                | Shantou Yihao Industrial Co, Ltd                                           |
| <b>Address</b>                  | Gounan industrial park, Gurao town, Chaoyang district, Shantou city, China |
| <b>Manufacturer</b>             | Shantou Yihao Industrial Co, Ltd                                           |
| <b>Address</b>                  | Gounan industrial park, Gurao town, Chaoyang district, Shantou city, China |
| <b>Factory</b>                  | Shantou Yihao Industrial Co, Ltd                                           |
| <b>Address</b>                  | Gounan industrial park, Gurao town, Chaoyang district, Shantou city, China |
| <b>Product Designation</b>      | Wireless Reflective Earbuds                                                |
| <b>Brand Name</b>               | SLICK                                                                      |
| <b>Test Model</b>               | SL82                                                                       |
| <b>Date of test</b>             | Mar. 08, 2019 to Mar. 15, 2019                                             |
| <b>Deviation</b>                | None                                                                       |
| <b>Condition of Test Sample</b> | Normal                                                                     |
| <b>Test Result</b>              | Pass                                                                       |
| <b>Report Template</b>          | AGCRT-US-BR/RF                                                             |

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Tested By



Max Zhang(Zhang Yi)

Mar. 15, 2019

Reviewed By



Bart Xie(Xie Xiaobin)

Mar. 15, 2019

Approved By



Forrest Lei(Lei Yonggang)  
Authorized Officer

Mar. 15, 2019

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

The EUT is designed as “Wireless Reflective Earbuds”. It is designed by way of utilizing the GFSK and Pi/4 DQPSK technology to achieve the system operation.

A major technical description of EUT is described as following

|                            |                                                                                                                                                                                                                    |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operation Frequency</b> | 2.402 GHz to 2.480GHz                                                                                                                                                                                              |
| <b>RF Output Power</b>     | -1.751dBm(Max)                                                                                                                                                                                                     |
| <b>Bluetooth Version</b>   | V5.0                                                                                                                                                                                                               |
| <b>Modulation</b>          | BR <input checked="" type="checkbox"/> GFSK, EDR <input checked="" type="checkbox"/> $\pi/4$ -DQPSK, <input type="checkbox"/> 8DPSK<br>BLE <input type="checkbox"/> GFSK 1Mbps <input type="checkbox"/> GFSK 2Mbps |
| <b>Number of channels</b>  | 79                                                                                                                                                                                                                 |
| <b>Hardware Version</b>    | V1.0                                                                                                                                                                                                               |
| <b>Software Version</b>    | V1.0                                                                                                                                                                                                               |
| <b>Antenna Designation</b> | PCB Antenna                                                                                                                                                                                                        |
| <b>Antenna Gain</b>        | 0dBi                                                                                                                                                                                                               |
| <b>Power Supply</b>        | DC 3.7V by battery                                                                                                                                                                                                 |

### 2.2. TABLE OF CARRIER FREQUENCIES

| Frequency Band | Channel Number | Frequency |
|----------------|----------------|-----------|
| 2402~2480MHZ   | 0              | 2402MHZ   |
|                | 1              | 2403MHZ   |
|                | :              | :         |
|                | 38             | 2440 MHZ  |
|                | 39             | 2441 MHZ  |
|                | 40             | 2442 MHZ  |
|                | :              | :         |
|                | 77             | 2479 MHZ  |
|                | 78             | 2480 MHZ  |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz. In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be sent on the same frequency, it is sent on the next frequency of the hopping sequence.

### 2.4. EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67  
56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59  
72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75  
09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06  
01, 51, 03, 55, 05, 04

### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD\_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day (23h30). In most cases it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With these input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence.

This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmissions is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5us). The hopping sequence will always differ from the first one.

## 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AJFD-SL82** filing to comply with the FCC PART 15.247 requirements.

## 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

## 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

## 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### 3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission,  $U_c = \pm 3.2$  dB
- Uncertainty of Radiated Emission below 1GHz,  $U_c = \pm 3.9$  dB
- Uncertainty of Radiated Emission above 1GHz,  $U_c = \pm 4.8$  dB

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

#### 4. DESCRIPTION OF TEST MODES

| NO. | TEST MODE DESCRIPTION |
|-----|-----------------------|
| 1   | Low channel TX        |
| 2   | Middle channel TX     |
| 3   | High channel TX       |
| 4   | Normal Operating (BT) |

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 5. SYSTEM TEST CONFIGURATION

### 5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure :



### 5.2 EQUIPMENT USED IN TESTED SYSTEM

| Item | Equipment                   | Model No. | ID or Specification | Remark |
|------|-----------------------------|-----------|---------------------|--------|
| 1    | Wireless Reflective Earbuds | SL82      | 2AJFD-SL82          | EUT    |

### 5.3. SUMMARY OF TEST RESULTS

| FCC RULES     | DESCRIPTION OF TEST         | RESULT    |
|---------------|-----------------------------|-----------|
| 15.247        | Peak Output Power           | Compliant |
| 15.247        | 20 dB Bandwidth             | Compliant |
| 15.247        | Spurious Emission           | Compliant |
| 15.247&15.209 | Radiated Emission           | Compliant |
| 15.247        | Number of Hopping Frequency | Compliant |
| 15.247        | Time of Occupancy           | Compliant |
| 15.247        | Frequency Separation        | Compliant |
| 15.207        | Conducted Emission          | N/A       |

NOTE: N/A stands for not applicable. The device cannot use the BT function with charging.

 The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 6. TEST FACILITY

|                           |                                                                                                                                          |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Site</b>          | Attestation of Global Compliance (Shenzhen) Co., Ltd                                                                                     |
| <b>Location</b>           | 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| <b>Designation Number</b> | CN1259                                                                                                                                   |
| <b>A2LA Cert. No.</b>     | 5054.02                                                                                                                                  |
| <b>Description</b>        | Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA                                                                |

## TEST EQUIPMENT OF RADIATED EMISSION TEST

| Equipment                      | Manufacturer   | Model     | S/N        | Cal. Date     | Cal. Due      |
|--------------------------------|----------------|-----------|------------|---------------|---------------|
| TEST RECEIVER                  | R&S            | ESCI      | 10096      | Jun. 12, 2018 | Jun. 11, 2019 |
| EXA Signal Analyzer            | Aglient        | N9010A    | MY53470504 | Dec. 20, 2018 | Dec. 19, 2019 |
| 2.4GHz Fliter                  | Micro-tronics  | 087       | N/A        | Jun. 12, 2018 | Jun. 11, 2019 |
| Attenuator                     | Weinachel Corp | 58-30-33  | N/A        | Jun. 12, 2018 | Jun. 11, 2019 |
| Horn antenna                   | SCHWARZBECK    | BBHA 9170 | #768       | Sep. 21, 2017 | Sep. 20, 2020 |
| Active loop antenna (9K-30MHz) | ZHINAN         | ZN30900C  | 18051      | Jun. 14, 2018 | Jun. 13, 2020 |
| Double-Ridged Waveguide Horn   | ETS LINDGREN   | 3117      | 00034609   | May. 26, 2018 | May. 25, 2020 |
| Broadband Preamplifier         | ETS LINDGREN   | 3117PA    | 00225134   | Oct. 25, 2018 | Oct. 24, 2019 |
| ANTENNA                        | SCHWARZBECK    | VULB9168  | D69250     | Sep. 28, 2017 | Sep. 27, 2019 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 7. PEAK OUTPUT POWER

### 7.1. MEASUREMENT PROCEDURE


For peak power test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
3. RBW > 20 dB bandwidth of the emission being measured.
4. VBW  $\geq$  RBW.
5. Sweep: Auto.
6. Detector function: Peak.
7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

### 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

#### PEAK POWER TEST SETUP

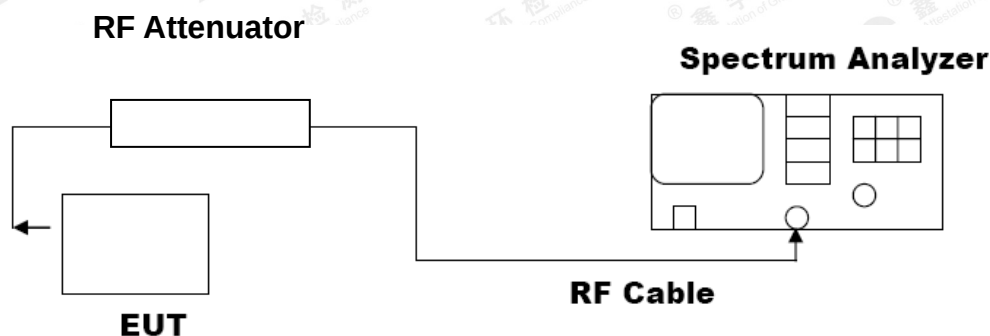


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### 7.3. LIMITS AND MEASUREMENT RESULT

| PEAK OUTPUT POWER MEASUREMENT RESULT<br>FOR GFSK MODULATION |                     |                            |              |
|-------------------------------------------------------------|---------------------|----------------------------|--------------|
| Frequency<br>(GHz)                                          | Peak Power<br>(dBm) | Applicable Limits<br>(dBm) | Pass or Fail |
| 2.402                                                       | -5.613              | 30                         | Pass         |
| 2.441                                                       | -5.490              | 30                         | Pass         |
| 2.480                                                       | -4.378              | 30                         | Pass         |

CH0

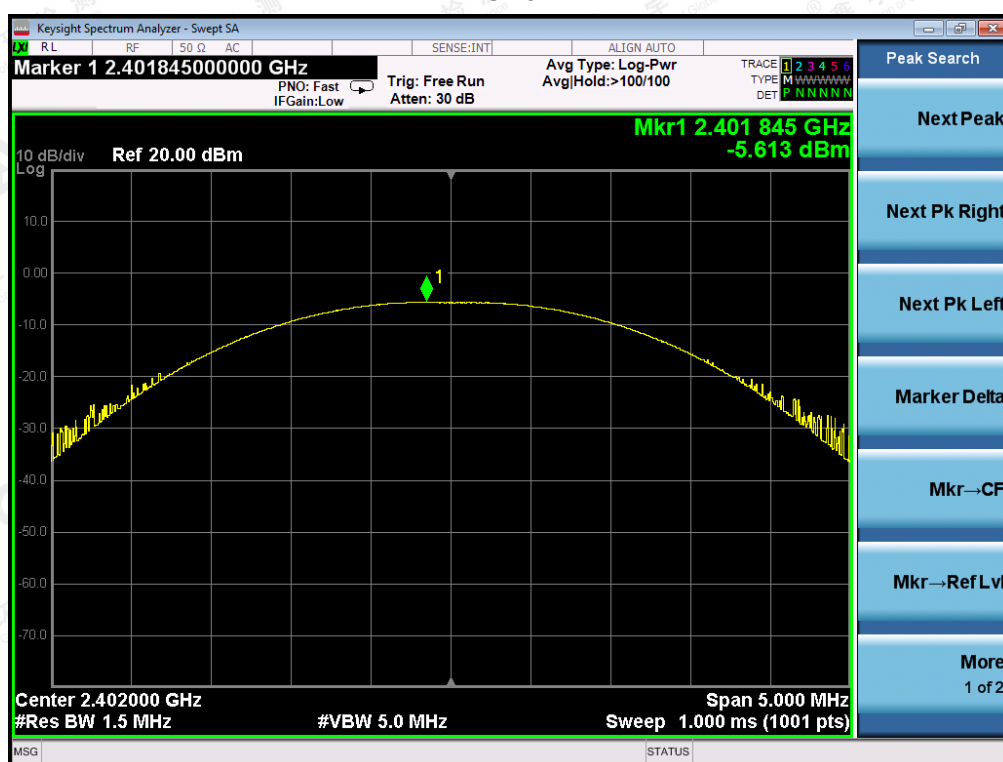

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

CH39




CH78



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


| PEAK OUTPUT POWER MEASUREMENT RESULT<br>FOR $\Pi/4$ -DQPSK MODULATION |                  |                         |              |
|-----------------------------------------------------------------------|------------------|-------------------------|--------------|
| Frequency (GHz)                                                       | Peak Power (dBm) | Applicable Limits (dBm) | Pass or Fail |
| 2.402                                                                 | -3.261           | 30                      | Pass         |
| 2.441                                                                 | -2.903           | 30                      | Pass         |
| 2.480                                                                 | -1.751           | 30                      | Pass         |

CH0

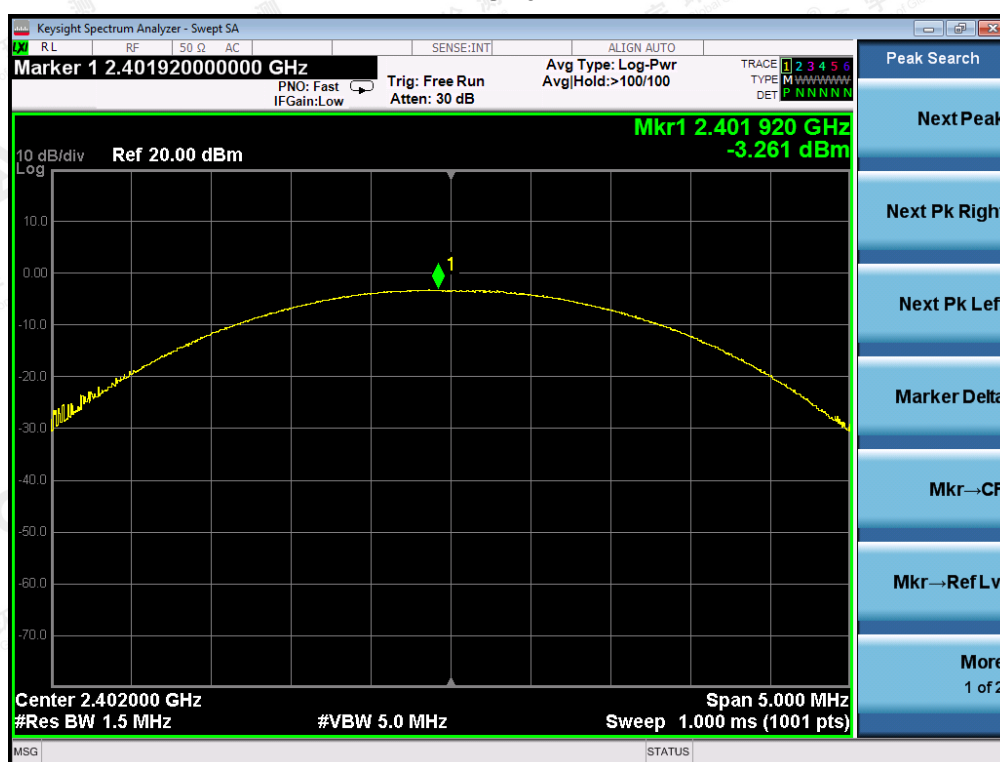


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

CH39

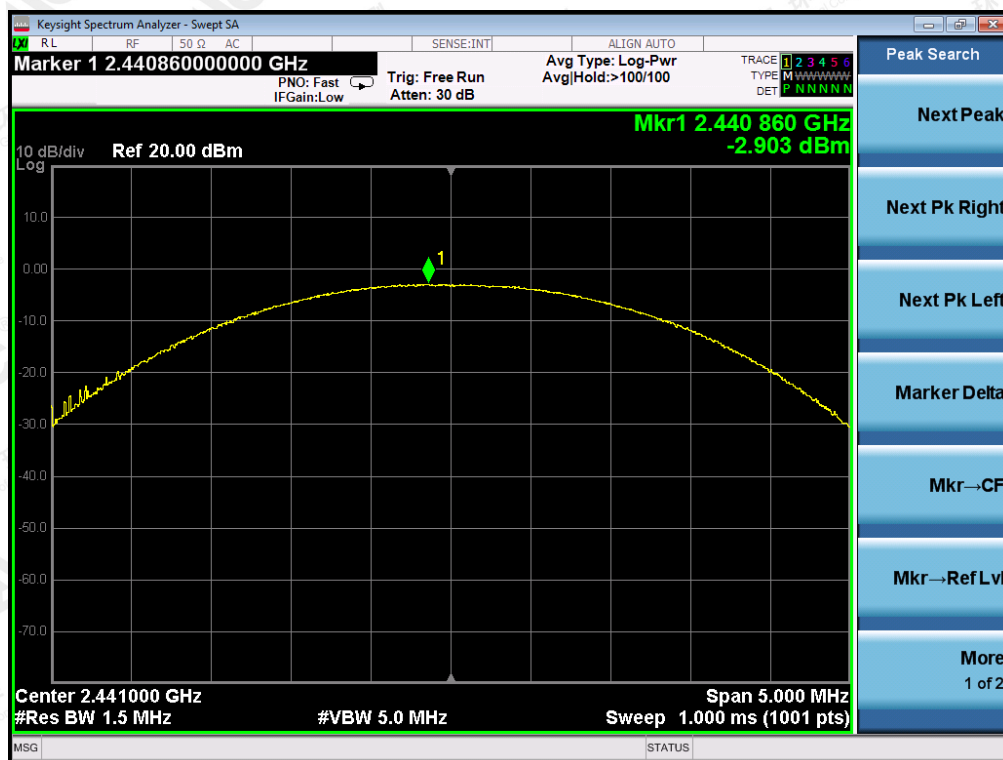

CH78

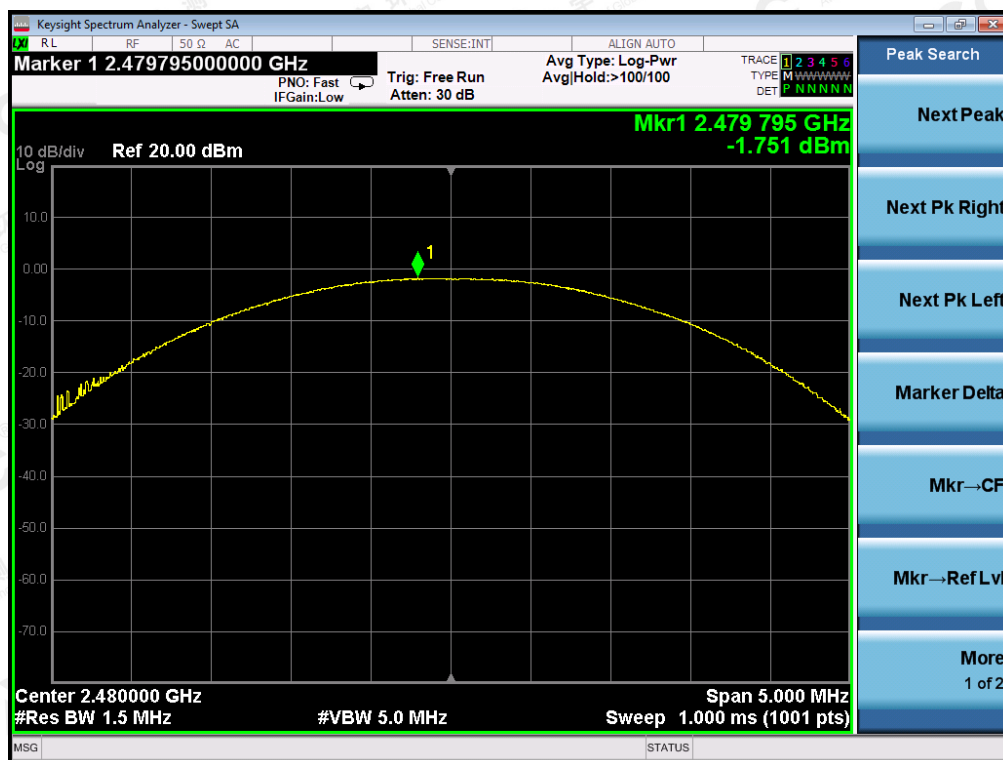


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 8. 20DB BANDWIDTH

### 8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel  
The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

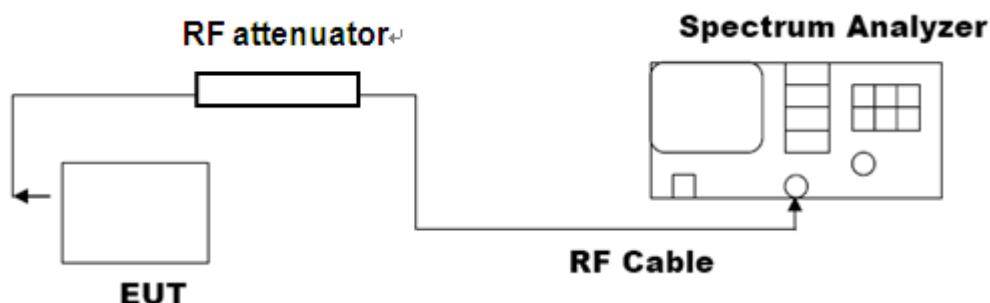


### 8.3. LIMITS AND MEASUREMENT RESULTS

| MEASUREMENT RESULT FOR GFSK MODULATION |                    |        |          |
|----------------------------------------|--------------------|--------|----------|
| Applicable Limits                      | Measurement Result |        |          |
|                                        | Test Data (MHz)    |        | Criteria |
| N/A                                    | Low Channel        | 0.9312 | PASS     |
|                                        | Middle Channel     | 0.9280 | PASS     |
|                                        | High Channel       | 0.9286 | PASS     |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

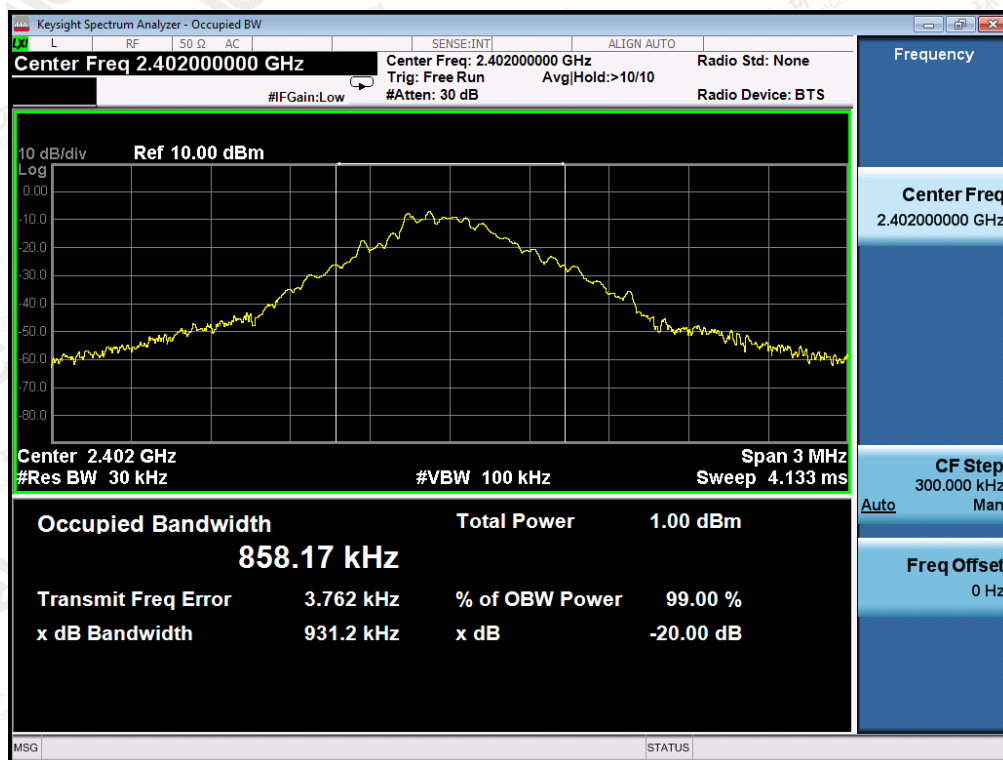


### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

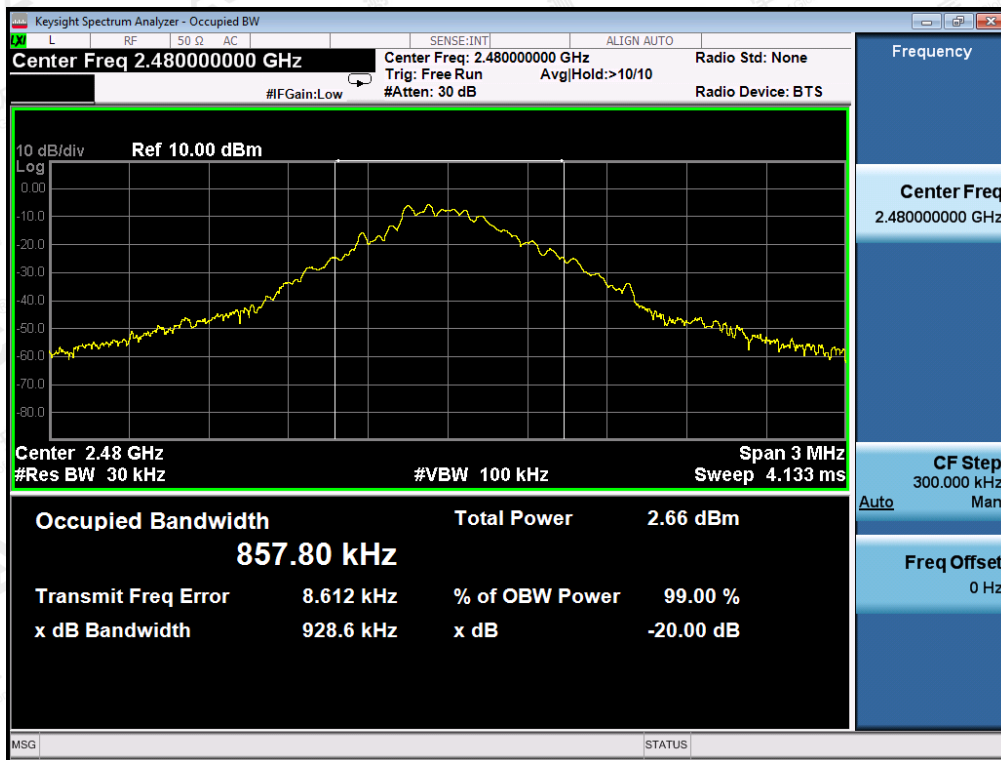

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


| MEASUREMENT RESULT FOR II/4-DQPSK MODULATION |                    |       |          |
|----------------------------------------------|--------------------|-------|----------|
| Applicable Limits                            | Measurement Result |       |          |
|                                              | Test Data (MHz)    |       | Criteria |
| N/A                                          | Low Channel        | 1.276 | PASS     |
|                                              | Middle Channel     | 1.275 | PASS     |
|                                              | High Channel       | 1.277 | PASS     |

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

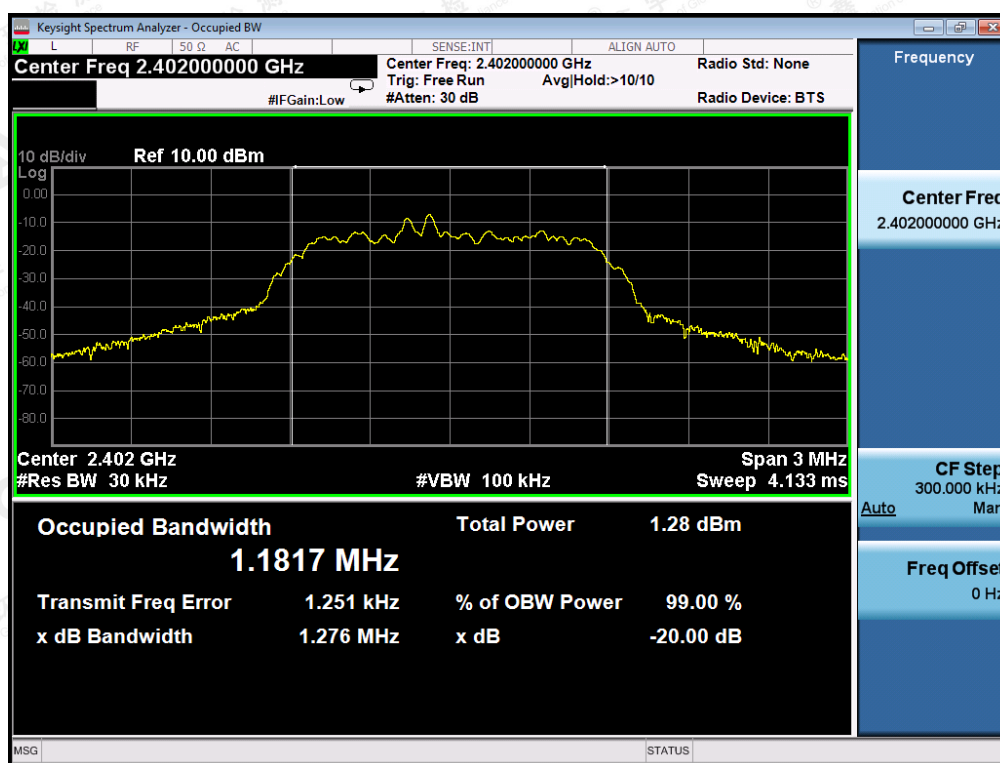

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

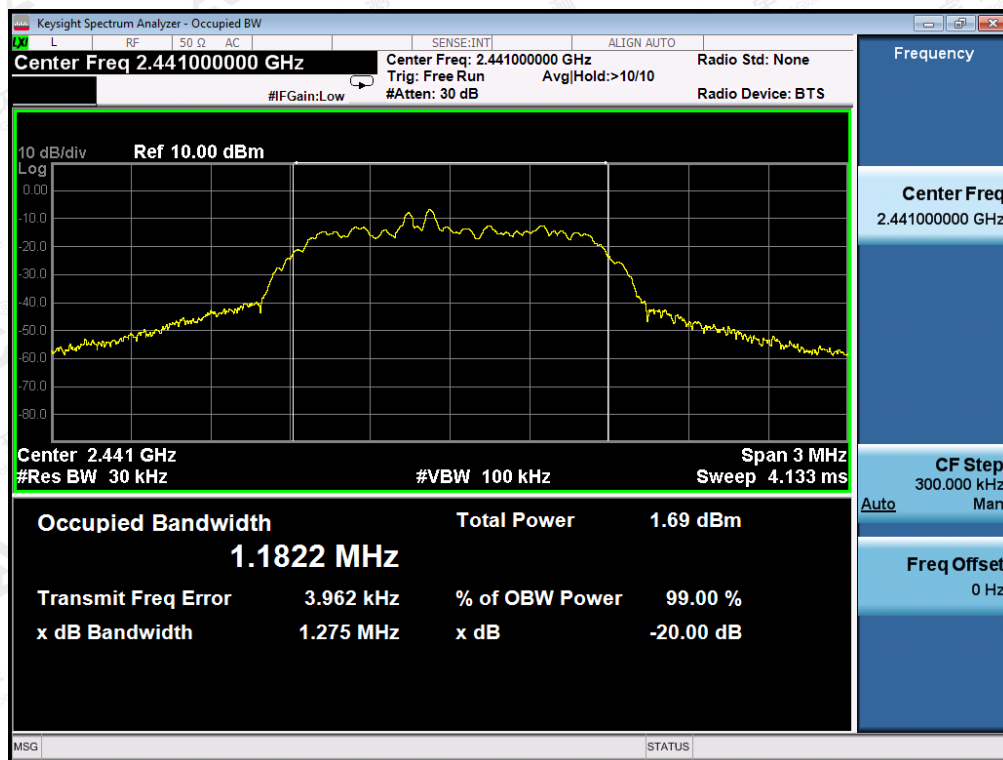

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 9. CONDUCTED SPURIOUS EMISSION

### 9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.  
RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
4. Set SPA Trace 1 Max hold, then View.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

### 9.3. MEASUREMENT EQUIPMENT USED



The same as described in section 6

### 9.4. LIMITS AND MEASUREMENT RESULT

| LIMITS AND MEASUREMENT RESULT                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                |          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|----------|
| Applicable Limits                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Measurement Result                                             |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Test Data                                                      | Criteria |
| In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.<br>In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) | At least -20dBc than the limit Specified on the BOTTOM Channel | PASS     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | At least -20dBc than the limit Specified on the TOP Channel    | PASS     |



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**TEST RESULT FOR ENTIRE FREQUENCY RANGE**  
**TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE**  
**OF GFSK MODULATION IN LOW CHANNEL**

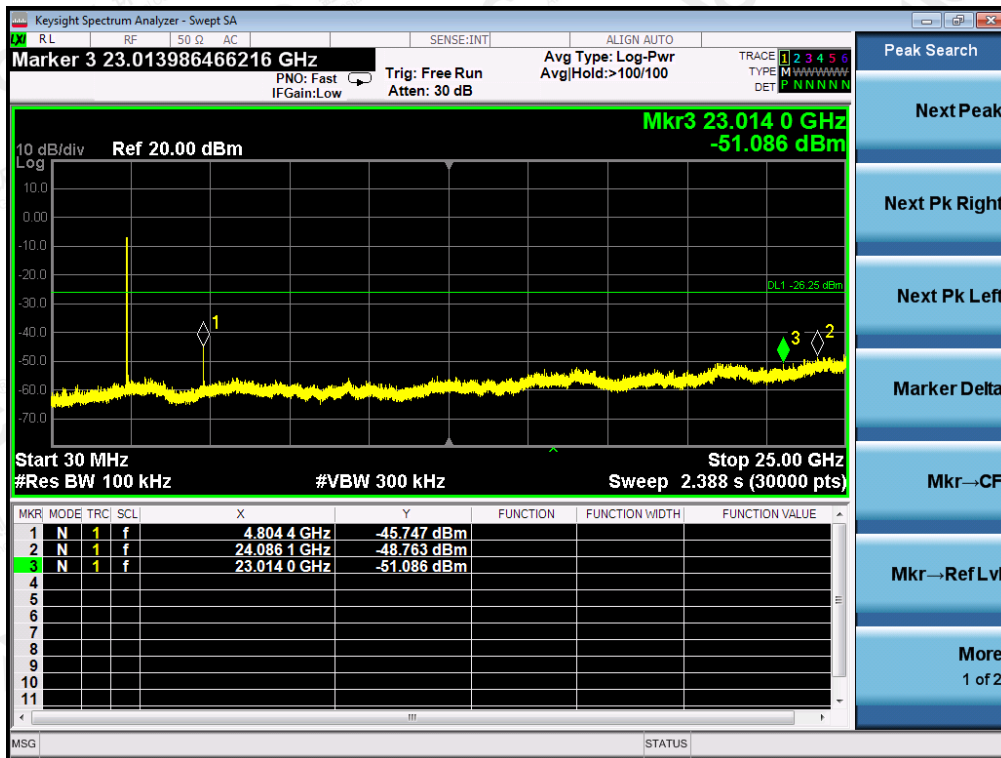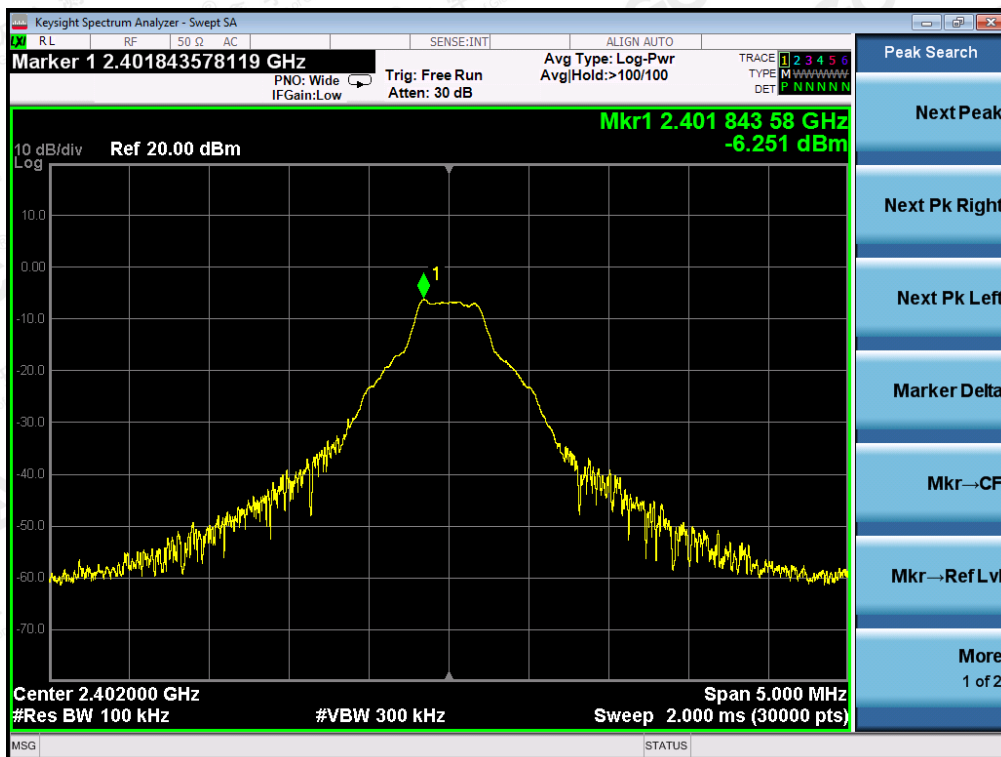



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

# TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

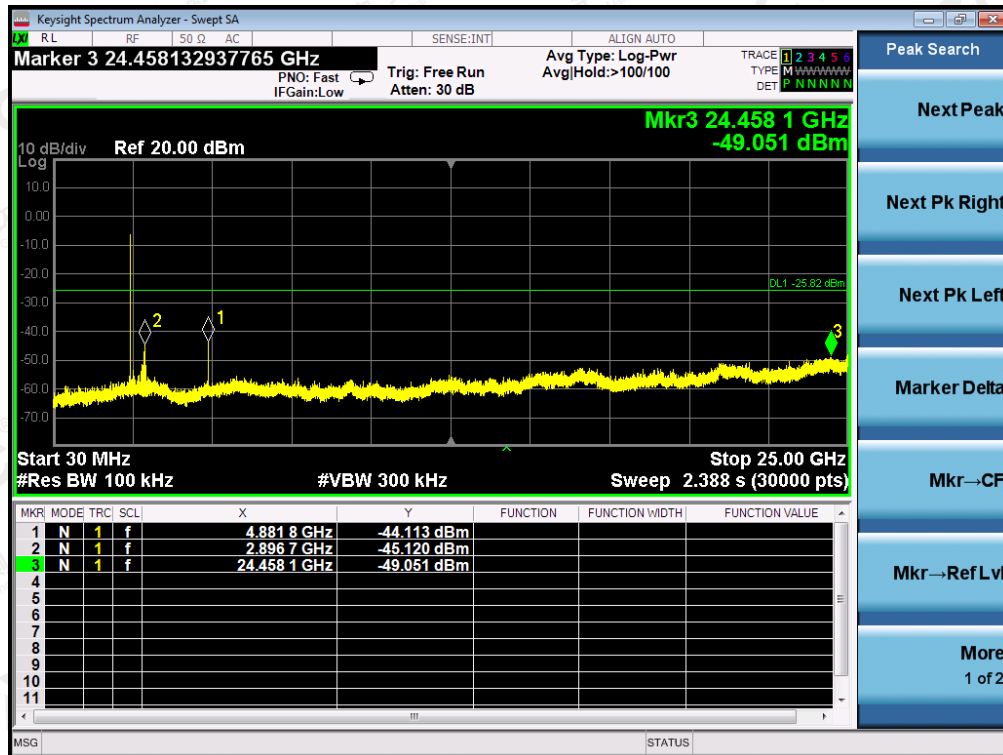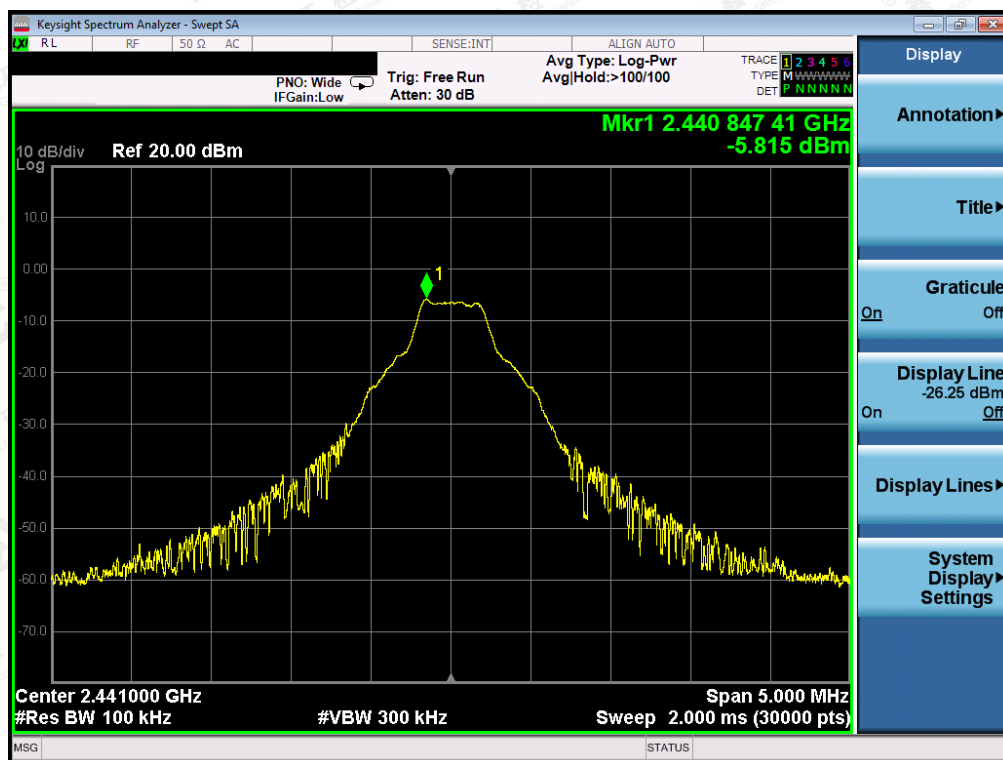

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


### TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

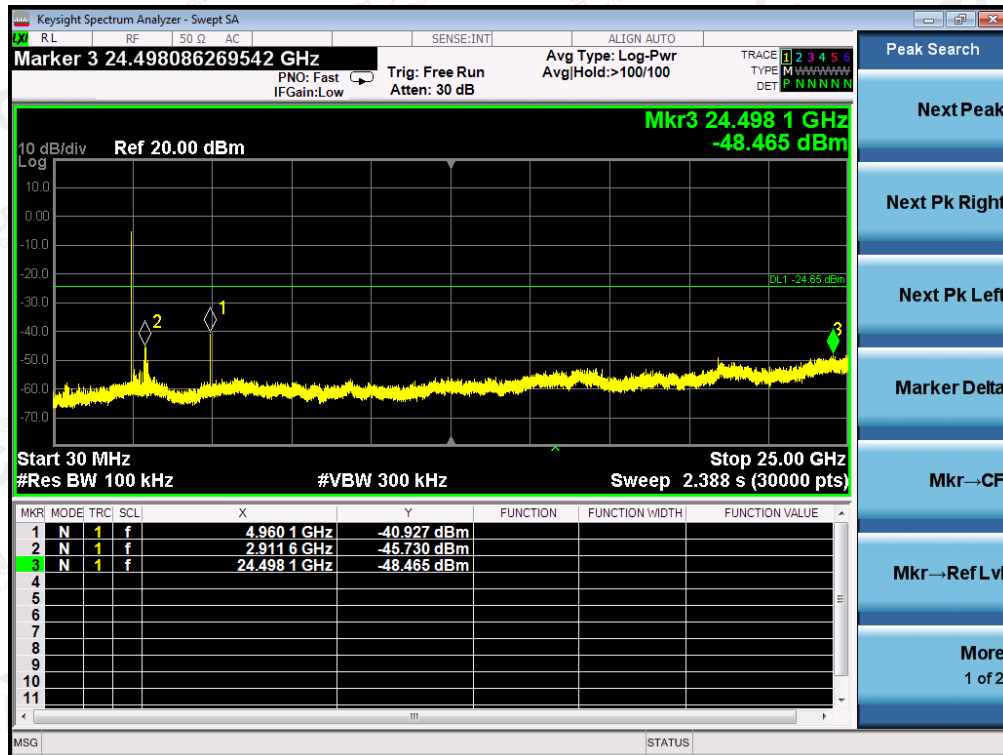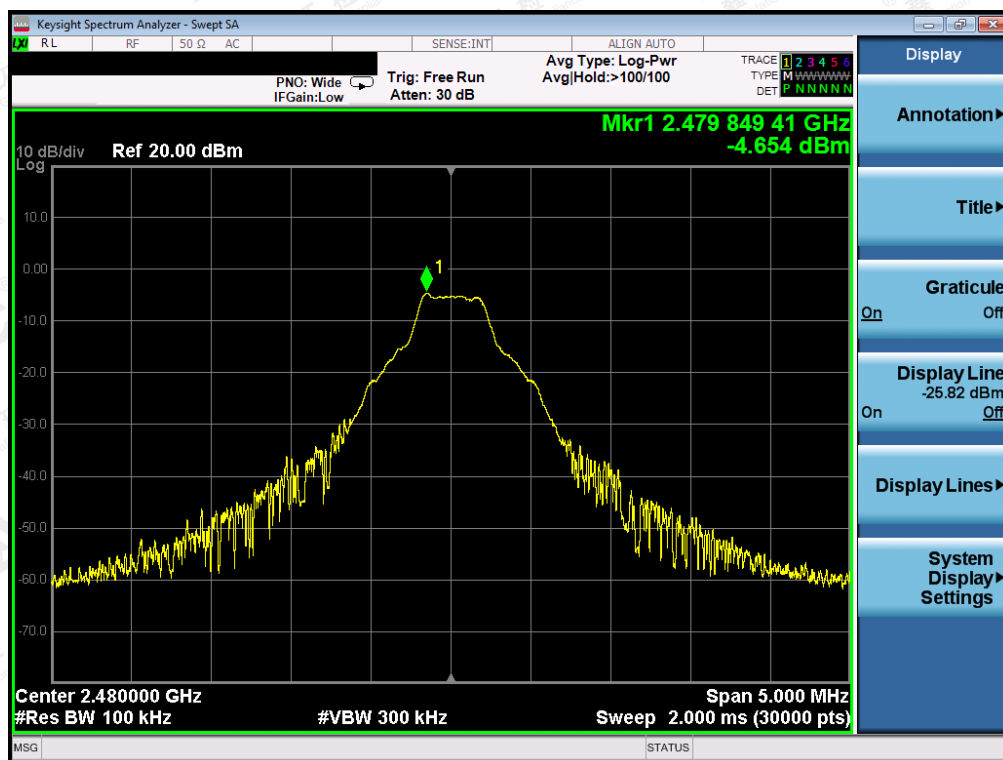


Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit. The GFSK modulation is the worst case and only those data recorded in the report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**TEST RESULT FOR BAND EDGE**  
**GFSK MODULATION IN LOW CHANNEL**  
Hopping off

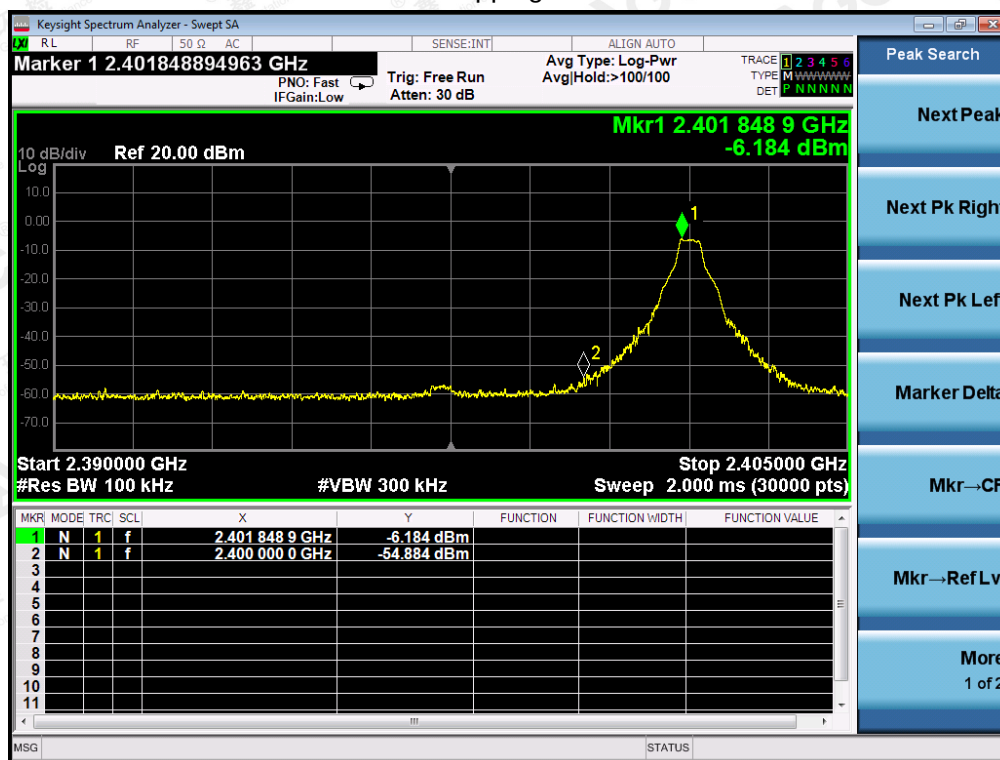


Hopping on

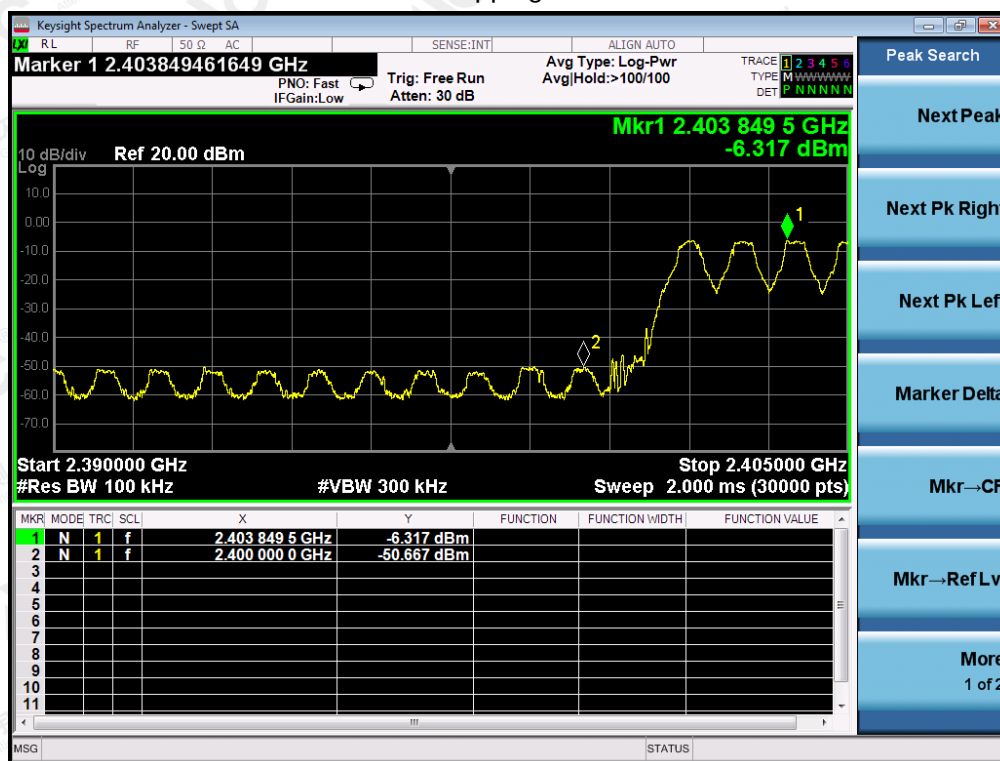


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### GFSK MODULATION IN HIGH CHANNEL Hopping off

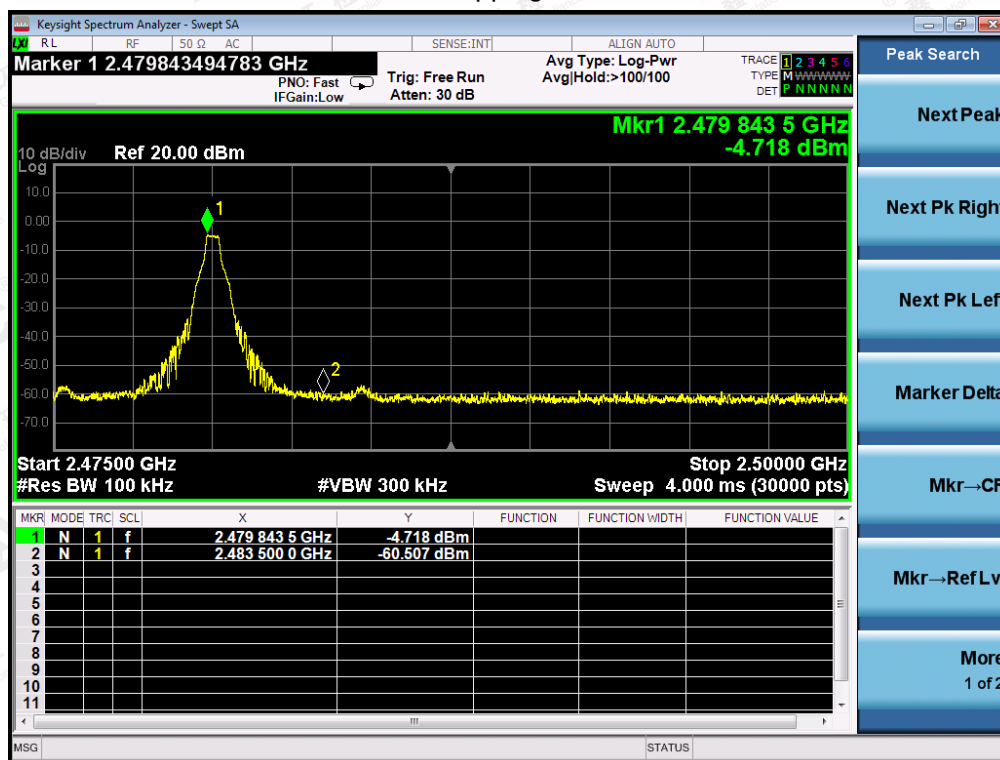


### Hopping on

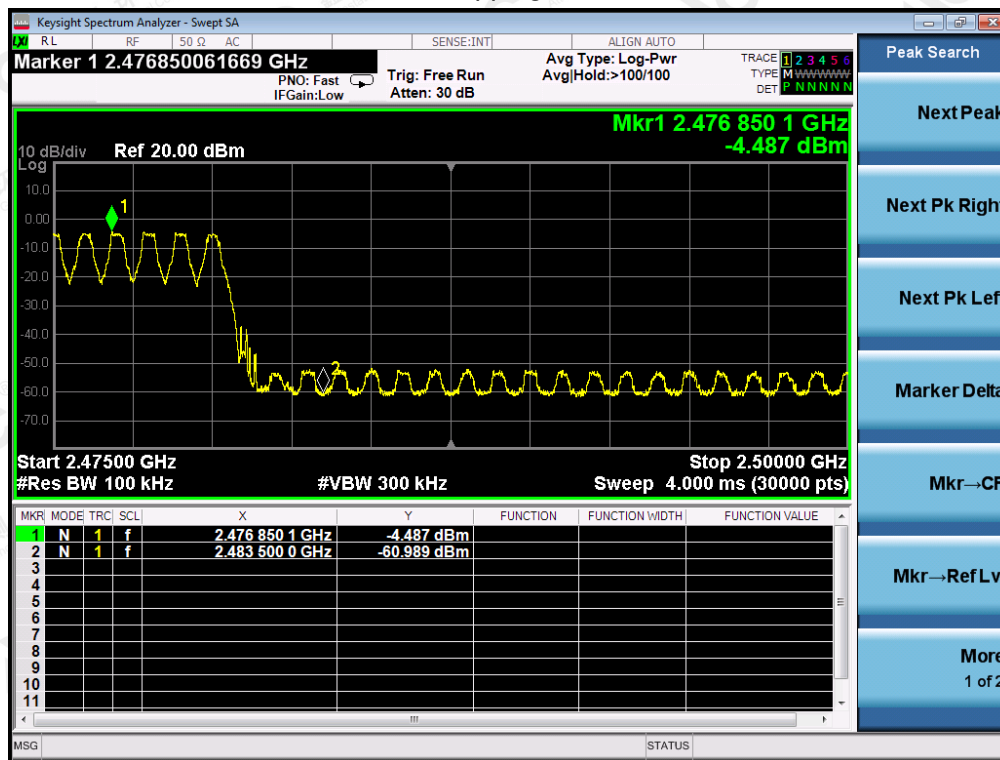


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## II/4-DQPSK MODULATION IN LOW CHANNEL Hopping off

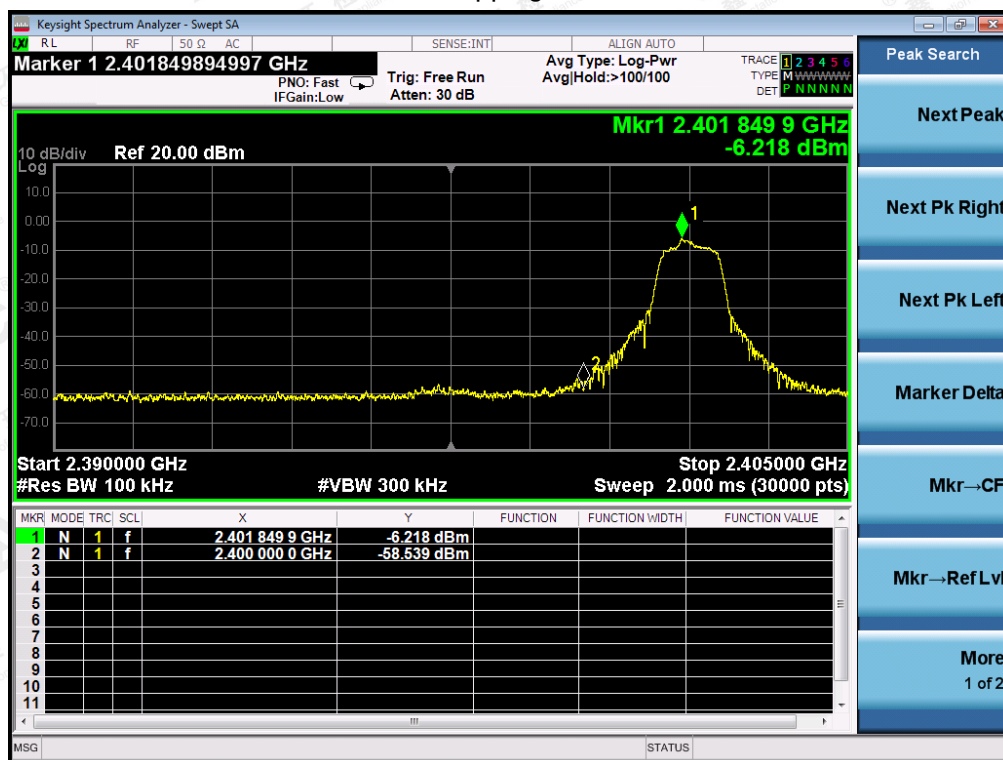


## Hopping on

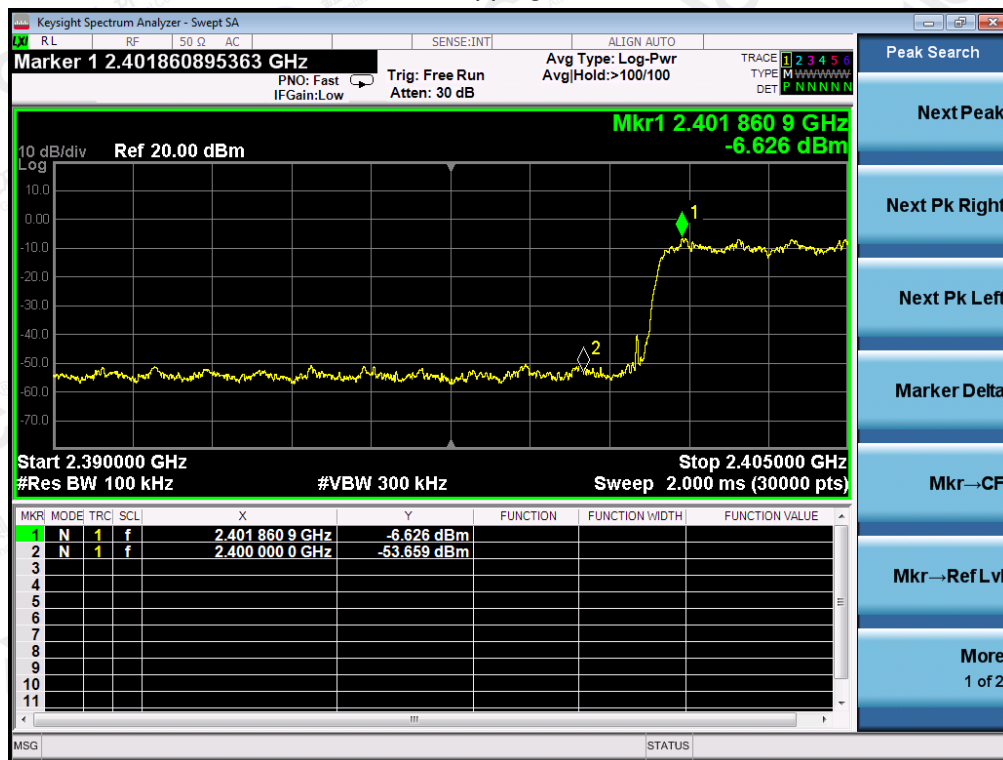


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## II/4-DQPSK MODULATION IN HIGH CHANNEL Hopping off

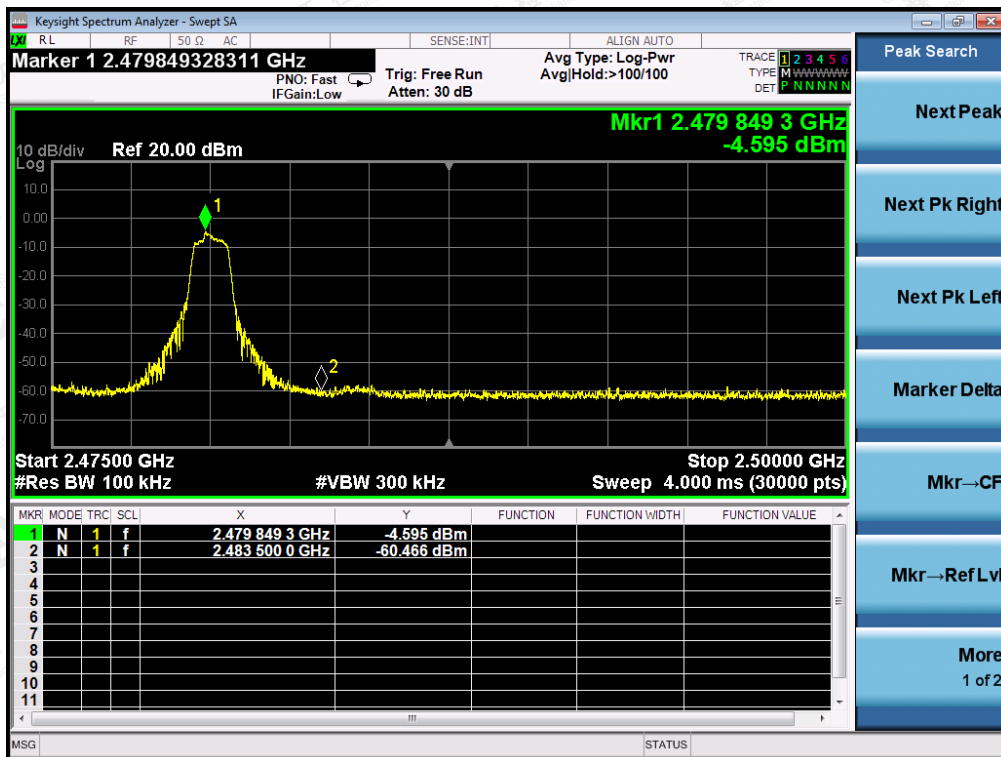

## Hopping on

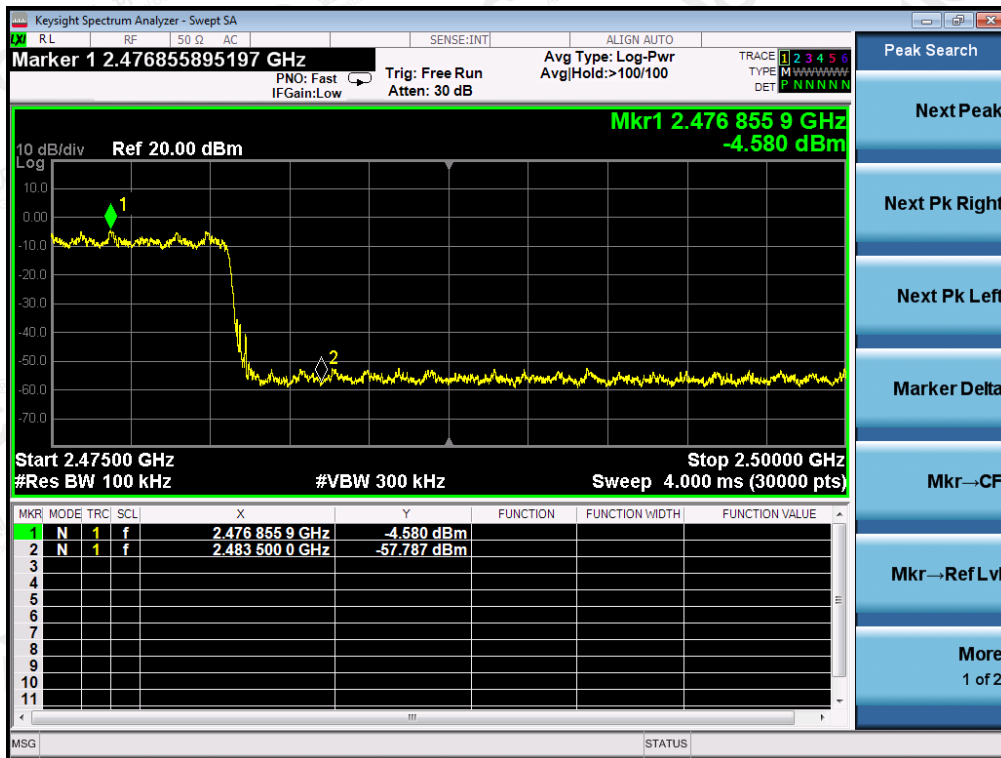

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 10. RADIATED EMISSION

### 10.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

The following table is the setting of spectrum analyzer and receiver.


| Spectrum Parameter    | Setting                                                   |
|-----------------------|-----------------------------------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP                               |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP                               |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP                            |
| Start ~Stop Frequency | 1GHz~26.5GHz<br>1MHz/3MHz for Peak, 1MHz/10Hz for Average |

| Receiver Parameter    | Setting                        |
|-----------------------|--------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP    |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP    |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 10.2. TEST SETUP


### Radiated Emission Test-Setup Frequency Below 30MHz

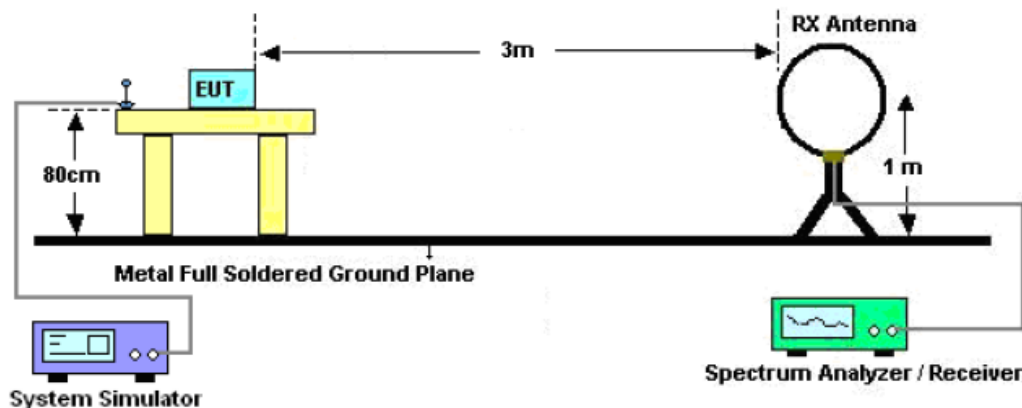

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

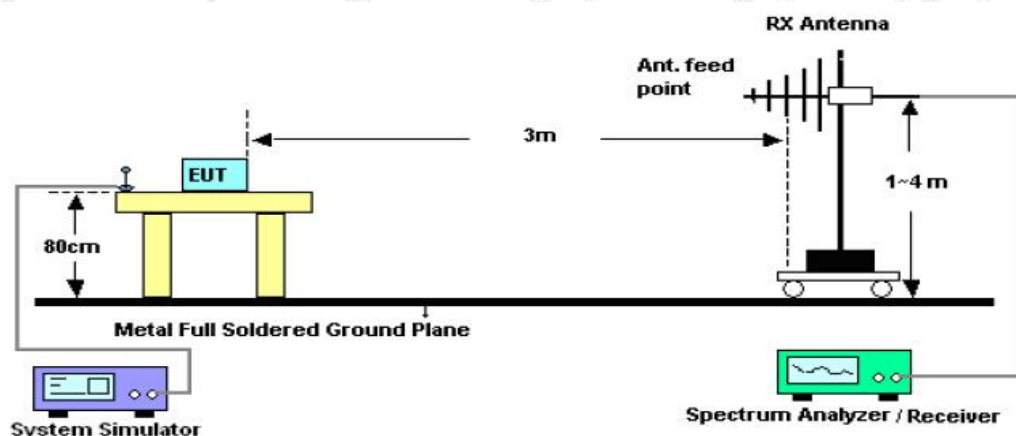

### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

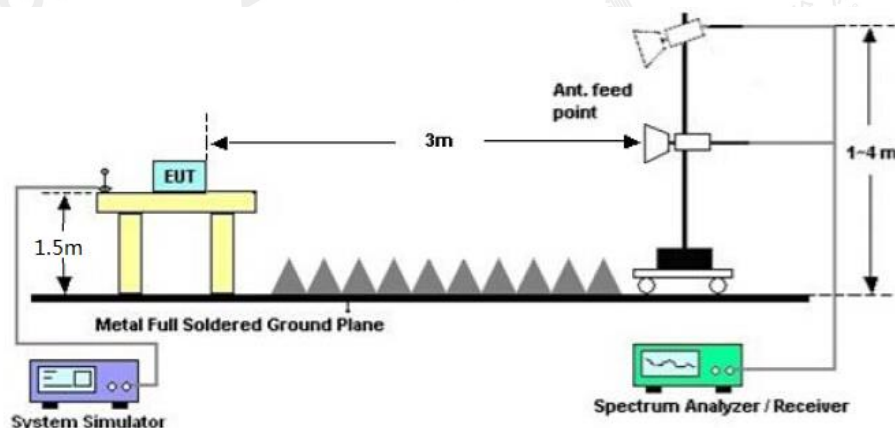

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### 10.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

Note: All modes were tested For restricted band radiated emission,  
 the test records reported below are the worst result compared to other modes.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


## 10.4. TEST RESULT

### RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

### RADIATED EMISSION BELOW 1GHZ

|             |                             |                   |                |
|-------------|-----------------------------|-------------------|----------------|
| EUT         | Wireless Reflective Earbuds | Model Name        | SL82           |
| Temperature | 25°C                        | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                      | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 4                      | Antenna           | Horizontal     |

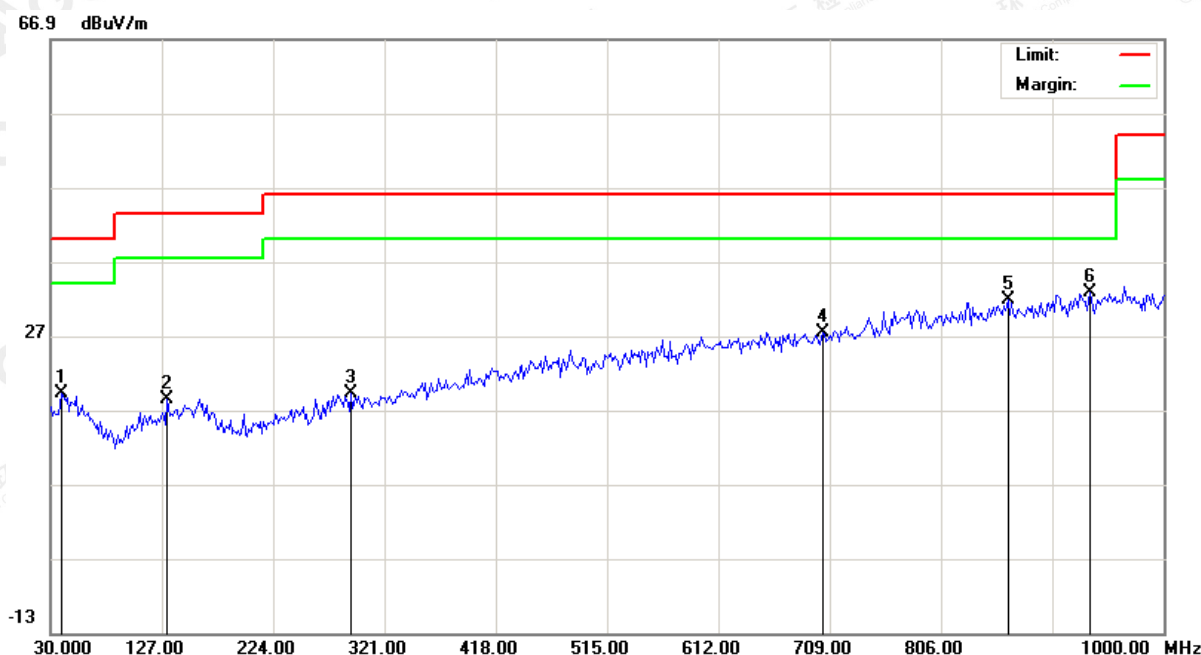


| No. | Mk | Freq.<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Measurement<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|----|--------------|-----------------|----------------|-----------------------|-----------------|------------|----------|-------------------------|---------------------------|---------|
| 1   |    | 39.7000      | -0.79           | 19.98          | 19.19                 | 40.00           | -20.81     | peak     |                         |                           |         |
| 2   |    | 131.8500     | -0.23           | 18.72          | 18.49                 | 43.50           | -25.01     | peak     |                         |                           |         |
| 3   |    | 291.9000     | -0.38           | 19.66          | 19.28                 | 46.00           | -26.72     | peak     |                         |                           |         |
| 4   |    | 702.5333     | -0.77           | 28.21          | 27.44                 | 46.00           | -18.56     | peak     |                         |                           |         |
| 5   |    | 864.2000     | 0.65            | 31.24          | 31.89                 | 46.00           | -14.11     | peak     |                         |                           |         |
| 6   | *  | 935.3333     | 0.83            | 32.00          | 32.83                 | 46.00           | -13.17     | peak     |                         |                           |         |

**RESULT: PASS**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

|             |                             |                   |                |
|-------------|-----------------------------|-------------------|----------------|
| EUT         | Wireless Reflective Earbuds | Model Name        | SL82           |
| Temperature | 25°C                        | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                      | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 4                      | Antenna           | Vertical       |

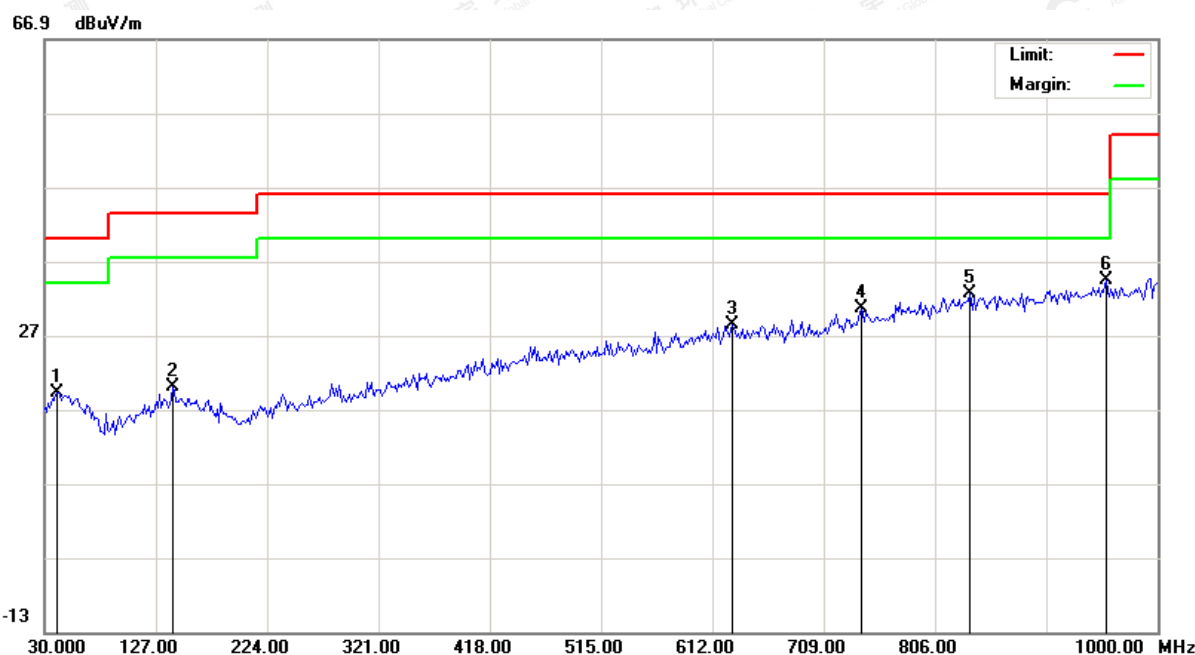

| No. | Mk | Freq.<br>MHz | Reading<br>dBuV | Factor<br>dBm | Measurement<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|----|--------------|-----------------|---------------|-----------------------|-----------------|------------|----------|-------------------------|---------------------------|---------|
| 1   |    | 41.3167      | -0.84           | 20.04         | 19.20                 | 40.00           | -20.80     | peak     |                         |                           |         |
| 2   |    | 141.5500     | 0.75            | 19.23         | 19.98                 | 43.50           | -23.52     | peak     |                         |                           |         |
| 3   |    | 629.7833     | 1.16            | 27.31         | 28.47                 | 46.00           | -17.53     | peak     |                         |                           |         |
| 4   |    | 741.3333     | 1.45            | 29.08         | 30.53                 | 46.00           | -15.47     | peak     |                         |                           |         |
| 5   |    | 836.7167     | 1.65            | 30.88         | 32.53                 | 46.00           | -13.47     | peak     |                         |                           |         |
| 6   | *  | 954.7333     | 2.26            | 32.17         | 34.43                 | 46.00           | -11.57     | peak     |                         |                           |         |

## RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 4 is the worst case and recorded in the report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**RADIATED EMISSION ABOVE 1GHZ**

|                    |                             |                          |                |
|--------------------|-----------------------------|--------------------------|----------------|
| <b>EUT</b>         | Wireless Reflective Earbuds | <b>Model Name</b>        | SL82           |
| <b>Temperature</b> | 25°C                        | <b>Relative Humidity</b> | 55.4%          |
| <b>Pressure</b>    | 960hPa                      | <b>Test Voltage</b>      | Normal Voltage |
| <b>Test Mode</b>   | Mode 1                      | <b>Antenna</b>           | Horizontal     |

| Frequency<br>(MHz)                                    | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|-------------------------------------------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4804.062                                              | 46.69                   | 3.76           | 50.45                      | 74.00              | -23.55         | peak       |
| 4804.062                                              | 44.19                   | 3.76           | 47.95                      | 54.00              | -6.05          | AVG        |
| 7206.093                                              | 37.67                   | 8.17           | 45.84                      | 74.00              | -28.16         | peak       |
| 7206.093                                              | 32.92                   | 8.17           | 41.09                      | 54.00              | -12.91         | AVG        |
|                                                       |                         |                |                            |                    |                |            |
|                                                       |                         |                |                            |                    |                |            |
| Remark:                                               |                         |                |                            |                    |                |            |
| Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                         |                |                            |                    |                |            |

|                    |                             |                          |                |
|--------------------|-----------------------------|--------------------------|----------------|
| <b>EUT</b>         | Wireless Reflective Earbuds | <b>Model Name</b>        | SL82           |
| <b>Temperature</b> | 25°C                        | <b>Relative Humidity</b> | 55.4%          |
| <b>Pressure</b>    | 960hPa                      | <b>Test Voltage</b>      | Normal Voltage |
| <b>Test Mode</b>   | Mode 1                      | <b>Antenna</b>           | Vertical       |

| Frequency<br>(MHz)                                    | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|-------------------------------------------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4804.062                                              | 49.69                   | 3.76           | 53.45                      | 74.00              | -20.55         | peak       |
| 4804.062                                              | 43.94                   | 3.76           | 47.70                      | 54.00              | -6.31          | AVG        |
| 7206.093                                              | 38.68                   | 8.17           | 46.85                      | 74.00              | -27.16         | peak       |
| 7206.093                                              | 35.88                   | 8.17           | 44.05                      | 54.00              | -9.95          | AVG        |
|                                                       |                         |                |                            |                    |                |            |
|                                                       |                         |                |                            |                    |                |            |
| Remark:                                               |                         |                |                            |                    |                |            |
| Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                         |                |                            |                    |                |            |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

|                    |                             |                          |                |
|--------------------|-----------------------------|--------------------------|----------------|
| <b>EUT</b>         | Wireless Reflective Earbuds | <b>Model Name</b>        | SL82           |
| <b>Temperature</b> | 25°C                        | <b>Relative Humidity</b> | 55.4%          |
| <b>Pressure</b>    | 960hPa                      | <b>Test Voltage</b>      | Normal Voltage |
| <b>Test Mode</b>   | Mode 2                      | <b>Antenna</b>           | Horizontal     |

| Frequency<br>(MHz)                                    | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|-------------------------------------------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4882.062                                              | 47.70                   | 3.78           | 51.48                      | 74.00              | -22.52         | peak       |
| 4882.062                                              | 43.06                   | 3.78           | 46.84                      | 54.00              | -7.16          | AVG        |
| 7323.093                                              | 41.57                   | 8.23           | 49.80                      | 74.00              | -24.20         | peak       |
| 7323.093                                              | 38.84                   | 8.23           | 47.07                      | 54.00              | -6.94          | AVG        |
|                                                       |                         |                |                            |                    |                |            |
|                                                       |                         |                |                            |                    |                |            |
| Remark:                                               |                         |                |                            |                    |                |            |
| Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                         |                |                            |                    |                |            |

|                    |                             |                          |                |
|--------------------|-----------------------------|--------------------------|----------------|
| <b>EUT</b>         | Wireless Reflective Earbuds | <b>Model Name</b>        | SL82           |
| <b>Temperature</b> | 25°C                        | <b>Relative Humidity</b> | 55.4%          |
| <b>Pressure</b>    | 960hPa                      | <b>Test Voltage</b>      | Normal Voltage |
| <b>Test Mode</b>   | Mode 2                      | <b>Antenna</b>           | Vertical       |

| Frequency<br>(MHz)                                    | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|-------------------------------------------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4882.062                                              | 48.06                   | 3.78           | 51.84                      | 74.00              | -22.16         | peak       |
| 4882.062                                              | 45.17                   | 3.78           | 48.95                      | 54.00              | -5.05          | AVG        |
| 7323.093                                              | 40.88                   | 8.23           | 49.11                      | 74.00              | -24.89         | peak       |
| 7323.093                                              | 38.24                   | 8.23           | 46.47                      | 54.00              | -7.53          | AVG        |
|                                                       |                         |                |                            |                    |                |            |
|                                                       |                         |                |                            |                    |                |            |
| Remark:                                               |                         |                |                            |                    |                |            |
| Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                         |                |                            |                    |                |            |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

|                    |                             |                          |                |
|--------------------|-----------------------------|--------------------------|----------------|
| <b>EUT</b>         | Wireless Reflective Earbuds | <b>Model Name</b>        | SL82           |
| <b>Temperature</b> | 25°C                        | <b>Relative Humidity</b> | 55.4%          |
| <b>Pressure</b>    | 960hPa                      | <b>Test Voltage</b>      | Normal Voltage |
| <b>Test Mode</b>   | Mode 3                      | <b>Antenna</b>           | Horizontal     |

| Frequency<br>(MHz)                                    | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|-------------------------------------------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4960.062                                              | 46.97                   | 3.81           | 50.78                      | 74.00              | -23.22         | peak       |
| 4960.062                                              | 43.25                   | 3.81           | 47.06                      | 54.00              | -6.94          | AVG        |
| 7440.093                                              | 38.58                   | 8.27           | 46.85                      | 74.00              | -27.15         | peak       |
| 7440.093                                              | 36.78                   | 8.27           | 45.05                      | 54.00              | -8.95          | AVG        |
|                                                       |                         |                |                            |                    |                |            |
|                                                       |                         |                |                            |                    |                |            |
| Remark:                                               |                         |                |                            |                    |                |            |
| Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                         |                |                            |                    |                |            |

|                    |                             |                          |                |
|--------------------|-----------------------------|--------------------------|----------------|
| <b>EUT</b>         | Wireless Reflective Earbuds | <b>Model Name</b>        | SL82           |
| <b>Temperature</b> | 25°C                        | <b>Relative Humidity</b> | 55.4%          |
| <b>Pressure</b>    | 960hPa                      | <b>Test Voltage</b>      | Normal Voltage |
| <b>Test Mode</b>   | Mode 3                      | <b>Antenna</b>           | Vertical       |

| Frequency<br>(MHz)                                    | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|-------------------------------------------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4960.062                                              | 46.67                   | 3.81           | 50.48                      | 74.00              | -23.52         | peak       |
| 4960.062                                              | 44.84                   | 3.81           | 48.65                      | 54.00              | -5.35          | AVG        |
| 7440.093                                              | 39.68                   | 8.27           | 47.95                      | 74.00              | -26.06         | peak       |
| 7440.093                                              | 37.43                   | 8.27           | 45.70                      | 54.00              | -8.31          | AVG        |
|                                                       |                         |                |                            |                    |                |            |
|                                                       |                         |                |                            |                    |                |            |
| Remark:                                               |                         |                |                            |                    |                |            |
| Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                         |                |                            |                    |                |            |

**RESULT: PASS**

**Note:**

Other emissions from 1G to 25 GHz are considered as ambient noise. No recording in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The GFSK modulation is the worst case and recorded in the report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


### TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS

|             |                             |                   |                |
|-------------|-----------------------------|-------------------|----------------|
| EUT         | Wireless Reflective Earbuds | Model Name        | SL82           |
| Temperature | 25°C                        | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                      | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 1                      | Antenna           | Horizontal     |

PK



AV

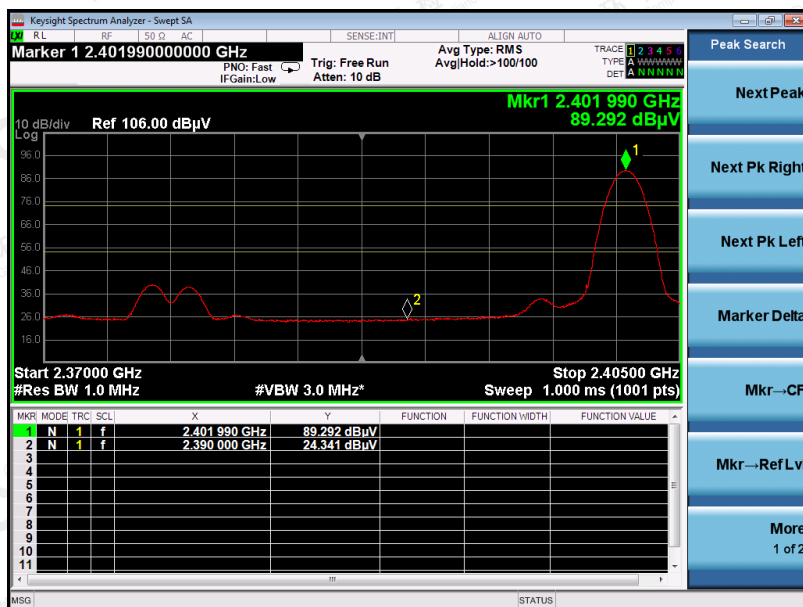

**RESULT: PASS**


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

|             |                             |                   |                |
|-------------|-----------------------------|-------------------|----------------|
| EUT         | Wireless Reflective Earbuds | Model Name        | SL82           |
| Temperature | 25°C                        | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                      | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 1                      | Antenna           | Vertical       |

PK



AV

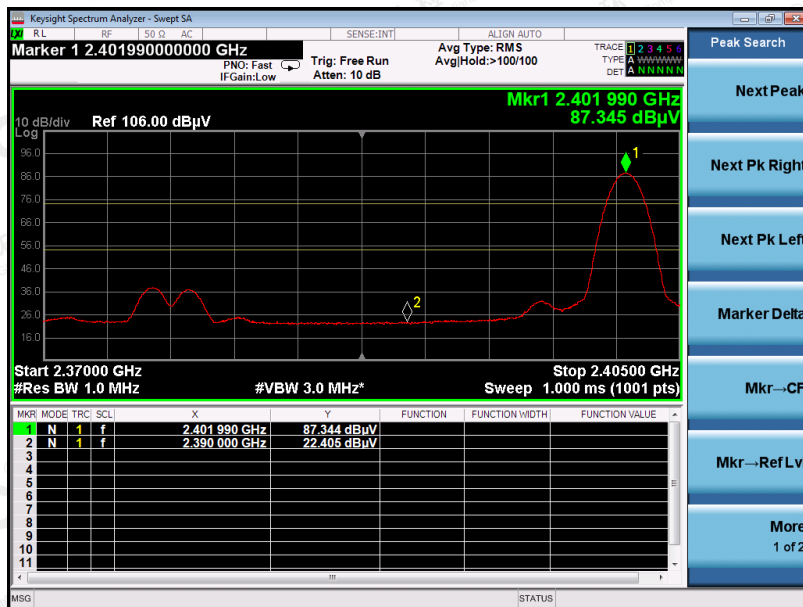

**RESULT: PASS**


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

|             |                             |                   |                |
|-------------|-----------------------------|-------------------|----------------|
| EUT         | Wireless Reflective Earbuds | Model Name        | SL82           |
| Temperature | 25°C                        | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                      | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 3                      | Antenna           | Horizontal     |

PK



AV

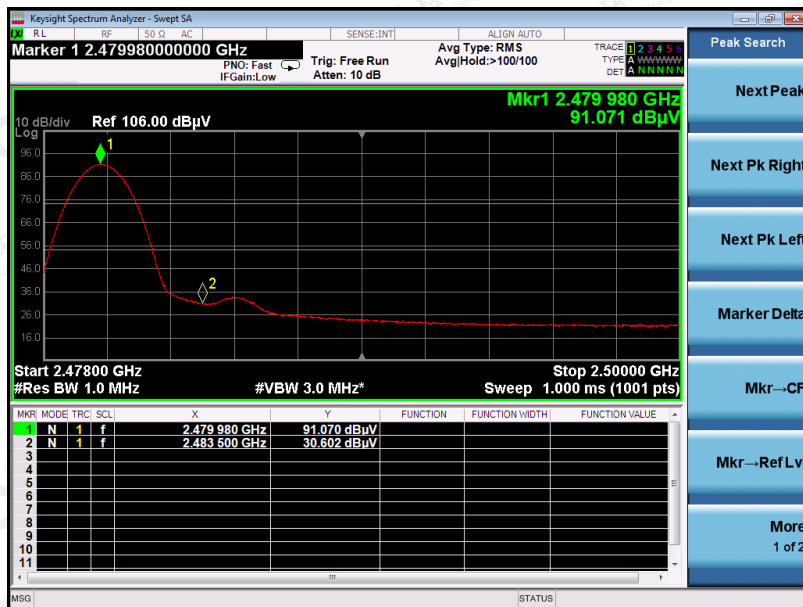

**RESULT: PASS**


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

|             |                             |                   |                |
|-------------|-----------------------------|-------------------|----------------|
| EUT         | Wireless Reflective Earbuds | Model Name        | SL82           |
| Temperature | 25°C                        | Relative Humidity | 55.4%          |
| Pressure    | 960hPa                      | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 3                      | Antenna           | Vertical       |

PK



AV

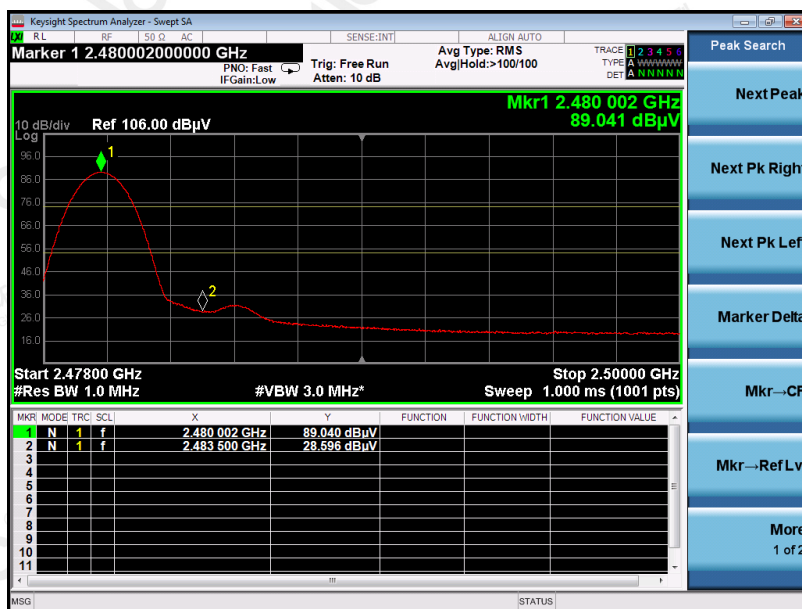

## RESULT: PASS

**Note:** The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μV) to represent the Amplitude. Use the F dB(μV/m) to represent the Field Strength. So A=F. All test modes had been pre-tested. The GFSK modulation is the worst case and recorded in the report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 11. NUMBER OF HOPPING FREQUENCY

### 11.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. VBW  $\geq$  RBW. Sweep: Auto. Detector function: Peak. Trace: Max hold.
4. Allow the trace to stabilize.

### 11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2


### 11.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

### 11.4. LIMITS AND MEASUREMENT RESULT

| TOTAL NO. OF HOPPING CHANNEL | LIMIT (NO. OF CH) | MEASUREMENT (NO. OF CH) | RESULT |
|------------------------------|-------------------|-------------------------|--------|
|                              | $\geq 15$         | 79                      | PASS   |

TEST PLOT FOR NO. OF TOTAL CHANNELS

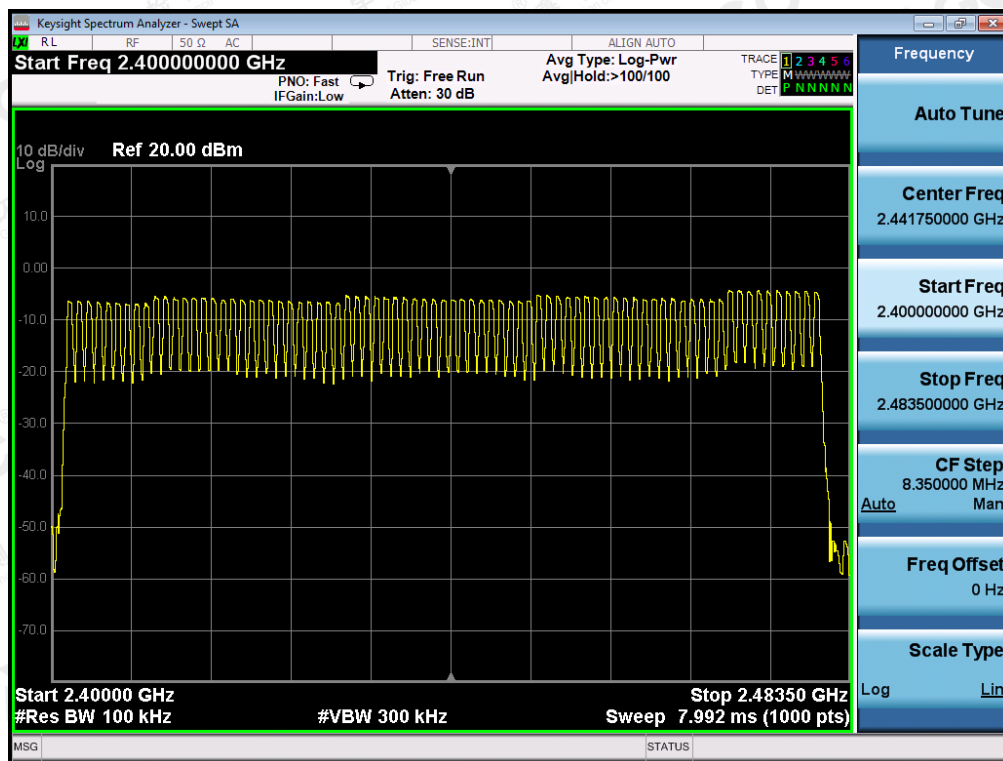

Note: The GFSK modulation is the worst case and recorded in the report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 12. TIME OF OCCUPANCY (DWELL TIME)

### 12.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: Zero span, centered on a hopping channel.
2. RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1/T$ , where T is the expected dwell time per channel.
3. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
4. Detector function: Peak. Trace: Max hold.
5. Use the marker-delta function to determine the transmit time per hop.
6. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer)  $\times$  (period specified in the requirements / analyzer sweep time)

7. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

### 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

### 12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6


### 12.4. LIMITS AND MEASUREMENT RESULT

| Channel | Time of Pulse for DH5 (ms) | Number of hops in the period specified in the requirements | Sweep Time (ms) | Limit (ms) |
|---------|----------------------------|------------------------------------------------------------|-----------------|------------|
| Low     | 2.888                      | 27*4                                                       | 311.904         | 400        |
| Middle  | 2.889                      | 27*4                                                       | 312.012         | 400        |
| High    | 2.894                      | 26*4                                                       | 300.976         | 400        |

Note: The GFSK modulation is the worst case and recorded in the report.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### TEST PLOT OF LOW CHANNEL

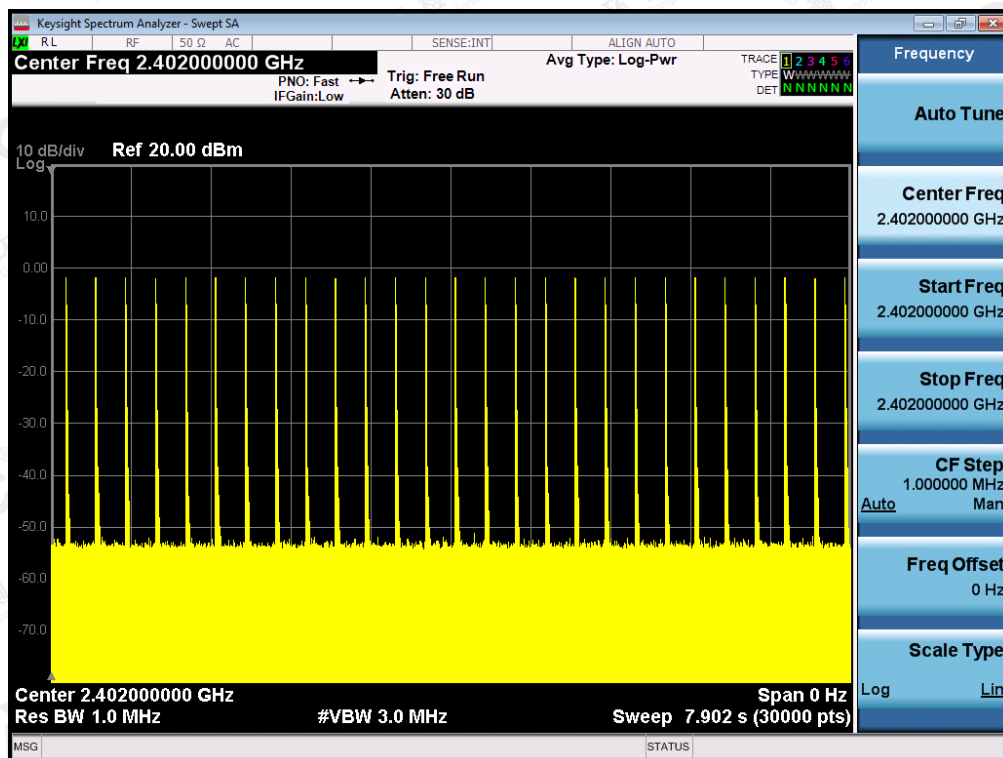



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### TEST PLOT OF MIDDLE CHANNEL

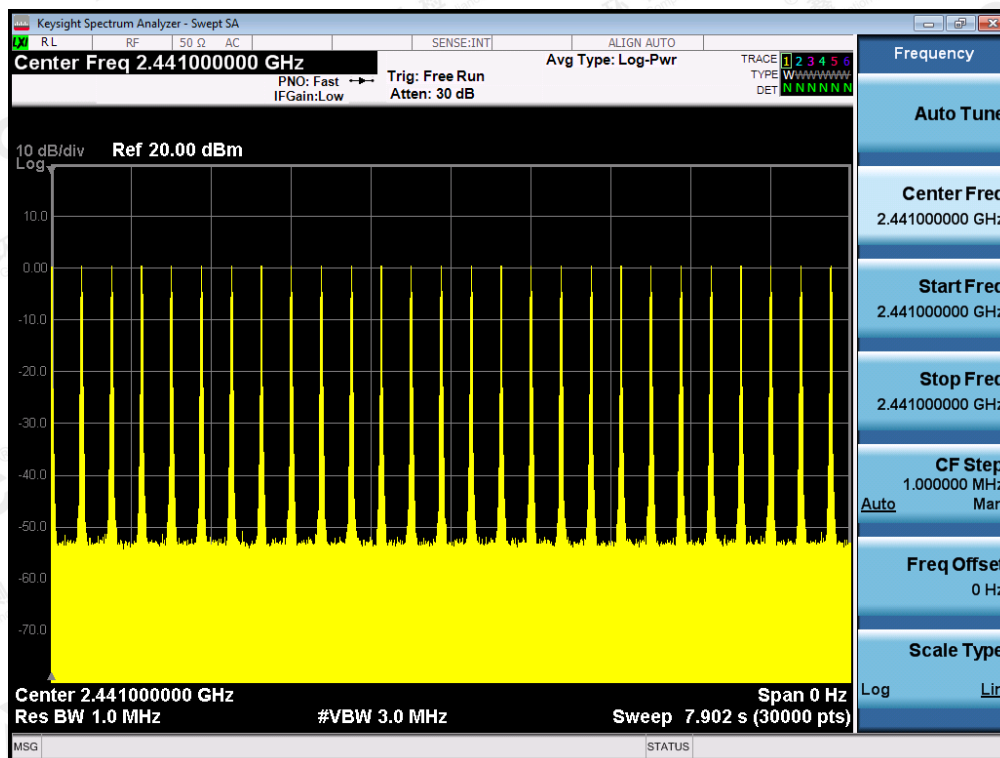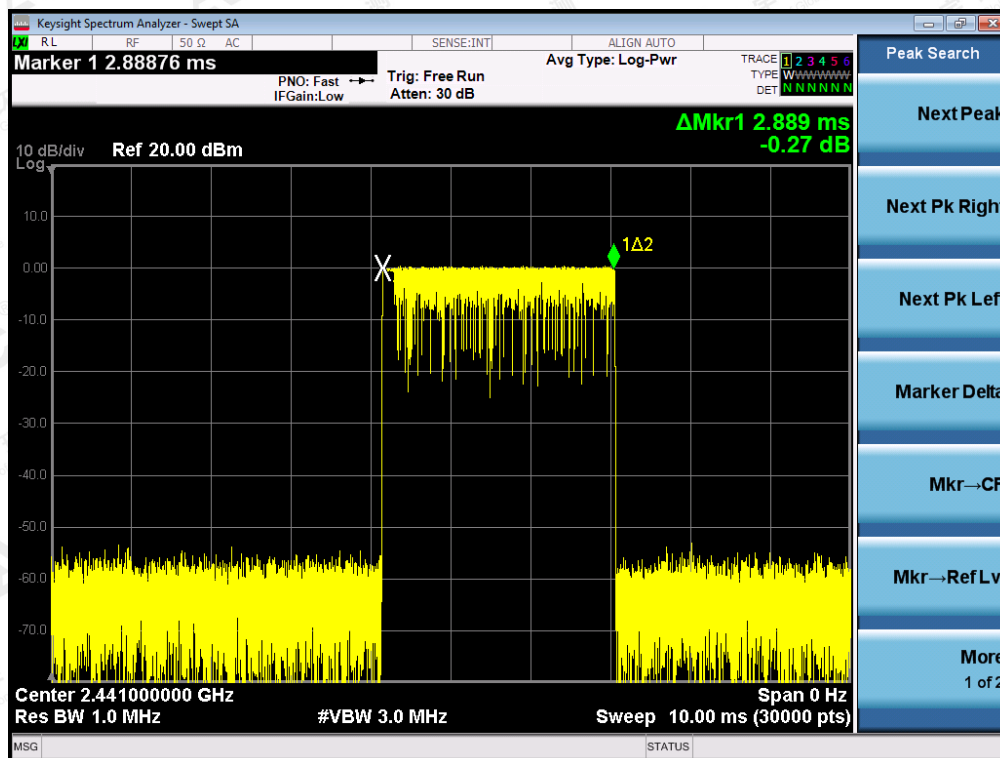

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### TEST PLOT OF HIGH CHANNEL

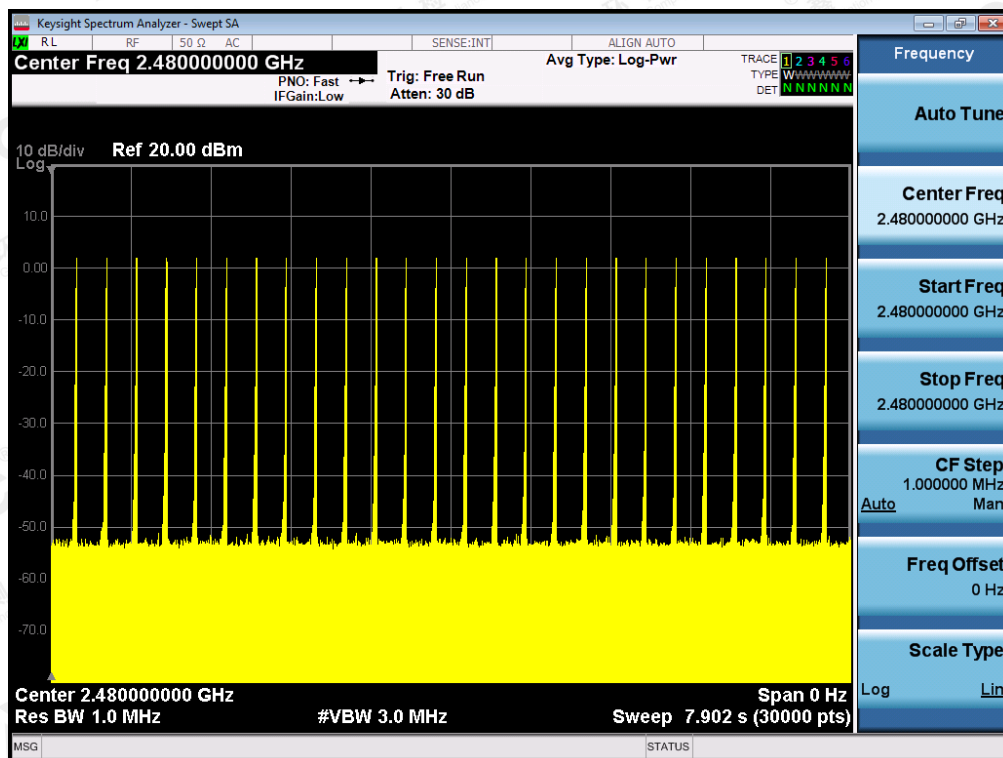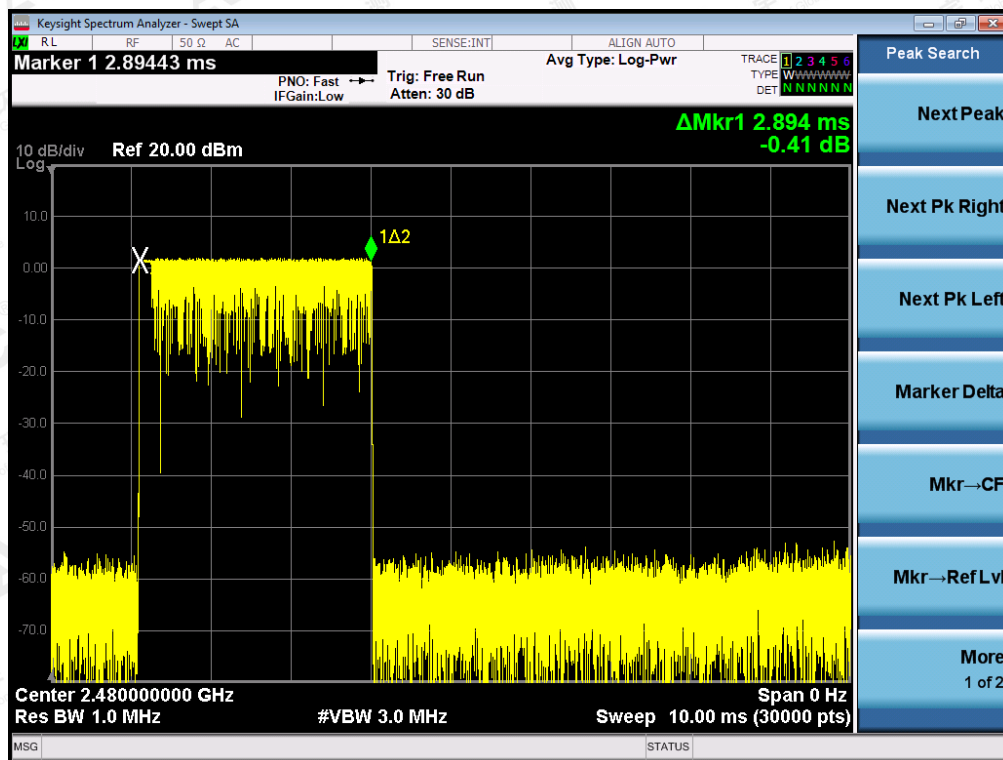

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### 13. FREQUENCY SEPARATION

#### 13.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: Wide enough to capture the peaks of two adjacent channels.
2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
3. Video (or average) bandwidth (VBW)  $\geq$  RBW.
4. Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

#### 13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

#### 13.4. LIMITS AND MEASUREMENT RESULT

| CHANNEL   | CHANNEL SEPARATION | LIMIT                         | RESULT |
|-----------|--------------------|-------------------------------|--------|
|           | KHz                | KHz                           |        |
| CH01-CH02 | 1000               | $\geq 25$ KHz or 2/3 20 dB BW | Pass   |

TEST PLOT FOR FREQUENCY SEPARATION




Note: The GFSK modulation is the worst case and recorded in the report.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

### RADIATED EMISSION TEST SETUP BELOW 1GHZ

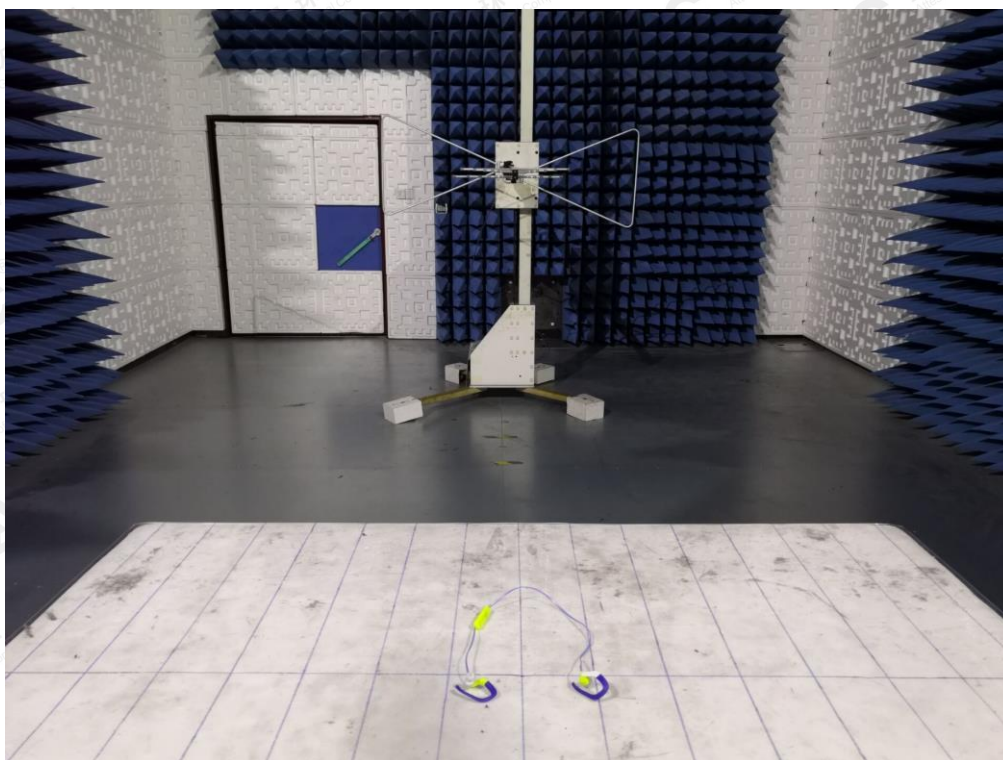

### RADIATED EMISSION TEST SETUP ABOVE 1GHZ

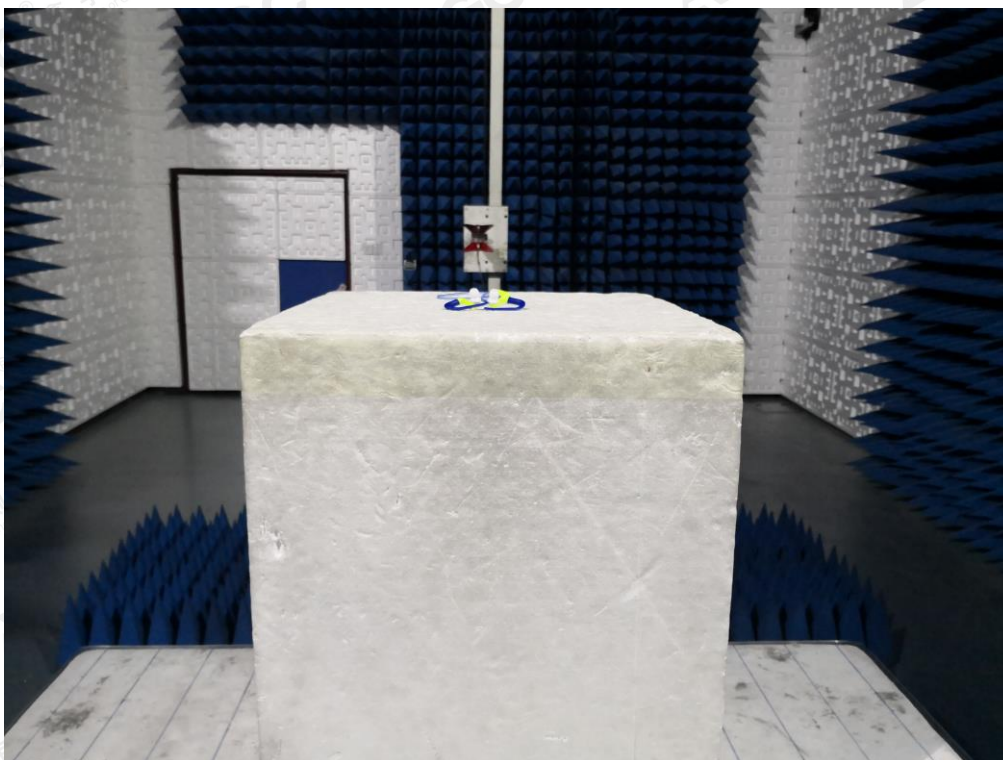

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT




BOTTOM VIEW OF EUT




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

FRONT VIEW OF EUT

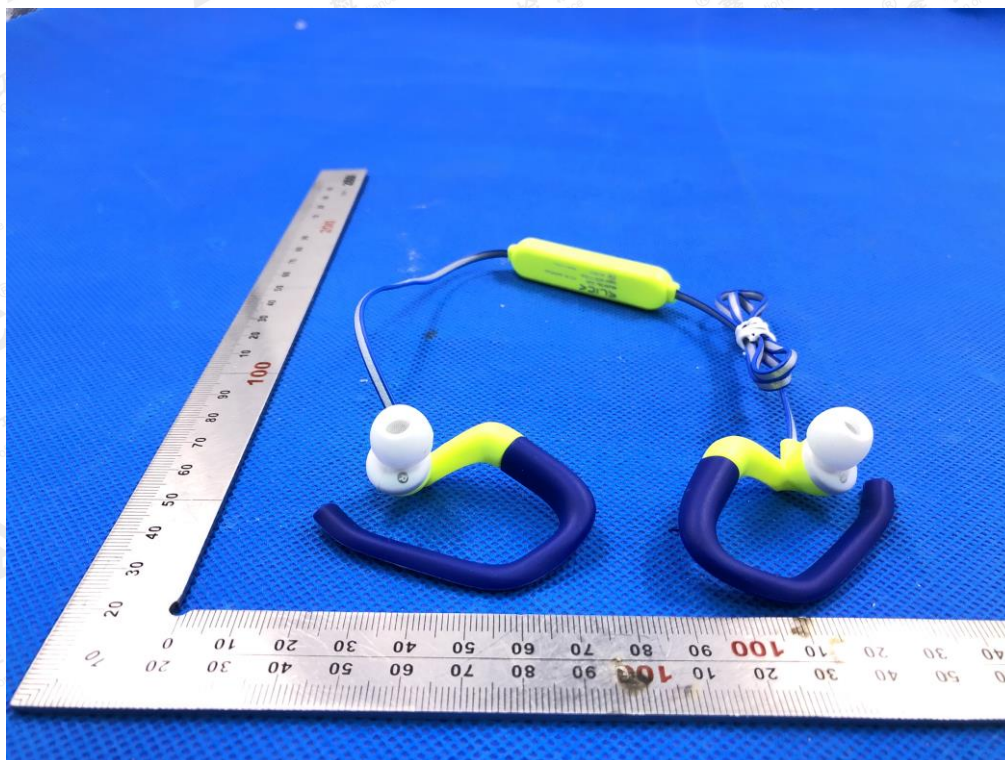


BACK VIEW OF EUT

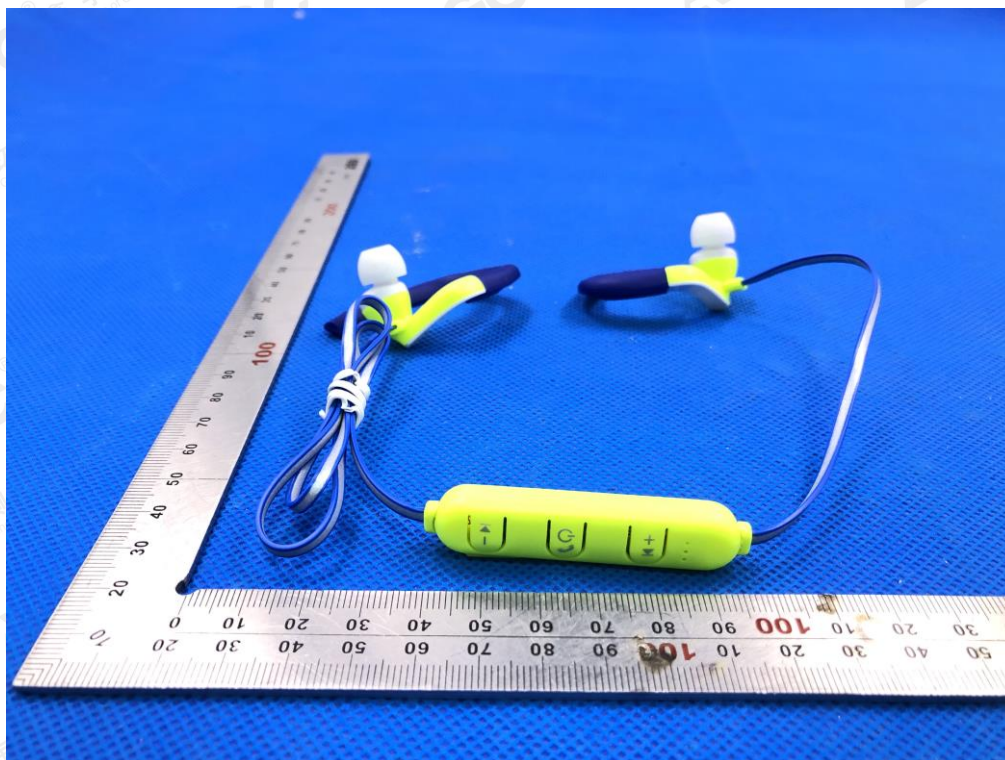

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

LEFT VIEW OF EUT

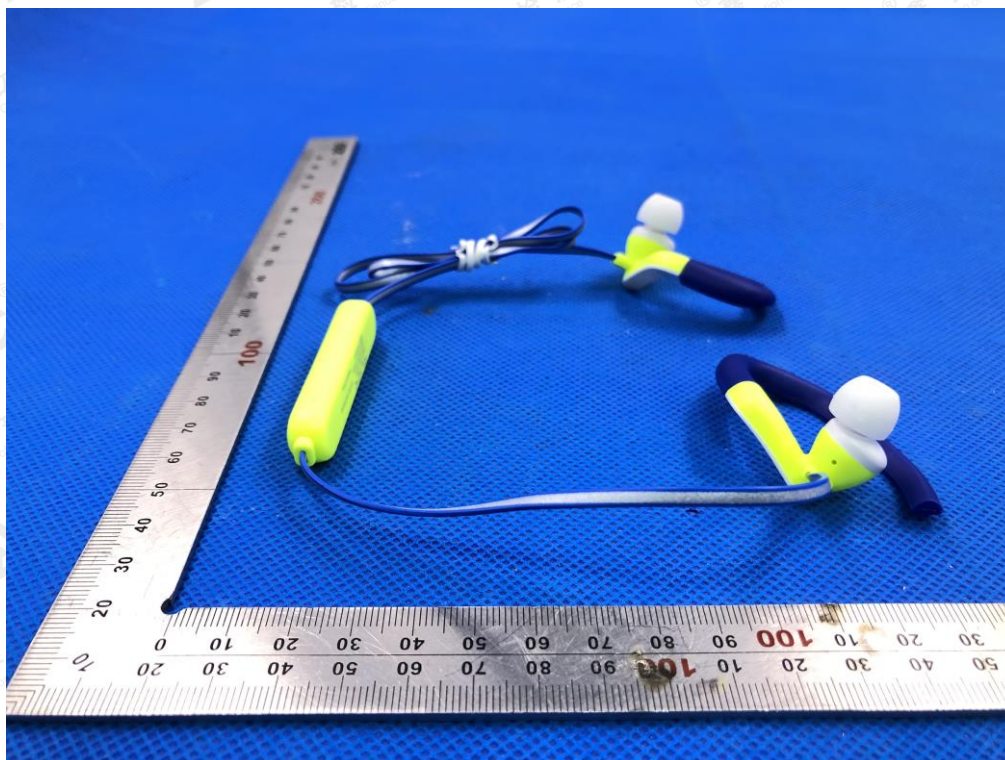


RIGHT VIEW OF EUT




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

OPEN VIEW OF EUT-1

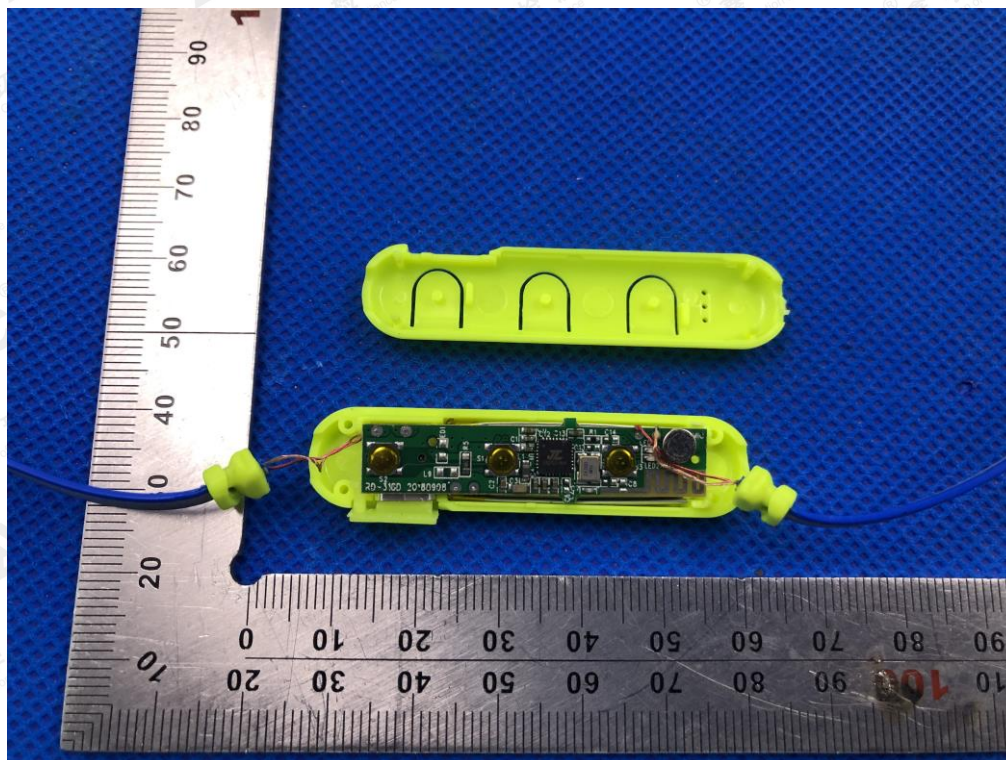


OPEN VIEW OF EUT-2

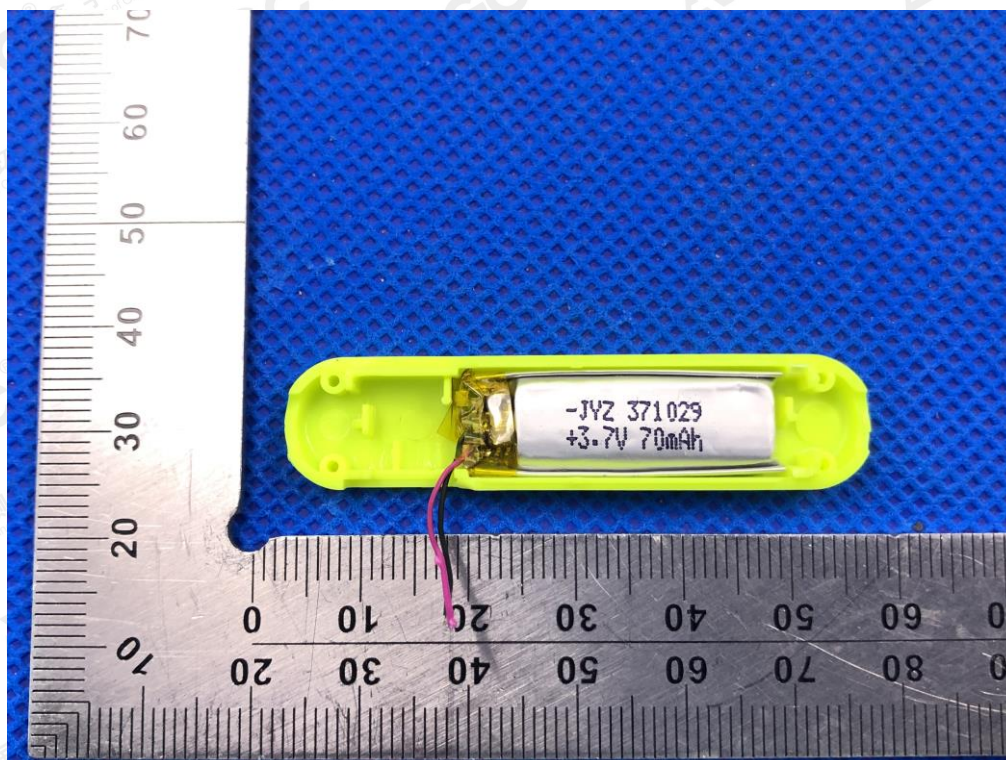


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

INTERNAL VIEW OF EUT-1

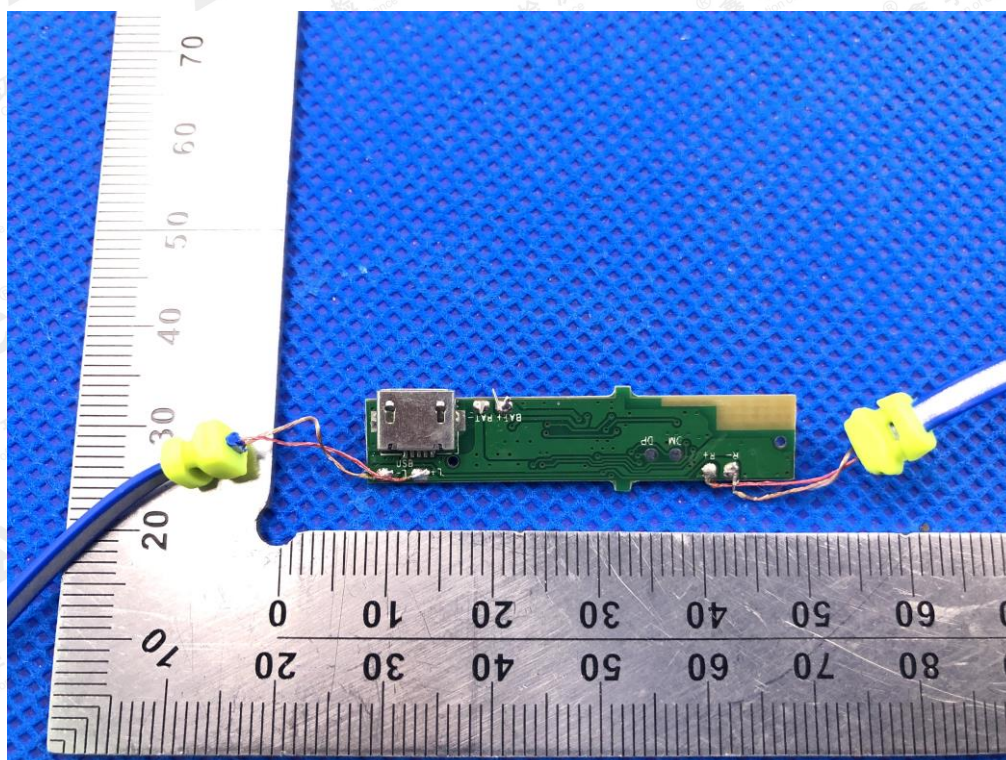

INTERNAL VIEW OF EUT-2

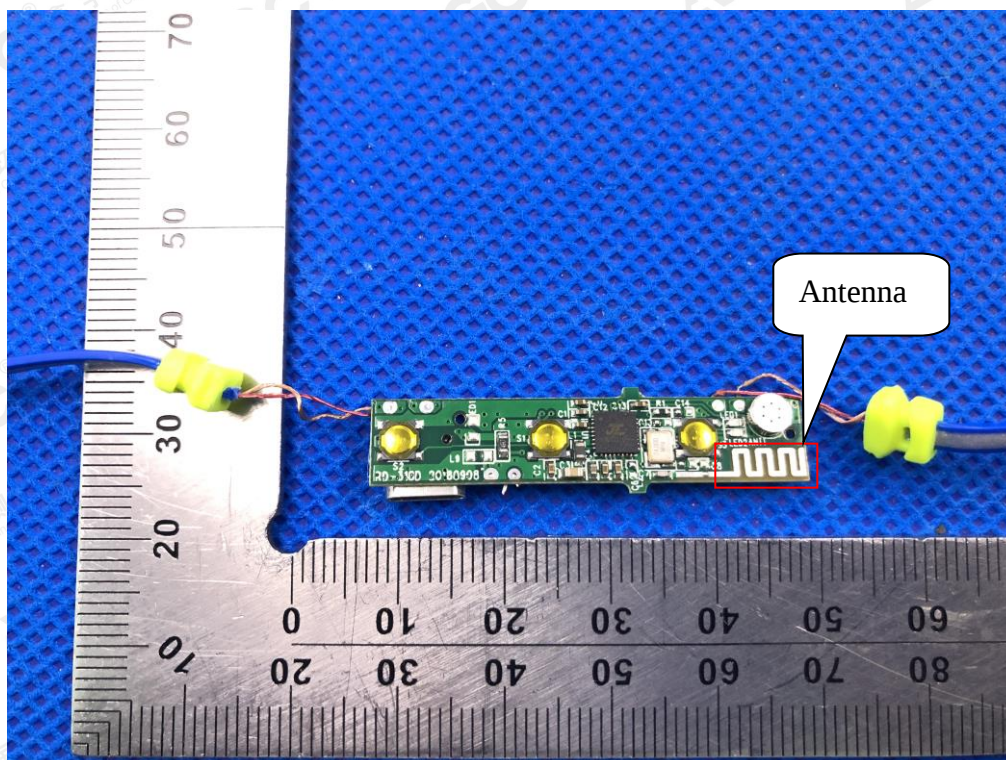

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

