

TEST REPORT

Product Name : Ridecam
Brand Mark : DDPAI
Model No. : DDPAI RANGER
Extension Model : DDPAI ranger, DDPAI DRC01, DDPAI Ranger, DDPAI Ranger
FCC ID : 2AJFX-RANGER
Report Number : BLA-EMC-202308-A0903
Date of Sample Receipt : 2023/8/2
Date of Test : 2023/8/3 to 2023/12/13
Date of Issue : 2023/12/14
Test Standard : 47 CFR Part 15, Subpart E 15.407
Test Result : Pass

Prepared for:

DDPAI Technology Co., Ltd
28F, Building 8A, International Innovation Valley, Nanshan District,
Shenzhen, Guangdong Province

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

charlie

Review by:

Sueels

Approved by:

Blue Zheng

Date:

2023/12/14



REPORT REVISE RECORD

Version No.	Date	Description
00	2023/12/14	Original

TABLE OF CONTENTS

1 TEST SUMMARY	6
2 GENERAL INFORMATION	8
3 GENERAL DESCRIPTION OF E.U.T.....	8
4 TEST ENVIRONMENT	9
5 TEST MODE	9
6 MEASUREMENT UNCERTAINTY	9
7 DESCRIPTION OF SUPPORT UNIT	10
8 LABORATORY LOCATION	10
9 TEST INSTRUMENTS LIST	11
10 FREQUENCY STABILITY	14
10.1 LIMITS	14
10.2 BLOCK DIAGRAM OF TEST SETUP	14
10.3 TEST DATA	14
11 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	15
11.1 LIMITS	15
11.2 BLOCK DIAGRAM OF TEST SETUP	16
11.3 PROCEDURE	16
11.4 TEST DATA	18
12 RADIATED EMISSIONS	22
12.1 BLOCK DIAGRAM OF TEST SETUP	22
12.2 PROCEDURE	22
12.3 TEST DATA	24
13 DFS: CHANNEL CLOSING TRANSMISSION TIME	32
13.1 LIMITS	32
13.2 BLOCK DIAGRAM OF TEST SETUP	32
13.3 PROCEDURE	32
13.4 TEST DATA	34
14 DFS: NON-OCCUPANCY PERIOD	35
14.1 LIMITS	35
14.2 BLOCK DIAGRAM OF TEST SETUP	35

14.3 PROCEDURE	35
14.4 TEST DATA	37
15 PEAK POWER SPECTRUM DENSITY	38
15.1 LIMITS	38
15.2 BLOCK DIAGRAM OF TEST SETUP	38
15.3 TEST DATA	39
16 MAXIMUM CONDUCTED OUTPUT POWER	40
16.1 LIMITS	40
16.2 BLOCK DIAGRAM OF TEST SETUP	40
16.3 TEST DATA	41
17 MINIMUM 6 DB BANDWIDTH (5.725-5.85 GHZ BAND)	42
17.1 LIMITS	42
17.2 BLOCK DIAGRAM OF TEST SETUP	42
17.3 TEST DATA	42
18 26DB EMISSION BANDWIDTH	43
18.1 BLOCK DIAGRAM OF TEST SETUP	43
18.2 TEST DATA	43
19 99% BANDWIDTH	44
19.1 BLOCK DIAGRAM OF TEST SETUP	44
19.2 TEST DATA	44
20 DUTY CYCLE	45
20.1 BLOCK DIAGRAM OF TEST SETUP	45
20.2 TEST DATA	45
21 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	46
21.1 LIMITS	46
21.2 BLOCK DIAGRAM OF TEST SETUP	46
21.3 PROCEDURE	46
21.4 TEST DATA	48
22 ANTENNA REQUIREMENT	50
22.1 CONCLUSION	50
23 APPENDIX	52

23.1 MAXIMUM CONDUCTED OUTPUT POWER	52
23.2 -26dB BANDWIDTH	60
23.3 OCCUPIED CHANNEL BANDWIDTH	68
23.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL	76
23.5 BAND EDGE	84
23.6 FREQUENCY STABILITY	90
23.7 CONDUCTED RF SPURIOUS EMISSION	98
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	106
APPENDIX B: PHOTOGRAPHS OF EUT	108

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Frequency Stability	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart C 15.407 (g)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
DFS: Channel Closing Transmission Time	47 CFR Part 15, Subpart E 15.407	KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	N/A
DFS: Non-occupancy period	47 CFR Part 15, Subpart E 15.407	KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	N/A
Peak Power spectrum density	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II F	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Transmitter Power Control	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (h)(1)	N/A
Maximum Conducted output power	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 2	47 CFR Part 15, Subpart C 15.407 (e)	N/A
26dB Emission bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 1	47 CFR Part 15, Subpart C 15.407 (a)	Pass
99% Bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 II D	N/A	Pass
Duty Cycle	47 CFR Part 15, Subpart E 15.407	KDB 789033 II B 1	KDB 789033 D02 II B 1	Pass
Conducted Emissions at AC Power Line	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & 15.407 b(6)	Pass

(150kHz-30MHz)				
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass

Remark:

N/A: Not Applicable

2 GENERAL INFORMATION

Applicant	DDPAI Technology Co., Ltd
Address	28F, Building 8A, International Innovation Valley, Nanshan District, Shenzhen, Guangdong Province
Manufacturer	DDPAI Technology Co., Ltd
Address	28F, Building 8A, International Innovation Valley, Nanshan District, Shenzhen, Guangdong Province
Factory	DDPai vision equipment Co.,Ltd
Address	Building A, Futai Industrial Park, Qingfeng south Road, Keyuancheng, Tangxia Town, Dongguan city, Guangdong province, China
Product Name	Ridecam
Test Model No.	DDPAI RANGER
Extension Model	DDPAI ranger, DDPAI DRC01,DDPAI Ranger
Remark	All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are model name for commercial purpose.

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	N/A
Software Version	N/A
Operation Frequency:	Band 1 : 5180MHz-5240MHz
Channel numbers:	Band 1: 802.11a/802.11n(HT20)/802.11ac(HT20): 4, 802.11n(HT40)/802.11ac(HT40):2 802.11ac(HT80): 1
Channel separation:	802.11a/n/ac(HT20): 20MHz, 802.11n/ac(HT40): 40MHz, 802.11ac(HT80): 80MHz
Modulation technology: (IEEE 802.11a/n/ac/ax)	BPSK, QPSK, 16-QAM, 64-QAM, 256QAM, OFDMA
Data speed(IEEE 802.11a)	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n/ac):	Up to 866.7Mbps
Antenna Type:	Internal Antenna
Antenna gain:	2.12dBi(Provided by the customer)
Remark: The Antenna Gain is supplied by the customer. BlueAsia is not responsible for this data	

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.8V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation.
Remark: Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2023/11/16	2026/11/15
Chamber 2	SKET	966	N/A	2021/07/20	2024/7/19
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Receiver	R&S	ESR7	101199	2023/08/30	2024/08/29
Receiver	R&S	ESPI7	101477	2023/07/07	2024/07/06
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/10/12	2025/10/11
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Horn Antenna	Schwarzbeck	BBHA 9170	1106	2022/04/24	2024/04/23
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2023/07/07	2024/07/06
Amplifier	SKET	PA-000318G-45	N/A	2023/08/30	2024/08/29
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2023/07/14	2024/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/09/14	2025/09/13
1kHz calibration audio source	SKET	MCS-ABT-C35	N/A	2023/09/04	2024/09/03
Free Field Microphone	SKET	MGs MP 663	0414	2023/09/04	2024/09/03
Audio shielding box	SKET	SB-ABT-C35	N/A	2023/03/30	2024/03/29
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A

Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A
Signal Generator DTV	ECREDIX	DSG-1000	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2023/11/16	2025/11/15
Receiver	R&S	ESPI3	101082	2023/08/30	2024/08/29
LISN	R&S	ENV216	3560.6550.15	2023/08/30	2024/08/29
LISN	AT	AT166-2	AKK1806000003	2023/08/30	2024/08/29
ISN	TESEQ	ISNT8-cat6	53580	2023/08/30	2024/08/29
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2023/07/07	2024/07/06
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of RF Conducted Test

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY49100060	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY54420161	2023/08/30	2024/08/29
Signal Generator	Agilent	N5182A	MY47420955	2023/08/30	2024/08/29
Signal Generator	Agilent	N5181A	MY46240904	2023/07/07	2024/07/06
Signal Generator	R&S	CMW500	132429	2023/08/30	2024/08/29
BluetoothTester	Anritsu	MT8852B	06262047872	2023/08/30	2024/08/29

Power probe	DARE	RPR3006W	14I00889SN042	2023/09/01	2024/08/31
Power detection box	CDKMV	MW100-PSB	MW201020JYT	2023/07/07	2024/07/06
DC Powersupply	zhaoxin	KXN-305D	20K305D1221363	2023/08/30	2024/08/29
DC Powersupply	zhaoxin	RXN-1505D	19R1505D050168	2023/08/30	2024/08/29
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	Audio Precision	ATS-1	ATS141094	2023/07/07	2024/07/06


10 FREQUENCY STABILITY

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	ANSI C63.10 (2013) Section 6.8
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

10.1 LIMITS

Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
---------------	---

10.2 BLOCK DIAGRAM OF TEST SETUP

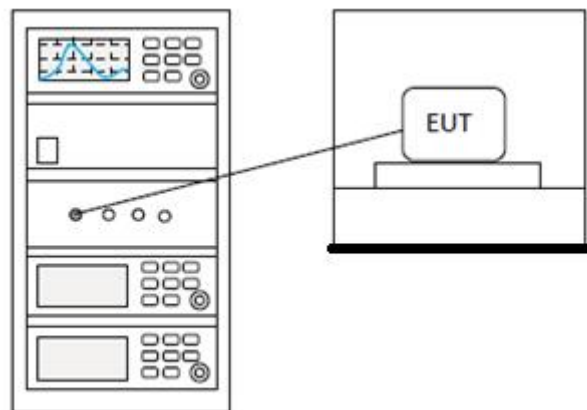

10.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

11 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II G
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

11.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

11.2 BLOCK DIAGRAM OF TEST SETUP

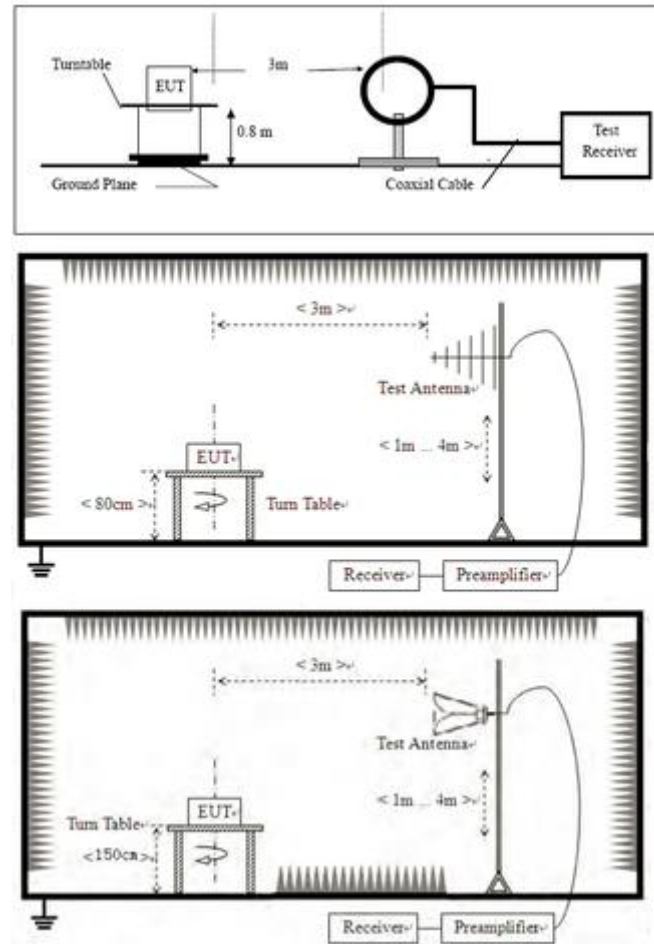

11.3 PROCEDURE


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- Remark: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

11.4 TEST DATA

Remark: During the test, pre-scan the 802.11a/n/ac mode, and found the 802.11a mode which it is worse case.

[TestMode: TX band 1 a 5180 channel]; [Polarity: Horizontal]

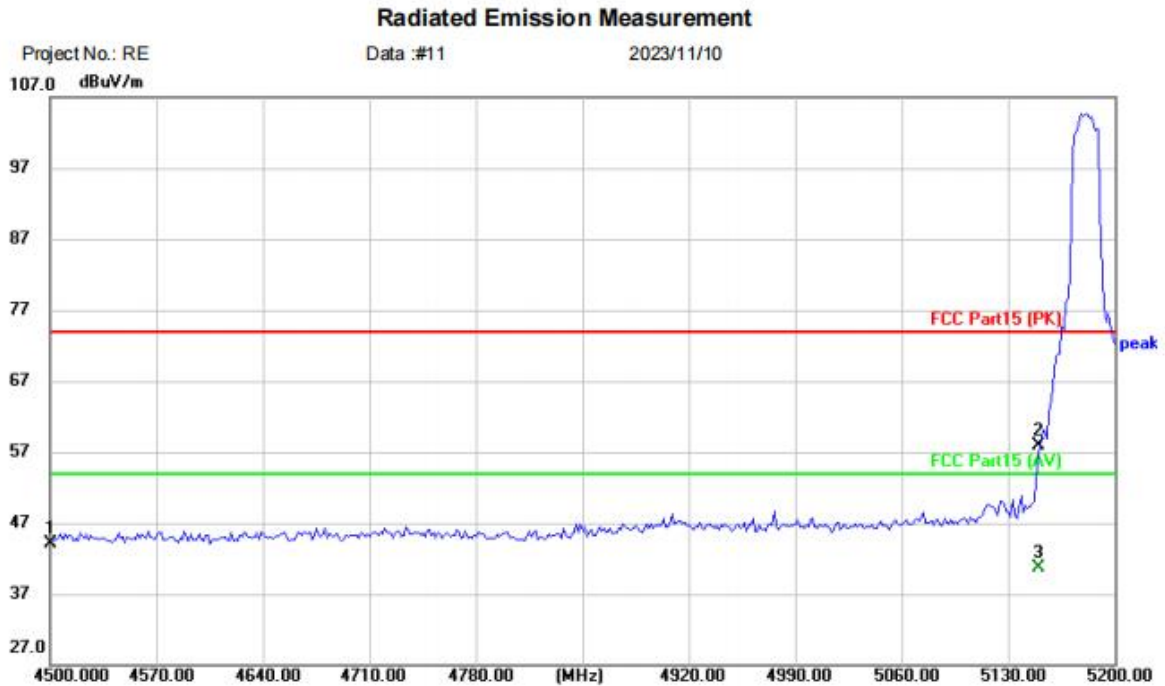


Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Cycling camera
M/N: DDPAI RANGER
Mode: 5GWIFI-band1-A-TX-5180
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	43.66	0.37	44.03	74.00	-29.97	peak	
2		5150.000	54.23	3.66	57.89	74.00	-16.11	peak	
3	*	5150.000	36.98	3.66	40.64	54.00	-13.36	AVG	

Test Result: Pass

[TestMode: TX band 1 a 5180 channel]; [Polarity: Vertical]

Radiated Emission Measurement

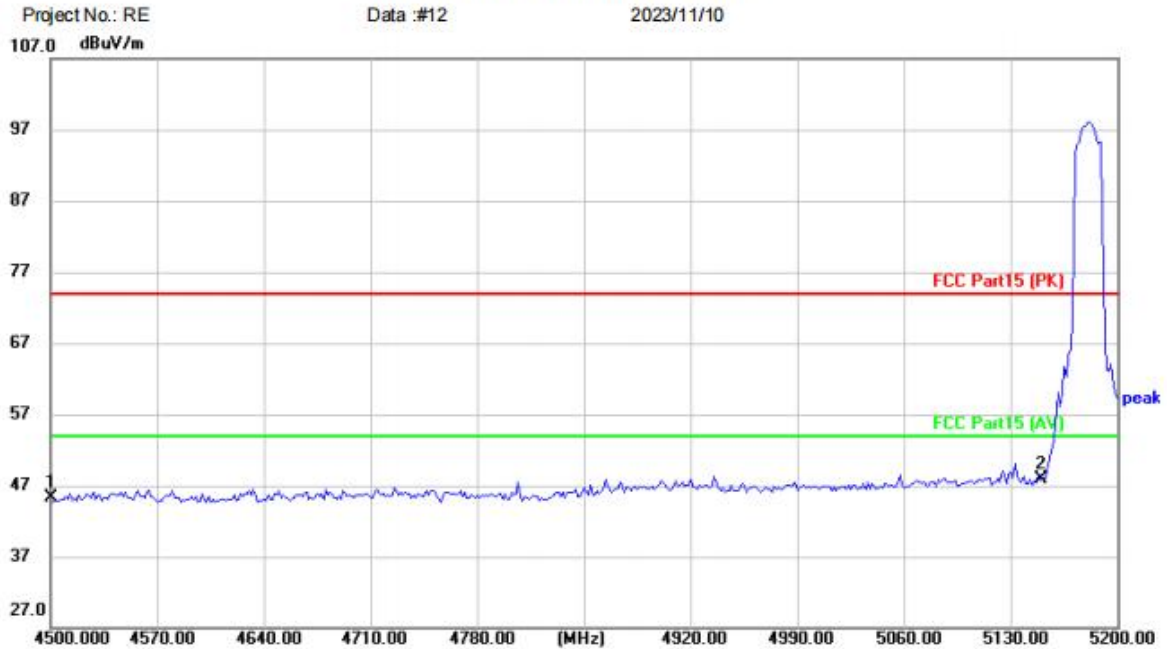

Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Cycling camera
M/N: DDPAI RANGER
Mode: 5GWIFI-band1-A-TX-5180
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	45.00	0.37	45.37	74.00	-28.63	peak	
2	*	5150.000	44.18	3.66	47.84	74.00	-26.16	peak	

Test Result: Pass

[TestMode: TX band1 a 5240 channel]; [Polarity: Horizontal]

Radiated Emission Measurement

Project No.: RE

Data :#19

2023/11/10

107.0 dBuV/m



Site

Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Cycling camera

M/N: DDPAI RANGER


Mode: 5GWIFI-band1-A-TX-5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	43.36	4.18	47.54	74.00	-26.46	peak	
2	*	5400.000	43.32	4.31	47.63	74.00	-26.37	peak	

Test Result: Pass

[TestMode: TX band1 a 5240 channel]; [Polarity: Vertical]

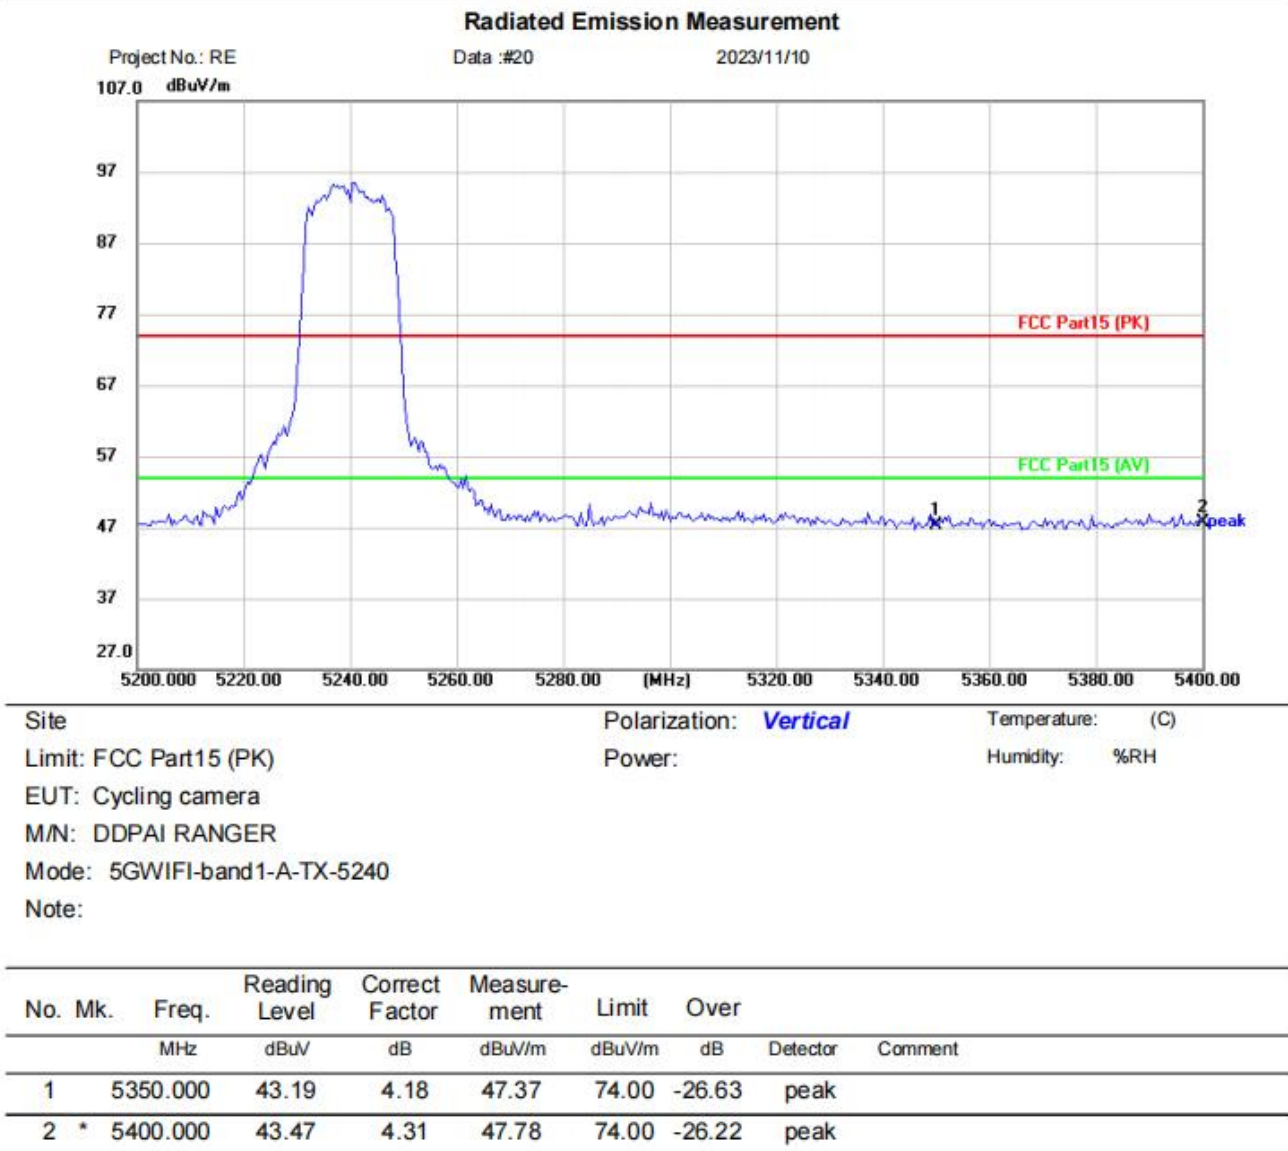


Test Result: Pass

12 RADIATED EMISSIONS

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II G
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

12.1 BLOCK DIAGRAM OF TEST SETUP

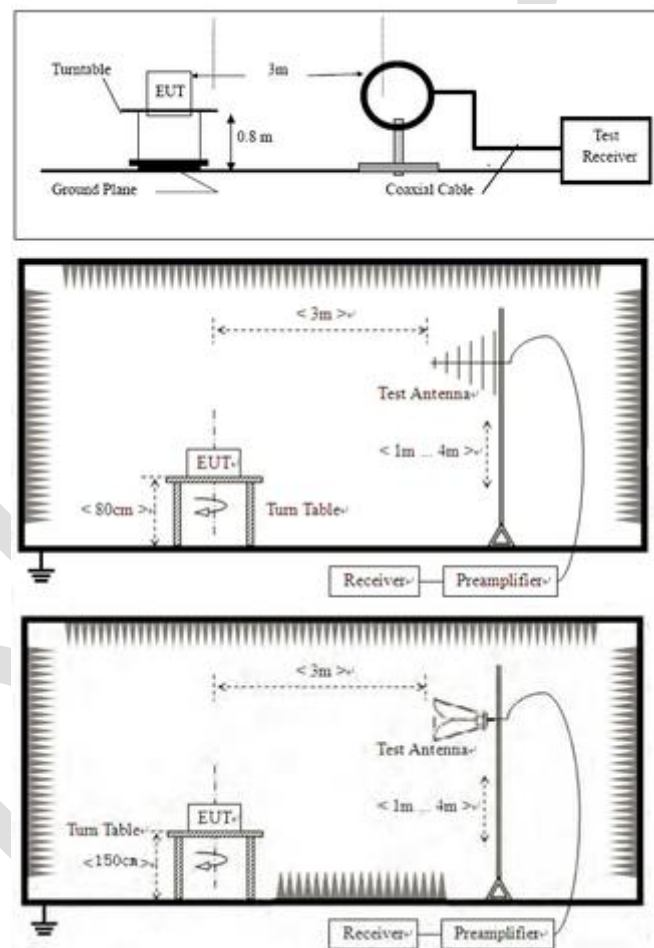

12.2 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest

radiation.


- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- 2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
- 3. Scan from 9kHz to 40GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


12.3 TEST DATA

[TestMode: TX below 1G]; [Polarity: Horizontal]

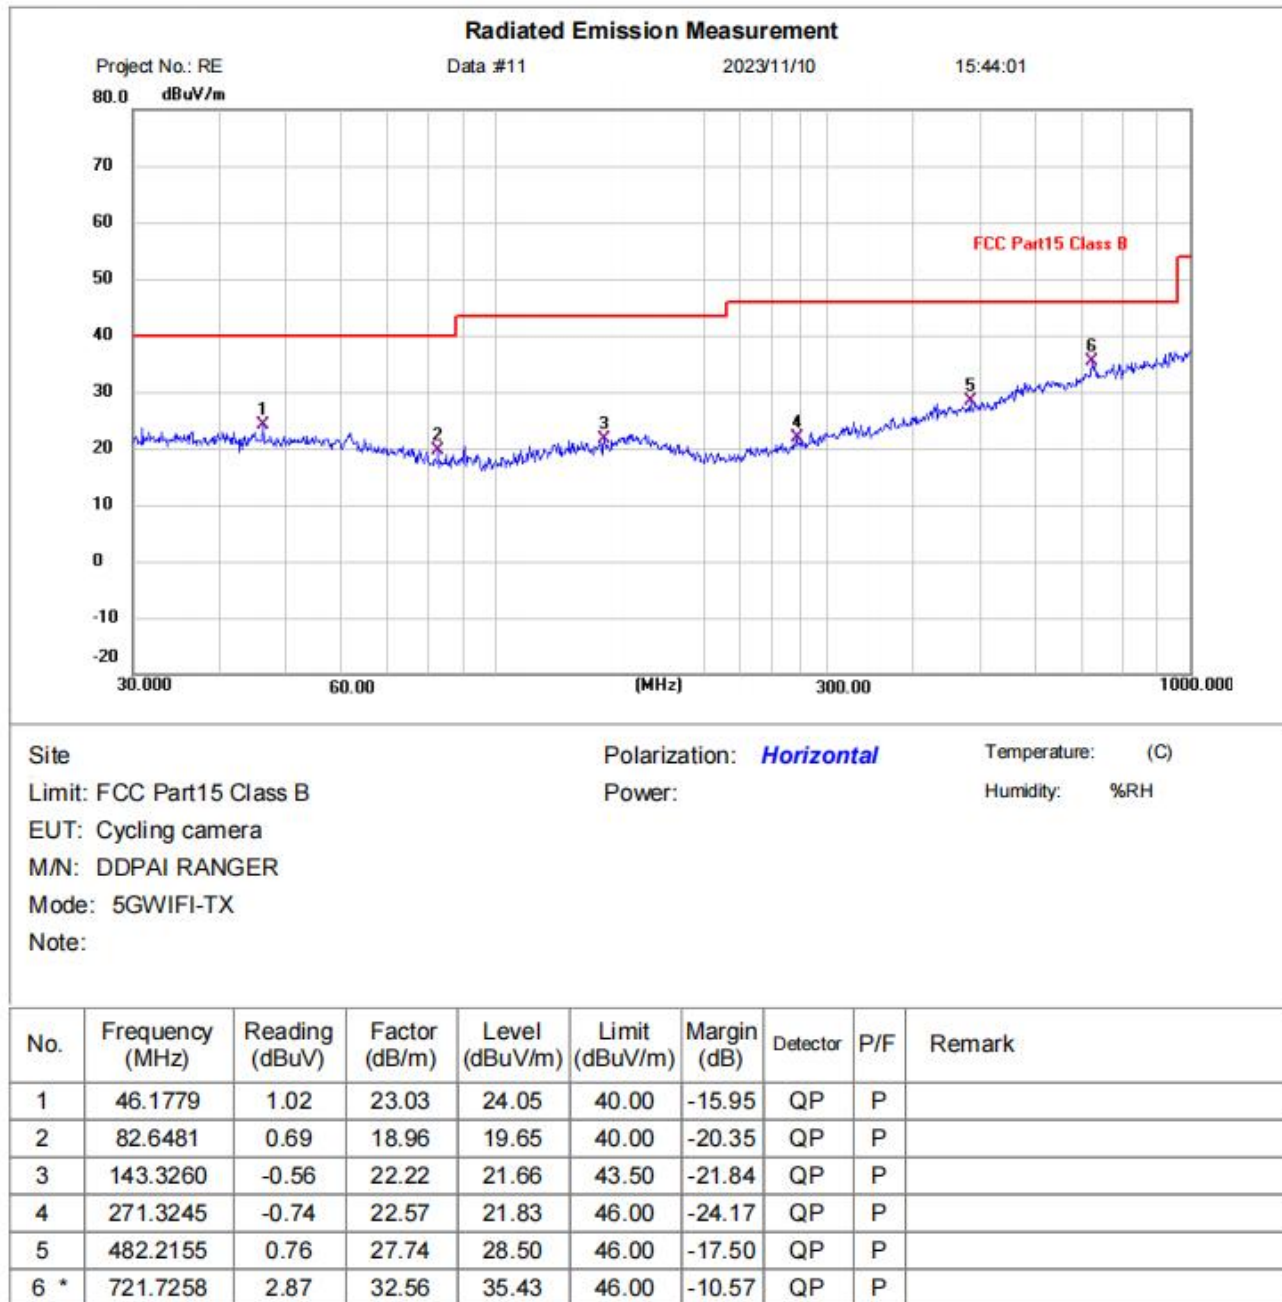

Test Result: Pass


[TestMode: TX below 1G]; [Polarity: Vertical]

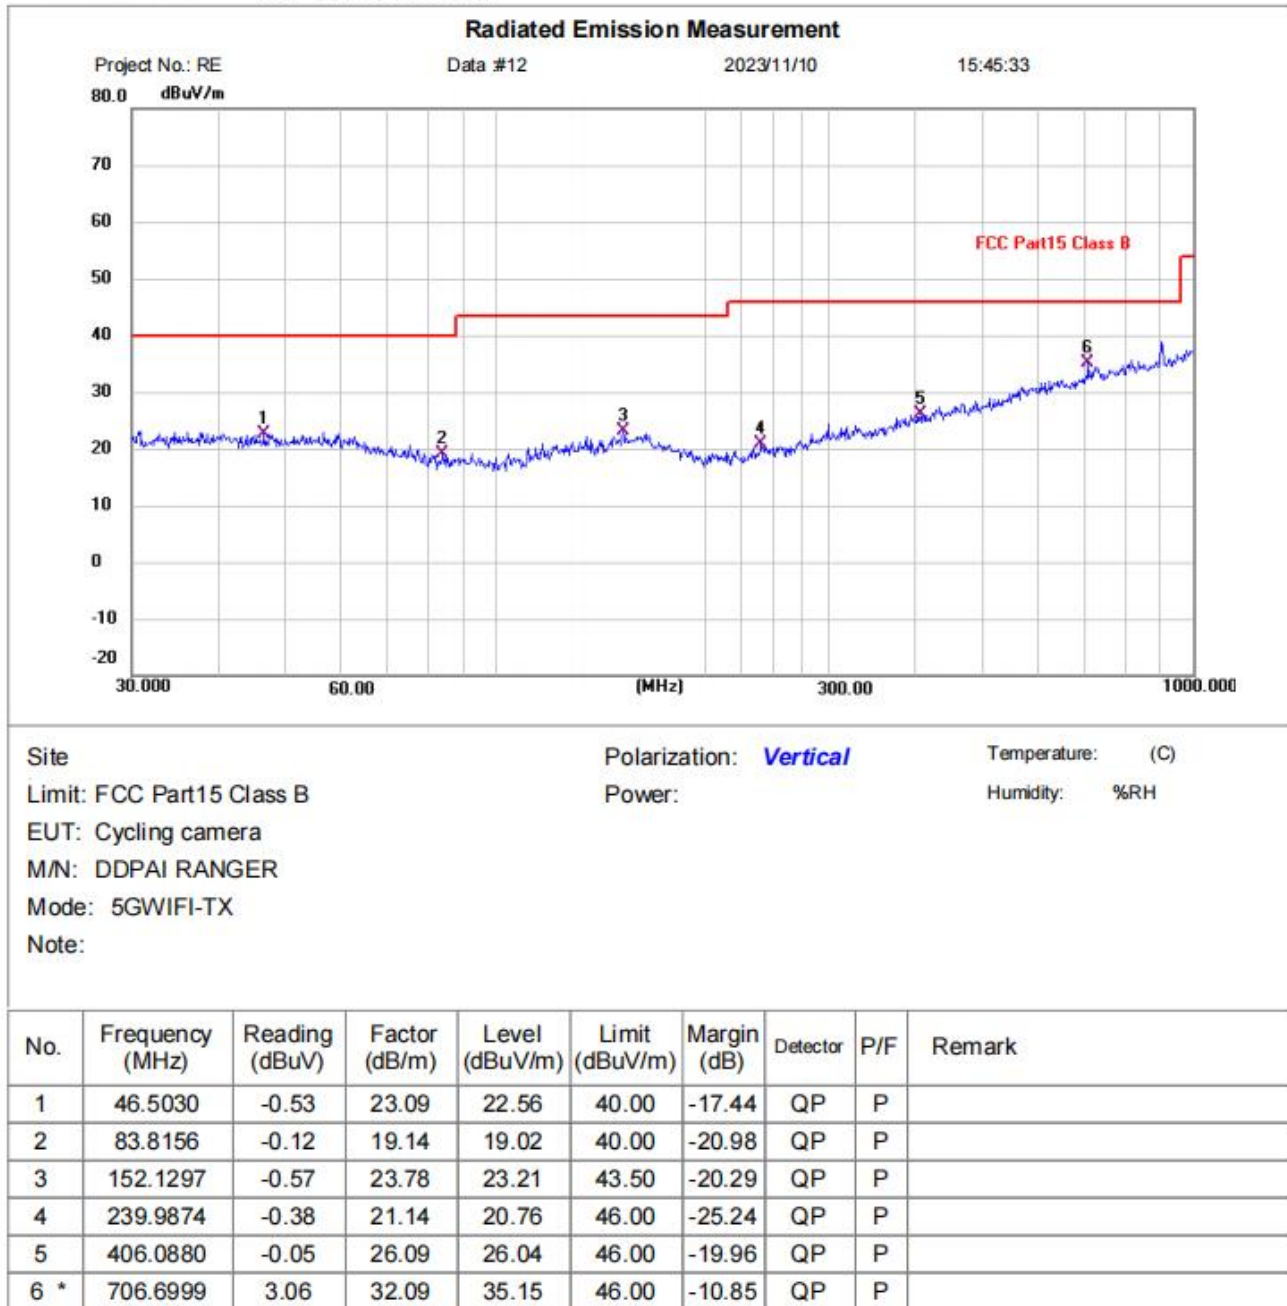

Test Result: Pass

Remark: During the test, pre-scan the 802.11a/n/ac mode, and found the 802.11a mode which it is worse case.

[TestMode: TX band1 a 5180 channel]; [Polarity: Horizontal]

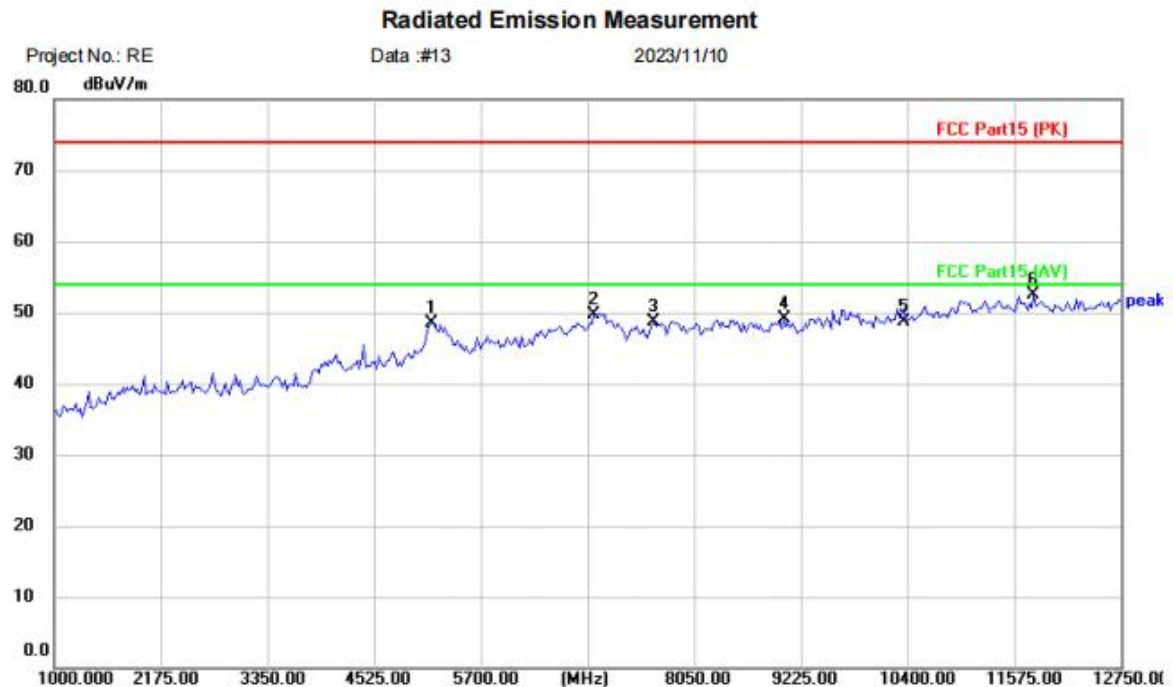

Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Cycling camera

M/N: DDPAI RANGER


Mode: 5GWIFI-band1-A-TX-5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5159.500	41.41	7.00	48.41	74.00	-25.59	peak	
2		6945.500	39.67	10.02	49.69	74.00	-24.31	peak	
3		7603.500	40.12	8.68	48.80	74.00	-25.20	peak	
4		9037.000	39.68	9.44	49.12	74.00	-24.88	peak	
5		10360.00	36.29	12.46	48.75	74.00	-25.25	peak	
6	*	11786.50	38.71	13.81	52.52	74.00	-21.48	peak	

Test Result: Pass

[TestMode: TX band1 a 5180 channel]; [Polarity: Vertical]

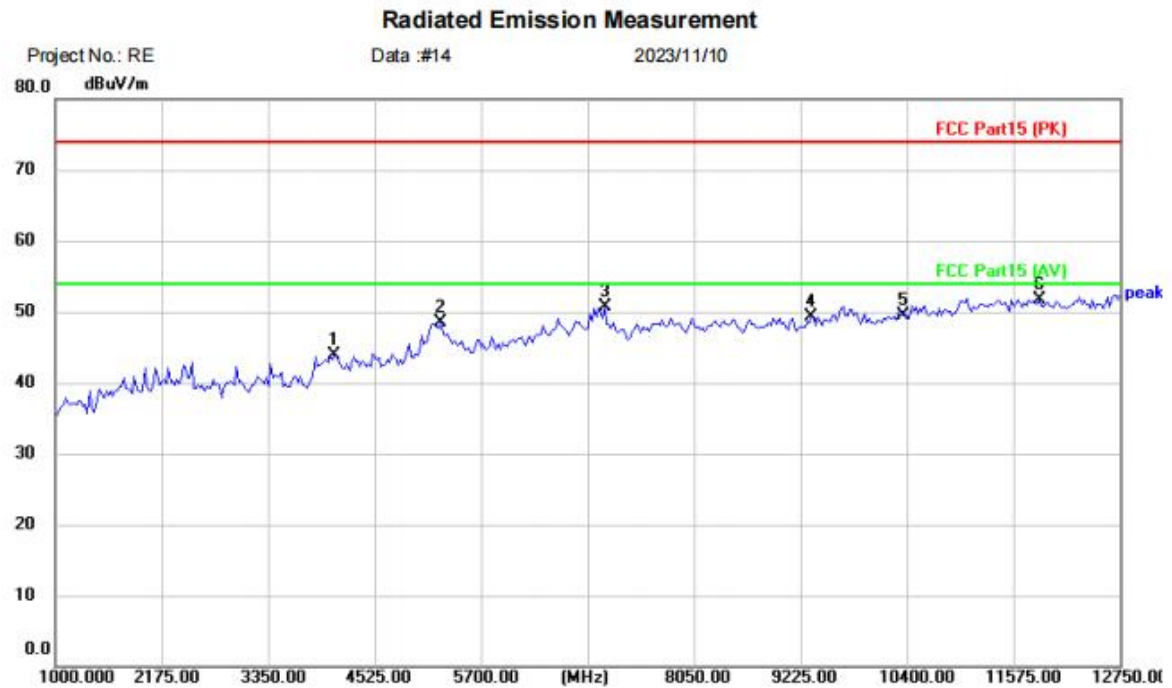


Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Cycling camera
M/N: DDP AI RANGER
Mode: 5GWIFI-band1-A-TX-5180
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4078.500	42.09	1.91	44.00	74.00	-30.00	peak	
2		5253.500	39.29	9.31	48.60	74.00	-25.40	peak	
3		7063.000	43.15	7.60	50.75	74.00	-23.25	peak	
4		9342.500	39.14	10.22	49.36	74.00	-24.64	peak	
5		10360.00	37.11	12.46	49.57	74.00	-24.43	peak	
6	*	11857.00	37.94	13.84	51.78	74.00	-22.22	peak	

Test Result: Pass

[TestMode: TX band1 a 5200 channel]; [Polarity: Horizontal]

Radiated Emission Measurement

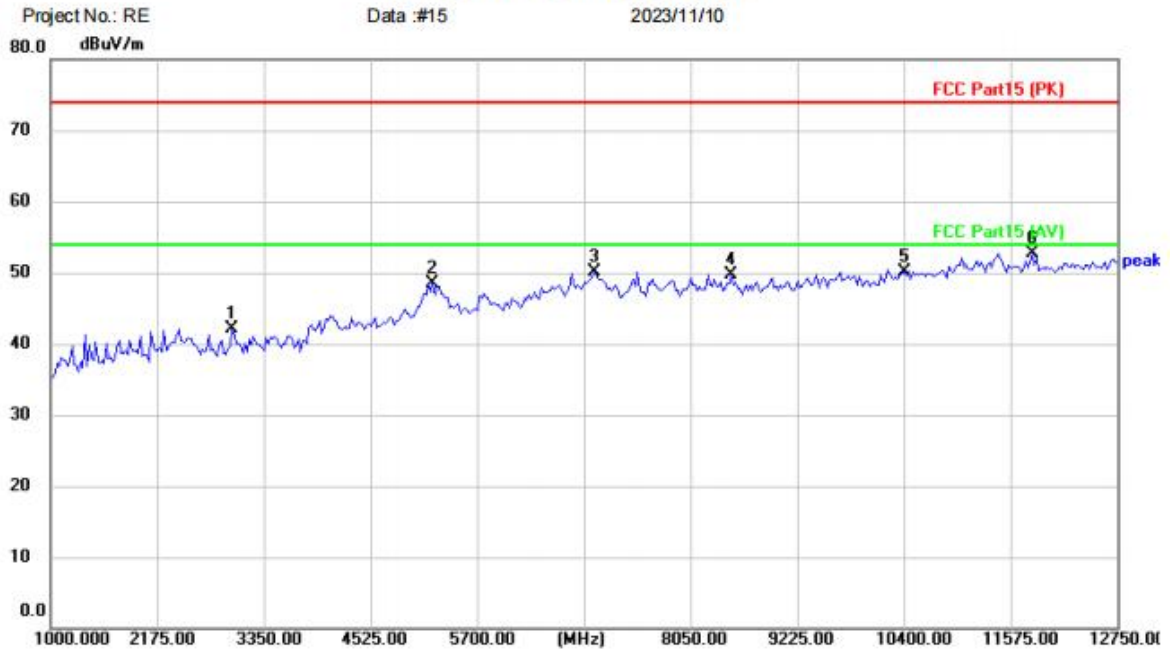


Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Cycling camera
M/N: DDP AI RANGER
Mode: 5GWIFI-band1-A-TX-5200
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2997.500	44.88	-2.82	42.06	74.00	-31.94	peak	
2		5206.500	40.41	8.15	48.56	74.00	-25.44	peak	
3		6992.500	39.74	10.29	50.03	74.00	-23.97	peak	
4		8496.500	40.49	9.12	49.61	74.00	-24.39	peak	
5		10400.00	37.61	12.52	50.13	74.00	-23.87	peak	
6	*	11810.00	38.84	13.81	52.65	74.00	-21.35	peak	

Test Result: Pass

[TestMode: TX band1 a 5200 channel]; [Polarity: Vertical]

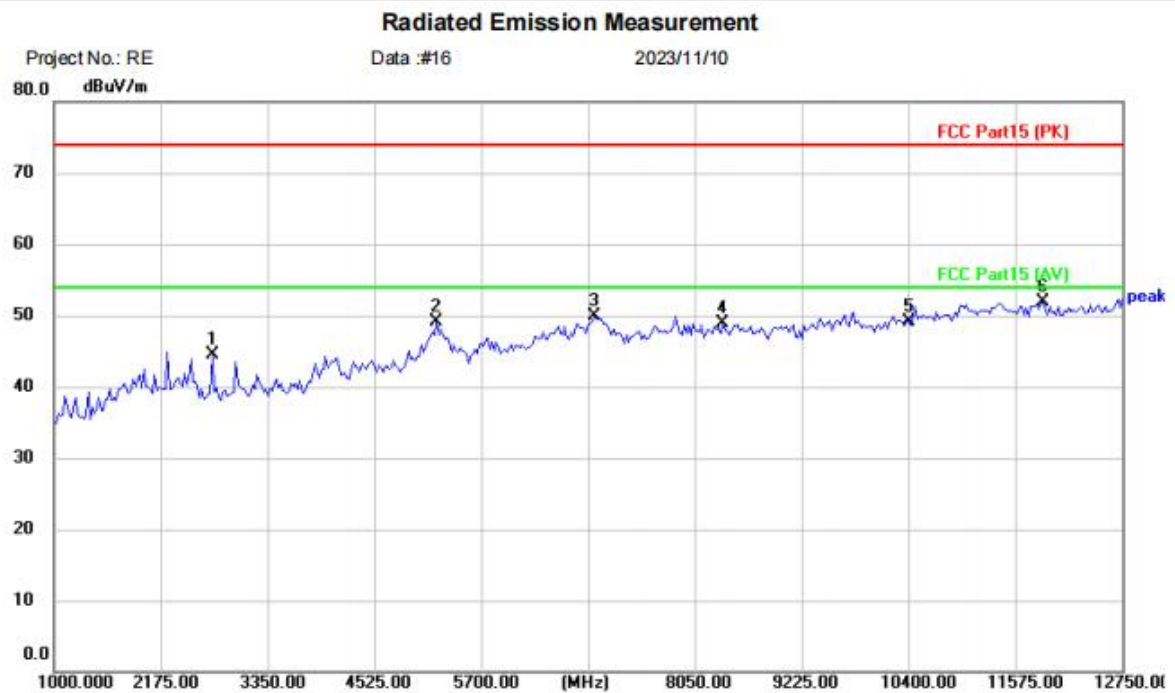


Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Cycling camera
M/N: DDPAI RANGER
Mode: 5GWIFI-band1-A-TX-5200
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2739.000	47.47	-2.94	44.53	74.00	-29.47	peak	
2		5206.500	40.90	8.15	49.05	74.00	-24.95	peak	
3		6945.500	39.79	10.02	49.81	74.00	-24.19	peak	
4		8355.500	39.75	9.06	48.81	74.00	-25.19	peak	
5		10400.00	36.51	12.52	49.03	74.00	-24.97	peak	
6	*	11880.50	38.10	13.85	51.95	74.00	-22.05	peak	

Test Result: Pass

[TestMode: TX band1 a 5240 channel]; [Polarity: Vertical]

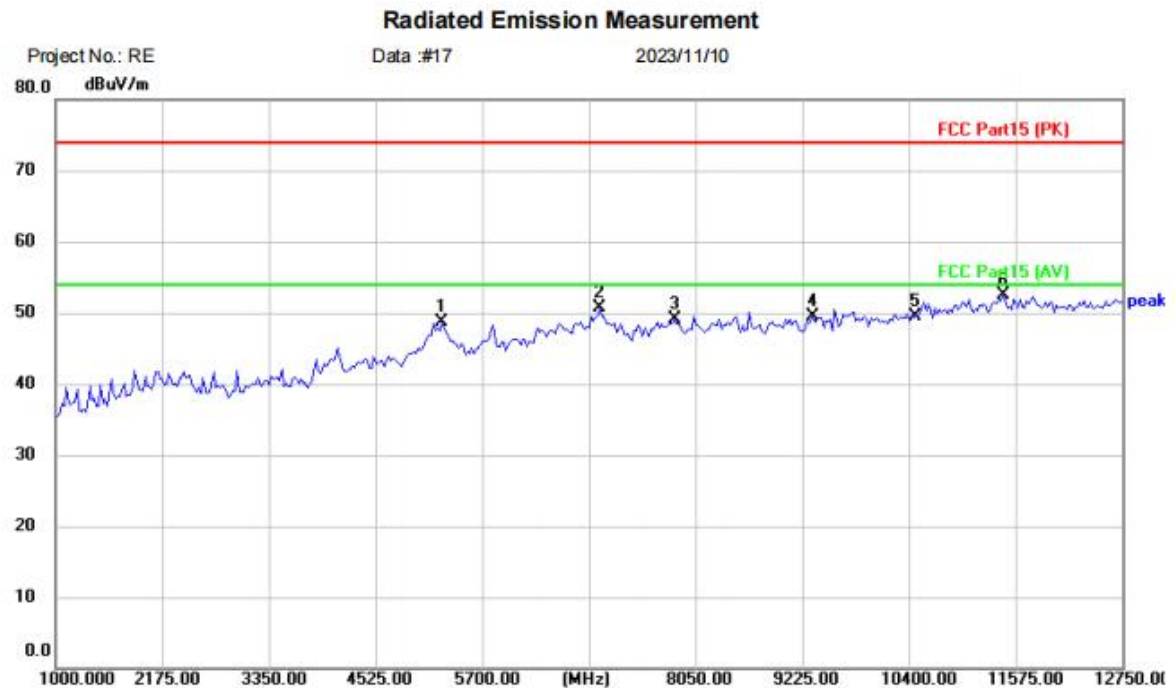

Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Cycling camera

M/N: DDP AI RANGER


Mode: 5GWIFI-band1-A-TX-5240

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5253.500	39.49	9.31	48.80	74.00	-25.20	peak	
2		6992.500	40.46	10.29	50.75	74.00	-23.25	peak	
3		7815.000	40.24	8.80	49.04	74.00	-24.96	peak	
4		9342.500	39.19	10.22	49.41	74.00	-24.59	peak	
5		10480.00	36.88	12.65	49.53	74.00	-24.47	peak	
6	*	11434.00	38.77	13.64	52.41	74.00	-21.59	peak	

Test Result: Pass

[TestMode: TX band1 a 5240 channel]; [Polarity: Horizontal]

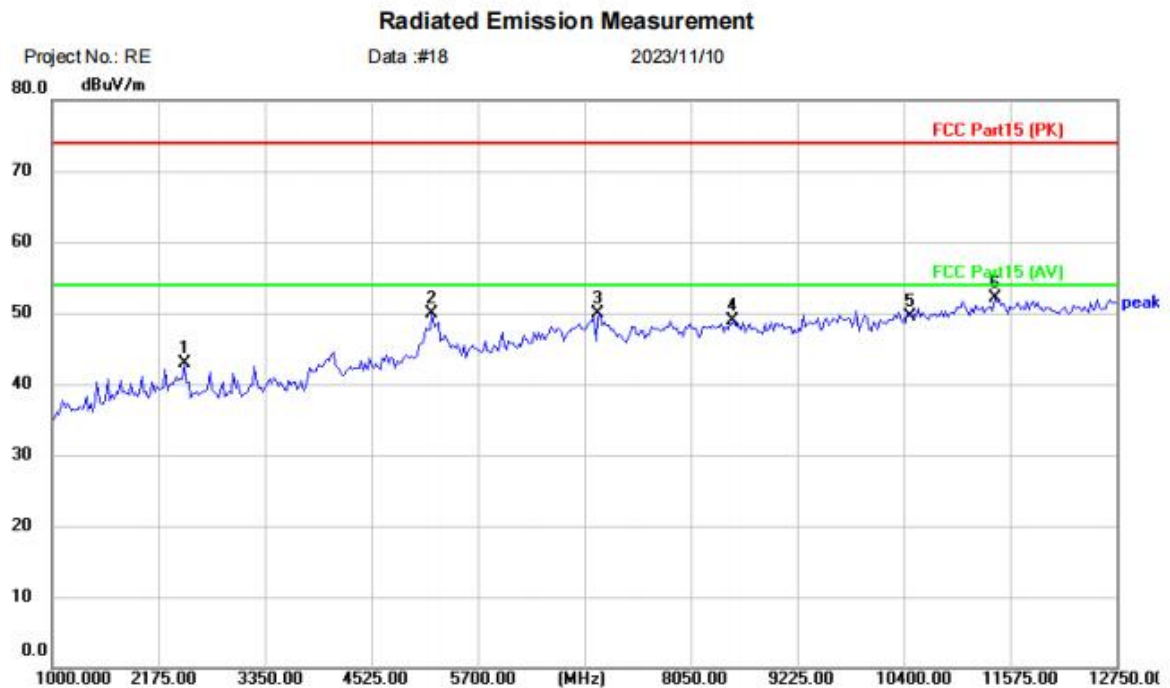

Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Cycling camera
M/N: DDPAI RANGER
Mode: 5GWIFI-band1-A-TX-5240
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2459.920	45.81	-2.95	42.86	74.00	-31.14	peak	
2		5191.383	42.09	7.79	49.88	74.00	-24.12	peak	
3		7051.603	42.41	7.57	49.98	74.00	-24.02	peak	
4		8535.070	39.74	9.14	48.88	74.00	-25.12	peak	
5		10480.00	36.86	12.65	49.51	74.00	-24.49	peak	
6	*	11407.81	38.48	13.63	52.11	74.00	-21.89	peak	

Test Result: Pass


13 DFS: CHANNEL CLOSING TRANSMISSION TIME

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 905462 D02 Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

13.1 LIMITS

Limit:	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period(should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. It is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions)
---------------	---

13.2 BLOCK DIAGRAM OF TEST SETUP

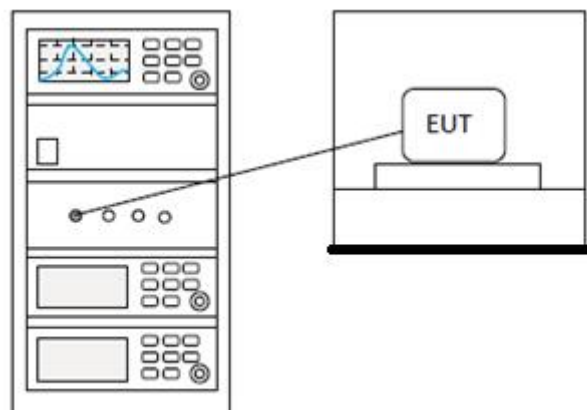

13.3 PROCEDURE

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.

- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file `iperf.exe` specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

13.4 TEST DATA

N/A

BlueAsia


14 DFS: NON-OCCUPANCY PERIOD

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 905462 D02 Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

14.1 LIMITS

Limit:	Minimum 30 minutes
---------------	--------------------

14.2 BLOCK DIAGRAM OF TEST SETUP

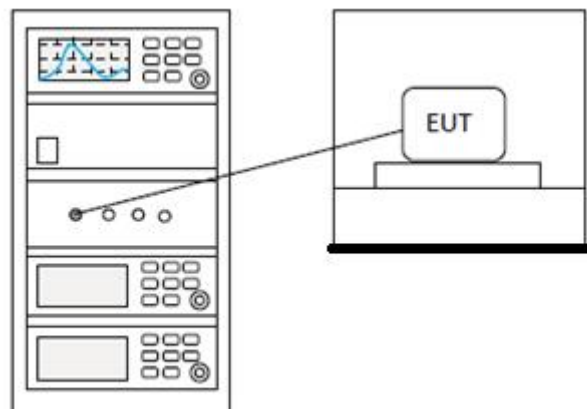

14.3 PROCEDURE

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file `iperf.exe` specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel.

Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.

7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.

8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

14.4 TEST DATA

N/A

BlueAsia


15 PEAK POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II F
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

15.1 LIMITS

Frequency band(MHz)	Limit
5150-5250	$\leq 17\text{dBm}$ in 1MHz for master device
	$\leq 11\text{dBm}$ in 1MHz for client device
5250-5350	$\leq 11\text{dBm}$ in 1MHz for client device
5470-5725	$\leq 11\text{dBm}$ in 1MHz for client device
5725-5850	$\leq 30\text{dBm}$ in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

15.2 BLOCK DIAGRAM OF TEST SETUP

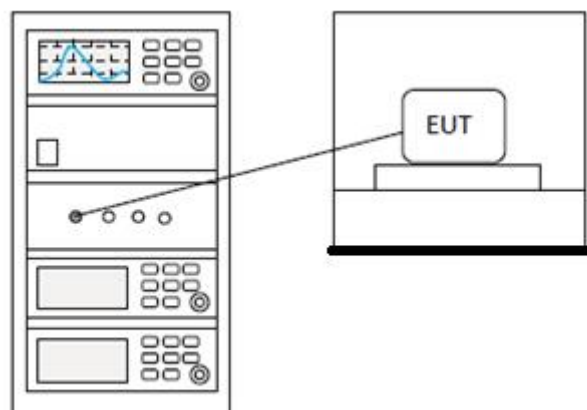

15.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


16 MAXIMUM CONDUCTED OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II E
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

16.1 LIMITS

Frequency band(MHz)	Limit
5150-5250	$\leq 1\text{W}(30\text{dBm})$ for master device
	$\leq 250\text{mW}(24\text{dBm})$ for client device
5250-5350	$\leq 250\text{mW}(24\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
5470-5725	$\leq 250\text{mW}(24\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
5725-5850	$\leq 1\text{W}(30\text{dBm})$
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

16.2 BLOCK DIAGRAM OF TEST SETUP

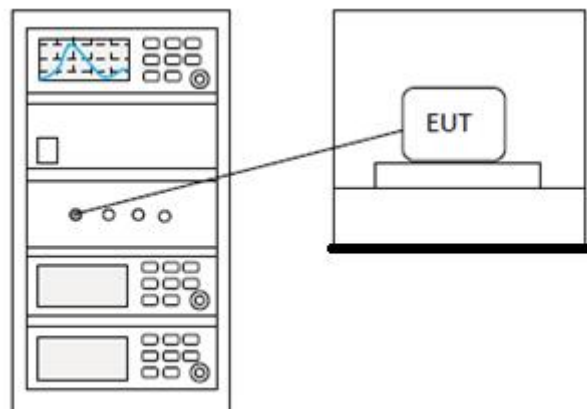

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


17 MINIMUM 6 DB BANDWIDTH (5.725-5.85 GHZ BAND)

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II C 2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

17.1 LIMITS

Limit:	≥500 kHz
--------	----------

17.2 BLOCK DIAGRAM OF TEST SETUP

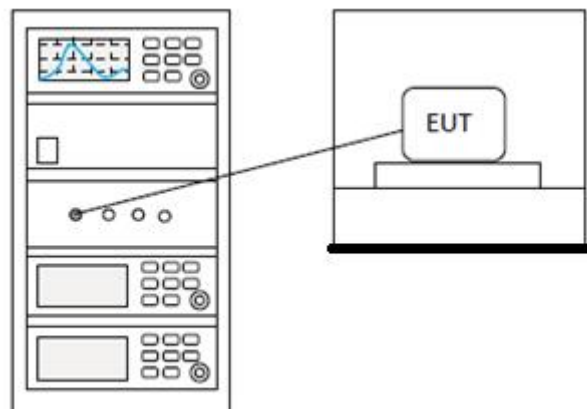


17.3 TEST DATA

N/A

18 26DB EMISSION BANDWIDTH

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II C 1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

18.1 BLOCK DIAGRAM OF TEST SETUP

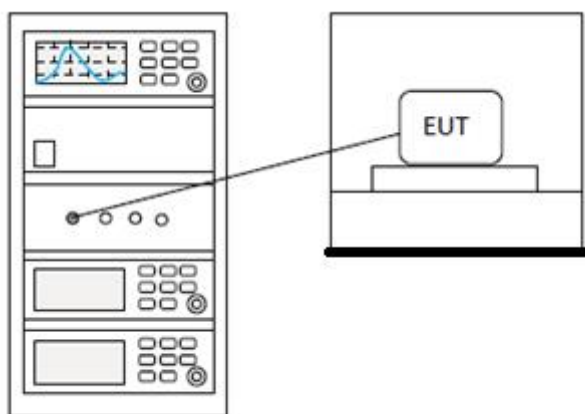


18.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

19 99% BANDWIDTH

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 II D
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

19.1 BLOCK DIAGRAM OF TEST SETUP

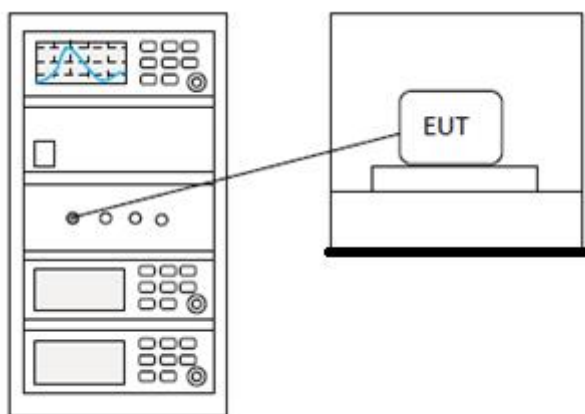


19.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

20 DUTY CYCLE

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 II B 1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

20.1 BLOCK DIAGRAM OF TEST SETUP

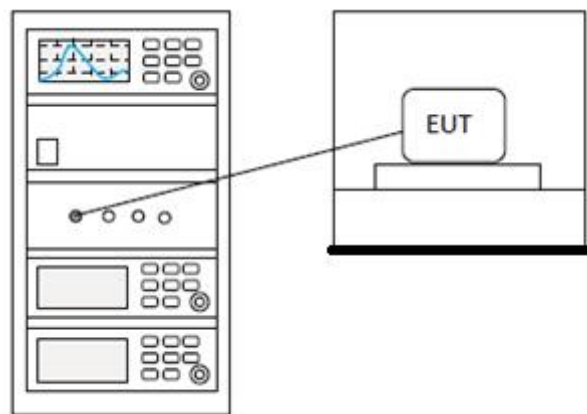

20.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

21 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	Transmitting mode
Test Mode (Final Test)	Transmitting mode
Tester	Charlie
Temperature	25℃
Humidity	60%

21.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

21.2 BLOCK DIAGRAM OF TEST SETUP

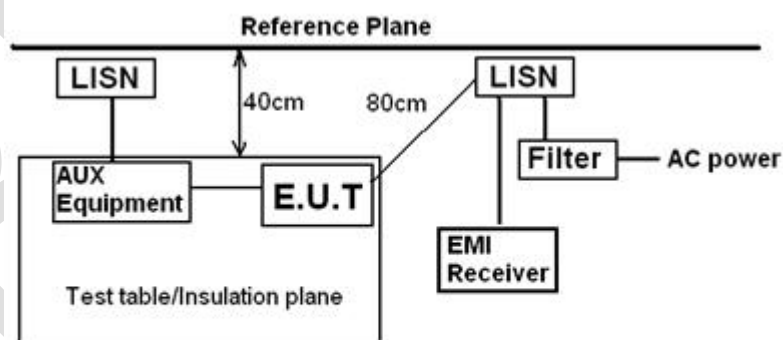

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

21.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,


4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $LISN = Read\ Level + Cable\ Loss + LISN\ Factor$


21.4 TEST DATA

[TestMode: Transmitting mode]; [Line: Neutral] ;[Power:AC120V/60Hz]

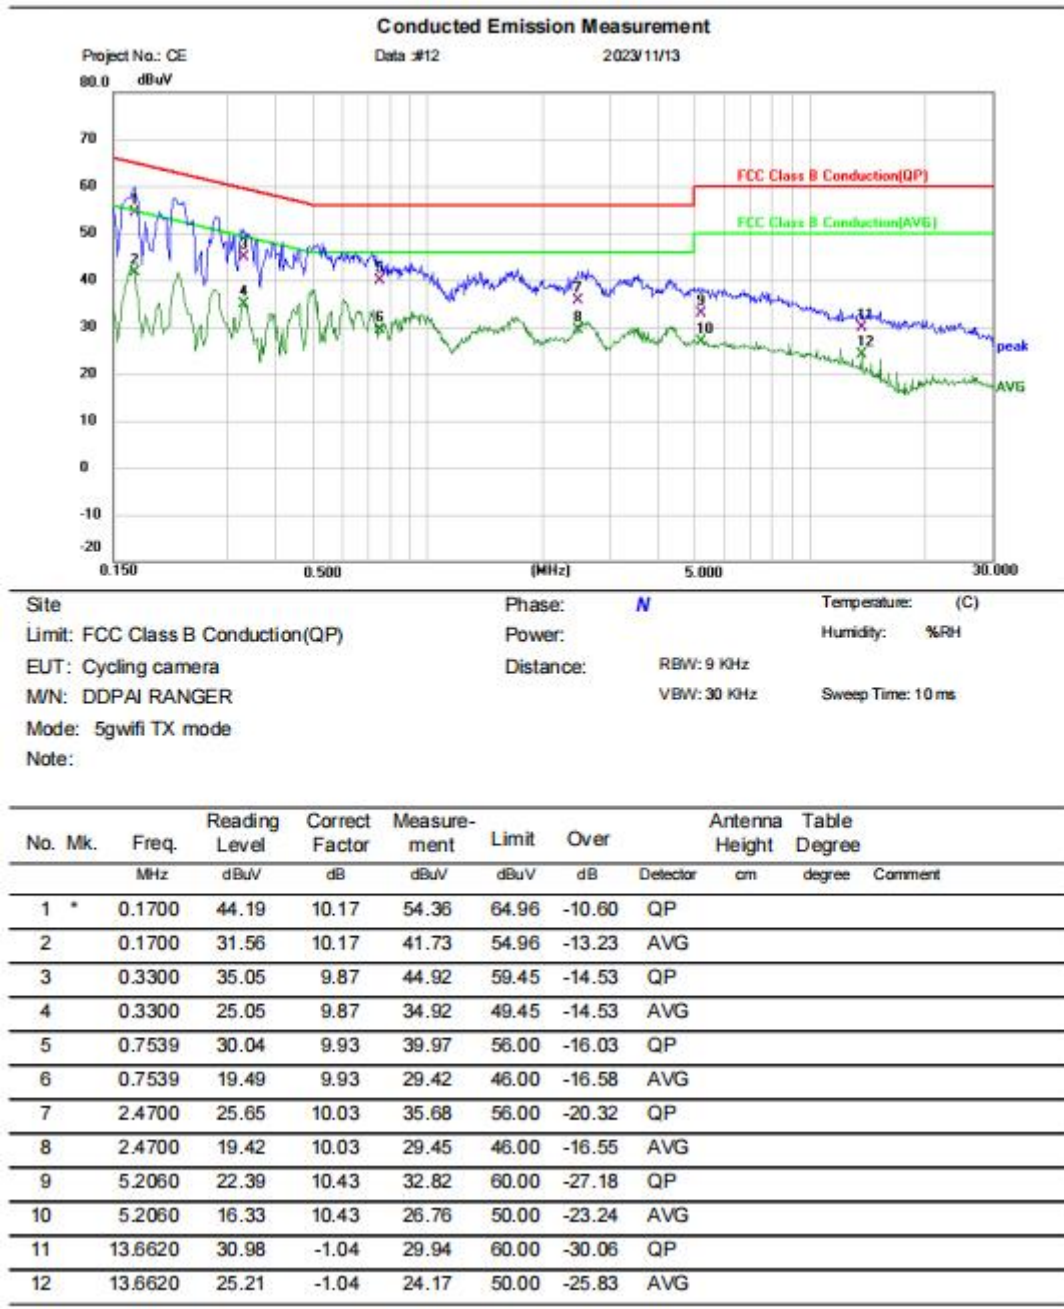

Test Result: Pass

[TestMode: Transmitting mode]; [Line: Line] ;[Power:AC120V/60Hz]

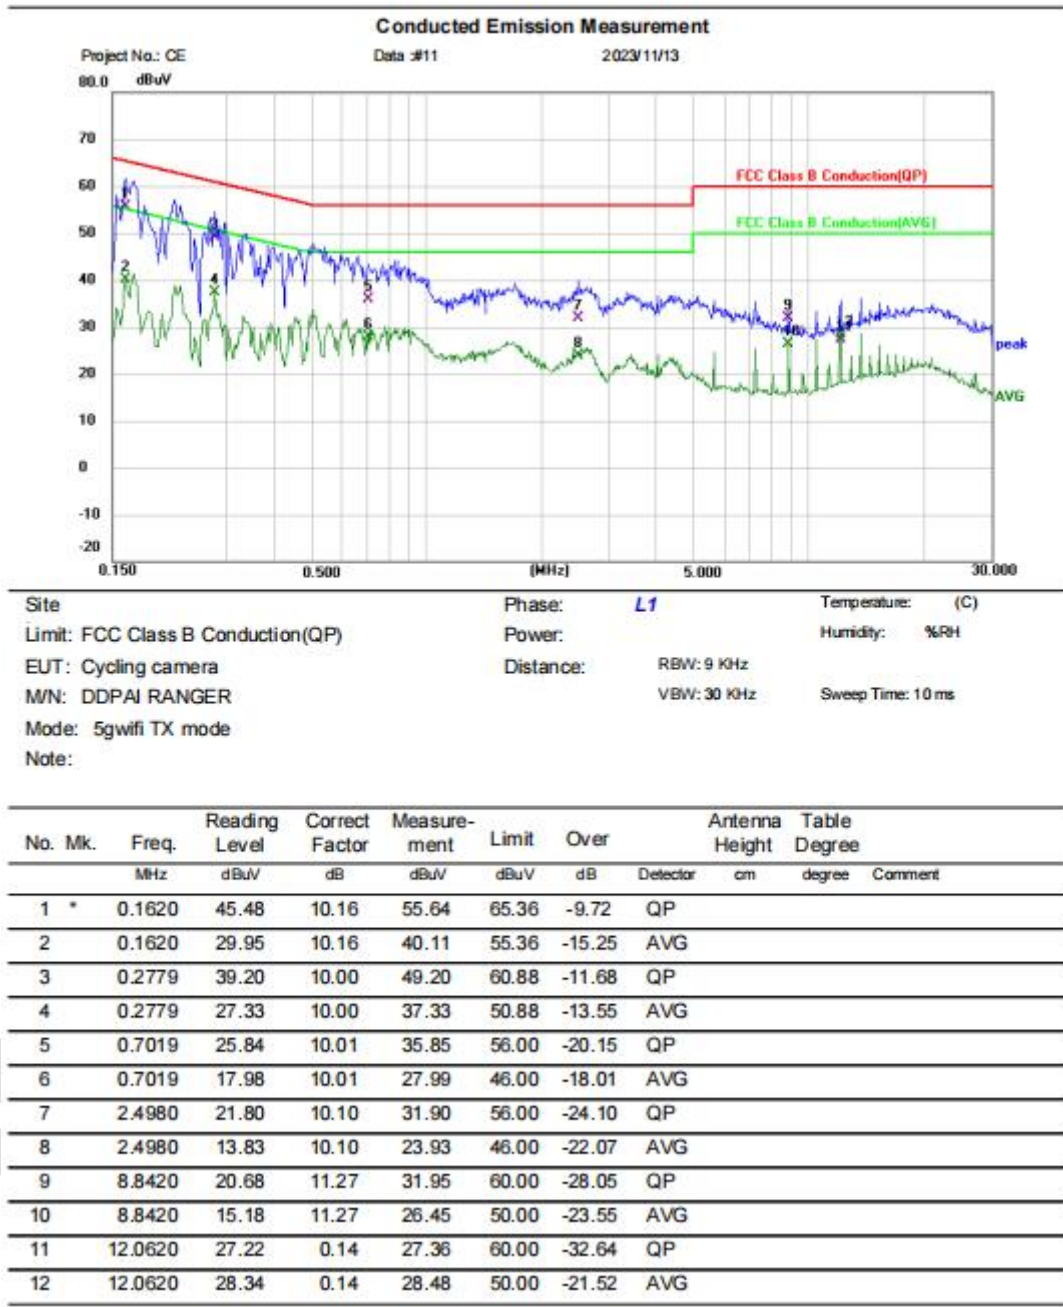

Test Result: Pass

22 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	N/A


22.1 CONCLUSION


Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The best case gain of the antenna is 2.12dBi.

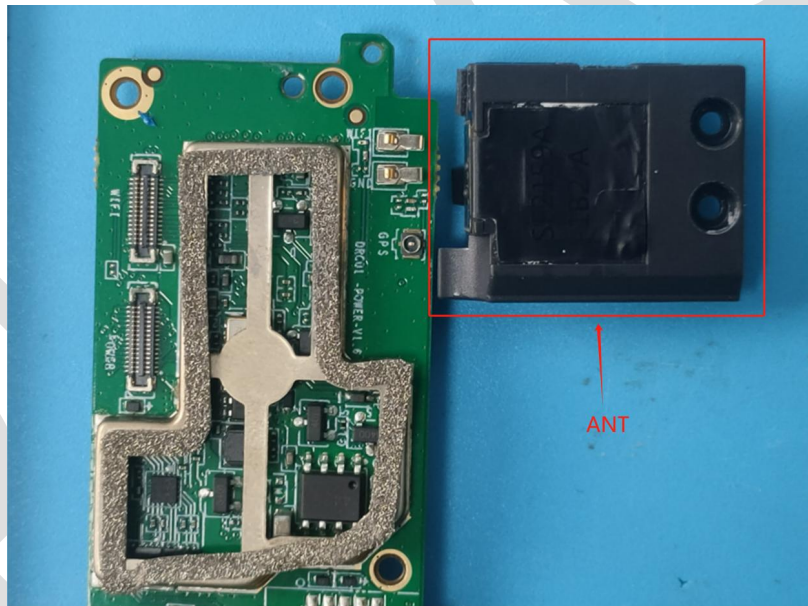

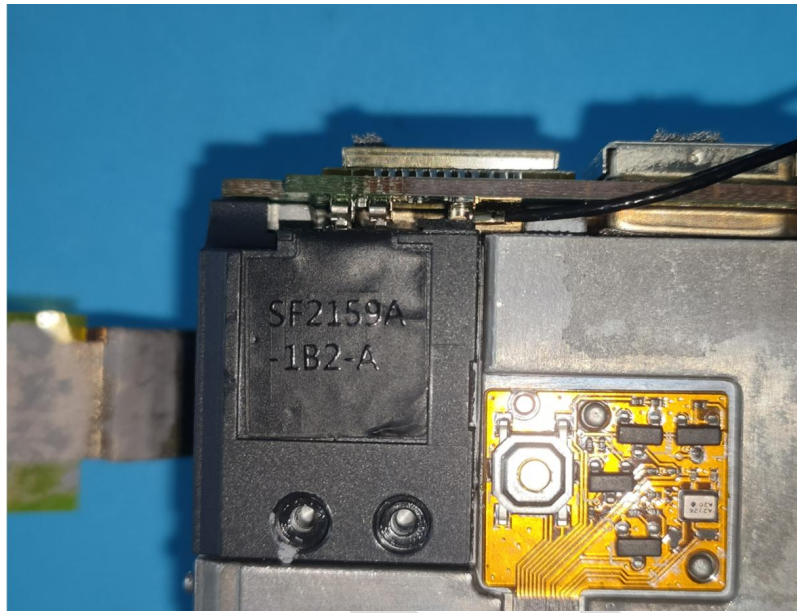


23 APPENDIX


23.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	7.635	24	Pass
NVNT	a	5200	Ant1	7.294	24	Pass
NVNT	a	5240	Ant1	7.036	24	Pass
NVNT	ac20	5180	Ant1	7.625	24	Pass
NVNT	ac20	5200	Ant1	7.33	24	Pass
NVNT	ac20	5240	Ant1	7.1	24	Pass
NVNT	ac40	5190	Ant1	7.926	24	Pass
NVNT	ac40	5230	Ant1	7.877	24	Pass
NVNT	ac80	5210	Ant1	8.02	24	Pass
NVNT	n20	5180	Ant1	7.723	24	Pass
NVNT	n20	5200	Ant1	7.314	24	Pass
NVNT	n20	5240	Ant1	7.067	24	Pass
NVNT	n40	5190	Ant1	8.014	24	Pass
NVNT	n40	5230	Ant1	8.265	24	Pass


Power NVNT a 5180MHz Ant1

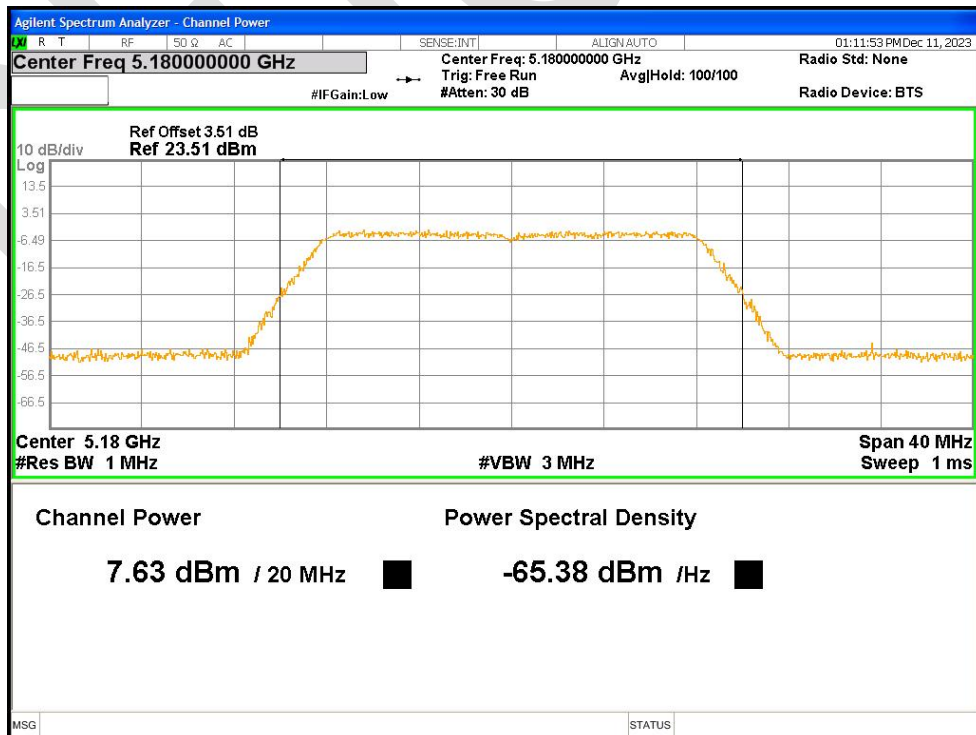


Power NVNT a 5200MHz Ant1

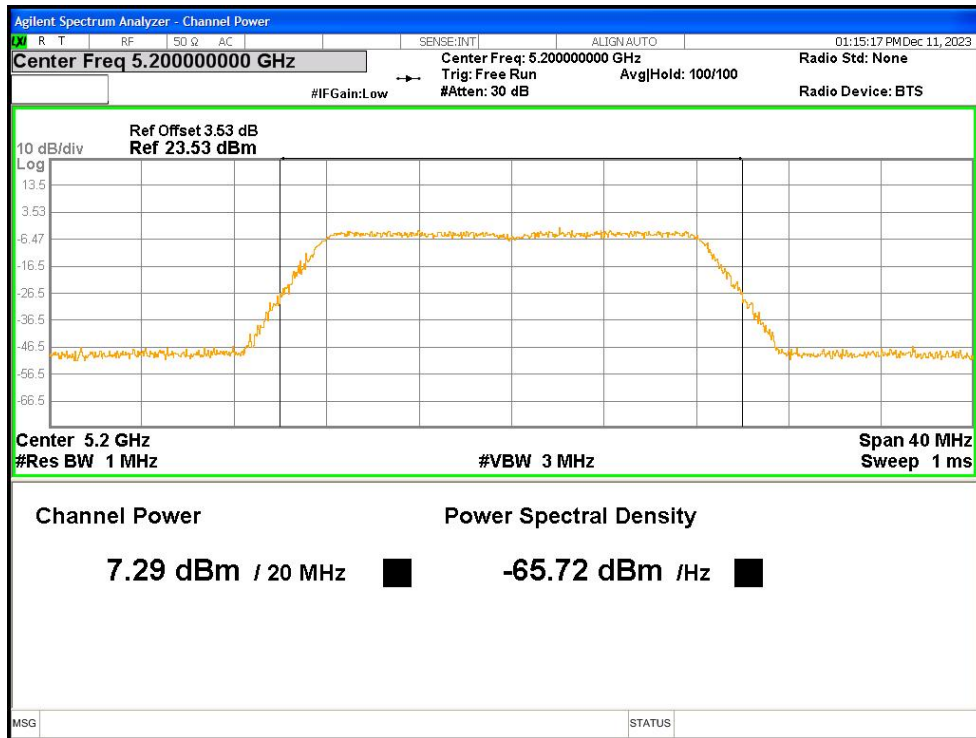


Power NVNT a 5240MHz Ant1

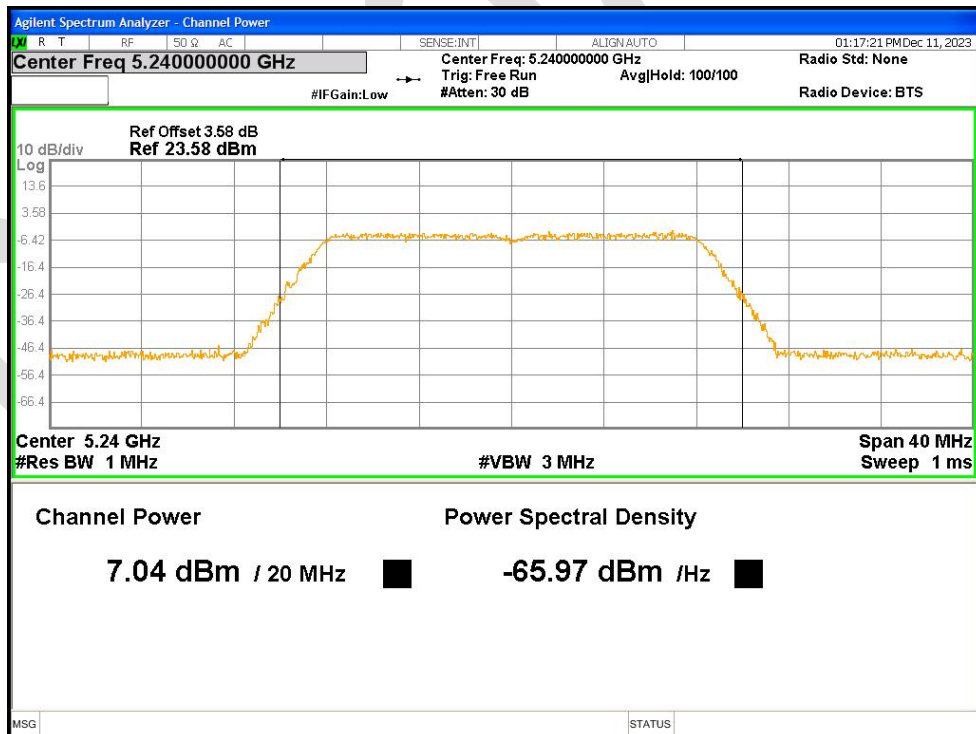


Power NVNT ac20 5180MHz Ant1

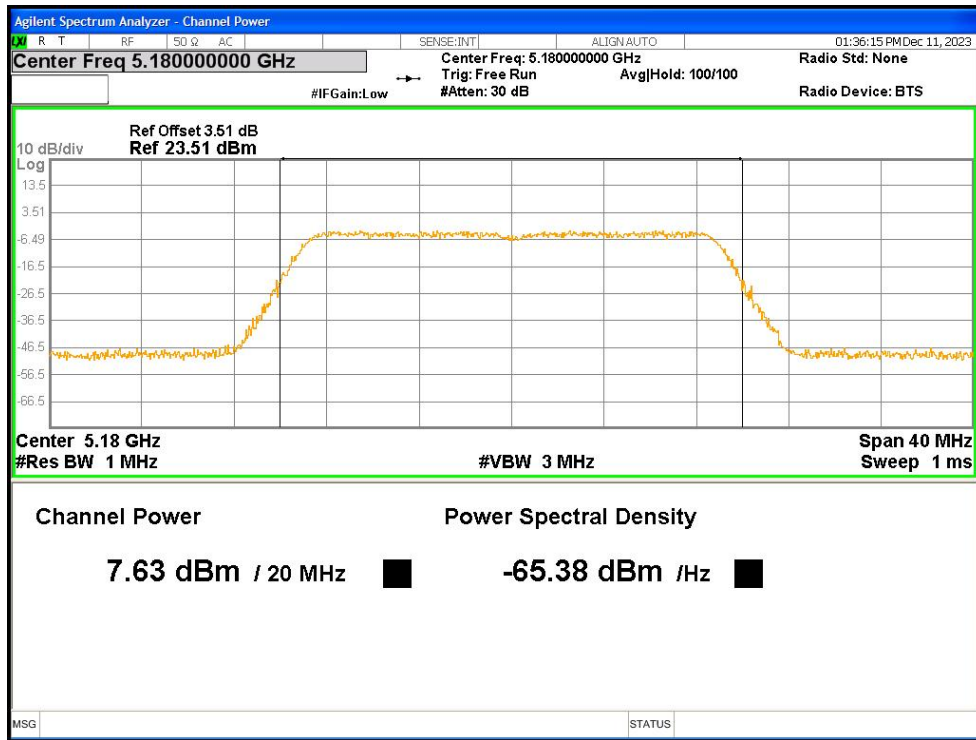


Power NVNT ac20 5200MHz Ant1

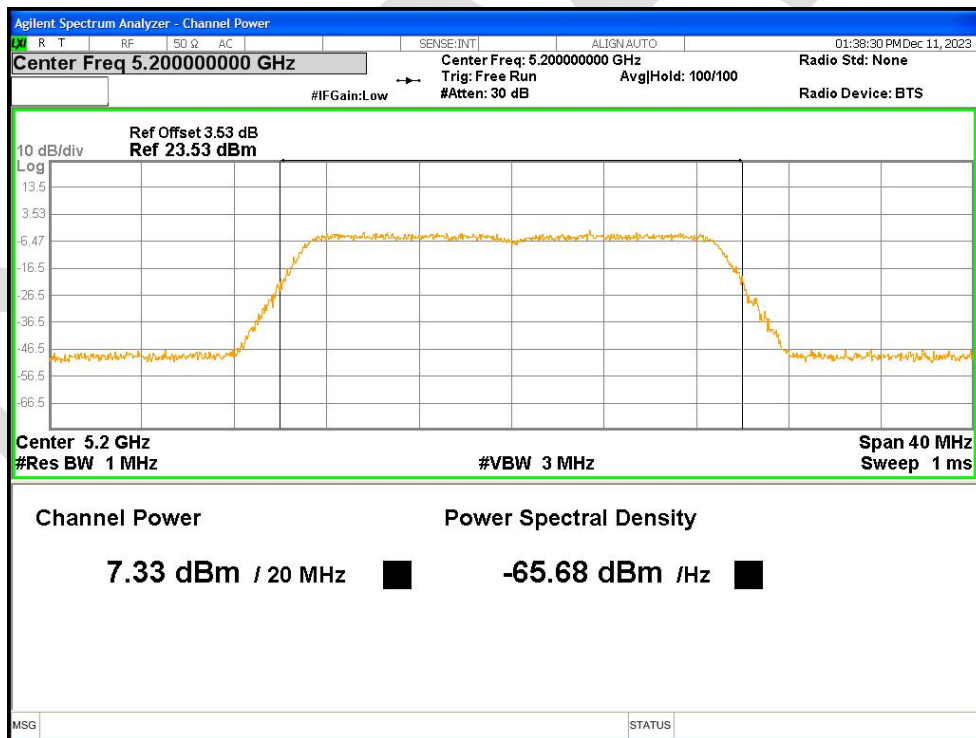


Power NVNT ac20 5240MHz Ant1

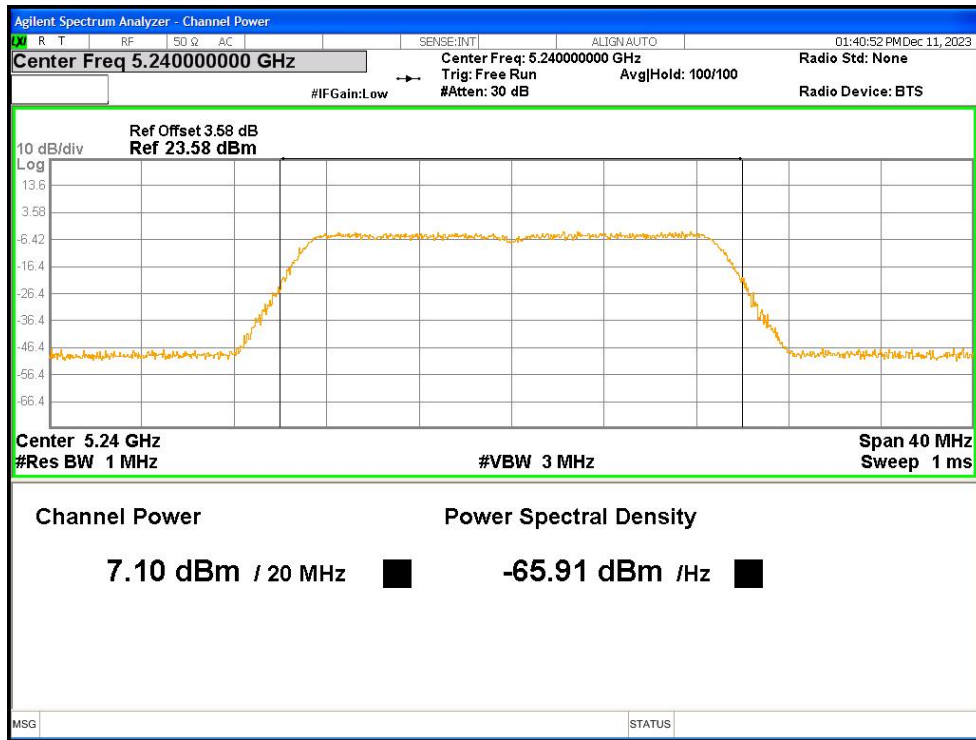


Power NVNT ac40 5190MHz Ant1

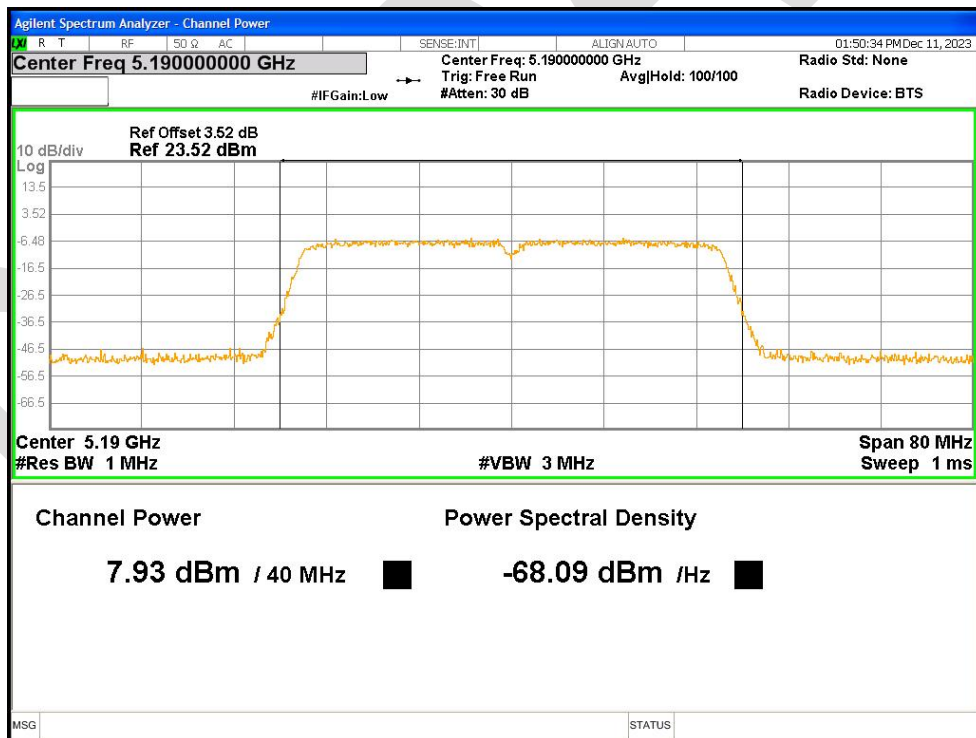


Power NVNT ac40 5230MHz Ant1

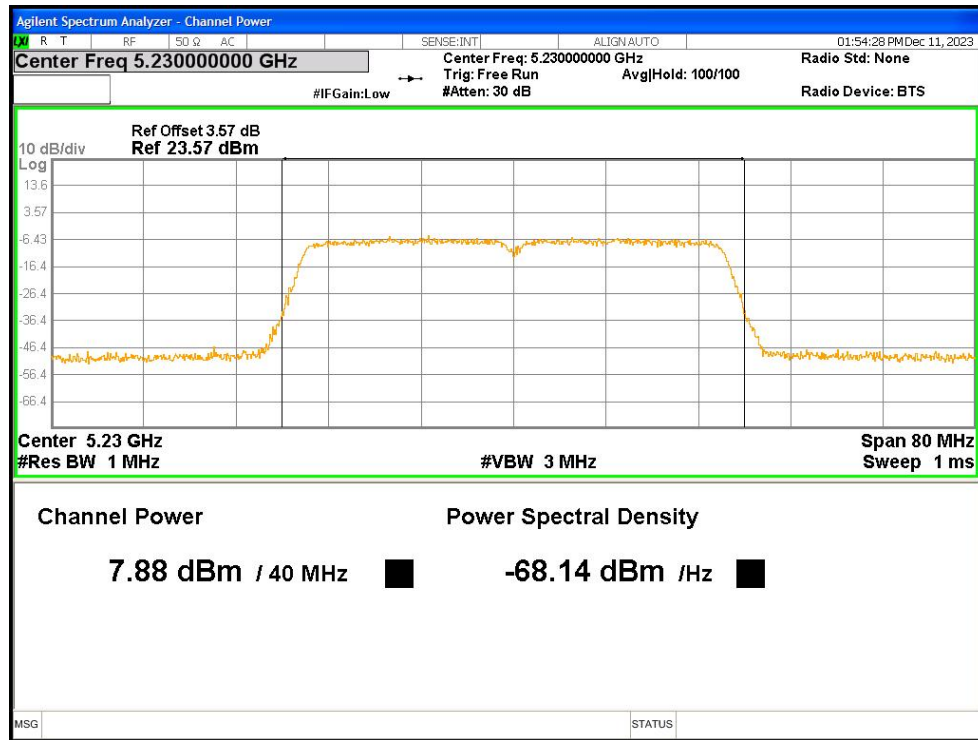


Power NVNT ac80 5210MHz Ant1

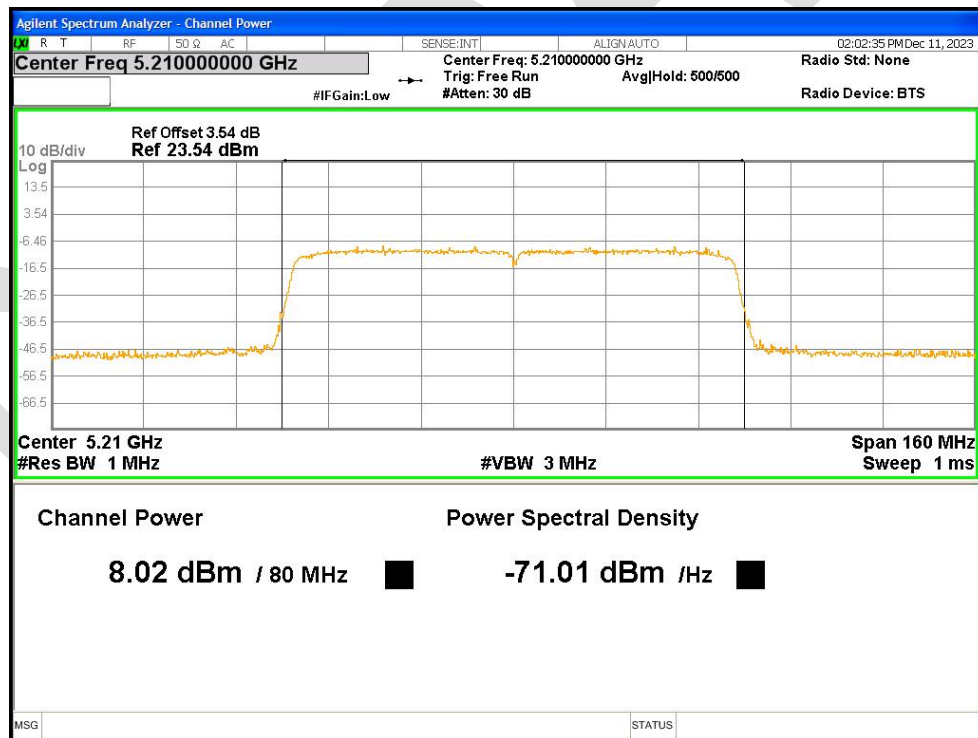


Power NVNT n20 5180MHz Ant1

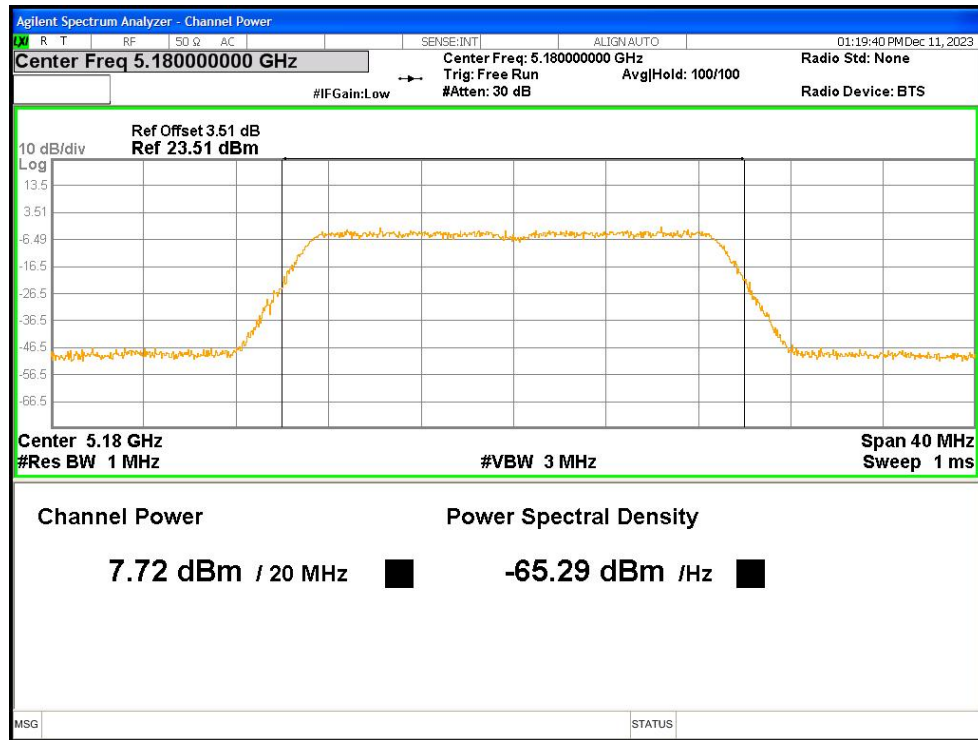


Power NVNT n20 5200MHz Ant1

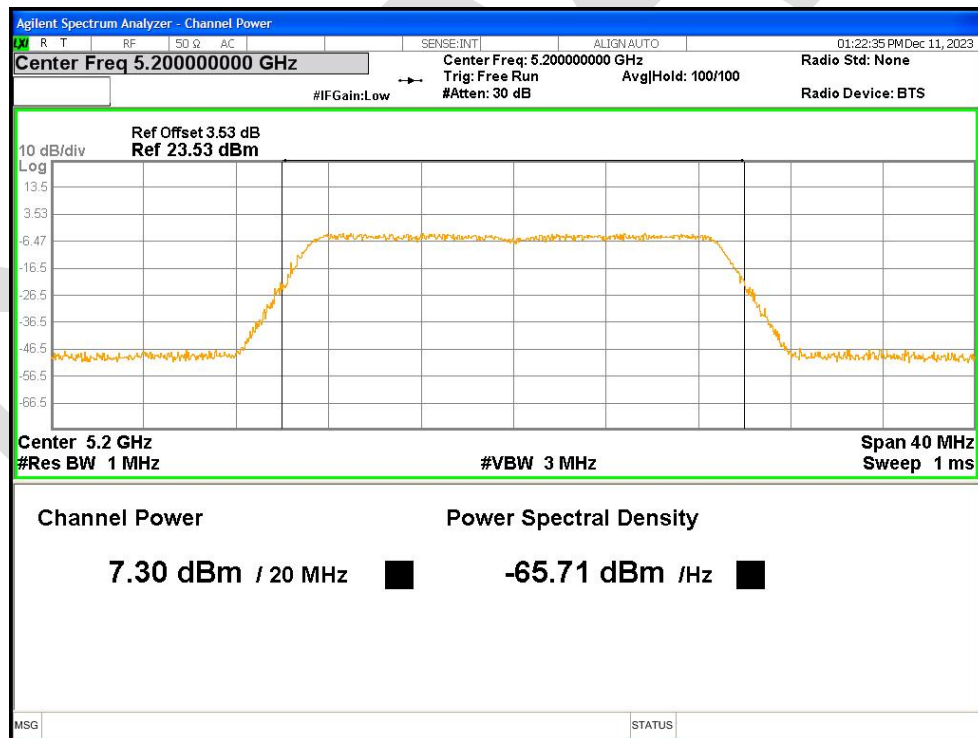


Power NVNT n20 5240MHz Ant1

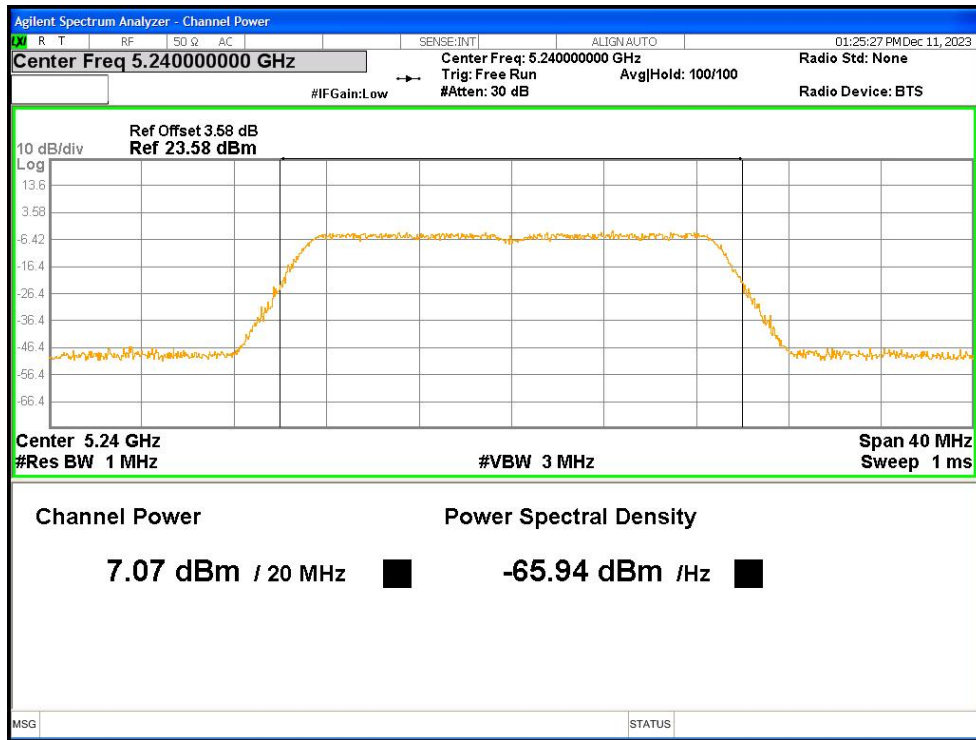

Power NVNT n40 5190MHz Ant1

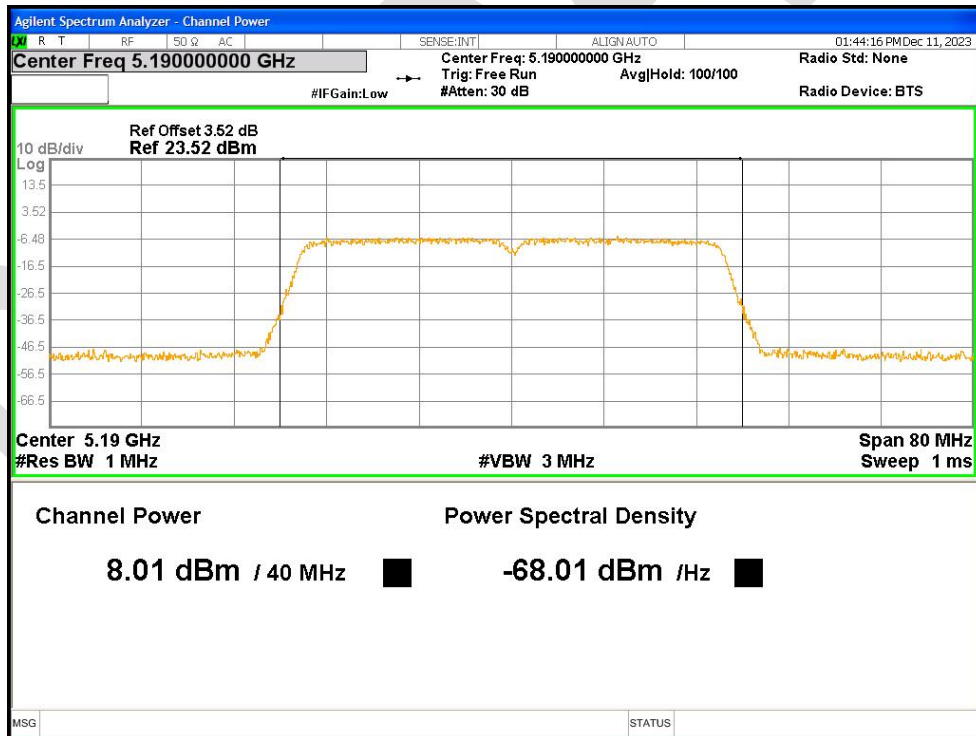


Power NVNT n40 5230MHz Ant1

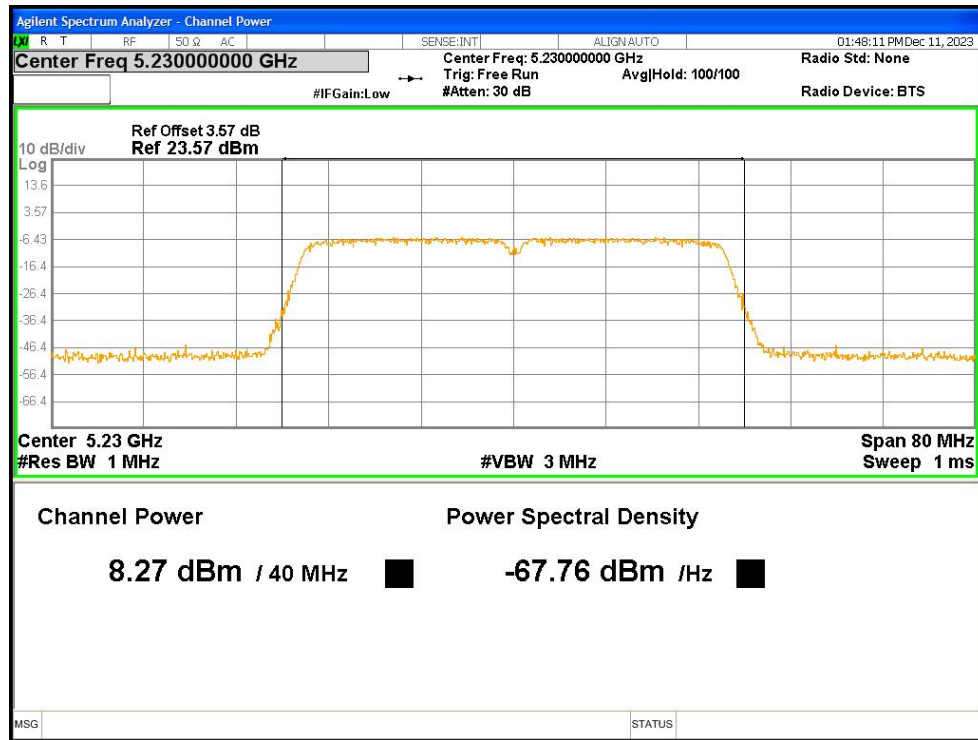


23.2 -26DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	19.429	0.5	Pass
NVNT	a	5200	Ant1	19.579	0.5	Pass
NVNT	a	5240	Ant1	19.639	0.5	Pass
NVNT	ac20	5180	Ant1	20.11	0.5	Pass
NVNT	ac20	5200	Ant1	20.199	0.5	Pass
NVNT	ac20	5240	Ant1	19.986	0.5	Pass
NVNT	ac40	5190	Ant1	38.692	0.5	Pass
NVNT	ac40	5230	Ant1	38.504	0.5	Pass
NVNT	ac80	5210	Ant1	79.034	0.5	Pass
NVNT	n20	5180	Ant1	20.113	0.5	Pass
NVNT	n20	5200	Ant1	20.071	0.5	Pass
NVNT	n20	5240	Ant1	20.187	0.5	Pass
NVNT	n40	5190	Ant1	38.855	0.5	Pass
NVNT	n40	5230	Ant1	38.709	0.5	Pass


-26dB Bandwidth NVNT a 5180MHz Ant1

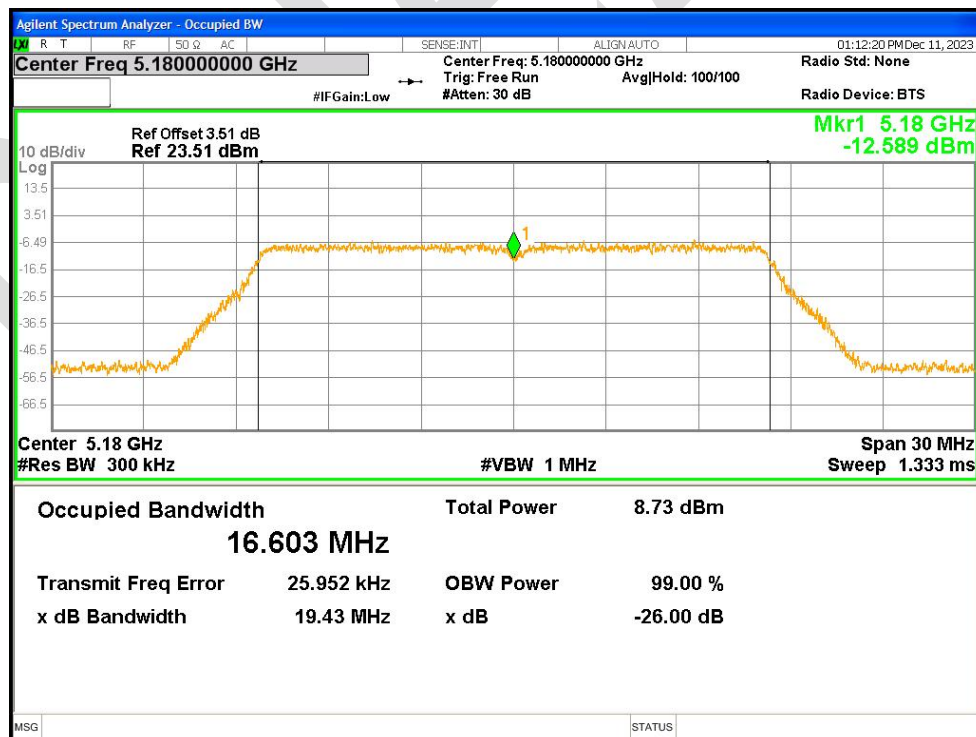


-26dB Bandwidth NVNT a 5200MHz Ant1

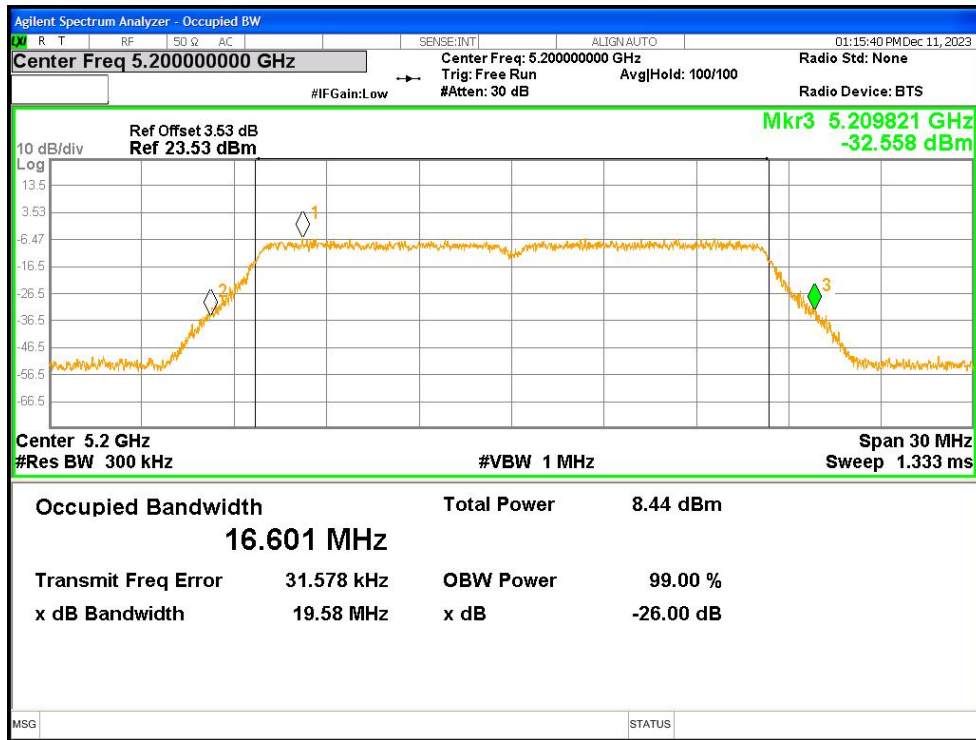


-26dB Bandwidth NVNT a 5240MHz Ant1

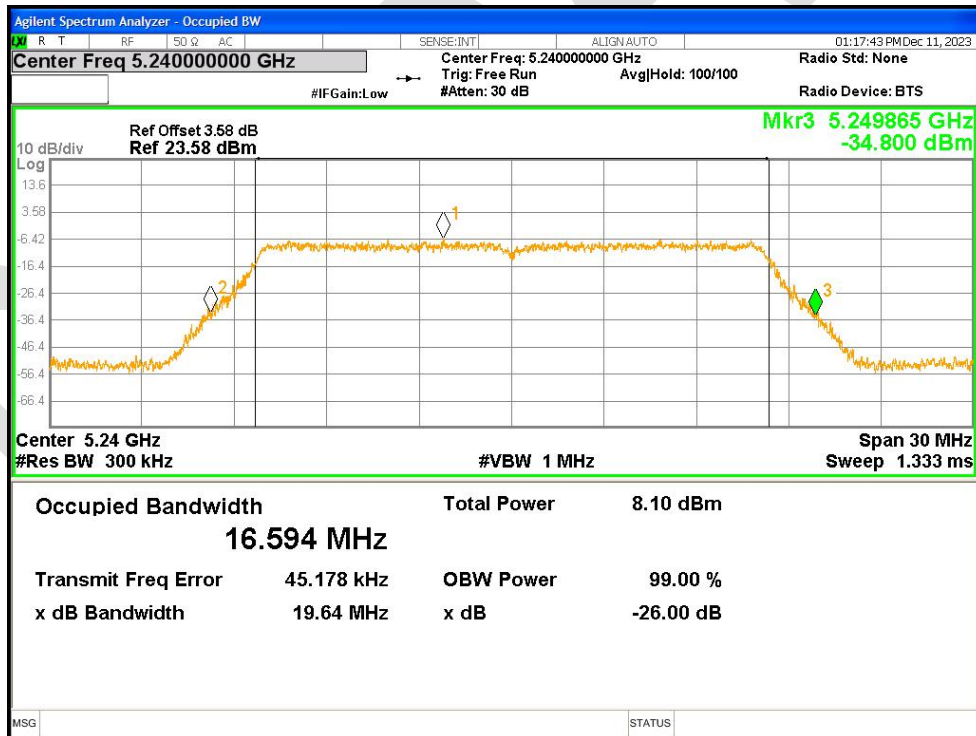


-26dB Bandwidth NVNT ac20 5180MHz Ant1

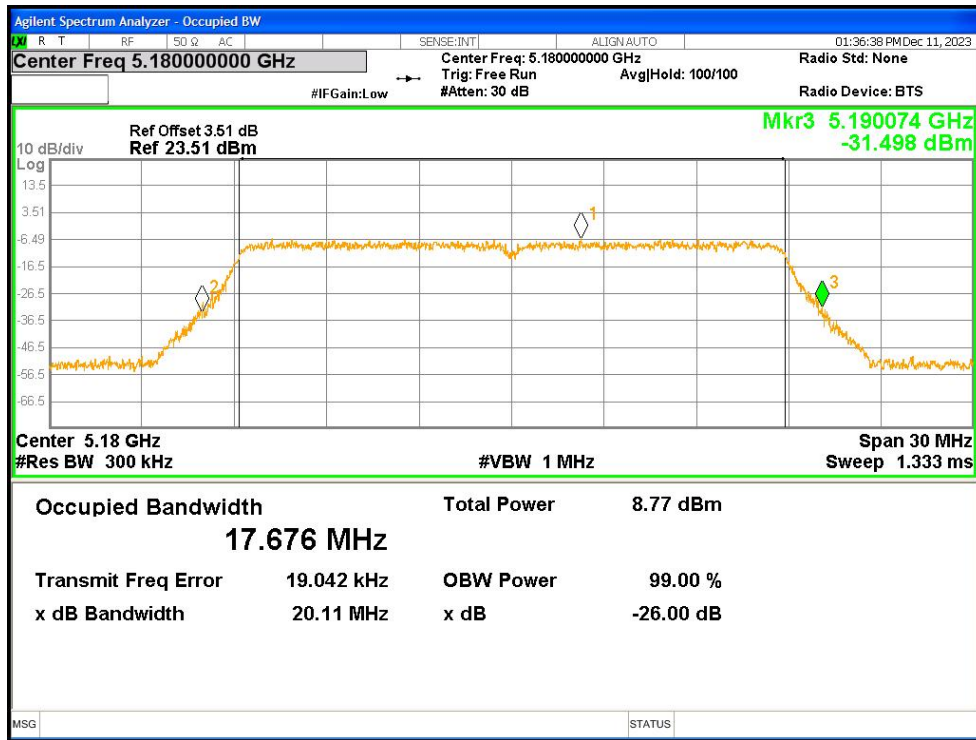


-26dB Bandwidth NVNT ac20 5200MHz Ant1

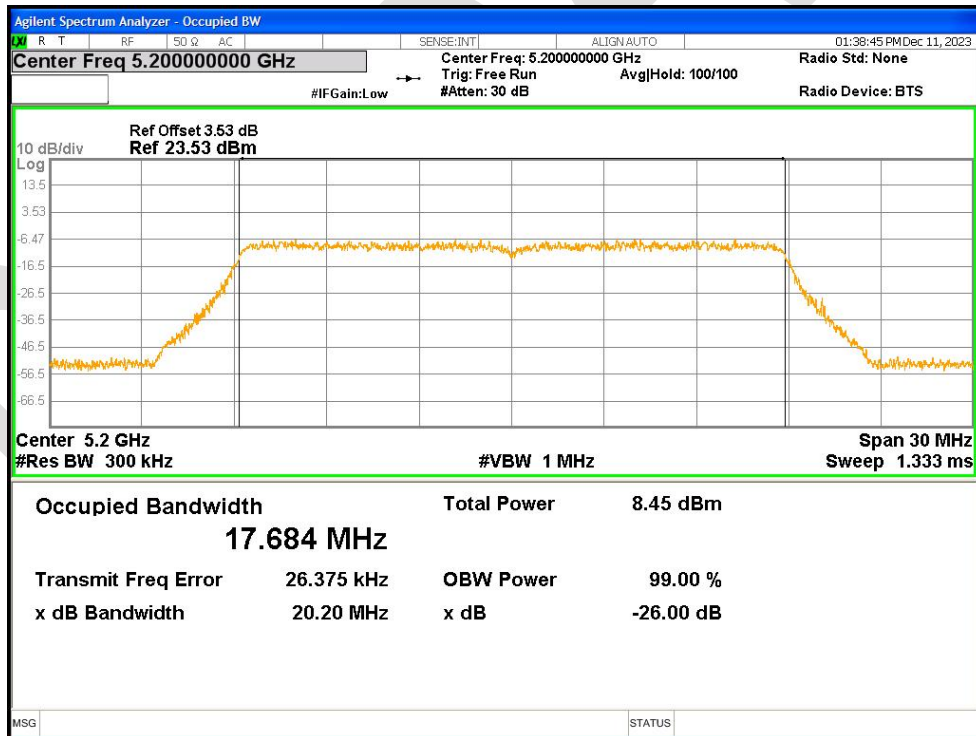


-26dB Bandwidth NVNT ac20 5240MHz Ant1

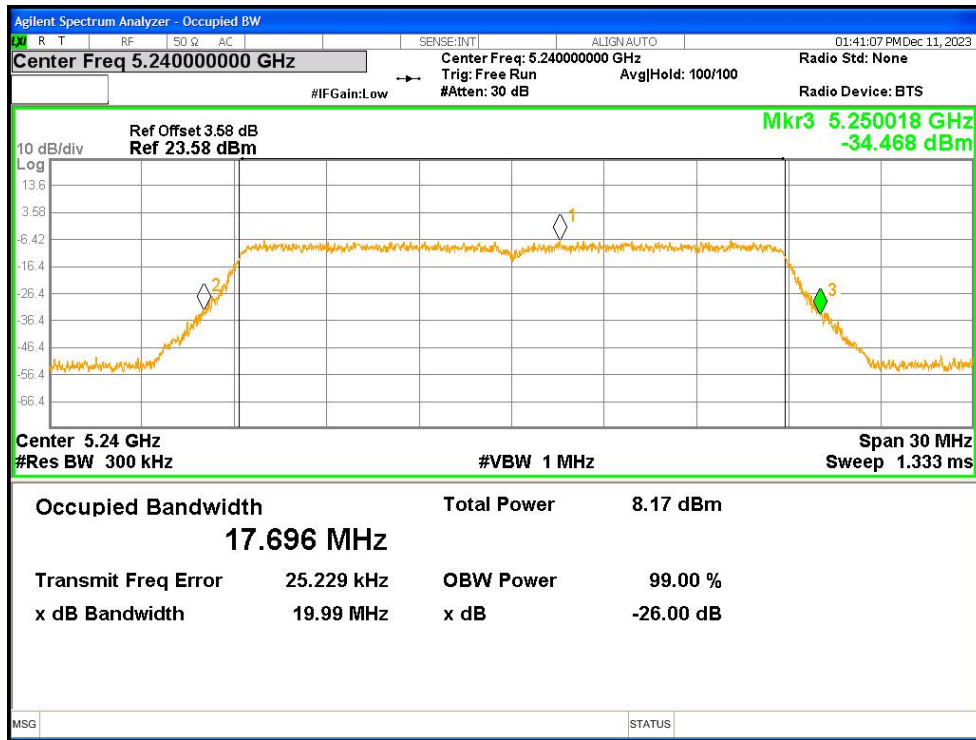


-26dB Bandwidth NVNT ac40 5190MHz Ant1

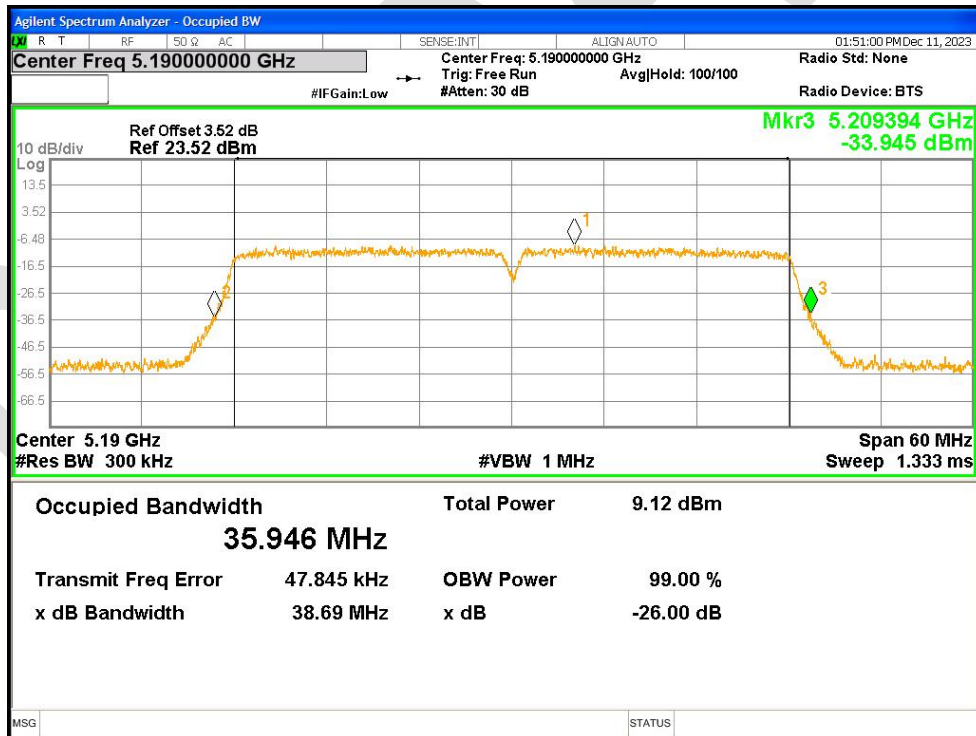


-26dB Bandwidth NVNT ac40 5230MHz Ant1

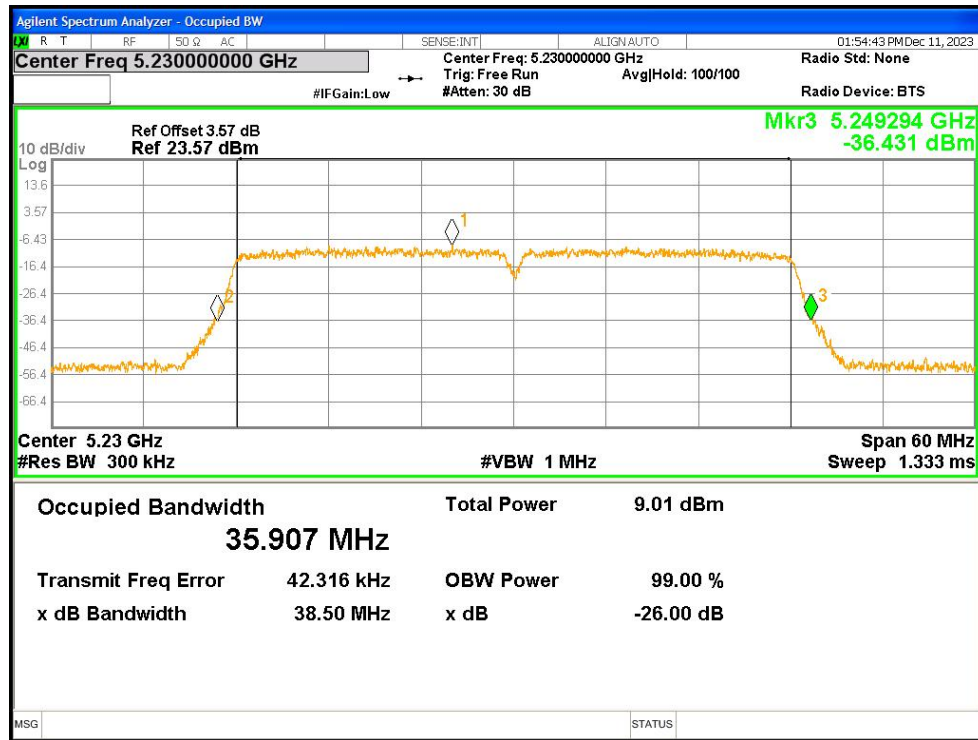


-26dB Bandwidth NVNT ac80 5210MHz Ant1

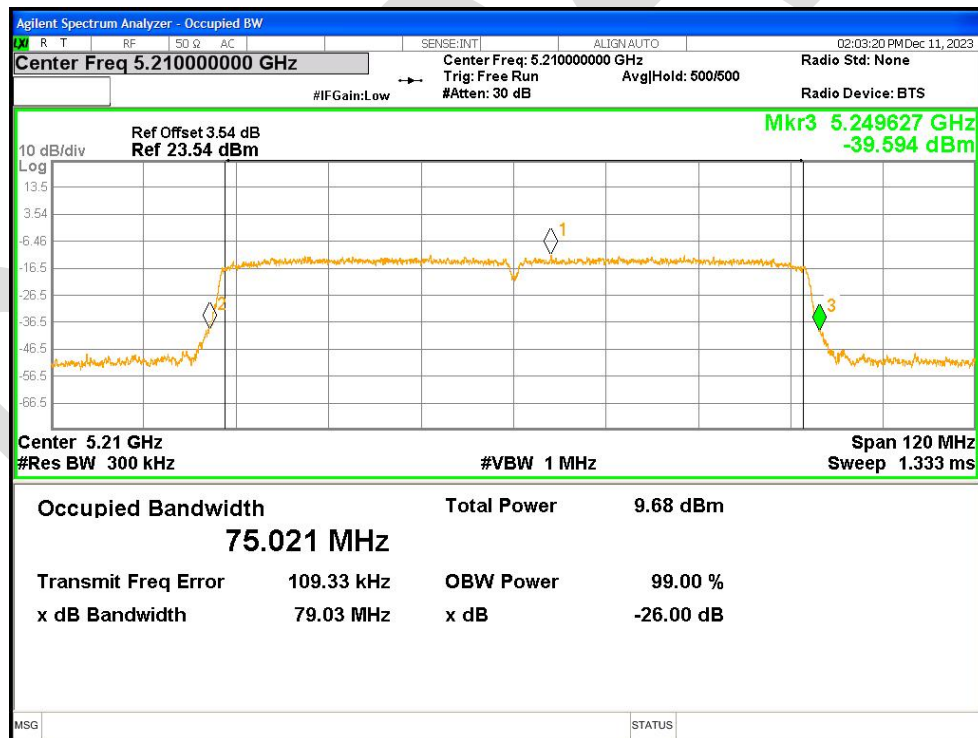


-26dB Bandwidth NVNT n20 5180MHz Ant1

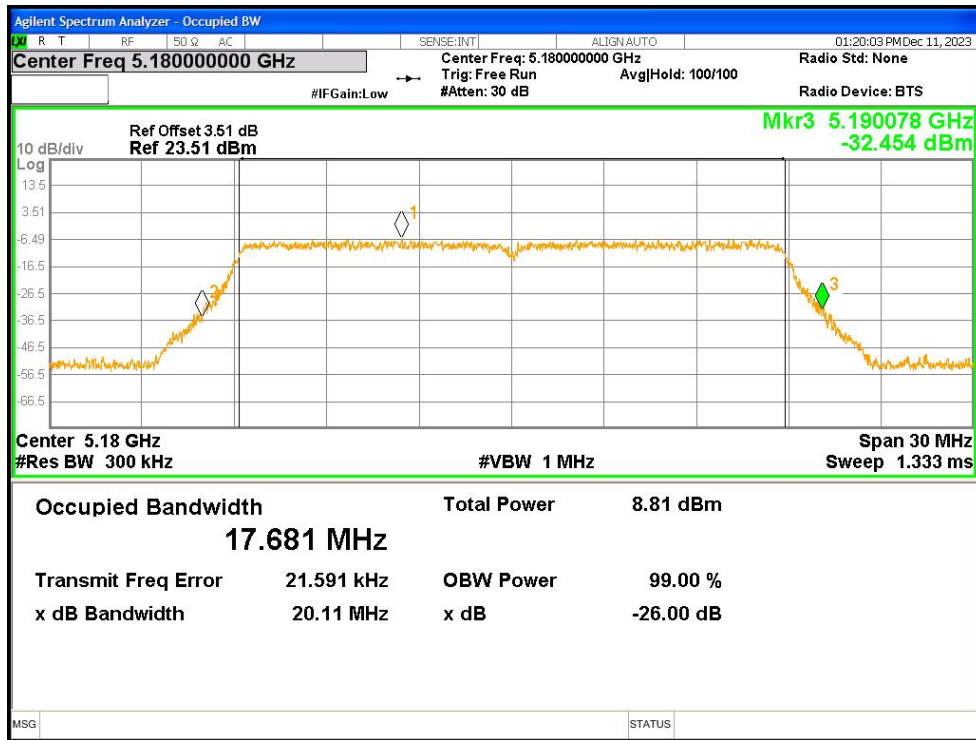


-26dB Bandwidth NVNT n20 5200MHz Ant1

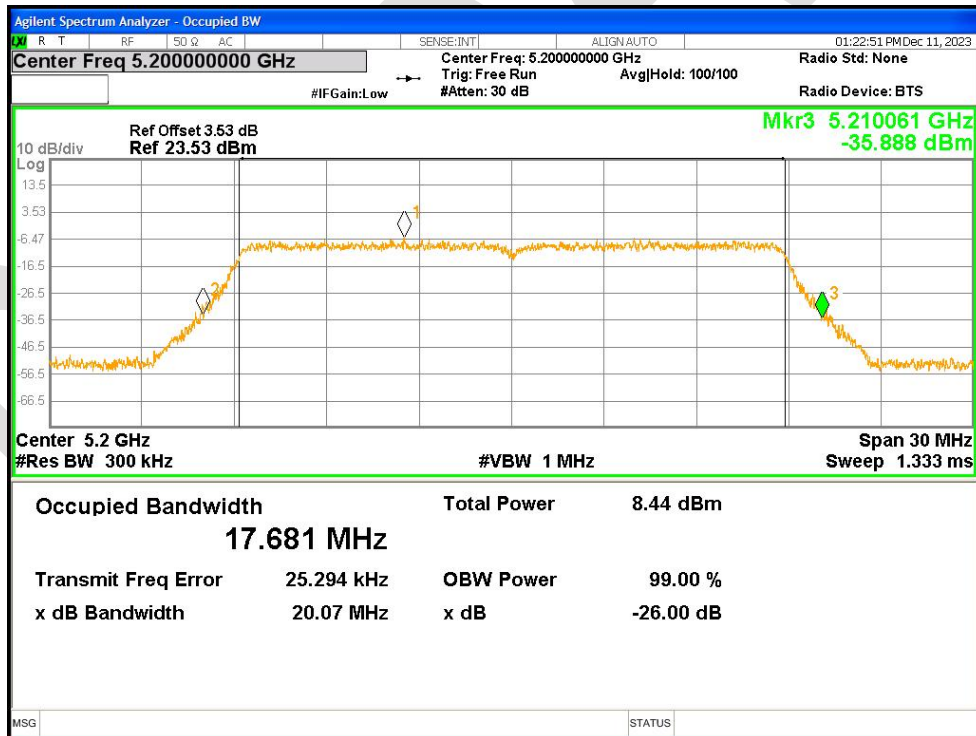

-26dB Bandwidth NVNT n20 5240MHz Ant1

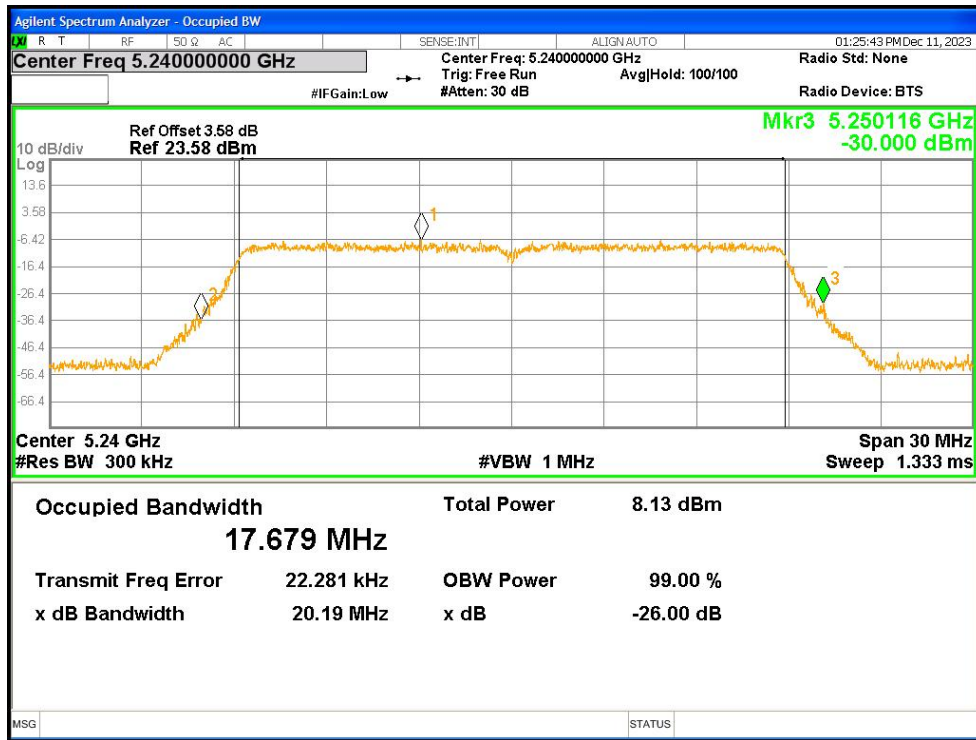

-26dB Bandwidth NVNT n40 5190MHz Ant1

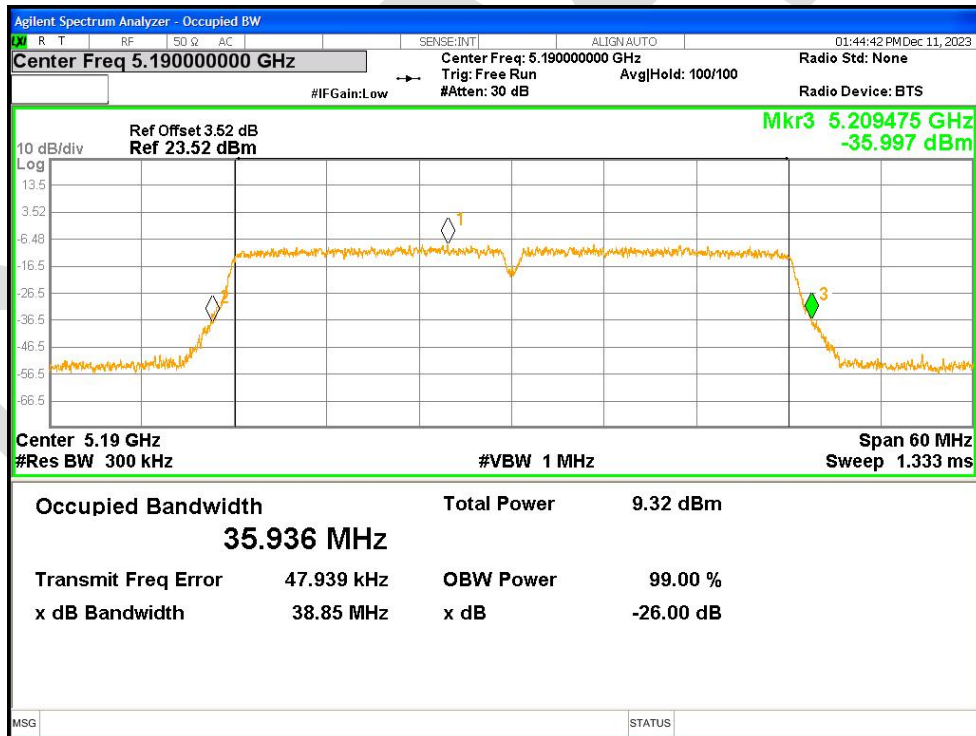

-26dB Bandwidth NVNT n40 5230MHz Ant1