

---

# FCC Test Report

---

Report No.: AGC02294220801FE10

**FCC ID** : 2AJGM-GM30

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION** : GMRS Two way radio

**BRAND NAME** : BAOFENG, POFUNG

**MODEL NAME** : GM-30, GMRS-15J, GM-13PRO, GM-15E, GM-15X, GM-H5

**APPLICANT** : PO FUNG ELECTRONIC (HK) INTERNATIONAL GROUP  
COMPANY LIMITED

**DATE OF ISSUE** : Sep. 21, 2022

**STANDARD(S)** : FCC Part 95 Rules

**REPORT VERSION** : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>



**REPORT REVISE RECORD**

| Report Version | Revise Time | Issued Date   | Valid Version | Notes           |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0           | /           | Sep. 21, 2022 | Valid         | Initial Release |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## TABLE OF CONTENTS

|                                              |           |
|----------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>          | <b>5</b>  |
| <b>2. PRODUCT INFORMATION .....</b>          | <b>6</b>  |
| 2.1 PRODUCT TECHNICAL DESCRIPTION .....      | 6         |
| 2.2 TEST FREQUENCY LIST .....                | 7         |
| 2.3 RELATED SUBMITTAL(S) / GRANT (S) .....   | 8         |
| 2.4 TEST METHODOLOGY .....                   | 8         |
| 2.5 CALCULATION OF EMISSION INDICATORS ..... | 8         |
| 2.6 SPECIAL ACCESSORIES .....                | 8         |
| 2.7 EQUIPMENT MODIFICATIONS .....            | 8         |
| 2.8 ANTENNA REQUIREMENT .....                | 9         |
| <b>3. TEST ENVIRONMENT .....</b>             | <b>10</b> |
| 3.1 ADDRESS OF THE TEST LABORATORY .....     | 10        |
| 3.2 TEST FACILITY .....                      | 10        |
| 3.3 ENVIRONMENTAL CONDITIONS .....           | 11        |
| 3.4 MEASUREMENT UNCERTAINTY .....            | 11        |
| 3.5 LIST OF EQUIPMENTS USED .....            | 12        |
| <b>4. SYSTEM TEST CONFIGURATION .....</b>    | <b>13</b> |
| 4.1 EUT CONFIGURATION .....                  | 13        |
| 4.2 EUT EXERCISE .....                       | 13        |
| 4.3 CONFIGURATION OF TESTED SYSTEM .....     | 13        |
| 4.4 EQUIPMENT USED IN TESTED SYSTEM .....    | 13        |
| 4.5 SUMMARY OF TEST RESULTS .....            | 14        |
| <b>5. DESCRIPTION OF TEST MODES .....</b>    | <b>15</b> |
| <b>6. FREQUENCY STABILITY .....</b>          | <b>16</b> |
| 6.1 PROVISIONS APPLICABLE .....              | 16        |
| 6.2 MEASUREMENT PROCEDURE .....              | 16        |
| 6.3 MEASUREMENT SETUP .....                  | 16        |
| 6.4 MEASUREMENT RESULTS .....                | 17        |
| <b>7. EMISSION BANDWIDTH .....</b>           | <b>18</b> |
| 7.1 PROVISIONS APPLICABLE .....              | 18        |
| 7.2 MEASUREMENT PROCEDURE .....              | 18        |
| 7.3 MEASUREMENT SETUP .....                  | 18        |
| 7.4 MEASUREMENT RESULTS .....                | 19        |
| <b>8. SPURIOUS RADIATED EMISSION .....</b>   | <b>22</b> |
| 8.1 PROVISIONS APPLICABLE .....              | 22        |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

|                                                   |           |
|---------------------------------------------------|-----------|
| 8.2 MEASUREMENT PROCEDURE.....                    | 22        |
| 8.3 MEASUREMENT SETUP.....                        | 23        |
| 8.4 MEASUREMENT RESULTS.....                      | 25        |
| 8.5 EMISSION MASK PLOT.....                       | 30        |
| <b>9.MODULATION CHARACTERISTICS .....</b>         | <b>33</b> |
| 9.1 PROVISIONS APPLICABLE.....                    | 33        |
| 9.2 MEASUREMENT METHOD .....                      | 33        |
| 9.3 MEASUREMENT SETUP.....                        | 33        |
| 9.4 MEASUREMENT RESULTS.....                      | 34        |
| <b>10. MAXIMUM TRANSMITTER POWER .....</b>        | <b>38</b> |
| 10.1 PROVISIONS APPLICABLE.....                   | 38        |
| 10.2 MEASUREMENT METHOD .....                     | 38        |
| 10.3 MEASUREMENT SETUP.....                       | 39        |
| 10.4 MEASUREMENT RESULTS .....                    | 41        |
| <b>11. SPURIOUS EMISSION ON ANTENNA PORT.....</b> | <b>43</b> |
| 11.1 PROVISIONS APPLICABLE.....                   | 43        |
| 11.2 MEASUREMENT METHOD.....                      | 43        |
| 11.3 MEASUREMENT SETUP .....                      | 43        |
| 11.4 MEASUREMENT RESULTS.....                     | 44        |
| <b>12. AUDIO LOW PASS FILTER RESPONSE .....</b>   | <b>47</b> |
| 12.1 PROVISIONS APPLICABLE.....                   | 47        |
| 12.2 MEASUREMENT METHOD .....                     | 47        |
| 12.3 MEASUREMENT SETUP.....                       | 47        |
| 12.4 MEASUREMENT RESULTS.....                     | 48        |
| <b>APPENDIX I: PHOTOGRAPHS OF TEST SETUP.....</b> | <b>50</b> |
| <b>APPENDIX II: PHOTOGRAPHS OF TEST EUT.....</b>  | <b>50</b> |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


## 1. GENERAL INFORMATION

|                         |                                                                                                                                                                                                                                        |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant               | PO FUNG ELECTRONIC (HK) INTERNATIONAL GROUP COMPANY LIMITED                                                                                                                                                                            |
| Address                 | Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan Road, Kowloon, Hong Kong                                                                                                                                                     |
| Manufacturer            | PO FUNG ELECTRONIC (HK) INTERNATIONAL GROUP COMPANY LIMITED                                                                                                                                                                            |
| Address                 | Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan Road, Kowloon, Hong Kong                                                                                                                                                     |
| Factory                 | PO FUNG ELECTRONIC (HK) INTERNATIONAL GROUP COMPANY LIMITED                                                                                                                                                                            |
| Address                 | Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan Road, Kowloon, Hong Kong                                                                                                                                                     |
| Product Designation     | GMRS Two way radio                                                                                                                                                                                                                     |
| Brand Name              | BAOFENG, POFUNG                                                                                                                                                                                                                        |
| Test Model              | GM-30                                                                                                                                                                                                                                  |
| Series Model(s)         | GMRS-15J, GM-13PRO, GM-15E, GM-15X, GM-H5                                                                                                                                                                                              |
| Difference Description  | The same electromagnetic emissions and electromagnetic compatibility characteristics. GM-30, GMRS-15J, GM-13PRO, GM-15E, GM-15X, GM-H5 are just different model name & Brand name & appearance outside speaker, the rest are the same. |
| Deviation from Standard | No any deviation from the test method.                                                                                                                                                                                                 |
| Date of Receipt         | Aug. 09, 2022                                                                                                                                                                                                                          |
| Date of Test            | Aug. 09, 2022~Sep. 21, 2022                                                                                                                                                                                                            |
| Test Result             | Pass                                                                                                                                                                                                                                   |

### WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 95. The test results of this report relate only to the tested sample identified in this report.

Prepared By



Bibo Zhang  
(Project Engineer)

Sep. 21, 2022

Reviewed By



Calvin Liu  
(Reviewer)

Sep. 21, 2022

Approved By



Max Zhang  
Authorized Officer

Sep. 21, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std &amp; Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

## 2. PRODUCT INFORMATION

### 2.1 PRODUCT TECHNICAL DESCRIPTION

|                           |                                                                                                                                                                                                                                              |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hardware Version          | V05                                                                                                                                                                                                                                          |
| Software Version          | V1.00.32                                                                                                                                                                                                                                     |
| Power Supply              | DC 7.4V 1500mAh by battery                                                                                                                                                                                                                   |
| Adapter Information       | Input: AC 100-240V 50/60Hz, 0.3A<br>Output: DC 5V 1A                                                                                                                                                                                         |
| Communication Type        | Voice / Tone only                                                                                                                                                                                                                            |
| Operation Frequency Range | 462.5500MHz-462.7250MHz (GMRS 462 MHz main channels)<br>462.5625MHz-462.7125MHz (GMRS 462 MHz interstitial channels)<br>467.5500MHz-467.7250MHz (GMRS 467 MHz main channels)<br>467.5625MHz-467.7125MHz (GMRS 467 MHz interstitial channels) |
| Modulation Type           | FM                                                                                                                                                                                                                                           |
| Channel Separation        | 12.5 KHz/25 KHz                                                                                                                                                                                                                              |
| Emission Bandwidth        | 10.19KHz(4W-12.5KHz), 10.50 kHz(0.5W-12.5KHz)<br>15.62 KHz(4W-25KHz)                                                                                                                                                                         |
| Emission Designator       | 11K0F3E/16K0F3E                                                                                                                                                                                                                              |
| Number of Channels:       | 30 Channels                                                                                                                                                                                                                                  |
| Rated Output Power        | 0.5W/4W<br>(It was fixed by the manufacturer, any individual can't arbitrarily change it.)                                                                                                                                                   |
| Maximum Transmitter Power | GMRS: 35.94dBm (4W-12.5KHz) GMRS: 26.89dBm (0.5W-12.5KHz)<br>GMRS: 35.78dBm (4W-25KHz)                                                                                                                                                       |
| Antenna Designation       | Detachable Antenna                                                                                                                                                                                                                           |
| Antenna Gain              | 0.8dBi                                                                                                                                                                                                                                       |
| Frequency Tolerance       | 1.098ppm                                                                                                                                                                                                                                     |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## 2.2 TEST FREQUENCY LIST

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

| Frequency range<br>Over which EUT operates | Number of Frequencies | Location in frequency range of operation     |
|--------------------------------------------|-----------------------|----------------------------------------------|
| 1 MHz or less                              | 1                     | Middle                                       |
| 1 MHz to 10 MHz                            | 2                     | 1 near top and 1 near bottom                 |
| More than 10 MHz                           | 3                     | 1 near top, 1 near middle, and 1 near bottom |

| Channel. No | CH. Freq | Rated Power | CH. No | CH. Freq | Rated Power |
|-------------|----------|-------------|--------|----------|-------------|
| 1           | 462.5625 | 4W          | 15     | 462.5500 | 4W          |
| 2           | 462.5875 |             | 16     | 462.5750 |             |
| 3           | 462.6125 |             | 17     | 462.6000 |             |
| 4           | 462.6375 |             | 18     | 462.6250 |             |
| 5           | 462.6625 |             | 19     | 462.6500 |             |
| 6           | 462.6875 |             | 20     | 462.6750 |             |
| 7           | 462.7125 |             | 21     | 462.7000 |             |
| 8           | 467.5625 | 0.5W        | 22     | 462.7250 | 4W          |
| 9           | 467.5875 |             | 23     | 467.5500 |             |
| 10          | 467.6125 |             | 24     | 467.5750 |             |
| 11          | 467.6375 |             | 25     | 467.6000 |             |
| 12          | 467.6625 |             | 26     | 467.6250 |             |
| 13          | 467.6875 |             | 27     | 467.6500 |             |
| 14          | 467.7125 |             | 28     | 467.6750 |             |
| --          |          |             | 29     | 467.7000 |             |
|             |          |             | 30     | 467.7250 |             |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## 2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **2AJGM-GM30**, filing to comply with Part 2, Part 95 of the Federal Communication Commission rules.

## 2.4 TEST METHODOLOGY

The tests were performed according to following standards:

| No. | Identity            | Document Title                                                                                    |
|-----|---------------------|---------------------------------------------------------------------------------------------------|
| 1   | FCC 47 CFR Part 95  | Personal Radio Services                                                                           |
| 2   | FCC 47 CFR Part 2   | Frequency allocations and radio treaty matters; general rules and regulations                     |
| 3   | ANSI C63.26-2015    | American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services |
| 4   | ANSI/TIA-603-E-2016 | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards               |
| 5   | KDB 888861 D01      | 888861 D01 Part 95 GMRS FRS v01                                                                   |

## 2.5 CALCULATION OF EMISSION INDICATORS

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

### For FM Mode (ChannelSpacing: 12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

### For FM Mode (Channel Spacing: 25kHz)

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

## 2.6 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

## 2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

## 2.8 ANTENNA REQUIREMENT

### Excerpt from §95.1787 of the FCC Rules/Regulations:

The antenna of each GMRS transmitter type must meet the following requirements.

(1) The antenna must be a non-removable integral part of the GMRS transmitter type.

- This GMRS device has a fixed antenna port
- This GMRS equipment is a mobile station or a fixed station, which can be connected to an external antenna

Conclusion: The unit complies with the requirement of §95.1787.

### 3. TEST ENVIRONMENT

#### 3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L5488**

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

##### **A2LA-Lab Cert. No.: 5054.02**

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

##### **FCC-Registration No.: 975832**

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

##### **IC-Registration No.: 24842**

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

### 3.3 ENVIRONMENTAL CONDITIONS

|                                                                                  | NORMAL CONDITIONS | EXTREME CONDITIONS |
|----------------------------------------------------------------------------------|-------------------|--------------------|
| Temperature range (°C)                                                           | 15 - 35           | -30 - 50           |
| Relative humidity range                                                          | 20 % - 75 %       | 20 % - 75 %        |
| Pressure range (kPa)                                                             | 86 - 106          | 86 - 106           |
| Power supply                                                                     | DC 7.4V           | LV 6.29V /HV 8.51V |
| Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer. |                   |                    |

### 3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

| Test Items                              | Measurement Uncertainty |
|-----------------------------------------|-------------------------|
| Frequency stability                     | $\pm 0.5\%$             |
| Transmitter power conducted             | $\pm 0.8\text{dB}$      |
| Transmitter power Radiated              | $\pm 1.3\text{dB}$      |
| Conducted spurious emission 9kHz-40 GHz | $\pm 2.7\text{dB}$      |
| Conducted Emission                      | $\pm 3.2\text{ dB}$     |
| Radiated Emission below 1GHz            | $\pm 3.9\text{ dB}$     |
| Radiated Emission above 1GHz            | $\pm 4.8\text{ dB}$     |
| Occupied Channel Bandwidth              | $\pm 2\%$               |
| FM deviation                            | $\pm 2\%$               |
| Audio level                             | $\pm 0.98\text{dB}$     |
| Low Pass Filter Response                | $\pm 0.65\text{dB}$     |
| Modulation Limiting                     | 0.42 %                  |
| Transient Frequency Behavior            | 6.8 %                   |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

### 3.5 LIST OF EQUIPMENTS USED

| Equipment                      | Manufacturer   | Model       | S/N          | Cal. Date     | Cal. Due      |
|--------------------------------|----------------|-------------|--------------|---------------|---------------|
| TEST RECEIVER                  | R&S            | ESCI        | 10096        | Mar. 28, 2022 | Mar. 27, 2023 |
| EXA Signal Analyzer            | Aglient        | N9020A      | W1312-60196  | Aug. 18, 2021 | Aug. 17, 2022 |
| EXA Signal Analyzer            | Aglient        | N9020A      | W1312-60196  | Aug. 16, 2022 | Aug. 15, 2023 |
| EXA Signal Analyzer            | Aglient        | N9020A      | MY52090123   | Aug. 04, 2022 | Aug. 03, 2023 |
| Horn antenna                   | SCHWARZBECK    | BBHA 9170   | #768         | Oct. 07, 2021 | Oct. 06, 2022 |
| preamplifier                   | ChengYi        | EMC184045SE | 980508       | Sep. 21, 2021 | Sep. 20, 2022 |
| preamplifier                   | ChengYi        | EMC184045SE | 980508       | Sep. 19, 2022 | Sep. 18, 2023 |
| Double-Ridged Waveguide Horn   | ETS LINDGREN   | 3117        | 00034609     | Apr. 23, 2021 | Apr. 22, 2023 |
| Broadband Preamplifier         | SCHWARZBECK    | BBV 9718    | 9718-205     | Jun. 05, 2022 | Jun. 04, 2023 |
| HORN ANTENNA                   | EM             | EM-AH-10180 | /            | Feb. 24, 2022 | Feb. 23, 2023 |
| SIGNAL GENERATOR               | AGILENT        | E4421B      | MY43351603   | Mar. 04, 2022 | Mar. 03, 2023 |
| SIGNAL GENERATOR               | R&S            | SMT03       | A0304261     | Jun. 05, 2022 | Jun. 04, 2023 |
| ANTENNA                        | SCHWARZBECK    | VULB9168    | VULB9168-494 | Jan. 08, 2021 | Jan. 07, 2023 |
| ANTENNA                        | SCHWARZBECK    | VULB9168    | D69250       | Apr. 28, 2021 | Apr. 27, 2023 |
| Active loop antenna (9K-30MHz) | ZHINAN         | ZN30900C    | 18051        | Mar. 12, 2022 | Mar. 11, 2024 |
| Modulation Domain Analyzer     | HP             | 53310A      | 3121A02467   | Jun. 08, 2022 | Jun. 07, 2023 |
| Small environmental tester     | ESPEC          | SH-242      | --           | Aug. 03, 2022 | Aug. 02, 2024 |
| RF Communication Test Set      | HP             | 8920B       | US35010161   | Aug. 03, 2022 | Aug. 02, 2023 |
| Attenuator                     | Weinachel Corp | 58-30-33    | ML030        | Oct. 24, 2021 | Oct. 23, 2022 |
| RF Cable                       | R&S            | 1#          | --           | Each time     | N/A           |
| RF Cable                       | R&S            | 2#          | --           | Each time     | N/A           |
| Fliter-UHF                     | Microwave      | N25155M2    | 498705       | May 07, 2022  | May 06, 2023  |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

## 4. SYSTEM TEST CONFIGURATION

### 4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 4.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

### 4.3 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

### 4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

- ☐ Test Accessories Come From The Laboratory  
☒ Test Accessories Come From The Manufacturer

| Item | Equipment          | Model No.  | Identifier                                         | Note        |
|------|--------------------|------------|----------------------------------------------------|-------------|
| 1    | GMRS Two way radio | GM-30      | FCC ID: 2AJGM-GM30                                 | EUT         |
| 2    | Battery            | BL-13UV    | DC 7.4V 1500mAh                                    | Accessories |
| 3    | Back clip          | N/A        | N/A                                                | Accessories |
| 4    | Adapter            | BF-0501000 | Input: 100-240V, 50/60Hz, 0.3A<br>Output: DC 5V 1A | Accessories |

#### 4.5 SUMMARY OF TEST RESULTS

| Item | FCC Rules               | Description Of Test               | Result |
|------|-------------------------|-----------------------------------|--------|
| 1    | FCC 47 CFR PART 95      | Antenna Equipment                 | Pass   |
| 2    | § 95.1767& 2.1046(a)    | Maximum Transmitter Power         | Pass   |
| 3    | §95.1755& 2.1047(a) (b) | Modulation Limit                  | Pass   |
| 4    | §95.1755& 2.1047(a)     | Audio Frequency Response          | Pass   |
| 4    | §95.1755(e)             | Audio Low Pass Filter Response    | Pass   |
| 5    | §95.1779& 2.1049        | Emission Bandwidth                | Pass   |
| 6    | §95.1779& 2.1049        | Emission Mask                     | Pass   |
| 7    | §95.1765& 2.1055(a) (1) | Frequency Stability               | Pass   |
| 9    | §95.1779& 2.1051        | Spurious Emission on Antenna Port | Pass   |
| 10   | §95.1779& 2.1053        | Spurious Radiated Emission        | Pass   |

**Note:**

- 1) N/A: In this whole report not application.
- 2) The antenna of the EUT is detachable.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## 5. DESCRIPTION OF TEST MODES

The EUT (**GMRS Two way radio**) has been tested under normal operating condition. (GMRS TX) are chosen for testing at each channel separation.

| NO. | TEST MODE DESCRIPTION | CHANNEL SEPARATION |
|-----|-----------------------|--------------------|
| 1   | GMRS TX CHANNEL 4     | 12.5 kHz/25 kHz    |
| 2   | GMRS TX CHANNEL 11    | 12.5 kHz           |
| 3   | GMRS TX CHANNEL 19    | 12.5 kHz/25 kHz    |
| 4   | GMRS TX CHANNEL 27    | 12.5 kHz/25 kHz    |

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. The battery is full-charged during the test.
3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
4. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details

## 6. FREQUENCY STABILITY

### 6.1 PROVISIONS APPLICABLE

Standard Applicable [Part 95.1765] The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

GMR5: The carrier frequency of each GMR5 transmitter transmitting an emission with an occupied bandwidth of 12.5 kHz or less must remain within 2.5 ppm

The carrier frequency of each GMR5 transmitter transmitting an emission with an occupied bandwidth greater than 12.5 kHz must remain within 5 ppm

### 6.2 MEASUREMENT PROCEDURE


#### 6.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 50 °C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10 °C decreased per stage until the lowest temperature -30 °C is measured, record all measured frequencies on each temperature step.

#### 6.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15 °C to 25 °C . Otherwise, an environment chamber set for a temperature of 20 °C shall be used. The EUT shall be powered by DC 7.4V.
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

### 6.3 MEASUREMENT SETUP

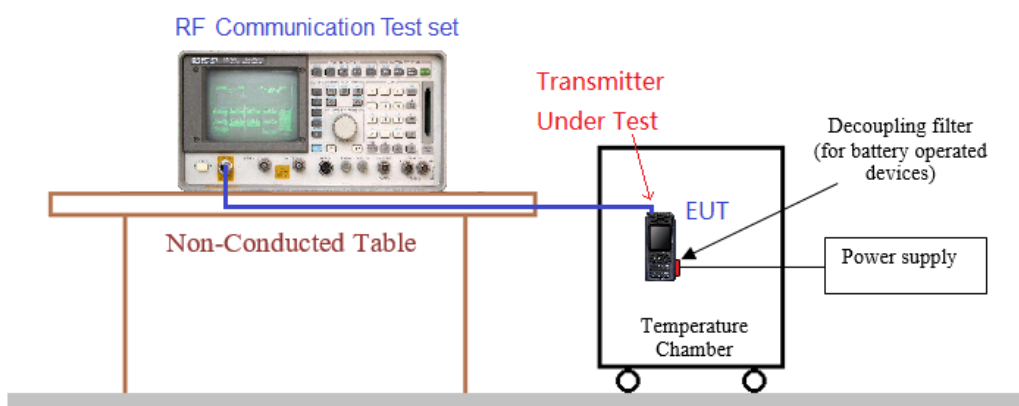

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

#### 6.4 MEASUREMENT RESULTS

| 12.5 kHz Channel Separation, FM modulation, Assigned Frequency For GMRS |           |                       |          |          |          |             |        |
|-------------------------------------------------------------------------|-----------|-----------------------|----------|----------|----------|-------------|--------|
| Test conditions                                                         |           | Frequency error (ppm) |          |          |          | Limit (ppm) | Result |
| Voltage (V)                                                             | Temp (°C) | Test Frequency (MHz)  |          |          |          |             |        |
|                                                                         |           | 462.6375              | 462.6500 | 467.6500 | 467.6375 |             |        |
| 7.40                                                                    | -30       | 0.793                 | 0.653    | 0.781    | 0.826    | 2.5         | Pass   |
|                                                                         | -20       | 0.850                 | 0.903    | 0.926    | 0.516    |             |        |
|                                                                         | -10       | 0.813                 | 0.705    | 0.876    | 0.326    |             |        |
|                                                                         | 0         | 1.032                 | 0.670    | 1.051    | 0.728    |             |        |
|                                                                         | 10        | <b>1.098</b>          | 0.983    | 1.035    | 0.903    |             |        |
|                                                                         | 20        | 0.973                 | 0.786    | 0.514    | 0.989    |             |        |
|                                                                         | 30        | 1.054                 | 0.763    | 0.765    | 0.495    |             |        |
|                                                                         | 40        | 1.078                 | 0.967    | 0.523    | 0.445    |             |        |
|                                                                         | 50        | 1.019                 | 0.643    | 0.598    | 0.304    |             |        |
| 8.51                                                                    | 20        | 0.601                 | 0.738    | 0.548    | 0.539    | 2.5         | Pass   |
| 6.29                                                                    | 20        | 0.710                 | 1.069    | 0.728    | 0.394    |             |        |

| 25 kHz Channel Separation, FM modulation, Assigned Frequency For GMRS |           |                       |          |          |             |        |
|-----------------------------------------------------------------------|-----------|-----------------------|----------|----------|-------------|--------|
| Test conditions                                                       |           | Frequency error (ppm) |          |          | Limit (ppm) | Result |
| Voltage (V)                                                           | Temp (°C) | Test Frequency (MHz)  |          |          |             |        |
|                                                                       |           | 462.6375              | 462.6500 | 467.6500 |             |        |
| 7.40                                                                  | -30       | 0.894                 | 0.775    | 0.826    | 5           | Pass   |
|                                                                       | -20       | 0.991                 | 0.893    | 0.746    |             |        |
|                                                                       | -10       | 0.989                 | 0.954    | 0.823    |             |        |
|                                                                       | 0         | 0.691                 | 0.740    | 0.739    |             |        |
|                                                                       | 10        | 1.094                 | 1.097    | 0.568    |             |        |
|                                                                       | 20        | 1.097                 | 0.714    | 0.934    |             |        |
|                                                                       | 30        | 0.933                 | 0.712    | 0.532    |             |        |
|                                                                       | 40        | 0.800                 | 0.891    | 0.976    |             |        |
|                                                                       | 50        | 0.802                 | 0.823    | 0.922    |             |        |
| 8.51                                                                  | 20        | 0.894                 | 0.775    | 0.826    |             |        |
| 6.29                                                                  | 20        | 0.991                 | 0.893    | 0.746    |             |        |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 7. EMISSION BANDWIDTH

### 7.1 PROVISIONS APPLICABLE

FCC Part 95.1773: GMRS: Main channels. The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz main channels, or any of the 467 MHz main channels.

Interstitial channels. The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz interstitial channels, and is 12.5 kHz for GMRS transmitters operating on any of the 467 MHz interstitial channels.

Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.

### 7.2 MEASUREMENT PROCEDURE

1.The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.

Rated system deviation is 2.5 kHz for 12.5kHz or 25kHz channel spacing).

2.Spectrum set as follow:


Centre frequency = fundamental frequency, span=50kHz for 12.5kHz or 25kHz channel spacing, RBW=100Hz or 300Hz, VBW=300Hz or 1KHz, Sweep = auto,

Detector function = peak, Trace = max hold

3.Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.

4.Measure and record the results in the test report.

### 7.3 MEASUREMENT SETUP

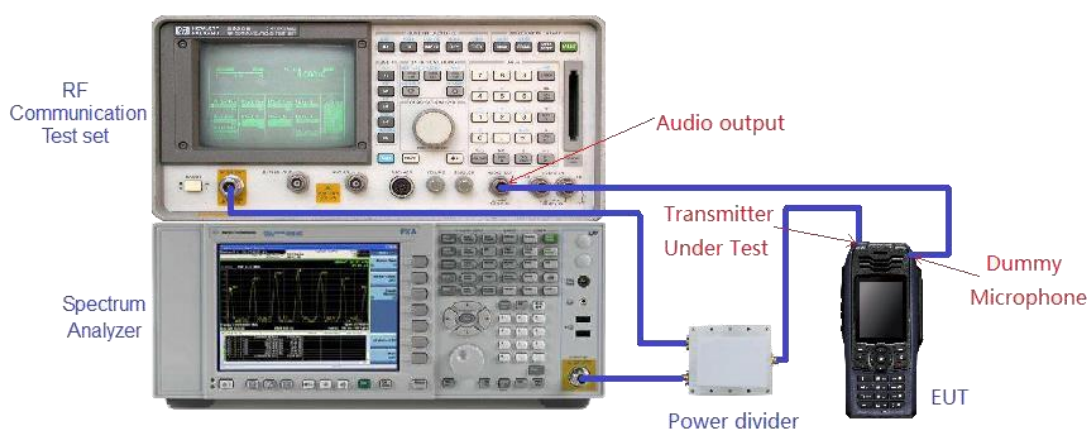

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/


## 7.4 MEASUREMENT RESULTS

| Emission Bandwidth Measurement Result-GMRS |                             |                    |          |        |
|--------------------------------------------|-----------------------------|--------------------|----------|--------|
| Operating Frequency                        | 12.5 kHz Channel Separation |                    |          |        |
|                                            | Occupied Bandwidth          | Emission Bandwidth | Limits   | Result |
| 462.6375 MHz                               | 9.985 kHz                   | 10.19 kHz          | 20.0 kHz | Pass   |
| 462.6500 MHz                               | 9.984 kHz                   | 10.19 kHz          | 20.0 kHz | Pass   |
| 467.6500 MHz                               | 9.986 kHz                   | 10.18 kHz          | 20.0 kHz | Pass   |
| 467.6375 MHz                               | 9.959 kHz                   | 10.50 kHz          | 12.5 kHz | Pass   |


| Emission Bandwidth Measurement Result-GMRS |                           |                    |          |        |
|--------------------------------------------|---------------------------|--------------------|----------|--------|
| Operating Frequency                        | 25 kHz Channel Separation |                    |          |        |
|                                            | Occupied Bandwidth        | Emission Bandwidth | Limits   | Result |
| 462.6375 MHz                               | 15.009 kHz                | 15.61 kHz          | 20.0 kHz | Pass   |
| 462.6500 MHz                               | 15.011 kHz                | 15.60 kHz          | 20.0 kHz | Pass   |
| 467.6500 MHz                               | 15.011 kHz                | 15.62 kHz          | 20.0 kHz | Pass   |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test plot as follows:

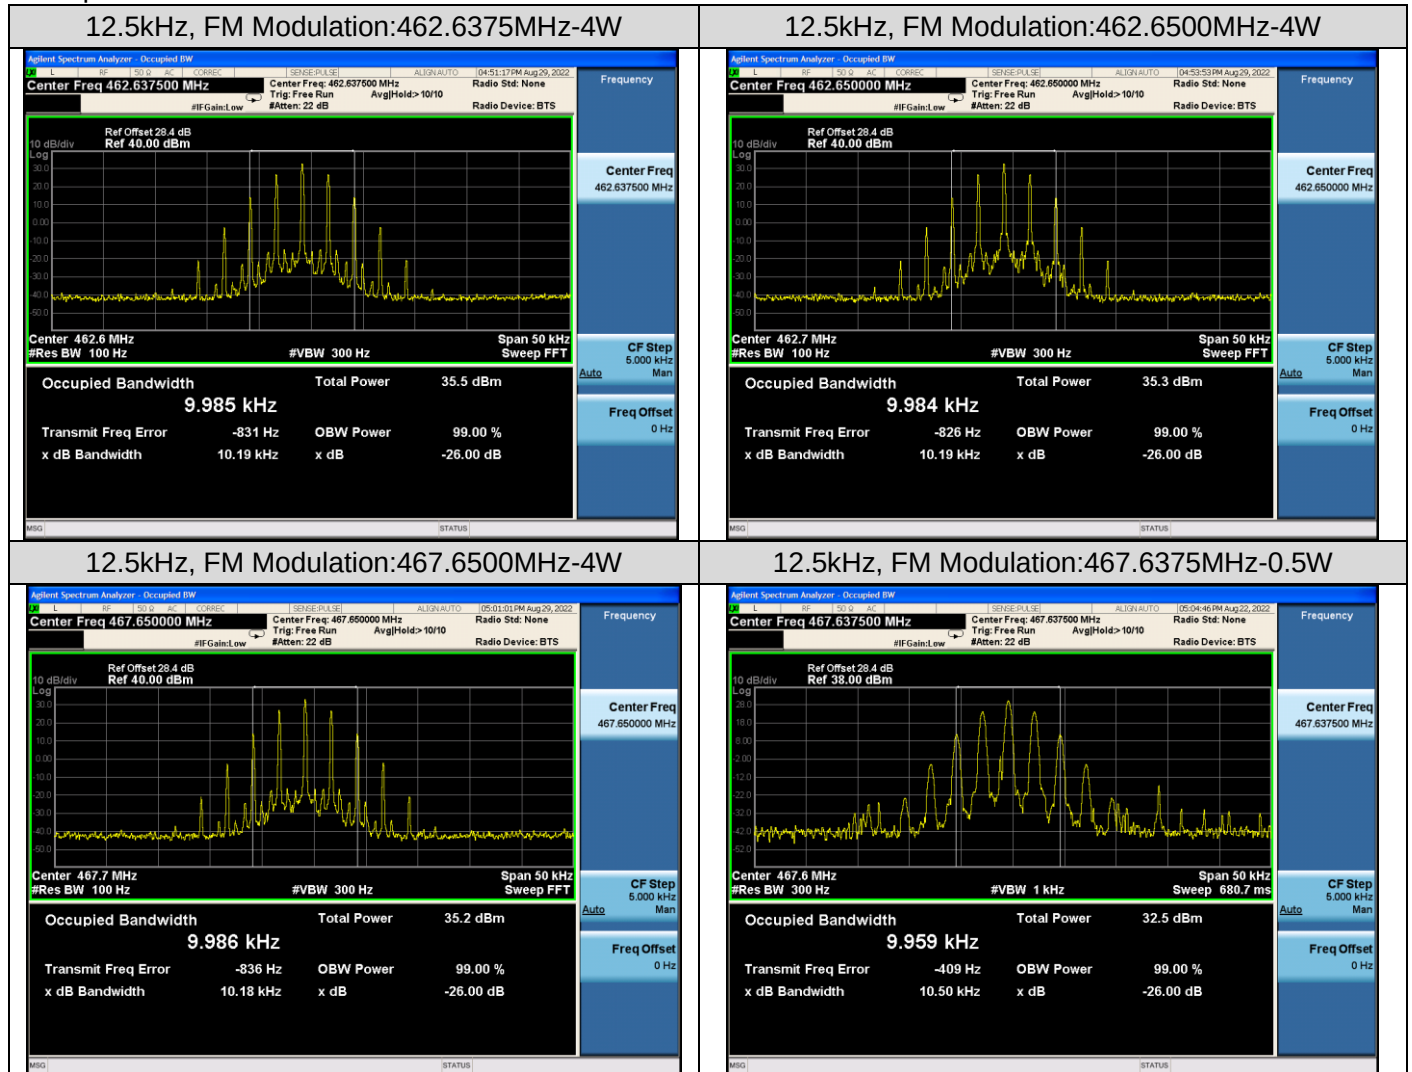

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

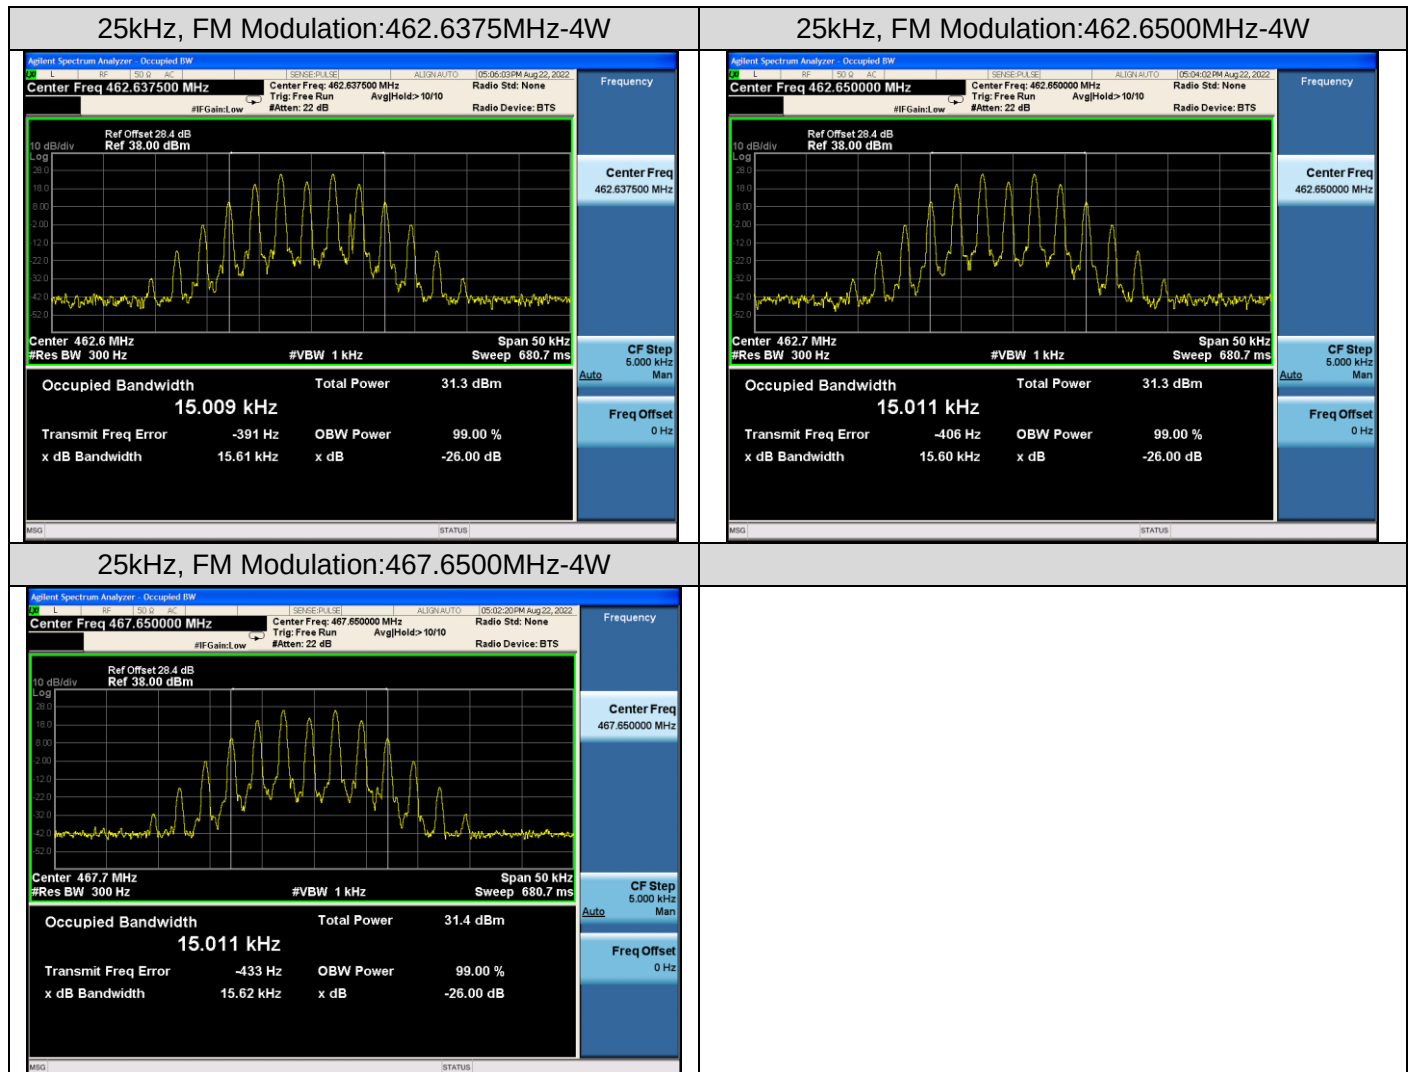

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 8. SPURIOUS RADIATED EMISSION

### 8.1 PROVISIONS APPLICABLE

Standard Applicable [FCC Part 95.1779] According to FCC section 95.1779, the unwanted emission should be attenuated below TP by at least  $43 + 10 \log$  (Transmit Power) dB

### 8.2 MEASUREMENT PROCEDURE

Each GMRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section.

- a) Emission masks. Emission masks applicable to transmitting equipment in the GMRS are defined by the requirements in the following table. The numbers in the attenuation requirements column refer to rule paragraph numbers under paragraph (b) of this section.

| Emission types filter                               | Attenuation requirements |
|-----------------------------------------------------|--------------------------|
| A1D, A3E, F1D, G1D, F2D, F3E, G3E with audio filter | (1), (2), (7)            |
| A1D, A3E, F1D, G1D, F3E, G3E without audio filter   | (3), (4), (7)            |
| H1D, J1D, R1D, H3E, J3E, R2E                        | (5), (6), (7)            |

- 1) Filtering noted for GMRS transmitters refers to the requirement in §95.1775(e).
- 2) Unwanted emission power may be measured as either mean power or peak envelope power, provided that the transmitter output power is measured the same way.
- b) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) by at least:
  - 1) 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
  - 2) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
  - 3)  $83 \log (f_d \div 5)$  dB on any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5 kHz up to and including 10 kHz.
  - 4)  $116 \log (f_d \div 6.1)$  dB or  $50 + 10 \log (P)$  dB, whichever is the lesser attenuation, on any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz), of more than 10 kHz up to and including 250% of the authorized bandwidth.
  - 5) 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 150% of the authorized bandwidth.
  - 6) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 150% up to and including 250% of the authorized bandwidth.
  - 7)  $43 + 10 \log (P)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>



**DETAILED OVERVIEW OF THE TEST METHOD IS AS FOLLOWS:**

- 1) EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- 6) The measurement results are obtained as described below:  $\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} - \text{Ga}$  The measurement results are amend as described below:  $\text{Power(EIRP)} = \text{PMea} - \text{Pcl} - \text{Ga}$
- 7) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 8) ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .
- 9) Test the EUT in the lowest channel, the middle channel the Highest channel



**8.3 MEASUREMENT SETUP**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### Radiated Emissions 30MHz to 1GHz Test setup

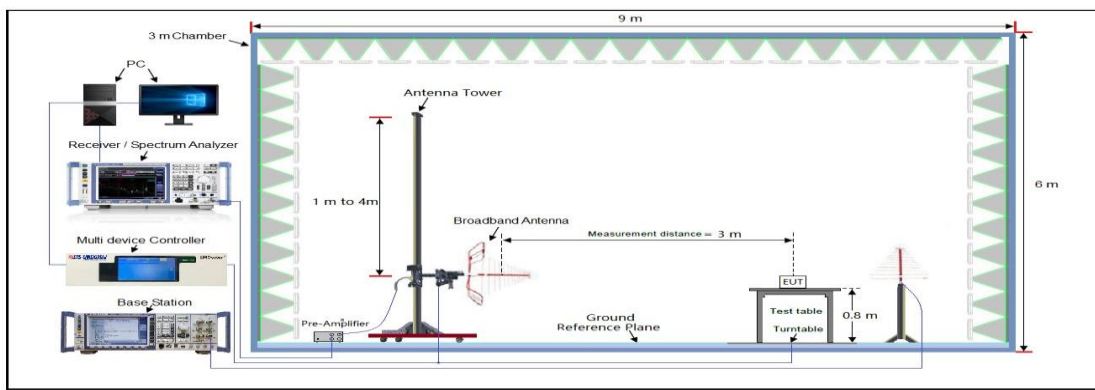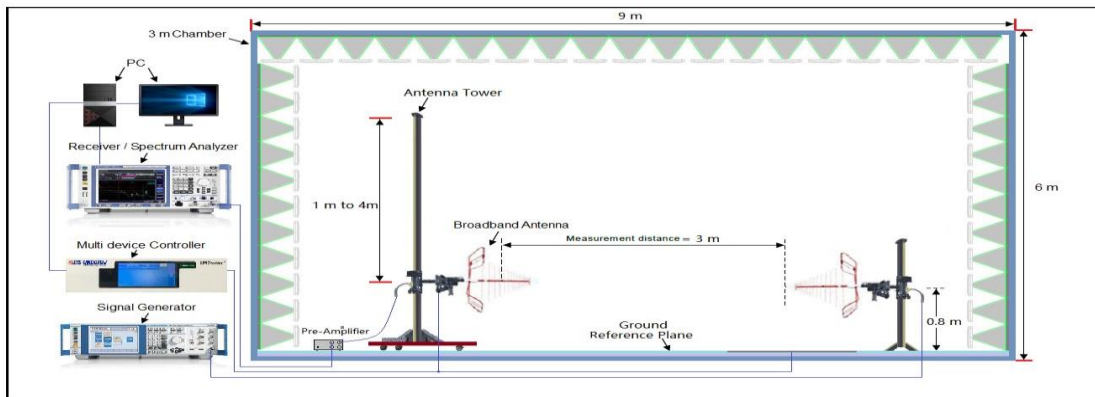

### Radiated Emissions Above 1GHz Test setup

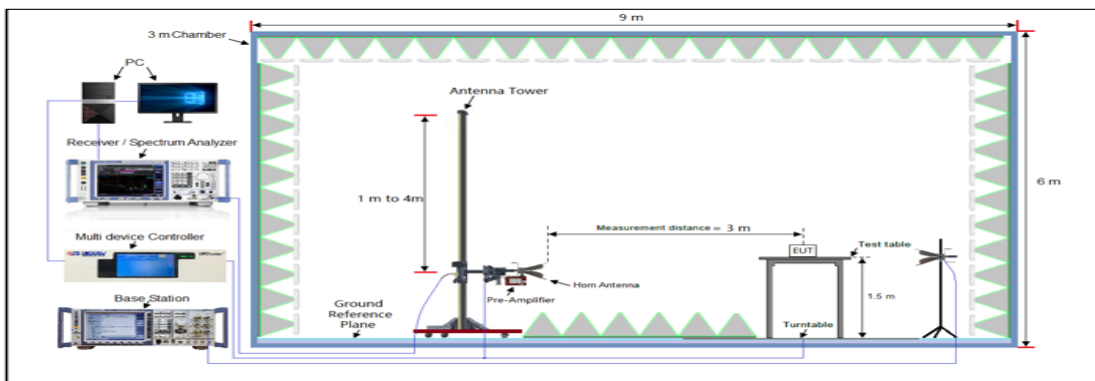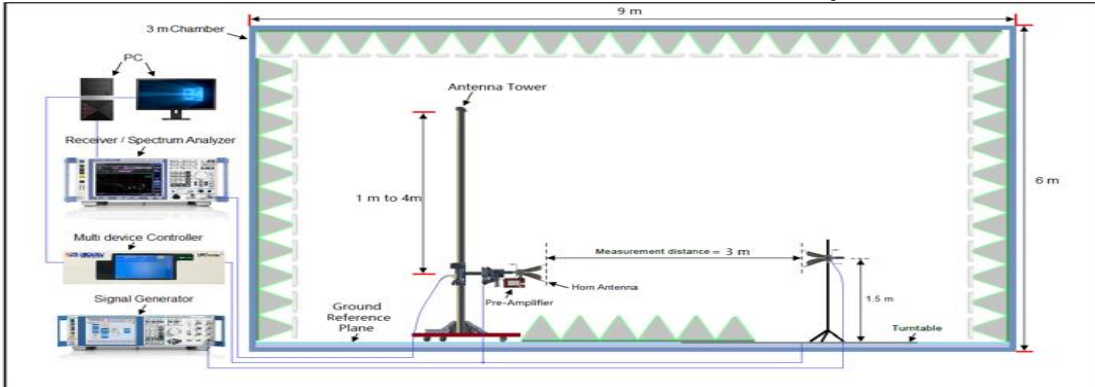

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>

#### 8.4 MEASUREMENT RESULTS

| Preliminary calculation                                   | Final Result                                            |
|-----------------------------------------------------------|---------------------------------------------------------|
| At least $43+10 \log (P) = 43+10 \log (4) = 49.02$ (dB)   | Limit=P- Preliminary calculation= $36.02-49.02=-13$ dBm |
| At least $43+10 \log (P) = 43+10 \log (0.5) = 39.99$ (dB) | Limit=P- Preliminary calculation= $26.99-39.99=-13$ dBm |

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
2. Factor=Antenna Factor+ Cable loss -Pre-amplifier. (Above 1 GHz)
3. Margin=Limit- Level


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>

|            |                |           |            |
|------------|----------------|-----------|------------|
| Test Mode: | TX-CH4-12.5KHz | Polarity: | Horizontal |
|------------|----------------|-----------|------------|

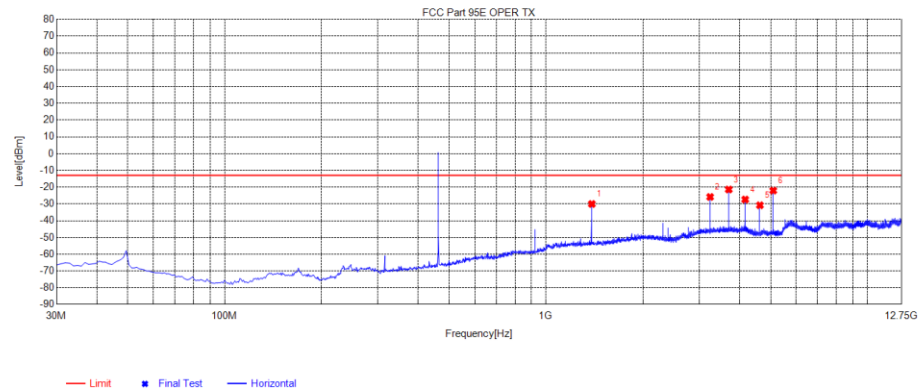

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity   |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|------------|
| 1   | 1387.7888   | -26.59        | -30.04      | -13.00      | 17.04       | -3.45       | 164       | Horizontal |
| 2   | 3238.5989   | -29.56        | -25.85      | -13.00      | 12.85       | 3.71        | 324       | Horizontal |
| 3   | 3701.5952   | -25.81        | -21.40      | -13.00      | 8.40        | 4.41        | 324       | Horizontal |
| 4   | 4163.4163   | -31.70        | -27.37      | -13.00      | 14.37       | 4.33        | 324       | Horizontal |
| 5   | 4626.4126   | -34.36        | -30.81      | -13.00      | 17.81       | 3.55        | 24        | Horizontal |
| 6   | 5089.4089   | -26.71        | -22.04      | -13.00      | 9.04        | 4.67        | 6         | Horizontal |

|            |                |           |          |
|------------|----------------|-----------|----------|
| Test Mode: | TX-CH4-12.5KHz | Polarity: | Vertical |
|------------|----------------|-----------|----------|

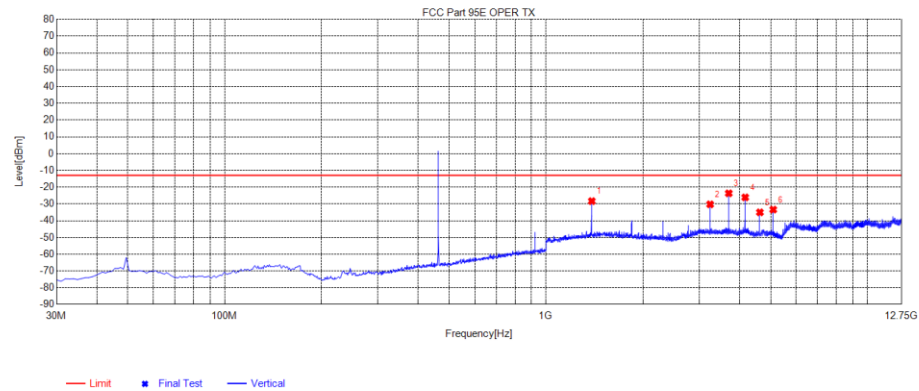

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|----------|
| 1   | 1387.7888   | -29.76        | -28.35      | -13.00      | 15.35       | 1.41        | 92        | Vertical |
| 2   | 3238.5989   | -33.40        | -30.26      | -13.00      | 17.26       | 3.14        | 360       | Vertical |
| 3   | 3701.5952   | -26.83        | -23.68      | -13.00      | 10.68       | 3.15        | 301       | Vertical |
| 4   | 4163.4163   | -29.32        | -26.11      | -13.00      | 13.11       | 3.21        | 145       | Vertical |
| 5   | 4626.4126   | -38.30        | -35.03      | -13.00      | 22.03       | 3.27        | 329       | Vertical |
| 6   | 5089.4089   | -37.69        | -33.40      | -13.00      | 20.40       | 4.29        | 74        | Vertical |


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

|            |                 |           |            |
|------------|-----------------|-----------|------------|
| Test Mode: | TX-CH11-12.5KHz | Polarity: | Horizontal |
|------------|-----------------|-----------|------------|

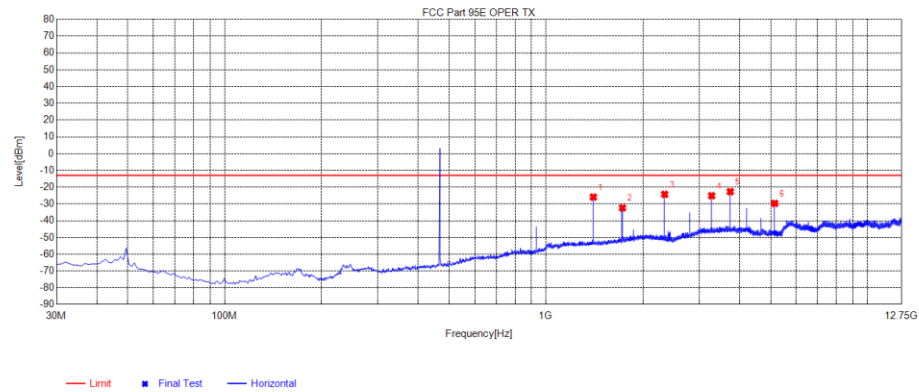

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity   |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|------------|
| 1   | 1403.0653   | -22.51        | -25.92      | -13.00      | 12.92       | -3.41       | 166       | Horizontal |
| 2   | 1728.5729   | -30.89        | -32.39      | -13.00      | 19.39       | -1.50       | 0         | Horizontal |
| 3   | 2338.4588   | -23.49        | -24.29      | -13.00      | 11.29       | -0.80       | 82        | Horizontal |
| 4   | 3273.8524   | -28.90        | -25.12      | -13.00      | 12.12       | 3.78        | 44        | Horizontal |
| 5   | 3741.5492   | -27.15        | -22.69      | -13.00      | 9.69        | 4.46        | 313       | Horizontal |
| 6   | 5144.6395   | -34.93        | -29.69      | -13.00      | 16.69       | 5.24        | 110       | Horizontal |

|            |                 |           |          |
|------------|-----------------|-----------|----------|
| Test Mode: | TX-CH11-12.5KHz | Polarity: | Vertical |
|------------|-----------------|-----------|----------|

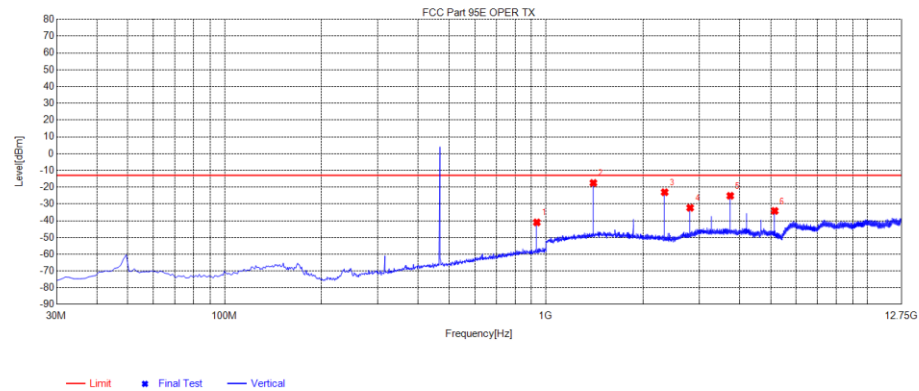

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|----------|
| 1   | 935.98      | -84.71        | -41.03      | -13.00      | 28.03       | 43.68       | 64        | Vertical |
| 2   | 1403.0653   | -19.03        | -17.51      | -13.00      | 4.51        | 1.52        | 38        | Vertical |
| 3   | 2338.4588   | -22.42        | -23.03      | -13.00      | 10.03       | -0.61       | 304       | Vertical |
| 4   | 2806.1556   | -33.88        | -32.34      | -13.00      | 19.34       | 1.54        | 356       | Vertical |
| 5   | 3741.5492   | -28.33        | -25.16      | -13.00      | 12.16       | 3.17        | 339       | Vertical |
| 6   | 5144.6395   | -38.71        | -34.18      | -13.00      | 21.18       | 4.53        | 348       | Vertical |


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

|            |                 |           |            |
|------------|-----------------|-----------|------------|
| Test Mode: | TX-CH19-12.5KHz | Polarity: | Horizontal |
|------------|-----------------|-----------|------------|

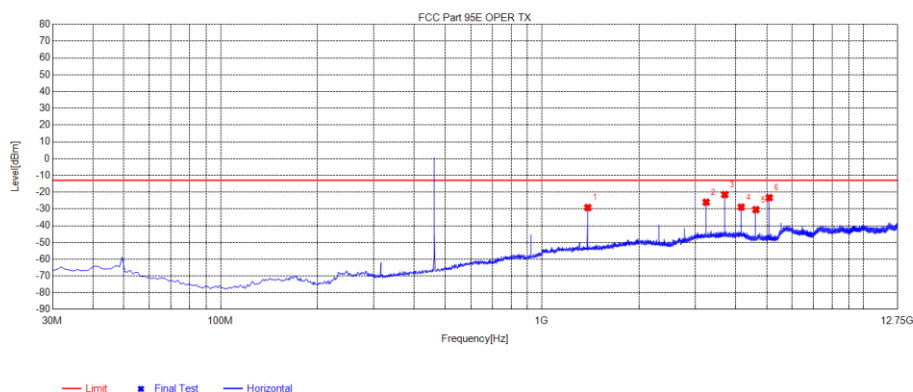

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity   |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|------------|
| 1   | 1387.7888   | -25.76        | -29.21      | -13.00      | 16.21       | -3.45       | 164       | Horizontal |
| 2   | 3238.5989   | -29.72        | -26.01      | -13.00      | 13.01       | 3.71        | 331       | Horizontal |
| 3   | 3701.5952   | -25.85        | -21.44      | -13.00      | 8.44        | 4.41        | 341       | Horizontal |
| 4   | 4164.5915   | -33.25        | -28.92      | -13.00      | 15.92       | 4.33        | 118       | Horizontal |
| 5   | 4626.4126   | -34.01        | -30.46      | -13.00      | 17.46       | 3.55        | 321       | Horizontal |
| 6   | 5089.4089   | -27.95        | -23.28      | -13.00      | 10.28       | 4.67        | 22        | Horizontal |


|            |                 |           |          |
|------------|-----------------|-----------|----------|
| Test Mode: | TX-CH19-12.5KHz | Polarity: | Vertical |
|------------|-----------------|-----------|----------|

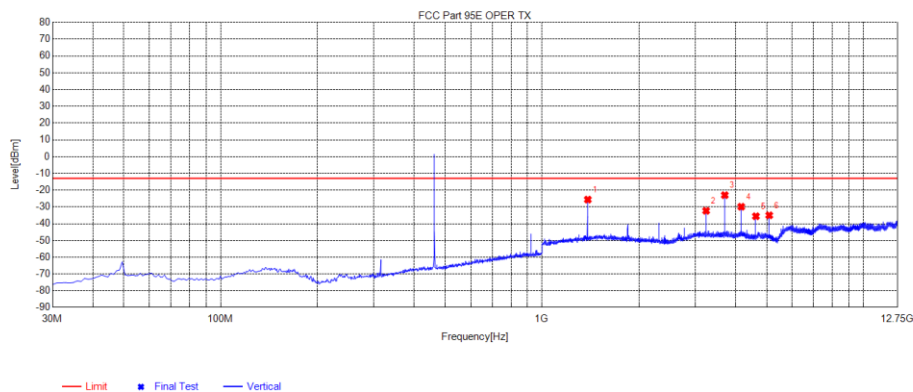

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|----------|
| 1   | 1387.7888   | -27.04        | -25.63      | -13.00      | 12.63       | 1.41        | 54        | Vertical |
| 2   | 3238.5989   | -35.47        | -32.33      | -13.00      | 19.33       | 3.14        | 357       | Vertical |
| 3   | 3701.5952   | -26.14        | -22.99      | -13.00      | 9.99        | 3.15        | 313       | Vertical |
| 4   | 4164.5915   | -33.11        | -29.90      | -13.00      | 16.90       | 3.21        | 150       | Vertical |
| 5   | 4626.4126   | -38.84        | -35.57      | -13.00      | 22.57       | 3.27        | 323       | Vertical |
| 6   | 5089.4089   | -39.30        | -35.01      | -13.00      | 22.01       | 4.29        | 122       | Vertical |


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

|            |                 |           |            |
|------------|-----------------|-----------|------------|
| Test Mode: | TX-CH27-12.5KHz | Polarity: | Horizontal |
|------------|-----------------|-----------|------------|

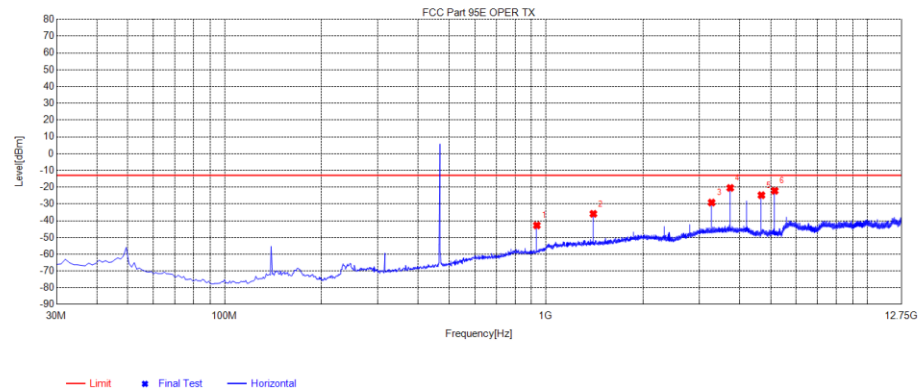

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity   |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|------------|
| 1   | 935.98      | -86.52        | -42.80      | -13.00      | 29.80       | 43.72       | 227       | Horizontal |
| 2   | 1403.0653   | -32.50        | -35.91      | -13.00      | 22.91       | -3.41       | 29        | Horizontal |
| 3   | 3273.8524   | -32.98        | -29.20      | -13.00      | 16.20       | 3.78        | 334       | Horizontal |
| 4   | 3741.5492   | -24.92        | -20.46      | -13.00      | 7.46        | 4.46        | 342       | Horizontal |
| 5   | 4676.9427   | -28.38        | -24.81      | -13.00      | 11.81       | 3.57        | 308       | Horizontal |
| 6   | 5144.6395   | -27.41        | -22.17      | -13.00      | 9.17        | 5.24        | 12        | Horizontal |

|            |                 |           |          |
|------------|-----------------|-----------|----------|
| Test Mode: | TX-CH27-12.5KHz | Polarity: | Vertical |
|------------|-----------------|-----------|----------|

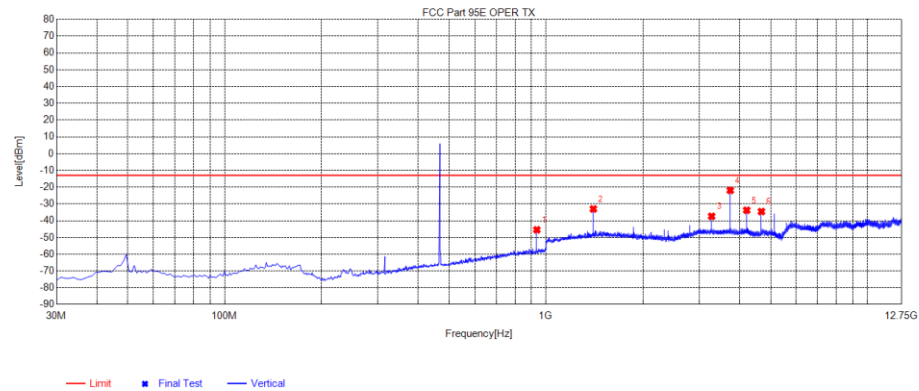

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|----------|
| 1   | 935.98      | -89.12        | -45.44      | -13.00      | 32.44       | 43.68       | 64        | Vertical |
| 2   | 1403.0653   | -34.53        | -33.01      | -13.00      | 20.01       | 1.52        | 9         | Vertical |
| 3   | 3273.8524   | -40.50        | -37.37      | -13.00      | 24.37       | 3.13        | 306       | Vertical |
| 4   | 3741.5492   | -25.08        | -21.91      | -13.00      | 8.91        | 3.17        | 316       | Vertical |
| 5   | 4209.2459   | -36.96        | -33.77      | -13.00      | 20.77       | 3.19        | 26        | Vertical |
| 6   | 4676.9427   | -37.92        | -34.56      | -13.00      | 21.56       | 3.36        | 332       | Vertical |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


## 8.5 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:

-Connect the equipment as illustrated.

-Spectrum set as follow:

1. Centre frequency = fundamental frequency, Span=150kHz for 12.5kHz and 25kHz channel spacing, RBW=300Hz, VBW=1000Hz for 12.5kHz, RBW=300Hz, VBW=1000Hz for 25kHz, Sweep = auto, Detector function = peak, Trace = max hold
2. Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
3. Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation (Rated system deviation is 2.5 kHz for 12.5kHz channel spacing). The input level shall be established at the frequency of maximum response of the audio modulating circuit.
4. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
5. Measure and record the results in the test report.

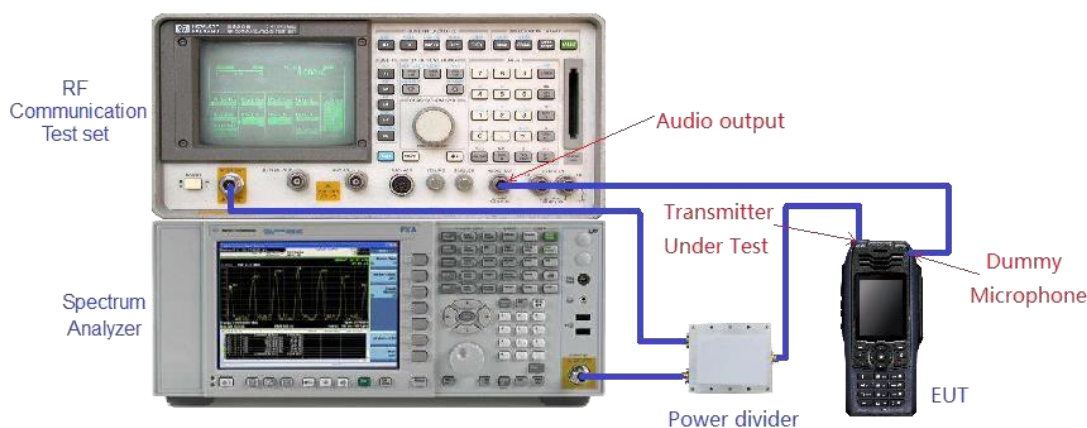


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd


Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>

Test plot as follows:

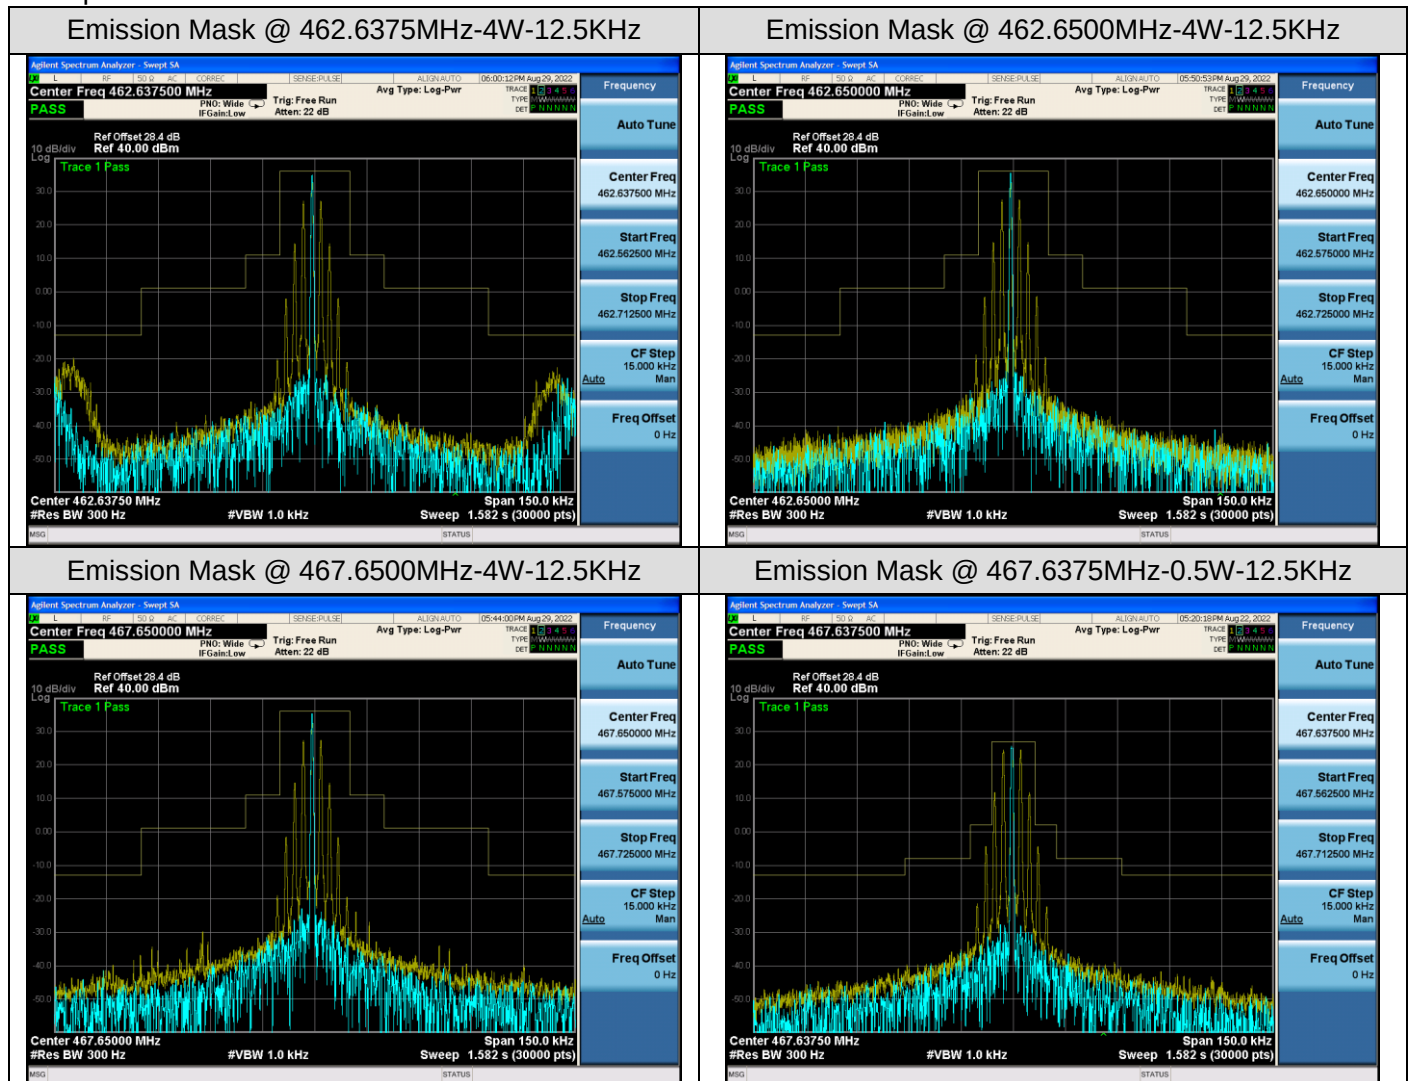

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

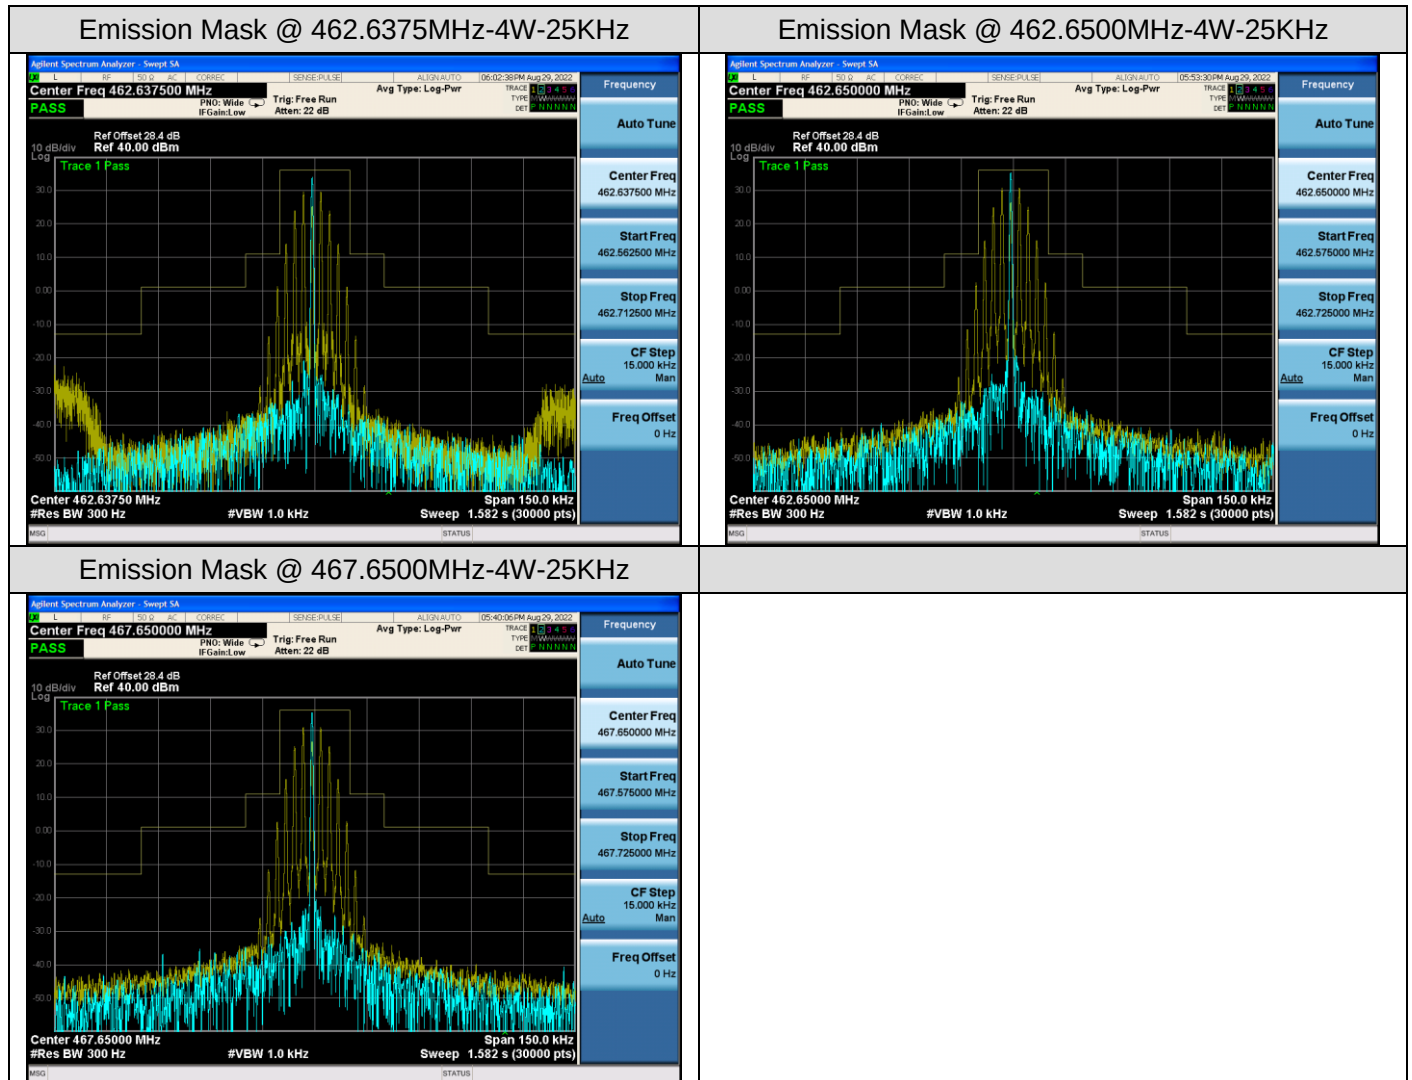

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 9. MODULATION CHARACTERISTICS

### 9.1 PROVISIONS APPLICABLE

According to FCC§2.1047 and §95.1775, for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

Each GMRS transmitter type must be designed to satisfy the modulation requirements in this section. Operation of GMRS stations must also be in compliance with these requirements.

(a) Main channels. The peak frequency deviation for emissions to be transmitted on the main channels must not exceed  $\pm 5$  kHz.

(b) 462 MHz interstitial channels. The peak frequency deviation for emissions to be transmitted on the 462 MHz interstitial channels must not exceed  $\pm 5$  kHz.

(c) 467 MHz interstitial channels. The peak frequency deviation for emissions to be transmitted on the 467 MHz interstitial channels must not exceed  $\pm 2.5$  kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

### 9.2 MEASUREMENT METHOD


#### 9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1kHz using this level as a reference (0dB) and vary the input level from  $-20$  to  $+20$ dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

#### 9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 kHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 kHz and record the frequency deviation.
- (4). Audio Frequency Response =  $20\log_{10}(\text{Deviation of test frequency}/\text{Deviation of 1 kHz reference})$ .

### 9.3 MEASUREMENT SETUP

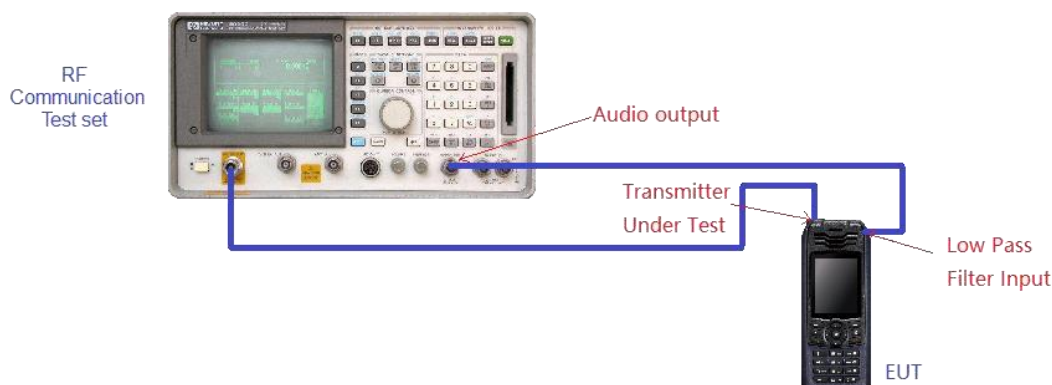

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd


Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## 9.4 MEASUREMENT RESULTS

### (A). MODULATION LIMIT:

| 12.5kHz, FM modulation, Assigned Frequency:462.6500MHz-4W |                                      |                                       |                                       |                                       |
|-----------------------------------------------------------|--------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Modulation Level (dB)                                     | Peak Freq. Deviation At 300 Hz (kHz) | Peak Freq. Deviation At 1000 Hz (kHz) | Peak Freq. Deviation At 1500 Hz (kHz) | Peak Freq. Deviation At 3000 Hz (kHz) |
| -20                                                       | 0.17                                 | 0.35                                  | 0.47                                  | 0.63                                  |
| -15                                                       | 0.34                                 | 0.42                                  | 0.58                                  | 0.85                                  |
| -10                                                       | 0.42                                 | 0.65                                  | 0.83                                  | 0.94                                  |
| -5                                                        | 0.58                                 | 0.77                                  | 0.91                                  | 1.15                                  |
| 0                                                         | 0.71                                 | 0.93                                  | 1.13                                  | 1.23                                  |
| +5                                                        | 0.83                                 | 1.05                                  | 1.19                                  | 1.29                                  |
| +10                                                       | 0.93                                 | 1.09                                  | 1.22                                  | 1.33                                  |
| +15                                                       | 1.12                                 | 1.19                                  | 1.32                                  | 1.38                                  |
| +20                                                       | 1.09                                 | 1.14                                  | 1.24                                  | 1.35                                  |

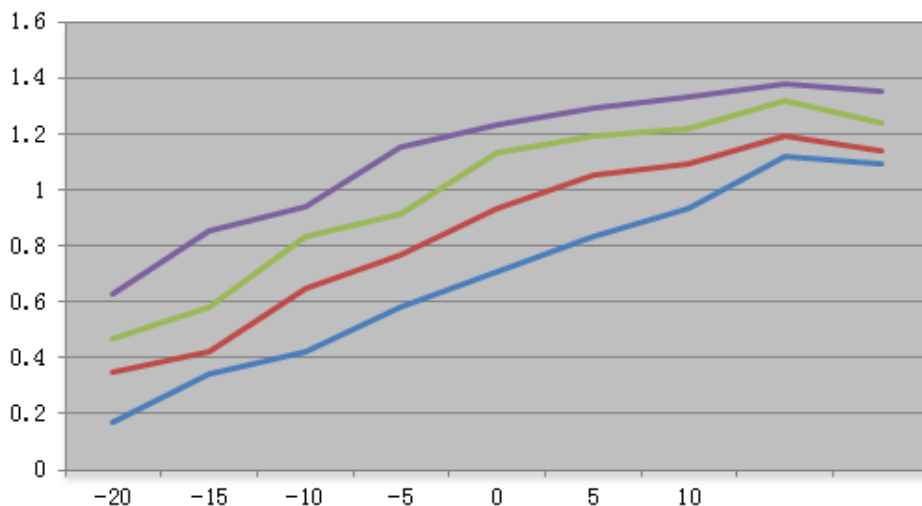

Note: All the modes had been tested, but only the worst data recorded in the report


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

| 25kHz, FM modulation, Assigned Frequency:462.6500MHz-4W |                                      |                                       |                                       |                                       |
|---------------------------------------------------------|--------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Modulation Level (dB)                                   | Peak Freq. Deviation At 300 Hz (kHz) | Peak Freq. Deviation At 1000 Hz (kHz) | Peak Freq. Deviation At 2500 Hz (kHz) | Peak Freq. Deviation At 3000 Hz (kHz) |
| -20                                                     | 0.21                                 | 0.45                                  | 0.62                                  | 0.86                                  |
| -15                                                     | 0.45                                 | 0.69                                  | 0.89                                  | 1.25                                  |
| -10                                                     | 0.62                                 | 0.88                                  | 1.13                                  | 1.48                                  |
| -5                                                      | 0.77                                 | 1.09                                  | 1.28                                  | 1.53                                  |
| 0                                                       | 0.83                                 | 1.13                                  | 1.35                                  | 1.66                                  |
| +5                                                      | 1.05                                 | 1.28                                  | 1.48                                  | 1.71                                  |
| +10                                                     | 1.16                                 | 1.34                                  | 1.69                                  | 1.8                                   |
| +15                                                     | 1.25                                 | 1.47                                  | 1.72                                  | 1.86                                  |
| +20                                                     | 1.19                                 | 1.45                                  | 1.65                                  | 1.82                                  |

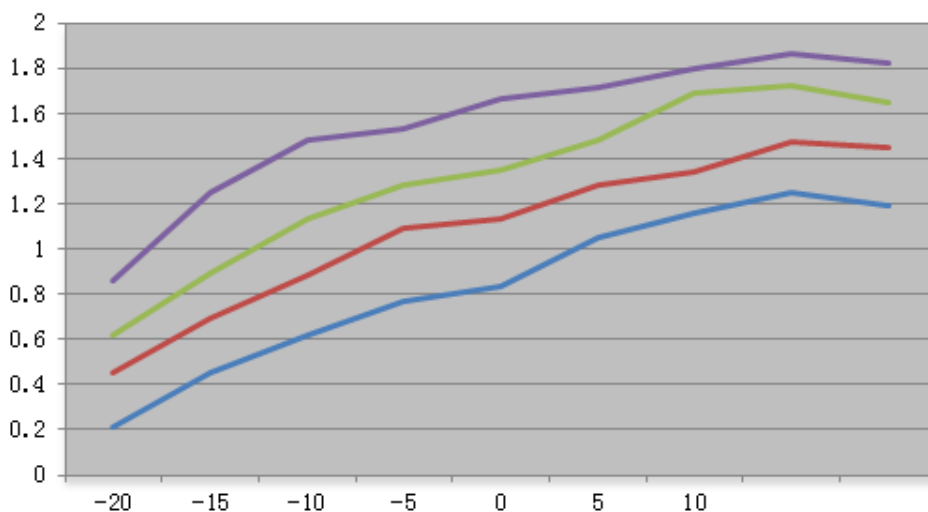


Note: All the modes had been tested, but only the worst data recorded in the report

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

### (B). AUDIO FREQUENCY RESPONSE:


| 12.5kHz, Analog modulation, Assigned Frequency:462.6500MHz-4W |                 |                              |
|---------------------------------------------------------------|-----------------|------------------------------|
| Frequency (Hz)                                                | Deviation (kHz) | Audio Frequency Response(dB) |
| 100                                                           | --              | --                           |
| 200                                                           | --              | --                           |
| 300                                                           | 0.15            | -14.21                       |
| 400                                                           | 0.26            | -9.43                        |
| 500                                                           | 0.31            | -7.90                        |
| 600                                                           | 0.42            | -5.26                        |
| 700                                                           | 0.46            | -4.47                        |
| 800                                                           | 0.53            | -3.24                        |
| 900                                                           | 0.66            | -1.34                        |
| 1000                                                          | <b>0.77</b>     | 0.00                         |
| 1200                                                          | 0.82            | 0.55                         |
| 1400                                                          | 0.93            | 1.64                         |
| 1600                                                          | 1.03            | 2.53                         |
| 1800                                                          | 1.11            | 3.18                         |
| 2000                                                          | 1.25            | 4.21                         |
| 2400                                                          | 1.46            | 5.56                         |
| 2500                                                          | 1.58            | 6.24                         |
| 2800                                                          | 1.69            | 6.83                         |
| 3000                                                          | 1.82            | 7.47                         |

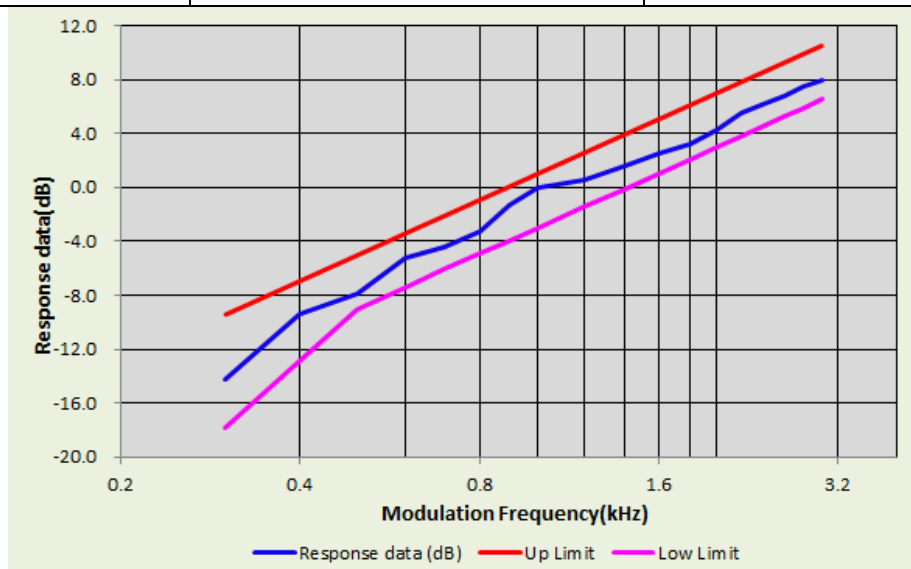

Note: All the modes had been tested, but only the worst data recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

| 25kHz, Analog modulation, Assigned Frequency:462.6500MHz-4W |                 |                              |
|-------------------------------------------------------------|-----------------|------------------------------|
| Frequency (Hz)                                              | Deviation (kHz) | Audio Frequency Response(dB) |
| 100                                                         | --              | --                           |
| 200                                                         | --              | --                           |
| 300                                                         | 0.19            | -12.70                       |
| 400                                                         | 0.27            | -9.65                        |
| 500                                                         | 0.36            | -7.15                        |
| 600                                                         | 0.46            | -5.02                        |
| 700                                                         | 0.49            | -4.47                        |
| 800                                                         | 0.55            | -3.47                        |
| 900                                                         | 0.69            | -1.50                        |
| 1000                                                        | 0.82            | 0.00                         |
| 1200                                                        | 0.89            | 0.71                         |
| 1400                                                        | 0.94            | 1.19                         |
| 1600                                                        | 1.15            | 2.94                         |
| 1800                                                        | 1.26            | 3.73                         |
| 2000                                                        | 1.34            | 4.27                         |
| 2400                                                        | 1.46            | 5.01                         |
| 2500                                                        | 1.59            | 5.75                         |
| 2800                                                        | 1.75            | 6.58                         |
| 3000                                                        | 1.89            | 7.25                         |

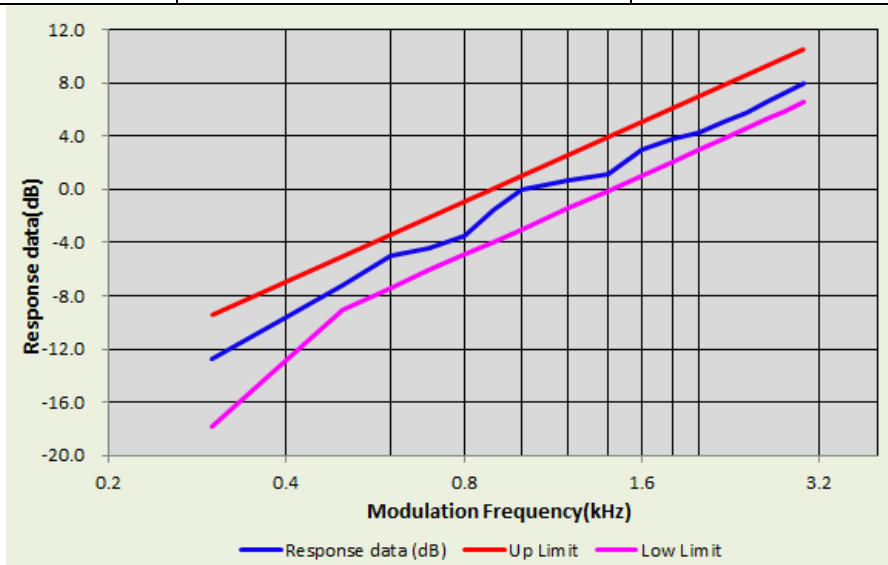

Note: All the modes had been tested, but only the worst data recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## 10. MAXIMUM TRANSMITTER POWER

### 10.1 PROVISIONS APPLICABLE

FCC Part 95.1767 For GMRS, the maximum permissible transmitter output power effective radiated power (e.r.p.) as follows.

This section contains transmitting power limits for GMRS stations. The maximum transmitting power depends on which channels are being used and the type of station.

462/467 MHz main channels. The limits in this paragraph apply to stations transmitting on any of the 462 MHz main channels or any of the 467 MHz main channels. Each GMRS transmitter type must be capable of operating within the allowable power range. GMRS licensees are responsible for ensuring that their GMRS stations operate in compliance with these limits.

The transmitter output power of mobile, repeater and base stations must not exceed 50 Watts.

The transmitter output power of fixed stations must not exceed 15 Watts.

462 MHz interstitial channels. The effective radiated power (ERP) of mobile, hand-held portable and base stations transmitting on the 462 MHz interstitial channels must not exceed 5 Watts.

(467 MHz interstitial channels. The effective radiated power (ERP) of hand-held portable units transmitting on the 467 MHz interstitial channels must not exceed 0.5 Watt. Each GMRS transmitter type capable of transmitting on these channels must be designed such that the ERP does not exceed 0.5 Watt.

### 10.2 MEASUREMENT METHOD

- 10) EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 11) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 12) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 13) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 14) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- 15) The measurement results are obtained as described below:  $\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} - \text{Ga}$  The measurement results are amend as described below:  $\text{Power(EIRP)} = \text{PMea} - \text{Pcl} - \text{Ga}$
- 16) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 17) ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .
- 18) Test the EUT in the lowest channel, the middle channel the Highest channel

### 10.3 MEASUREMENT SETUP



☒ Conducted Output Power:

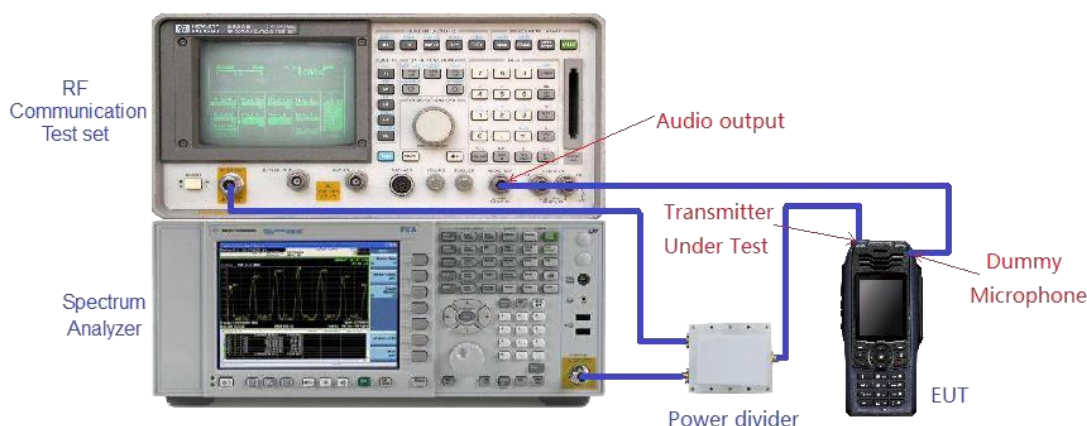



☒ Effective Radiated Power:

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### Radiated Below 1GHz

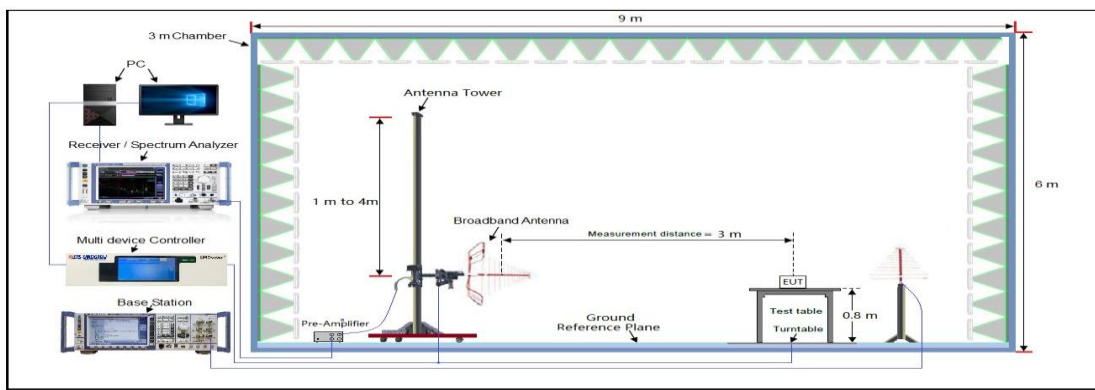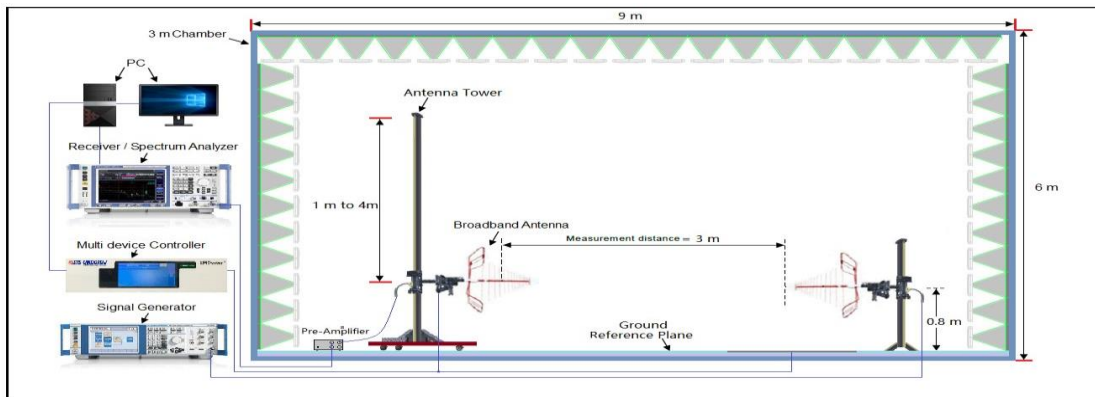

### Radiated Above 1 GHz

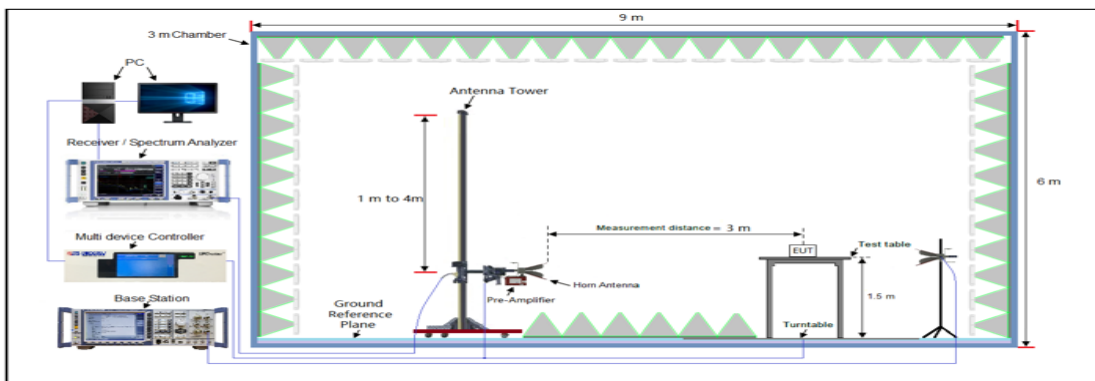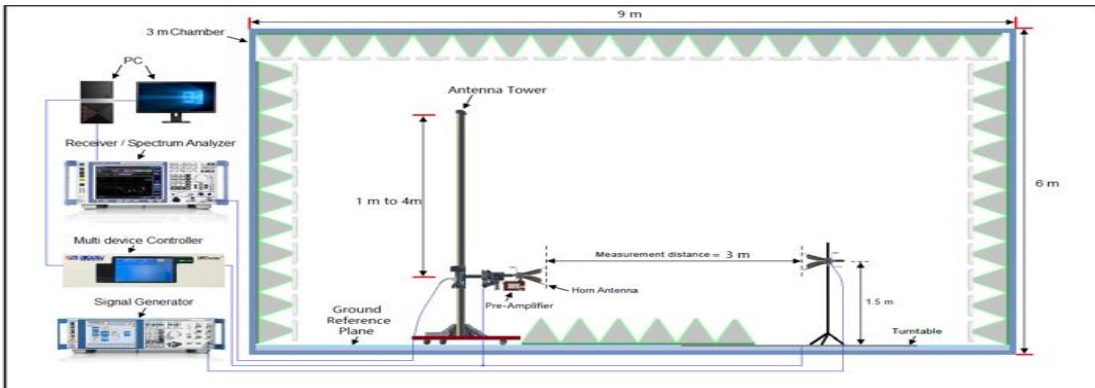

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## 10.4 MEASUREMENT RESULTS

### ERP RESULT:

| Frequency                        | Reading Level | Antenna      | S.G.  | Cable Loss | Ant.Gain | Emission Level | Emission Level | Limit | Margin |
|----------------------------------|---------------|--------------|-------|------------|----------|----------------|----------------|-------|--------|
| (MHz)                            | (dBuV/m)      | Polarization | (dBm) | (dB)       | (dBi)    | (dBm)          | (W)            | (W)   | (W)    |
| <b>ChannelSeparation:12.5KHz</b> |               |              |       |            |          |                |                |       |        |
| 462.6375                         | 104.88        | V            | 30.70 | 0.38       | 6.6      | 35.87          | 3.86           | 5     | 1.14   |
| 462.6375                         | 104.83        | H            | 30.65 | 0.38       | 6.6      | 35.82          | 3.82           | 5     | 1.18   |
| 462.6500                         | 104.27        | V            | 30.68 | 0.38       | 6.6      | 35.26          | 3.36           | 50    | 46.64  |
| 462.6500                         | 104.20        | H            | 30.62 | 0.38       | 6.6      | 35.19          | 3.30           | 50    | 46.70  |
| 467.6500                         | 104.52        | V            | 30.65 | 0.38       | 6.6      | 35.51          | 3.56           | 50    | 46.44  |
| 467.6500                         | 104.43        | H            | 30.61 | 0.38       | 6.6      | 35.42          | 3.48           | 50    | 46.52  |
| 467.6375                         | 95.81         | V            | 20.72 | 0.38       | 6.6      | 26.80          | 0.48           | 0.5   | 0.02   |
| 467.6375                         | 95.75         | H            | 20.59 | 0.38       | 6.6      | 26.74          | 0.47           | 0.5   | 0.03   |
| <b>ChannelSeparation:25KHz</b>   |               |              |       |            |          |                |                |       |        |
| 462.6375                         | 104.21        | V            | 25.91 | 0.38       | 6.6      | 35.20          | 3.31           | 5     | 1.69   |
| 462.6375                         | 104.12        | H            | 25.89 | 0.38       | 6.6      | 35.11          | 3.24           | 5     | 1.76   |
| 462.6500                         | 104.50        | V            | 25.87 | 0.38       | 6.6      | 35.49          | 3.54           | 50    | 46.46  |
| 462.6500                         | 104.46        | H            | 25.80 | 0.38       | 6.6      | 35.45          | 3.51           | 50    | 46.49  |
| 467.6500                         | 104.72        | V            | 26.09 | 0.38       | 6.6      | 35.71          | 3.72           | 50    | 46.28  |
| 467.6500                         | 104.64        | H            | 26.02 | 0.38       | 6.6      | 35.63          | 3.66           | 50    | 46.34  |

**NOTE:1.** Calculation Formula: Emission Level(dBm) = S.G. (dBm)- Cable Loss(dB)+ Ant.Gain(dBi)  
The Ant. Gain including the correct factor 2.15  
Margin (dB) = Limit(dBm)- Emission Level(dBm)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

## CONDUCTED POWER RESULT:

The maximum Power (CP) for UHF is  
Analog: 4W/0.5W for 12.5 KHz Channel Separation  
Calculation Formula:  $CP = R + A + L$

\* Note:

CP: The final Conducted Power  
R : The reading value from spectrum analyzer  
A : The attenuation value of the used attenuator  
L : The loss of all connection cables

| Conducted Power Measurement Results |                    |              |                          |
|-------------------------------------|--------------------|--------------|--------------------------|
| Mode                                | Channel Separation | Test Channel | Measurement Result (dBm) |
| GMRS TX                             | 12.5 kHz           | 462.6375 MHz | <b>35.94</b>             |
|                                     |                    | 462.6500 MHz | 35.30                    |
|                                     |                    | 467.6500 MHz | 35.65                    |
|                                     |                    | 467.6375 MHz | <b>26.89</b>             |
| GMRS TX                             | 25 kHz             | 462.6375 MHz | 35.26                    |
|                                     |                    | 462.6500 MHz | 35.57                    |
|                                     |                    | 467.6500 MHz | <b>35.78</b>             |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## 11. SPURIOUS EMISSION ON ANTENNA PORT

### 11.1 PROVISIONS APPLICABLE

Please refer to FCC 47 CFR 2.1051, 2.1057, 22.359 & 90.210 for specification details.  
Emissions shall be attenuated below the mean output power of the transmitter as follows:

| FCC Rules | Attenuation Limit (dBc)        |
|-----------|--------------------------------|
| § 95.1779 | At least $43 + 10 \log (P)$ dB |

$43 + 10 \log (P_{\text{watts}})$

Calculation: Limit (dBm) = EL - 43 - 10 log<sub>10</sub> (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,


In this application, the EL is P (dBm).

Limit (dBm) = P (dBm) - 43 - 10 log (Pwatts) = -13 dBm

### 11.2 MEASUREMENT METHOD

1. The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to show any out of band emission up to 10th . Harmonic for the lower and the highest frequency range.
3. Set RBW 100 kHz, VBW 300 kHz in the frequency band 30MHz to 1GHz, while set RBW=1MHz. VBW=3MHz from the 1GHz to 10th Harmonic.
4. The audio input was set the unmodulated carrier, the resulting picture is print out for each channel separation.

### 11.3 MEASUREMENT SETUP

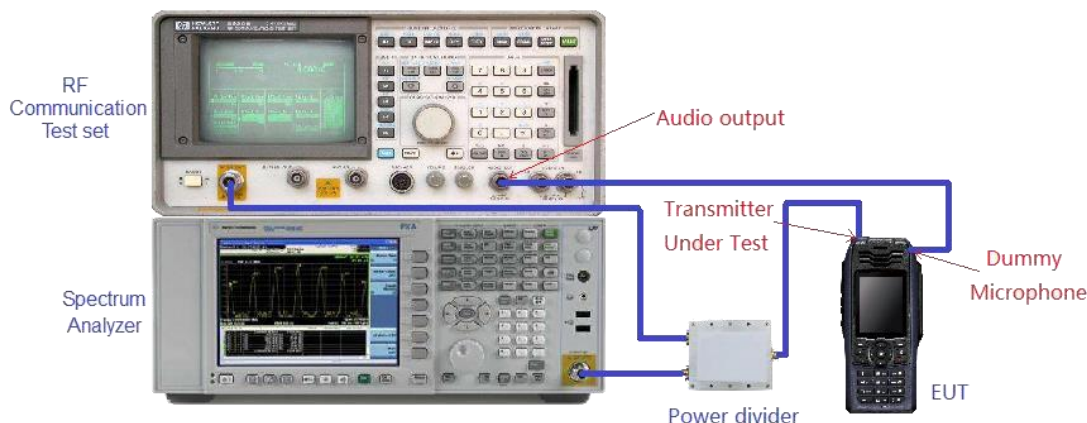

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

## 11.4 MEASUREMENT RESULTS


### 12.5kHz, FM modulation, Assigned Frequency:462.6375MHz, 4W

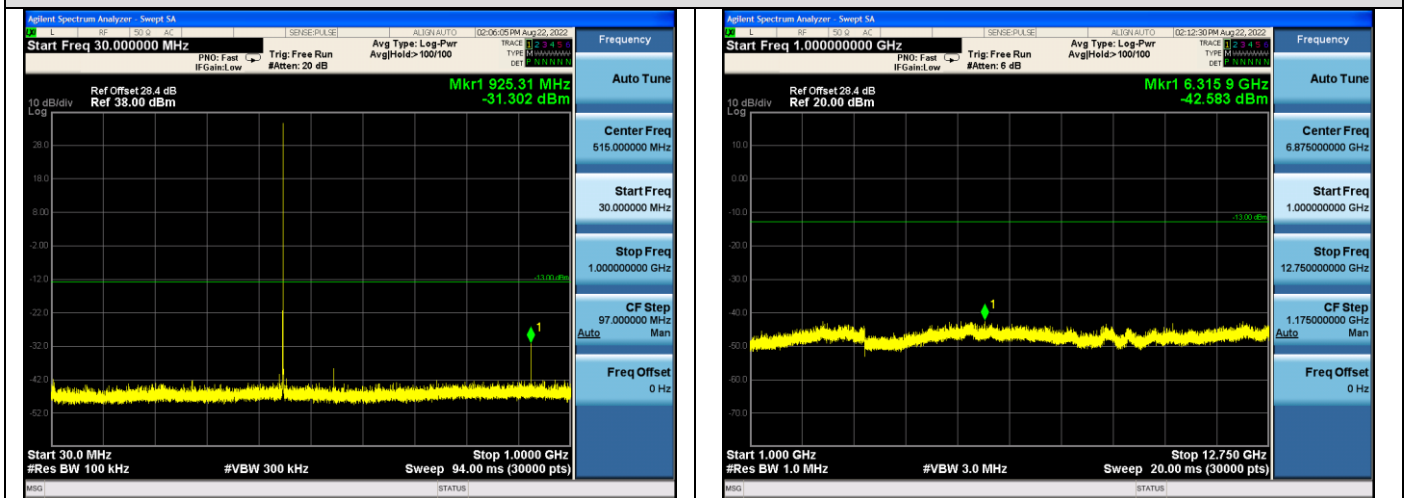

### 12.5kHz, FM modulation, Assigned Frequency:462.6500MHz, 4W

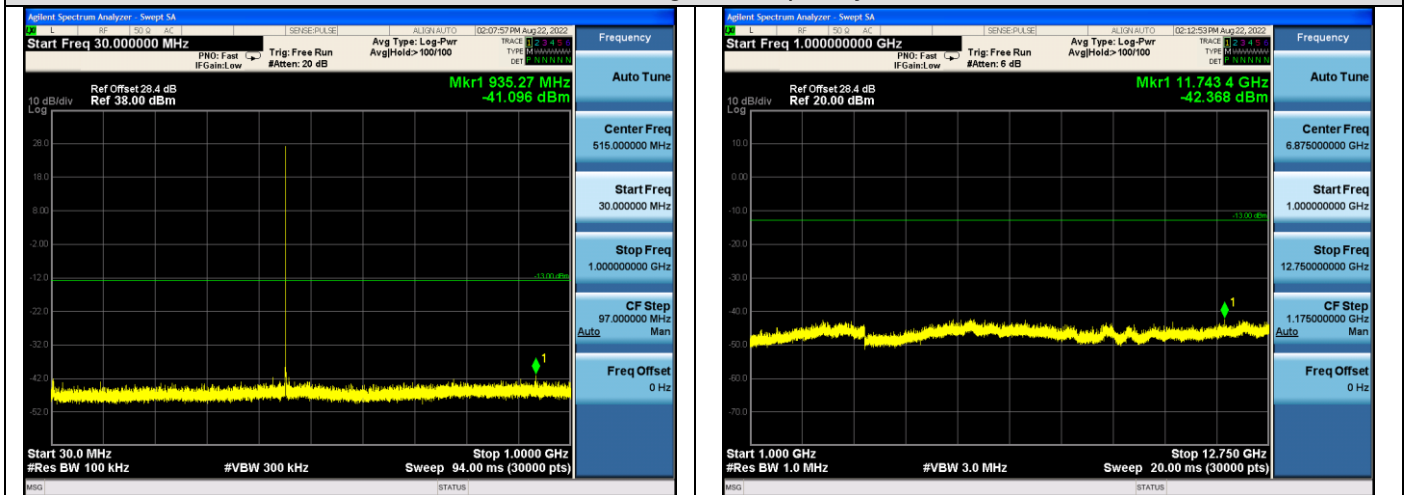


### 12.5kHz, FM modulation, Assigned Frequency:467.6500MHz, 4W

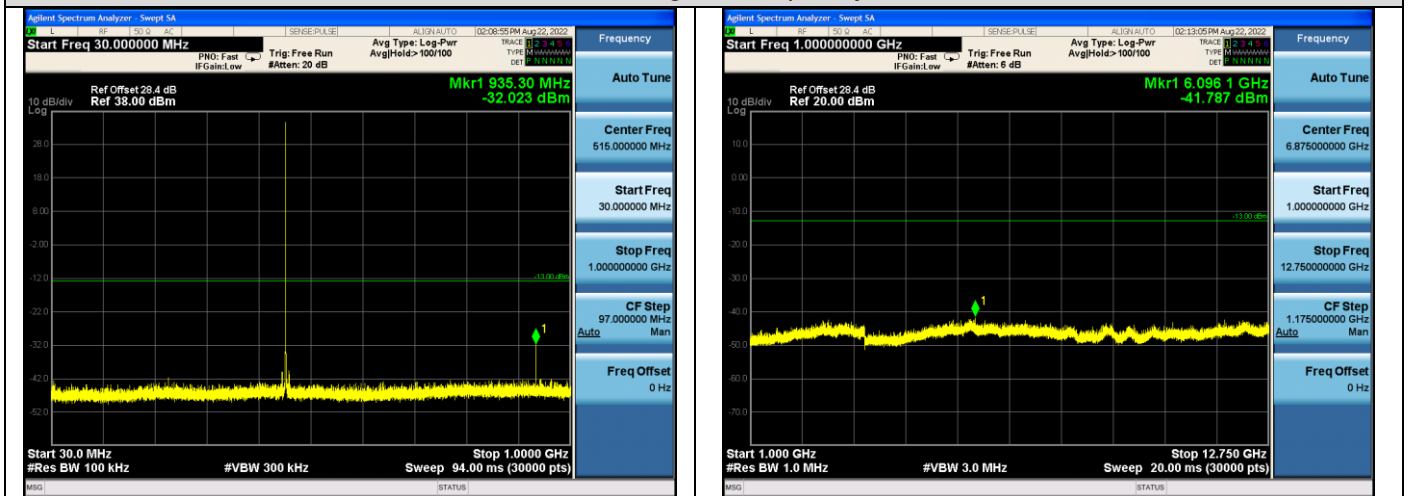


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>


25kHz, FM modulation, Assigned Frequency:462.6375MHz, 4W

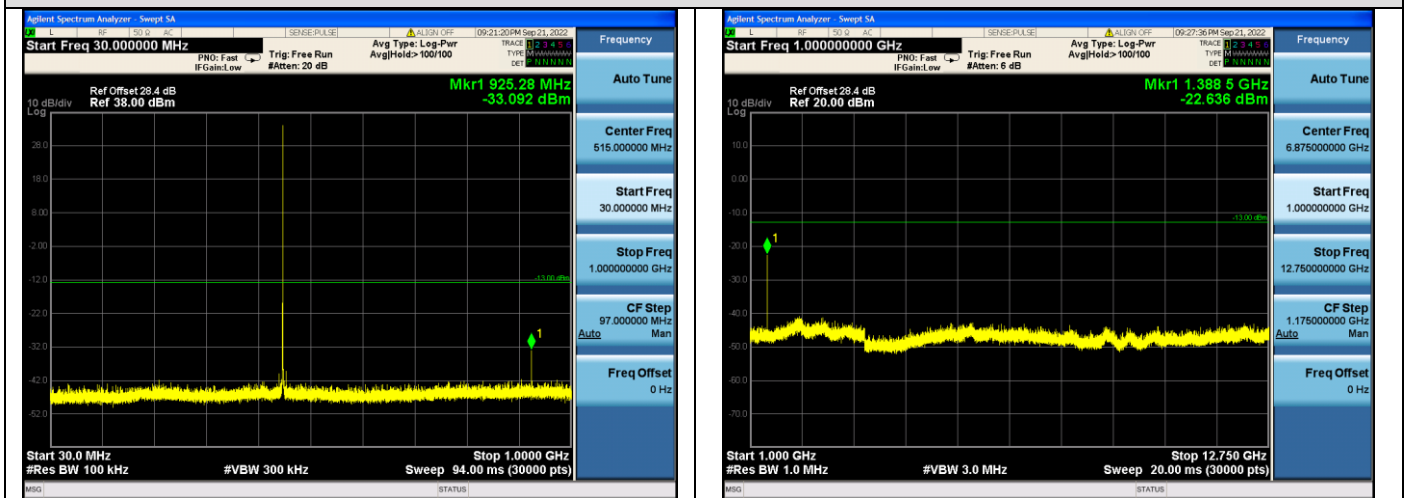

25kHz, FM modulation, Assigned Frequency:462.6500MHz, 4W

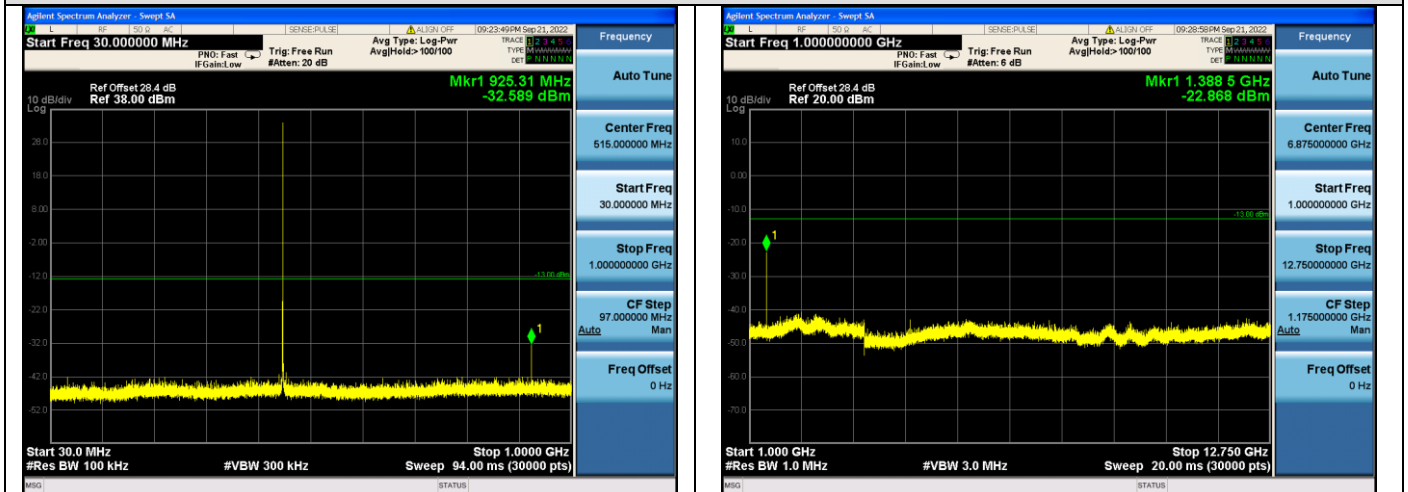


25kHz, FM modulation, Assigned Frequency:467.6500MHz, 4W

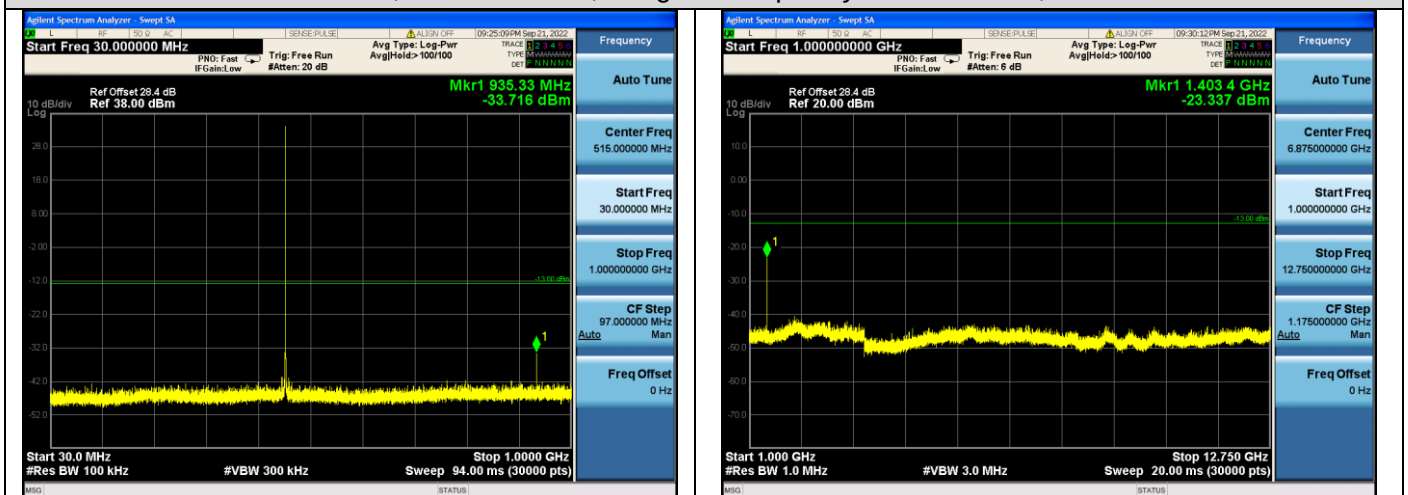

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

12.5kHz, FM modulation, Assigned Frequency:467.6375MHz, 0.5W

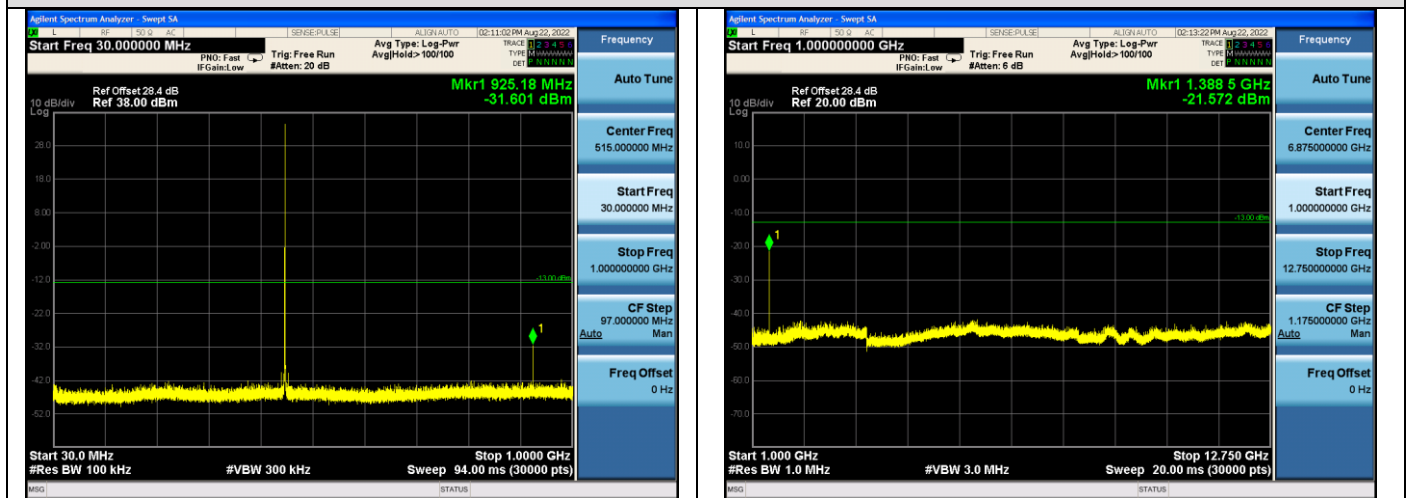

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/