

# TEST REPORT

Applicant Name: PO FUNG ELECTRONIC (HK) INTERNATIONAL GROUP COMPANY LIMITED  
Address: Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan Road, Kowloon, Hong Kong  
Report Number: XMTN1220728-34315E-EM-00B  
FCC ID: 2AJGM-UV17

**Test Standards:**  
FCC PART 15B

## Sample Description

Product Type: Amateur Radio  
Model No.: UV-17R  
Multiple Model: BF-17R  
Trade Mark: BAOFENG, POFUNG  
Date Received: 2022-07-28  
Date of Test: 2022-12-18 to 2022-12-19  
Report Date: 2022-12-23

|              |       |
|--------------|-------|
| Test Result: | Pass* |
|--------------|-------|

\* In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:**

*Zeki Ma*

Zeki Ma  
EMC Engineer

**Approved By:**

*Candy Li*

Candy Li  
EMC Engineer

**Note:** This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data. This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**Shenzhen Accurate Technology Co., Ltd.**

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503396

Web: [www.atc-lab.com](http://www.atc-lab.com)

## **TABLE OF CONTENTS**

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| <b>DOCUMENT REVISION HISTORY .....</b>                          | <b>3</b>  |
| <b>GENERAL INFORMATION.....</b>                                 | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....        | 4         |
| OBJECTIVE .....                                                 | 4         |
| TEST METHODOLOGY .....                                          | 4         |
| MEASUREMENT UNCERTAINTY .....                                   | 5         |
| TEST FACILITY .....                                             | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                           | <b>6</b>  |
| JUSTIFICATION .....                                             | 6         |
| EUT EXERCISE SOFTWARE .....                                     | 6         |
| SPECIAL ACCESSORIES .....                                       | 6         |
| EQUIPMENT MODIFICATIONS .....                                   | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                        | 6         |
| BLOCK DIAGRAM OF RADIATED TEST SETUP.....                       | 7         |
| <b>SUMMARY OF TEST RESULTS .....</b>                            | <b>9</b>  |
| <b>TEST EQUIPMENT LIST .....</b>                                | <b>10</b> |
| <b>FCC §15.107 – CONDUCTED EMISSIONS .....</b>                  | <b>11</b> |
| APPLICABLE STANDARD .....                                       | 11        |
| EUT SETUP.....                                                  | 11        |
| EMI TEST RECEIVER SETUP.....                                    | 11        |
| TEST PROCEDURE .....                                            | 12        |
| FACTOR & OVER LIMIT CALCULATION.....                            | 12        |
| TEST DATA .....                                                 | 12        |
| <b>FCC §15.109 - RADIATED EMISSIONS .....</b>                   | <b>15</b> |
| APPLICABLE STANDARD .....                                       | 15        |
| EUT SETUP.....                                                  | 15        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....               | 16        |
| TEST PROCEDURE .....                                            | 16        |
| FACTOR & OVER LIMIT CALCULATION.....                            | 16        |
| TEST DATA .....                                                 | 17        |
| <b>FCC §15.111 - ANTENNA CONDUCTED POWER FOR RECEIVERS.....</b> | <b>38</b> |
| APPLICABLE STANDARD .....                                       | 38        |
| EUT SETUP.....                                                  | 38        |
| TEST PROCEDURE .....                                            | 38        |
| TEST DATA .....                                                 | 38        |

---

**DOCUMENT REVISION HISTORY**

---

| Revision Number | Report Number             | Description of Revision | Date of Revision |
|-----------------|---------------------------|-------------------------|------------------|
| 0               | XMTN1220728-34315E-EM-00B | Original Report         | 2022-12-23       |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                             |                                                                                                           |
|-----------------------------|-----------------------------------------------------------------------------------------------------------|
| Product                     | Amateur Radio                                                                                             |
| Tested Model                | UV-17R                                                                                                    |
| Multiple Model              | BF-17R                                                                                                    |
| Model Difference            | Please refer to the DOS letter.                                                                           |
| Frequency Range             | FM: 76-108MHz(Receiver)<br>NOAA: 162.400-162.550MHz(Receiver)                                             |
| Highest Operation Frequency | 520 MHz (provided by the applicant.)                                                                      |
| Voltage Range               | DC 7.4V from battery or DC 5V from adapter for charging                                                   |
| Sample number               | XMTN1220728-34315E-EM-S1 (Assigned by ATC)                                                                |
| Sample/EUT Status           | Good condition                                                                                            |
| Adapter information         | Model: BF-0502000<br>Input: 100-240V~50/60Hz 0.5A<br>Output: 5V=2A<br>(The DC line length is 0.87 meter.) |

### Objective

This report is in accordance with Part 2-Subpart J, and Part 15-Subparts A and B of the Federal Communication Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15, Class B device.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

| Parameter                          |              | Uncertainty            |
|------------------------------------|--------------|------------------------|
| Occupied Channel Bandwidth         |              | 5%                     |
| RF Frequency                       |              | $0.082 \times 10^{-7}$ |
| RF output power, conducted         |              | 0.73dB                 |
| Unwanted Emission, conducted       |              | 1.6dB                  |
| AC Power Lines Conducted Emissions |              | 2.72dB                 |
| Emissions,<br>Radiated             | 9kHz - 30MHz | 2.66dB                 |
|                                    | 30MHz - 1GHz | 4.28dB                 |
|                                    | 1GHz - 18GHz | 4.98dB                 |
| Temperature                        |              | 1°C                    |
| Humidity                           |              | 6%                     |
| Supply voltages                    |              | 0.4%                   |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor  $K$  with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.  
Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Test mode 1: Charging (The EUT Switch OFF)

Test mode 2: Receiver at FM 76MHz

Test mode 3: Receiver at FM 92MHz

Test mode 4: Receiver at FM 108MHz

Test mode 5: NOAA Receiving at 162.4750MHz

NOAA Channel:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1       | 162.5500        | 5       | 162.4500        |
| 2       | 162.4000        | 6       | 162.5000        |
| 3       | <b>162.4750</b> | 7       | 162.5250        |
| 4       | 162.4250        | /       | /               |

### EUT Exercise Software

No exercise software.

### Special Accessories

No special accessory was used.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details

| Manufacturer | Description             | Model   | Serial Number |
|--------------|-------------------------|---------|---------------|
| Unknown      | Earphone                | K-MS561 | Unknown       |
| AGILENT      | Vector Signal Generator | N5182A  | MY50143401    |


### External I/O Cable

| Cable Description | Length (m) | From Port | To Port  |
|-------------------|------------|-----------|----------|
| Audio Cable       | 1.5        | EUT       | Earphone |
| Power Cable       | 0.87       | EUT       | Adapter  |

## Block Diagram of Radiated Test Setup


For conducted emission:

Test Mode1:

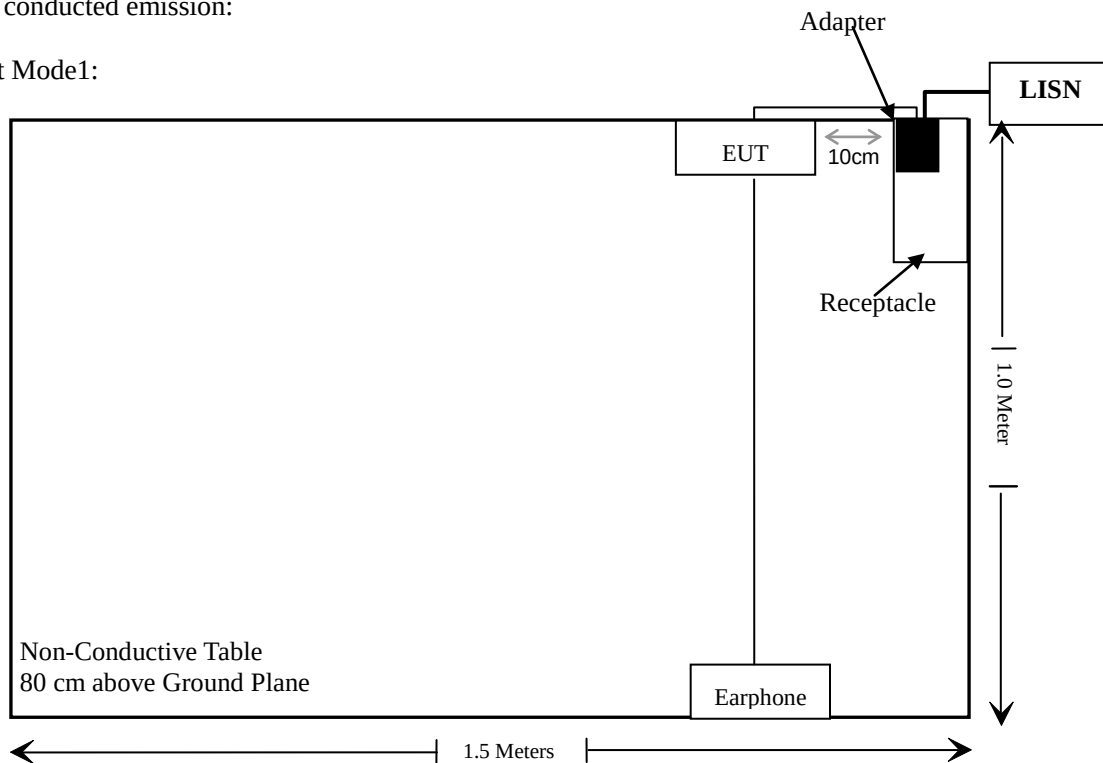


For Radiated emission:

Test Mode1:

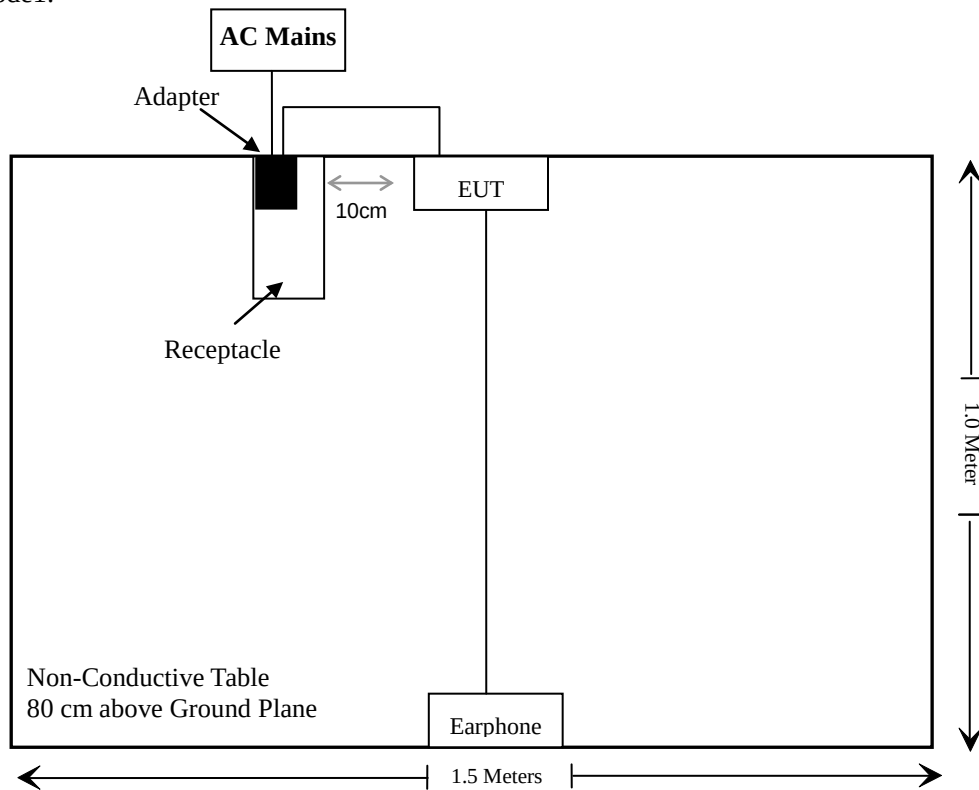

Test mode 2-5:

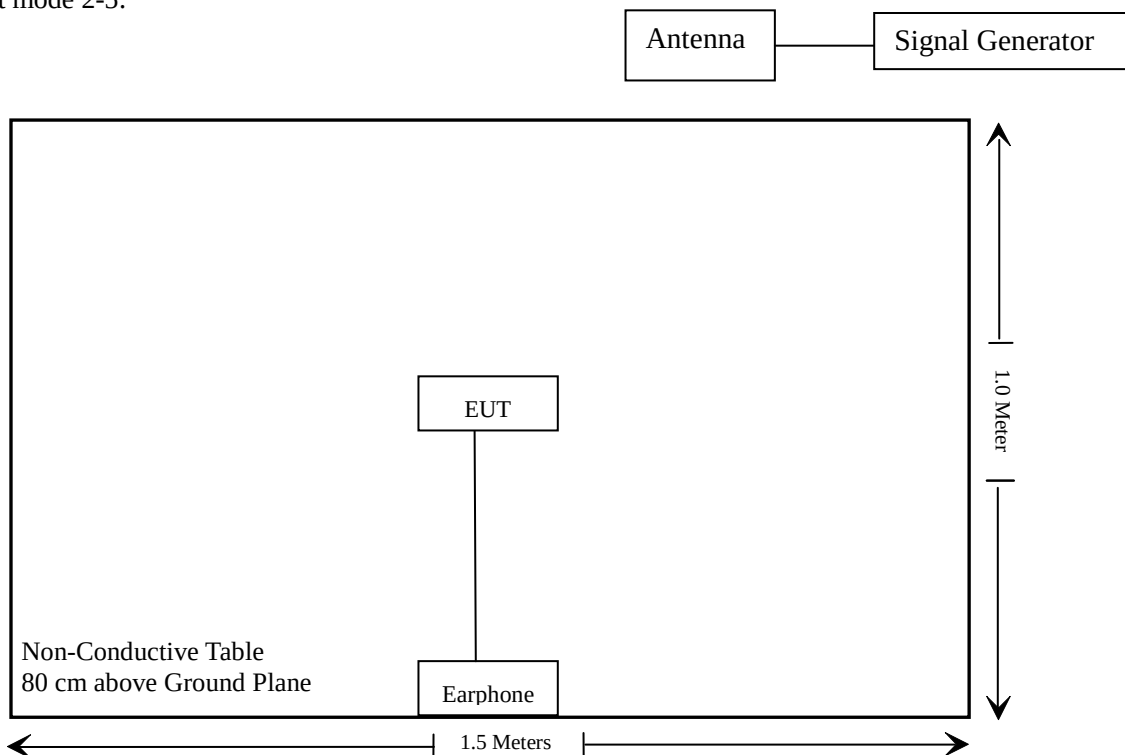

---

**SUMMARY OF TEST RESULTS**

---

| FCC Rules | Description of Test                   | Results   |
|-----------|---------------------------------------|-----------|
| §15.107   | Conducted Emissions                   | Compliant |
| §15.109   | Radiated Emissions                    | Compliant |
| §15.111   | Antenna Conducted Power for receivers | Compliant |

## TEST EQUIPMENT LIST

| Manufacturer                                     | Description             | Model     | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------------------------------|-------------------------|-----------|---------------|------------------|----------------------|
| <b>Conducted emission</b>                        |                         |           |               |                  |                      |
| Rohde & Schwarz                                  | EMI Test Receiver       | ESCI      | 100784        | 2022/11/25       | 2023/11/24           |
| Rohde & Schwarz                                  | L.I.S.N.                | ENV216    | 101314        | 2022/11/25       | 2023/11/24           |
| Anritsu Corp                                     | 50 Coaxial Switch       | MP59B     | 6100237248    | 2022/12/07       | 2023/12/06           |
| Unknown                                          | RF Coaxial Cable        | No.17     | N0350         | 2022/11/25       | 2023/11/24           |
| Conducted Emission Test Software: e3 19821b (V9) |                         |           |               |                  |                      |
| <b>Radiated Emissions Test</b>                   |                         |           |               |                  |                      |
| Rohde & Schwarz                                  | Test Receiver           | ESR       | 102725        | 2022/11/25       | 2023/11/24           |
| Rohde & Schwarz                                  | Spectrum Analyzer       | FSV40     | 101949        | 2022/11/25       | 2023/11/24           |
| A.H. Systems, inc.                               | Preamplifier            | PAM-0118P | 135           | 2022/11/08       | 2023/11/07           |
| SONOMA INSTRUMENT                                | Amplifier               | 310 N     | 186131        | 2022/11/08       | 2023/11/07           |
| Schwarzbeck                                      | Bilog Antenna           | VULB9163  | 9163-323      | 2021/07/06       | 2024/07/05           |
| Schwarzbeck                                      | Horn Antenna            | BBHA9120D | 9120D-1067    | 2020/01/05       | 2023/01/04           |
| AGILENT                                          | Vector Signal Generator | N5182A    | MY50143401    | 2022/10/24       | 2023/10/23           |
| Unknown                                          | RF Coaxial Cable        | No.10     | N050          | 2022/11/25       | 2023/11/24           |
| Unknown                                          | RF Coaxial Cable        | No.11     | N1000         | 2022/11/25       | 2023/11/24           |
| Unknown                                          | RF Coaxial Cable        | No.12     | N040          | 2022/11/25       | 2023/11/24           |
| Unknown                                          | RF Coaxial Cable        | No.13     | N300          | 2022/11/25       | 2023/11/24           |
| Unknown                                          | RF Coaxial Cable        | No.14     | N800          | 2022/11/25       | 2023/11/24           |
| Radiated Emission Test Software: e3 19821b(V9)   |                         |           |               |                  |                      |
| <b>RF Conducted Test</b>                         |                         |           |               |                  |                      |
| Rohde & Schwarz                                  | Spectrum Analyzer       | FSV-40    | 101495        | 2022/11/25       | 2023/11/24           |
| Unknown                                          | RF Coaxial Cable        | No.33     | RF-03         | Each time        |                      |


**\* Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.107 – CONDUCTED EMISSIONS

### Applicable Standard

According to FCC§15.107

### EUT Setup

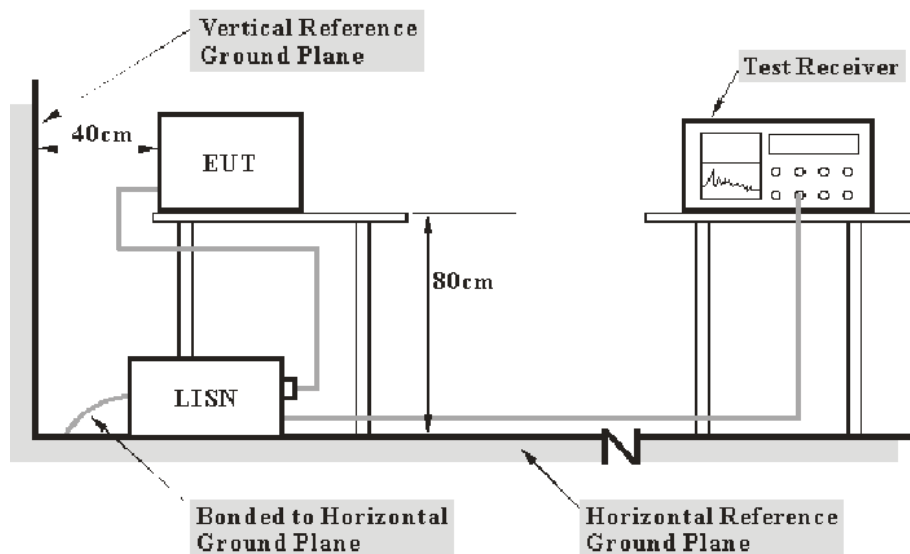

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

## Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:


$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data

### Environmental Conditions


|                    |        |
|--------------------|--------|
| Temperature:       | 21 °C  |
| Relative Humidity: | 54 %   |
| ATM Pressure:      | 101kPa |

*The testing was performed by Lipa Wu on 2022-12-18*

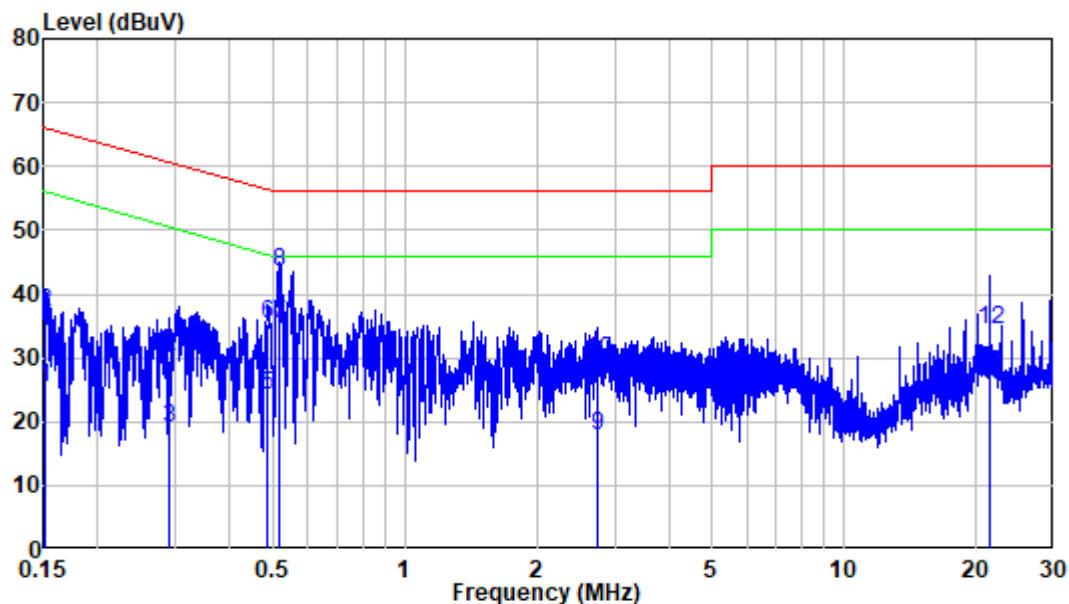**Test mode 1: Charging****AC 120V/60Hz, Line:**

Site : Shielding Room  
 Condition: Line  
 Job No. : XMTN1220728-34315E-EM  
 Mode : Charging  
 Power : AC 120V 60Hz

|    | Freq   | Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|----|--------|--------|---------------|-------|---------------|---------------|---------|
|    | MHz    | dB     | dBuV          | dBuV  | dBuV          | dB            |         |
| 1  | 0.151  | 9.80   | 15.69         | 25.49 | 55.92         | -30.43        | Average |
| 2  | 0.151  | 9.80   | 27.44         | 37.24 | 65.92         | -28.68        | QP      |
| 3  | 0.292  | 9.80   | 9.21          | 19.01 | 50.48         | -31.47        | Average |
| 4  | 0.292  | 9.80   | 19.82         | 29.62 | 60.48         | -30.86        | QP      |
| 5  | 0.485  | 9.80   | 14.33         | 24.13 | 46.26         | -22.13        | Average |
| 6  | 0.485  | 9.80   | 25.39         | 35.19 | 56.26         | -21.07        | QP      |
| 7  | 0.520  | 9.81   | 25.37         | 35.18 | 46.00         | -10.82        | Average |
| 8  | 0.520  | 9.81   | 33.67         | 43.48 | 56.00         | -12.52        | QP      |
| 9  | 2.745  | 9.83   | 7.92          | 17.75 | 46.00         | -28.25        | Average |
| 10 | 2.745  | 9.83   | 19.62         | 29.45 | 56.00         | -26.55        | QP      |
| 11 | 21.429 | 10.01  | 17.59         | 27.60 | 50.00         | -22.40        | Average |
| 12 | 21.429 | 10.01  | 24.52         | 34.53 | 60.00         | -25.47        | QP      |

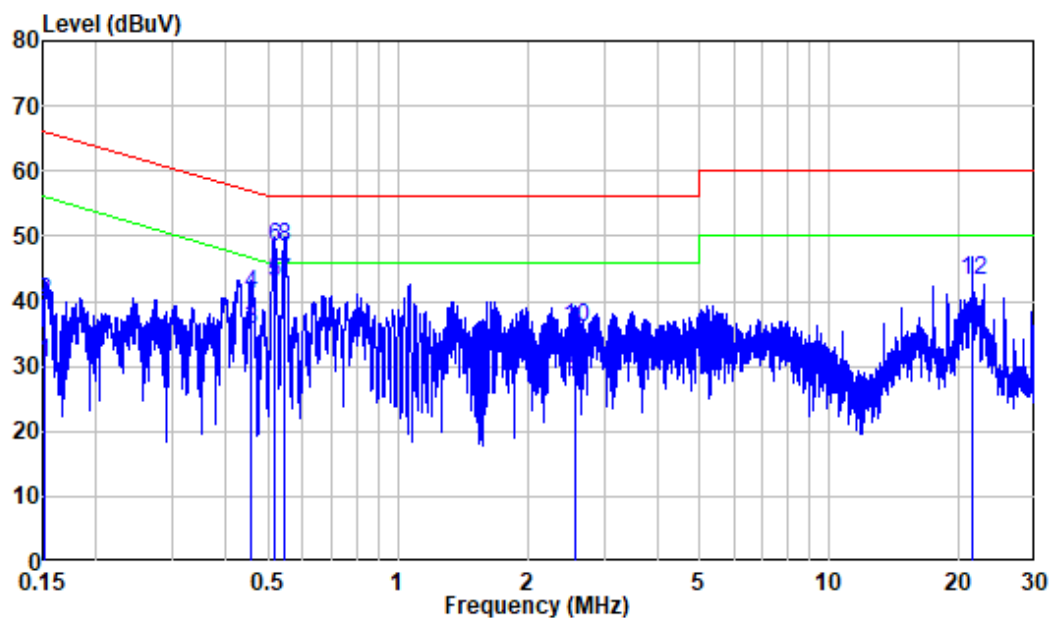**AC 120V/60Hz, Neutral:**

Site : Shielding Room  
 Condition: Neutral  
 Job No. : XMTN1220728-34315E-EM  
 Mode : Charging  
 Power : AC 120V 60Hz

|    | Freq   | Factor | Read Level | Level | Limit Line | Over Limit | Remark  |
|----|--------|--------|------------|-------|------------|------------|---------|
|    | MHz    | dB     | dBuV       | dBuV  | dBuV       | dB         |         |
| 1  | 0.152  | 9.80   | 20.81      | 30.61 | 55.87      | -25.26     | Average |
| 2  | 0.152  | 9.80   | 29.98      | 39.78 | 65.87      | -26.09     | QP      |
| 3  | 0.458  | 9.80   | 25.68      | 35.48 | 46.73      | -11.25     | Average |
| 4  | 0.458  | 9.80   | 31.17      | 40.97 | 56.73      | -15.76     | QP      |
| 5  | 0.517  | 9.81   | 33.03      | 42.84 | 46.00      | -3.16      | Average |
| 6  | 0.517  | 9.81   | 38.51      | 48.32 | 56.00      | -7.68      | QP      |
| 7  | 0.546  | 9.81   | 33.09      | 42.90 | 46.00      | -3.10      | Average |
| 8  | 0.546  | 9.81   | 38.63      | 48.44 | 56.00      | -7.56      | QP      |
| 9  | 2.586  | 9.83   | 18.41      | 28.24 | 46.00      | -17.76     | Average |
| 10 | 2.586  | 9.83   | 26.01      | 35.84 | 56.00      | -20.16     | QP      |
| 11 | 21.458 | 10.11  | 24.55      | 34.66 | 50.00      | -15.34     | Average |
| 12 | 21.458 | 10.11  | 33.07      | 43.18 | 60.00      | -16.82     | QP      |


## FCC §15.109 - RADIATED EMISSIONS

### Applicable Standard


FCC §15.109

### EUT Setup

Below 1GHz:

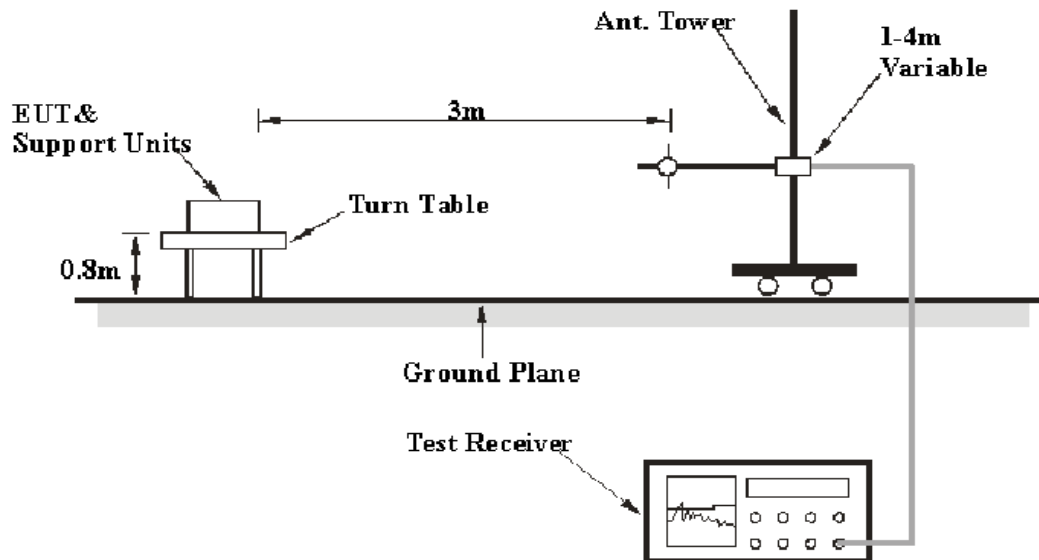

Above 1GHz:

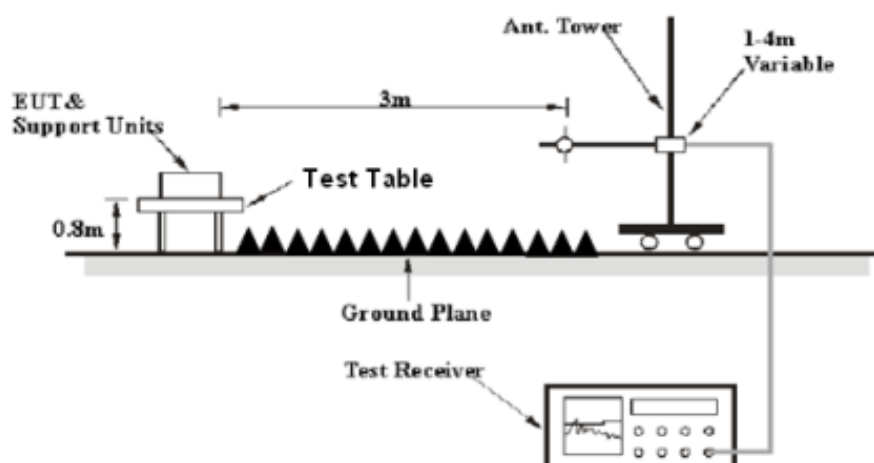

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range  | RBW     | Video B/W | IF B/W | Detector |
|------------------|---------|-----------|--------|----------|
| 30MHz – 1000 MHz | 120 kHz | 300 kHz   | 120kHz | QP       |
| Above 1 GHz      | 1MHz    | 3 MHz     | /      | Peak     |
|                  | 1MHz    | 10Hz      | /      | AV       |

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

If the maximized peak measured value complies with the limit, then it is unnecessary to perform QP/Average measurement.

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

### Factor & Over Limit Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Reading} + \text{Factor}\end{aligned}$$

**Test Data****Environmental Conditions**

|                           |        |
|---------------------------|--------|
| <b>Temperature:</b>       | 21°C   |
| <b>Relative Humidity:</b> | 55%    |
| <b>ATM Pressure:</b>      | 101kPa |


*The testing was performed by Jason Liu on 2022-12-19.*

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.

30MHz-1GHz:

Test mode 1: Charging

Horizontal:

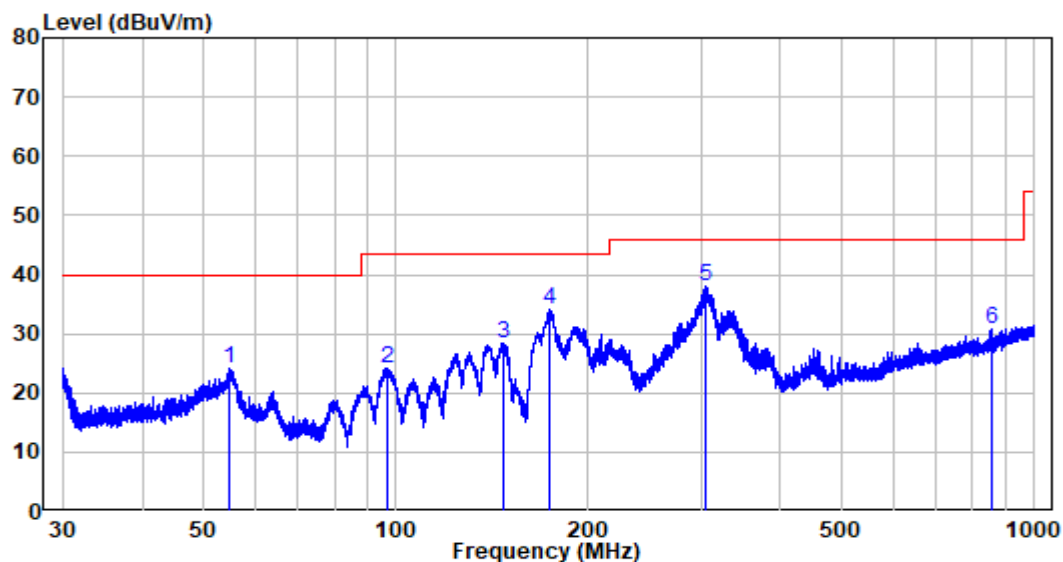

Site : chamber


Condition: 3m HORIZONTAL

Job No. : XMTN1220728-34315E-EM

Test Mode: Charging

|   | Freq    | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz     | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 54.811  | -10.29 | 34.44         | 24.15  | 40.00         | -15.85        | Peak   |
| 2 | 96.945  | -12.28 | 36.56         | 24.28  | 43.50         | -19.22        | Peak   |
| 3 | 147.404 | -15.43 | 43.75         | 28.32  | 43.50         | -15.18        | Peak   |
| 4 | 174.195 | -13.17 | 47.32         | 34.15  | 43.50         | -9.35         | Peak   |
| 5 | 305.546 | -9.04  | 47.01         | 37.97  | 46.00         | -8.03         | Peak   |
| 6 | 856.649 | 0.31   | 30.49         | 30.80  | 46.00         | -15.20        | Peak   |

## Vertical

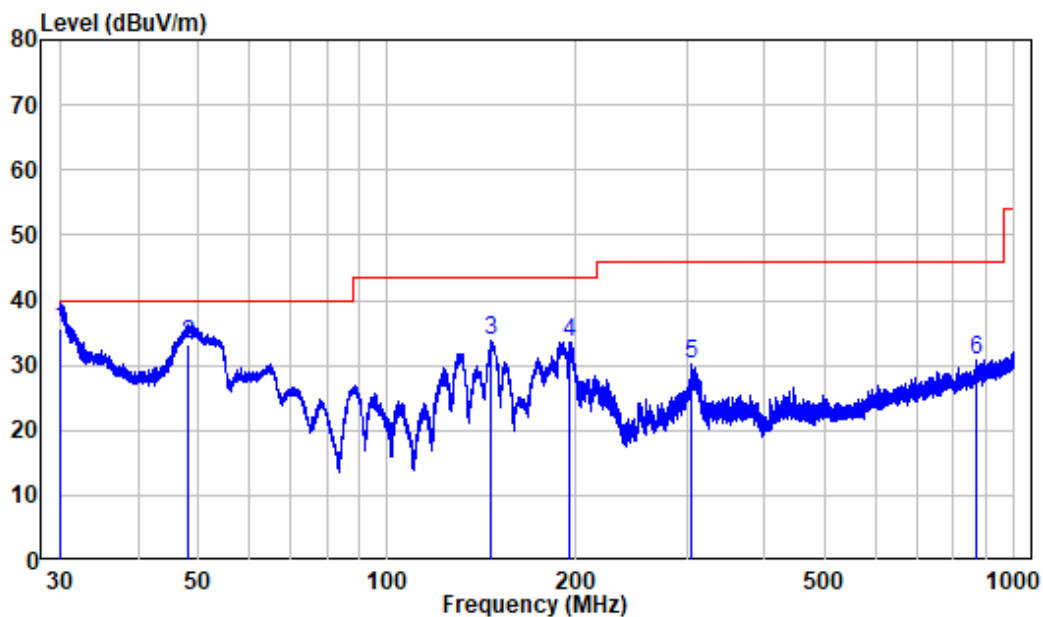


Site : chamber

Condition: 3m VERTICAL

Job No. : XMTN1220728-34315E-EM

Test Mode: Charging

|   | Freq    | Factor | Read Level | Level  | Limit  | Over   | Remark |
|---|---------|--------|------------|--------|--------|--------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m | dB     |        |
| 1 | 30.145  | -12.39 | 47.91      | 35.52  | 40.00  | -4.48  | QP     |
| 2 | 48.205  | -9.99  | 43.10      | 33.11  | 40.00  | -6.89  | QP     |
| 3 | 146.566 | -15.47 | 49.20      | 33.73  | 43.50  | -9.77  | Peak   |
| 4 | 195.822 | -11.55 | 45.11      | 33.56  | 43.50  | -9.94  | Peak   |
| 5 | 306.082 | -9.03  | 39.27      | 30.24  | 46.00  | -15.76 | Peak   |
| 6 | 869.511 | 0.97   | 29.67      | 30.64  | 46.00  | -15.36 | Peak   |

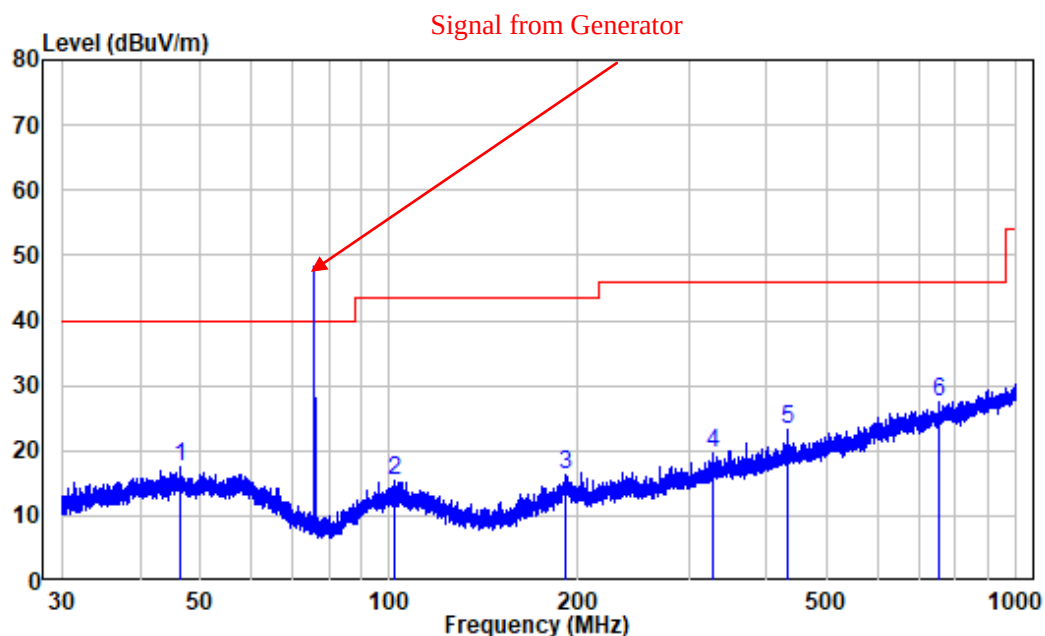**Test mode 2: Receiver at FM 76MHz****Horizontal:**

Site : chamber

Condition: 3m HORIZONTAL


Job No. : XMTN1220728-34315E-EM

Test Mode: Receive at FM 76MHz

|   | Freq    | Factor | Read<br>Level | Level  | Limit  | Over<br>Limit | Remark |
|---|---------|--------|---------------|--------|--------|---------------|--------|
|   | MHz     | dB/m   | dBuV          | dBuV/m | dBuV/m | dB            |        |
| 1 | 46.422  | -10.00 | 27.57         | 17.57  | 40.00  | -22.43        | Peak   |
| 2 | 101.912 | -11.58 | 26.87         | 15.29  | 43.50  | -28.21        | Peak   |
| 3 | 190.405 | -11.51 | 27.81         | 16.30  | 43.50  | -27.20        | Peak   |
| 4 | 329.039 | -8.04  | 27.52         | 19.48  | 46.00  | -26.52        | Peak   |
| 5 | 431.977 | -5.75  | 28.85         | 23.10  | 46.00  | -22.90        | Peak   |
| 6 | 752.084 | -0.83  | 28.20         | 27.37  | 46.00  | -18.63        | Peak   |

## Vertical

Signal from Generator

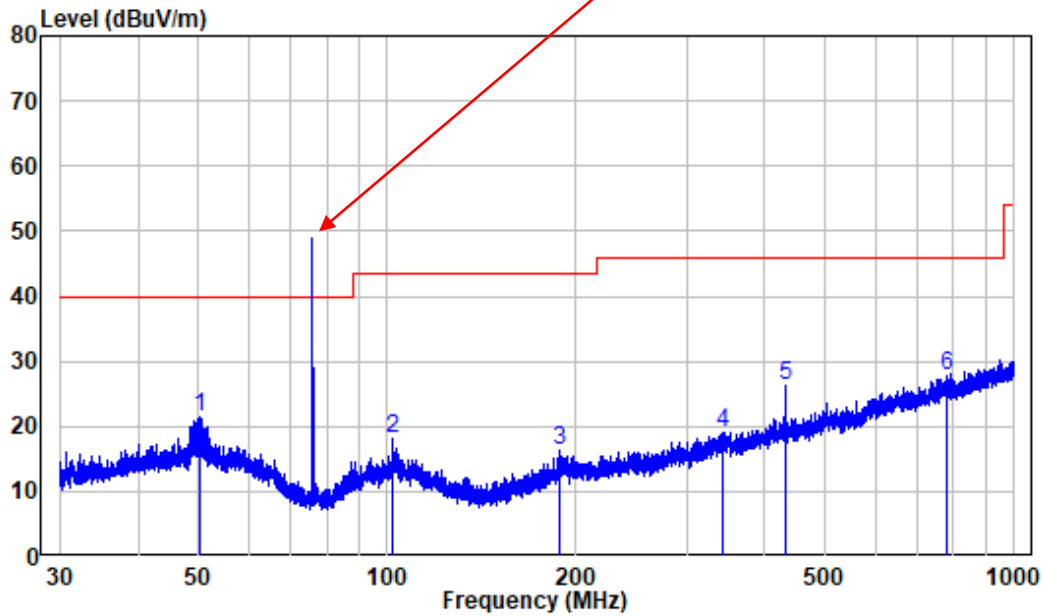


Site : chamber

Condition: 3m VERTICAL

Job No. : XMTN1220728-34315E-EM

Test Mode: Receive at FM 76MHz

|   | Freq    | Factor | Read Level | Level  | Limit  | Over   | Remark |
|---|---------|--------|------------|--------|--------|--------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m | dB     |        |
| 1 | 50.254  | -9.92  | 31.47      | 21.55  | 40.00  | -18.45 | Peak   |
| 2 | 101.912 | -11.58 | 29.81      | 18.23  | 43.50  | -25.27 | Peak   |
| 3 | 187.589 | -11.87 | 28.11      | 16.24  | 43.50  | -27.26 | Peak   |
| 4 | 342.279 | -7.34  | 26.42      | 19.08  | 46.00  | -26.92 | Peak   |
| 5 | 431.977 | -5.75  | 32.09      | 26.34  | 46.00  | -19.66 | Peak   |
| 6 | 779.949 | 0.08   | 27.69      | 27.77  | 46.00  | -18.23 | Peak   |

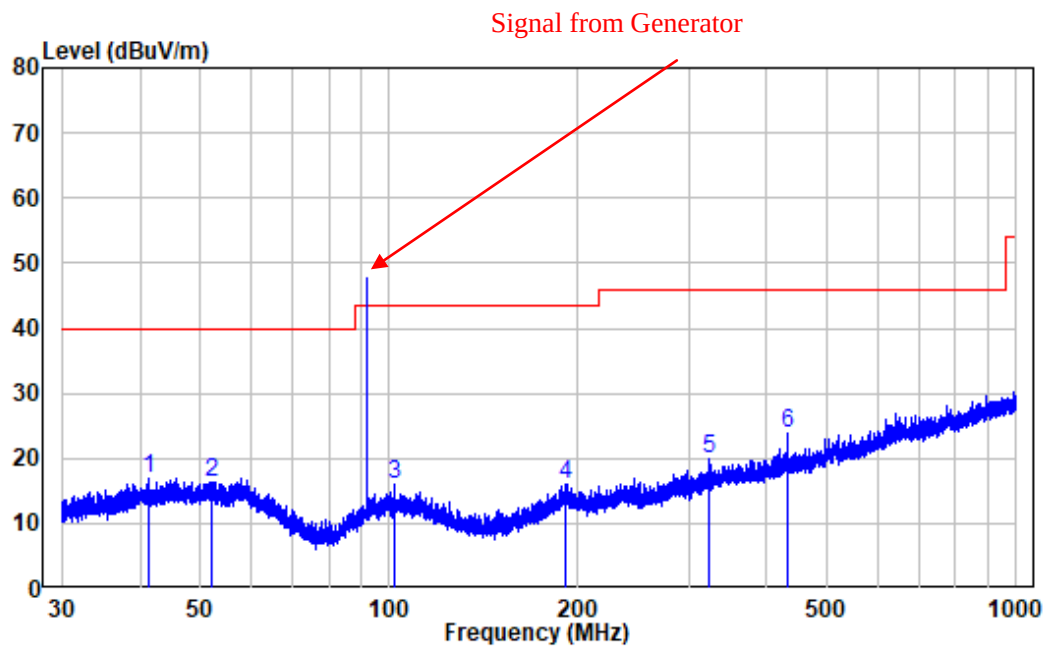**Test mode 3: Receiver at FM 92MHz****Horizontal:**

Site : chamber


Condition: 3m HORIZONTAL

Job No. : XMTN1220728-34315E-EM

Test Mode: Receive at FM 92MHz

|   | Freq    | Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 41.277  | -10.14 | 27.06      | 16.92  | 40.00      | -23.08     | Peak   |
| 2 | 52.116  | -9.99  | 26.40      | 16.41  | 40.00      | -23.59     | Peak   |
| 3 | 101.867 | -11.58 | 27.44      | 15.86  | 43.50      | -27.64     | Peak   |
| 4 | 190.990 | -11.41 | 27.49      | 16.08  | 43.50      | -27.42     | Peak   |
| 5 | 322.471 | -8.36  | 28.31      | 19.95  | 46.00      | -26.05     | Peak   |
| 6 | 431.977 | -5.75  | 29.46      | 23.71  | 46.00      | -22.29     | Peak   |

## Vertical

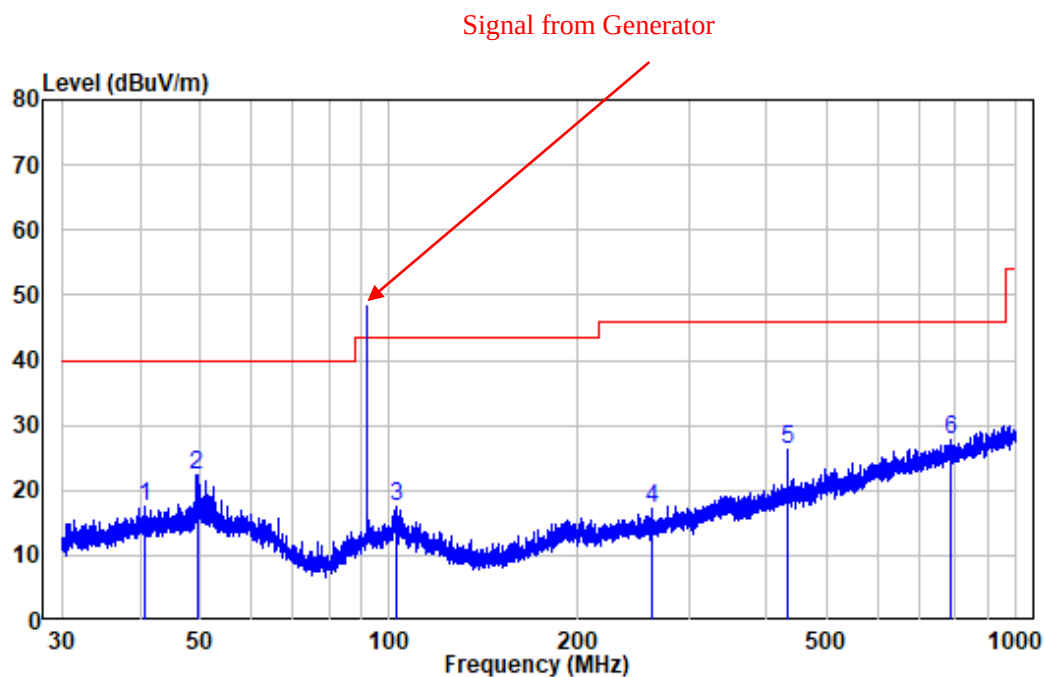


Site : chamber

Condition: 3m VERTICAL

Job No. : XMTN1220728-34315E-EM

Test Mode: Receive at FM 92MHz

|   | Freq    | Factor | Read<br>Level | Limit<br>Level | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|--------|---------------|----------------|---------------|---------------|--------|
|   | MHz     | dB/m   | dBuV          | dBuV/m         | dBuV/m        | dB            |        |
| 1 | 40.755  | -10.22 | 27.73         | 17.51          | 40.00         | -22.49        | Peak   |
| 2 | 49.316  | -9.94  | 32.15         | 22.21          | 40.00         | -17.79        | Peak   |
| 3 | 102.539 | -11.61 | 28.99         | 17.38          | 43.50         | -26.12        | Peak   |
| 4 | 261.975 | -10.53 | 27.71         | 17.18          | 46.00         | -28.82        | Peak   |
| 5 | 431.977 | -5.75  | 31.91         | 26.16          | 46.00         | -19.84        | Peak   |
| 6 | 788.888 | -0.12  | 27.88         | 27.76          | 46.00         | -18.24        | Peak   |

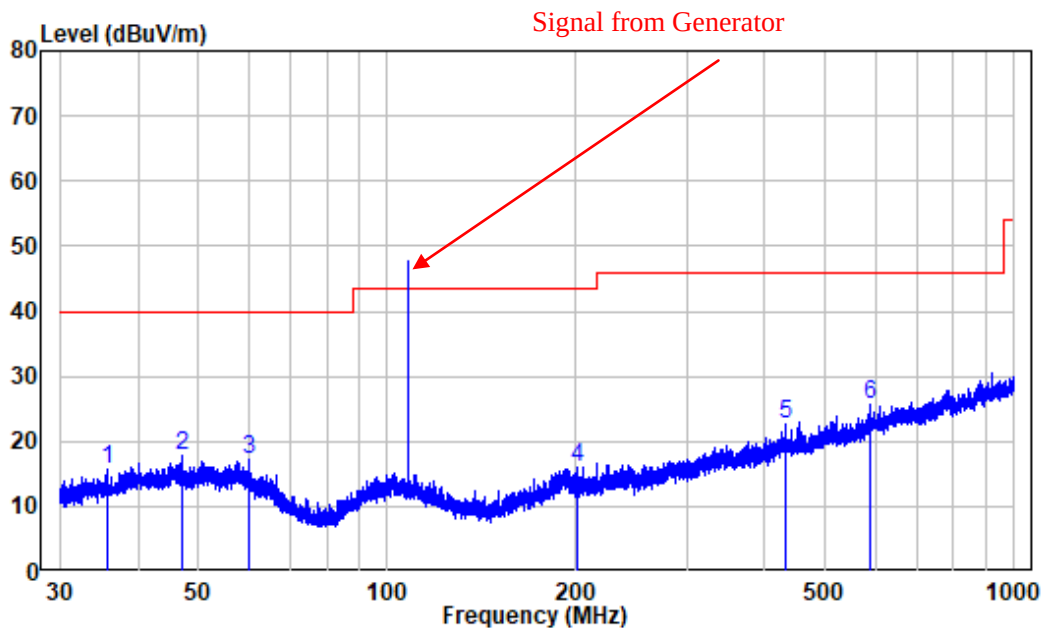**Test mode 4: Receiver at FM 108MHz****Horizontal:**

Site : chamber


Condition: 3m HORIZONTAL

Job No. : XMTN1220728-34315E-EM

Test Mode: Receive at FM 108MHz

|   | Freq    | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz     | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 35.812  | -11.27 | 27.01         | 15.74  | 40.00         | -24.26        | Peak   |
| 2 | 47.057  | -10.00 | 27.88         | 17.88  | 40.00         | -22.12        | Peak   |
| 3 | 60.280  | -10.73 | 27.95         | 17.22  | 40.00         | -22.78        | Peak   |
| 4 | 200.512 | -11.44 | 27.44         | 16.00  | 43.50         | -27.50        | Peak   |
| 5 | 431.977 | -5.75  | 28.46         | 22.71  | 46.00         | -23.29        | Peak   |
| 6 | 590.715 | -2.74  | 28.27         | 25.53  | 46.00         | -20.47        | Peak   |

## Vertical

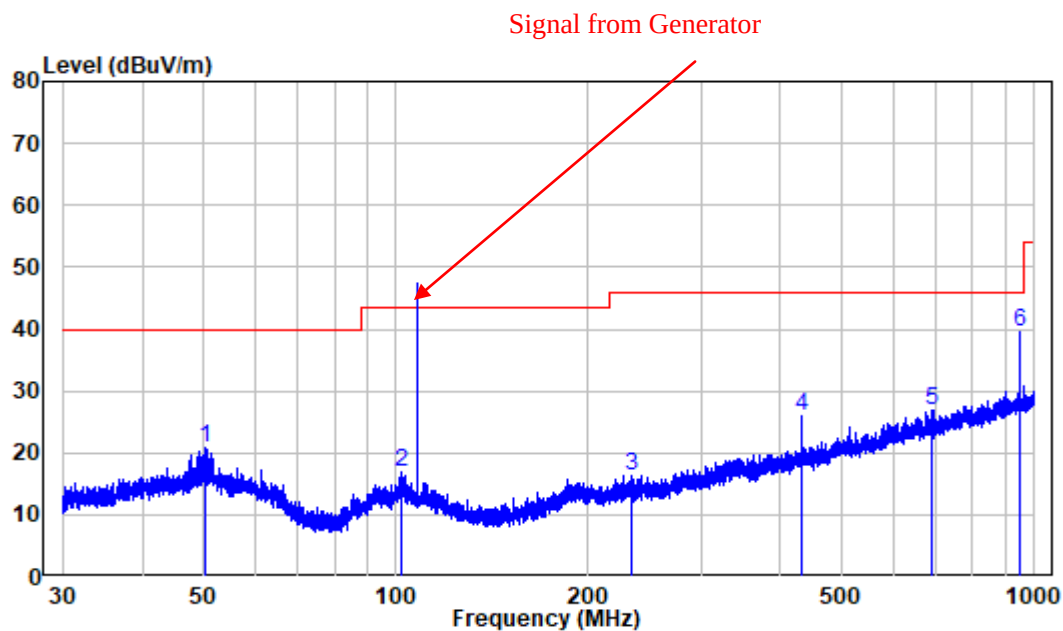


Site : chamber

Condition: 3m VERTICAL

Job No. : XMTN1220728-34315E-EM

Test Mode: Receive at FM 108MHz

|   | Freq    | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz     | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 50.122  | -9.92  | 30.64         | 20.72  | 40.00         | -19.28        | Peak   |
| 2 | 101.867 | -11.58 | 28.53         | 16.95  | 43.50         | -26.55        | Peak   |
| 3 | 233.758 | -11.00 | 27.22         | 16.22  | 46.00         | -29.78        | Peak   |
| 4 | 431.977 | -5.75  | 31.56         | 25.81  | 46.00         | -20.19        | Peak   |
| 5 | 690.472 | -1.51  | 28.46         | 26.95  | 46.00         | -19.05        | Peak   |
| 6 | 947.930 | 1.98   | 37.45         | 39.43  | 46.00         | -6.57         | Peak   |

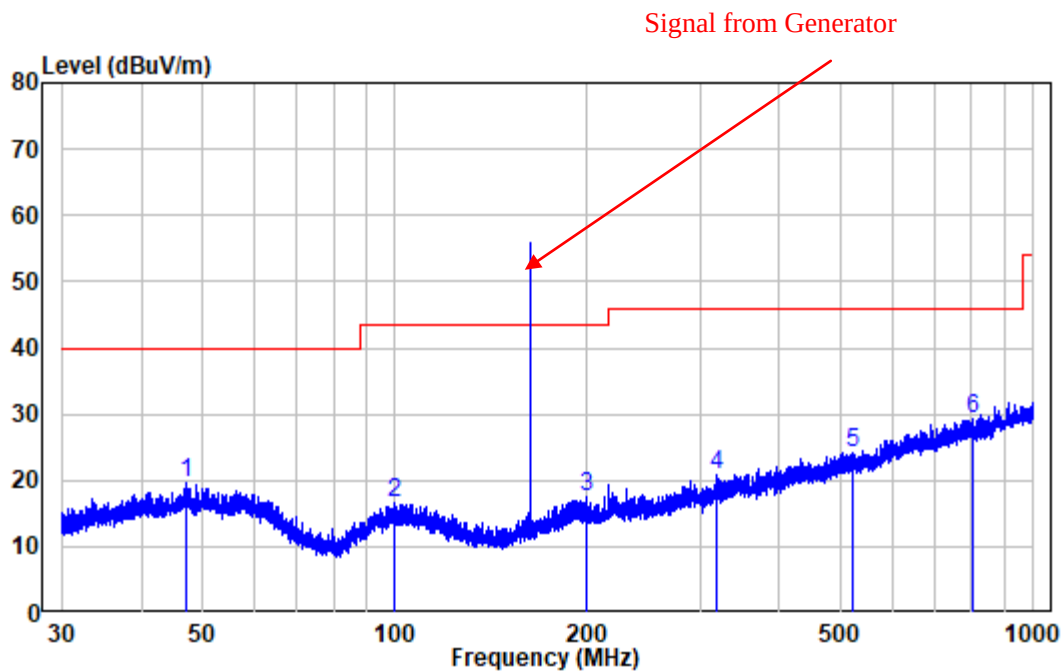**Test mode 5: NOAA Receiving at 162.4750MHz****Horizontal:**

Site : chamber


Condition: 3m HORIZONTAL

Job No. : XMTN1220728-34315E-EM

Test Mode: NOAA Receiving at 162.4750MHz

|   | Freq Factor |        | Read  | Limit  | Over   | Remark      |
|---|-------------|--------|-------|--------|--------|-------------|
|   | MHz         | dB/m   | Level | Line   | Limit  |             |
|   | MHz         | dB/m   | dBuV  | dBuV/m | dBuV/m | dB          |
| 1 | 46.892      | -10.00 | 29.62 | 19.62  | 40.00  | -20.38 Peak |
| 2 | 99.572      | -11.90 | 28.48 | 16.58  | 43.50  | -26.92 Peak |
| 3 | 199.986     | -11.40 | 29.04 | 17.64  | 43.50  | -25.86 Peak |
| 4 | 319.937     | -8.45  | 29.37 | 20.92  | 46.00  | -25.08 Peak |
| 5 | 520.432     | -4.30  | 28.39 | 24.09  | 46.00  | -21.91 Peak |
| 6 | 806.015     | -0.43  | 29.82 | 29.39  | 46.00  | -16.61 Peak |

## Vertical

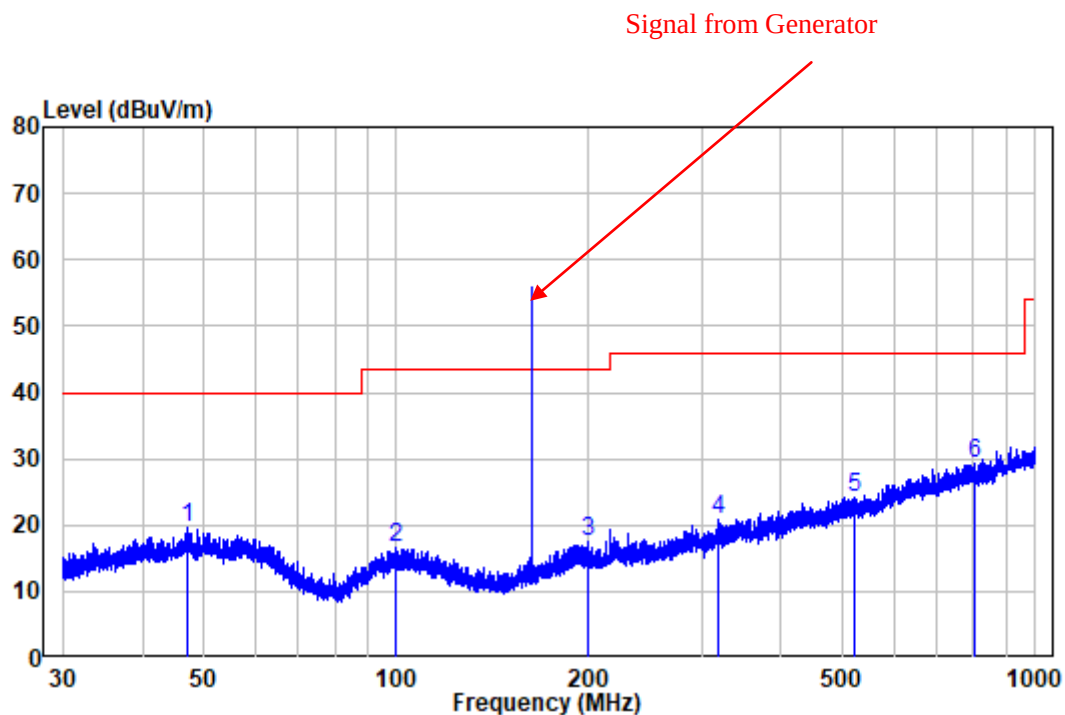

Site : chamber


Condition: 3m HORIZONTAL

Job No. : XMTN1220728-34315E-EM

Test Mode: NOAA Receiving at 162.4750MHz

|   | Freq    | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz     | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 46.892  | -10.00 | 29.62         | 19.62  | 40.00         | -20.38        | Peak   |
| 2 | 99.572  | -11.90 | 28.48         | 16.58  | 43.50         | -26.92        | Peak   |
| 3 | 199.986 | -11.40 | 29.04         | 17.64  | 43.50         | -25.86        | Peak   |
| 4 | 319.937 | -8.45  | 29.37         | 20.92  | 46.00         | -25.08        | Peak   |
| 5 | 520.432 | -4.30  | 28.39         | 24.09  | 46.00         | -21.91        | Peak   |
| 6 | 806.015 | -0.43  | 29.82         | 29.39  | 46.00         | -16.61        | Peak   |


Note: For below 1GHz, when the test result of peak was 6dB below to the limit of QP, just peak value was recorded.

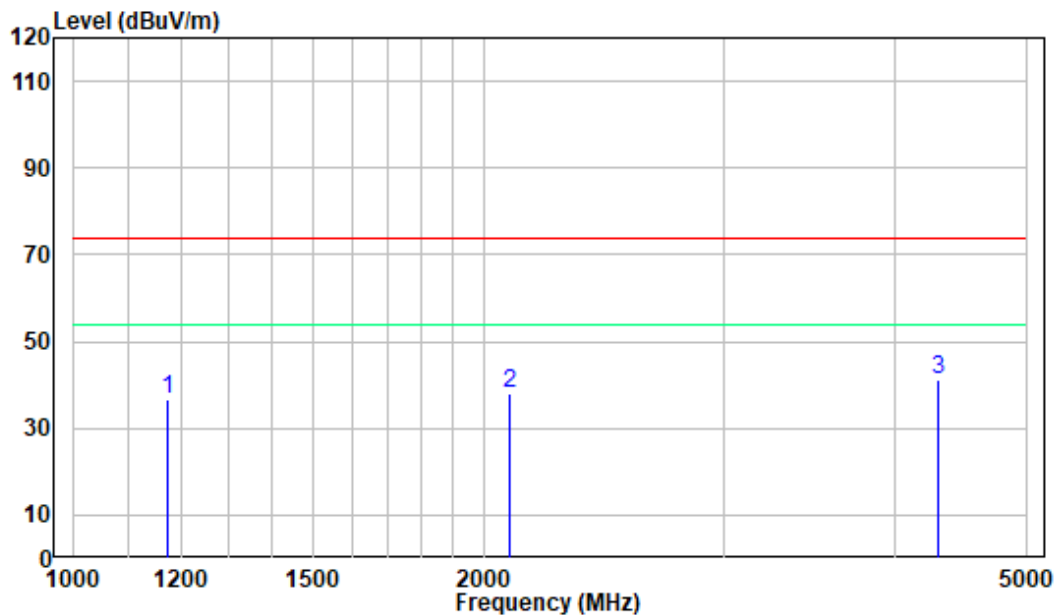**Above 1 GHz:****Test mode 1: Charging  
Horizontal:**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : XMTN1220728-34315E-EM  
Test Mode: Charging


|   | Freq     | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|----------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz      | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 1174.500 | -10.29 | 46.84         | 36.55  | 74.00         | -37.45        | Peak   |
| 2 | 2088.500 | -7.24  | 45.44         | 38.20  | 74.00         | -35.80        | Peak   |
| 3 | 4307.500 | -4.90  | 46.06         | 41.16  | 74.00         | -32.84        | Peak   |

## Vertical

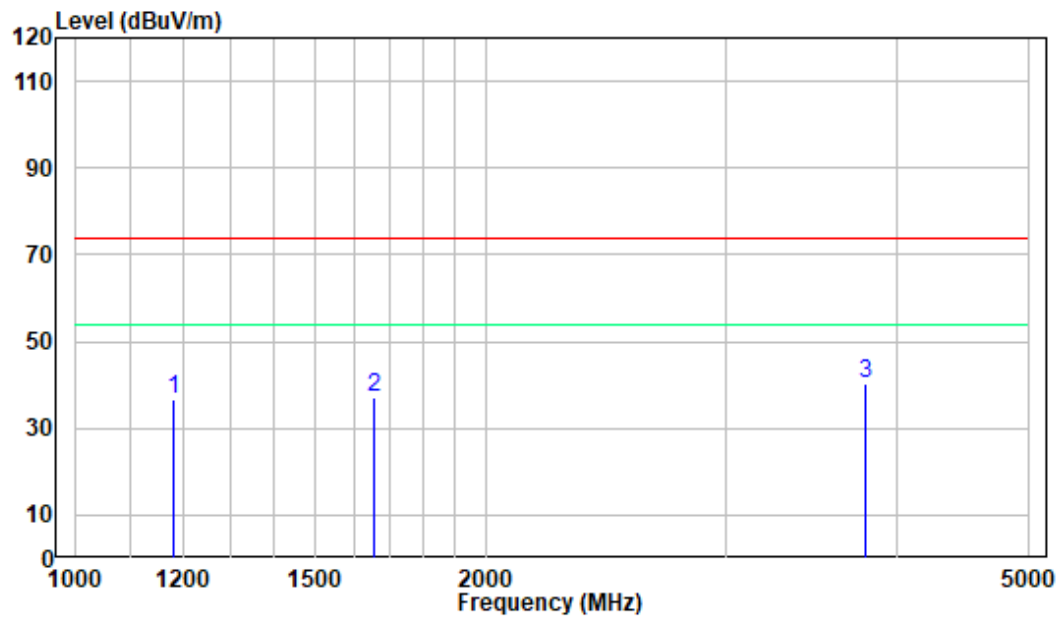

Site : chamber  
Condition: 3m VERTICAL  
Job No. : XMTN1220728-34315E-EM  
Test Mode: Charging

|   | Freq     | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|----------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz      | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 1182.500 | -10.27 | 46.76         | 36.49  | 74.00         | -37.51        | Peak   |
| 2 | 1658.000 | -9.05  | 46.35         | 37.30  | 74.00         | -36.70        | Peak   |
| 3 | 3797.500 | -5.71  | 45.98         | 40.27  | 74.00         | -33.73        | Peak   |

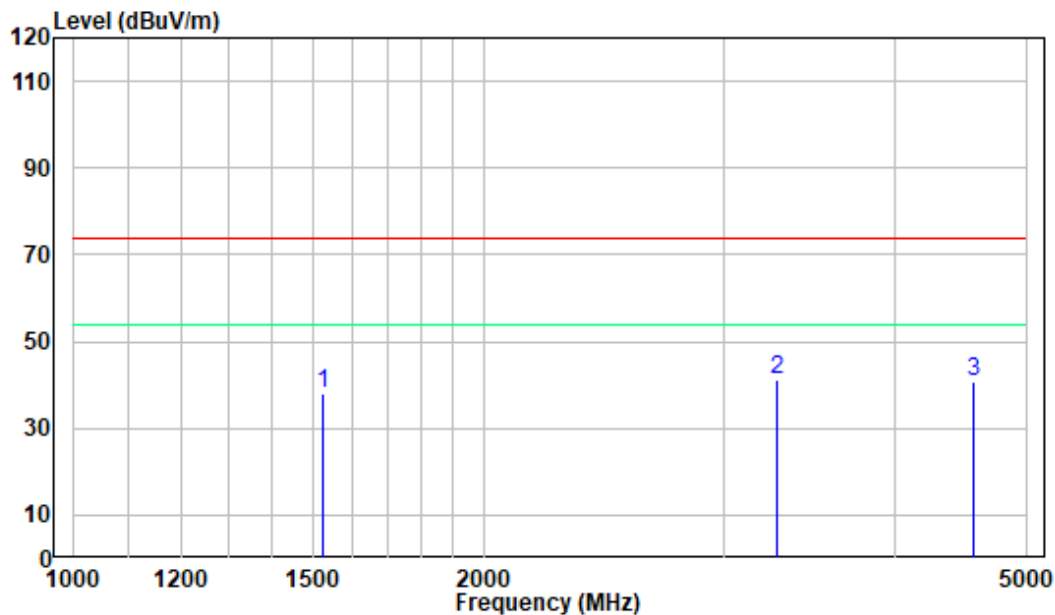**Test mode 2: Receiver at FM 76MHz****Horizontal:**

Site : chamber


Condition: 3m HORIZONTAL

Job No. : XMTN1220728-34315E-EM

Test Mode: Receive at FM 76MHz

|   | Freq     | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|----------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz      | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 1523.000 | -9.40  | 47.59         | 38.19  | 74.00         | -35.81        | Peak   |
| 2 | 3279.500 | -5.96  | 47.09         | 41.13  | 74.00         | -32.87        | Peak   |
| 3 | 4563.000 | -4.48  | 45.44         | 40.96  | 74.00         | -33.04        | Peak   |

## Vertical

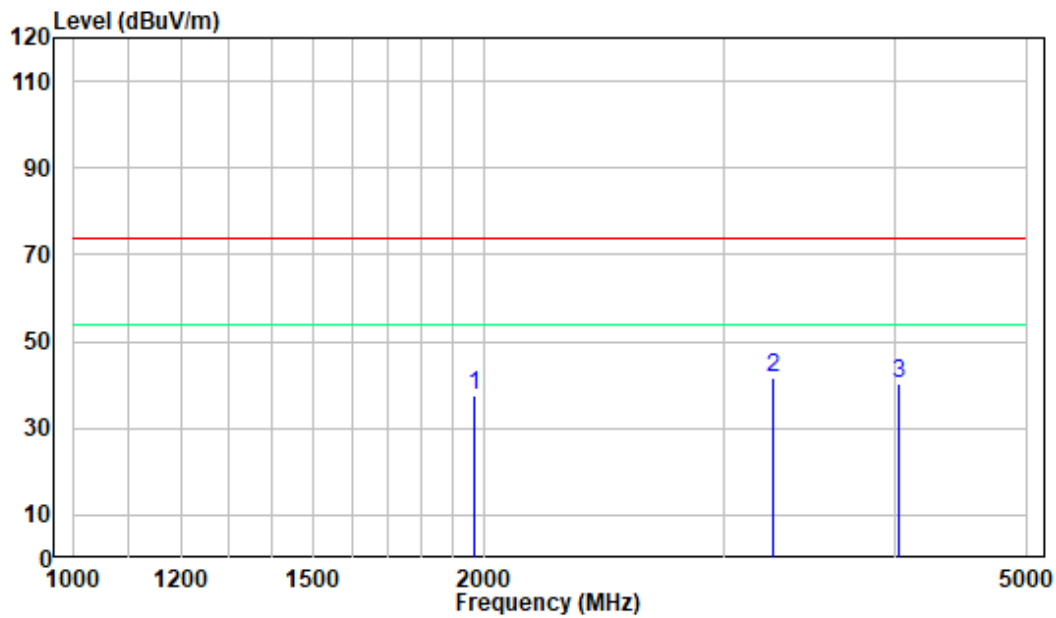


Site : chamber

Condition: 3m VERTICAL

Job No. : XMTN1220728-34315E-EM

Test Mode: Receive at FM 76MHz

|   | Freq     | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|----------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz      | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 1969.000 | -7.49  | 45.22         | 37.73  | 74.00         | -36.27        | Peak   |
| 2 | 3260.000 | -5.97  | 47.45         | 41.48  | 74.00         | -32.52        | Peak   |
| 3 | 4027.000 | -5.37  | 45.80         | 40.43  | 74.00         | -33.57        | Peak   |

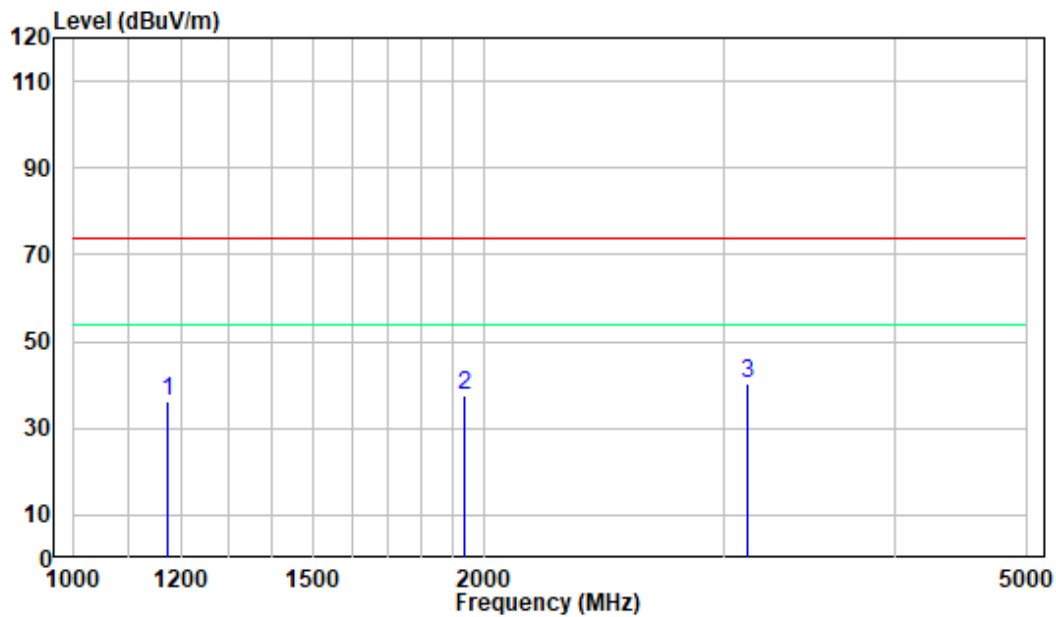**Test mode 3: Receiver at FM 92MHz****Horizontal:**

Site : chamber


Condition: 3m HORIZONTAL

Job No. : XMTN1220728-34315E-EM

Test Mode: Receive at FM 92MHz

|   | Freq     | Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|----------|--------|------------|--------|------------|------------|--------|
|   | MHz      | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 1174.000 | -10.29 | 46.48      | 36.19  | 74.00      | -37.81     | Peak   |
| 2 | 1935.000 | -7.75  | 45.50      | 37.75  | 74.00      | -36.25     | Peak   |
| 3 | 3118.000 | -5.85  | 46.29      | 40.44  | 74.00      | -33.56     | Peak   |

## Vertical

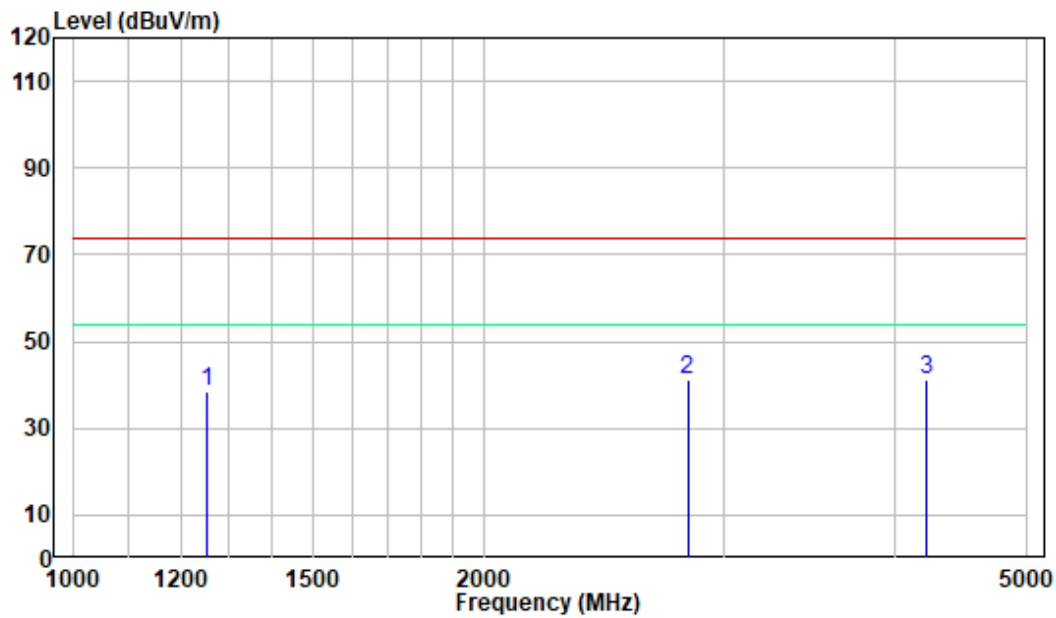


Site : chamber

Condition: 3m VERTICAL

Job No. : XMTN1220728-34315E-EM

Test Mode: Receive at FM 92MHz

|   | Freq     | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|----------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz      | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 1254.000 | -10.12 | 48.74         | 38.62  | 74.00         | -35.38        | Peak   |
| 2 | 2820.000 | -6.23  | 47.41         | 41.18  | 74.00         | -32.82        | Peak   |
| 3 | 4215.000 | -5.05  | 46.31         | 41.26  | 74.00         | -32.74        | Peak   |

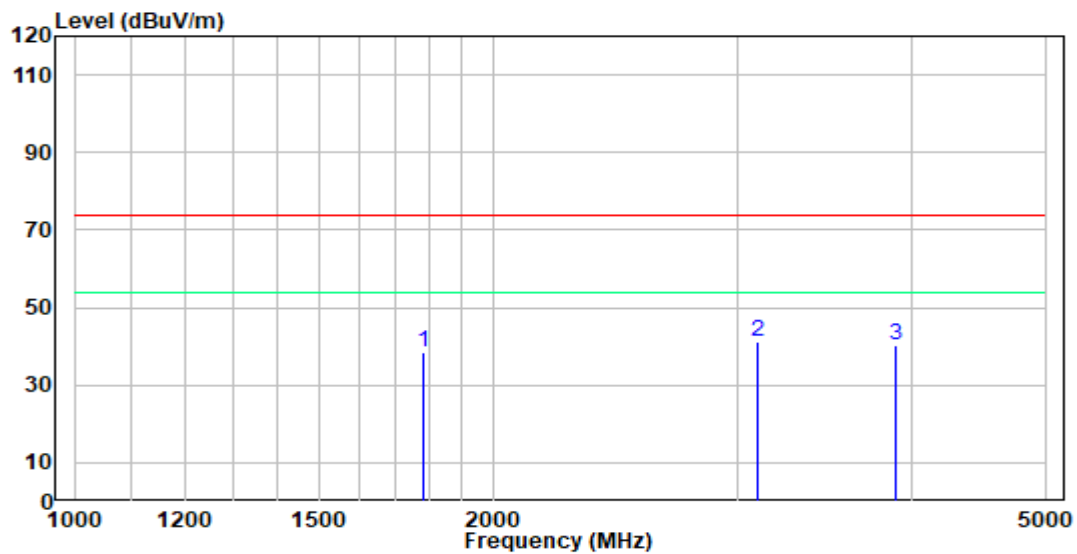**Test mode 4: Receiver at FM 108MHz****Horizontal:**

Site : chamber


Condition: 3m HORIZONTAL

Job No. : XMTN1220728-34315E-EM

Test Mode: Receive at FM 108MHz


|   | Freq     | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|----------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz      | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 1782.500 | -8.79  | 47.24         | 38.45  | 74.00         | -35.55        | Peak   |
| 2 | 3096.000 | -5.86  | 47.24         | 41.38  | 74.00         | -32.62        | Peak   |
| 3 | 3890.500 | -5.56  | 45.99         | 40.43  | 74.00         | -33.57        | Peak   |

## Vertical

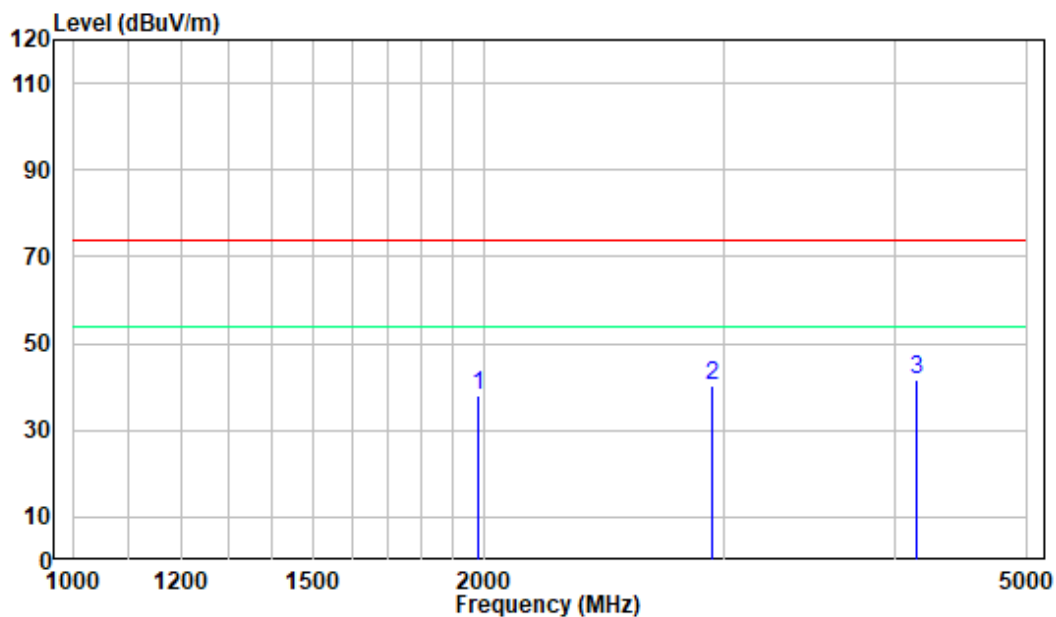

Site : chamber  
Condition: 3m VERTICAL  
Job No. : XMTN1220728-34315E-EM  
Test Mode: Receive at FM 108MHz

|   | Freq     | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|----------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz      | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 1980.000 | -7.42  | 45.40         | 37.98  | 74.00         | -36.02        | Peak   |
| 2 | 2939.500 | -5.98  | 46.48         | 40.50  | 74.00         | -33.50        | Peak   |
| 3 | 4149.000 | -5.20  | 46.72         | 41.52  | 74.00         | -32.48        | Peak   |

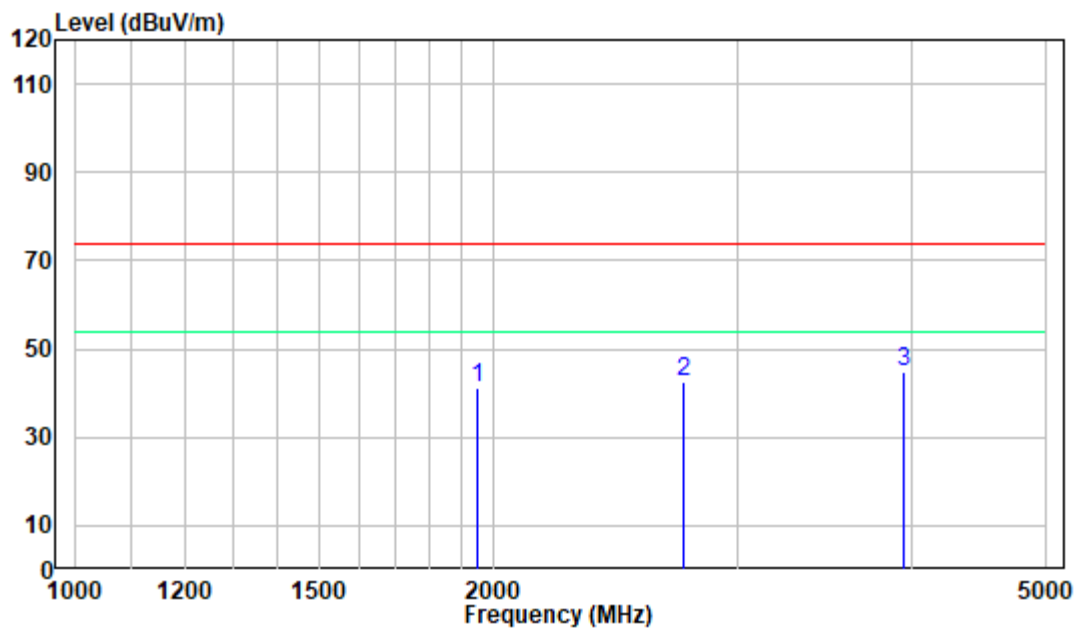**Test mode 5: NOAA Receiving at 162.4750MHz****Horizontal:**

Site : chamber


Condition: 3m HORIZONTAL

Job No. : XMTN1220728-34315E-EM

Test Mode: NOAA Receiving at 162.4750MHz

|   | Freq     | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|----------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz      | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 1949.000 | -7.62  | 48.77         | 41.15  | 74.00         | -32.85        | Peak   |
| 2 | 2738.000 | -6.61  | 49.27         | 42.66  | 74.00         | -31.34        | Peak   |
| 3 | 3947.000 | -5.49  | 50.51         | 45.02  | 74.00         | -28.98        | Peak   |

## Vertical

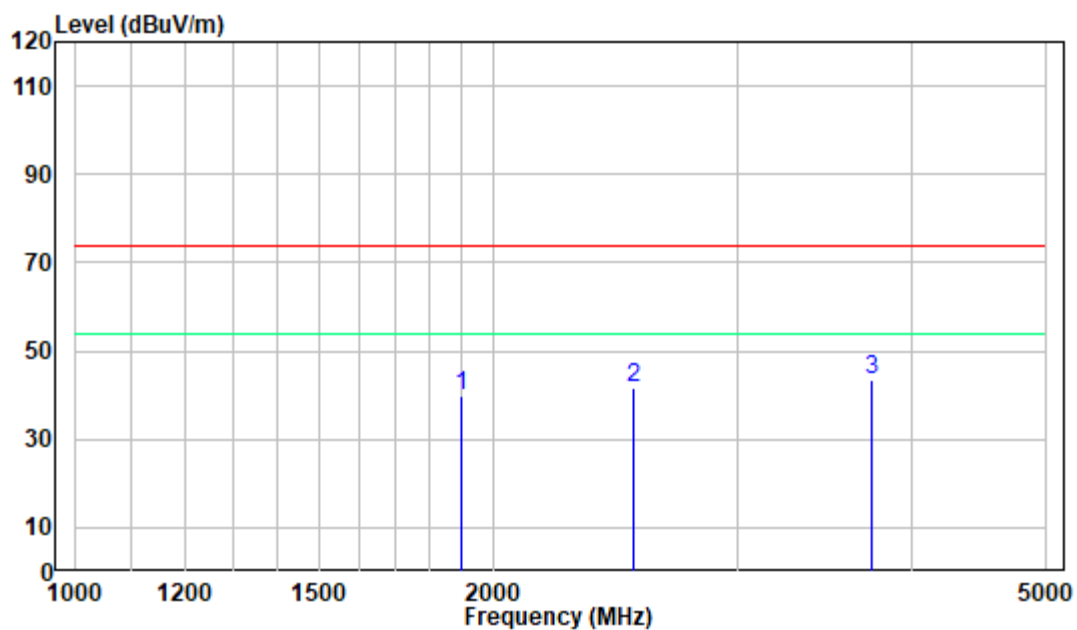

Site : chamber

Condition: 3m VERTICAL

Job No. : XMTN1220728-34315E-EM

Test Mode: NOAA Receiving at 162.4750MHz

|   | Freq     | Factor | Read<br>Level | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|----------|--------|---------------|--------|---------------|---------------|--------|
|   | MHz      | dB/m   | dBuV          | dBuV/m | dBuV/m        | dB            |        |
| 1 | 1899.000 | -8.04  | 47.82         | 39.78  | 74.00         | -34.22        | Peak   |
| 2 | 2526.000 | -7.05  | 48.69         | 41.64  | 74.00         | -32.36        | Peak   |
| 3 | 3749.000 | -5.69  | 49.35         | 43.66  | 74.00         | -30.34        | Peak   |

**FCC §15.111 - ANTENNA CONDUCTED POWER FOR RECEIVERS****Applicable Standard**

FCC §15.111

**Limit**

The antenna conducted power of the receiver as defined in §15.111 shall not exceed the values given in the following tables

| Frequency Range | Limit            |
|-----------------|------------------|
| 9 kHz to 5 GHz  | 2.0 nW (-57 dBm) |

**EUT Setup****Test Procedure**

1. The receiver antenna terminal connected to a spectrum analyzer.
2. The test data of the worst case condition was reported on the following Data page.


**Test Data****Environmental Conditions**

|                    |        |
|--------------------|--------|
| Temperature:       | 25 °C  |
| Relative Humidity: | 52 %   |
| ATM Pressure:      | 101kPa |

*The testing was performed by Jesse Chen on 2022-12-21*


Test mode 2:

## Conducted Measurement (9 kHz to 150 kHz)

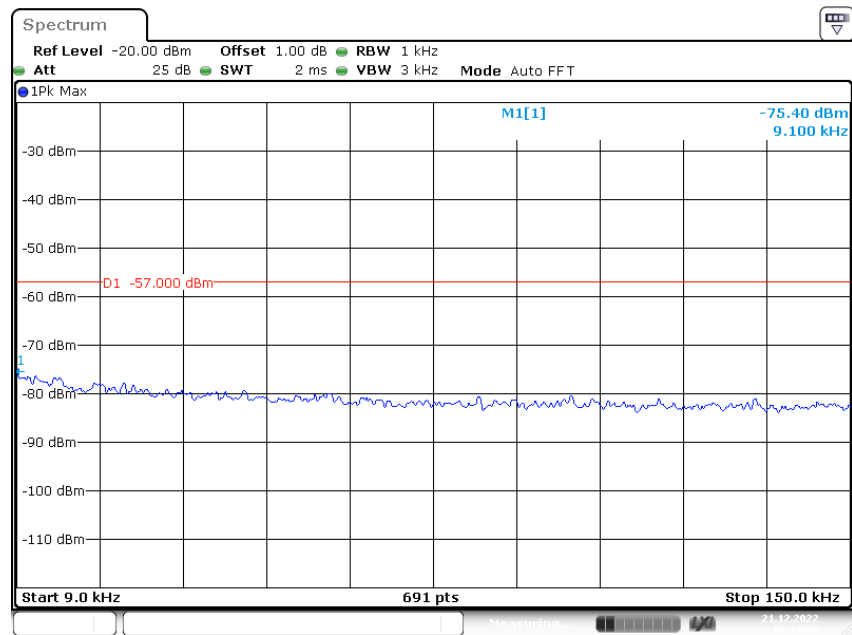


Date: 21.DEC.2022 17:18:45


## Conducted Measurement (150 kHz to 30MHz)

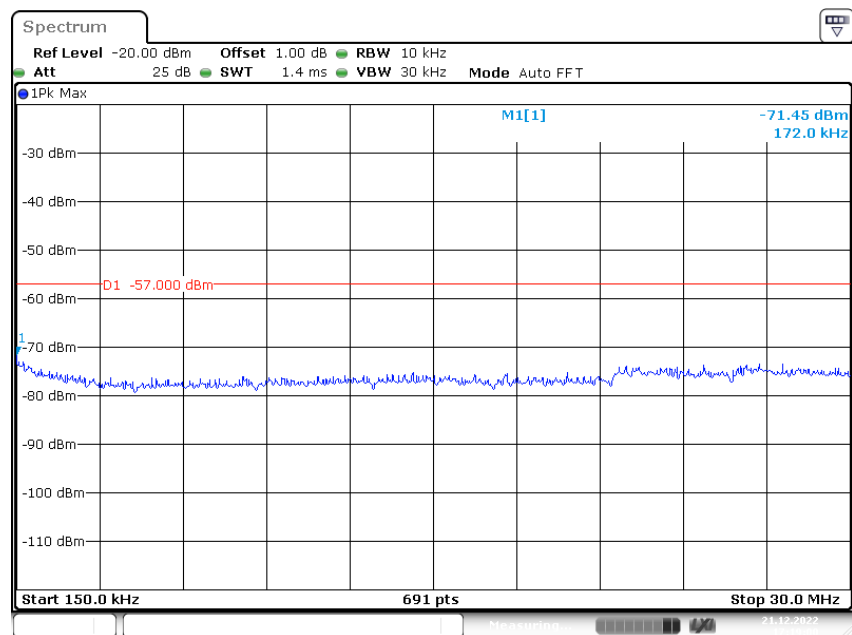

Date: 21.DEC.2022 17:19:01

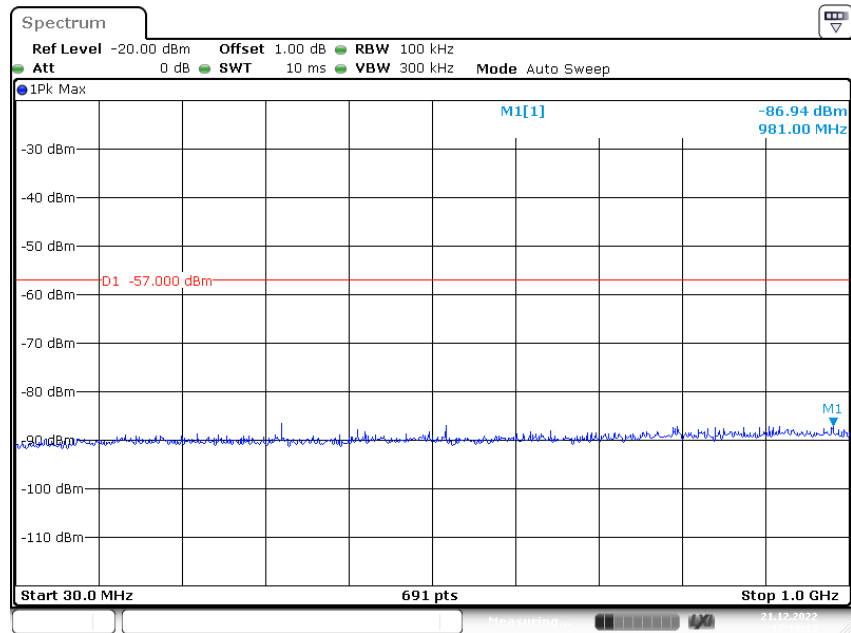**Conducted Measurement (30MHz to 1GHz)**


Date: 21.DEC.2022 17:19:16

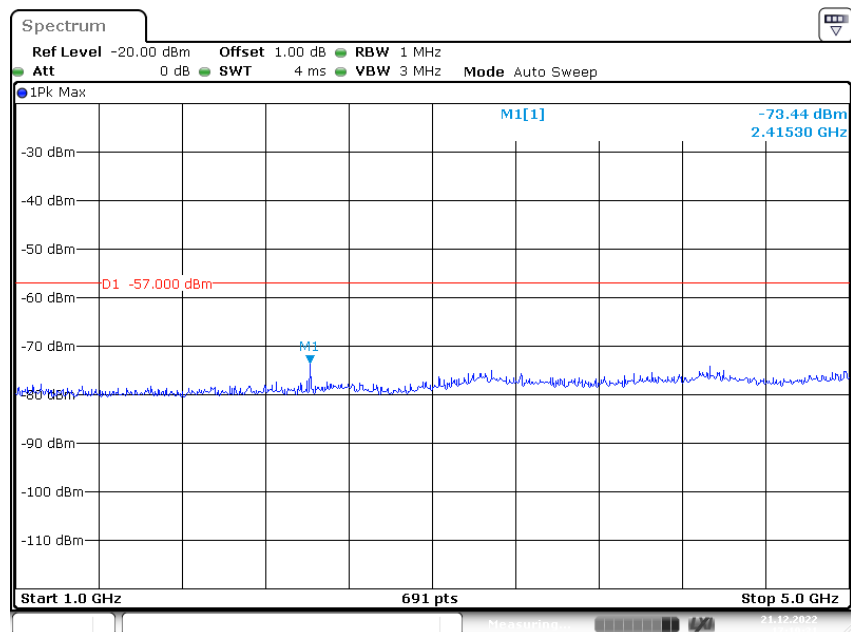**Conducted Measurement (1GHz to 5GHz)**

Date: 21.DEC.2022 17:19:31


Test mode 3:

## Conducted Measurement (9 kHz to 150 kHz)

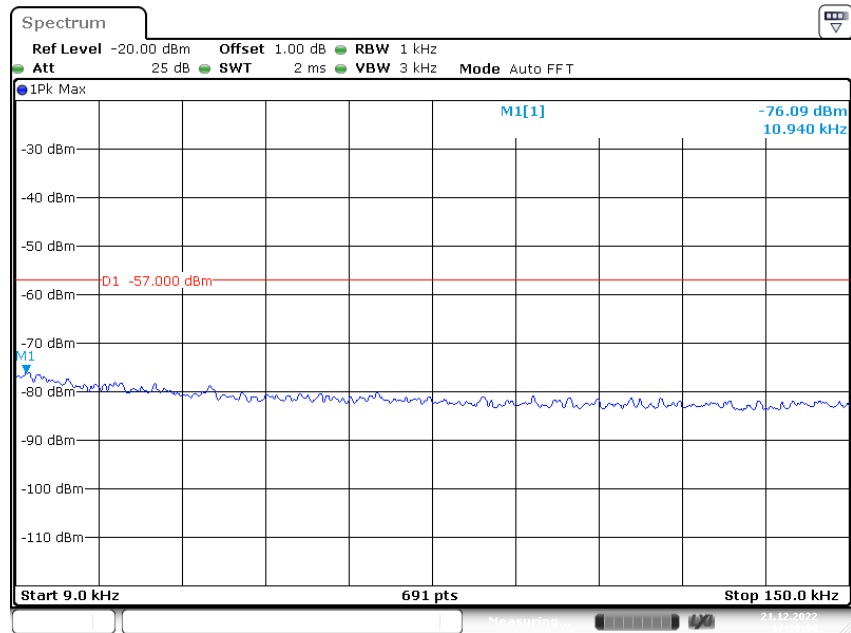


Date: 21.DEC.2022 17:20:09


## Conducted Measurement (150 kHz to 30MHz)

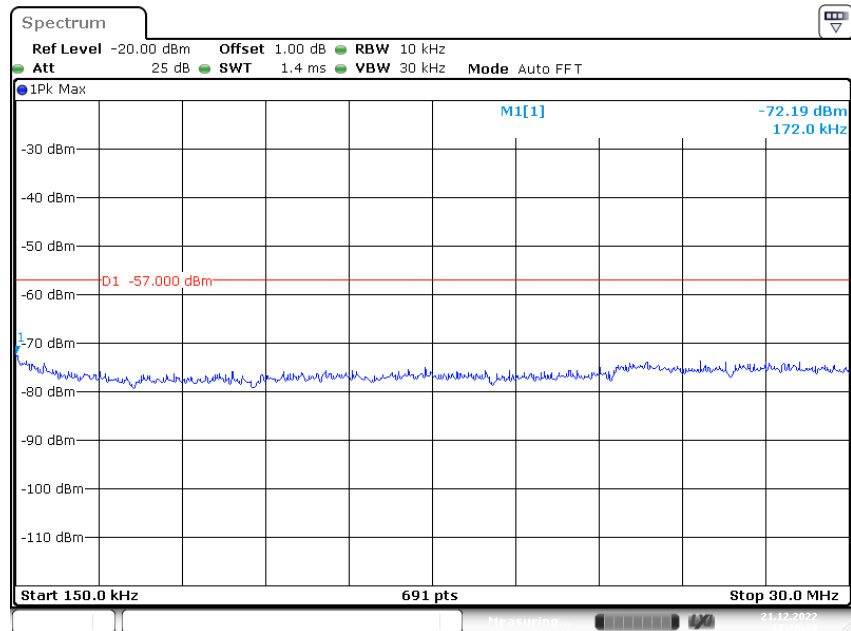

Date: 21.DEC.2022 17:20:24

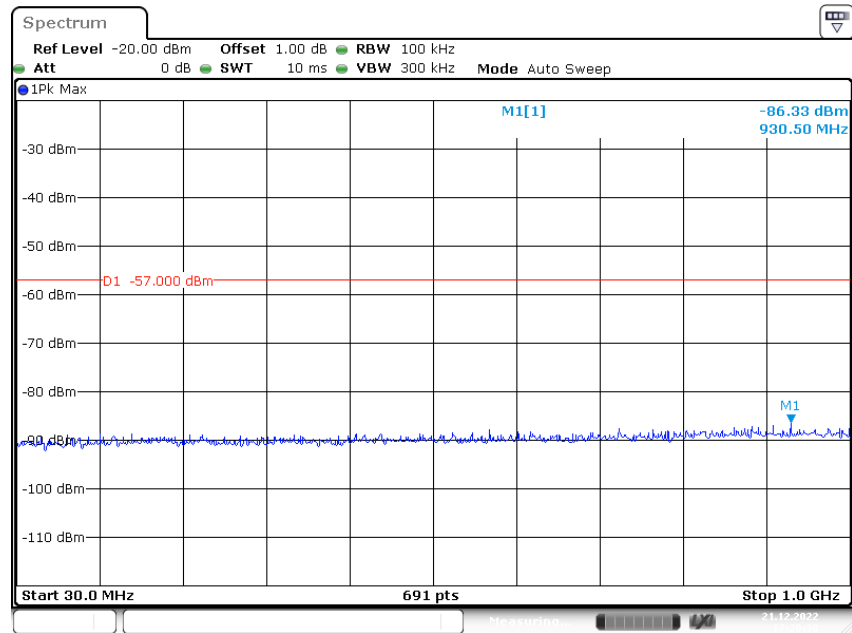**Conducted Measurement (30MHz to 1GHz)**


Date: 21.DEC.2022 17:20:39

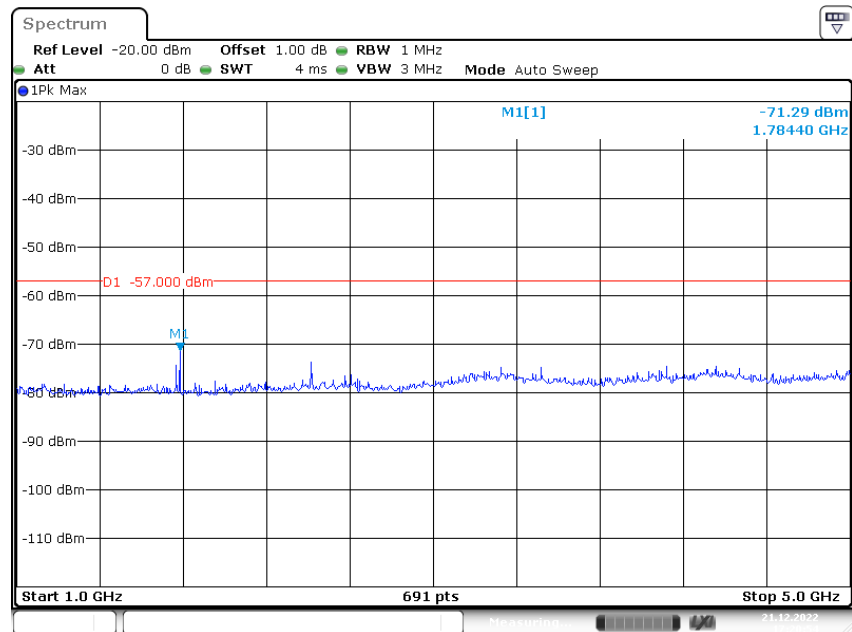**Conducted Measurement (1GHz to 5GHz)**


Date: 21.DEC.2022 17:20:54


Test mode 4:

### Conducted Measurement (9 kHz to 150 kHz)

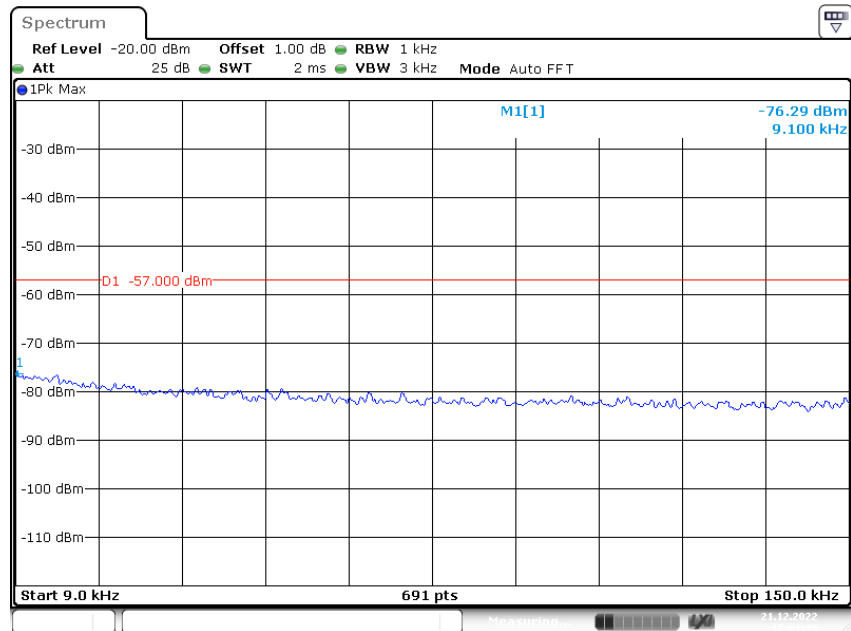


### Conducted Measurement (150 kHz to 30MHz)

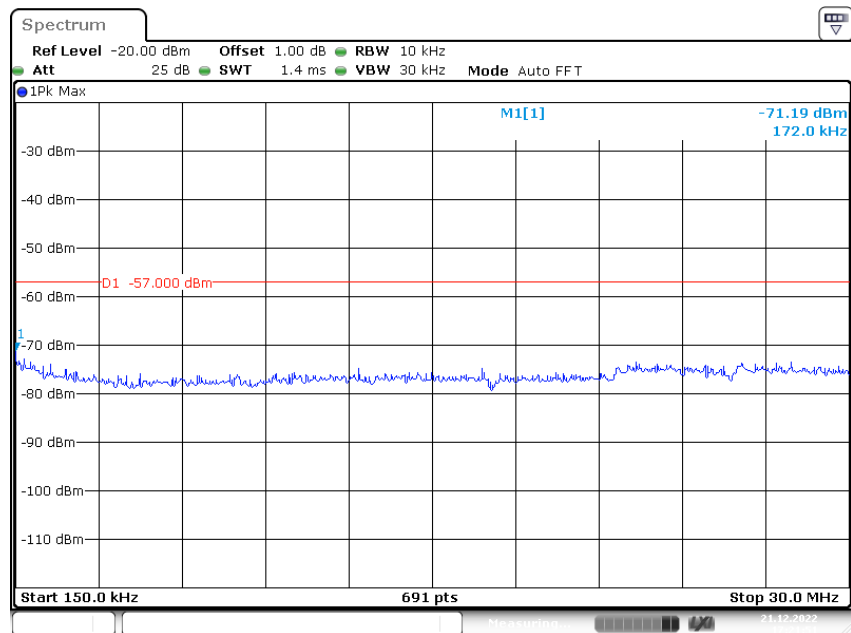

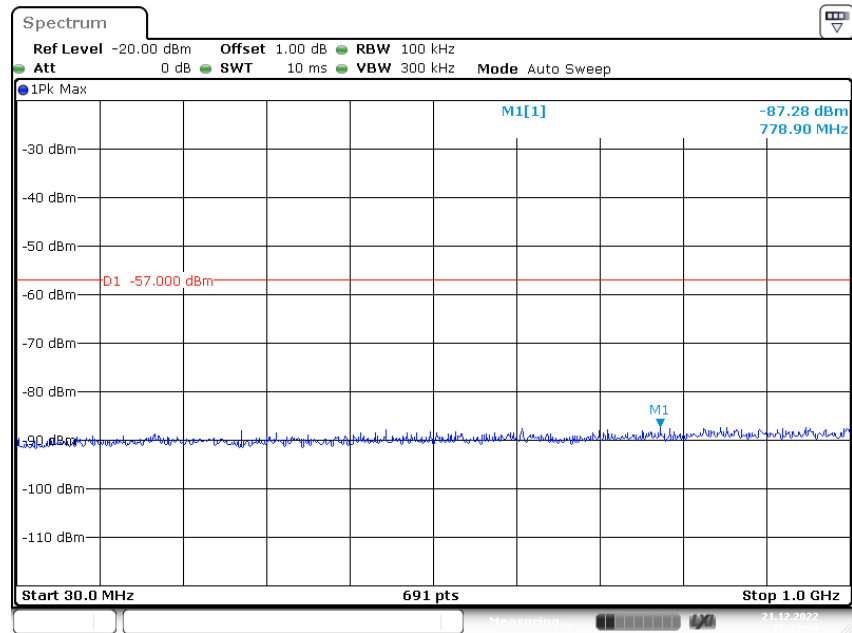**Conducted Measurement (30MHz to 1GHz)**


Date: 21.DEC.2022 17:22:07

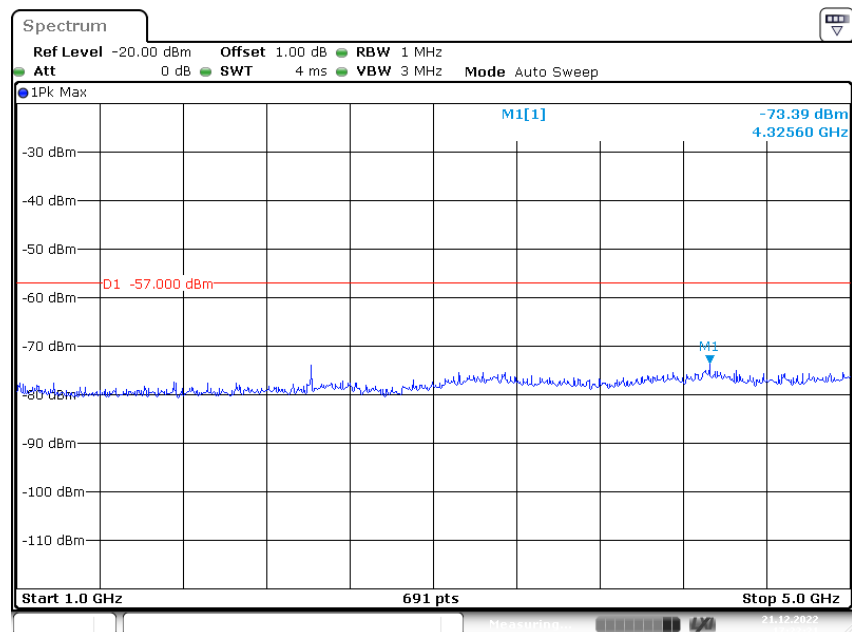**Conducted Measurement (1GHz to 5GHz)**

Date: 21.DEC.2022 17:22:22


Test mode 5:

## Conducted Measurement (9 kHz to 150 kHz)

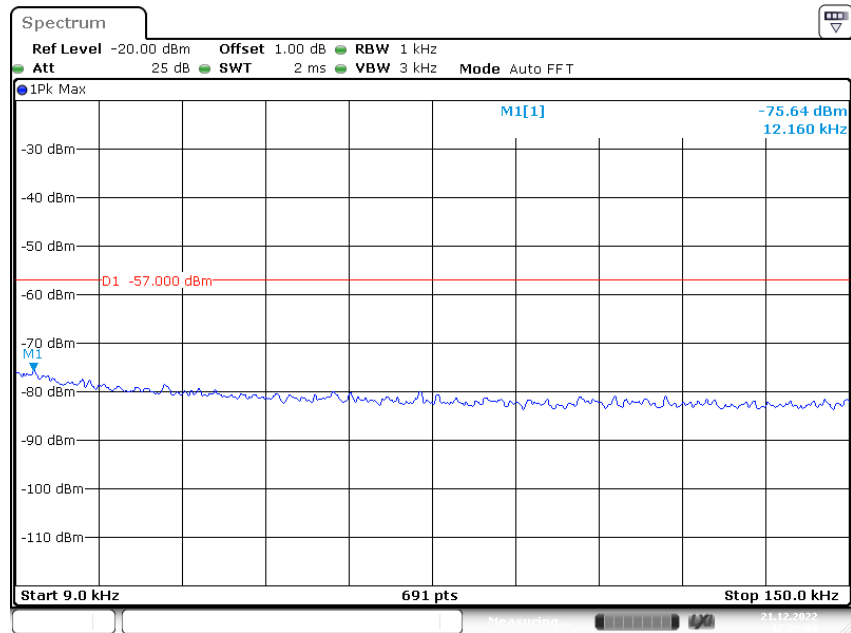


Date: 21.DEC.2022 17:26:00


## Conducted Measurement (150 kHz to 30MHz)

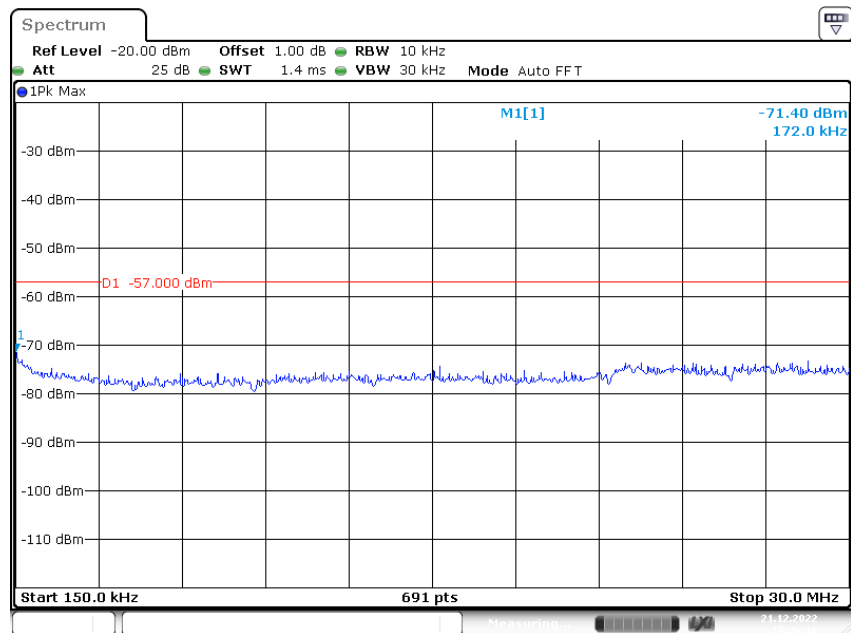

Date: 21.DEC.2022 17:26:16

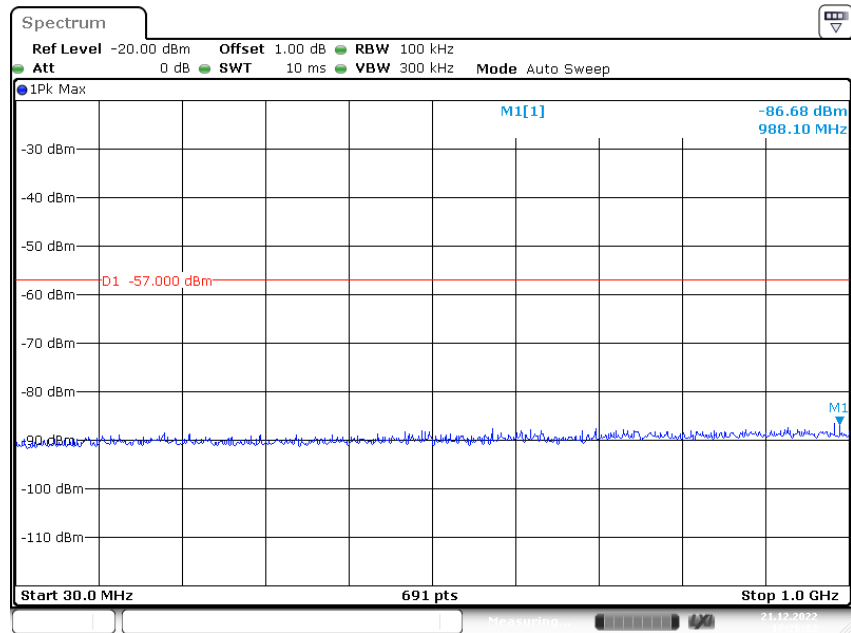**Conducted Measurement (30MHz to 1GHz)**

Date: 21.DEC.2022 17:26:32

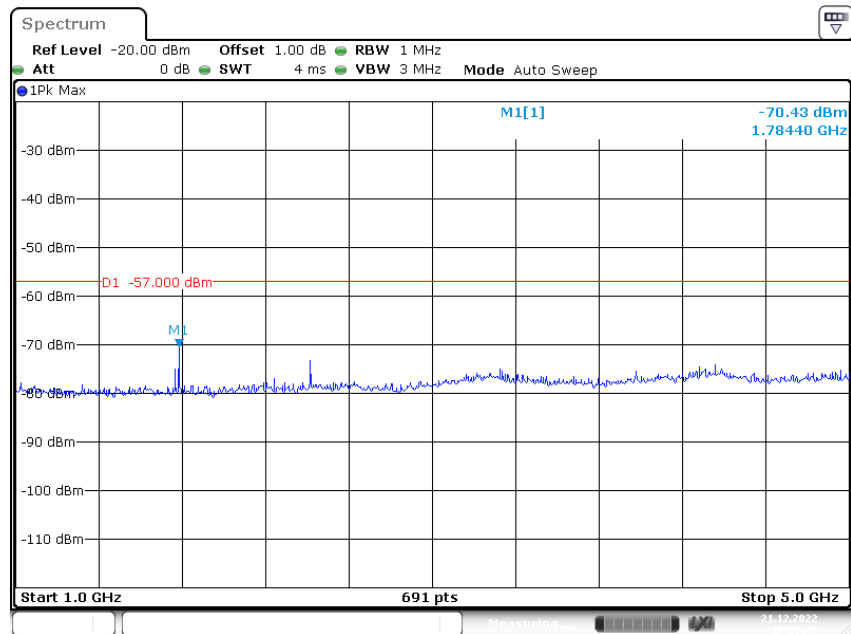**Conducted Measurement (1GHz to 5GHz)**

Date: 21.DEC.2022 17:26:47

**\*\*\*\*\*END OF REPORT\*\*\*\*\***