

TEST REPORT

Report No.: BCTC2104449796-1E

Applicant: ShenZhen YuYuanXin Electronic Technology Co., LTD.

Product Name: JOY-PAD (L) / (R)

Model/Type Ref.: TNS-0163(R)

Tested Date: 2021-04-27 to 2021-05-24

Issued Date: 2021-05-26



Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2AJJCTNS-0163R

Product Name: JOY-PAD (L) / (R)
Trademark: N/A
Model/Type Ref.: TNS-0163(R)
Prepared For: ShenZhen YuYuanXin Electronic Technology Co., LTD.
Address: Building 11, Tianluohu Industry Park, Guihua Industry Area,
Guangang Road, Guanlan Town, Longhua District,
Shenzhen, Guangdong, China, 518110
Manufacturer: ShenZhen YuYuanXin Electronic Technology Co., LTD.
Address: Building 11, Tianluohu Industry Park, Guihua Industry Area,
Guangang Road, Guanlan Town, Longhua District,
Shenzhen, Guangdong, China, 518110
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st
Road, Qiaotou Community, Fuyong Street, Bao'an District,
Shenzhen, China
Sample Received Date: 2021-04-21
Sample tested Date: 2021-04-27 to 2021-05-24
Issue Date: 2021-05-26
Report No.: BCTC2104449796-1E
Test Standards: FCC Part15.225
ANSI C63.10-2013
Test Results: PASS
Remark: This is NFC radio test report.

Tested by:



Eric Yang/Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration		Page
1. VERSION		5
2. TEST SUMMARY		6
3. MEASUREMENT UNCERTAINTY		7
4. PRODUCT INFORMATION AND TEST SETUP		8
4.1 Product Information		8
4.2 Test Setup Configuration		8
4.3 Support Equipment		9
4.4 Channel List		9
4.5 Test Mode		9
5. TEST FACILITY AND TEST INSTRUMENT USED		10
5.1 Test Facility		10
5.2 Test Instrument Used		10
6. CONDUCTED EMISSIONS		12
6.1 Block Diagram Of Test Setup		12
6.2 Limit		12
6.3 Test procedure		12
6.4 EUT operating Conditions		13
6.5 Test Result		13
7. RADIATED EMISSIONS		16
7.1 Block Diagram Of Test Setup		16
7.2 Limit		17
7.4 EUT operating Conditions		18
7.5 Test Result		19
8. RADIATED BAND EMISSION MEASUREMENT		22
8.1 Block Diagram Of Test Setup		22
8.2 Limit		22
8.3 Test procedure		23
8.4 EUT operating Conditions		23
8.5 Test Result		24
9. BANDWIDTH TEST		25
9.1 Block Diagram Of Test Setup		25
9.3 Test procedure		25
9.4 EUT operation conditions		25
9.5 Test Result		26
10. TRANSMITTER FREQUENCY STABILITY		27
10.1 Block Diagram Of Test Setup		27
10.2 Limit		27
10.3 Test procedure		27
10.4 EUT operating Conditions		27
10.5 Test Result		28


11. ANTENNA REQUIREMENT	29
11.1 STANDARD REQUIREMENT	29
11.2 EUT ANTENNA	29
12. EUT PHOTOGRAPHS	30
13. EUT TEST SETUP PHOTOGRAPHS	31

(Note: N/A means not applicable)

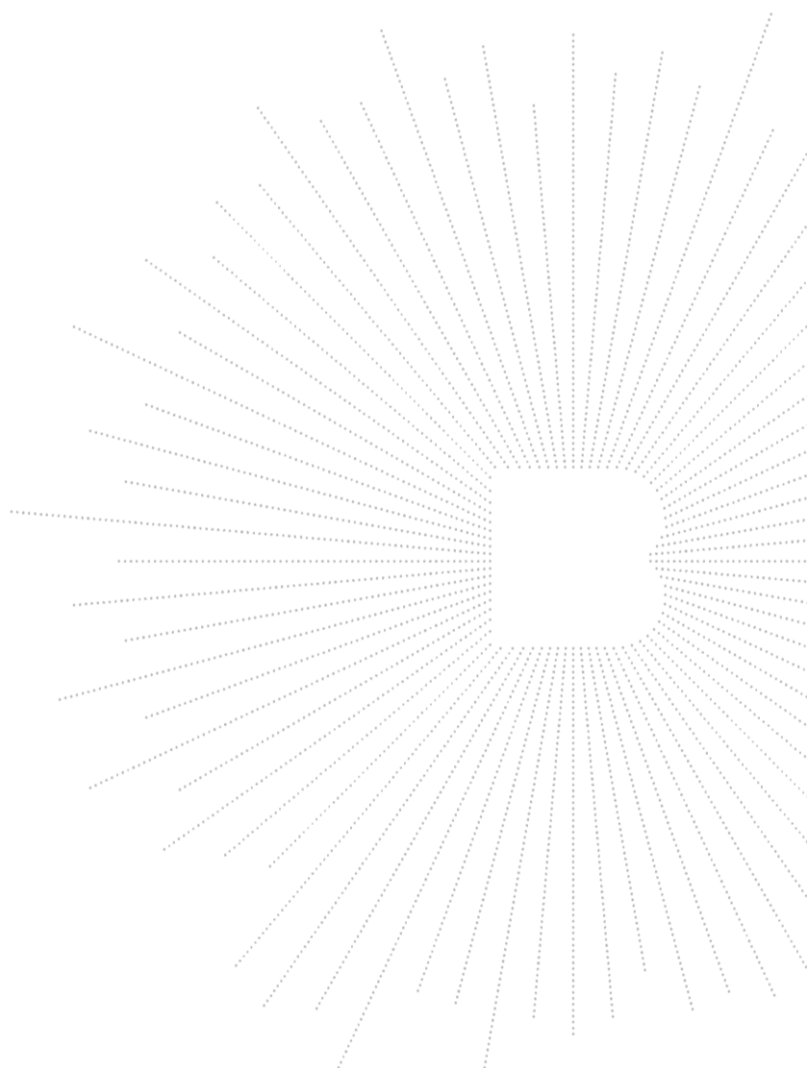

1. VERSION


Report No.	Issue Date	Description	Approved
BCTC2104449796-1E	2021-05-26	Original	Valid

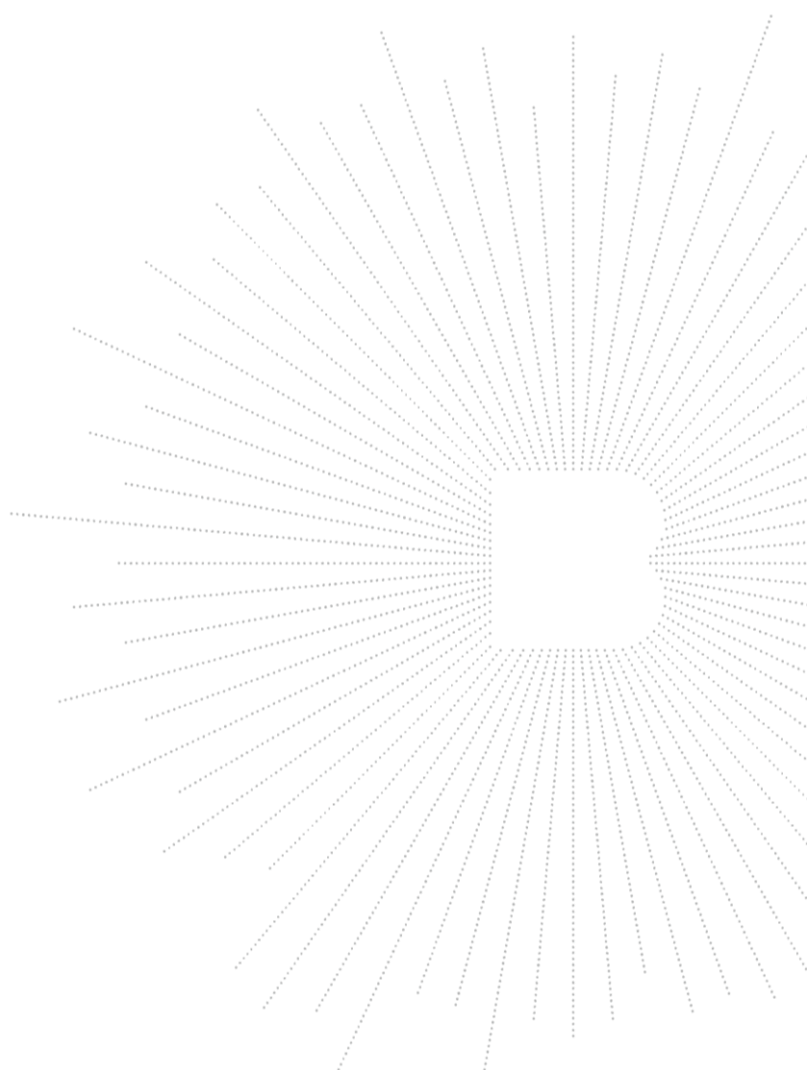

2. TEST SUMMARY

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	15.207	Conducted Emission	PASS
2	Part 15.209(a), 15.225(d)	Radiated Spurious Emission	PASS
3	15.215	Bandwidth	PASS
4	Part 15.209(a), 15.225(a)(b)(c)(d)	Band Edge Emission	PASS
5	Part 15.225(e)	Transmitter Frequency Stability (Temperature & Voltage Variation)	PASS
6	15.203	Antenna Requirement	PASS

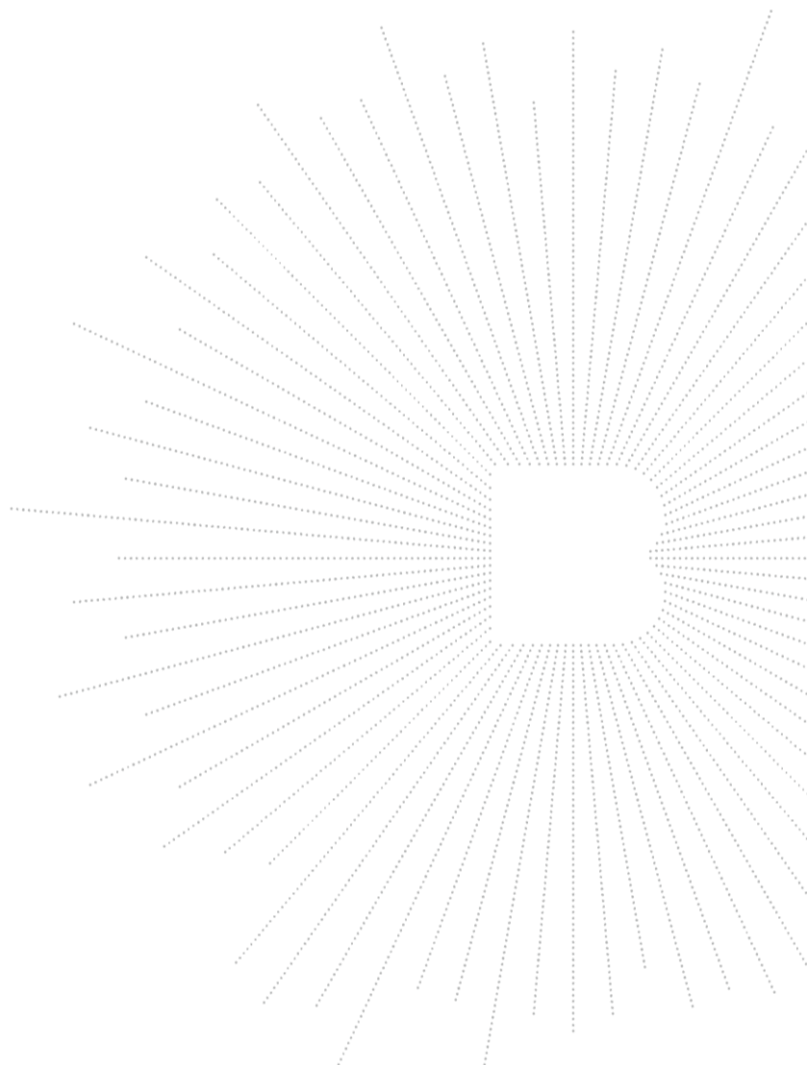

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Adjacent channel power	U=1.38dB
6	Conducted output power uncertainty Above 1G	U=1.576dB
7	Conducted output power uncertainty below 1G	U=1.28dB
8	humidity uncertainty	U=5.3%
9	Temperature uncertainty	U=0.59°C

4. PRODUCT INFORMATION AND TEST SETUP


4.1 Product Information

Model/Type Ref.:	TNS-0163(R)
Model differences:	N/A
Operation Frequency:	13.56MHz
Modulation Type:	ASK
Number Of Channel	1 CH
Antenna type:	Coil Antenna
Antenna Gain:	0dBi
Ratings:	DC 3.7V



4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission

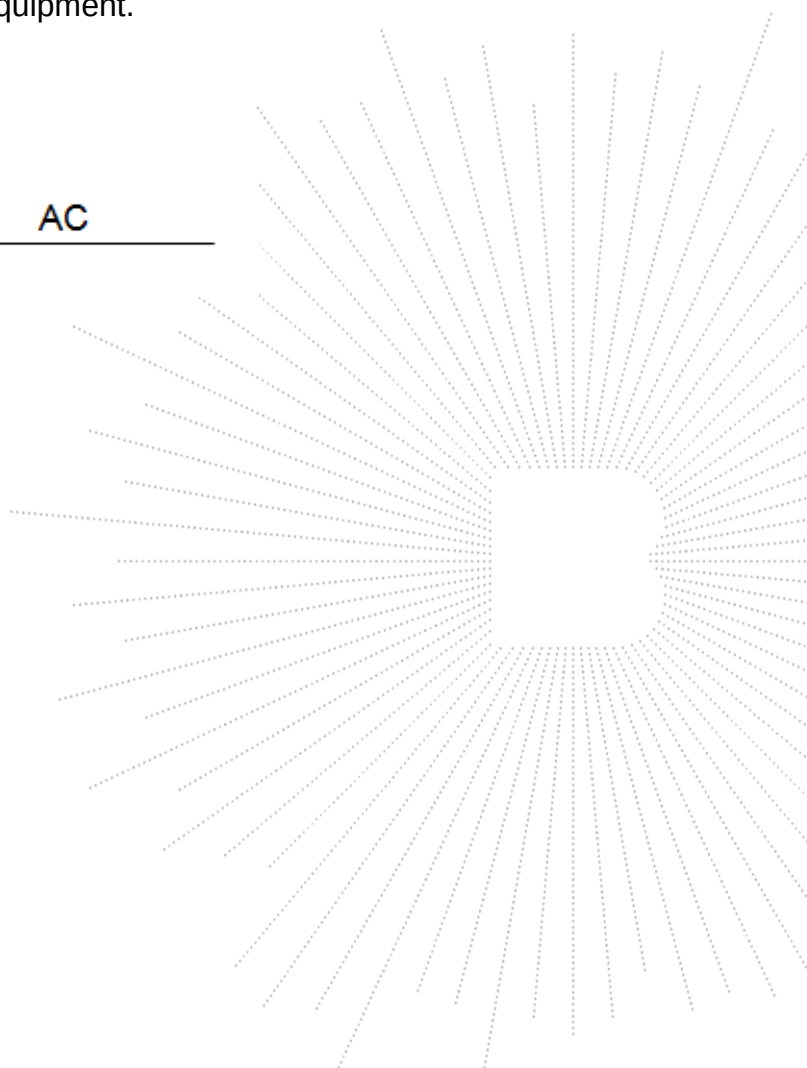

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-2	Adapter	N/A	BCTC001	N/A	Auxiliary

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List	
Channel	Frequency(MHz)
01	13.56

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description
Mode 1	TX Mode

Link mode(conducted emission and Radiated emission)	
Final Test Mode	Description
Mode 1	TX Mode

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583


5.2 Test Instrument Used

Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	Jun. 08, 2020	Jun. 07, 2021
LISN	R&S	ENV216	101375	Jun. 04, 2020	Jun. 03, 2021
ISN	HPX	ISN T800	S1509001	Jun. 04, 2020	Jun. 03, 2021
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

Radiated emissions Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	Jun. 08, 2020	Jun. 07, 2021
Receiver	R&S	ESRP	101154	Jun. 08, 2020	Jun. 07, 2021
Amplifier	Schwarzbeck	BBV9718	9718-309	Jun. 04, 2020	Jun. 03, 2021
Amplifier	Schwarzbeck	BBV9744	9744-0037	Jun. 04, 2020	Jun. 03, 2021
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	VULB9163-942	Jun. 08, 2020	Jun. 07, 2021
Horn Antenna	SCHWARZBECK	BBHA9120 D	1541	Jun. 10, 2020	Jun. 09, 2021
Horn Antenna (18GHz-40 GHz)	SCHWARZBECK	BBHA9170	822	Jun. 10, 2020	Jun. 09, 2021
Amplifier (18GHz-40 GHz)	MITEQ	TTA1840-3 5-HG	2034381	Jun. 08, 2020	Jun. 07, 2021
Loop Antenna (9KHz-30M Hz)	SCHWARZBECK	FMZB1519 B	014	Jun. 08, 2020	Jun. 07, 2021
RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30M Hz	B1702988-0008	Jun. 08, 2020	Jun. 07, 2021
RF cables2 (30MHz-1G Hz)	Huber+Suhnar	30MHz-1G Hz	1486150	Jun. 08, 2020	Jun. 07, 2021
RF cables3 (1GHz-40G Hz)	Huber+Suhnar	1GHz-40G Hz	1607106	Jun. 08, 2020	Jun. 07, 2021
Power Metter	Keysight	E4419B	\	Jun. 08, 2020	Jun. 07, 2021
Power Sensor (AV)	Keysight	E9 300A	\	Jun. 08, 2020	Jun. 07, 2021
Signal Analyzer 20kHz-26.5 GHz	KEYSIGHT	N9020A	MY491000 60	Jun. 04, 2020	Jun. 03, 2021
Spectrum Analyzer 9kHz-40G Hz	Agilent	FSP40	100363	Jun. 08, 2020	Jun. 07, 2021
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. CONDUCTED EMISSIONS

6.1 Block Diagram Of Test Setup

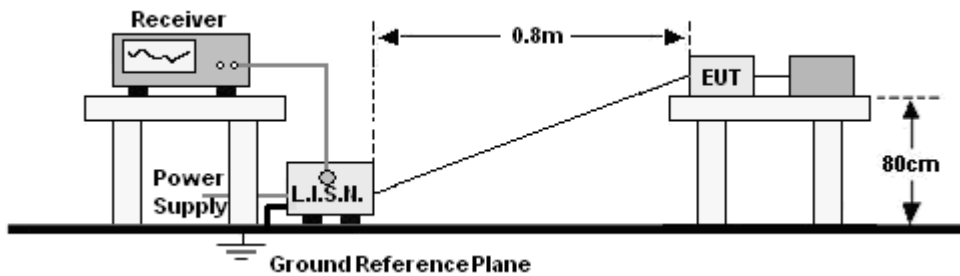

6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:
1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

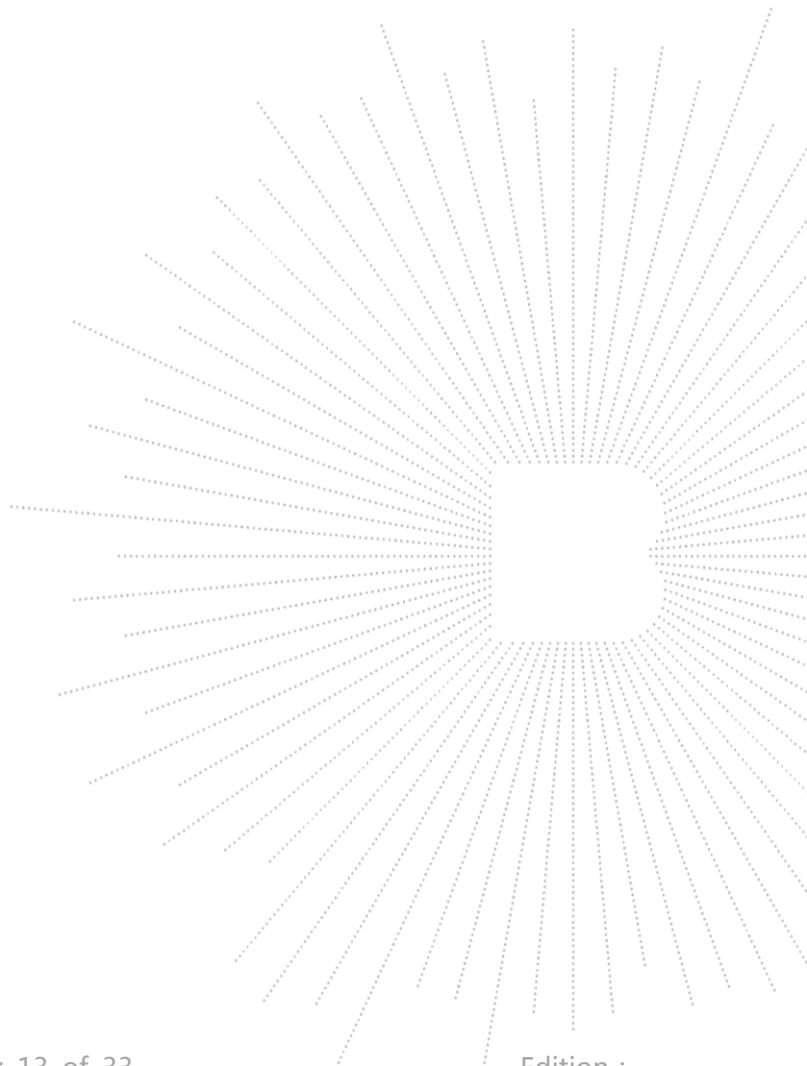

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 3

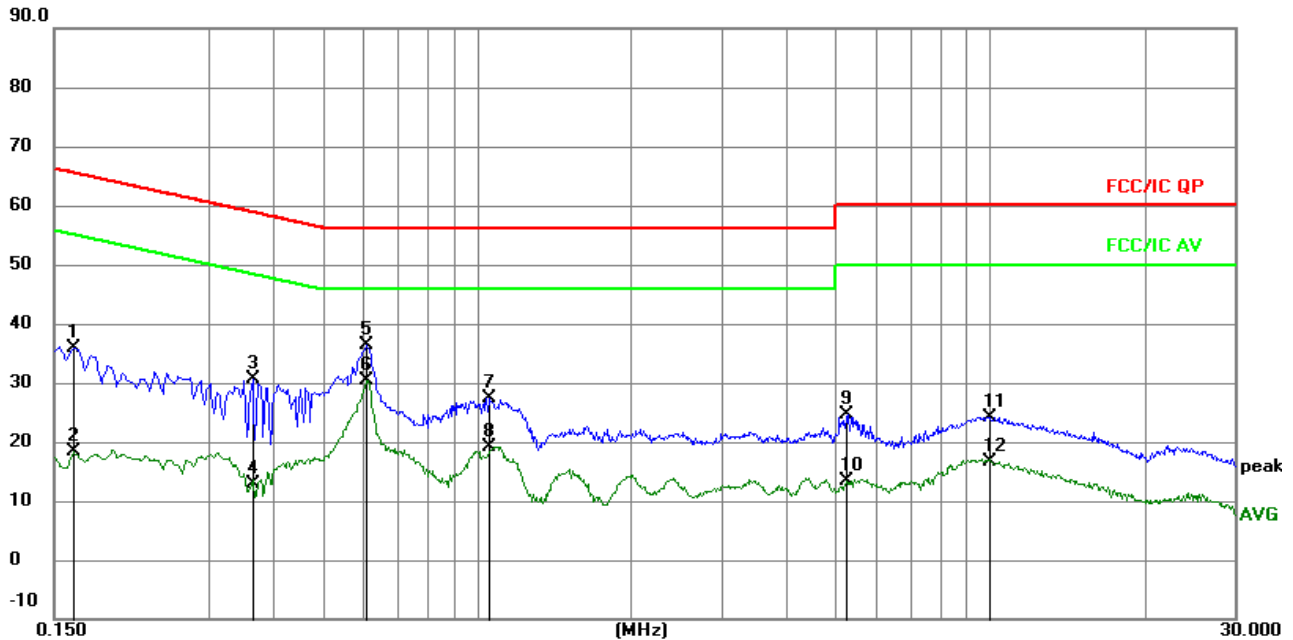


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1633	26.38	9.50	35.88	65.29	-29.41	QP
2		0.1633	8.78	9.50	18.28	55.29	-37.01	AVG
3		0.3653	21.19	9.53	30.72	58.61	-27.89	QP
4		0.3653	3.24	9.53	12.77	48.61	-35.84	AVG
5		0.6075	26.46	9.97	36.43	56.00	-19.57	QP
6	*	0.6075	20.38	9.97	30.35	46.00	-15.65	AVG
7		1.0541	17.93	9.57	27.50	56.00	-28.50	QP
8		1.0541	9.68	9.57	19.25	46.00	-26.75	AVG
9		5.2490	14.75	9.79	24.54	60.00	-35.46	QP
10		5.2490	3.54	9.79	13.33	50.00	-36.67	AVG
11		9.9657	14.48	9.69	24.17	60.00	-35.83	QP
12		9.9657	6.97	9.69	16.66	50.00	-33.34	AVG

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 3

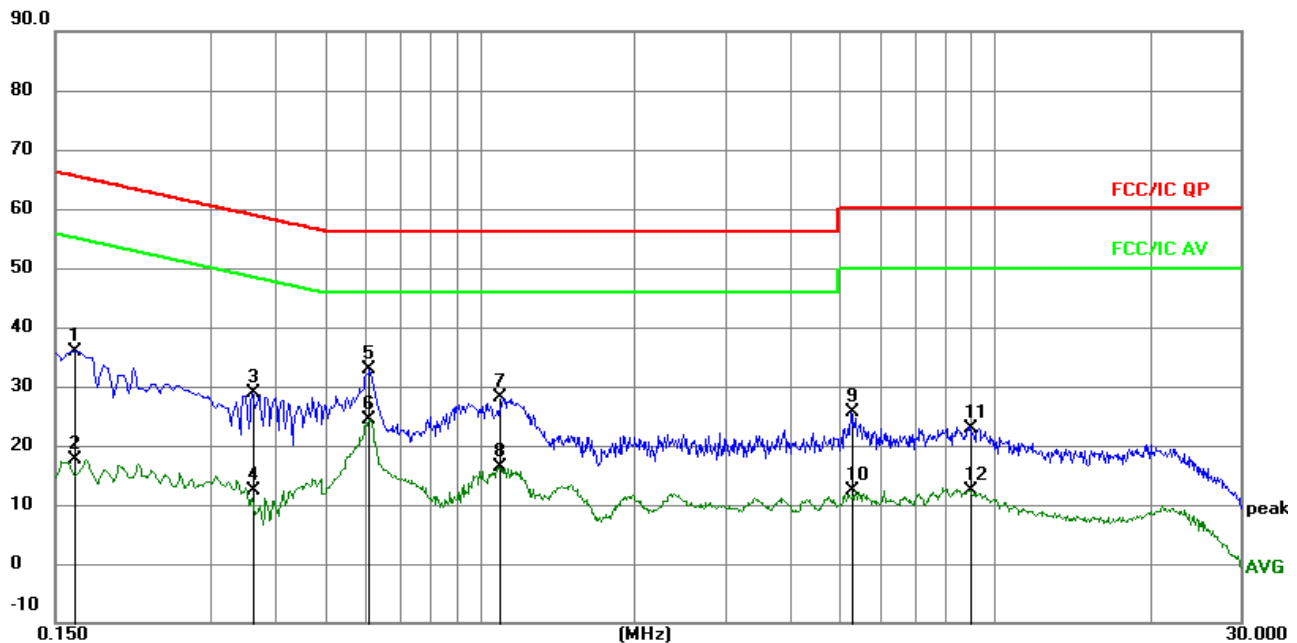

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
				dB	dBuV	dBuV	dB	
1		0.1635	26.40	9.50	35.90	65.28	-29.38	QP
2		0.1635	8.24	9.50	17.74	55.28	-37.54	AVG
3		0.3615	19.28	9.53	28.81	58.69	-29.88	QP
4		0.3615	2.95	9.53	12.48	48.69	-36.21	AVG
5		0.6089	23.00	9.97	32.97	56.00	-23.03	QP
6	*	0.6089	14.48	9.97	24.45	46.00	-21.55	AVG
7		1.0904	18.63	9.57	28.20	56.00	-27.80	QP
8		1.0904	6.89	9.57	16.46	46.00	-29.54	AVG
9		5.2575	15.73	9.79	25.52	60.00	-34.48	QP
10		5.2575	2.69	9.79	12.48	50.00	-37.52	AVG
11		8.9970	13.29	9.70	22.99	60.00	-37.01	QP
12		8.9970	2.76	9.70	12.46	50.00	-37.54	AVG


7. RADIATED EMISSIONS

7.1 Block Diagram Of Test Setup

(A) Radiated Emission Test-Up Frequency Below 30MHz

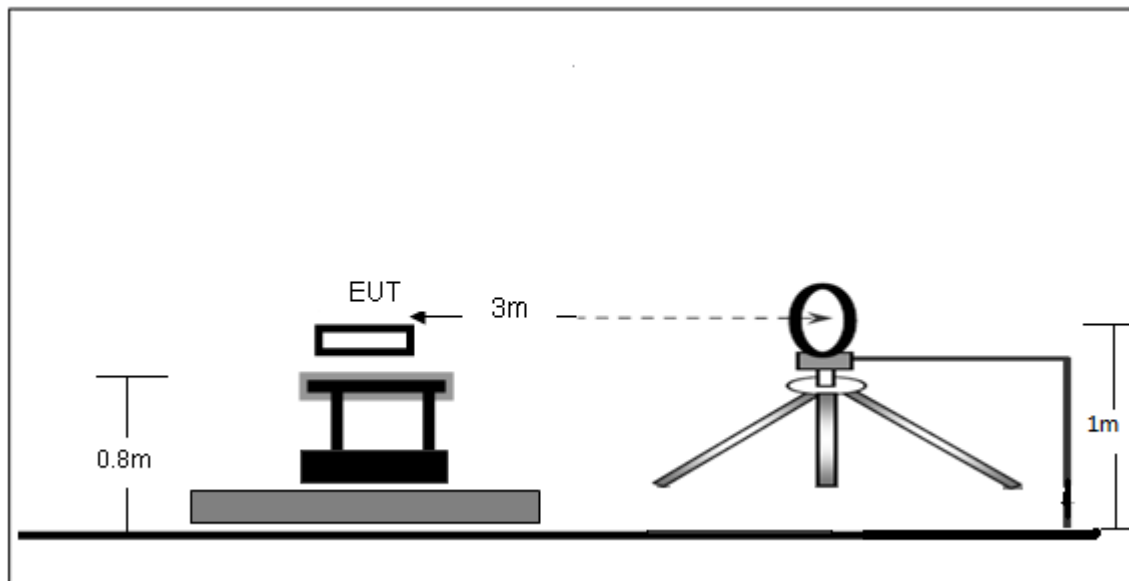

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

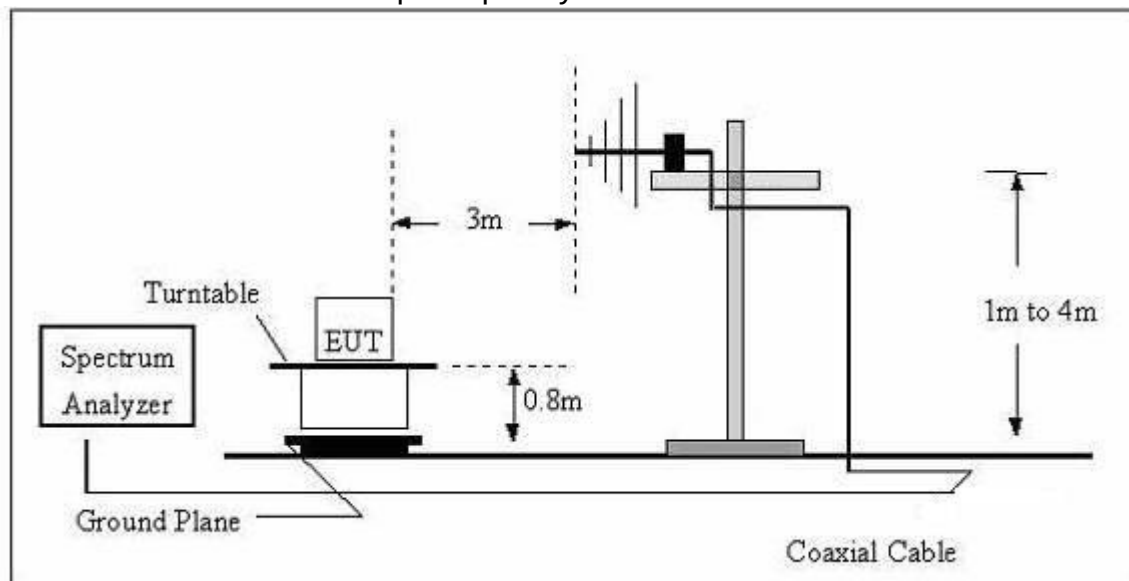


7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency	Field Strength	Distance	Field Strength Limit at 3m Distance	
(MHz)	uV/m	(m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

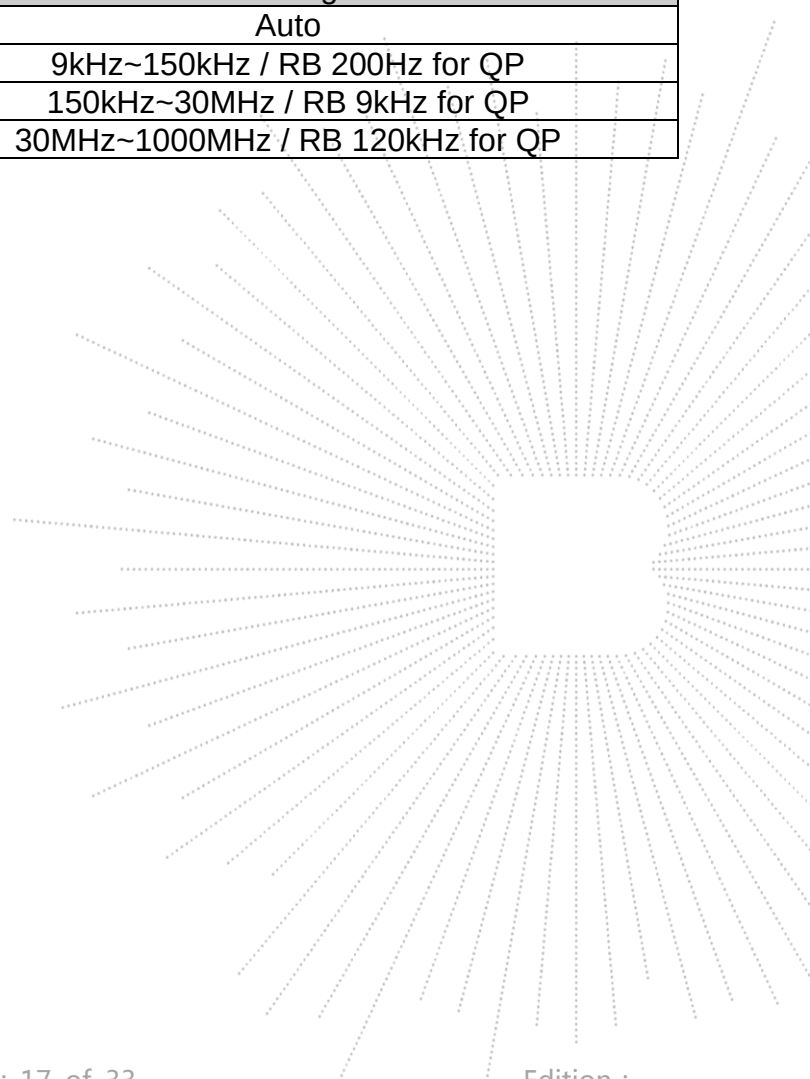

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
0.634	21.31	20.94	42.25	71.56	-29.31	QP
1.453	16.24	20.86	37.1	64.36	-27.26	QP
1.617	18.06	20.73	38.79	63.43	-24.64	QP
3.234	16.17	20.58	36.75	69.54	-32.79	QP
6.633	19.11	20.07	39.18	69.54	-30.36	QP
19.145	18.26	19.11	37.37	69.54	-32.17	QP

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.

Measurements were performed at 3 metres and results extrapolated to 30 metres.

The limit is specified at a test distance of 30 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by making the measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4	Polarization :	Horizontal

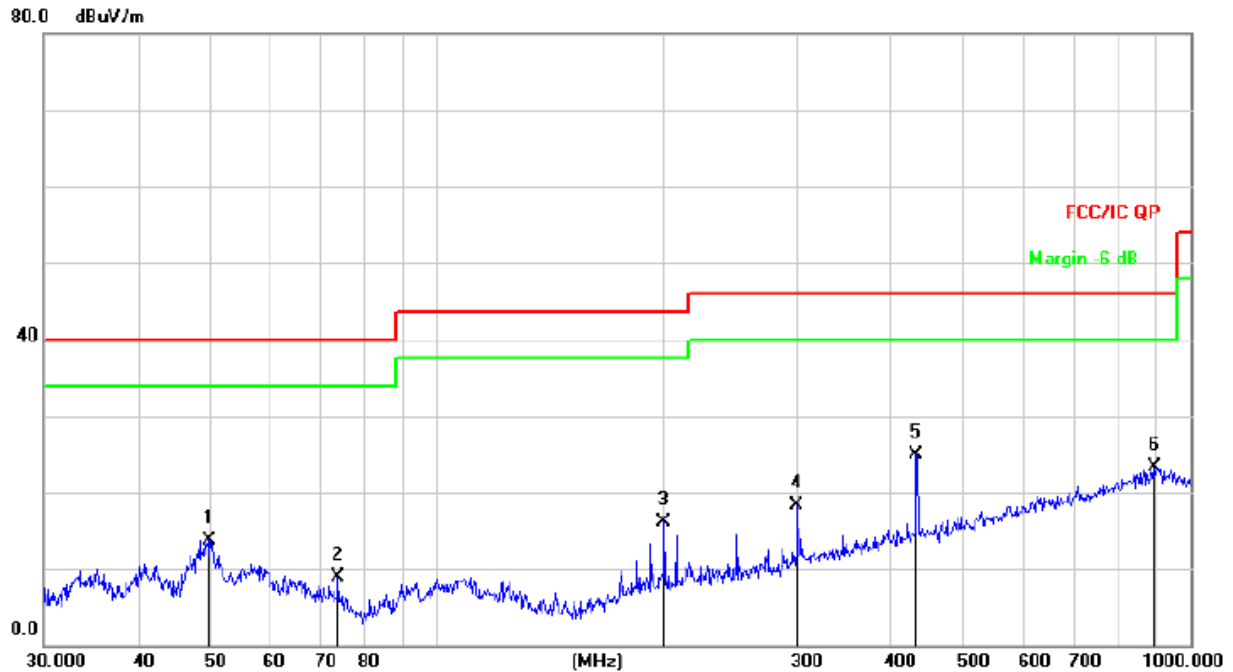


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		49.7068	27.90	-14.11	13.79	40.00	-26.21	QP
2		73.8756	26.94	-18.12	8.82	40.00	-31.18	QP
3		199.9856	31.46	-15.26	16.20	43.50	-27.30	QP
4		300.3672	30.66	-12.39	18.27	46.00	-27.73	QP
5	*	432.5457	33.96	-8.99	24.97	46.00	-21.03	QP
6		893.8567	23.41	-0.14	23.27	46.00	-22.73	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4	Polarization :	Vertical

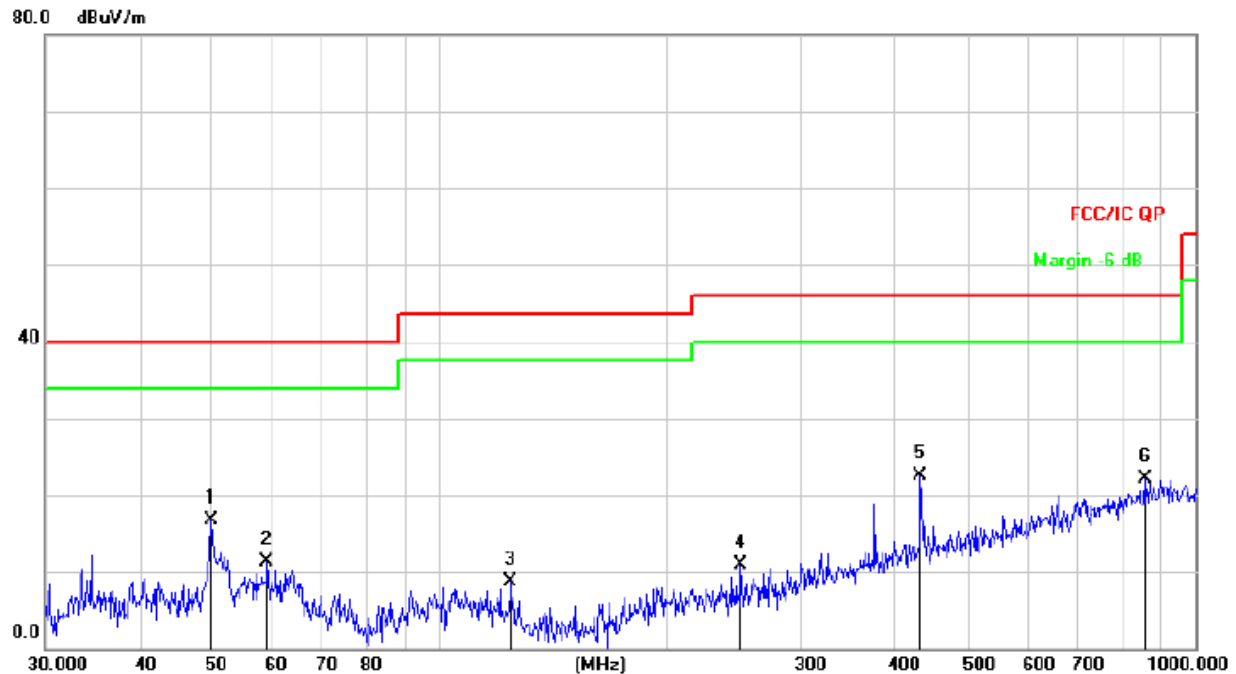

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	49.8814	30.89	-14.09	16.80	40.00	-23.20	QP
2		59.0251	25.91	-14.60	11.31	40.00	-28.69	QP
3		124.1330	25.77	-17.03	8.74	43.50	-34.76	QP
4		250.3012	25.19	-14.22	10.97	46.00	-35.03	QP
5		432.5457	31.56	-8.99	22.57	46.00	-23.43	QP
6		857.0247	23.04	-0.85	22.19	46.00	-23.81	QP

8. RADIATED BAND EMISSION MEASUREMENT

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

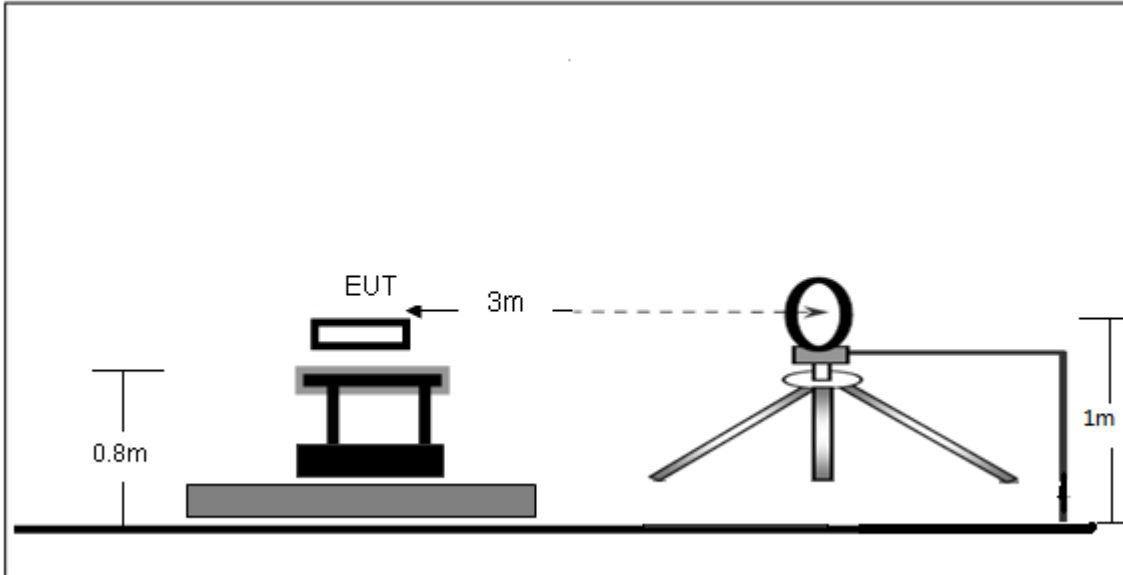

8.2 Limit

FCC Part15 C Section 15.209 and 15.225

LIMITS OF RADIATED EMISSION MEASUREMENT (Below 30MHz)

- 15.848 microvolts/m (84 dB μ V/m) at 30 m, within the band 13.553– 13.567 MHz.
- 334 microvolts/m (50.5 dB μ V/m) at 30 m, within the bands 13.410– 13.553 MHz and 13.567– 13.710 MHz.
- 106 microvolts/m (40.5 dB μ V/m) at 30 m, within the bands 13.110– 13.410 MHz and 13.710– 14.010 MHz.
- 30 microvolts/m (29.5 dB μ V/m) at 30 m, outside the band 13.110– 14.010 MHz.

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB μ V/m)=20log Emission level (uV/m).


8.3 Test procedure

- a. The Product is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The maximum values of the field strength are recorded by adjusting the polarizations of the test antenna and rotating the turntable.
- b. For each suspected emission, the Product was arranged to its worst case and then turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- c. The test frequency analyzer system was set to Peak Detect (300Hz RBW in 9kHz to 150kHz and 10kHz RBW in 150kHz to 30MHz) Function and Specified Bandwidth with Maximum Hold Mode.


8.4 EUT operating Conditions

The EUT tested system was configured as the statements of 4.2 Unless otherwise a special operating condition is specified in the follows during the testing.

The report only show the worst antenna Polarity's data.

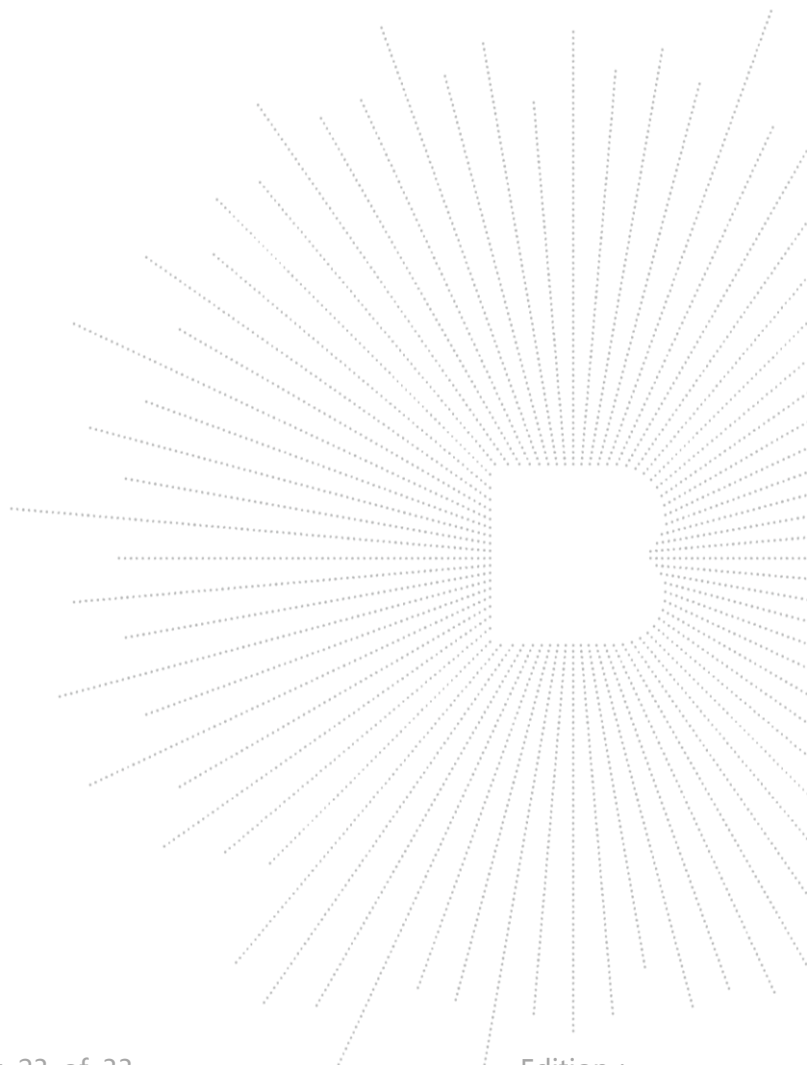

8.5 Test Result

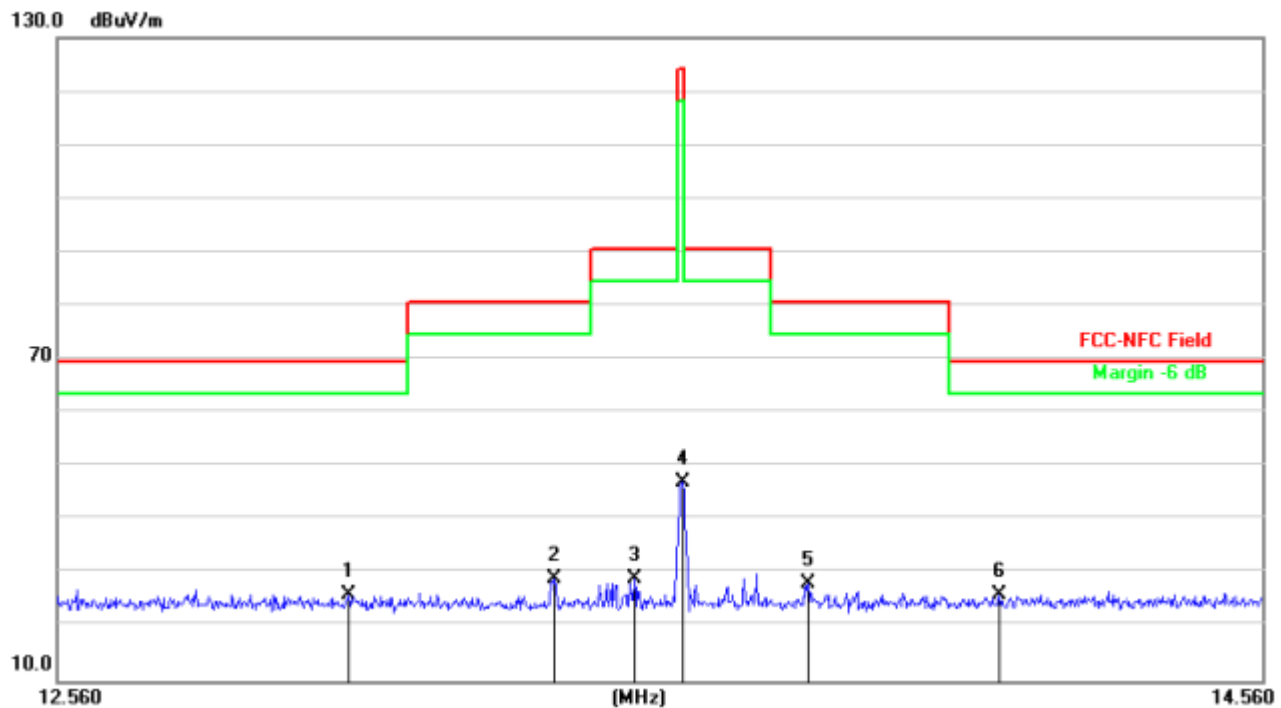

No.	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1	13.0180	35.7	-10.34	25.36	69.4	-44.04	QP
2	13.3520	38.51	-10.29	28.22	80.5	-52.28	QP
3	13.4818	39.05	-10.27	28.78	90.5	-61.72	QP
4	13.5620	56.45	-10.26	46.19	124	-77.81	QP
5	13.7731	38.02	-10.23	27.79	80.5	-52.71	QP
6	14.1012	35.83	-10.18	25.65	69.5	-43.85	QP

Note:

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.

9. BANDWIDTH TEST

9.1 Block Diagram Of Test Setup



9.3 Test procedure

FCC Part15 (15.215)	
Section	Test Item
15.215	Bandwidth

1. Set RBW = 1% to 5% of the OBW
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


9.4 EUT operation conditions

The EUT tested system was configured as the statements of 4.2 Unless otherwise a special operating condition is specified in the follows during the testing.

9.5 Test Result

Temperature :	26°C	Relative Humidity :	54%
Test Mode :	Mode 1	Test Voltage :	DC 3.7V

Frequency (MHz)	20dB bandwidth (Hz)
13.56	223

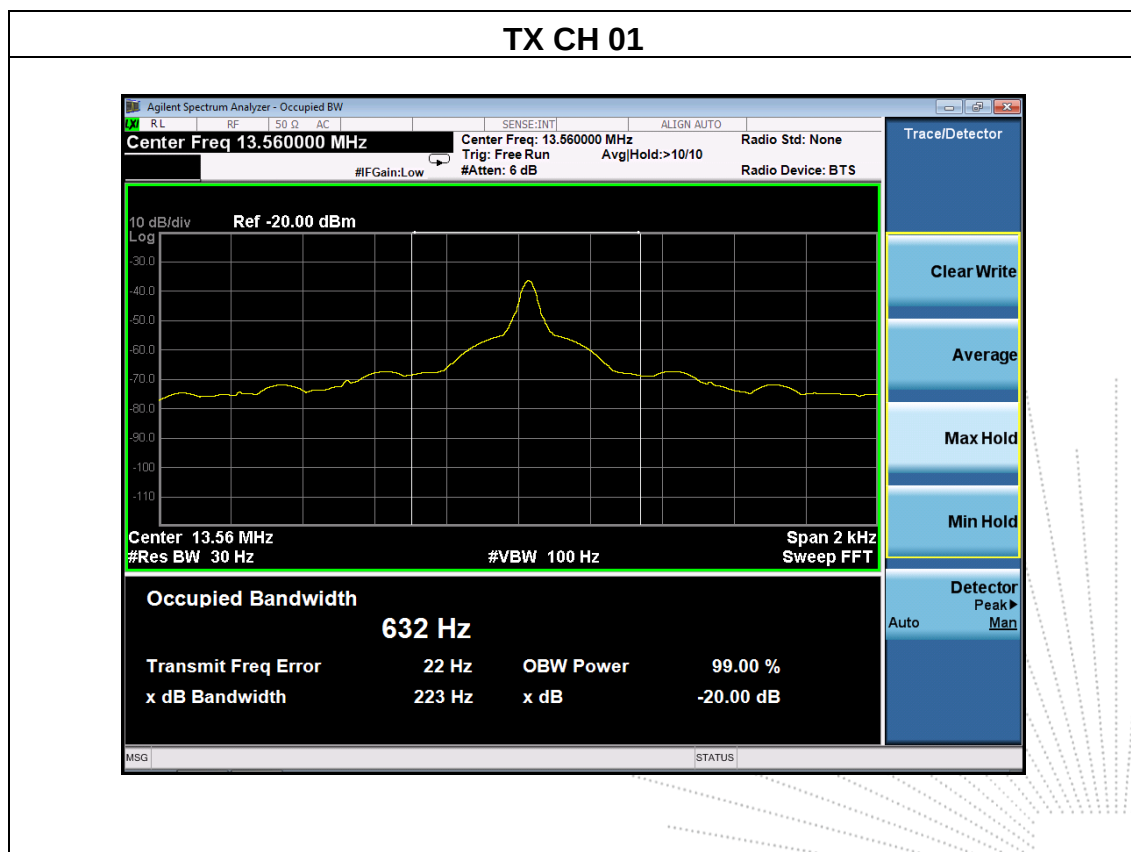

10. TRANSMITTER FREQUENCY STABILITY

10.1 Block Diagram Of Test Setup



10.2 Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


Limit: $\pm 0.01\%$ of 13.56MHz=1356Hz

10.3 Test procedure

1. Set RBW = 10 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. The transmitter output (antenna port) was connected to the spectrum analyzer.

10.4 EUT operating Conditions


The EUT tested system was configured as the statements of 4.2 Unless otherwise a special operating condition is specified in the follows during the testing.

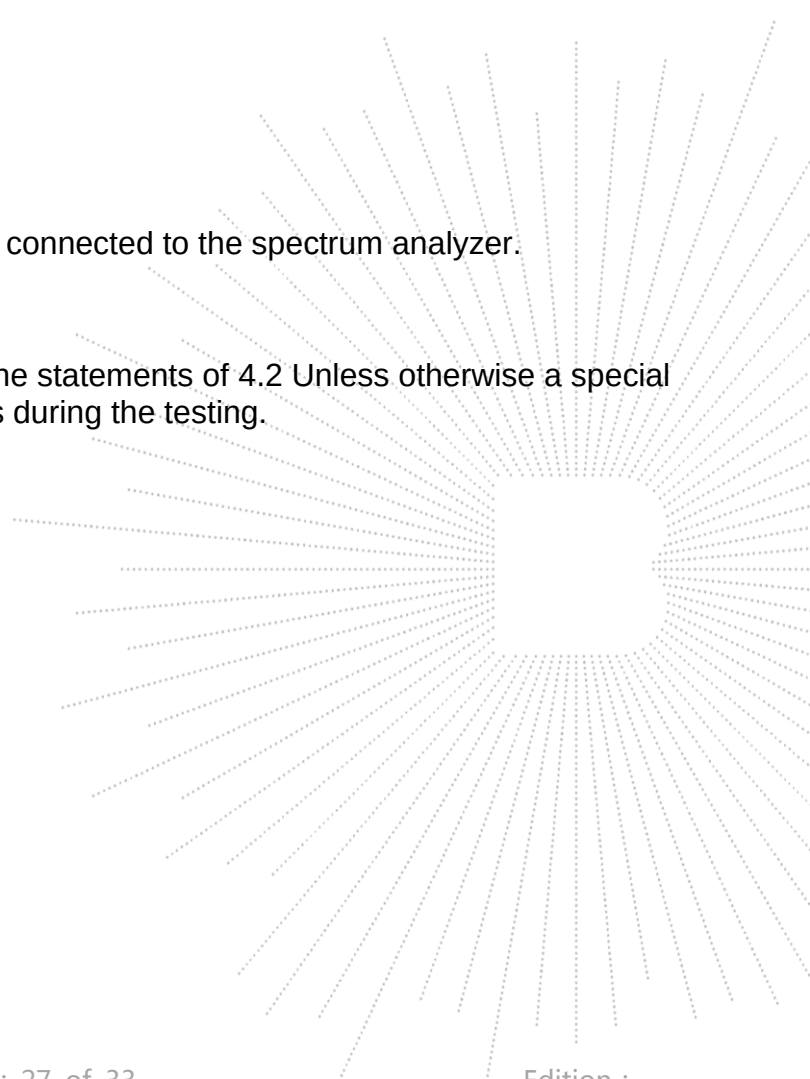

10.5 Test Result

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1		

Test Conditions			Frequency Deviation		Result
Frequency MHz	Power(Vdc)	Temperature (°C)	Measured Freq. (MHz)	Frequency Error(Hz)	
13.56	3.7	-20	13.56003	30	PASS
	3.7	-10	13.56007	70	
	3.7	0	13.56004	40	
	3.7	10	13.56004	40	
	3.7	20	13.56007	70	
	3.7	30	13.56002	20	
	3.7	40	13.56003	30	
	3.7	50	13.56008	80	
	4.26	20	13.56005	50	
	3.15	20	13.56008	80	

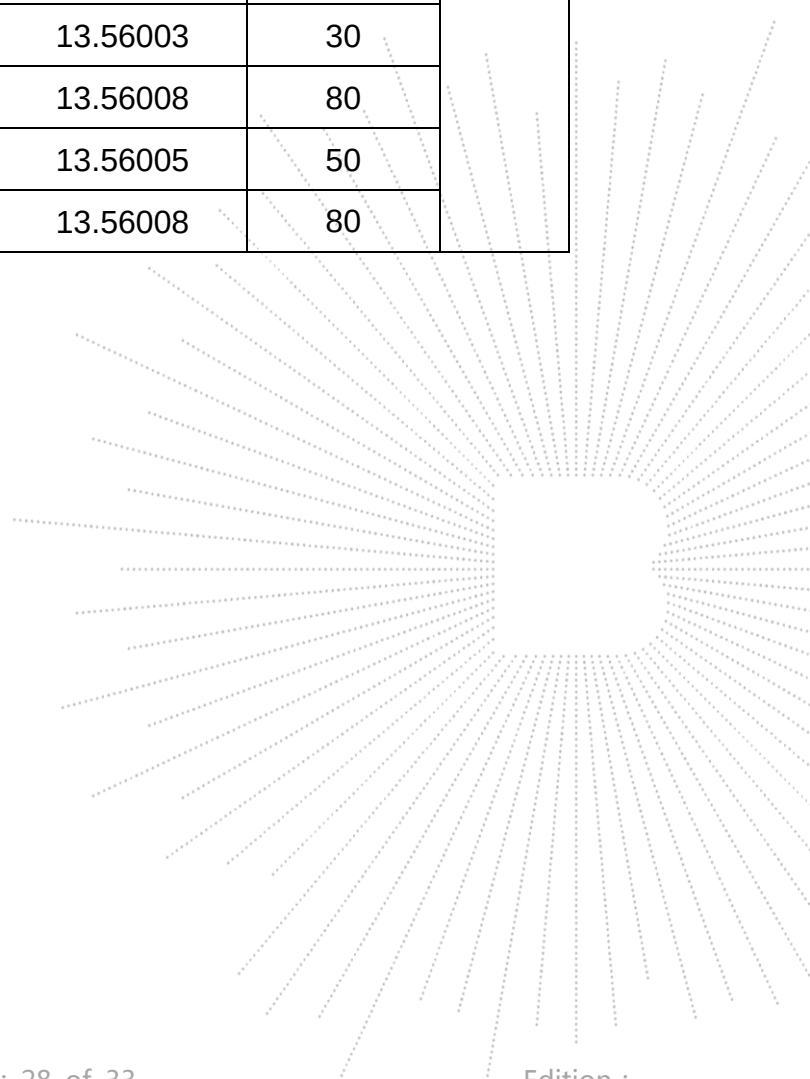


11. ANTENNA REQUIREMENT

11.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

11.2 EUT ANTENNA

The EUT antenna is Coil antenna, Antenna Gain is 0dBi. fulfill the requirement of this section.

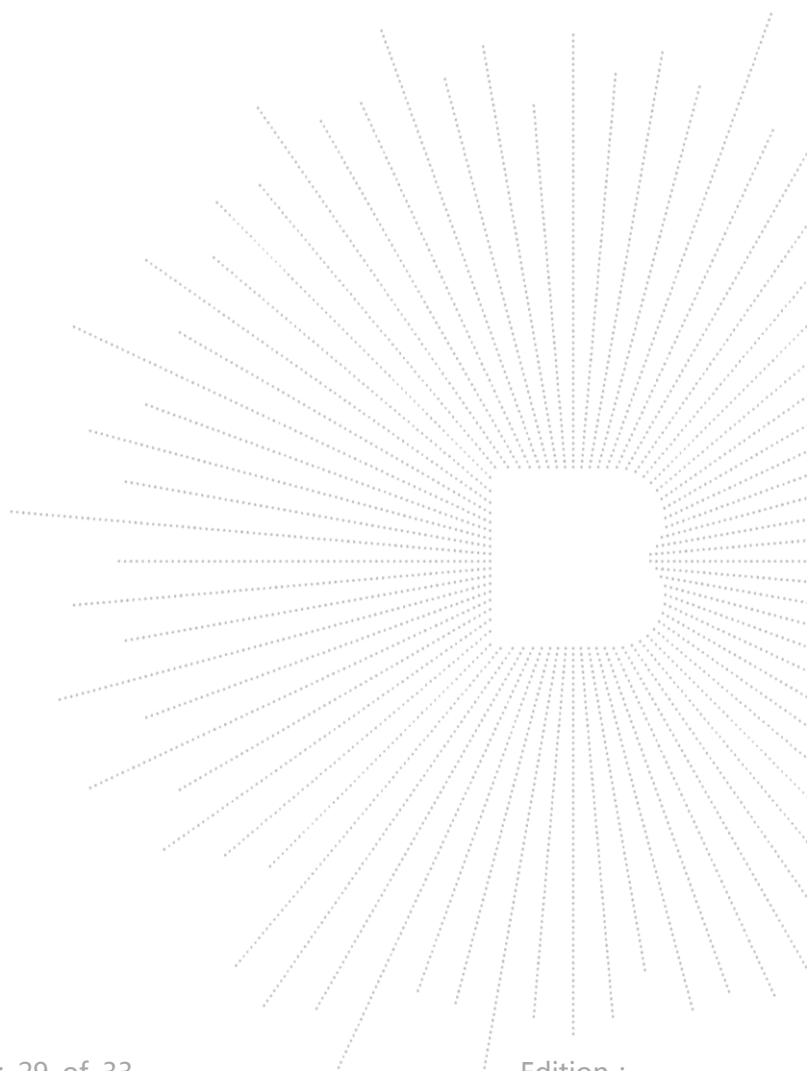

12. EUT PHOTOGRAPHS

EUT Photo 1




EUT Photo 2




13. EUT TEST SETUP PHOTOGRAPHS

Conducted emissions

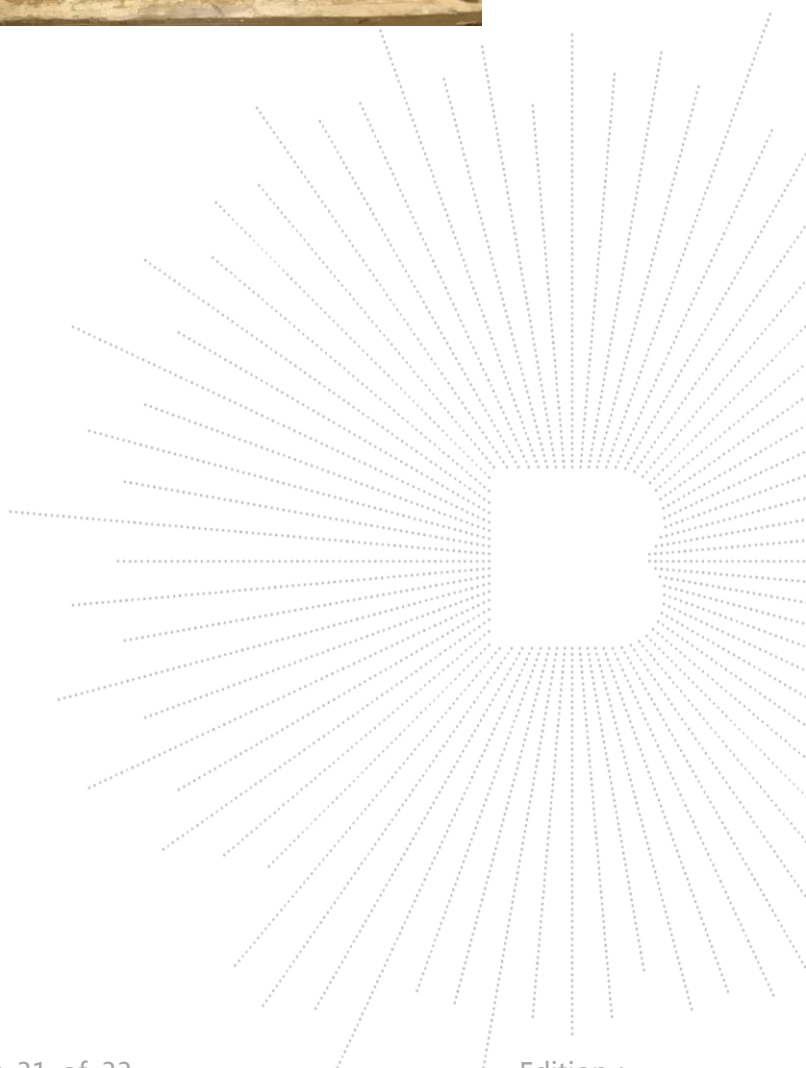

Radiated Measurement Photos

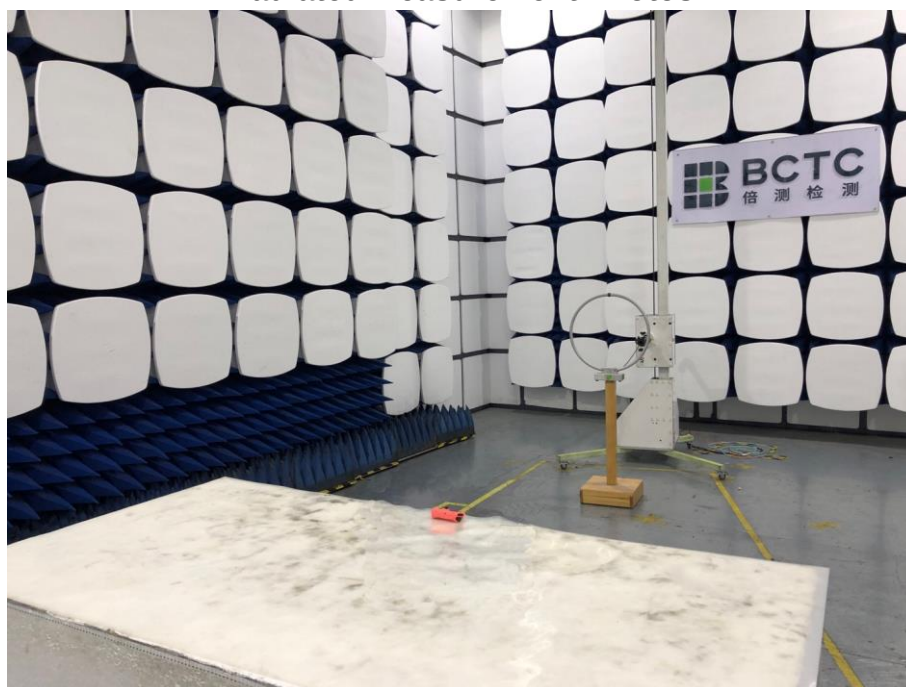

STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2F, East of B Building, Pengzhou Industrial Park, Fuyuan 1st Road, Qiaotou, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Website : <http://www.bctc-lab.com>

E-Mail : bctc@bctc-lab.com.cn

***** END *****