

Qingdao Richmat Intelligence Technology inc


Difference declaration

Date: June 30, 2026

Model list:

C27M-X-XXXX-XX-XXXX-XXX-XX, C27M-B-A151-1R-7421-LH1-01


The "X" in the series model represents different meanings respectively, but the schematic diagram, PCB layout, appearance color, etc. are all the same. The specific differences can be found on the next page - Model Specification Code. The entire machine covered by this certification is based on the module ID and has undergone tests related to radiation emission and radiation emission interference for the entire machine. The selected test model for the entire machine is C27M-B-A151-1R-7421-LH1-01.



Yuan Chongjie / Engineer

Qingdao Richmat Intelligence Technology inc

C27M-X-XXXX-XX-XXXX-XXX-XX

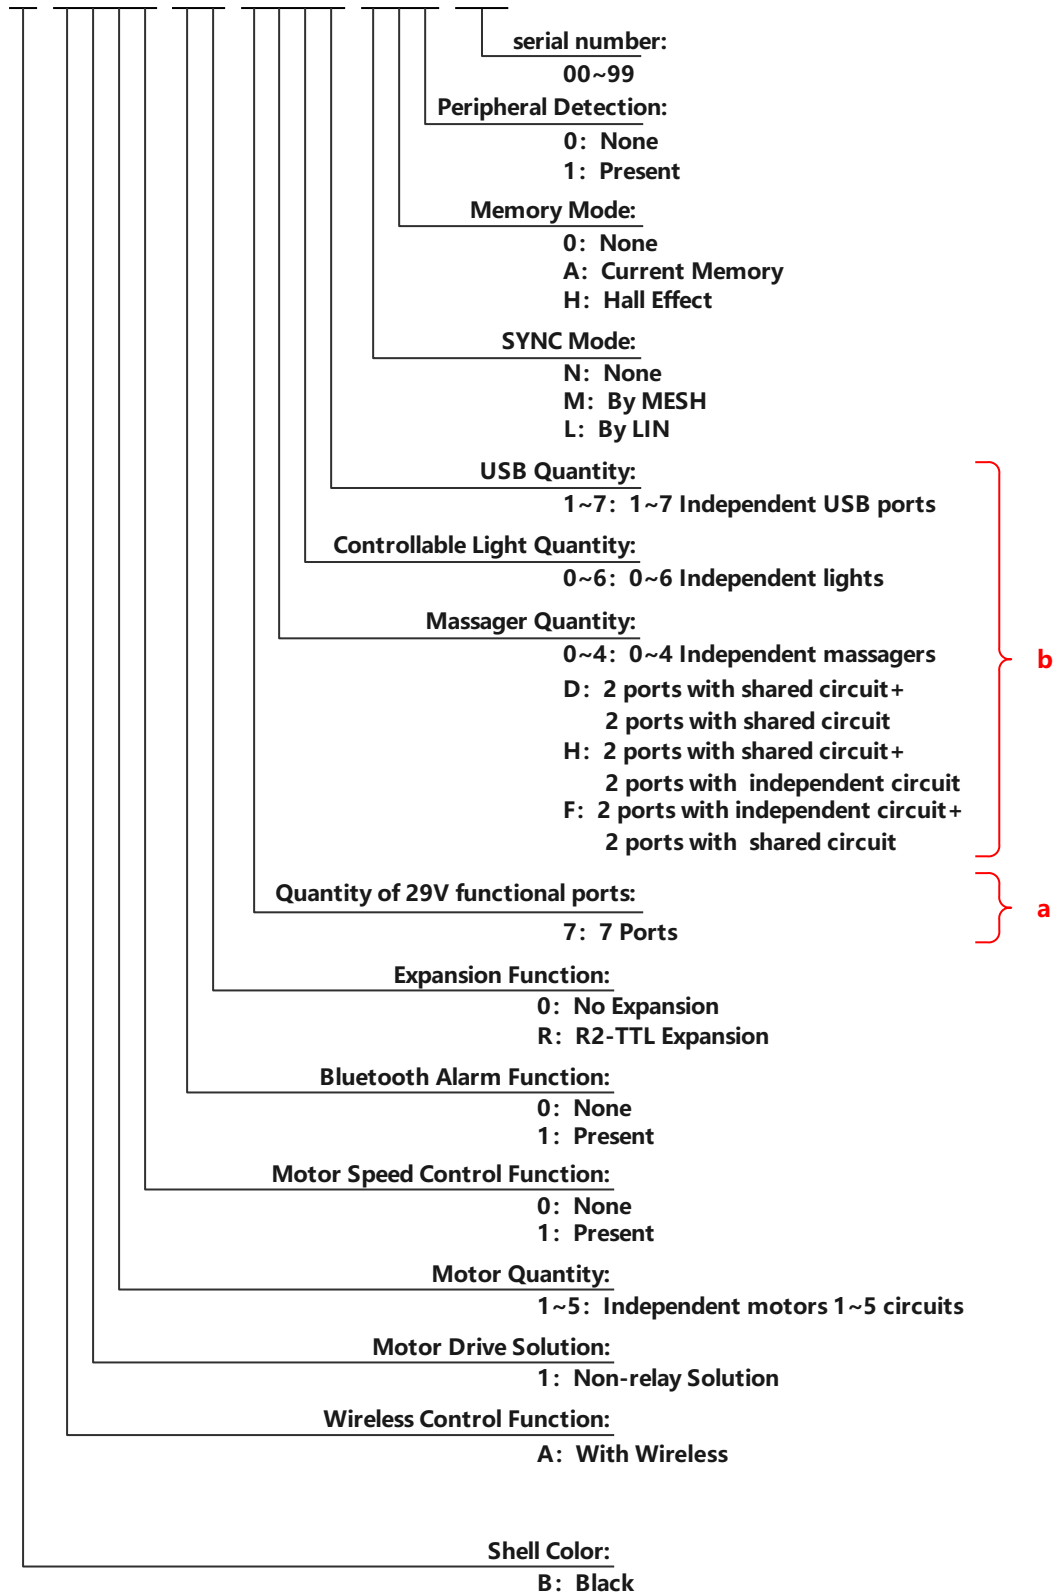

Note:

a. There are seven 29V functional ports in total, and each port can be connected to at most one device (USB device, Light or massager), with a maximum total quantity of 7.

b. The combined total of USB devices, lights and massagers shall be at most 7.