FCC 47 CFR PART 15 SUBPART C

RF Test Report

Applicant	:	Hill-Rom Services Pte Ltd
Product Type	:	WIFI DONGLE , USB
Trade Name	:	HILL-ROM
Model Number	:	198658
Applicable Standard	:	FCC 47 CFR PART 15 SUBPART C ANSI C63.10:2013
Receive Date	:	Sep. 19, 2016
Test Period	:	Nov. 02 ~ Nov. 06, 2016
Issue Date	:	Nov. 23, 2016

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel：+886-3-2710188 / Fax：+886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330
FCC Accredited Test Site Number: 510205

Note: *This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.*

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Nov. 23, 2016	Initial Issue	Snow Wang

Verification of Compliance

Issued Date: Nov. 23, 2016

Applicant	:	Hill-Rom Services Pte Ltd
Product Type	:	WIFI DONGLE , USB
Trade Name	:	HILL-ROM
Model Number	:	198658
FCC ID	:	2AJKO198658
EUT Rated Voltage	:	DC 5V, 2A
Test Voltage	:	120 Vac / 60 Hz
Applicable Standard	:	FCC 47 CFR PART 15 SUBPART C ANSI C63.10:2013
Test Result	:	Complied
Performing Lab.	:	A Test Lab Techno Corp. No. 140-1, Changan Street, Bade District, Taoyuan City 33465, Taiwan (R.O.C) Tel：+886-3-2710188 / Fax：+886-3-2710190 Taiwan Accreditation Foundation accreditation number: 1330 http://www.atl-lab.com.tw/e-index.htm

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By	: Fly Lu	Reviewed By	: Eric Ou Yang
(Manager)	(Fly Lu)	(Testing Engineer)	(Eric Ou Yang)

TABLE OF CONTENTS

1 General Information 6
2 EUT Description 7
3 Test Methodology 8
3.1. Mode of Operation 8
3.2. EUT Exercise Software 11
3.3. Configuration of Test System Details 12
3.4. Test Site Environment 12
4 AC Power Line Conducted Emission Measurement 13
4.1. Limit 13
4.2. Test Instruments 13
4.3. Test Setup 13
4.4. Test Procedure 14
4.5. Test Result 15
5 Radiated Emission Measurement 17
5.1. Limit 17
5.2. Test Instruments 17
5.3. Setup 18
5.4. Test Procedure 20
5.5. Test Result 22
6 Maximum Conducted Output Power Measurement 38
6.1. Limit 38
6.2. Test Setup 38
6.3. Test Instruments 38
6.4. Test Procedure 38
6.5. Test Result 39
7 6dB RF Bandwidth Measurement 40
7.1. Limit 40
7.2. Test Setup 40
7.3. Test Instruments 40
7.4. Test Procedure 40
7.5. Test Result 41
7.6. Test Graphs 42
8 Maximum Power Density Measurement 45
8.1. Limit 45
8.2. Test Setup 45
8.3. Test Instruments 45
8.4. Test Procedure 45
8.5. Test Result 46
8.6. Test Graphs 47

9 Out of Band Conducted Emissions Measurement 50
9.1. Limit 50
9.2. Test Setup 50
9.3. Test Instruments 50
9.4. Test Procedure 50
9.5. Test Graphs 51
10 Antenna Measurement 60
10.1. Limit 60
10.2. Antenna Description 60

1 General Information

1.1 Summary of Test Result

Standard	Item	Result	Remark
15.247			
15.207	AC Power Conducted Emission	PASS	-----
Standard	Item	Result	Remark
15.247			
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6dB RF Bandwidth	PASS	-----
15.247(e)	Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.7
Radiated Emission	9kHz ~ 30MHz	1.7
	30MHz ~ 1000MHz	5.7
	1000MHz ~ 18000MHz	5.5
	18000MHz ~ 26500MHz	4.8
	26500MHz ~ 40000MHz	4.8
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96%	
Power Spectral Density	+0.71 dB / -0.77 dB	

2 EUT Description

Applicant	Hill-Rom Services Pte Ltd 1 Yishun Avenue 7 Singapore 768923			
Manufacturer	Hill-Rom Services Pte Ltd 1 Yishun Avenue 7 Singapore 768923			
Product Type	WIFI DONGLE , USB			
Trade Name	HILL-ROM			
Model Number	198658			
FCC ID	2AJKO198658			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate 400 GI (ns)
IEEE 802.11b	2412 ~ 2462	DSSS	20MHz	Up to 11Mbps
IEEE 802.11g	2412 ~ 2462	OFDM	20MHz	Up to 54Mbps
IEEE 802.11n 2.4GHz 20MHz	2412 ~ 2462	OFDM	20MHz	Up to 72.2Mbps
Antenna information	Type		Max. Gain (dBi)	
	PCB antenna		0.99	
Antenna Delivery	See section 3.1			

Frequency Band	Max. RF Output Power (W)
IEEE 802.11b	0.060
IEEE 802.11g	0.090
IEEE 802.11n 2.4GHz 20MHz	0.070

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Continuous TX mode
Mode 2: IEEE 802.11b link mode
Mode 3: IEEE 802.11g link mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Test Mode	ANT-0
Mode 2: IEEE 802.11b link mode	V
Mode 3: IEEE 802.11g link mode	V
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	V

Test Mode	Antenna Delivery	Test Channel	Data Rate 400 GI (ns)
Mode 2: IEEE 802.11b link mode	1TX / 1RX	1, 6, 11	1
Mode 3: IEEE 802.11g link mode	1TX / 1RX	1, 6, 11	6
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	1TX / 1RX	1, 6, 11	6.5

Duty cycle

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2: IEEE 802.11b link mode	2412.0	1.000	1.000	1.000	0.000	0.010
Mode 3: IEEE 802.11g link mode	2412.0	1.000	1.000	1.000	0.000	0.010
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	2412.0	1.000	1.000	1.000	0.000	0.010

Duty Cycle Graphs

Mode 2: IEEE 802.11b link mode	
On time	
On+off time	

Mode 3: IEEE 802.11g Mode	
On time	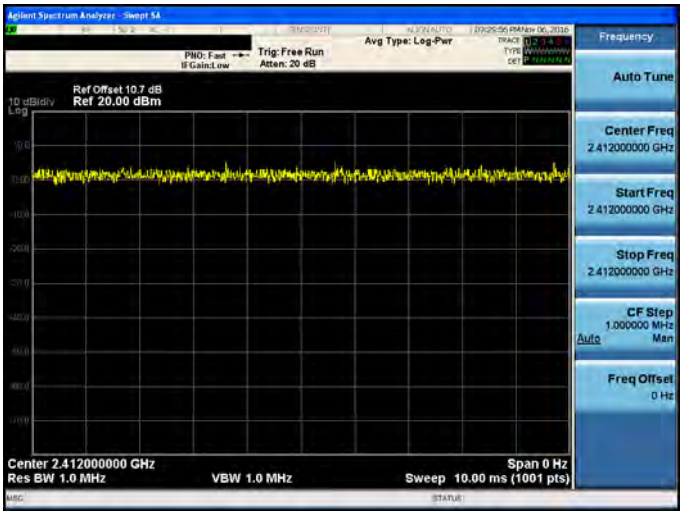
On+off time	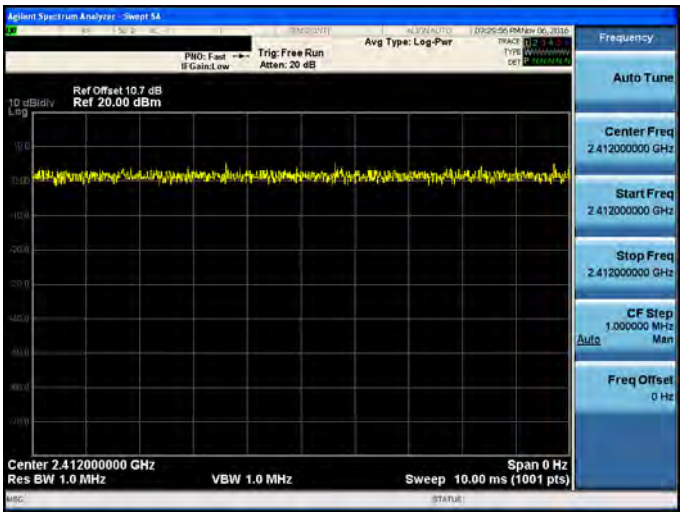

Mode 4: IEEE 802.11n 2.4GHz 20MHz Mode	
On time	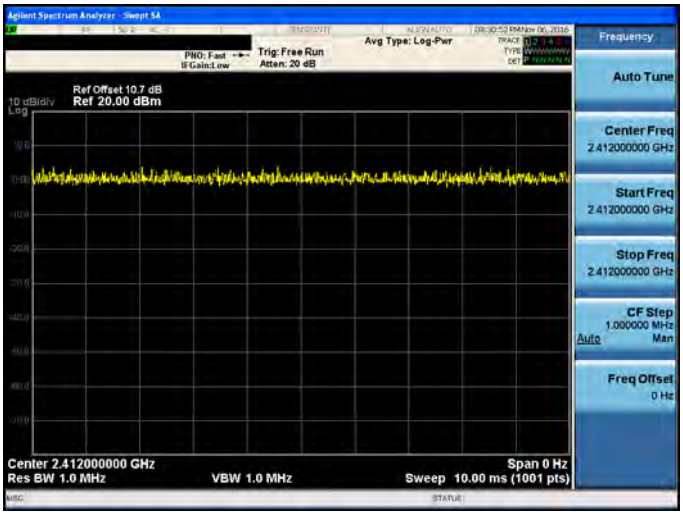
On+off time	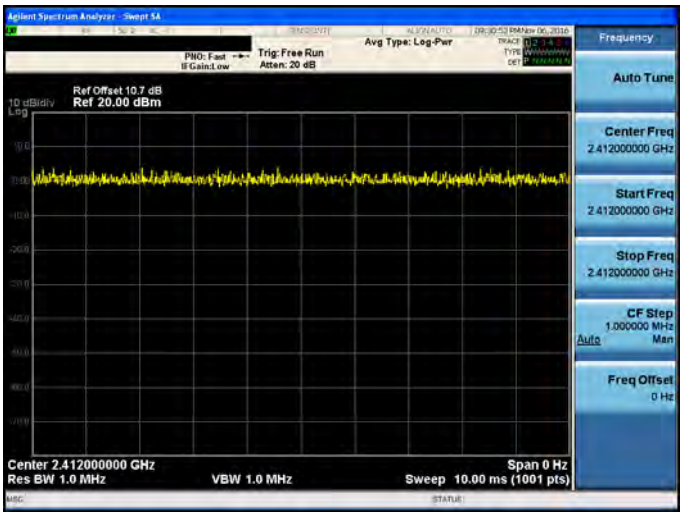

3.2. EUT Exercise Software

1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	Turn Wi-Fi function link to AP
4.	EUT run test program.

Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1
2	EZ-EMC Ver ATL-ITC-3A1-1

3.3. Configuration of Test System Details

Conducted Emissions

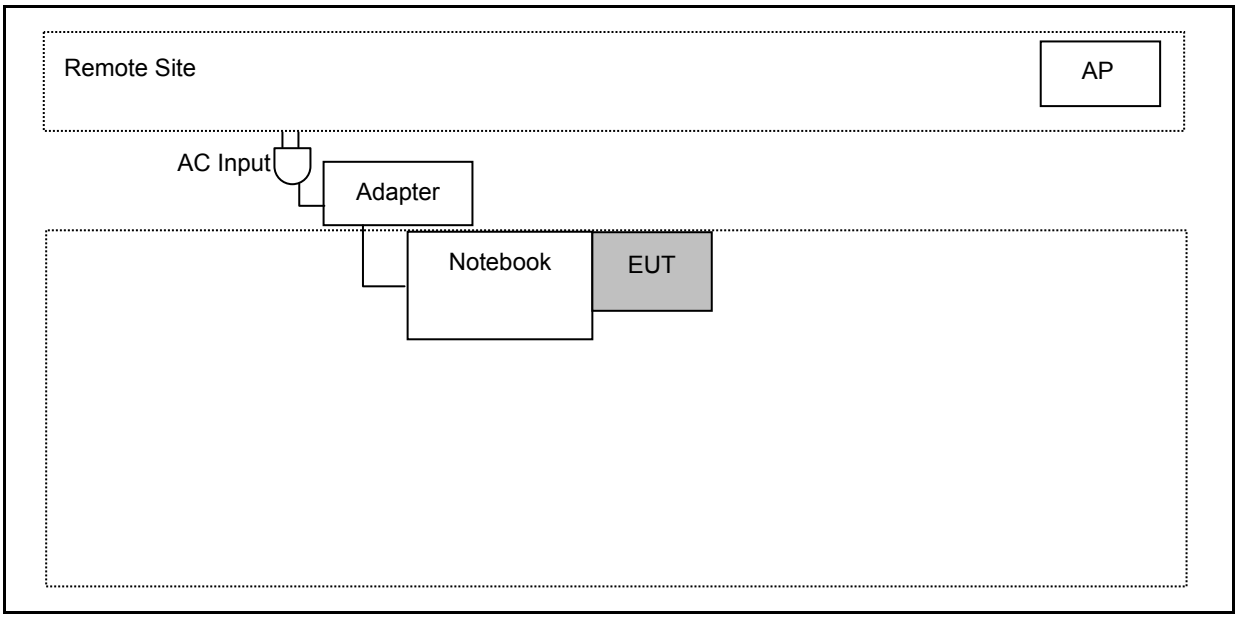

Radiated Emissions

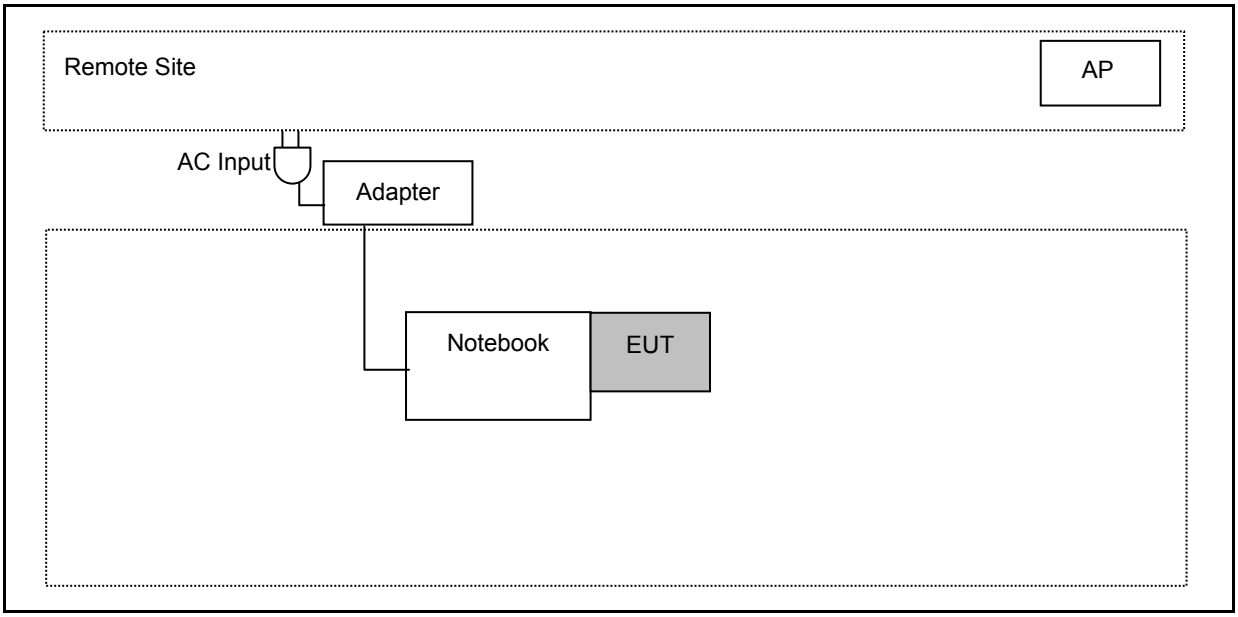

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 AC Power Line Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/31/2016	1 year
LISN	R&S	ENV216	101040	03/15/2016	1 year
LISN	R&S	ENV216	101041	03/07/2016	1 year
RF Cable	Woken	00100D1380194M	TE-02-02	05/31/2016	1 year
Test Site	ATL	TE02	TE02	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

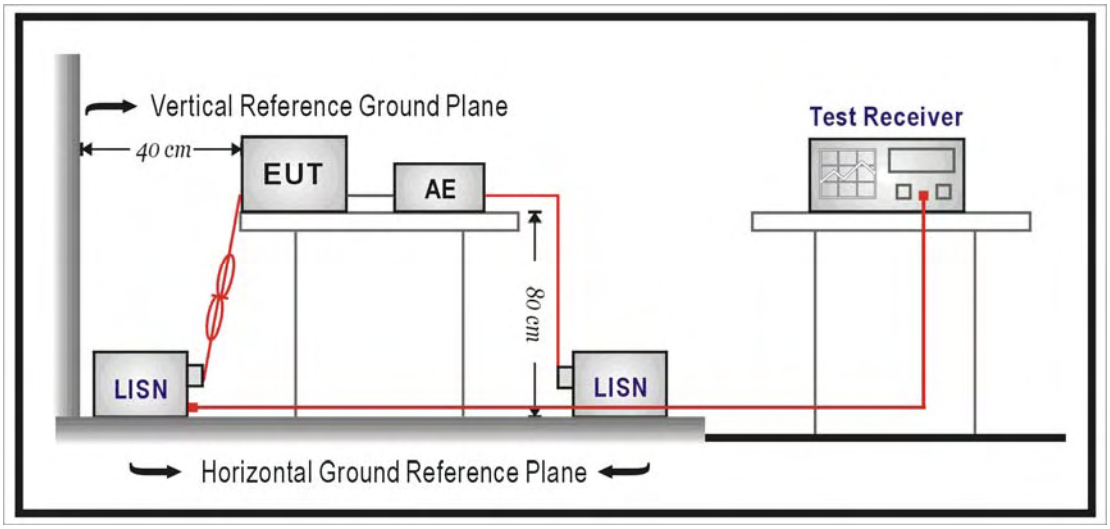

4.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50Ω// 50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50Ω// 50uH coupling impedance with 50ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150kHz to 30MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0,8 m from the AMN. If the mains power cable is longer than 1m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4m. All of interconnecting cables that hang closer than 40cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	198658	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 1	Date:	11/02/2016
Description:			

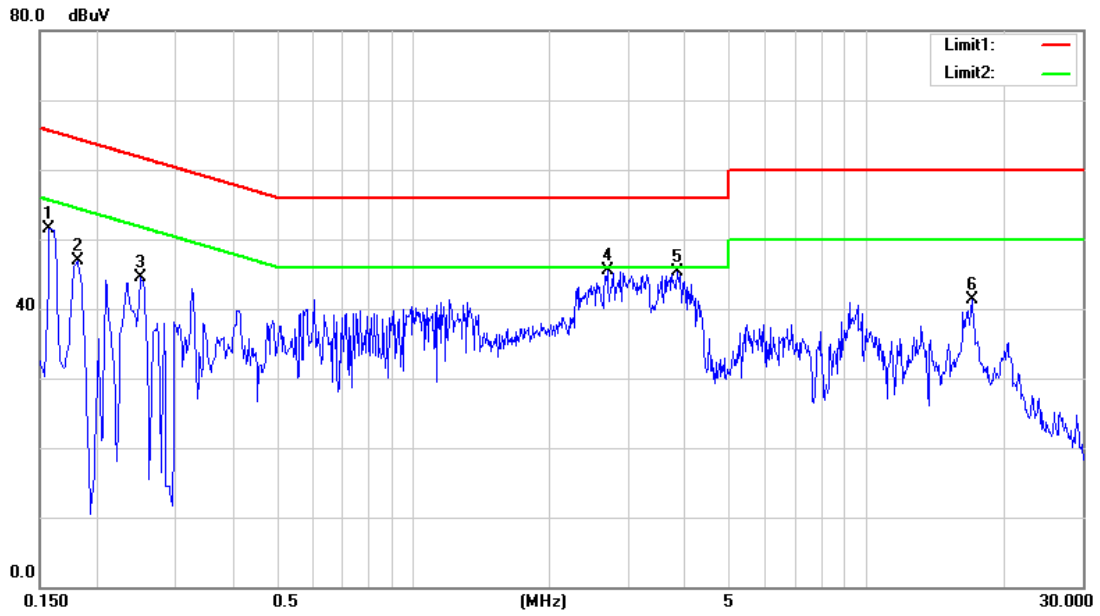

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	37.12	22.07	9.60	46.72	31.67	65.57	55.57	-18.85	-23.90	Pass
2	0.1820	33.43	13.65	9.59	43.02	23.24	64.39	54.39	-21.37	-31.15	Pass
3	0.2500	30.82	22.49	9.60	40.42	32.09	61.76	51.76	-21.34	-19.67	Pass
4	2.6900	30.77	22.98	9.71	40.48	32.69	56.00	46.00	-15.52	-13.31	Pass
5	3.8260	29.85	21.88	9.75	39.60	31.63	56.00	46.00	-16.40	-14.37	Pass
6	17.1580	22.52	16.05	9.95	32.47	26.00	60.00	50.00	-27.53	-24.00	Pass

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	198658	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 1	Date:	11/02/2016
Description:			

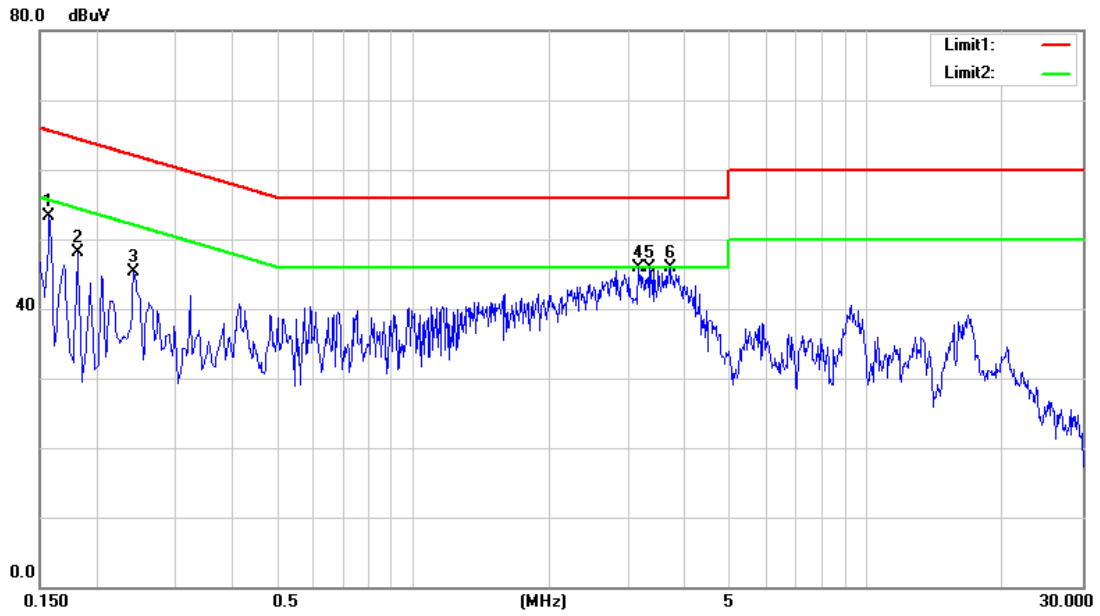

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	37.93	22.29	9.59	47.52	31.88	65.57	55.57	-18.05	-23.69	Pass
2	0.1820	32.81	12.18	9.58	42.39	21.76	64.39	54.39	-22.00	-32.63	Pass
3	0.2420	31.15	17.18	9.58	40.73	26.76	62.03	52.03	-21.30	-25.27	Pass
4	3.1540	31.11	23.88	9.72	40.83	33.60	56.00	46.00	-15.17	-12.40	Pass
5	3.3220	31.24	23.69	9.73	40.97	33.42	56.00	46.00	-15.03	-12.58	Pass
6	3.6820	30.33	22.80	9.74	40.07	32.54	56.00	46.00	-15.93	-13.46	Pass

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
RF Pre-selector	Agilent	N9039A	MY46520256	01/08/2016	1 year
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/08/2016	1 year
Pre Amplifier	Agilent	8449B	3008A02237	10/11/2016	1 year
Pre Amplifier	Agilent	8447D	2944A11119	01/11/2016	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/13/2016	1 year
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/06/2016	1 year
Horn Antenna (18~40GHz)	ETS	3116	86467	09/05/2016	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	02/01/2016	1 year
Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	02/23/2016	1 year
Microwave Cable	EMCI	EMC-104-SM-SM-14000	140202	02/23/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-600	140301	02/23/2016	1 year
Test Site	ATL	TE01	888001	08/29/2016	1 year

Note: N.C.R. = No Calibration Request.

5.3. Setup

9kHz ~ 30MHz

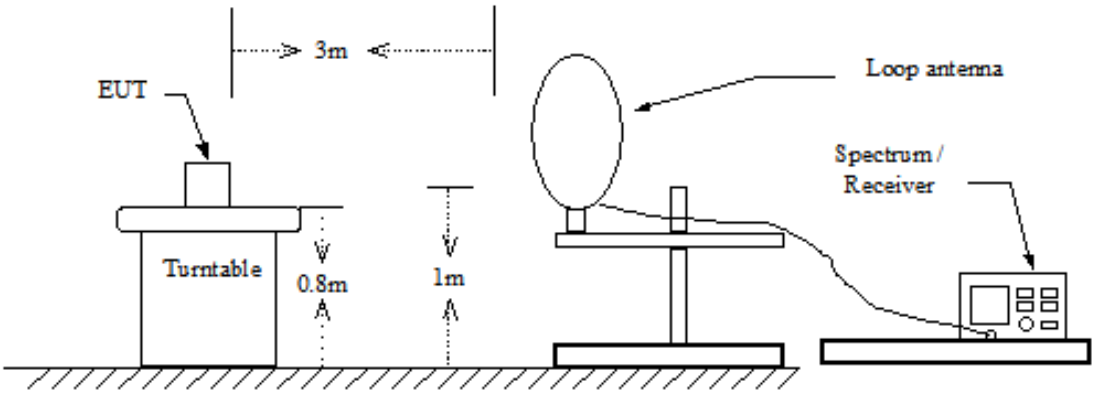

Below 1GHz

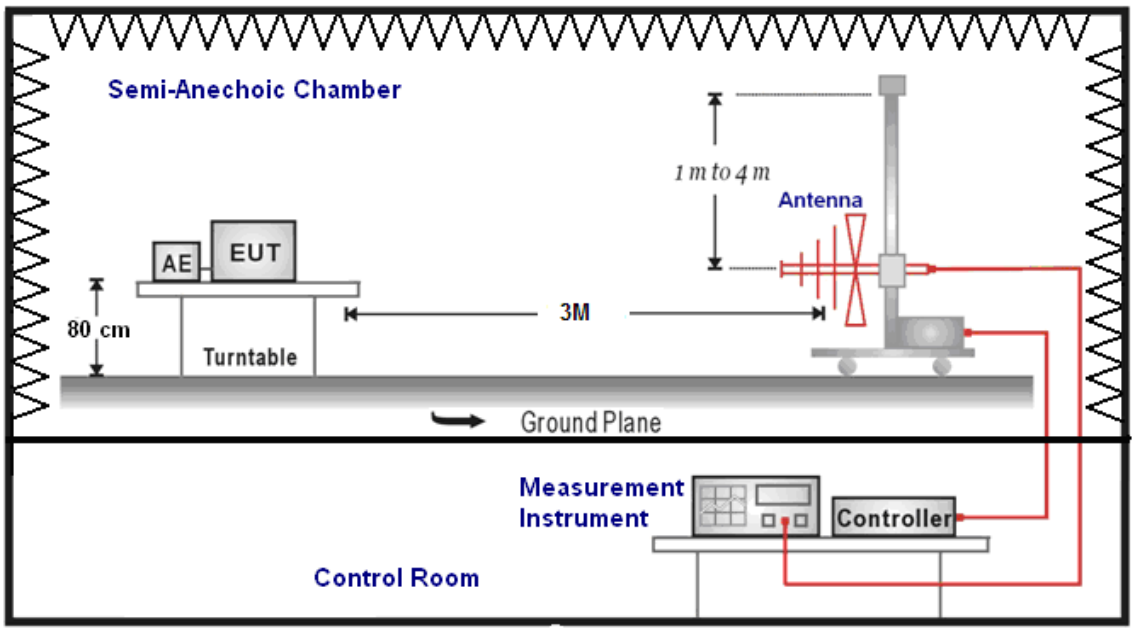

Above 1GHz

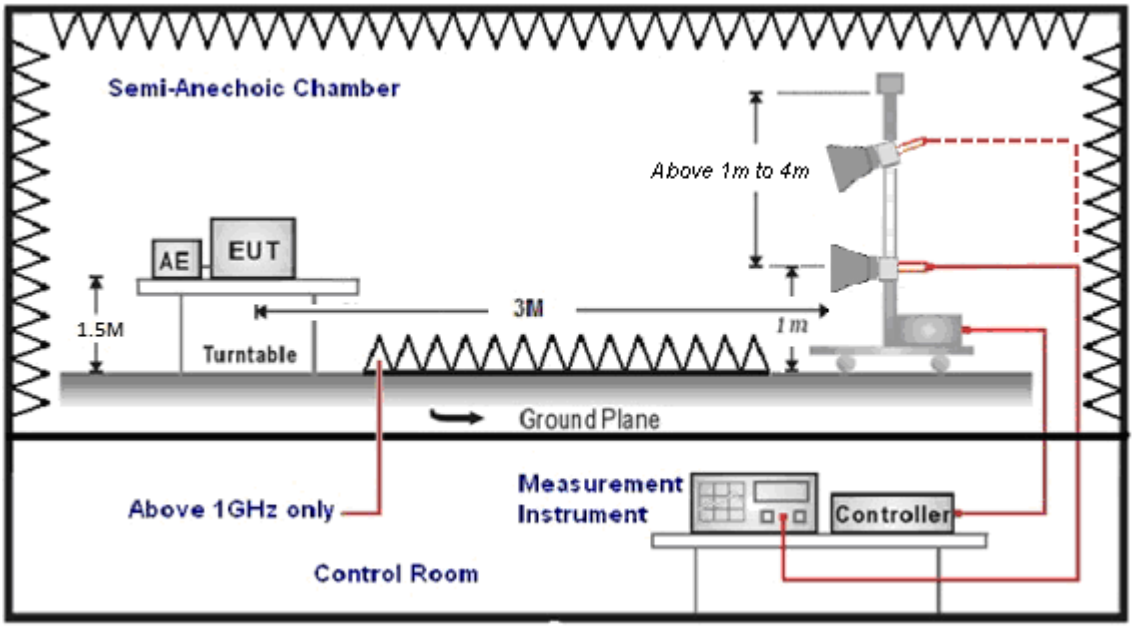
Semi-Anechoic Chamber
Above 1m to 4m
AE
EUT
1.5M
3M
1 m
Turntable
Ground Plane
Above 1GHz only
Measurement
Instrument
Controller
Control Room

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height(below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / 1/T for average measurements when Duty cycle <0.98. A nonconductive material surrounded the EUT to supporting the EUT for standing on tree orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro colts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)
FI= Reading of the field intensity.
AF= Antenna factor.
CL= Cable loss.
P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)
The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:
(a) For fundamental frequency : Transmitter Output < +30dBm
(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5. Test Result

Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	198658	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 1	Date:	11/05/2016

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
160.5000	26.37	-5.11	21.26	43.50	-22.24	QP	H
301.5000	24.24	-3.35	20.89	46.00	-25.11	QP	H
471.5000	26.08	0.21	26.29	46.00	-19.71	QP	H
619.0000	24.58	3.30	27.88	46.00	-18.12	QP	H
795.5000	24.89	6.62	31.51	46.00	-14.49	QP	H
875.0000	23.90	8.07	31.97	46.00	-14.03	QP	H
166.5000	28.62	-5.34	23.28	43.50	-20.22	QP	V
232.5000	31.45	-6.87	24.58	46.00	-21.42	QP	V
435.5000	26.44	-0.61	25.83	46.00	-20.17	QP	V
501.5000	27.07	0.77	27.84	46.00	-18.16	QP	V
717.5000	26.90	5.13	32.03	46.00	-13.97	QP	V
826.5000	25.83	7.14	32.97	46.00	-13.03	QP	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	198658	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 2	Date:	11/04/2016
Frequency:	2412MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4824.000	49.27	-7.96	41.31	74.00	-32.69	peak	H
4824.000	49.62	-7.96	41.66	74.00	-32.34	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	198658	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 2	Date:	11/04/2016
Frequency:	2437MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4874.000	48.37	-7.80	40.57	74.00	-33.43	peak	H
4874.000	49.54	-7.80	41.74	74.00	-32.26	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	198658	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 2	Date:	11/04/2016
Frequency:	2462MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4924.000	49.87	-7.65	42.22	74.00	-31.78	peak	H
4924.000	51.52	-7.65	43.87	74.00	-30.13	peak	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	198658	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 3	Date:	11/04/2016
Frequency:	2412MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4824.000	48.05	-7.96	40.09	74.00	-33.91	peak	H
4824.000	48.84	-7.96	40.88	74.00	-33.12	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	198658	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 3	Date:	11/04/2016
Frequency:	2437MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4874.000	50.20	-7.80	42.40	74.00	-31.60	peak	H
4874.000	48.61	-7.80	40.81	74.00	-33.19	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	198658	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 3	Date:	11/04/2016
Frequency:	2462MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4924.000	50.22	-7.65	42.57	74.00	-31.43	peak	H
4924.000	50.23	-7.65	42.58	74.00	-31.42	peak	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	198658	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 4	Date:	11/04/2016
Frequency:	2412MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4824.000	49.97	-7.96	42.01	74.00	-31.99	peak	H
4824.000	50.14	-7.96	42.18	74.00	-31.82	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	198658	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 4	Date:	11/04/2016
Frequency:	2437MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4874.000	48.89	-7.80	41.09	74.00	-32.91	peak	H
4874.000	49.07	-7.80	41.27	74.00	-32.73	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	198658	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 4	Date:	11/04/2016
Frequency:	2462MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4924.000	49.61	-7.65	41.96	74.00	-32.04	peak	H
4924.000	49.85	-7.65	42.20	74.00	-31.80	peak	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 2	Date:	2016/11/4
Ant.Polar.:	Horizontal		
Description:			

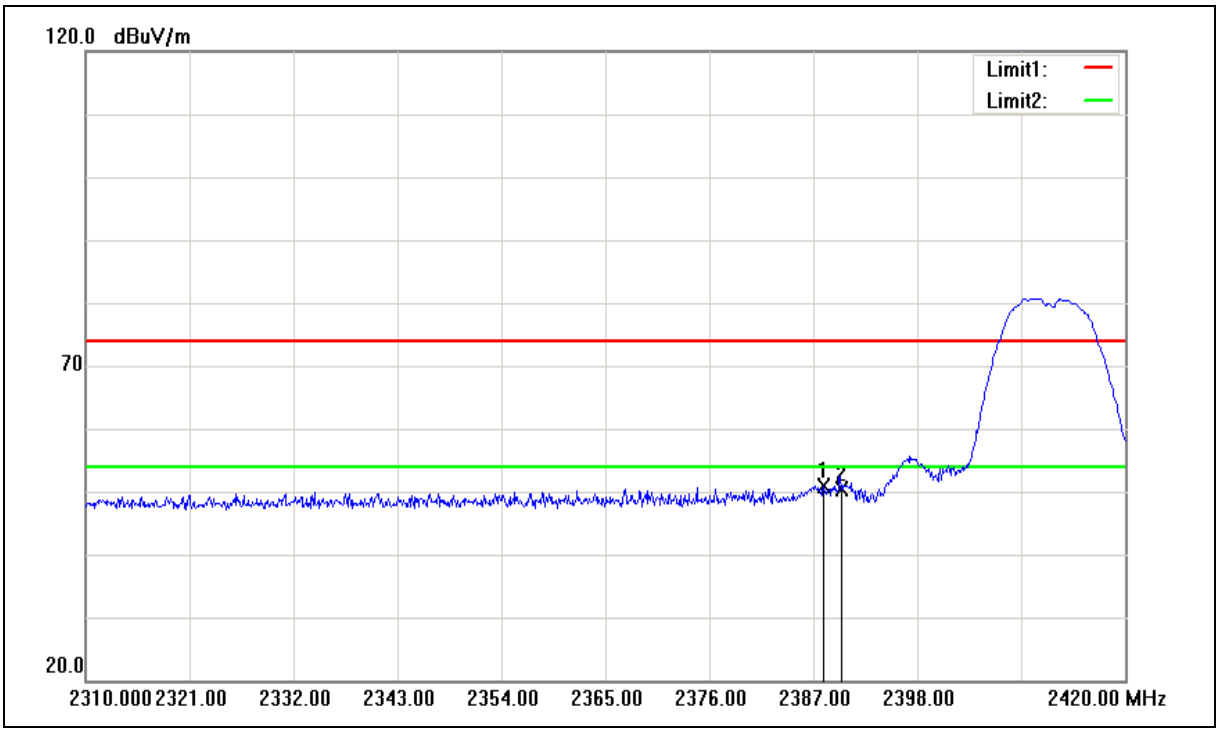

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.100	51.19	-0.26	50.93	74.00	-23.07	peak
2	2390.000	50.60	-0.26	50.34	74.00	-23.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 2	Date:	2016/11/4
Ant.Polar.:	Vertical		
Description:			

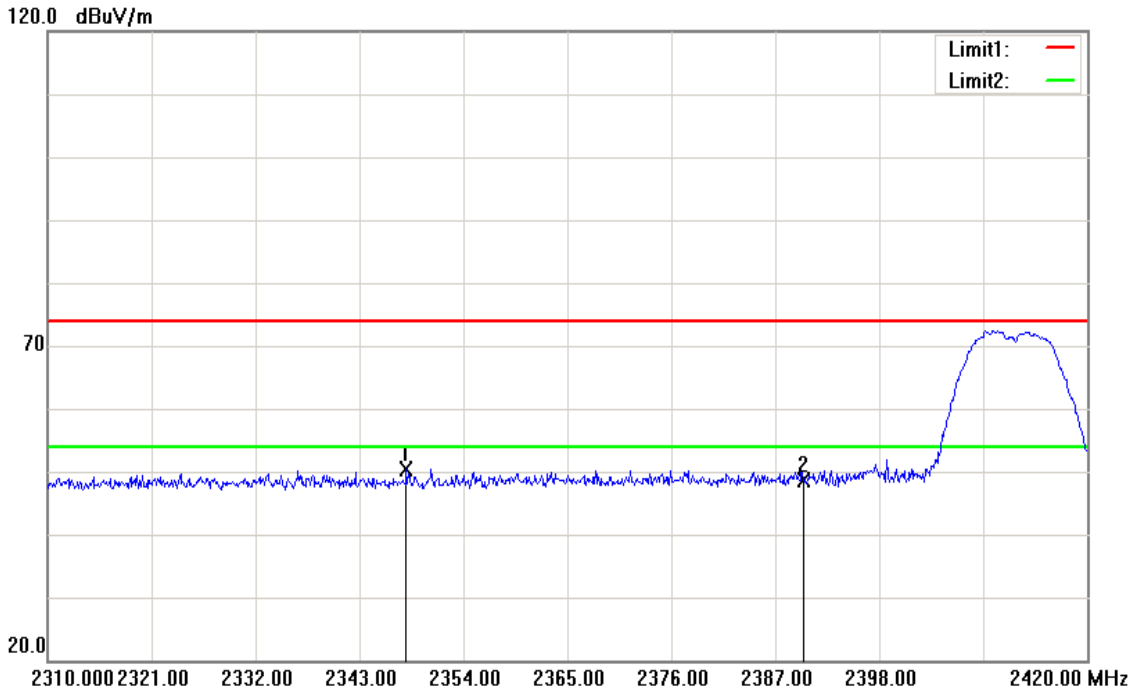

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2347.950	50.80	-0.43	50.37	74.00	-23.63	peak
2	2390.000	48.89	-0.26	48.63	74.00	-25.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 2	Date:	2016/11/4
Ant.Polar.:	Horizontal		
Description:			

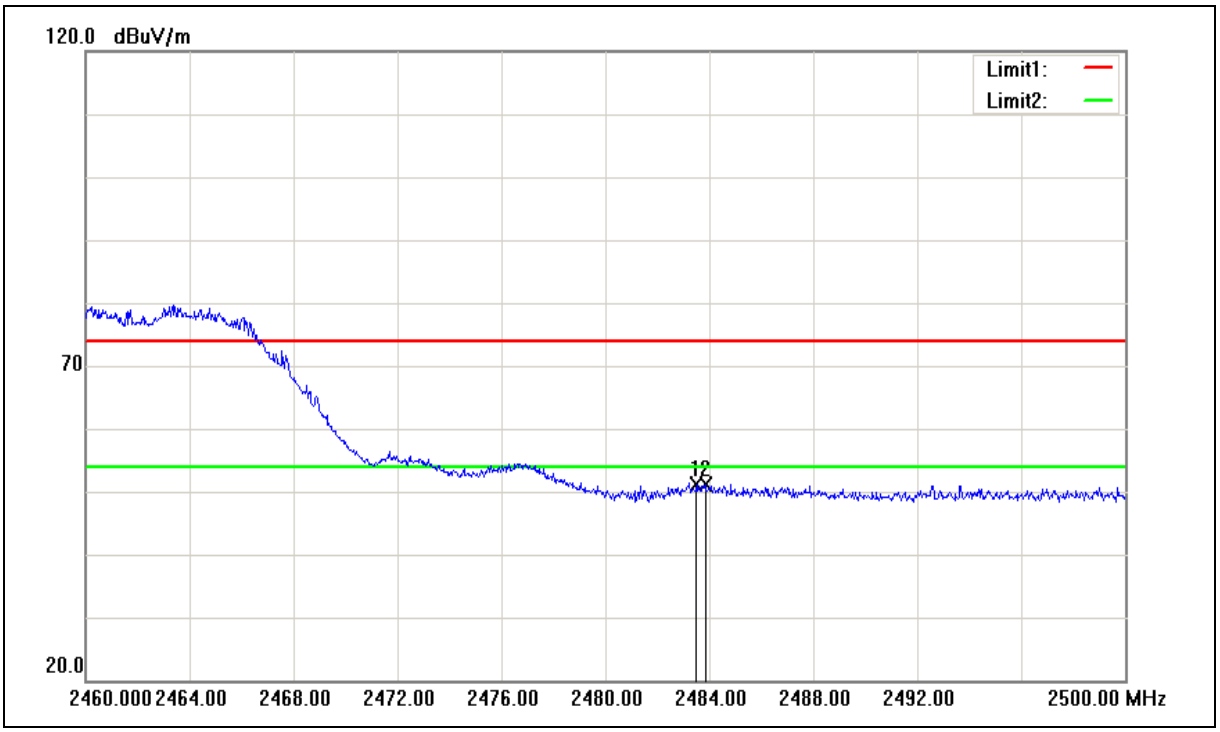

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	51.05	0.11	51.16	74.00	-22.84	peak
2	2483.840	51.10	0.11	51.21	74.00	-22.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 2	Date:	2016/11/4
Ant.Polar.:	Vertical		
Description:			

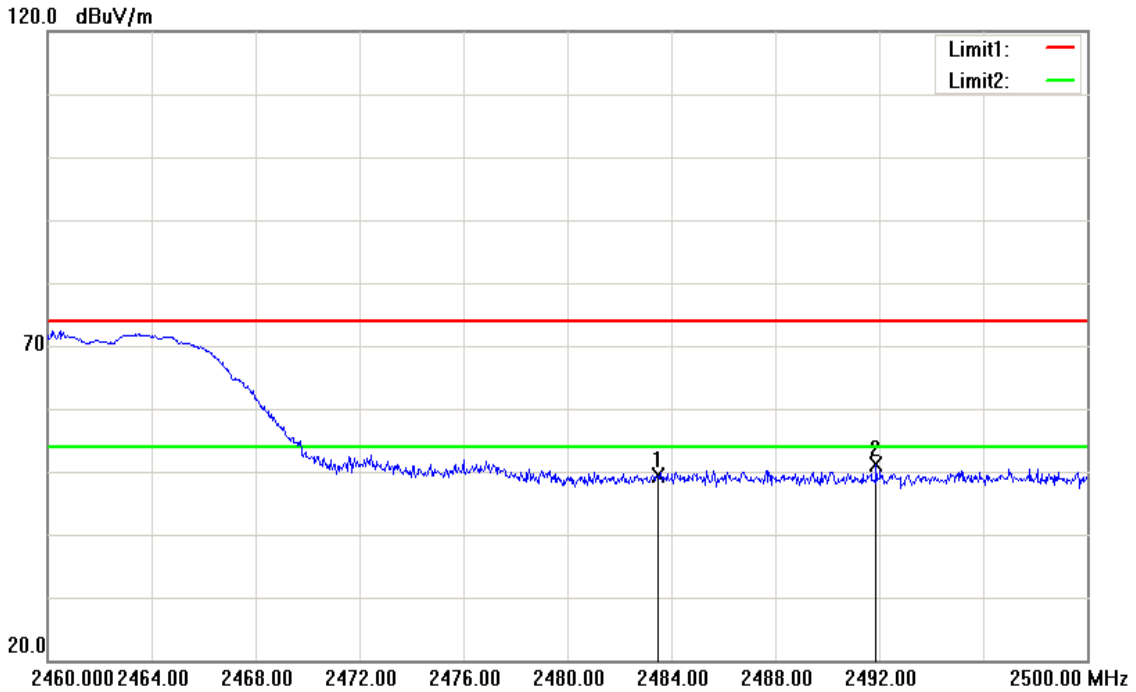

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	49.27	0.11	49.38	74.00	-24.62	peak
2	2491.880	50.96	0.15	51.11	74.00	-22.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 3	Date:	2016/11/4
Ant.Polar.:	Horizontal		
Description:			

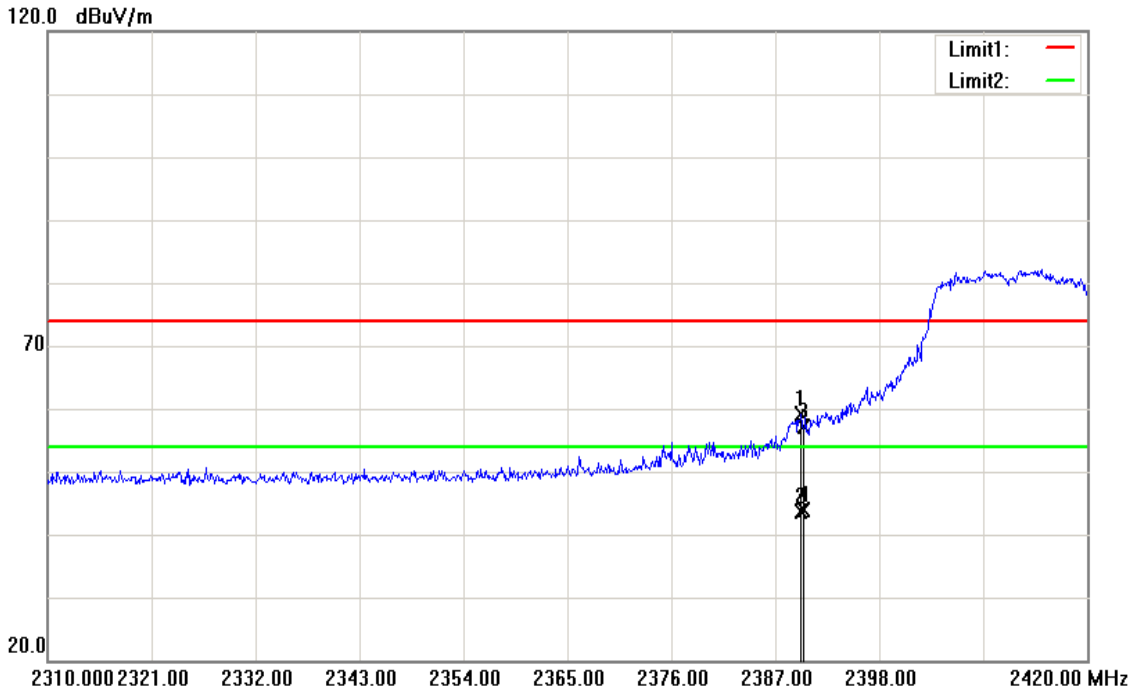

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.750	59.45	-0.26	59.19	74.00	-14.81	peak
2	2389.750	43.97	-0.26	43.71	54.00	-10.29	AVG
3	2390.000	57.46	-0.26	57.20	74.00	-16.80	peak
4	2390.000	44.15	-0.26	43.89	54.00	-10.11	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 3	Date:	2016/11/4
Ant.Polar.:	Vertical		
Description:			

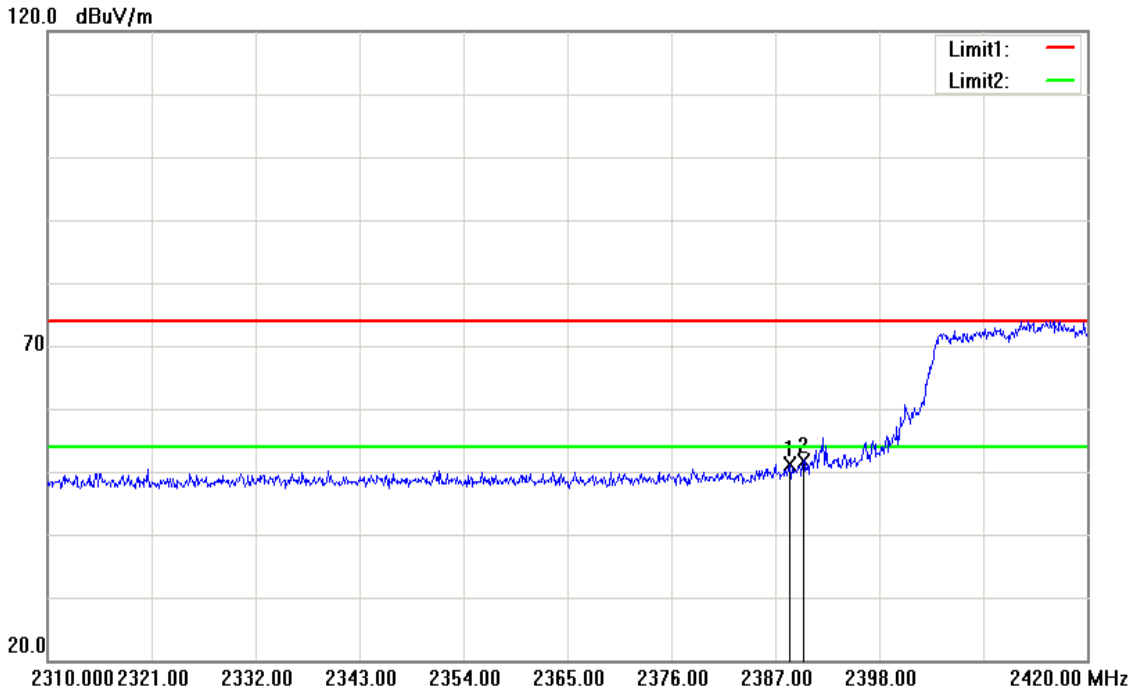

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	51.30	-0.26	51.04	74.00	-22.96	peak
2	2390.000	52.01	-0.26	51.75	74.00	-22.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 3	Date:	2016/11/4
Ant.Polar.:	Horizontal		
Description:			

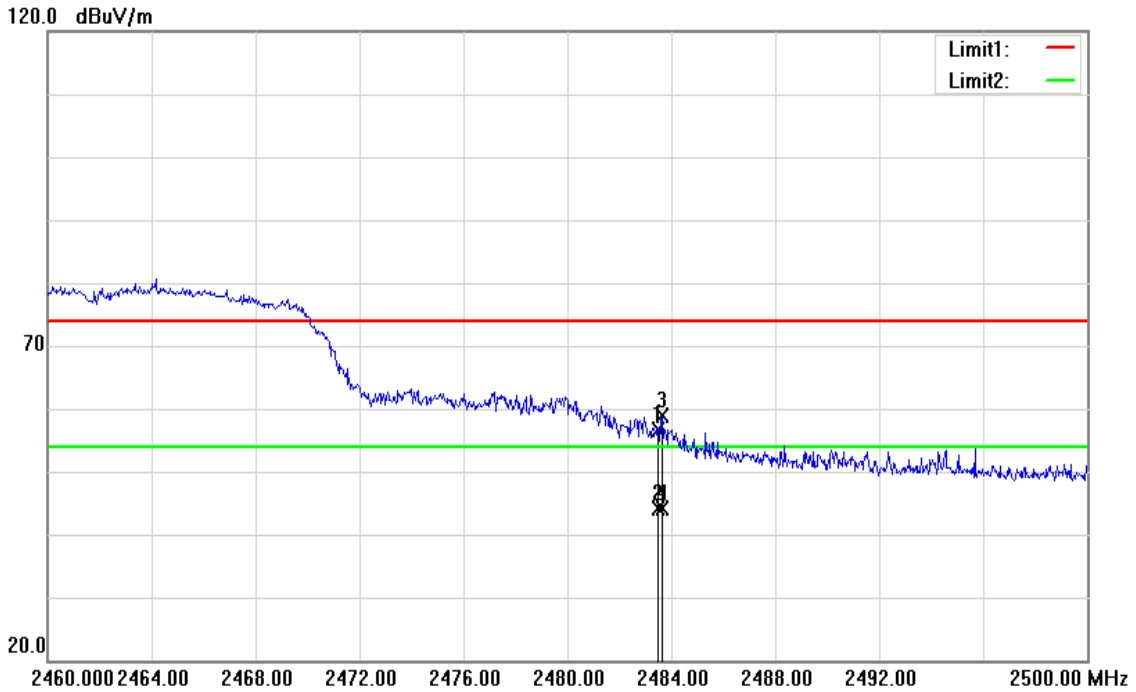

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.56	0.11	56.67	74.00	-17.33	peak
2	2483.500	44.13	0.11	44.24	54.00	-9.76	AVG
3	2483.640	58.77	0.11	58.88	74.00	-15.12	peak
4	2483.640	44.10	0.11	44.21	54.00	-9.79	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 3	Date:	2016/11/4
Ant.Polar.:	Vertical		
Description:			

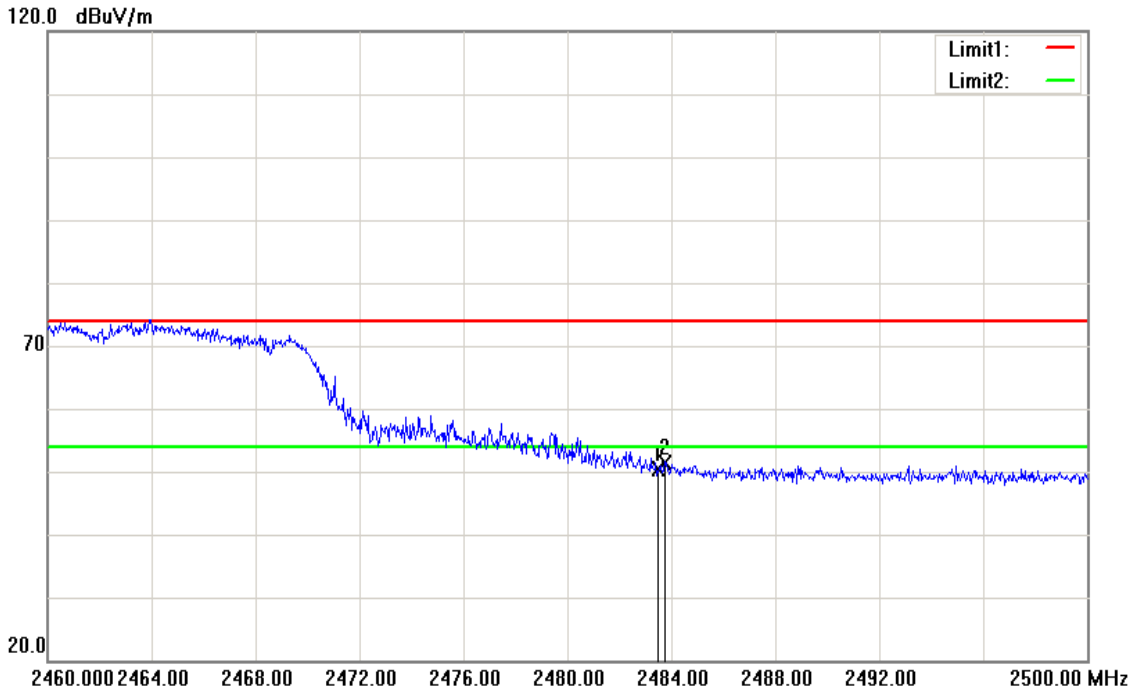

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	50.22	0.11	50.33	74.00	-23.67	peak
2	2483.760	51.39	0.11	51.50	74.00	-22.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 4	Date:	2016/11/4
Ant.Polar.:	Horizontal		
Description:			

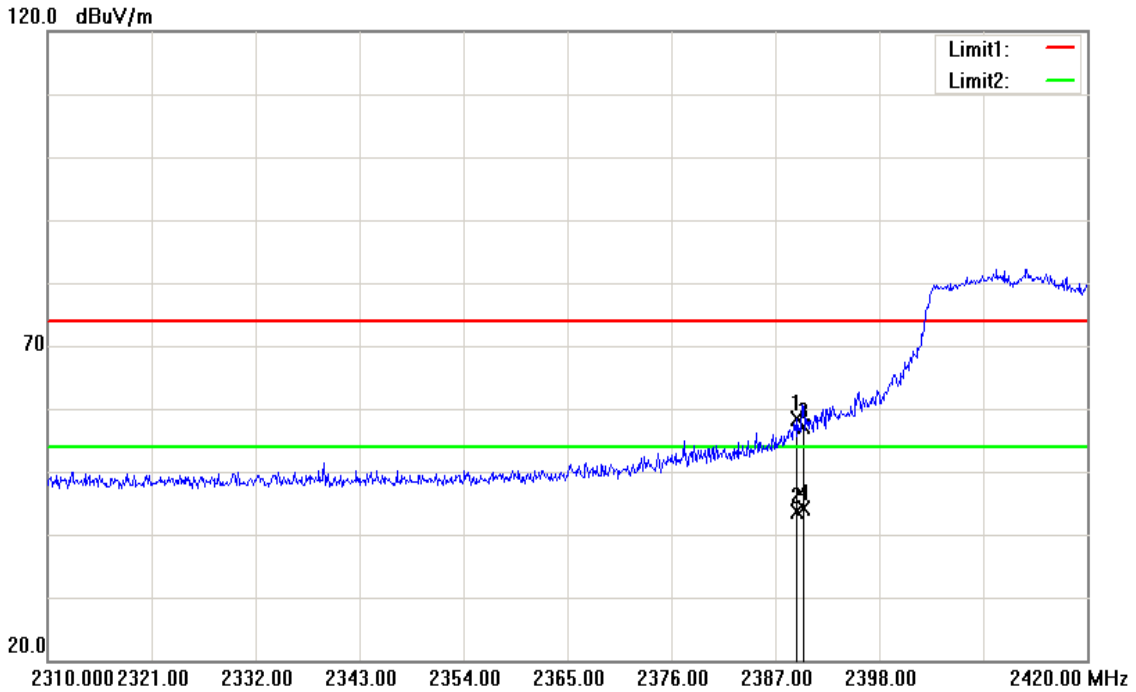

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.200	58.68	-0.26	58.42	74.00	-15.58	peak
2	2389.200	43.86	-0.26	43.60	54.00	-10.40	AVG
3	2390.000	57.38	-0.26	57.12	74.00	-16.88	peak
4	2390.000	44.38	-0.26	44.12	54.00	-9.88	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 4	Date:	2016/11/4
Ant.Polar.:	Vertical		
Description:			

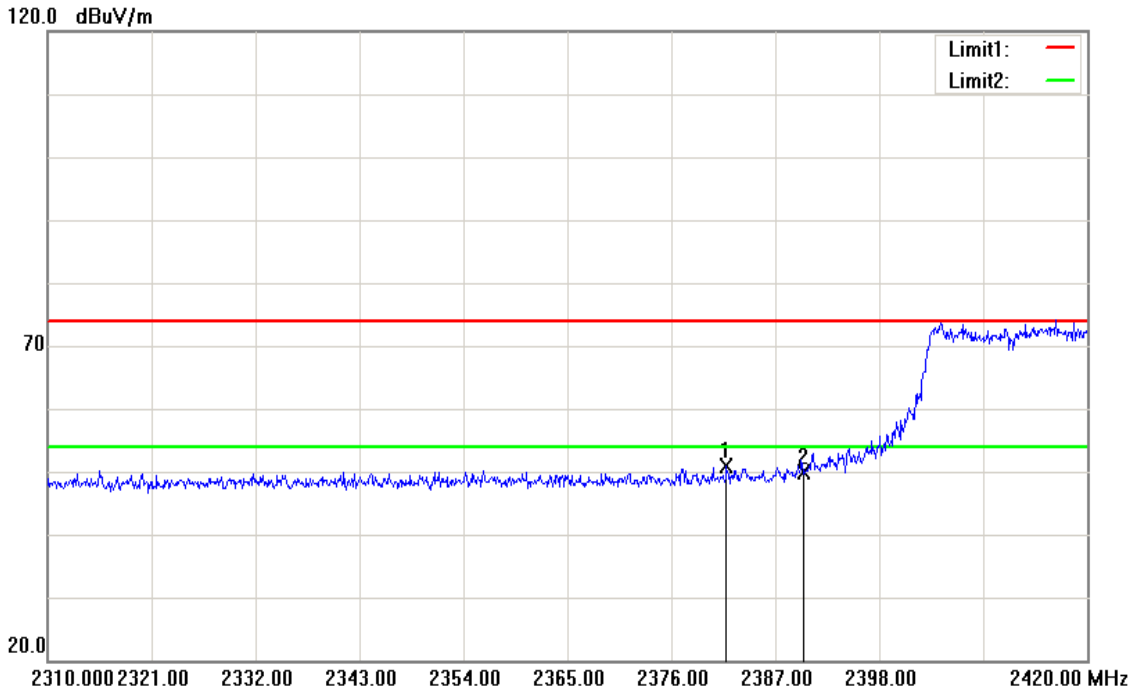

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2381.830	51.08	-0.29	50.79	74.00	-23.21	peak
2	2390.000	50.11	-0.26	49.85	74.00	-24.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 4	Date:	2016/11/4
Ant.Polar.:	Horizontal		
Description:			

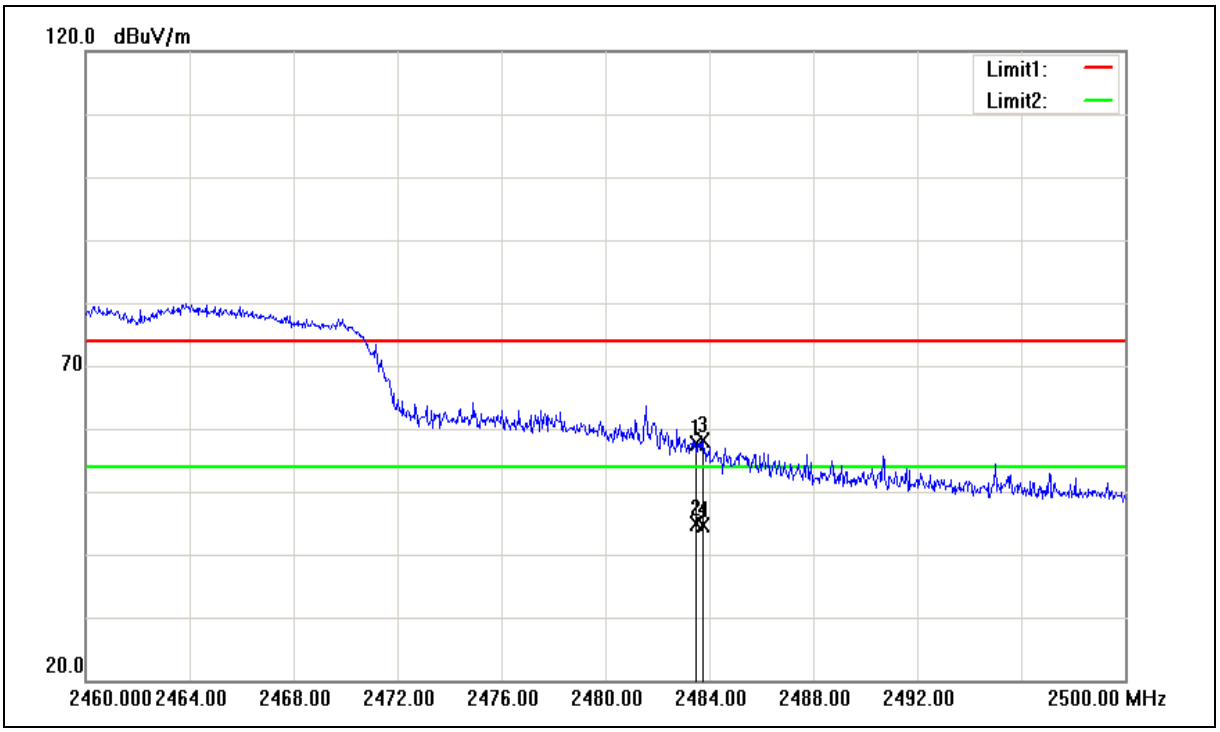

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.56	0.11	57.67	74.00	-16.33	peak
2	2483.500	44.65	0.11	44.76	54.00	-9.24	AVG
3	2483.760	57.99	0.11	58.10	74.00	-15.90	peak
4	2483.760	44.57	0.11	44.68	54.00	-9.32	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 4	Date:	2016/11/4
Ant.Polar.:	Vertical		
Description:			

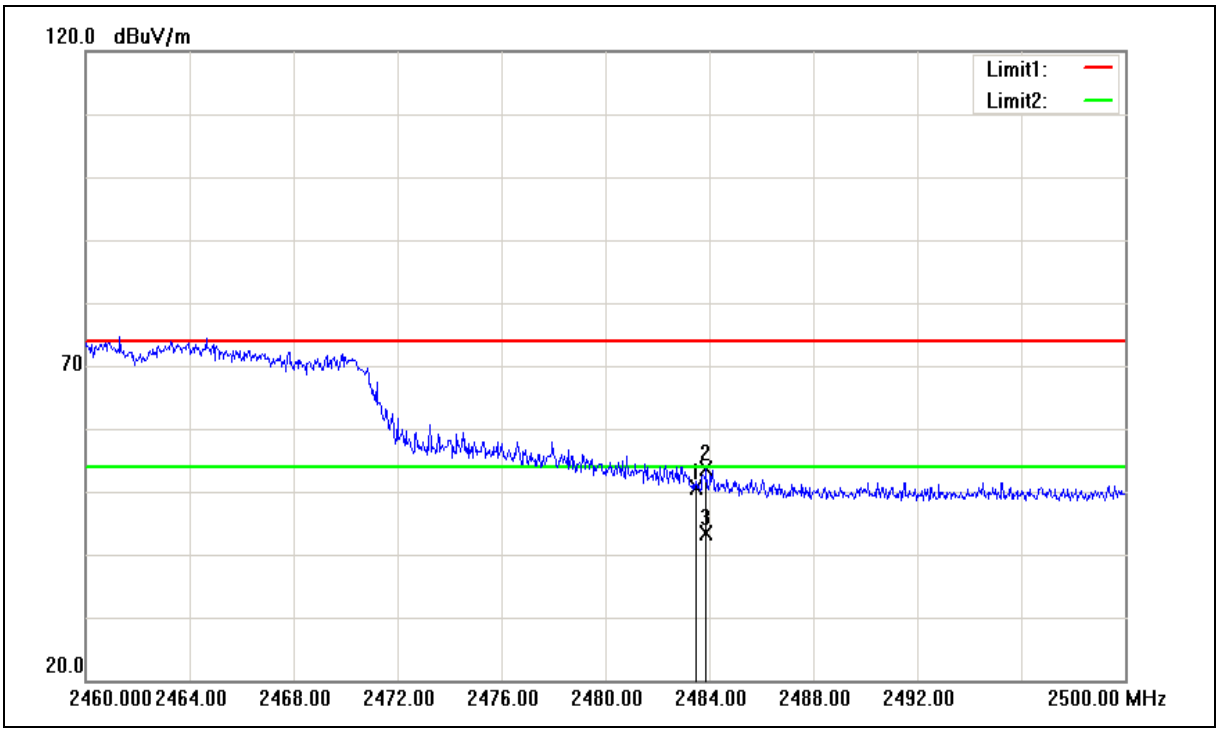

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	50.62	0.11	50.73	74.00	-23.27	peak
2	2483.880	53.59	0.11	53.70	74.00	-20.30	peak
3	2483.880	43.19	0.11	43.30	54.00	-10.70	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for maximum output power is 30dBm.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

＊ SISO mode：Directional Gain = Max. Gain = 0.99 dBi < 6dBi

6.2. Test Setup

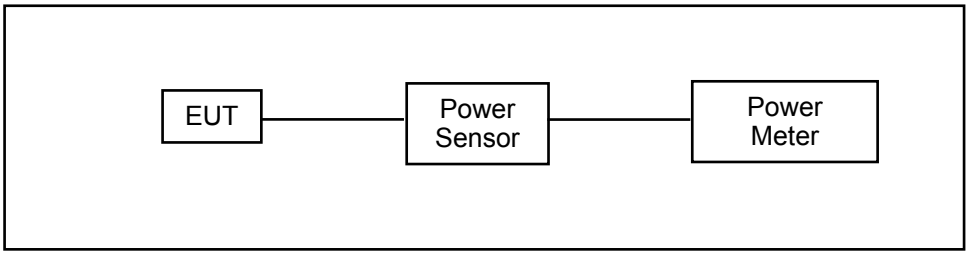

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	MA2411B	1126022	08/29/2016	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.

6.5. Test Result

Model Number	198658						
Test Item	Maximum Conducted Output Power						
Date of Test	11/02/2016						
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			dBm	W	dBm	W	dBm
Mode 2	2412	1M	14.62	0.029	**17.79**	**0.060**	< 30
	2437		14.43	0.028	17.50	0.056	< 30
	2462		14.26	0.027	17.23	0.053	< 30
	2437	2M	14.31	0.027	17.37	0.055	< 30
	2437	5.5M	14.23	0.026	17.21	0.053	< 30
	2437	11M	14.12	0.026	17.08	0.051	< 30
Mode 3	2412	6M	9.88	0.010	**19.56**	**0.090**	< 30
	2437		9.48	0.009	19.12	0.082	< 30
	2462		9.26	0.008	18.96	0.079	< 30
	2437	9M	9.37	0.009	19.01	0.080	< 30
	2437	12M	9.31	0.009	18.94	0.078	< 30
	2437	18M	9.24	0.008	18.86	0.077	< 30
	2437	24M	9.17	0.008	18.77	0.075	< 30
	2437	36M	9.12	0.008	18.63	0.073	< 30
	2437	48M	9.08	0.008	18.52	0.071	< 30
	2437	54M	8.96	0.008	18.41	0.069	< 30
Mode 4	2412	6.5M	8.82	0.008	**18.48**	**0.070**	< 30
	2437		8.34	0.007	18.09	0.064	< 30
	2462		8.11	0.006	17.84	0.061	< 30
	2437	13M	8.22	0.007	17.98	0.063	< 30
	2437	19.5M	8.11	0.006	17.84	0.061	< 30
	2437	26M	8.02	0.006	17.72	0.059	< 30
	2437	39M	7.92	0.006	17.61	0.058	< 30
	2437	52M	7.83	0.006	17.49	0.056	< 30
	2437	58.5M	7.71	0.006	17.32	0.054	< 30
	2437	65M	7.62	0.006	17.12	0.052	< 30

Note: The relevant measured result has the offset with cable loss already.

7 6dB RF Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

7.2. Test Setup

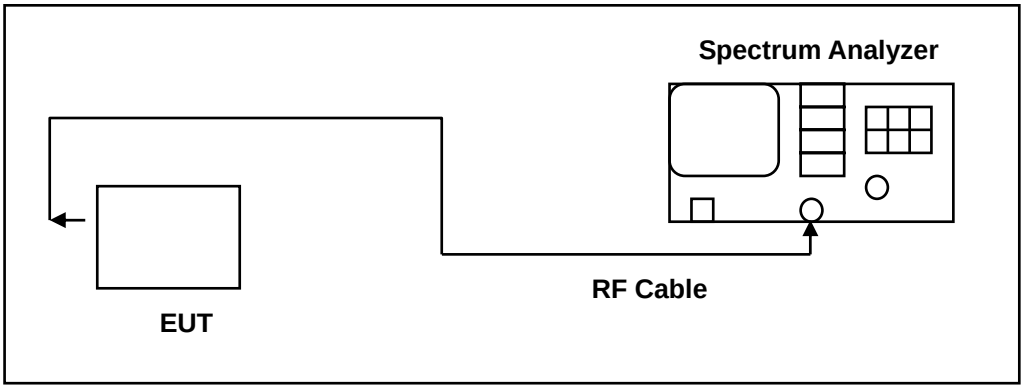

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.
6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.
The test was performed at 3 channels (Channel low, middle, high)

7.5. Test Result

Model Number	198658		
Test Item	6dB RF Bandwidth		
Date of Test	11/06/2016		
Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Mode 2	2412	9624	> 500
	2437	9607	> 500
	2462	9629	> 500
Mode 3	2412	16580	> 500
	2437	16580	> 500
	2462	16570	> 500
Mode 4	2412	17810	> 500
	2437	17800	> 500
	2462	17780	> 500

7.6. Test Graphs

Mode 2: IEEE 802.11b link mode	
2412 MHz	
2437 MHz	
2462 MHz	

Mode 3: IEEE 802.11g link mode	
2412 MHz	
2437 MHz	
2462 MHz	

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	
2412 MHz	
2437 MHz	
2462 MHz	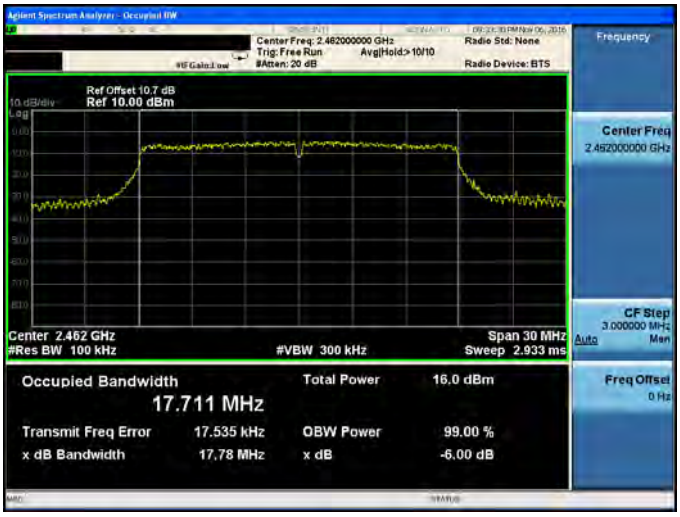

8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

∗ SISO mode：Directional Gain = Max. Gain = 0.99 dBi < 6dBi

8.2. Test Setup

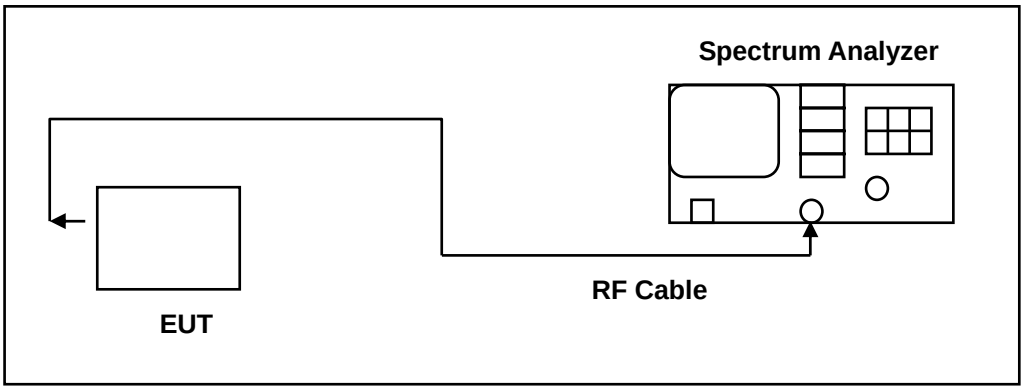

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 × RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5. Test Result

Model Number	198658		
Test Item	Maximum Power Density		
Date of Test	11/06/2016		
Test Mode	Frequency (MHz)	Measurement (dBm/3KHz)	Limit (dBm/3KHz)
		ANT-0	
Mode 2	2412	-3.130	< 8
	2437	-3.164	< 8
	2462	-3.362	< 8
Mode 3	2412	-14.915	< 8
	2437	-15.277	< 8
	2462	-15.466	< 8
Mode 4	2412	-15.925	< 8
	2437	-16.315	< 8
	2462	-16.604	< 8

8.6. Test Graphs

Mode 2: IEEE 802.11b link mode	
2412 MHz	
2437 MHz	
2462 MHz	

Mode 3: IEEE 802.11g link mode	
2412 MHz	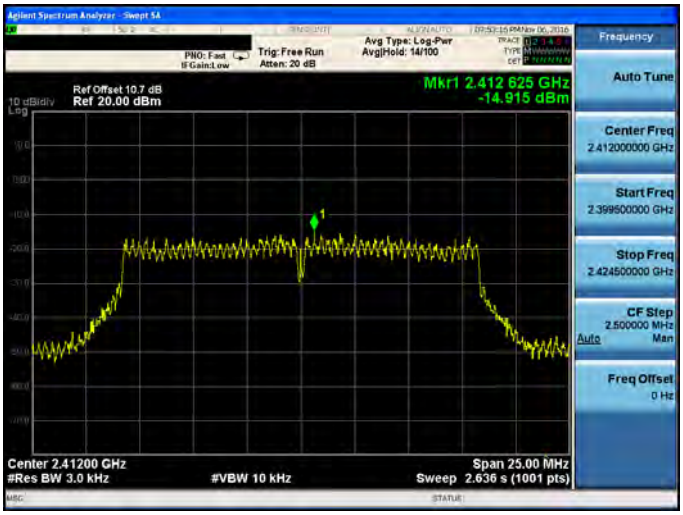
2437 MHz	
2462 MHz	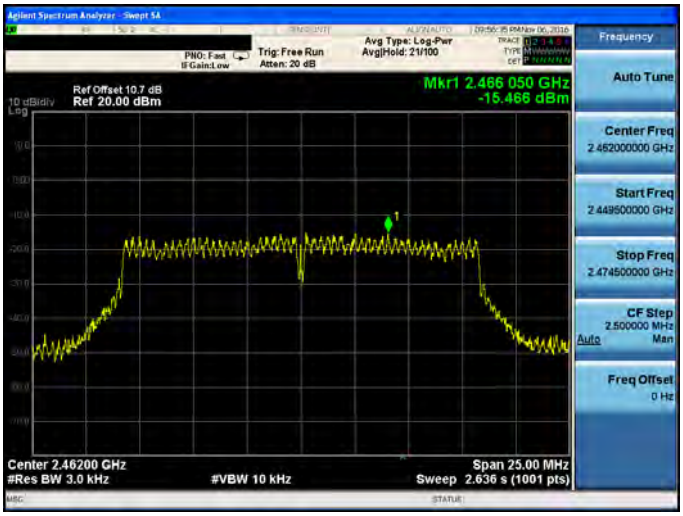

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	
2412 MHz	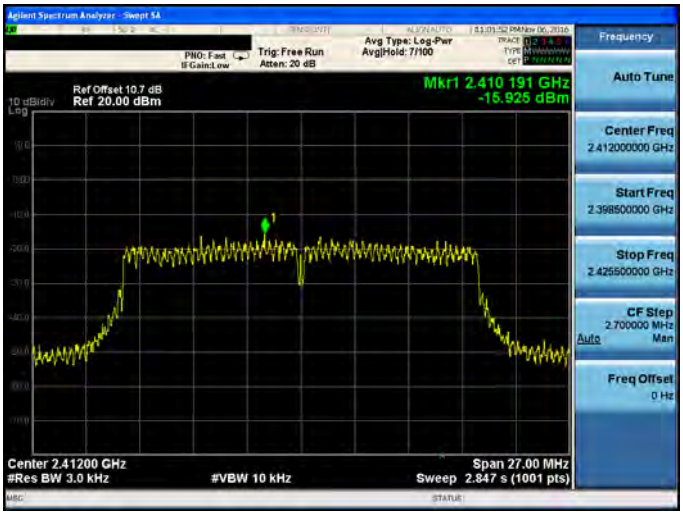
2437 MHz	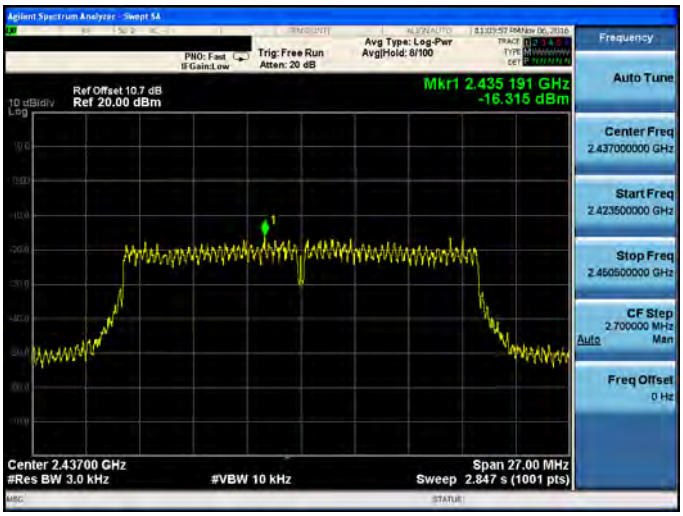
2462 MHz	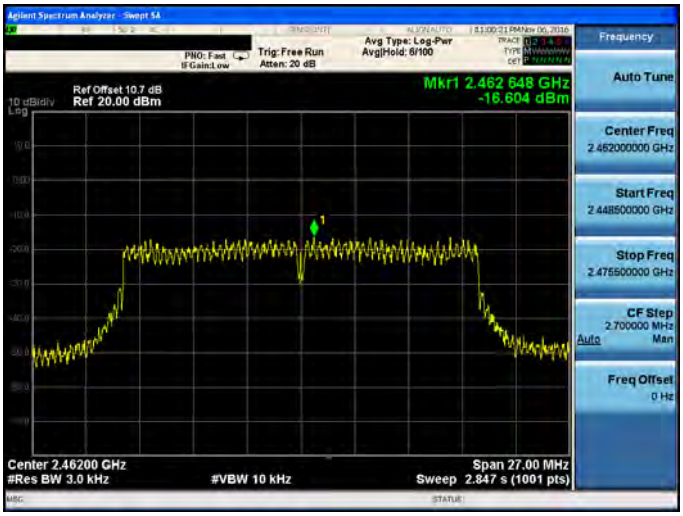

9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

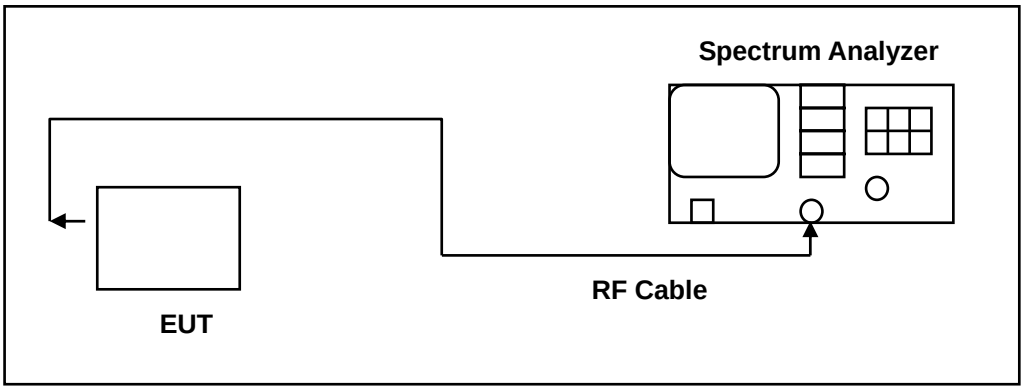

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Spectrum Analyzer	Agilent	E4408B	MY45107753	08/08/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.
All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.
The test was performed at 3 channels.

9.5. Test Graphs

Reference level

Mode 2: IEEE 802.11b link mode	
2412 MHz	
2437 MHz	
2462 MHz	

Mode 3: IEEE 802.11g link mode	
2412 MHz	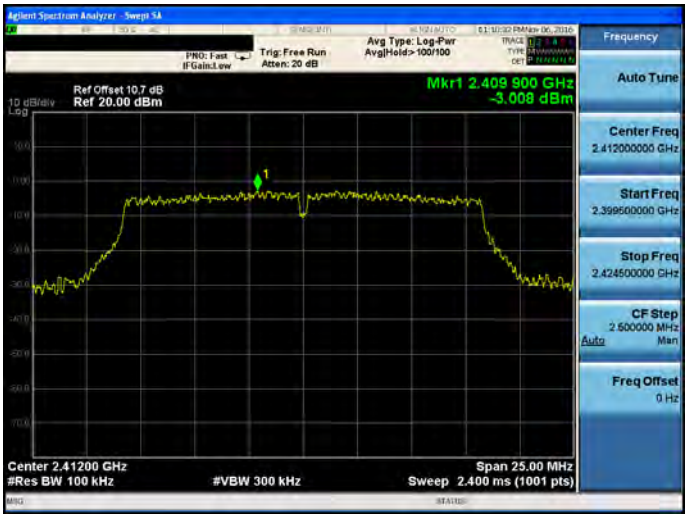
2437 MHz	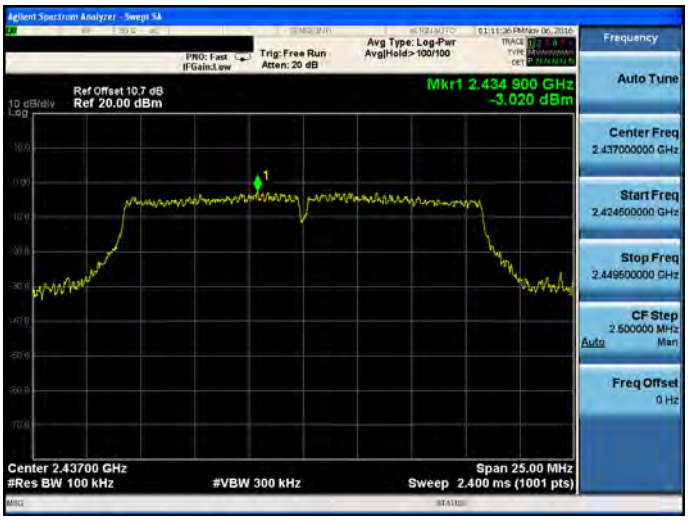
2462 MHz	

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	
2412 MHz	
2437 MHz	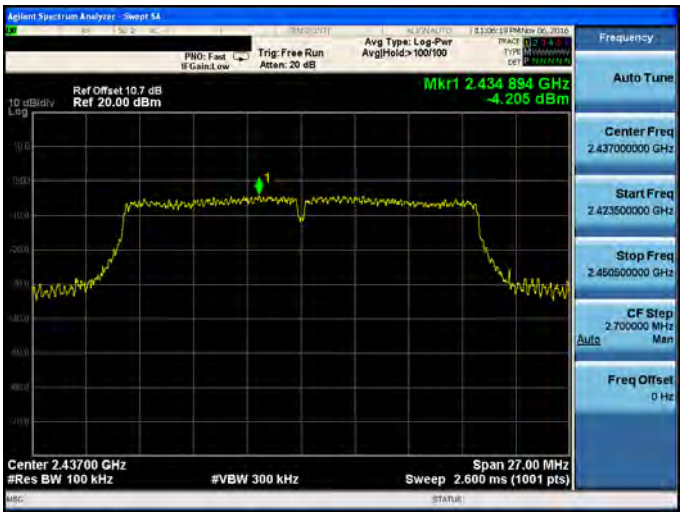
2462 MHz	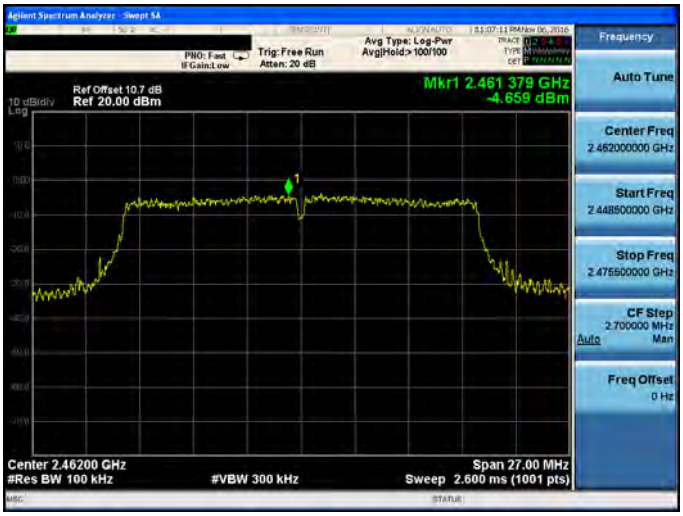

Out of Band Conducted Emissions

Mode 2: IEEE 802.11b link mode	
2412 MHz	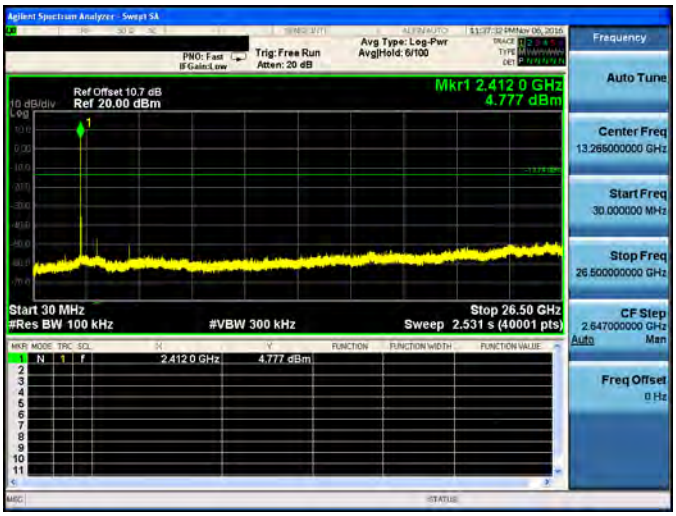
2437 MHz	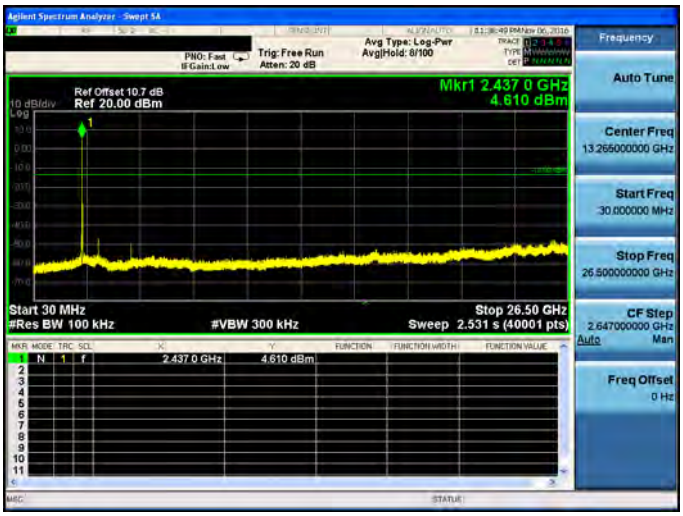
2462 MHz	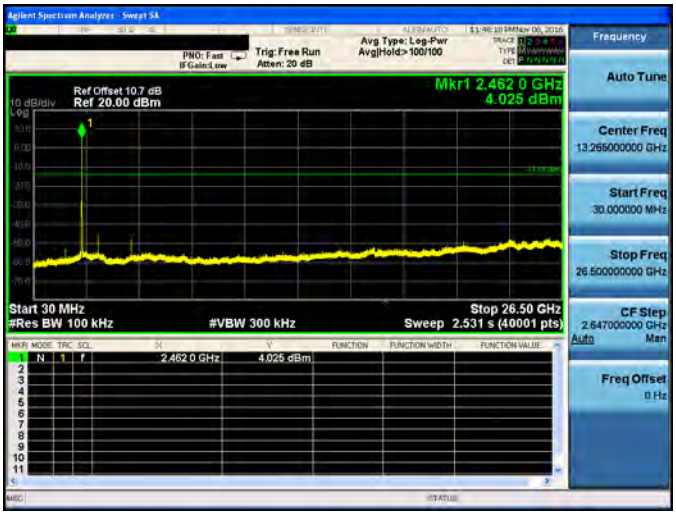

Mode 3: IEEE 802.11g link mode	
2412 MHz	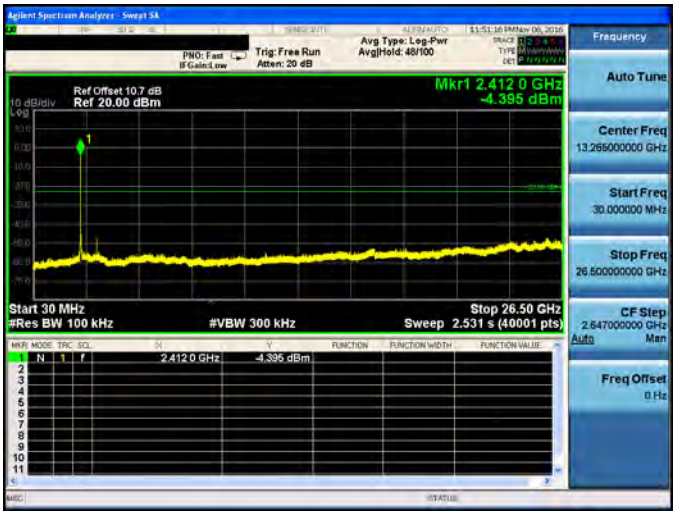
2437 MHz	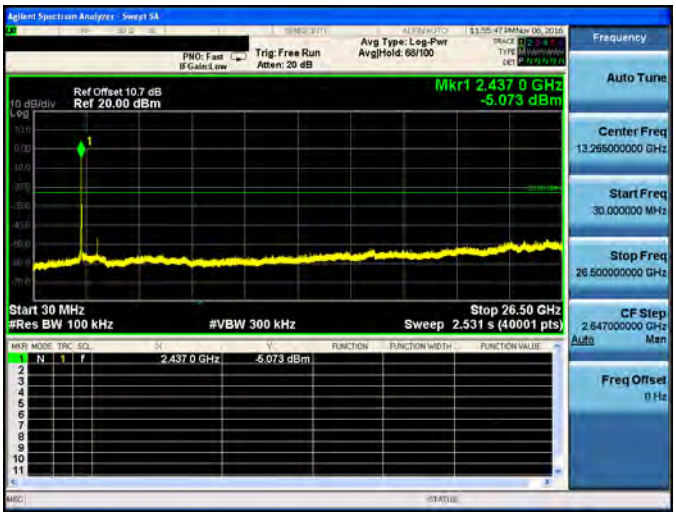
2462 MHz	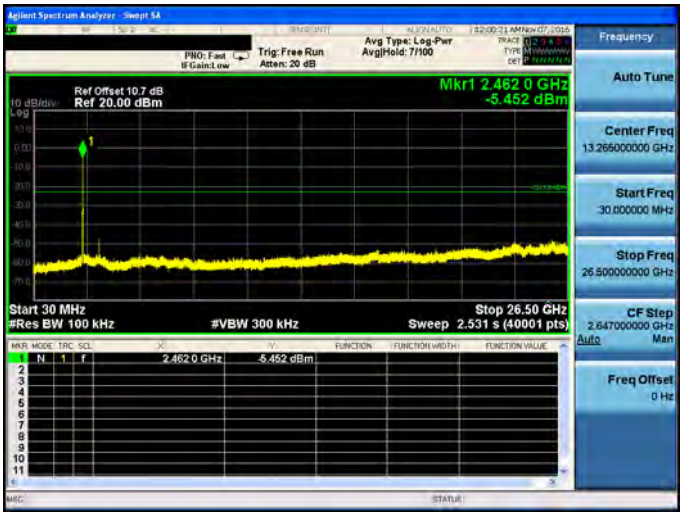

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	
2412 MHz	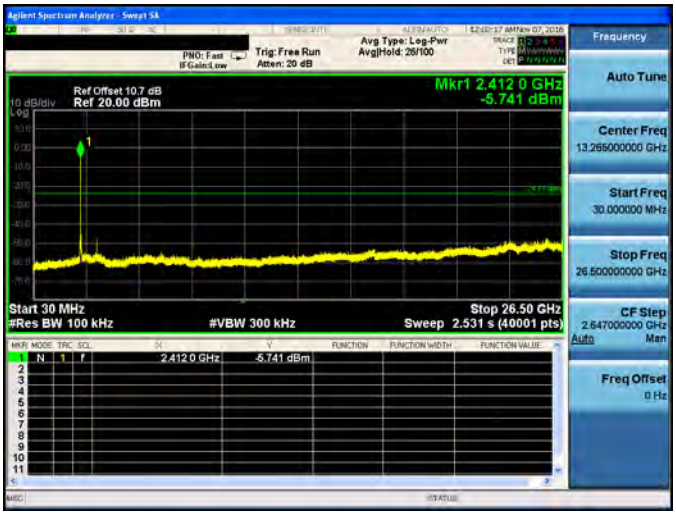
2437 MHz	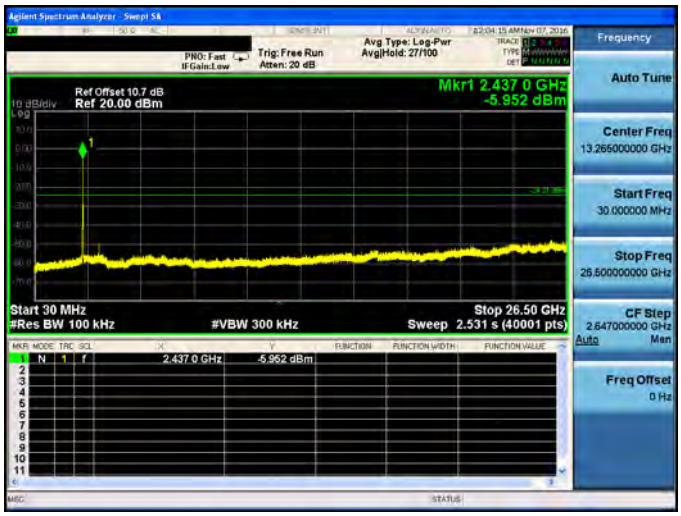
2462 MHz	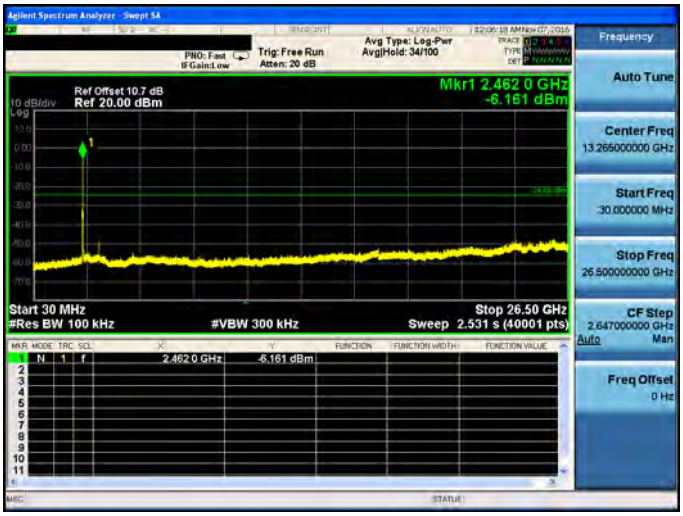

Conducted Band Edge

Mode 2: IEEE 802.11b link mode	
2412 MHz	
2462 MHz	

Mode 3: IEEE 802.11g link mode	
2412 MHz	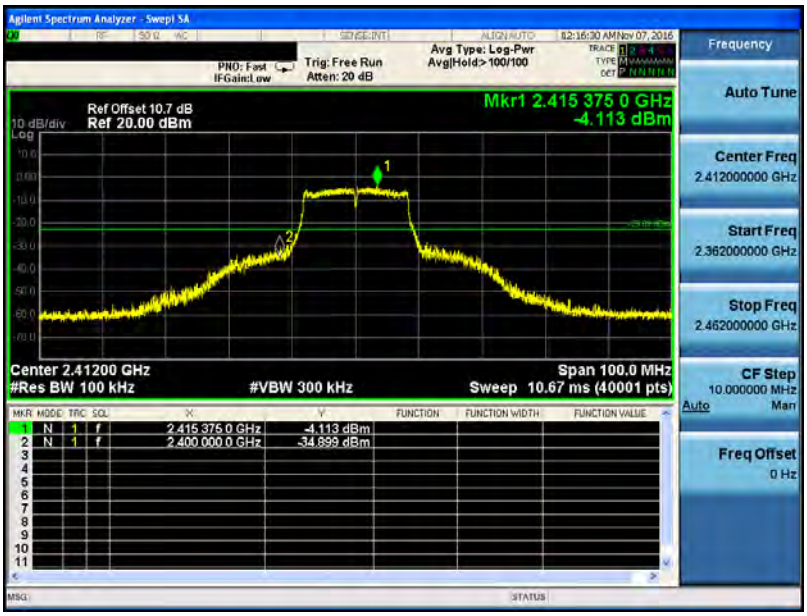
2462 MHz	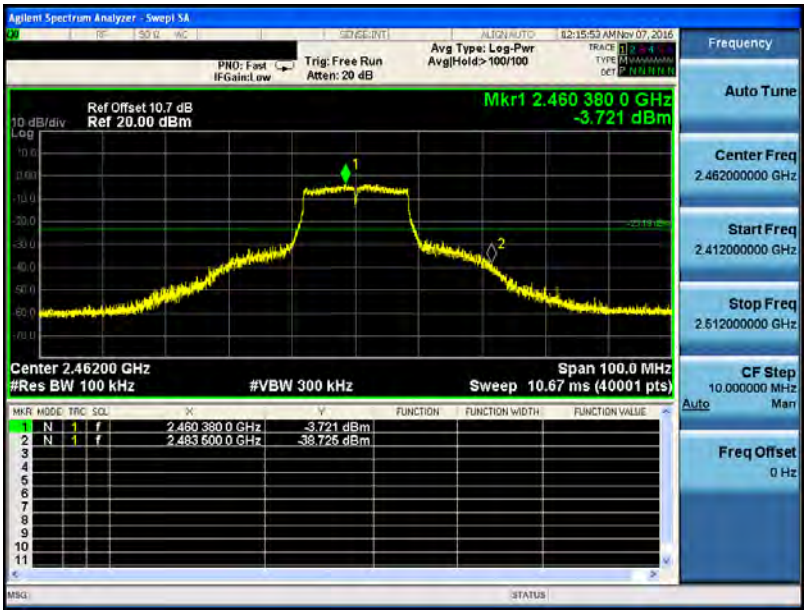

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	
2412 MHz	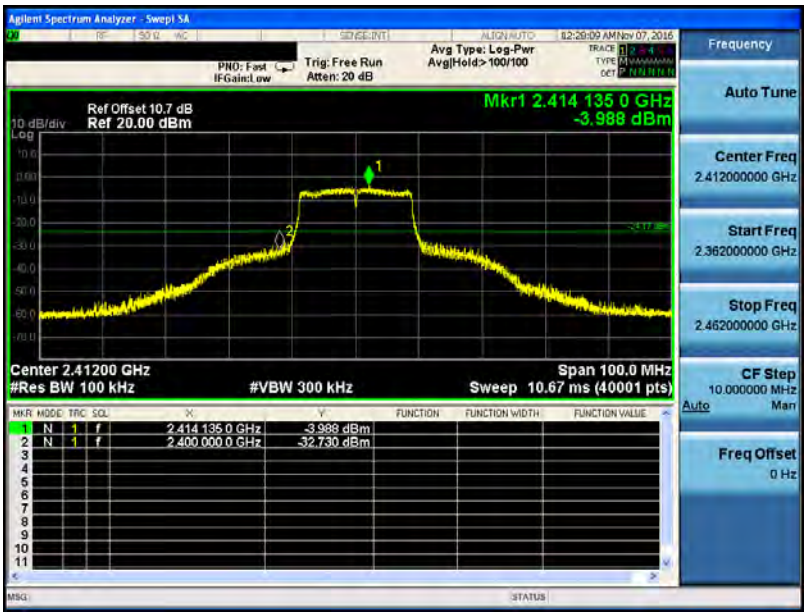
2462 MHz	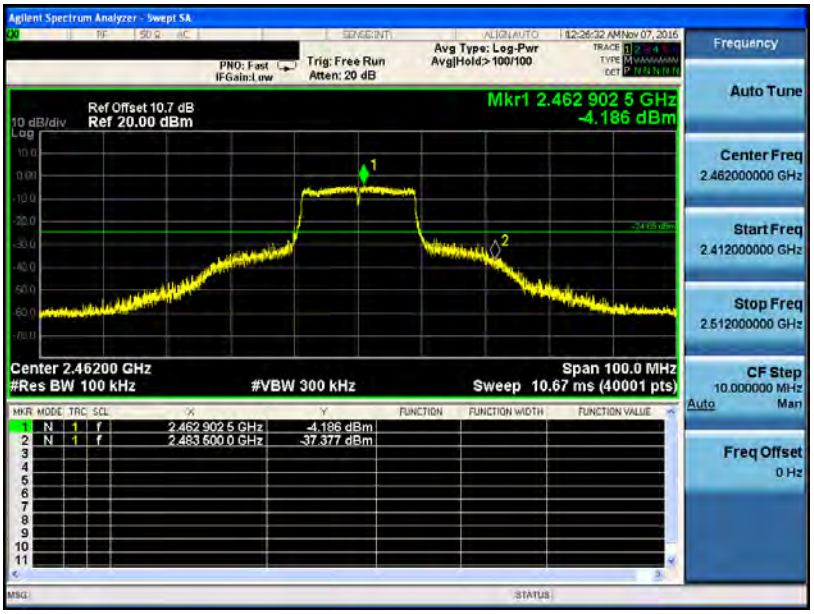

10 Antenna Measurement

10.1. Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. Antenna Description

See section 2 – antenna information.