



# TEST REPORT

|                                                                                                                                                                                                                       |                                                |                                                         |                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|---------------------------------------------------------|------------------------------------------------------|
| <b>KCTL Inc.</b><br>65, Sinwon-ro, Yeongtong-gu,<br>Suwon-si, Gyeonggi-do, 16677, Korea<br>TEL: 82-31-285-0894 FAX: 82-505-299-8311<br><a href="http://www.kctl.co.kr">www.kctl.co.kr</a>                             |                                                | Report No.:<br><b>KR19-SRF0131-B</b><br>Page (1) of (9) |                                                      |
| <b>1. Client</b><br>◦ Name : Kum Oh Electronics Co., Ltd.<br>◦ Address : 35, Gilju-ro 444beon-gil, Bucheon-si, Gyeonggi-do, Republic of Korea<br>◦ Date of Receipt : 2019-07-03                                       |                                                |                                                         |                                                      |
| <b>2. Use of Report</b> : -                                                                                                                                                                                           |                                                |                                                         |                                                      |
| <b>3. Name of Product and Model</b> : USPs Button Module(Vertical) /<br>KDUB-019V                                                                                                                                     |                                                |                                                         |                                                      |
| <b>4. Manufacturer and Country of Origin</b> : Kum Oh Electronics Co., Ltd. / Korea                                                                                                                                   |                                                |                                                         |                                                      |
| <b>5. FCC ID</b> : 2AJKSKDUB-019V                                                                                                                                                                                     |                                                |                                                         |                                                      |
| <b>6. Date of Test</b> : 2019-07-31 to 2019-08-14                                                                                                                                                                     |                                                |                                                         |                                                      |
| <b>7. Test Standards</b> : 47 CFR Part 1.1310                                                                                                                                                                         |                                                |                                                         |                                                      |
| <b>8. Test Results</b> : Refer to the test result in the test report                                                                                                                                                  |                                                |                                                         |                                                      |
| Affirmation                                                                                                                                                                                                           | Tested by<br>Name : MyeongJun Kwon (Signature) |                                                         | Technical Manager<br>Name : Jaehyong Lee (Signature) |
|                                                                                                                                                                                                                       |                                                |                                                         |                                                      |
| 2019-09-26                                                                                                                                                                                                            |                                                |                                                         |                                                      |
| <b>KCTL Inc.</b>                                                                                                                                                                                                      |                                                |                                                         |                                                      |
| As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc. |                                                |                                                         |                                                      |

#### Report revision history

| Date       | Revision                | Page No |
|------------|-------------------------|---------|
| 2019-08-20 | Initial report          | -       |
| 2019-08-23 | Updated                 | 6 ~ 8   |
| 2019-09-26 | Delete for BLE exposure | 6       |
|            |                         |         |
|            |                         |         |
|            |                         |         |
|            |                         |         |
|            |                         |         |
|            |                         |         |
|            |                         |         |

*This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.*

**KCTL**

**CONTENTS**

1. General information .....4

2. Device information .....4

2.1. Accessory information .....4

3. RF Exposure.....5

4. Test results .....6

4.1. WPT(Wireless Power Transfer) .....6

5. Measurement Equipment.....9



## 1. General information

Client : Kum Oh Electronics Co., Ltd.  
 Address : 35, Gilju-ro 444beon-gil, Bucheon-si, Gyeonggi-do, Republic of Korea  
 Manufacturer : Kum Oh Electronics Co., Ltd.  
 Address : 35, Gilju-ro 444beon-gil, Bucheon-si, Gyeonggi-do, Republic of Korea  
 Factory : NCC VINA ELECTRONICS CO., LTD  
 Address : LotB1, Song Khe-Noi Hoang Industrial zone, Bac Giang city, Bac Giang Province  
 Laboratory : KCTL Inc.  
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea  
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132  
 VCCI Registration No. : R-3327, G-198, C-3706, T-1849  
 Industry Canada Registration No. : 8035A  
 KOLAS No.: KT231

## 2. Device information

Equipment under test : USPs Button Module(Vertical)  
 Model : KDUB-019V  
 Frequency range : 2 402 MHz ~ 2 480 MHz (Bluetooth LE)  
 0.531 MHz (WPT)  
 Modulation technique : Bluetooth LE\_GFSK  
 WPT\_AM  
 Number of channels : 40 ch (Bluetooth LE)  
 Power source : DC 5 V  
 Antenna specification : PCB Antenna (Bluetooth LE)  
 Loop Coil Antenna (WPT)  
 Antenna gain : 3.10 dBi (Bluetooth LE)  
 Software version : Rev1.0  
 Hardware version : Rev1.0  
 Test device serial No. : N/A  
 Operation temperature : -20 °C ~ 50 °C

### 2.1. Accessory information

| Equipment  | Manufacturer                 | Model    | Serial No. | Power source |
|------------|------------------------------|----------|------------|--------------|
| Stylus Pen | Samsung Electronics Co., Ltd | EN-PN960 | -          | -            |

### 3. RF Exposure

#### Regulation

This document is prepared to show compliance with the RF Exposure requirements as required in §1.1310 of the FCC rules and Regulations.

The limit for Maximum Permissible Exposure (MPE), specified in FCC §1.1310, is listed in Table 1-1. According to FCC §1.1310: the criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b).

Table 1 – Limits for Maximum Permissible Exposure (MPE)

| Frequency Range<br>(MHz)                                  | Electric Field<br>Strength<br>[V/m] | Magnetic Field<br>Strength<br>[A/m] | Power Density<br>[mW/cm <sup>2</sup> ] | Averaging<br>Time<br>[minute] |
|-----------------------------------------------------------|-------------------------------------|-------------------------------------|----------------------------------------|-------------------------------|
| (A) Limits for Occupational / Controlled Exposure         |                                     |                                     |                                        |                               |
| 0.3 ~ 3.0                                                 | 614                                 | 1.63                                | *100                                   | 6                             |
| 3.0 ~ 30                                                  | 1842/f                              | 4.89/f                              | *900/f <sup>2</sup>                    | 6                             |
| 30 ~ 300                                                  | 61.4                                | 0.163                               | 1.0                                    | 6                             |
| 300 ~ 1 500                                               | /                                   | /                                   | f/300                                  | 6                             |
| 1 500 ~ 15 000                                            | /                                   | /                                   | 5                                      | 6                             |
| (B) Limits for General Population / Uncontrolled Exposure |                                     |                                     |                                        |                               |
| 0.3 ~ 1.34                                                | 614                                 | 1.63                                | *100                                   | 30                            |
| 1.34 ~ 30                                                 | 824/f                               | 2.19/f                              | *180/f <sup>2</sup>                    | 30                            |
| 30 ~ 300                                                  | 27.5                                | 0.073                               | 0.2                                    | 30                            |
| 300 ~ 1 500                                               | /                                   | /                                   | f/1 500                                | 30                            |
| 1 500 ~ 15 000                                            | /                                   | /                                   | 1.0                                    | 30                            |


*f*=frequency in MHz, \* = plane-wave equivalent power density

Per the guidance of KDB 680106, the E-field and H-field limits shown in the table above are extended down to 100 kHz

## 4. Test results

### 4.1. WPT(Wireless Power Transfer)

#### Test setup

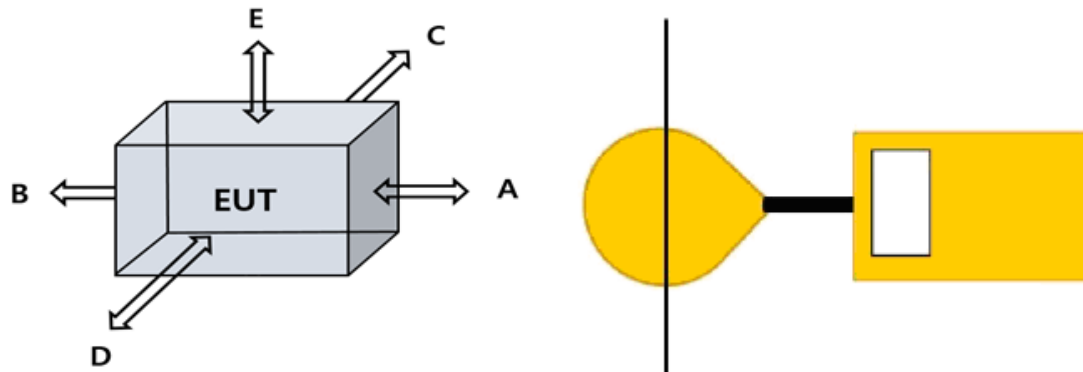

#### Test configurations

In order to check configurations, EUT was evaluated with S-pen and charging condition. The EUT information was declared by the manufacturer.

#### Measurement Procedure

- The RF exposure test was performed on the table in anechoic chamber. Testing was performed with a calibrated field probe.
- The measurement was investigated between the edge of the charger and center of the field probe in the closest state.
- Maximum E-field and H-field measurements were made on each of five sides of the EUT that could come in contact with a user. Five sides are defined as follows:  
Right (B), Top (E), Left (A), Rear (D) and Front (C).  
Refer to the test position diagram above.
- According to the guidance of KDB 680106 D01 v03 test distance was 15 cm on the surrounding sides from the EUT.

**Equipment Approval Considerations item 5.b) of KDB 680106 D01 v03**

- a) Power transfer frequency is less than 1 MHz.
- ▶ This device is operates at a frequency of 531 kHz.
- b) Output power from each primary coil is less than or equal to 15 watts.
- ▶ DC 5.0 V condition / Output power from each primary coil : 0.23 watts.
- c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
- ▶ The transfer system includes only single primary and secondary coils.
- d) Client device is placed directly in contact with the transmitter.
- ▶ The client device is placed directly in contact with the transmitter.
- e) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)
- ▶ This device is mobile exposure condition.
- f) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
- ▶ The EUT field strength levels < 50 % of the MPE limit 1.63 A/m  
0.069 3 A/m (Max) < 0.815 A/m

KCTL

## Test results

The probe was positioned at the location where there is maximum field strength on each side of the EUT.

### Test mode : H-field

| Frequency<br>[MHz] | Probe<br>Orientation<br>[X,Y,Z] | Distance<br>[cm] | Corrected H-field [A/m] |         |         |         |         |         | Limits<br>[A/m] |
|--------------------|---------------------------------|------------------|-------------------------|---------|---------|---------|---------|---------|-----------------|
|                    |                                 |                  | EUT sides               |         |         |         |         |         |                 |
|                    |                                 |                  | A                       | B       | C       | D       | E       | F       |                 |
| 0.531              | Sum                             | 20               |                         |         |         |         | 0.062 4 |         | 1.63            |
| 0.531              | Sum                             | 15               | 0.065 1                 | 0.066 1 | 0.069 3 | 0.069 3 | 0.069 7 | 0.065 9 | 1.63            |
| 0.531              | Sum                             | 5                | 0.063 3                 | 0.066 0 | 0.065 5 | 0.064 3 | 0.070 3 | 0.064 9 | 1.63            |
| 0.531              | Sum                             | 4                |                         |         |         |         | 0.070 7 |         | 1.63            |
| 0.531              | Sum                             | 3                |                         |         |         |         | 0.071 9 |         | 1.63            |
| 0.531              | Sum                             | 2                |                         |         |         |         | 0.073 9 |         | 1.63            |
| 0.531              | Sum                             | 1                |                         |         |         |         | 0.081 5 |         | 1.63            |
| 0.531              | Sum                             | 0                |                         |         |         |         | 0.097 3 |         | 1.63            |

### Test mode : E-field

| Frequency<br>[MHz] | Probe<br>Orientation<br>[X,Y,Z] | Distance<br>[cm] | Corrected E-field [V/m] |         |         |         |         |         | Limits<br>[V/m] |
|--------------------|---------------------------------|------------------|-------------------------|---------|---------|---------|---------|---------|-----------------|
|                    |                                 |                  | EUT sides               |         |         |         |         |         |                 |
|                    |                                 |                  | A                       | B       | C       | D       | E       | F       |                 |
| 0.531              | Sum                             | 20               |                         |         |         |         | 0.384 2 |         | 614             |
| 0.531              | Sum                             | 15               | 0.381 9                 | 0.474 5 | 0.398 0 | 0.387 8 | 0.400 1 | 0.383 8 | 614             |

|                                                                                                                                                                                           |                                                      |                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>KCTL Inc.</b><br>65, Sinwon-ro, Yeongtong-gu,<br>Suwon-si, Gyeonggi-do, 16677, Korea<br>TEL: 82-31-285-0894 FAX: 82-505-299-8311<br><a href="http://www.kctl.co.kr">www.kctl.co.kr</a> | Report No.:<br>KR19-SRF0131-B<br><br>Page (9) of (9) |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------------------------|

## 5. Measurement Equipment

| Equipment Name  | Manufacturer | Model No. | Serial No. | Next Cal. Date |
|-----------------|--------------|-----------|------------|----------------|
| E&H Field Probe | narda        | EHP-200A  | 170WX81015 | 20.02.08       |

**End of test report**

*KCTL*