FCC Part 15C Test Report

FCC ID: 2AJLDC30

Product Name:	**Action Camera/Sports DV/Mini Camera/Video Camera**
Trademark:	**N/A**
Model Name :	**C30** **C50, F68R, F88, F80, CUBE360H, CUBE360F, F90, G5, F99, C30R, F98, F100**
Prepared For : Address :	**Shenzhen Discovery Technology Company Limited** 5th Floor, B Building, C Block, Shangxue Science and Technology Industrial Park, Shangxue Resident's Group, Xinxue Community, Bantian, Longgang, Shenzhen, China
Prepared By : Address :	**Shenzhen BCTC Technology Co., Ltd.** No.101,Yousong Road,Longhua New District, Shenzhen,China
Test Date:	**Aug. 09 - Aug. 20, 2016**
Date of Report :	**Aug. 20, 2016**
Report No.:	**BCTC-160709530E**

TEST RESULT CERTIFICATION

Applicant's name..... :	Shenzhen Discovery Technology Company Limited
Address..... :	5th Floor, B Building, C Block, Shangxue Science and Technology Industrial Park, Shangxue Resident's Group, Xinxue Community, Bantian, Longgang, Shenzhen, China
Manufacture's Name..... :	Shenzhen Discovery Technology Company Limited
Address..... :	5th Floor, B Building, C Block, Shangxue Science and Technology Industrial Park, Shangxue Resident's Group, Xinxue Community, Bantian, Longgang, Shenzhen, China
Product description	
Product name.....:	Action Camera/Sports DV/Mini Camera/Video Camera
Model and/or type reference :	C30 C50, F68R, F88, F80, CUBE360H, CUBE360F, F90, G5, F99, C30R, F98, F100
Serial Model.....:	N/A
Standards..... :	FCC Part15.247:2015 ANSI C63.10:2013 KDB 558074 D01 DTS Meas Guidance v03r03

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Testing Engineer	:	Eric Yang
Reviewer (Supervisor)	:	Jade Yang
Approved & Authorized Signer(Manager)	:	Carson Zhang

Table of Contents

Page

1 . SUMMARY OF TEST RESULTS 5

1.1 TEST FACILITY 6

1.2 MEASUREMENT UNCERTAINTY 6

2 . GENERAL INFORMATION 7

2.1 GENERAL DESCRIPTION OF EUT 7

2.2 DESCRIPTION OF TEST MODES 9

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 10

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) 10

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS 11

3 . EMC EMISSION TEST 12

3.1 CONDUCTED EMISSION MEASUREMENT 12

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS 12

3.1.2 TEST PROCEDURE 13

3.1.3 DEVIATION FROM TEST STANDARD 13

3.1.4 TEST SETUP 13

3.1.5 EUT OPERATING CONDITIONS 13

3.1.6 TEST RESULTS 14

3.2 RADIATED EMISSION MEASUREMENT 16

3.2.1 RADIATED EMISSION LIMITS 16

3.2.2 TEST PROCEDURE 17

3.2.3 DEVIATION FROM TEST STANDARD 17

3.2.4 TEST SETUP 18

3.2.5 EUT OPERATING CONDITIONS 19

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ) 20

3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ) 21

3.2.8 TEST RESULTS (1GHZ - 26GHZ) 23

4 . POWER SPECTRAL DENSITY TEST 28

4.1 APPLIED PROCEDURES / LIMIT 28

4.1.1 TEST PROCEDURE 28

4.1.2 DEVIATION FROM STANDARD 28

4.1.3 TEST SETUP 28

4.1.4 EUT OPERATION CONDITIONS 28

4.1.5 TEST RESULTS 29

Table of Contents

Page

5 . BANDWIDTH TEST 37

5.1 APPLIED PROCEDURES / LIMIT 37

5.1.1 TEST PROCEDURE 37

5.1.2 DEVIATION FROM STANDARD 37

5.1.3 TEST SETUP 37

5.1.4 EUT OPERATION CONDITIONS 37

5.1.5 TEST RESULTS 38

6 . PEAK OUTPUT POWER TEST 46

6.1 APPLIED PROCEDURES / LIMIT 46

6.1.1 TEST PROCEDURE 46

6.1.2 DEVIATION FROM STANDARD 46

6.1.3 TEST SETUP 46

6.1.4 EUT OPERATION CONDITIONS 46

6.1.5 TEST RESULTS 47

7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 48

7.1 DEVIATION FROM STANDARD 49

7.2 TEST SETUP 49

7.3 EUT OPERATION CONDITIONS 49

7.4 TEST RESULTS 50

8 . DUTY CYCLE OF TEST SIGNAL 54

8.1 STANDARD REQUIREMENT 54

8.2 FORMULA: 54

9 . ANTENNA REQUIREMENT 55

9.1 STANDARD REQUIREMENT 55

9.2 EUT ANTENNA 55

10 . EUT TEST PHOTO 56

11 . EUT PHOTO 58

APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Restricted Band of Operation	PASS	
15.247 (d)	Band Edge (Out of Band Emissions)	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)” N/A” denotes test is not applicable in this Test Report

1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.
Add. : No.101,Yousong Road,Longhua New District, Shenzhen,China
FCC Registered No.: 187086

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement **y ± U**，where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**，providing a level of confidence of approximately **95** %。

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power,conducted	±0.16dB
3	Spurious emissions,conducted	±0.21dB
4	All emissions,radiated(<1G)	±4.68dB
5	All emissions,radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

<table>
<tr><td>Equipment</td><td>Action Camera/Sports DV/Mini Camera/Video Camera</td></tr>
<tr><td>Trade Name</td><td>N/A</td></tr>
<tr><td>Model Name</td><td>C30
C50, F68R, F88, F80, CUBE360H, CUBE360F, F90, G5, F99, C30R, F98, F100</td></tr>
<tr><td>Model Difference</td><td>All the models are the same circuit and RF module, except the model names.</td></tr>
<tr><td>Product Description</td><td>The EUT is a Action Camera/Sports DV/Mini Camera/Video Camera
<table>
<tr><td>Operation Frequency:</td><td>802.11b/g/n20MHz:2412~2462 MHz
802.11n40MHz:2422~2452</td></tr>
<tr><td>Modulation Type:</td><td>802.11b: DSSS (CCK, DQPSK, DBPSK)
802.11g/n(20/40): DSSS (CCK, DQPSK,DBPSK)+OFDM (QPSK, BPSK, 16-QAM, 64-QAM)</td></tr>
<tr><td>Bit Rate of Transmitter</td><td>802.11b: 11/5.5/2/1Mbps
802.11g: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps
802.11n: Up to 150Mbps</td></tr>
<tr><td>Number Of Channel</td><td>802.11b/g/n20MHz:11CH
802.11n40MHz:7CH</td></tr>
<tr><td>Antenna Designation:</td><td>Please see Note 3.</td></tr>
</table>
Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</td></tr>
<tr><td>Channel List</td><td>Please refer to the Note 2.</td></tr>
<tr><td>Adapter</td><td>N/A</td></tr>
<tr><td>Battery</td><td>DC 3.7V</td></tr>
<tr><td>Connecting I/O Port(s)</td><td>Please refer to the User's Manual</td></tr>
</table>

Note:

1. For a more detailed features description, please refer to the manufacturer’s specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442				
05	2432	08	2447				

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	Internal Antenna	N/A	2.35	Wifi Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

For Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.

(2) IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 54Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n(20) mode: 6.5Mbps data rate (worst case) were chosen for full testing.IEEE 802.11n(40) mode: 6.5Mbps data rate (worst case) were chosen for full testing.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conduted & Radiated Emission Test

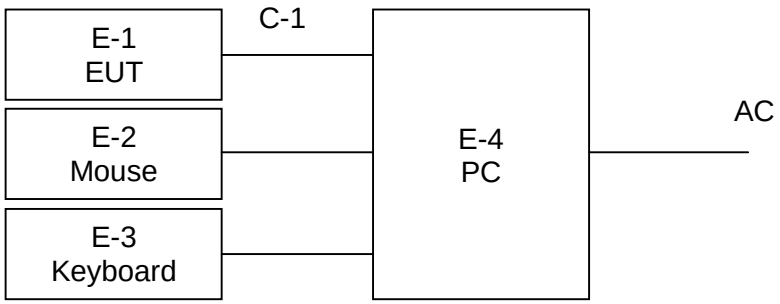

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Action Camera/Sports DV/Mini Camera/Video Camera	N/A	C30	N/A	EUT
E-2	Mouse	N/A	B036	N/A	
E-3	Keyboard	N/A	K015	N/A	
E-4	PC	ASUS	AWT8000	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.8M	Mini USB cable

Note:

(1) The support equipment was authorized by Declaration of Confirmation.

(2) For detachable type I/O cable should be specified the length in cm in『Length』column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	MY45109572	2015.08.25	2016.08.24
2	Test Receiver	R&S	ESPI	101396	2015.08.25	2016.08.24
3	Bilog Antenna	SCHWARZBECK	VULB9160	VULB9160-3369	2015.08.25	2016.08.24
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.07	2017.06.06
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.06.07	2017.06.06
6	Horn Antenna	SCHWARZBECK	9120D	9120D-1275	2015.08.25	2016.08.24
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05
8	Amplifier	SCHWARZBECK	BBV9718	9718-270	2015.08.25	2016.08.24
9	Amplifier	SCHWARZBECK	BBV9743	9743-119	2015.08.25	2016.08.24
10	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07
11	Power Meter	R&S	NRVS	100696	2016.07.06	2017.07.05
12	Power Sensor	R&S	URV5-Z55	161905	2016.07.06	2017.07.05
13	RF cables	R&S	N/A	N/A	2016.07.06	2017.07.05

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	101421	2015.08.25	2016.08.24
2	LISN	SCHWARZBECK	NSLK8127	812779	2015.08.25	2016.08.24
3	LISN	EMCO	Feb-16	42990	2015.08.24	2016.08.23
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.07	2017.06.06
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2016.06.07	2017.06.06

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
d. LISN at least 80 cm from nearest part of EUT chassis.
e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

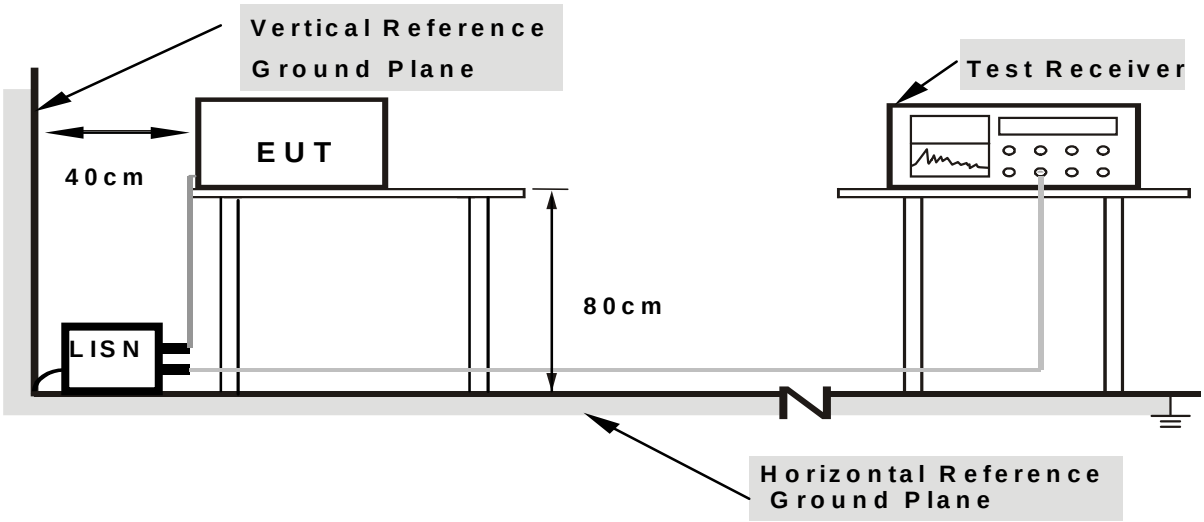

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS

Temperature :	25℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC120V/60Hz	Test Mode :	Link Mode

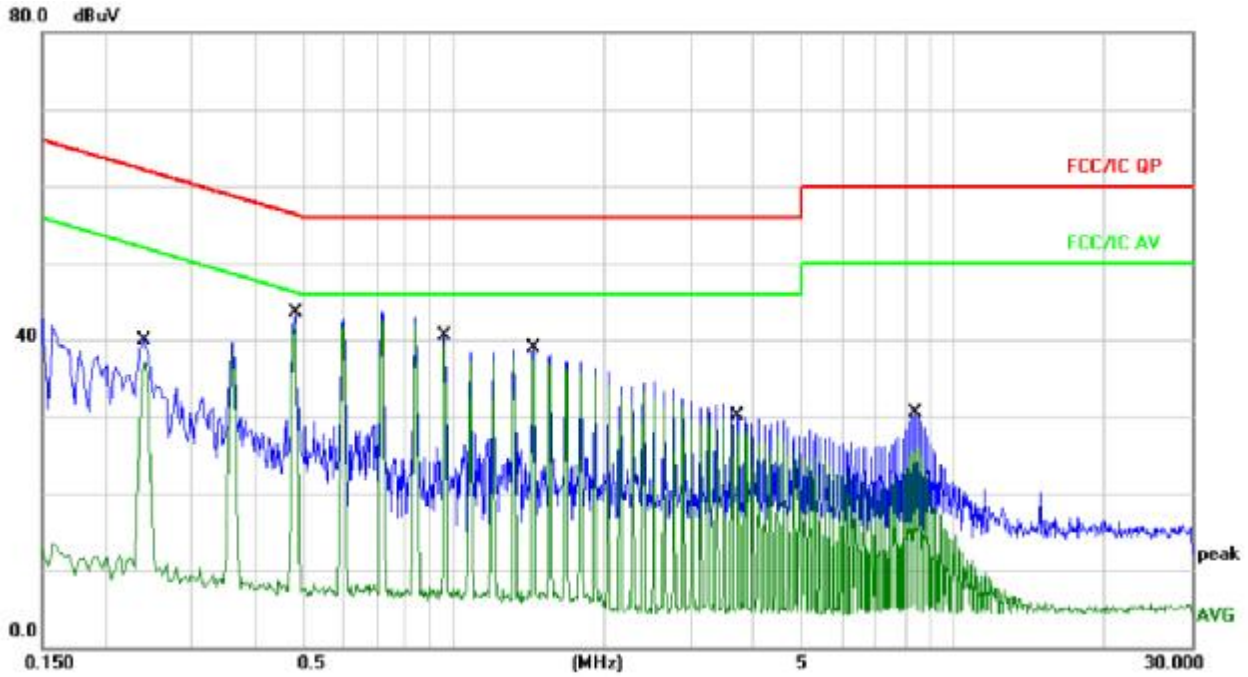

Remark:
1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2420	25.71	10.08	35.79	62.02	-26.23	QP	
2		0.2420	27.08	10.08	37.16	52.02	-14.86	AVG	
3		0.4820	33.45	10.11	43.56	56.30	-12.74	QP	
4	*	0.4820	31.75	10.11	41.86	46.30	-4.44	AVG	
5		0.9620	30.37	10.16	40.53	56.00	-15.47	QP	
6		0.9620	28.82	10.16	38.98	46.00	-7.02	AVG	
7		1.4420	28.76	10.17	38.93	56.00	-17.07	QP	
8		1.4420	27.36	10.17	37.53	46.00	-8.47	AVG	
9		3.7180	19.95	10.17	30.12	56.00	-25.88	QP	
10		3.7180	18.44	10.17	28.61	46.00	-17.39	AVG	
11		8.3979	20.34	10.11	30.45	60.00	-29.55	QP	
12		8.3979	15.75	10.11	25.86	50.00	-24.14	AVG	

Temperature :	25℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC120V/60Hz	Test Mode :	Link Mode

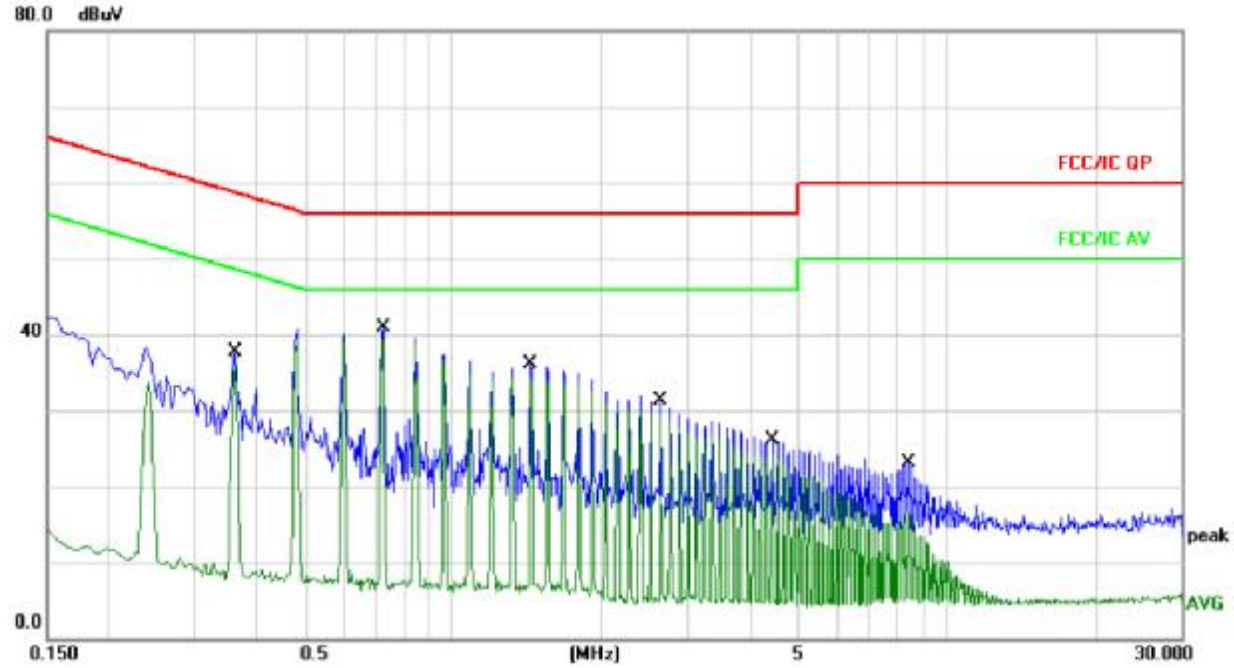

Remark:
1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.3620	27.53	10.10	37.63	58.68	-21.05	QP	
2		0.3620	25.55	10.10	35.65	48.68	-13.03	AVG	
3		0.7180	30.79	10.14	40.93	56.00	-15.07	QP	
4	*	0.7180	29.25	10.14	39.39	46.00	-6.61	AVG	
5		1.4380	25.94	10.17	36.11	56.00	-19.89	QP	
6		1.4380	24.10	10.17	34.27	46.00	-11.73	AVG	
7		2.6380	20.06	10.19	30.25	56.00	-25.75	QP	
8		2.6380	19.14	10.19	29.33	46.00	-16.67	AVG	
9		4.4379	15.98	10.16	26.14	56.00	-29.86	QP	
10		4.4379	13.85	10.16	24.01	46.00	-21.99	AVG	
11		8.3979	13.02	10.11	23.13	60.00	-36.87	QP	
12		8.3979	6.37	10.11	16.48	50.00	-33.52	AVG	

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / *10Hz* for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
b. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The height of the equipment or of the substitution antenna shall be 1.5 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD

No deviation

3.2.4 TEST SETUP

（A）Radiated Emission Test-Up Frequency Below 30MHz

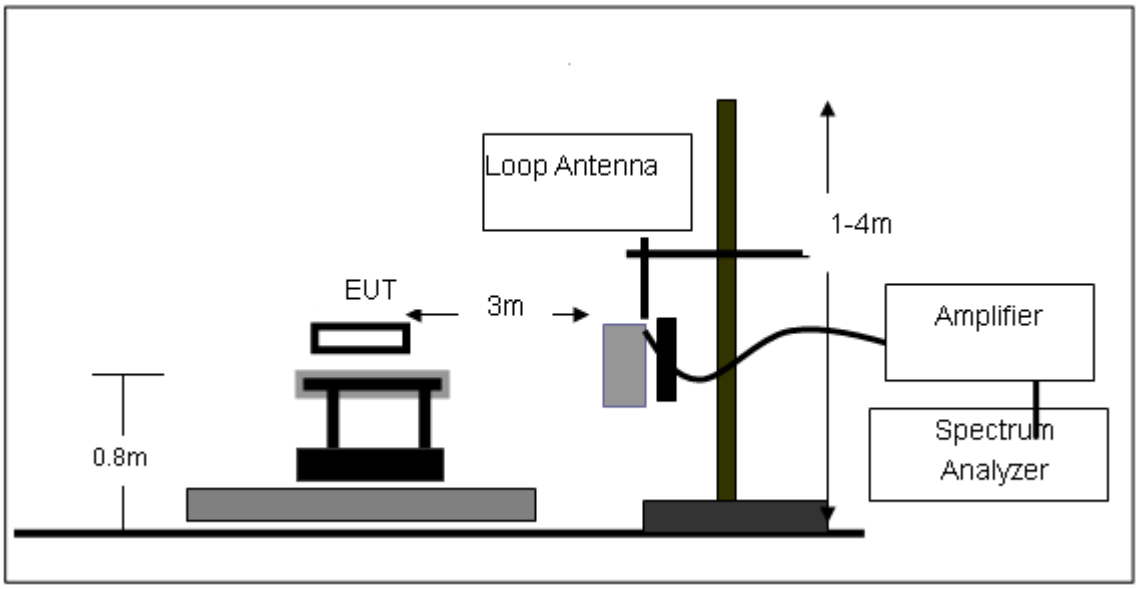

（B）Radiated Emission Test-Up Frequency 30MHz~1GHz

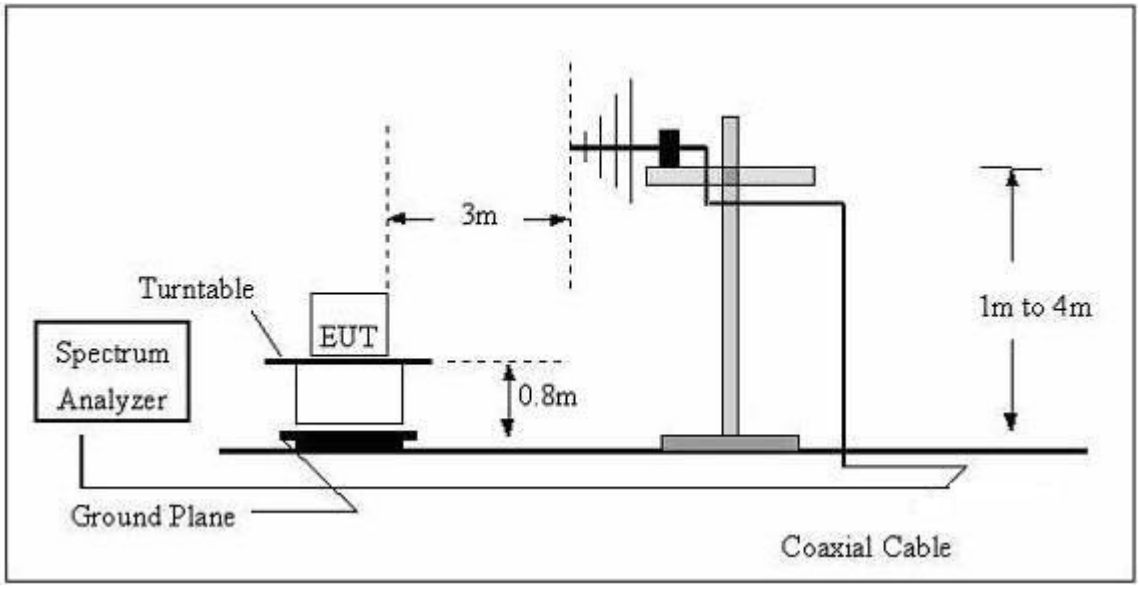

（C）Radiated Emission Test-Up Frequency Above 1GHz

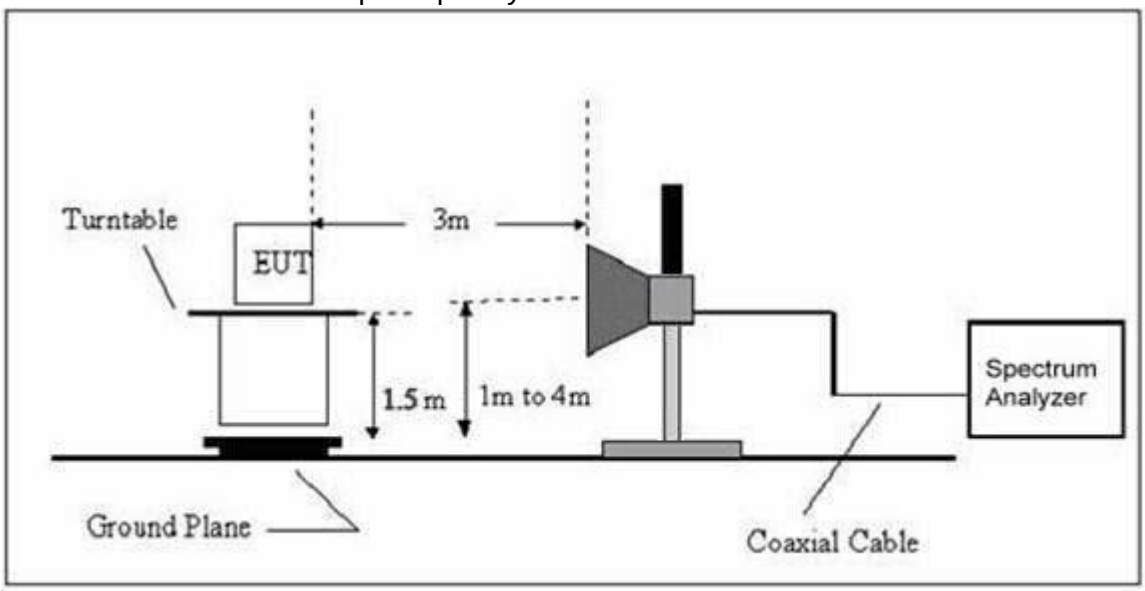

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

Temperature:	25℃	Relative Humidtity:	54%
Pressure:	1010 hPa	Test Voltage :	AC120V/60Hz
Test Mode :	Link Mode	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
Distance extrapolation factor =40 log (specific distance/test distance)(dB);
Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Temperature :	25℃	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V From Battery		
Test Mode :	Link Mode		

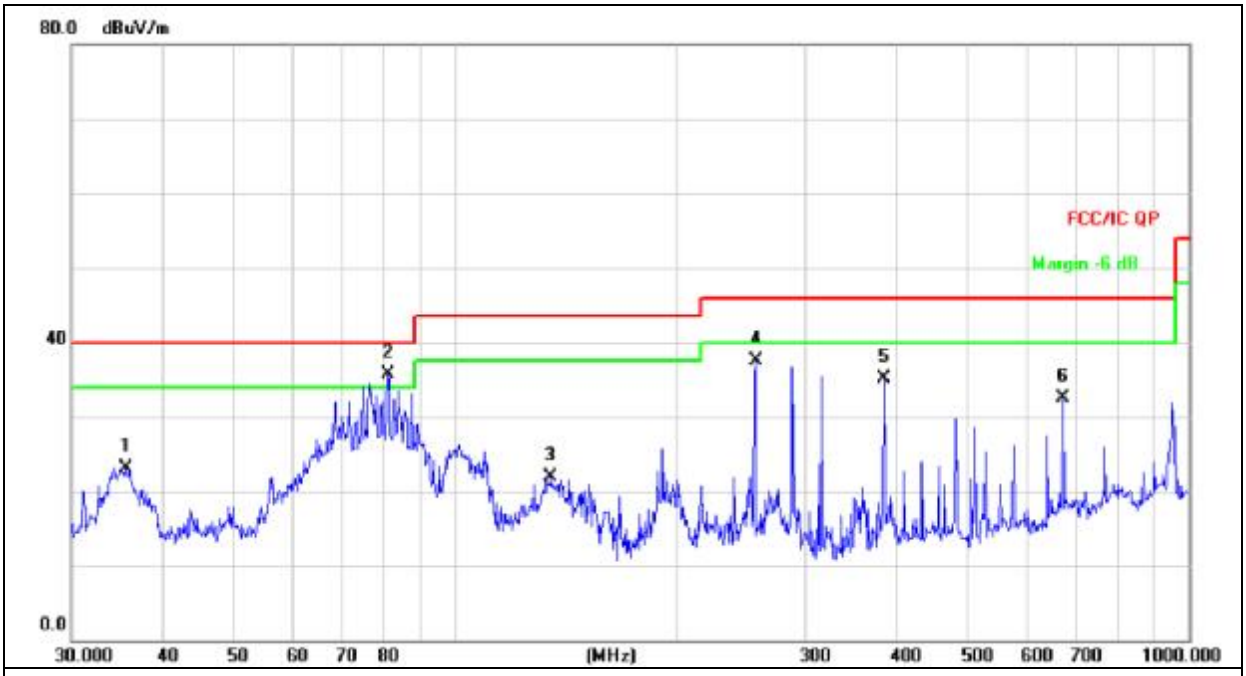

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		35.4993	31.69	-8.55	23.14	40.00	-16.86	QP			
2	*	80.9275	53.81	-18.10	35.71	40.00	-4.29	QP			
3		135.0319	35.70	-13.74	21.96	43.50	-21.54	QP			
4		256.5211	51.50	-14.01	37.49	46.00	-8.51	QP			
5		383.9318	45.72	-10.57	35.15	46.00	-10.85	QP			
6		672.8445	37.35	-4.80	32.55	46.00	-13.45	QP			

Temperature :	25℃	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.7V From Battery		
Test Mode :	Link Mode		

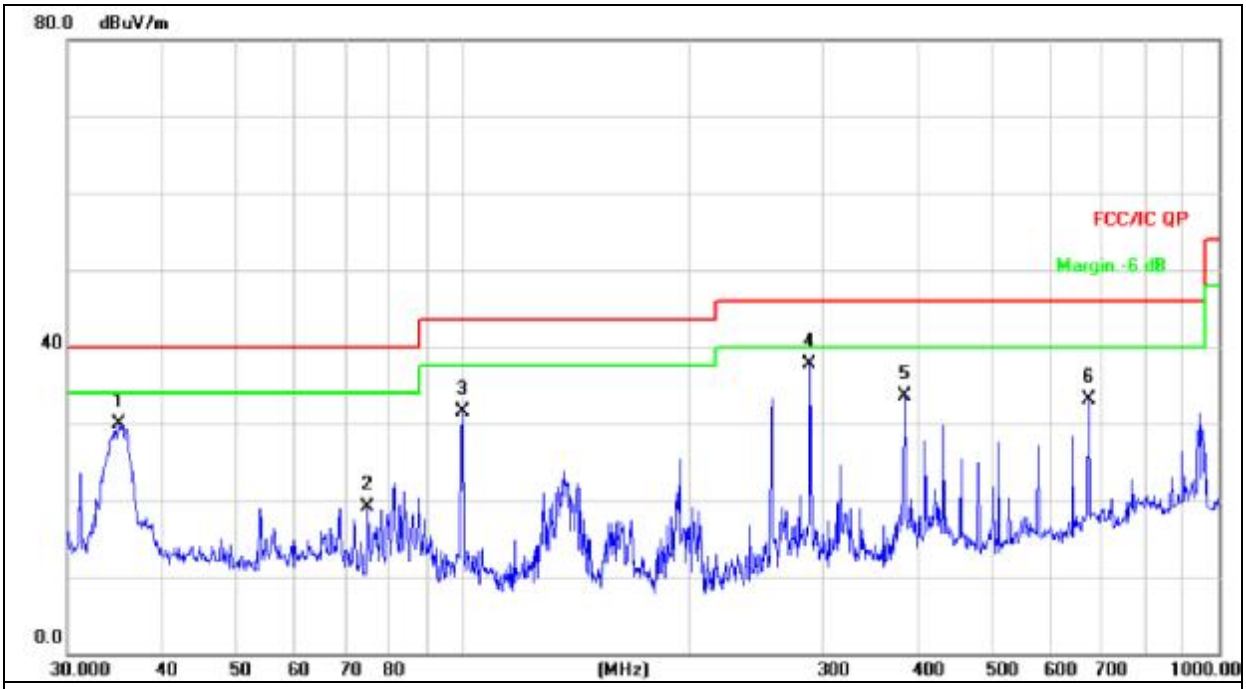

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		35.1278	38.36	-8.51	29.85	40.00	-10.15	QP			
2		74.9191	35.40	-16.29	19.11	40.00	-20.89	QP			
3		99.8777	47.99	-16.49	31.50	43.50	-12.00	QP			
4	*	287.9904	50.54	-12.89	37.65	46.00	-8.35	QP			
5		383.9318	44.17	-10.57	33.60	46.00	-12.40	QP			
6		672.8445	37.95	-4.80	33.15	46.00	-12.85	QP			

3.2.8 TEST RESULTS (1GHZ - 26GHZ)

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		operation frequency:2412							
V	4824.00	66.69	39.55	7.85	25.66	60.65	74	-13.35	PK
V	4824.00	48.57	39.55	7.85	25.66	42.53	54	-11.47	AV
V	7236.00	67.75	38.33	7.52	24.55	61.49	74	-12.51	PK
V	7236.00	48.06	38.33	7.52	24.55	41.80	54	-12.20	AV
V	15450.00	51.12	35.23	6.75	26.59	49.23	74	-24.77	PK
H	4824.00	68.21	39.55	7.85	25.66	62.17	74	-11.83	PK
H	4824.00	49.04	39.55	7.85	25.66	43.00	54	-11.00	AV
H	7236.00	68.95	38.33	7.52	23.55	61.69	74	-12.31	PK
H	7236.00	52.31	38.33	7.52	23.22	44.72	54	-9.28	AV
H	15450.00	47.38	35.45	6.75	27.88	46.56	74	-27.44	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		operation frequency:2437							
V	4874.00	65.01	38.89	7.57	25.45	59.14	74	-14.86	PK
V	4874.00	48.24	38.89	7.57	25.45	42.37	54	-11.63	AV
V	7311.00	66.12	38.78	7.35	24.78	59.47	74	-14.53	PK
V	7311.00	47.84	38.78	7.35	24.78	41.19	54	-12.81	AV
V	15450.00	51.92	35.89	6.42	26.47	48.92	74	-25.08	PK
H	4874.00	64.34	38.89	7.57	25.45	58.47	74	-15.53	PK
H	4874.00	49.13	38.89	7.57	25.45	43.26	54	-10.74	AV
H	7311.00	69.76	38.78	7.35	24.78	63.11	74	-10.89	PK
H	7311.00	48.40	38.78	7.35	24.78	41.75	54	-12.25	AV
H	15450.00	48.28	36.68	6.45	26.65	44.70	74	-29.30	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		operation frequency:2462							
V	4924.00	67.79	38.75	7.46	25.45	61.95	74	-12.05	PK
V	4924.00	50.35	38.75	7.46	25.45	44.51	54	-9.49	AV
V	7386.00	67.18	38.65	7.22	24.78	60.53	74	-13.47	PK
V	7386.00	48.94	38.65	7.22	24.78	42.29	54	-11.71	AV
V	15450.00	53.17	35.58	6.35	26.47	50.41	74	-23.59	PK
H	4924.00	65.66	38.75	7.46	25.45	59.82	74	-14.18	PK
H	4924.00	49.96	38.75	7.46	25.45	44.12	54	-9.88	AV
H	7386.00	69.10	38.65	7.22	24.78	62.45	74	-11.55	PK
H	7386.00	47.83	38.65	7.22	24.78	41.18	54	-12.82	AV
H	15450.00	50.05	36.42	6.32	26.65	46.60	74	-27.40	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		operation frequency:2412							
V	4824.00	65.67	39.55	7.85	25.66	59.63	74	-14.37	PK
V	4824.00	49.16	39.55	7.85	25.66	43.12	54	-10.88	AV
V	7236.00	65.83	38.33	7.52	24.55	59.57	74	-14.43	PK
V	7236.00	47.27	38.33	7.52	24.55	41.01	54	-12.99	AV
V	15450.00	50.52	35.23	6.75	26.59	48.63	74	-25.37	PK
H	4824.00	62.72	39.55	7.85	25.66	56.68	74	-17.32	PK
H	4824.00	49.07	39.55	7.85	25.66	43.03	54	-10.97	AV
H	7236.00	68.77	38.33	7.52	23.55	61.51	74	-12.49	PK
H	7236.00	50.05	38.33	7.52	23.22	42.46	54	-11.54	AV
H	15450.00	45.40	35.45	6.75	27.88	44.58	74	-29.42	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		operation frequency:2437							
V	4874.00	66.11	38.89	7.57	25.45	60.24	74	-13.76	PK
V	4874.00	48.84	38.89	7.57	25.45	42.97	54	-11.03	AV
V	7311.00	66.97	38.78	7.35	24.78	60.32	74	-13.68	PK
V	7311.00	47.35	38.78	7.35	24.78	40.70	54	-13.30	AV
V	15450.00	52.40	35.89	6.42	26.47	49.40	74	-24.60	PK
H	4874.00	64.79	38.89	7.57	25.45	58.92	74	-15.08	PK
H	4874.00	49.07	38.89	7.57	25.45	43.20	54	-10.80	AV
H	7311.00	68.74	38.78	7.35	24.78	62.09	74	-11.91	PK
H	7311.00	47.87	38.78	7.35	24.78	41.22	54	-12.78	AV
H	15450.00	48.95	36.68	6.42	26.65	45.34	74	-28.66	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		operation frequency:2462							
V	4924.00	67.32	38.75	7.46	25.45	61.48	74	-12.52	PK
V	4924.00	48.04	38.75	7.46	25.45	42.20	54	-11.80	AV
V	7386.00	67.99	38.65	7.22	24.78	61.34	74	-12.66	PK
V	7386.00	49.36	38.65	7.22	24.78	42.71	54	-11.29	AV
V	15450.00	53.21	35.58	6.35	26.47	50.45	74	-23.55	PK
H	4924.00	65.99	38.75	7.46	25.45	60.15	74	-13.85	PK
H	4924.00	50.02	38.75	7.46	25.45	44.18	54	-9.82	AV
H	7386.00	68.79	38.65	7.22	24.78	62.14	74	-11.86	PK
H	7386.00	48.47	38.65	7.22	24.78	41.82	54	-12.18	AV
H	15450.00	49.32	36.42	6.32	26.65	45.87	74	-28.13	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n(20MHz)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		operation frequency:2412							
V	4824.00	67.20	39.55	7.85	25.66	61.16	74	-12.84	PK
V	4824.00	48.27	39.55	7.85	25.66	42.23	54	-11.77	AV
V	7236.00	67.89	38.33	7.52	24.55	61.63	74	-12.37	PK
V	7236.00	48.14	38.33	7.52	24.55	41.88	54	-12.12	AV
V	15450.00	51.35	35.23	6.75	26.59	49.46	74	-24.54	PK
H	4824.00	67.78	39.55	7.85	25.66	61.74	74	-12.26	PK
H	4824.00	49.23	39.55	7.85	25.66	43.19	54	-10.81	AV
H	7236.00	68.79	38.33	7.52	23.55	61.53	74	-12.47	PK
H	7236.00	52.04	38.33	7.52	23.22	44.45	54	-9.55	AV
H	15450.00	47.45	35.45	6.75	27.88	46.63	74	-27.37	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		operation frequency:2437							
V	4874.00	66.16	38.89	7.57	25.45	60.29	74	-13.71	PK
V	4874.00	49.23	38.89	7.57	25.45	43.36	54	-10.64	AV
V	7311.00	66.81	38.78	7.35	24.78	60.16	74	-13.84	PK
V	7311.00	47.05	38.78	7.35	24.78	40.40	54	-13.60	AV
V	15450.00	51.92	35.89	6.42	26.47	48.92	74	-25.08	PK
H	4874.00	65.04	38.89	7.57	25.45	59.17	74	-14.83	PK
H	4874.00	49.25	38.89	7.57	25.45	43.38	54	-10.62	AV
H	7311.00	69.17	38.78	7.35	24.78	62.52	74	-11.48	PK
H	7311.00	48.41	38.78	7.35	24.78	41.76	54	-12.24	AV
H	15450.00	49.22	36.68	6.42	26.65	45.61	74	-28.39	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		operation frequency:2462							
V	4924.00	68.20	38.75	7.46	25.45	62.36	74	-11.64	PK
V	4924.00	49.96	38.75	7.46	25.45	44.12	54	-9.88	AV
V	7386.00	67.20	38.65	7.22	24.78	60.55	74	-13.45	PK
V	7386.00	49.16	38.65	7.22	24.78	42.51	54	-11.49	AV
V	15450.00	52.94	35.58	6.35	26.47	50.18	74	-23.82	PK
H	4924.00	66.22	38.75	7.46	25.45	60.38	74	-13.62	PK
H	4924.00	50.09	38.75	7.46	25.45	44.25	54	-9.75	AV
H	7386.00	68.71	38.65	7.22	24.78	62.06	74	-11.94	PK
H	7386.00	47.97	38.65	7.22	24.78	41.32	54	-12.68	AV
H	15450.00	49.75	36.42	6.32	26.65	46.30	74	-27.70	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n(40MHz)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		operation frequency:2422							
V	4844.000	68.57	39.55	7.77	25.66	62.45	74	-11.55	PK
V	4844.000	48.66	39.55	7.77	25.66	42.54	54	-11.46	AV
V	7266.000	67.55	38.33	7.30	24.55	61.07	74	-12.93	PK
V	7266.000	48.37	38.33	7.30	24.55	41.89	54	-12.11	AV
V	15450.00	51.75	35.23	6.60	26.59	49.71	74	-24.29	PK
H	4844.000	68.78	39.55	7.77	25.66	62.66	74	-11.34	PK
H	4844.000	49.39	39.55	7.77	25.66	43.27	54	-10.73	AV
H	7266.000	69.75	38.33	7.30	23.55	62.27	74	-11.73	PK
H	7266.000	52.55	38.33	7.30	23.22	44.74	54	-9.26	AV
H	15450.00	48.44	35.45	6.60	27.88	47.47	74	-26.53	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		operation frequency:2437							
V	4874.00	66.76	38.89	7.57	25.45	60.89	74	-13.11	PK
V	4874.00	49.68	38.89	7.57	25.45	43.81	54	-10.19	AV
V	7311.00	67.66	38.78	7.35	24.78	61.01	74	-12.99	PK
V	7311.00	47.75	38.78	7.35	24.78	41.10	54	-12.90	AV
V	15450.00	52.36	35.89	6.42	26.47	49.36	74	-24.64	PK
H	4874.00	65.22	38.89	7.57	25.45	59.35	74	-14.65	PK
H	4874.00	49.68	38.89	7.57	25.45	43.81	54	-10.19	AV
H	7311.00	69.96	38.78	7.35	24.78	63.31	74	-10.69	PK
H	7311.00	48.24	38.78	7.35	24.78	41.59	54	-12.41	AV
H	15450.00	49.47	36.68	6.42	26.65	45.86	74	-28.14	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		operation frequency:2452							
V	4904.00	68.58	38.75	7.38	25.45	62.66	74	-11.34	PK
V	4904.00	50.35	38.75	7.38	25.45	44.43	54	-9.57	AV
V	7356.00	67.64	38.65	7.15	24.78	60.92	74	-13.08	PK
V	7356.00	49.95	38.65	7.15	24.78	43.23	54	-10.77	AV
V	15450.00	53.45	35.58	6.25	26.47	50.59	74	-23.41	PK
H	4904.00	66.72	38.75	7.38	25.45	60.80	74	-13.20	PK
H	4904.00	50.94	38.75	7.38	25.45	45.02	54	-8.98	AV
H	7356.00	69.76	38.65	7.15	24.78	63.04	74	-10.96	PK
H	7356.00	48.57	38.65	7.15	24.78	41.85	54	-12.15	AV
H	15450.00	50.37	36.42	6.25	26.65	46.85	74	-27.15	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Restricted Band Radiated Emission

	Frequency (MHz)	Polar (H/V)	Frequency (MHz)	Meter Reading (dBμV)	Pre-amplifier (dB)	Cable Loss (dB)	Ant. Factor (dB/m)	Emission (dBuV/m)	Band edge Limit (dBuV/m)		Result
								PK	PK	AV	
802.11b	<2400	H	2390.00	54.57	30.04	1.06	23.83	49.42	74.00	54.00	Pass
	<2400	V	2390.00	53.78	30.04	1.06	23.83	48.63	74.00	54.00	Pass
	<2400	H	2400.00	54.65	30.09	1.14	23.85	49.55	74.00	54.00	Pass
	<2400	V	2400.00	53.43	30.09	1.14	23.85	48.33	74.00	54.00	Pass
	>2483.5	H	2483.50	54.37	30.15	1.17	24.02	49.41	74.00	54.00	Pass
	>2483.5	V	2483.50	53.11	30.15	1.17	24.02	48.15	74.00	54.00	Pass
	>2483.5	H	2485.30	53.98	30.18	1.20	24.04	49.04	74.00	54.00	Pass
	>2483.5	V	2485.30	54.27	30.18	1.20	24.04	49.33	74.00	54.00	Pass
802.11g	<2400	H	2390.00	54.43	30.04	1.06	23.83	49.28	74.00	54.00	Pass
	<2400	V	2390.00	53.98	30.04	1.06	23.83	48.83	74.00	54.00	Pass
	<2400	H	2400.00	54.45	30.09	1.14	23.85	49.35	74.00	54.00	Pass
	<2400	V	2400.00	55.64	30.09	1.14	23.85	50.54	74.00	54.00	Pass
	>2483.5	H	2483.50	54.29	30.15	1.17	24.02	49.33	74.00	54.00	Pass
	>2483.5	V	2483.50	54.36	30.15	1.17	24.02	49.40	74.00	54.00	Pass
	>2483.5	H	2485.30	54.42	30.18	1.20	24.04	49.48	74.00	54.00	Pass
	>2483.5	V	2485.30	54.59	30.18	1.20	24.04	49.65	74.00	54.00	Pass
802.11n (20)	<2400	H	2390.00	54.76	30.04	1.06	23.83	49.61	74.00	54.00	Pass
	<2400	V	2390.00	54.56	30.04	1.06	23.83	49.41	74.00	54.00	Pass
	<2400	H	2400.00	55.27	30.09	1.14	23.85	50.17	74.00	54.00	Pass
	<2400	V	2400.00	54.62	30.09	1.14	23.85	49.52	74.00	54.00	Pass
	>2483.5	H	2483.50	54.47	30.15	1.17	24.02	49.51	74.00	54.00	Pass
	>2483.5	V	2483.50	54.44	30.15	1.17	24.02	49.48	74.00	54.00	Pass
	>2483.5	H	2485.30	54.75	30.18	1.20	24.04	49.81	74.00	54.00	Pass
	>2483.5	V	2485.30	54.62	30.18	1.20	24.04	49.68	74.00	54.00	Pass
802.11n (40)	<2400	H	2390.00	54.80	30.04	1.06	23.83	49.65	74.00	54.00	Pass
	<2400	V	2390.00	54.53	30.04	1.06	23.83	49.38	74.00	54.00	Pass
	<2400	H	2400.00	55.25	30.09	1.14	23.85	50.15	74.00	54.00	Pass
	<2400	V	2400.00	54.58	30.09	1.14	23.85	49.48	74.00	54.00	Pass
	>2483.5	H	2483.50	54.25	30.15	1.17	24.02	49.29	74.00	54.00	Pass
	>2483.5	V	2483.50	54.65	30.15	1.17	24.02	49.69	74.00	54.00	Pass
	>2483.5	H	2485.30	55.12	30.18	1.20	24.04	50.18	74.00	54.00	Pass
	>2483.5	V	2485.30	54.75	30.18	1.20	24.04	49.81	74.00	54.00	Pass

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

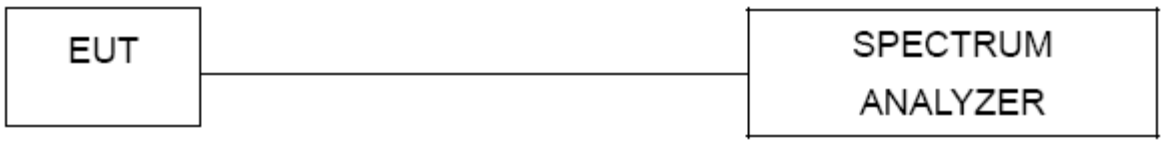

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V From Battery
Test Mode :	TX b Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-10.88	8	PASS
2437 MHz	-10.22	8	PASS
2462 MHz	-9.54	8	PASS

TX CH01

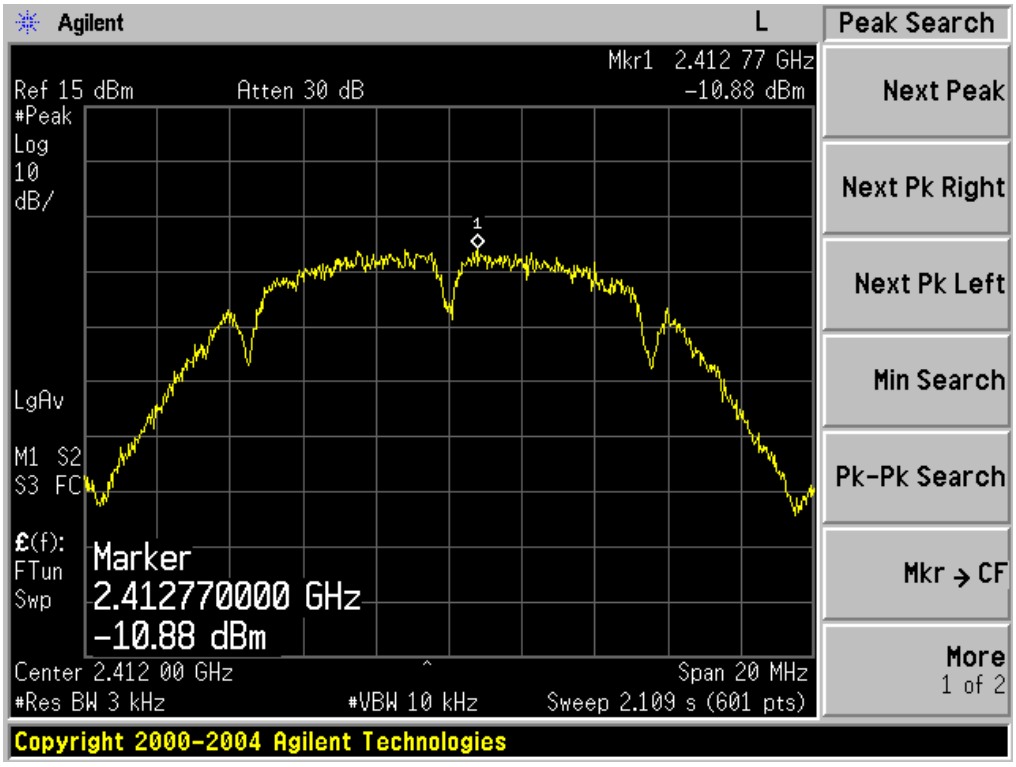

TX CH06

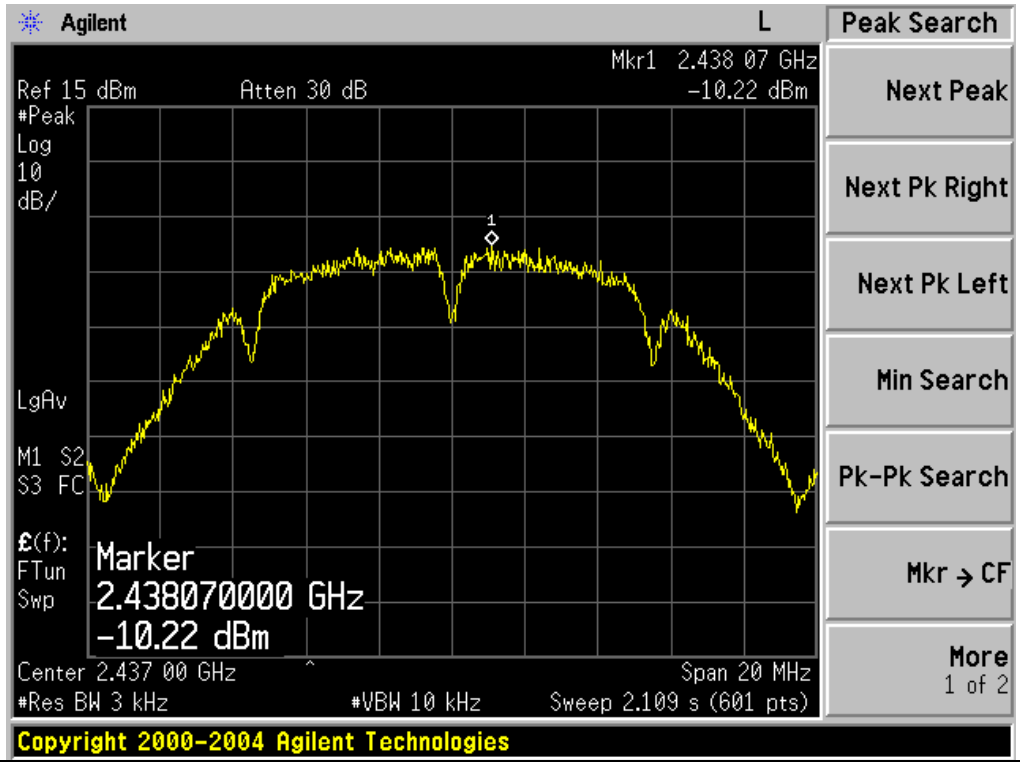

TX CH11

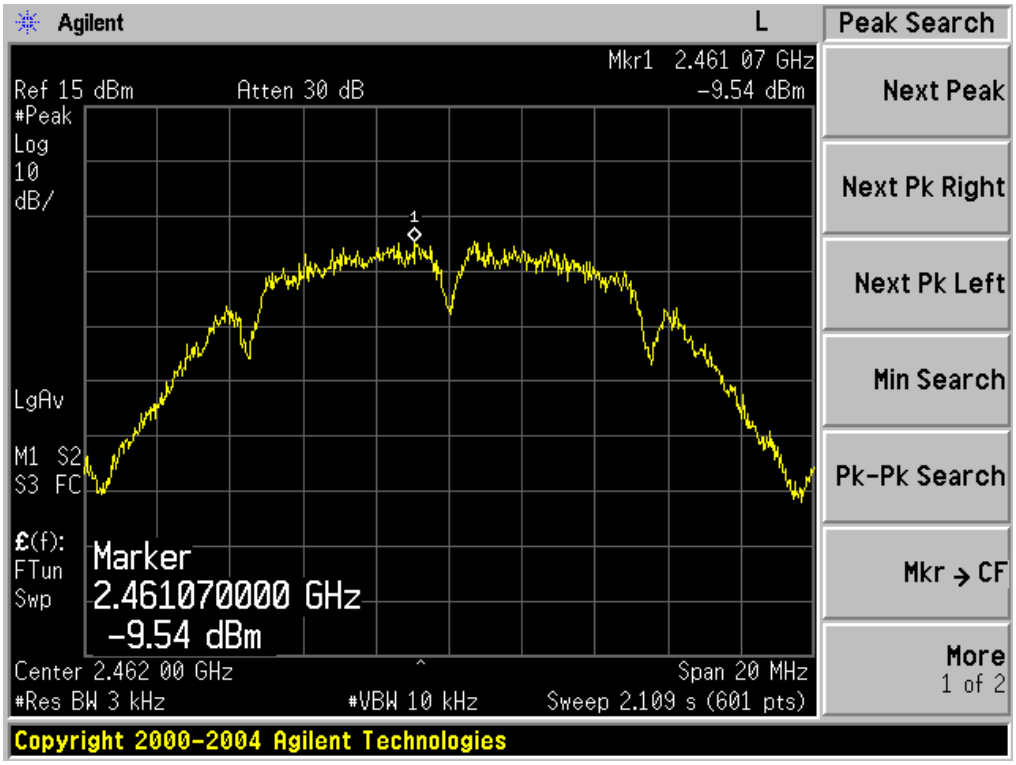

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V From Battery
Test Mode :	TX g Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-13.74	8	PASS
2437 MHz	-11.93	8	PASS
2462 MHz	-12.47	8	PASS

TX CH01

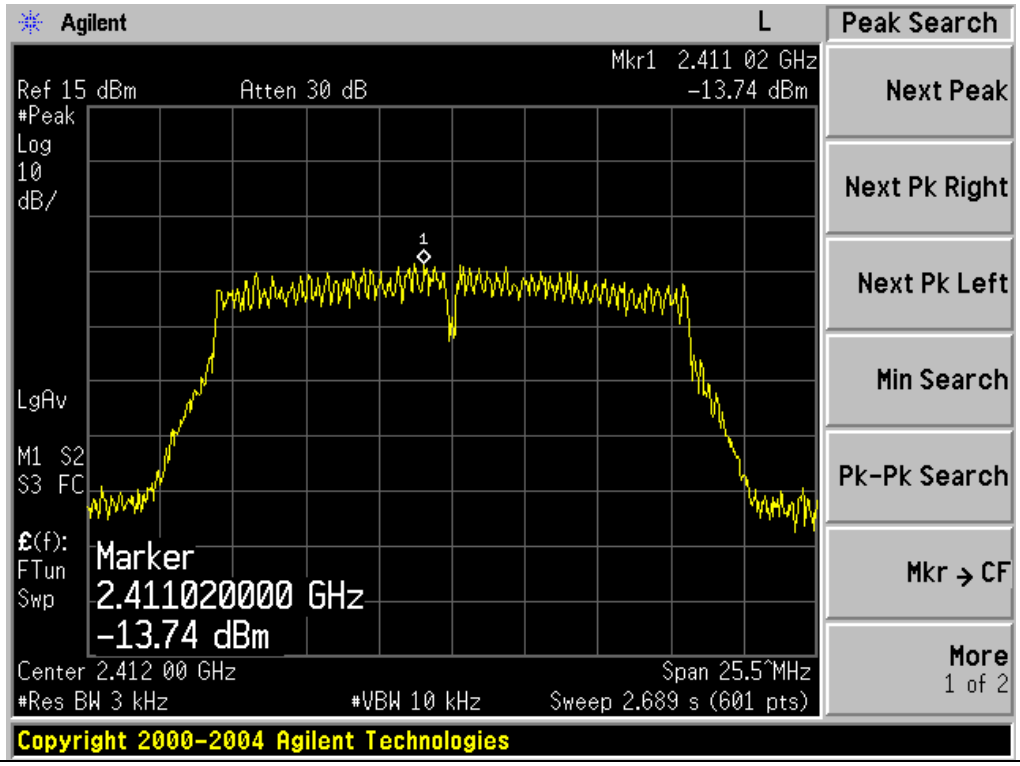

TX CH06

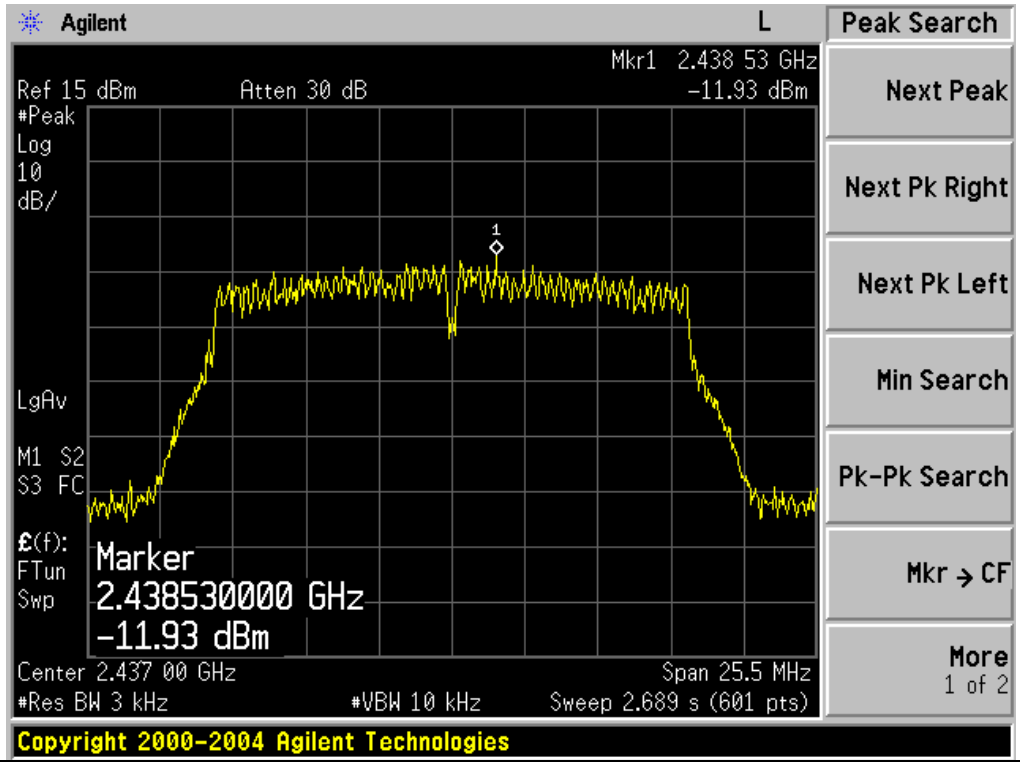

TX CH11

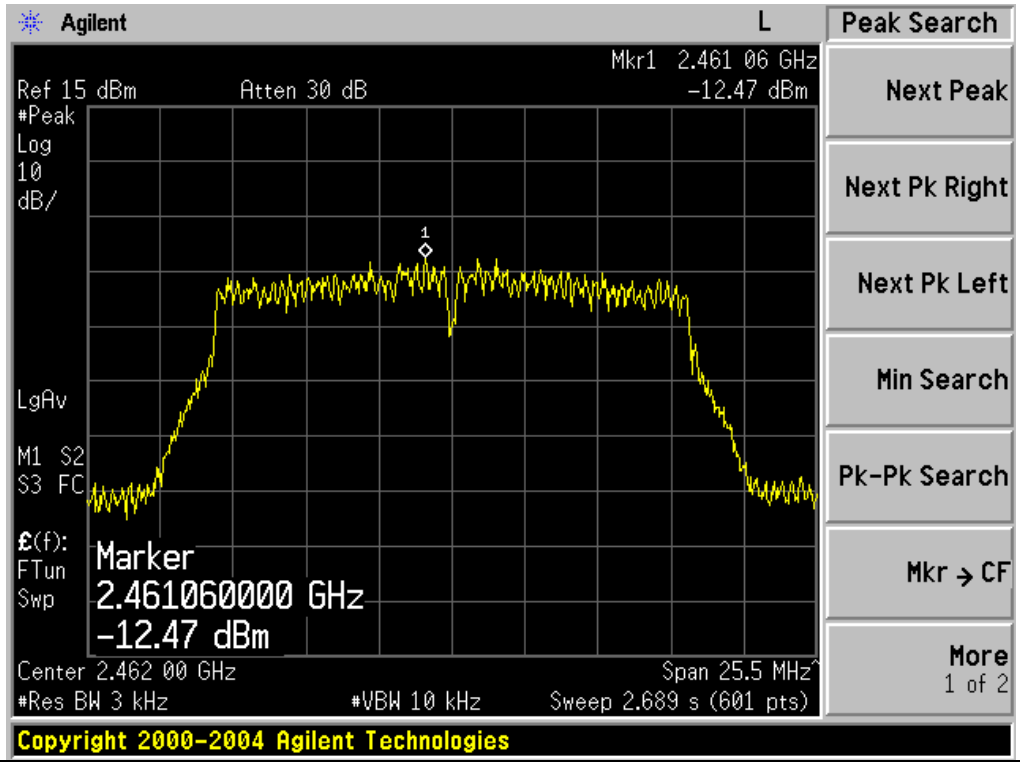

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V From Battery
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-12.67	8	PASS
2437 MHz	-13.27	8	PASS
2462 MHz	-11.86	8	PASS

TX CH01

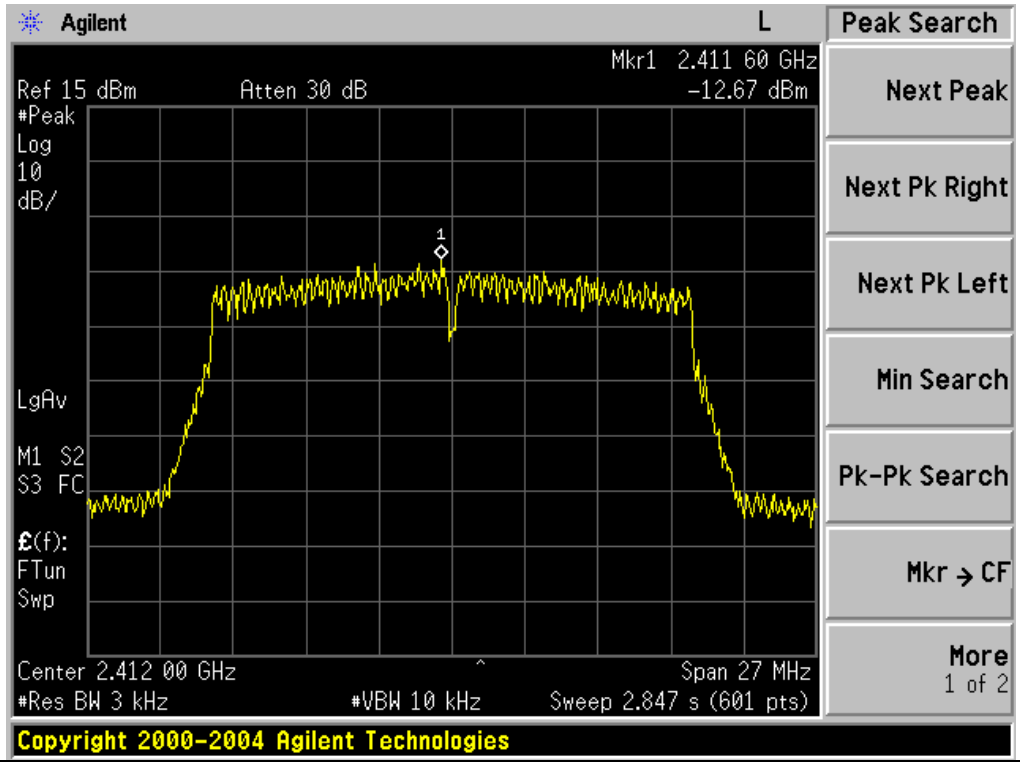

TX CH06

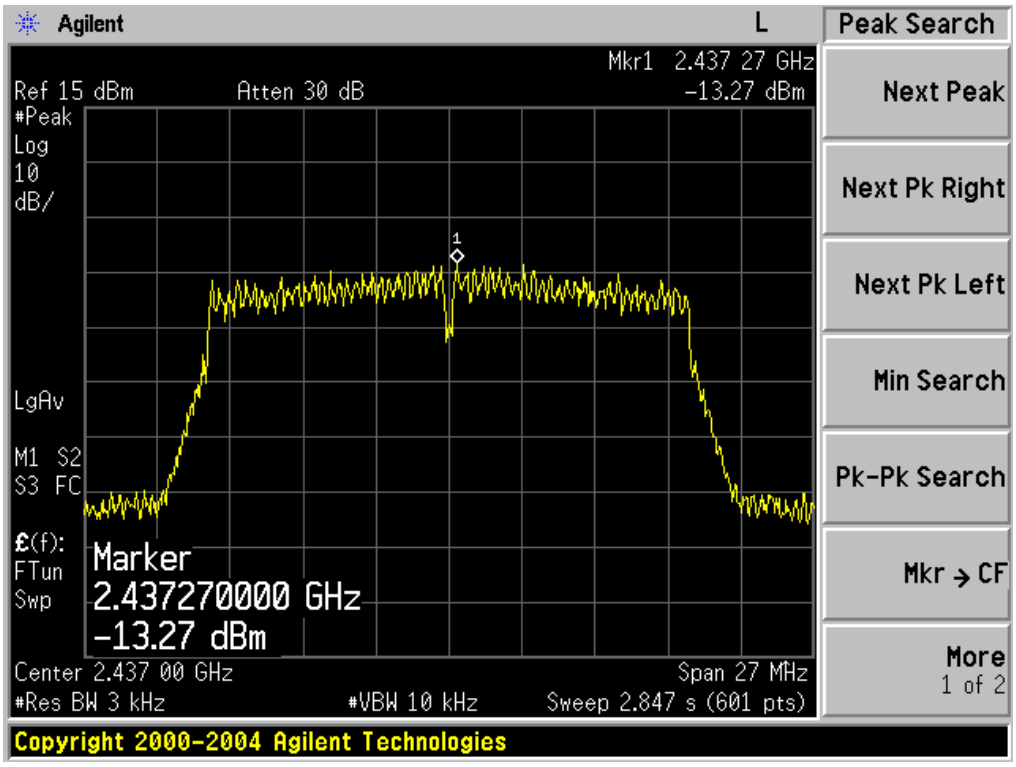

TX CH11

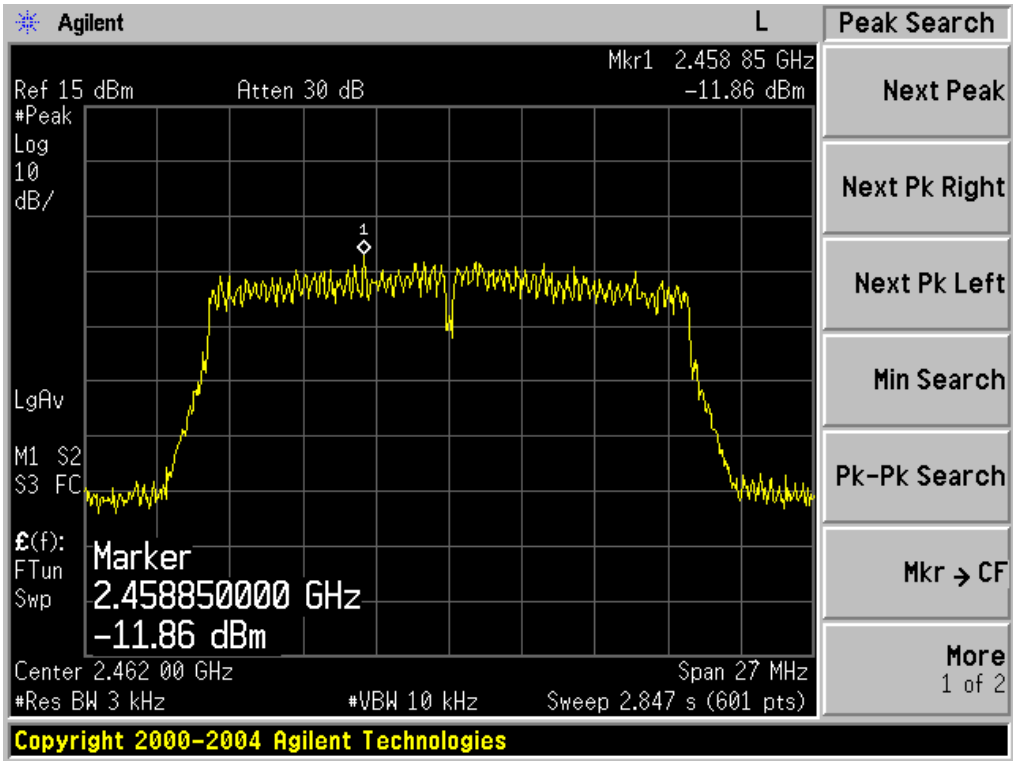

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V From Battery
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2422 MHz	-17.76	8	PASS
2437 MHz	-17.14	8	PASS
2452 MHz	-17.34	8	PASS

TX CH 03

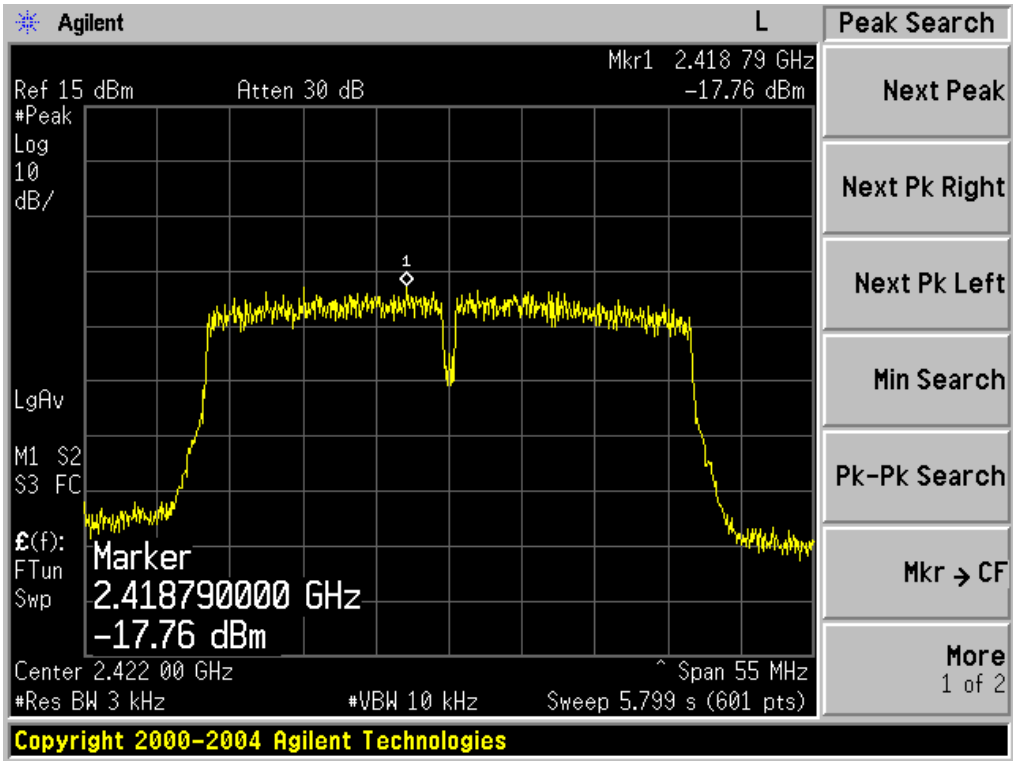

TX CH 06

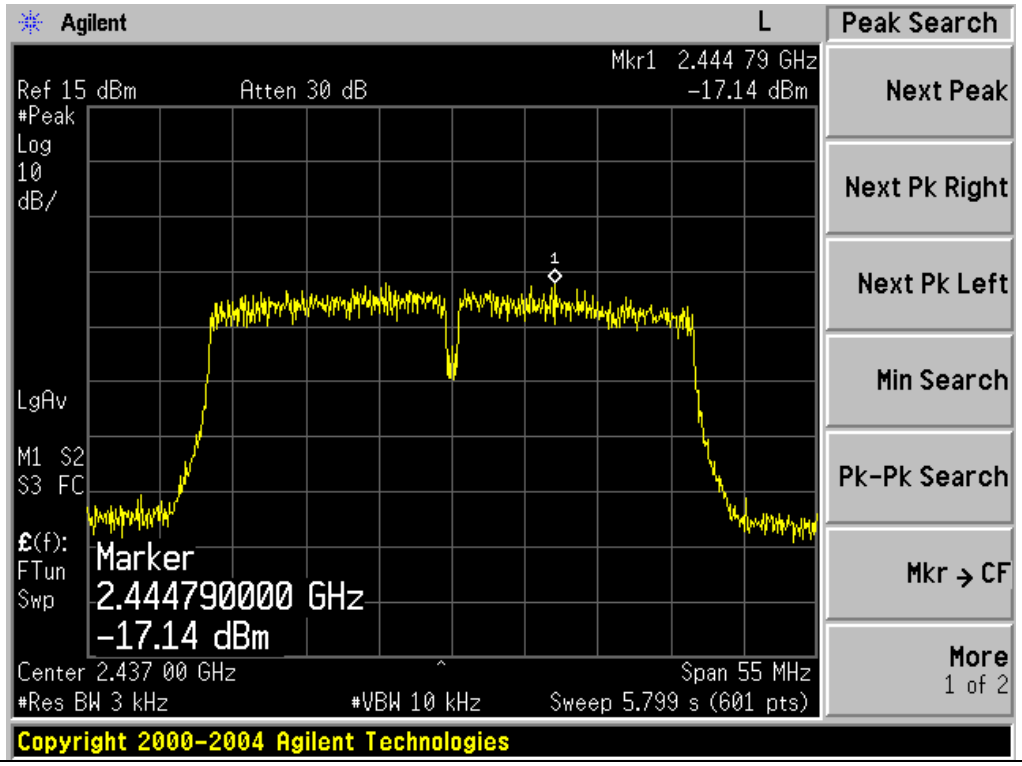

TX CH 09

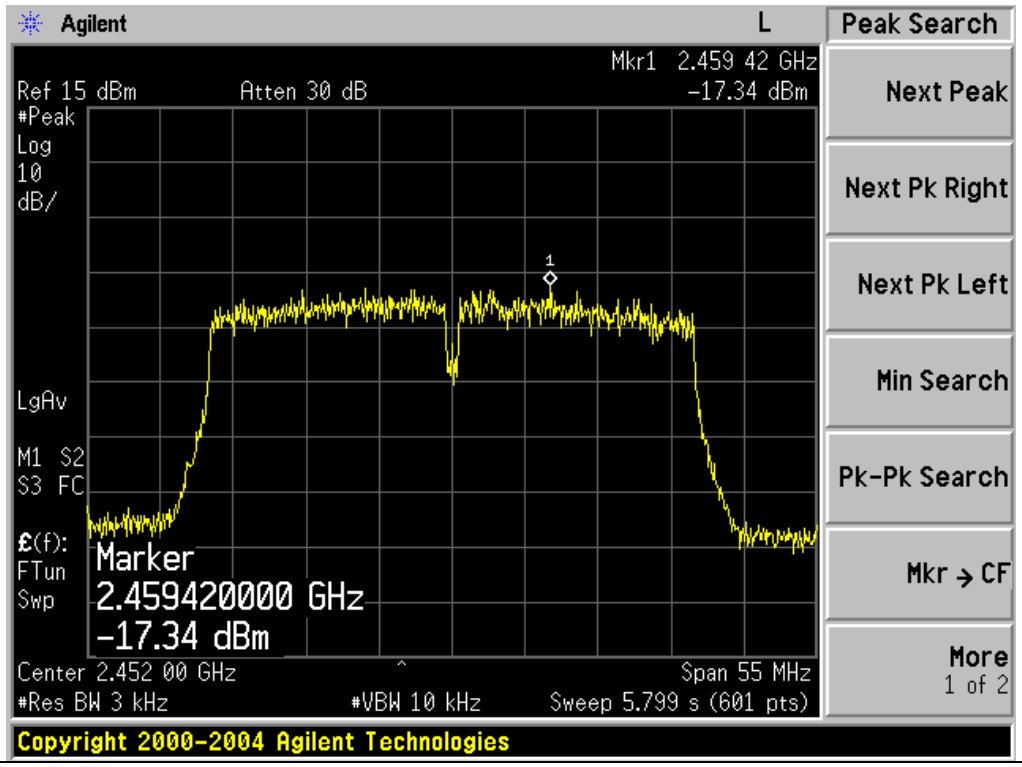

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V From Battery
Test Mode :	TX b Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.619	500	Pass
Middle	2437	9.606	500	Pass
High	2462	10.024	500	Pass

TX CH 01

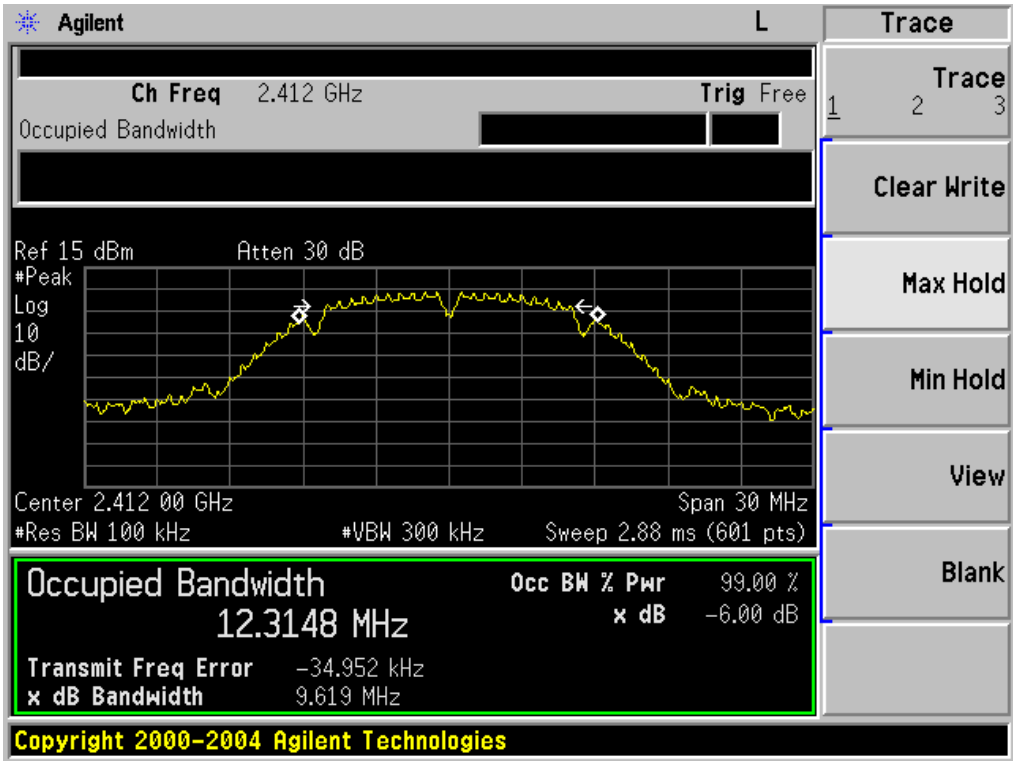

TX CH 06

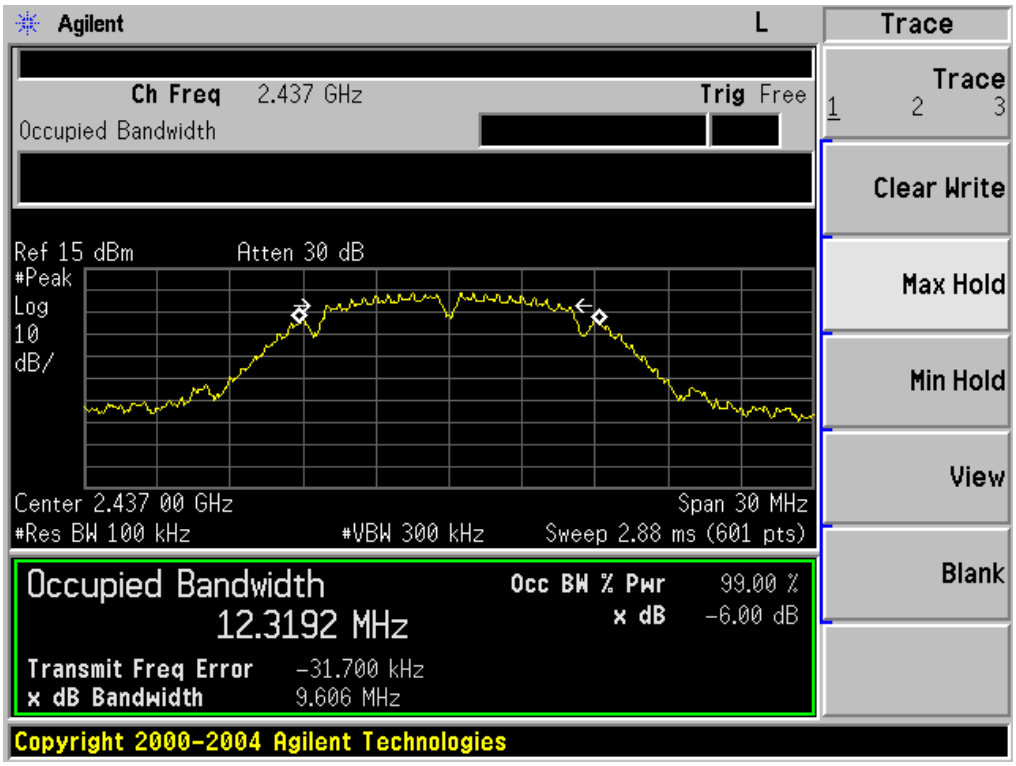

TX CH 11

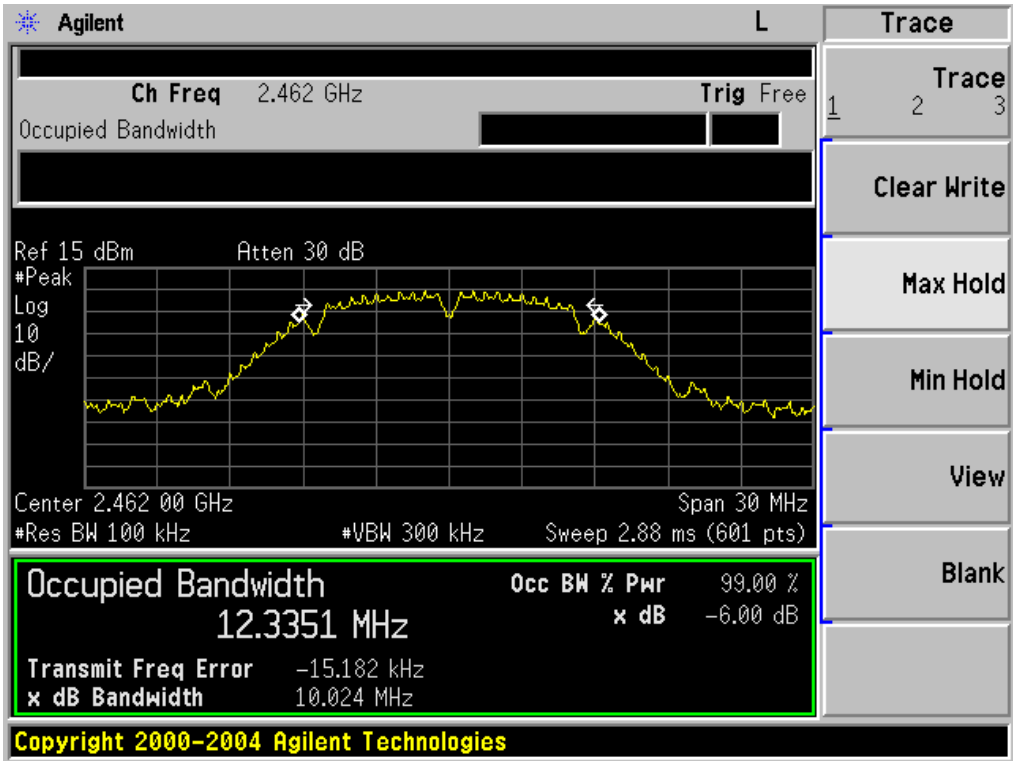

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V From Battery
Test Mode :	TX g Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	15.121	500	Pass
Middle	2437	15.493	500	Pass
High	2462	15.386	500	Pass

TX CH 01

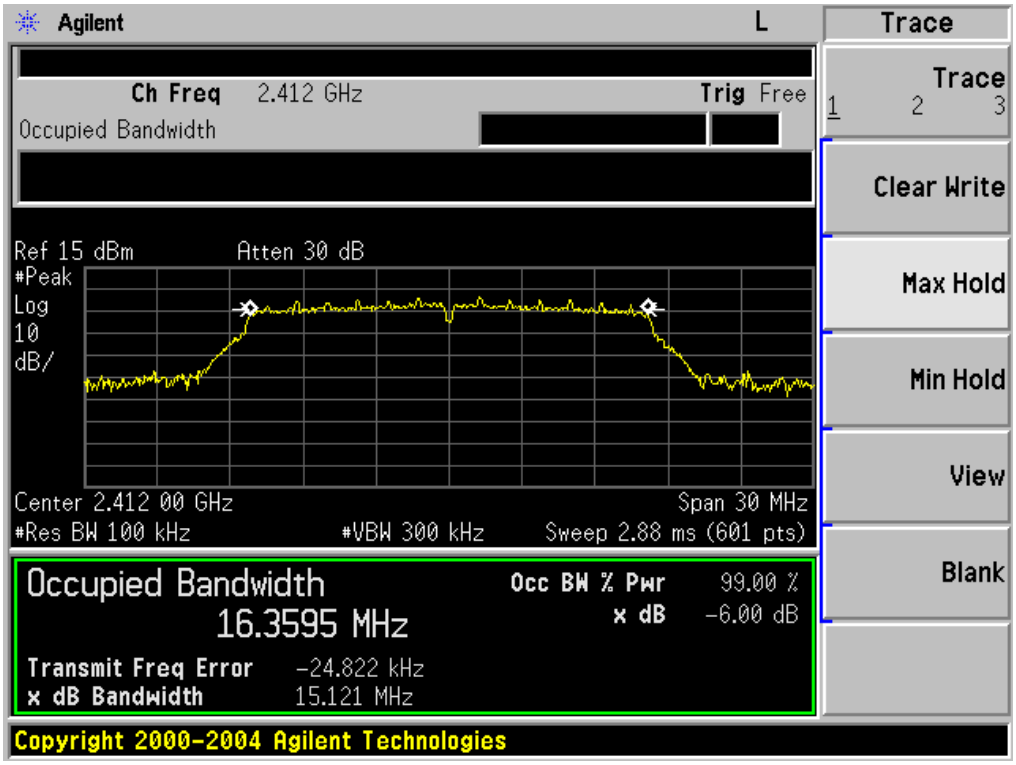

TX CH 06

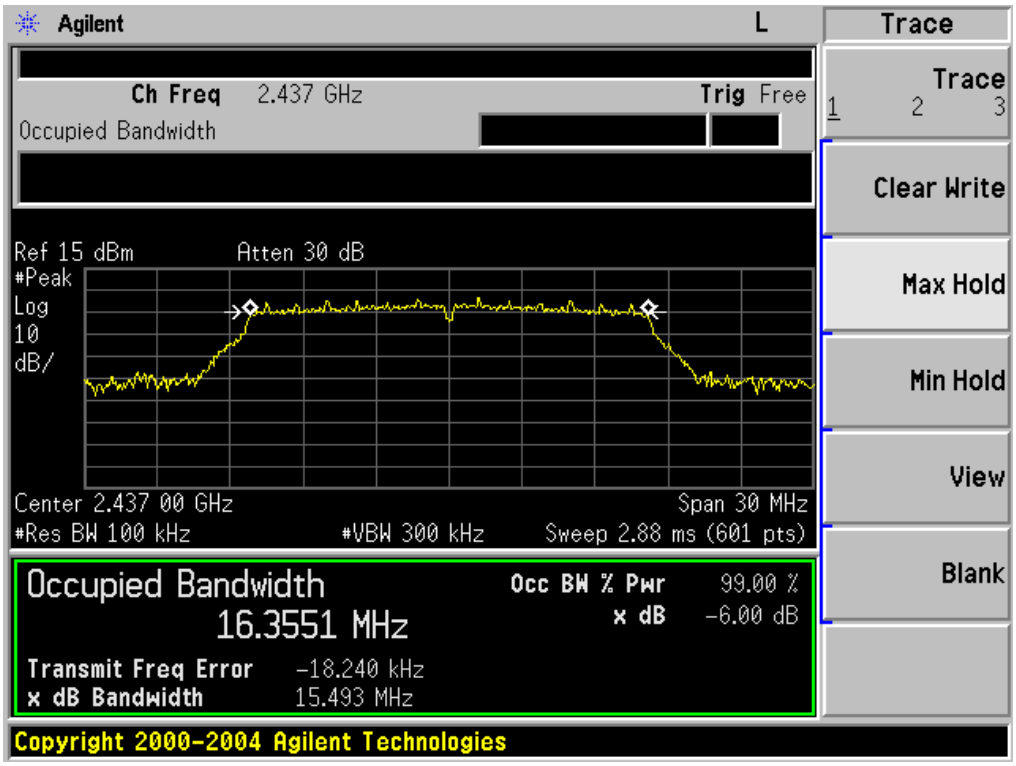

TX CH 11

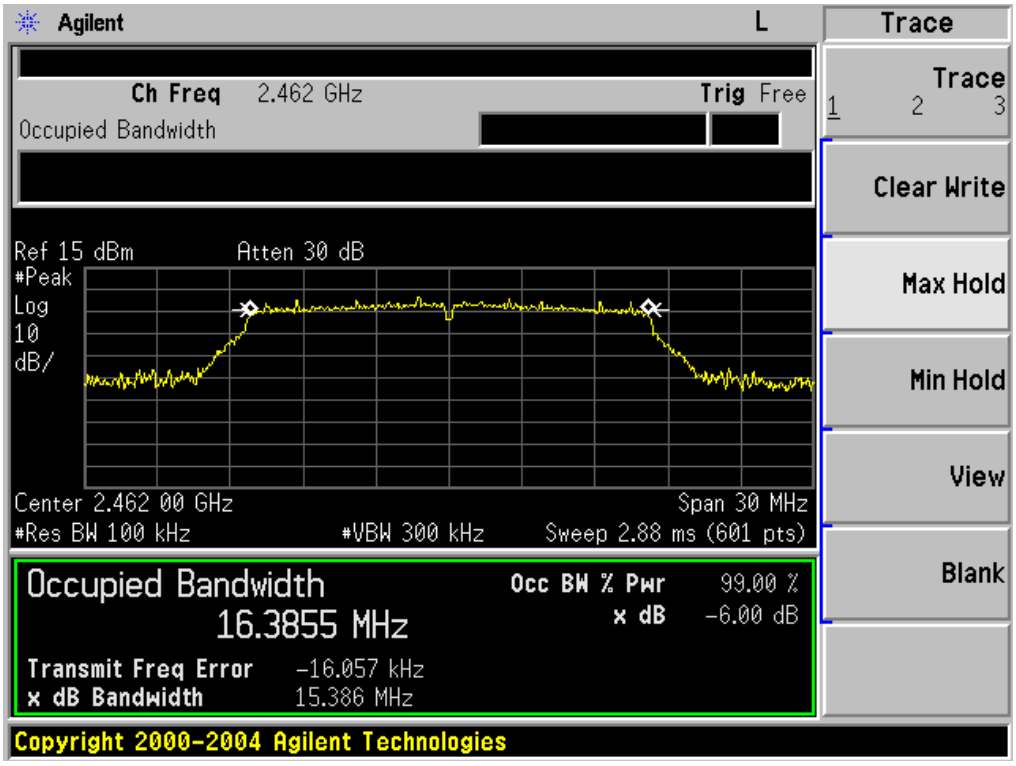

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V From Battery
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	15.166	500	Pass
Middle	2437	15.177	500	Pass
High	2462	15.164	500	Pass

TX CH 01

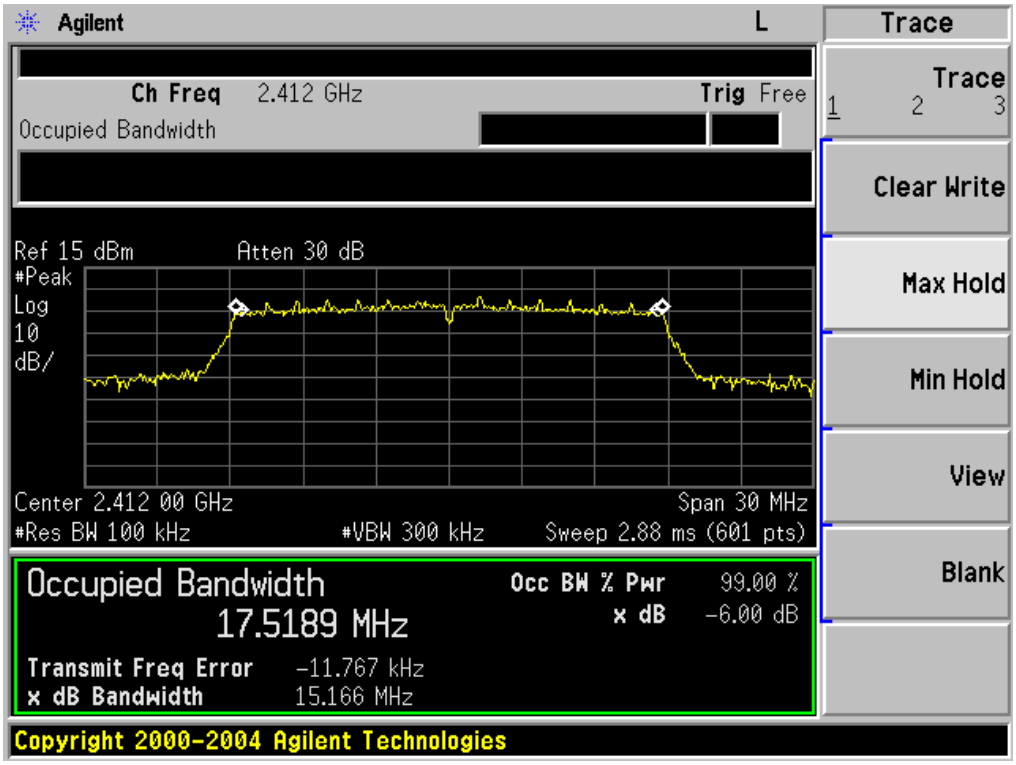

TX CH 06

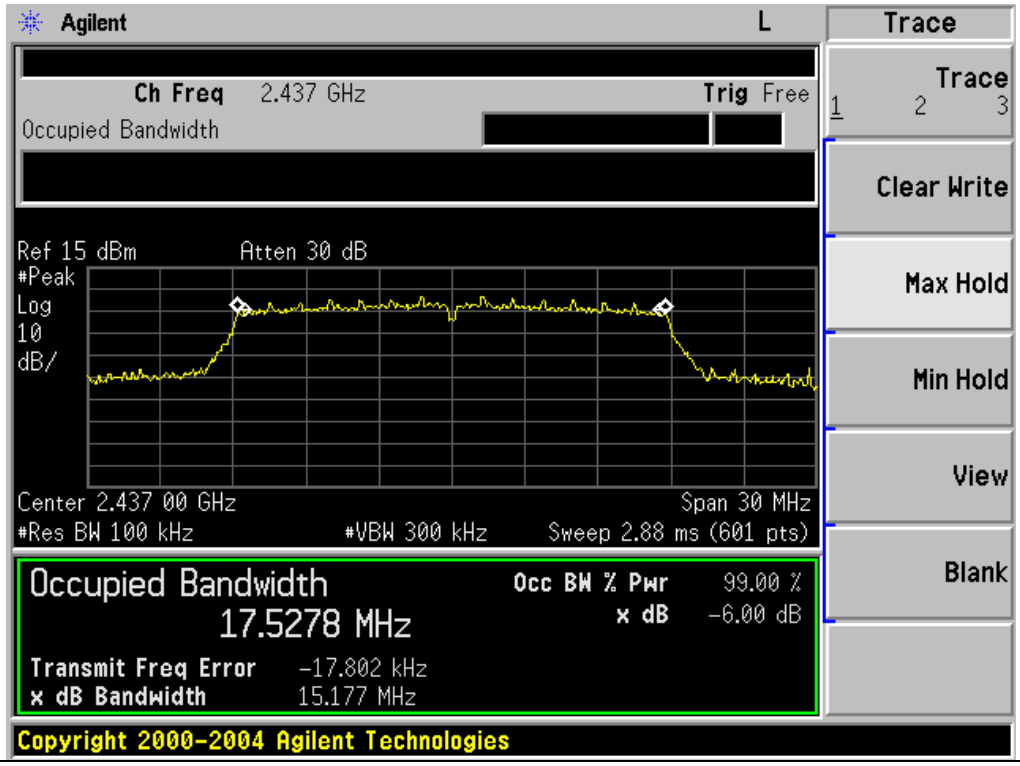

TX CH 11

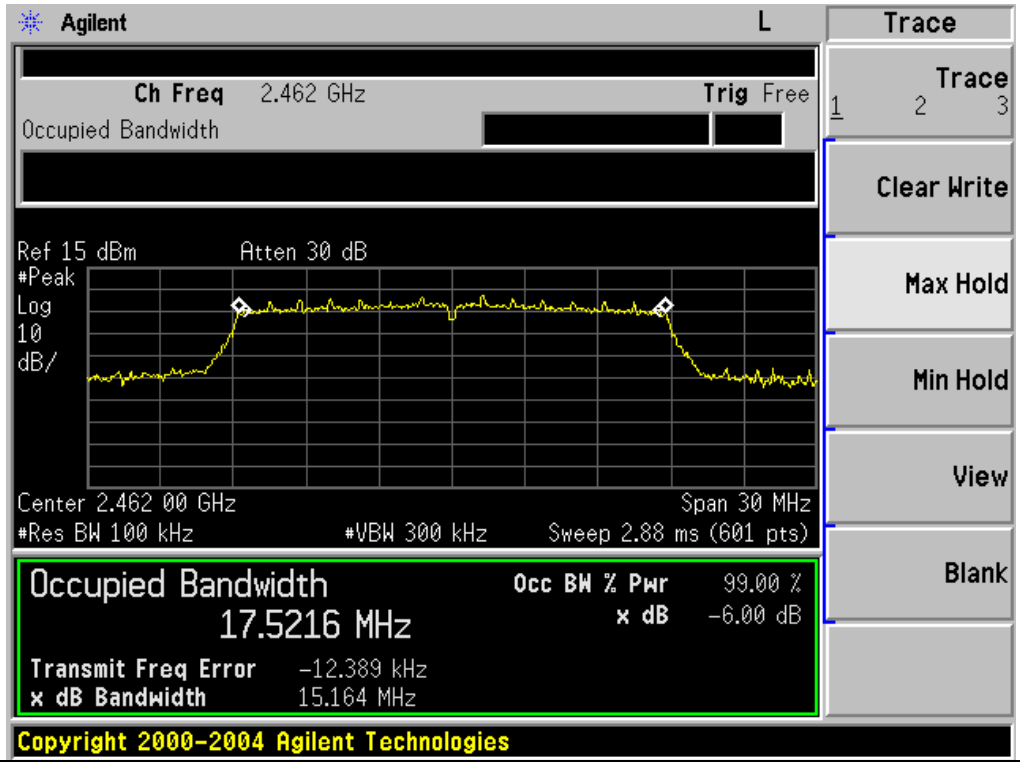

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V From Battery
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.279	500	Pass
Middle	2437	35.293	500	Pass
High	2452	35.277	500	Pass

TX CH 03

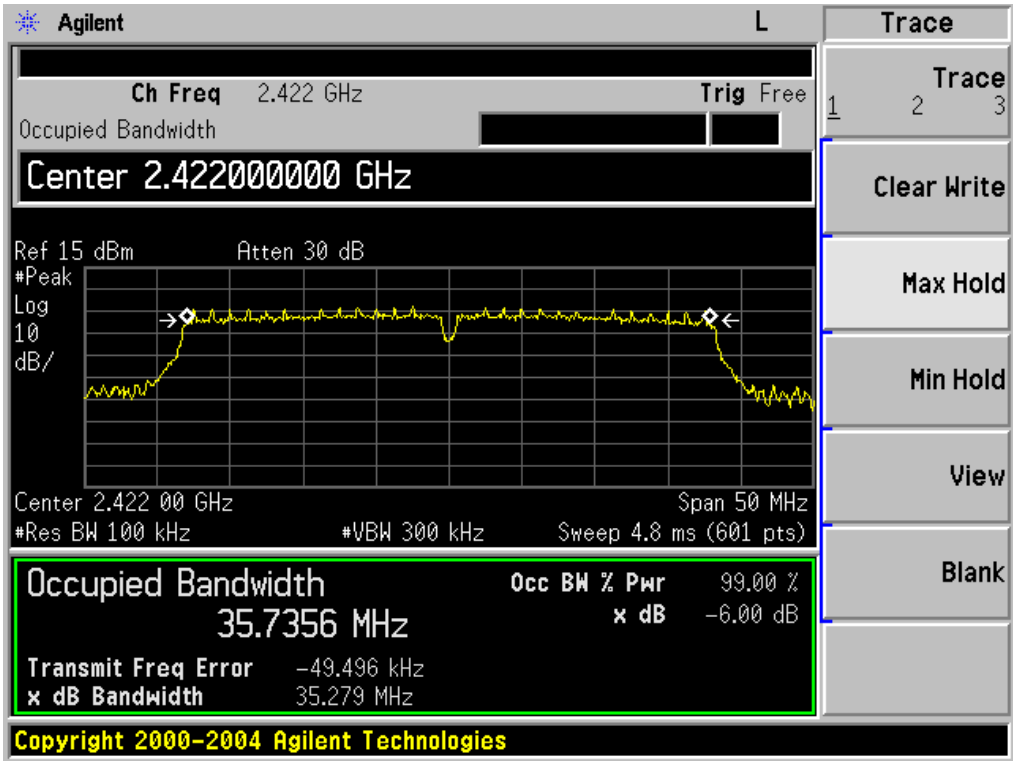

TX CH 06

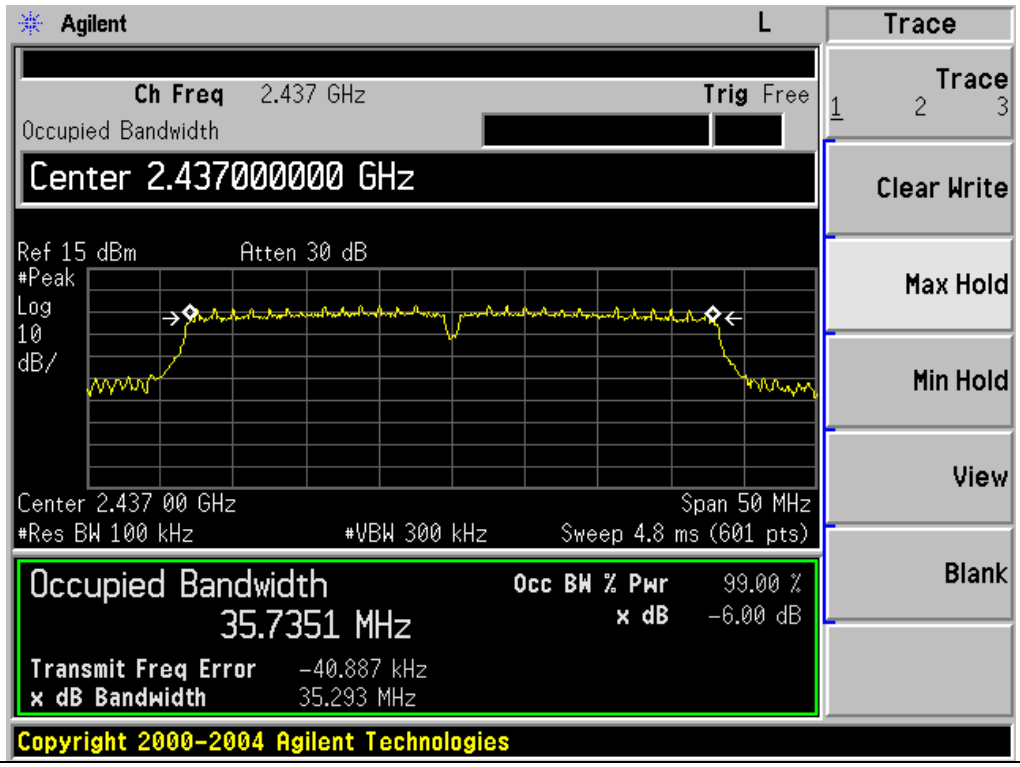

TX CH 09

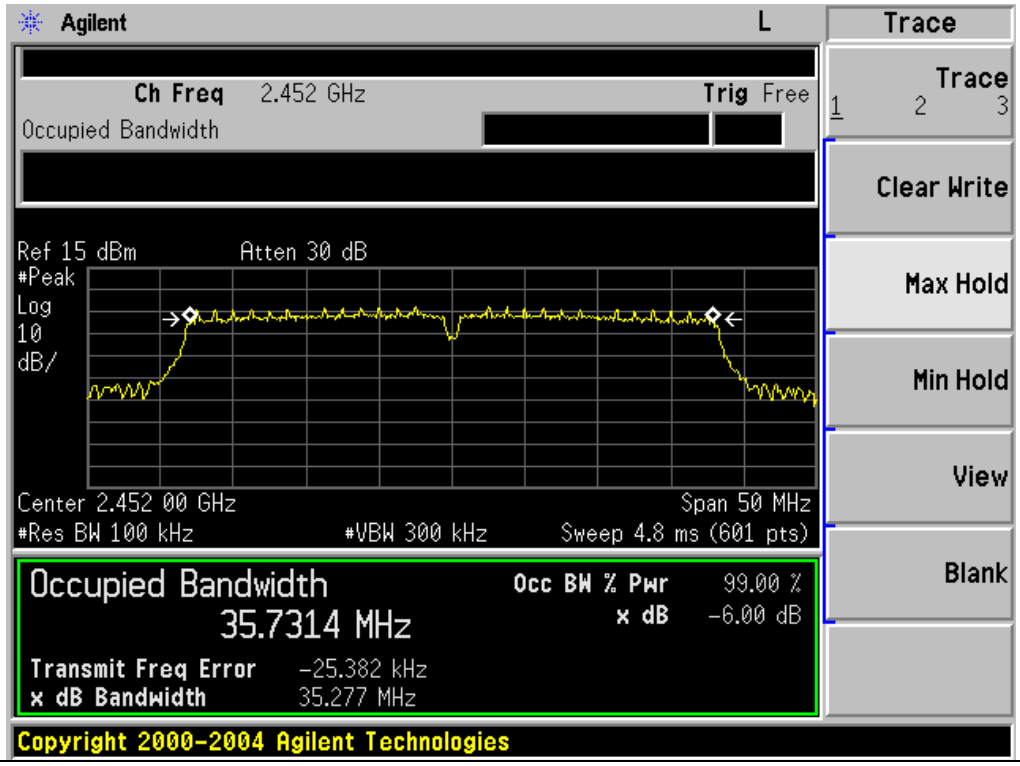

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

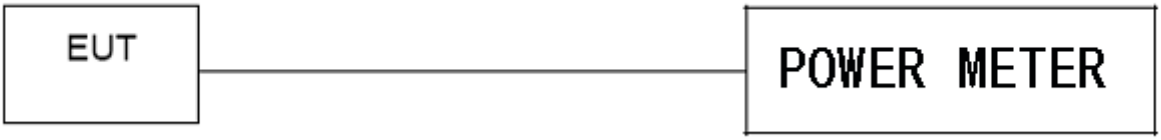

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V From Battery
Test Mode :	TX b/g/n(20M, 40M)		

TX 802.11b Mode			
Test Channe	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	16.76	30
CH06	2437	16.55	30
CH11	2462	16.45	30
TX 802.11g Mode			
CH01	2412	14.76	30
CH06	2437	14.55	30
CH11	2462	14.48	30
TX 802.11n-HT20 Mode			
CH01	2412	13.23	30
CH06	2437	13.45	30
CH11	2462	13.52	30
TX 802.11n-HT40 Mode			
CH03	2422	12.58	30
CH06	2437	12.45	30
CH09	2452	12.33	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
e) Repeat above procedures until all measured frequencies were complete.
f) The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
g) The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
h) The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning

the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

i) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

j) For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP

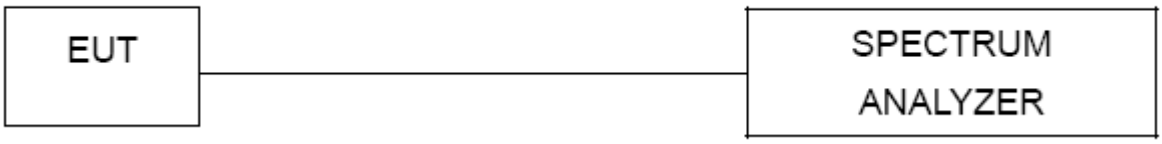

7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS

802.11b: Band Edge, Left Side

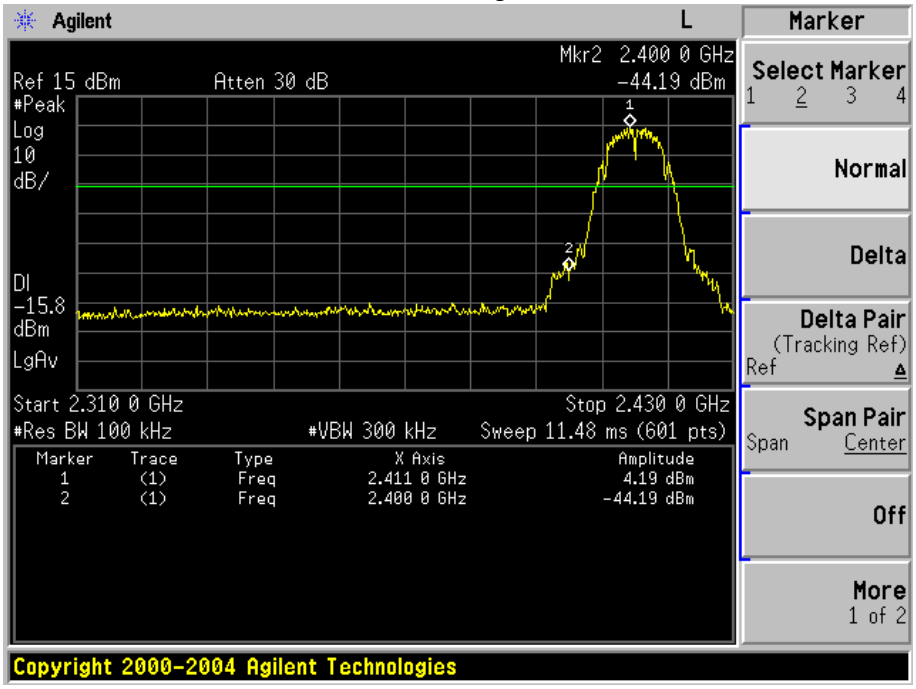

802.11b: Band Edge, Right Side

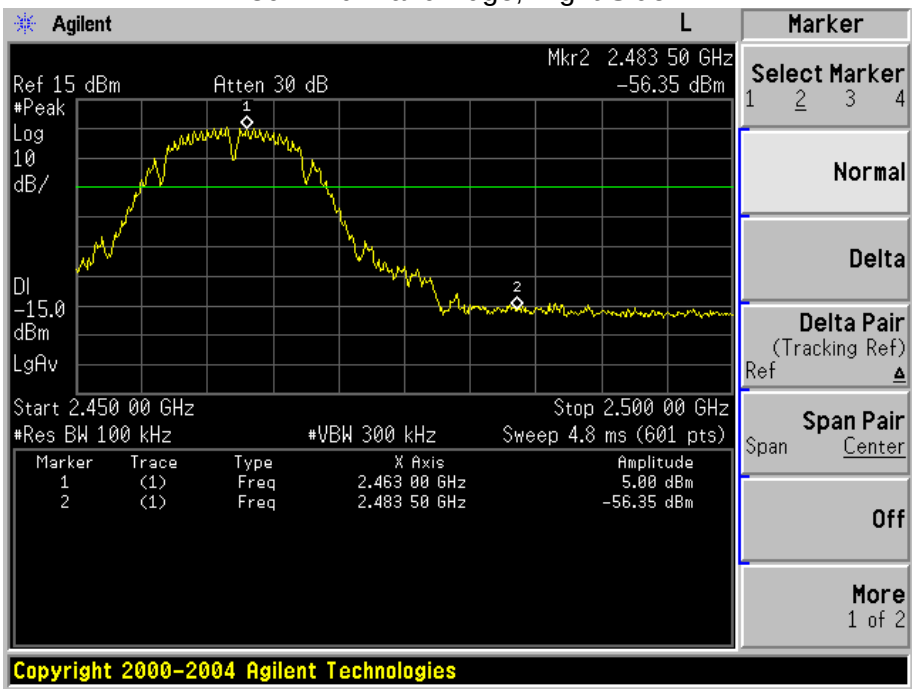

802.11g: Band Edge, Left Side

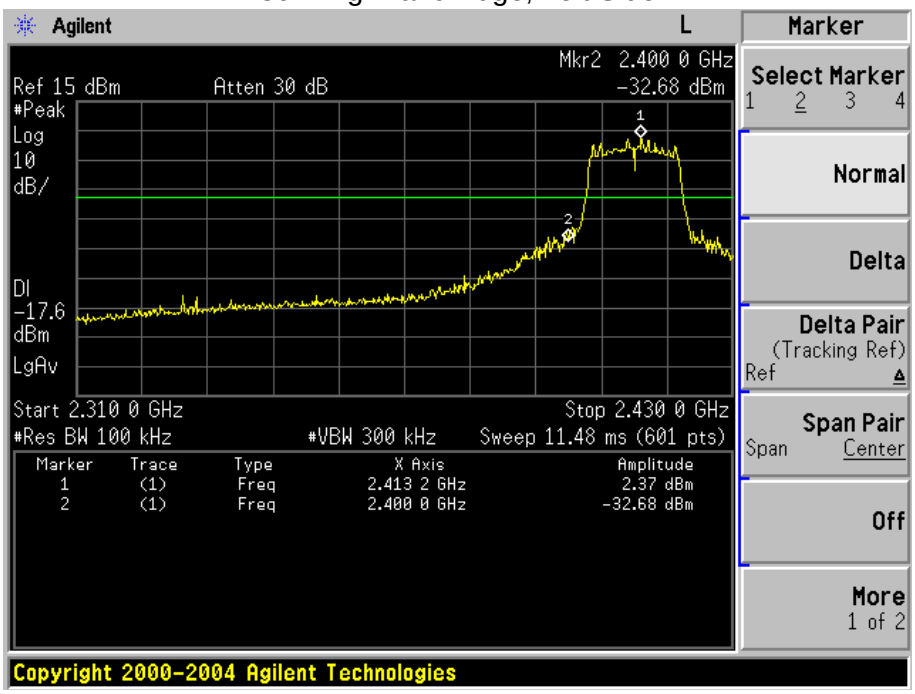

802.11g: Band Edge, Right Side

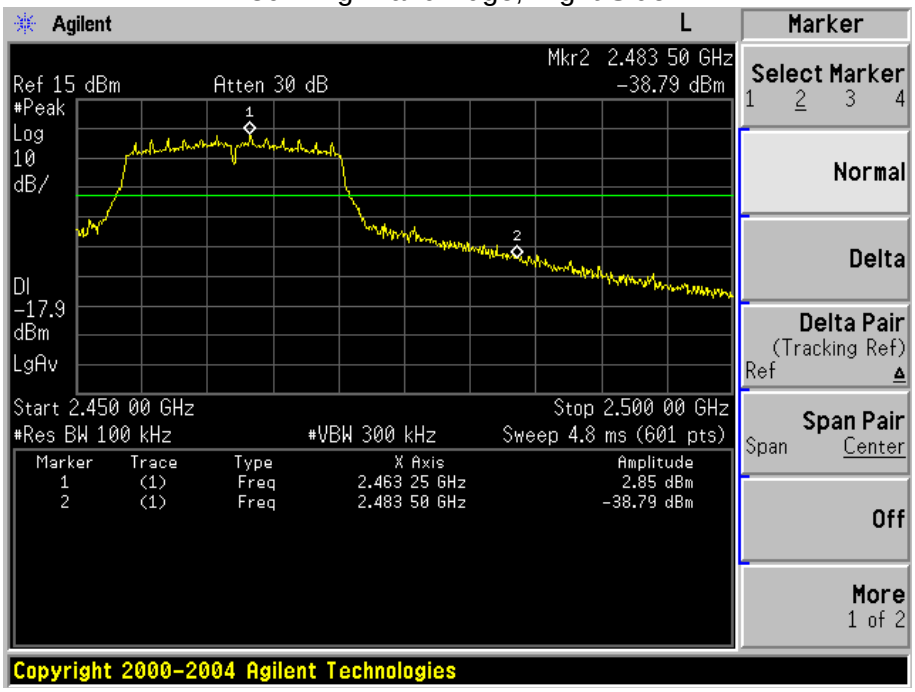

802.11n-HT20: Band Edge, Left Side

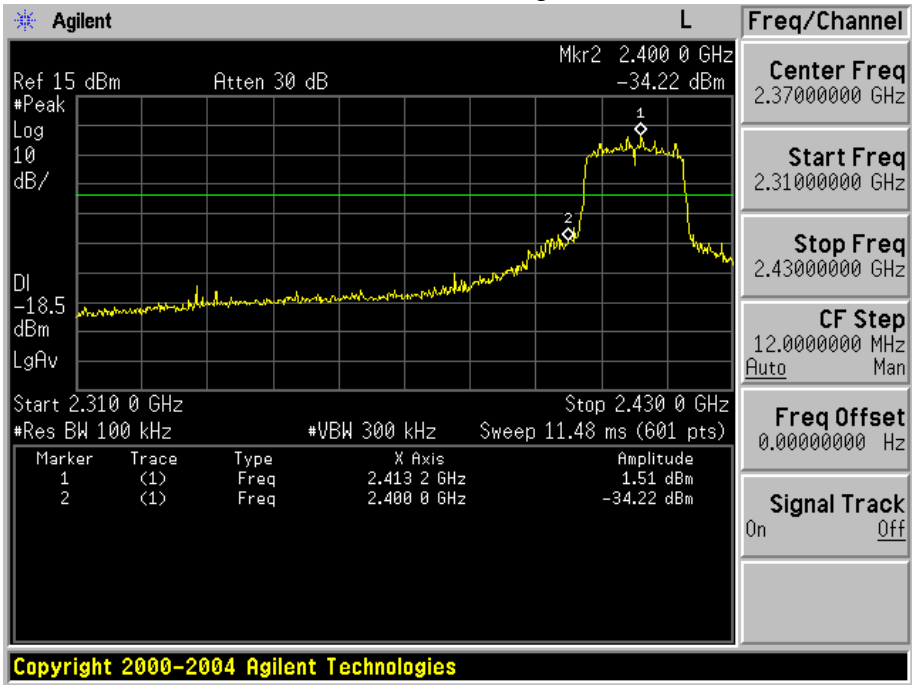

802.11n-HT20: Band Edge, Right Side

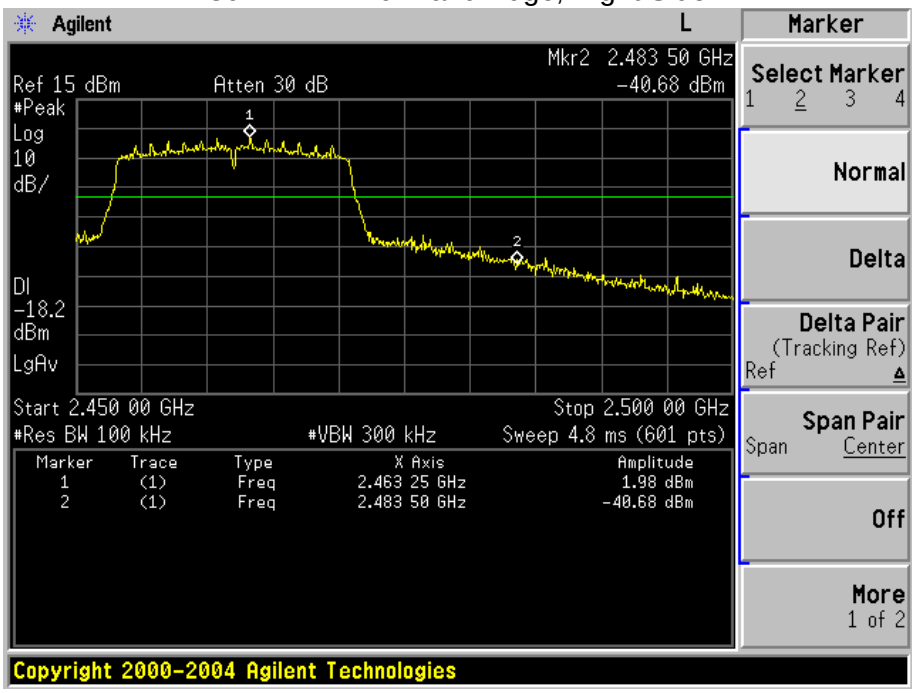

802.11n-HT40

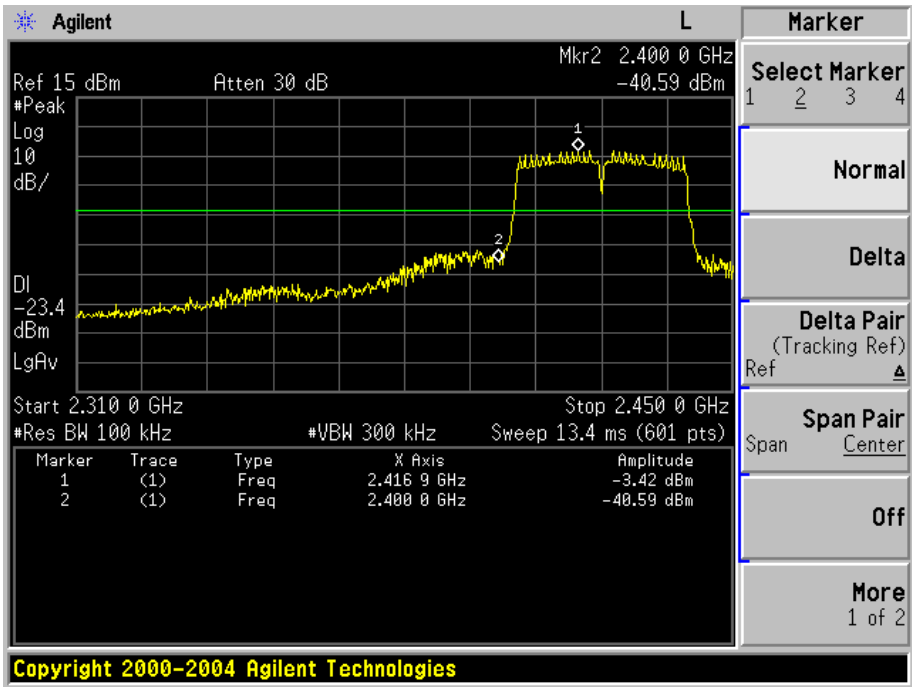

802.11n-HT40

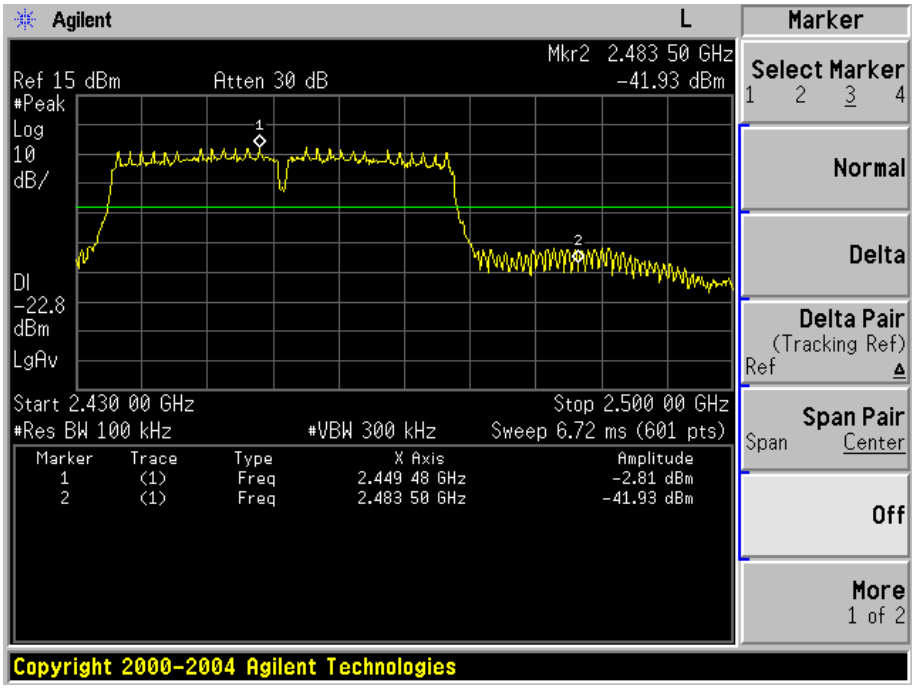

8. DUTY CYCLE OF TEST SIGNAL

8.1 STANDARD REQUIREMENT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

8.2 FORMULA:

Duty Cycle = Ton / (Ton+Toff)

Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

Duty Cycle:

	Duty Cycle	Duty Fator (dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	0
802.11n(HT40)	1	0

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is Internal Antenna. It comply with the standard requirement.

10. EUT TEST PHOTO

Conducted Measurement Photos

Radiated Measurement Photos

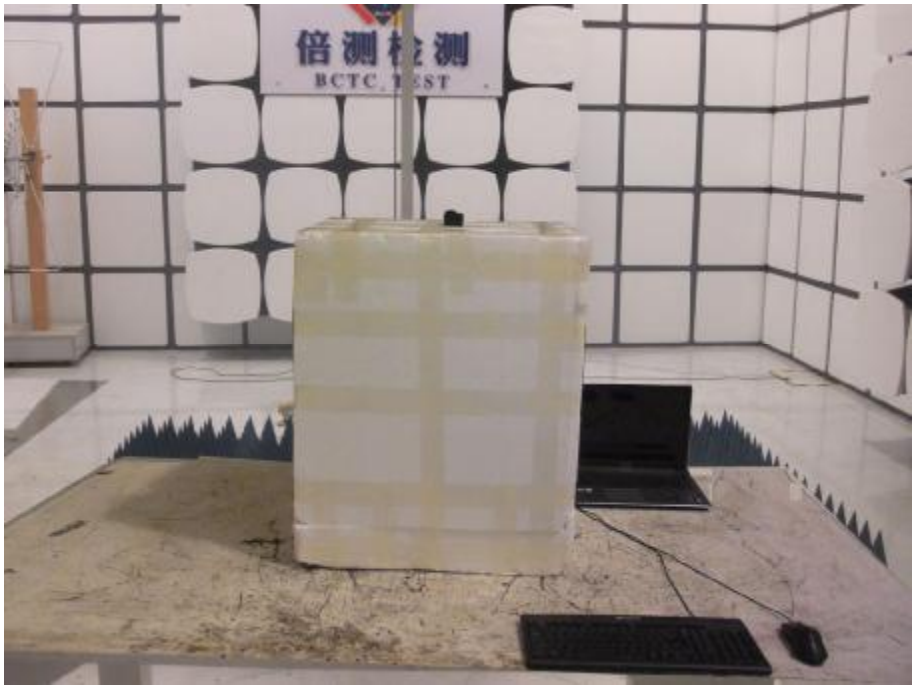

11. EUT PHOTO

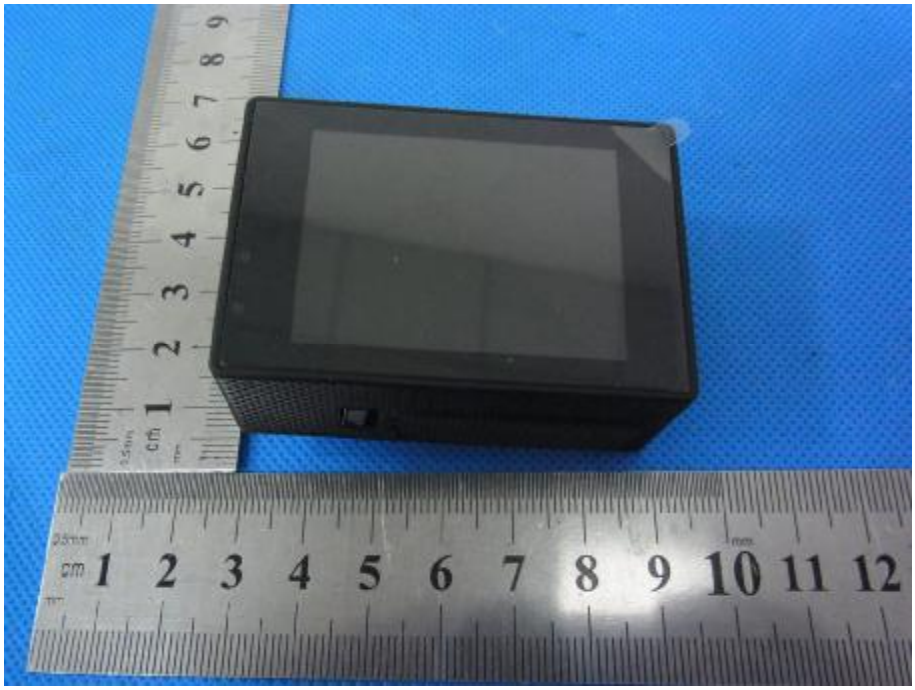

WIFI
C30
SOOCOO

※※※※※ **END OF REPORT** ※※※※※