


Report No.: WSCT-ANAB-R&E250700058A2-BT Issued Date: 04 August 2026

Middle channel: 2441MHz

Horizontal:

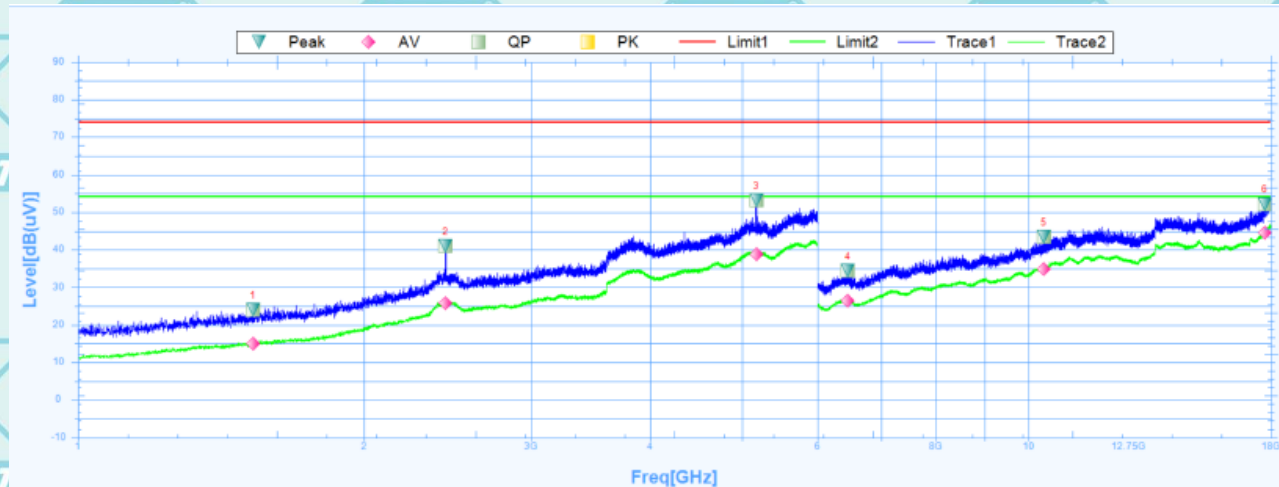


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1528.1250	23.97	24.97	-1	74	-50.03	9	Horizontal	PK	Pass
1	1528.1250	14.89	24.97	-10.08	54	-39.11	9	Horizontal	AV	Pass
2	2436.8750	40.99	27.39	13.6	74	-33.01	327.4	Horizontal	PK	Pass
2	2436.8750	25.8	27.39	-1.59	54	-28.2	327.4	Horizontal	AV	Pass
3	5175.0000	53.17	31.74	21.43	74	-20.83	146.9	Horizontal	PK	Pass
3	5175.0000	38.77	31.74	7.03	54	-15.23	146.9	Horizontal	AV	Pass
4	6459.0000	34.38	4.64	29.74	74	-39.62	130.8	Horizontal	PK	Pass
4	6459.0000	26.36	4.64	21.72	54	-27.64	130.8	Horizontal	AV	Pass
5	10387.5000	43.39	13.55	29.84	74	-30.61	14.2	Horizontal	PK	Pass
5	10387.5000	34.86	13.55	21.31	54	-19.14	14.2	Horizontal	AV	Pass
6	17725.5000	52.19	22.14	30.05	74	-21.81	133.2	Horizontal	PK	Pass
6	17725.5000	44.56	22.14	22.42	54	-9.44	133.2	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250700058A2-BT Issued Date: 04 August 2026

Vertical:

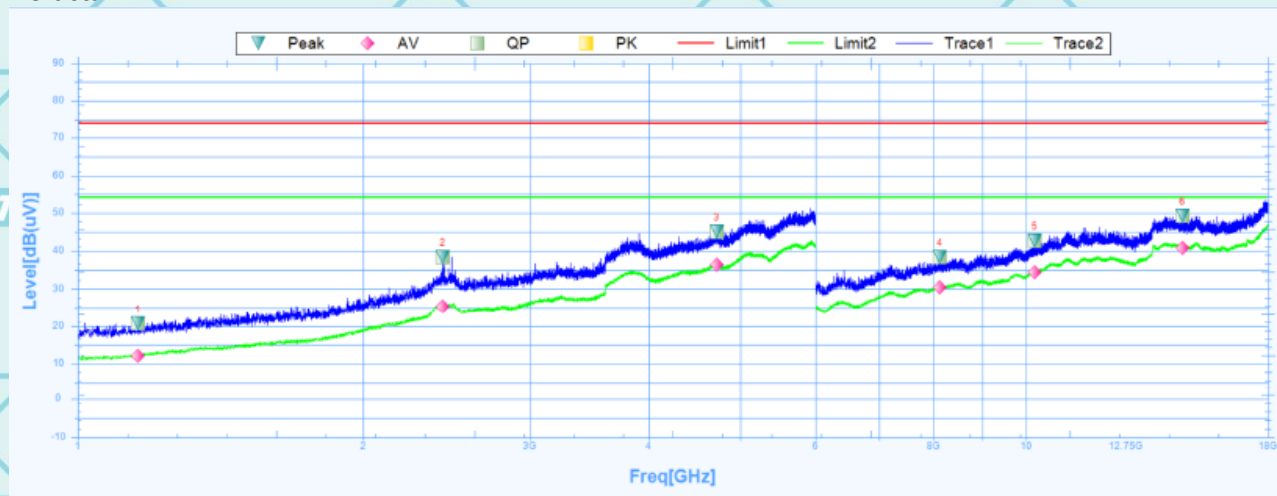


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1157.5000	20.78	24.38	-3.6	74	-53.22	0	Vertical	PK	Pass
1	1157.5000	12.07	24.38	-12.31	54	-41.93	0	Vertical	AV	Pass
2	2426.2500	38.42	27.35	11.07	74	-35.58	0	Vertical	PK	Pass
2	2426.2500	25.38	27.35	-1.97	54	-28.62	0	Vertical	AV	Pass
3	4719.3750	45.04	31.04	14	74	-28.96	305.8	Vertical	PK	Pass
3	4719.3750	36.39	31.04	5.35	54	-17.61	305.8	Vertical	AV	Pass
4	8118.0000	38.31	8.54	29.77	74	-35.69	206.1	Vertical	PK	Pass
4	8118.0000	30.37	8.54	21.83	54	-23.63	206.1	Vertical	AV	Pass
5	10222.5000	42.63	13.05	29.58	74	-31.37	274.2	Vertical	PK	Pass
5	10222.5000	34.46	13.05	21.41	54	-19.54	274.2	Vertical	AV	Pass
6	14626.5000	49.22	18.53	30.69	74	-24.78	61.4	Vertical	PK	Pass
6	14626.5000	40.85	18.53	22.32	54	-13.15	61.4	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250700058A2-BT Issued Date: 04 August 2026

High channel: 2480MHz

Horizontal:

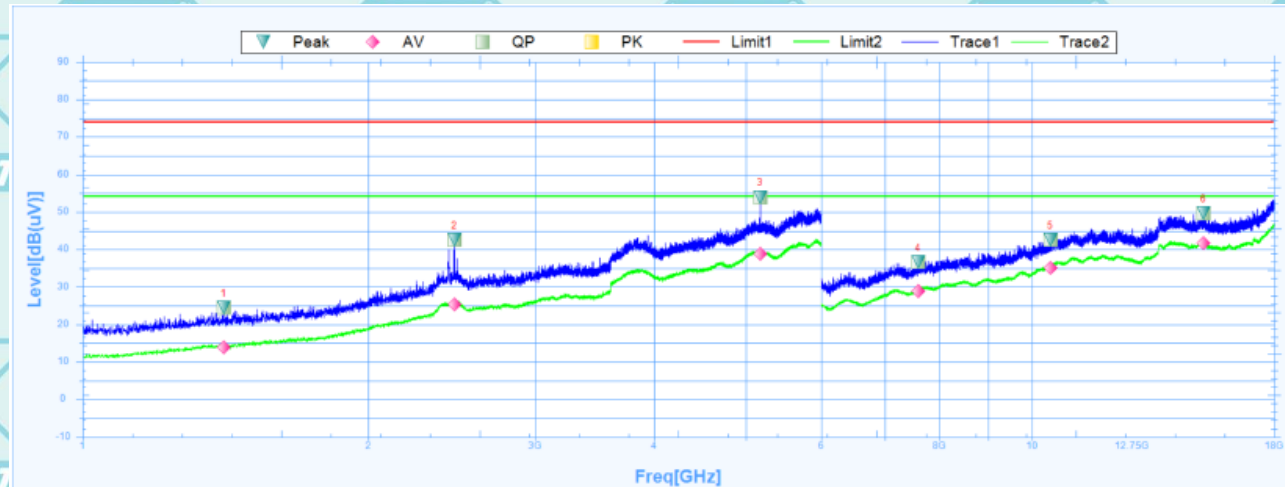


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1407.5000	24.5	25.09	-0.59	74	-49.5	306.6	Horizontal	PK	Pass
1	1407.5000	13.84	25.09	-11.25	54	-40.16	306.6	Horizontal	AV	Pass
2	2464.3750	42.59	27.48	15.11	74	-31.41	360.1	Horizontal	PK	Pass
2	2464.3750	25.43	27.48	-2.05	54	-28.57	360.1	Horizontal	AV	Pass
3	5176.2500	53.96	31.74	22.22	74	-20.04	152.3	Horizontal	PK	Pass
3	5176.2500	38.84	31.74	7.1	54	-15.16	152.3	Horizontal	AV	Pass
4	7588.5000	36.59	7.87	28.72	74	-37.41	359.5	Horizontal	PK	Pass
4	7588.5000	28.98	7.87	21.11	54	-25.02	359.5	Horizontal	AV	Pass
5	10464.0000	42.56	13.8	28.76	74	-31.44	242.5	Horizontal	PK	Pass
5	10464.0000	35.15	13.8	21.35	54	-18.85	242.5	Horizontal	AV	Pass
6	15165.0000	49.6	19.42	30.18	74	-24.4	61.9	Horizontal	PK	Pass
6	15165.0000	41.78	19.42	22.36	54	-12.22	61.9	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250700058A2-BT Issued Date: 04 August 2026

Vertical:

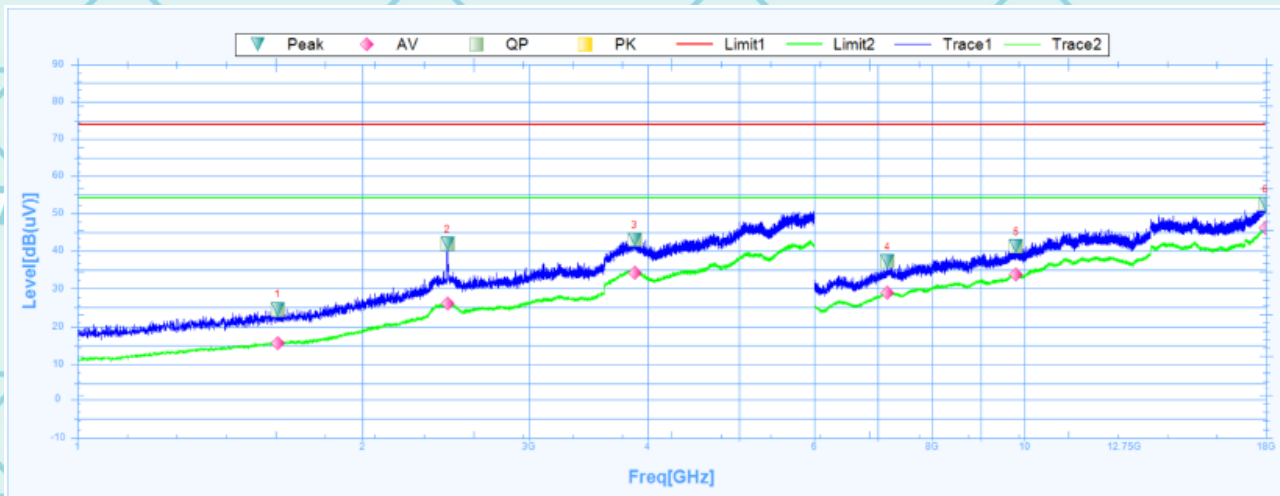

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1626.2500	24.57	24.91	-0.34	74	-49.43	53.1	Vertical	PK	Pass
1	1626.2500	15.74	24.91	-9.17	54	-38.26	53.1	Vertical	AV	Pass
2	2458.7500	41.91	27.46	14.45	74	-32.09	0.5	Vertical	PK	Pass
2	2458.7500	25.98	27.46	-1.48	54	-28.02	0.5	Vertical	AV	Pass
3	3876.2500	43.11	29.4	13.71	74	-30.89	87.8	Vertical	PK	Pass
3	3876.2500	34.26	29.4	4.86	54	-19.74	87.8	Vertical	AV	Pass
4	7168.5000	37.26	7.03	30.23	74	-36.74	0	Vertical	PK	Pass
4	7168.5000	28.91	7.03	21.88	54	-25.09	0	Vertical	AV	Pass
5	9807.0000	41.33	11.91	29.42	74	-32.67	242.4	Vertical	PK	Pass
5	9807.0000	33.85	11.91	21.94	54	-20.15	242.4	Vertical	AV	Pass
6	17973.0000	52.54	23.74	28.8	74	-21.46	213.7	Vertical	PK	Pass
6	17973.0000	46.1	23.74	22.36	54	-7.9	213.7	Vertical	AV	Pass

Note:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Data of measurement shown "---" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
- EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

Report No.: WSCT-ANAB-R&E250700058A2-BT Issued Date: 04 August 2026


6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below

GFSK

Low channel

Horizontal:

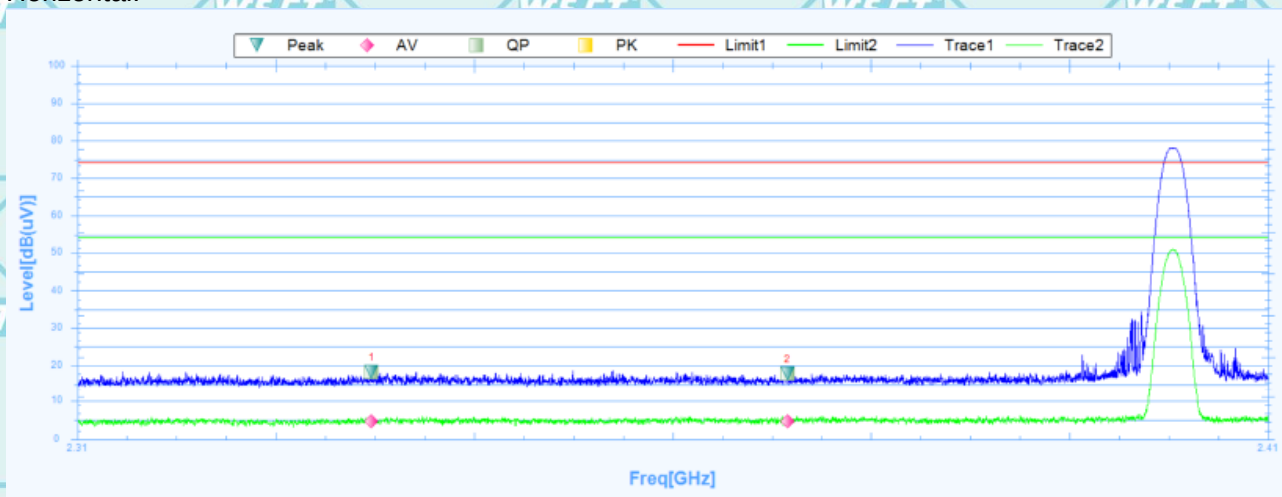


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2334.7125	18.28	15.56	2.72	74	-55.72	-0.1	Horizontal	PK	Pass
1	2334.7125	4.59	15.56	-10.97	54	-49.41	-0.1	Horizontal	AV	Pass
2	2369.6375	17.96	15.73	2.23	74	-56.04	305.7	Horizontal	PK	Pass
2	2369.6375	4.62	15.73	-11.11	54	-49.38	305.7	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250700058A2-BT Issued Date: 04 August 2026

Vertical:

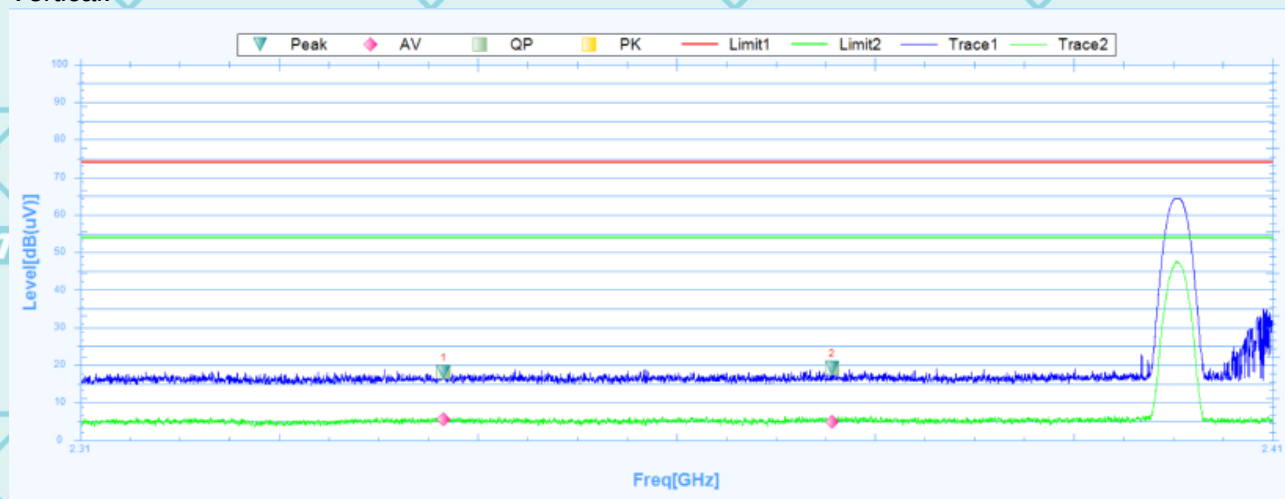


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2340.4625	18.14	-36.47	54.61	74	-55.86	0.5	Vertical	PK	Pass
1	2340.4625	5.56	-36.47	42.03	54	-48.44	0.5	Vertical	AV	Pass
2	2373.0625	19.22	-36.43	55.65	74	-54.78	360	Vertical	PK	Pass
2	2373.0625	4.93	-36.43	41.36	54	-49.07	360	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250700058A2-BT Issued Date: 04 August 2026


High channel
Horizontal:

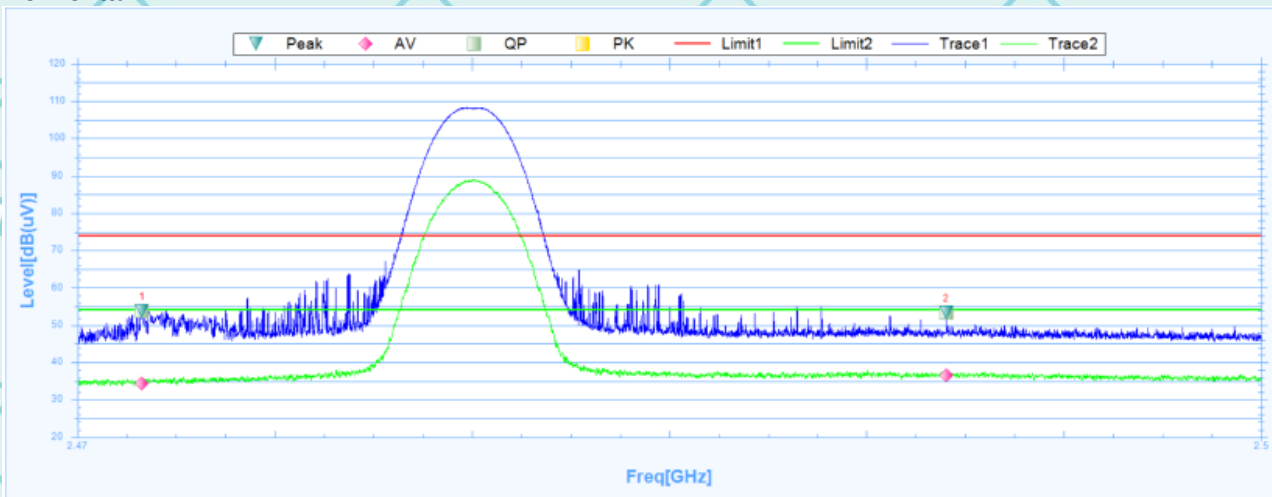

Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2471.6350	53.84	-36.19	90.03	74	-20.16	126.6	Horizontal	PK	Pass
1	2471.6350	34.37	-36.19	70.56	54	-19.63	126.6	Horizontal	AV	Pass
2	2492.0275	53.3	-36.13	89.43	74	-20.7	39.4	Horizontal	PK	Pass
2	2492.0275	36.49	-36.13	72.62	54	-17.51	39.4	Horizontal	AV	Pass

Vertical:

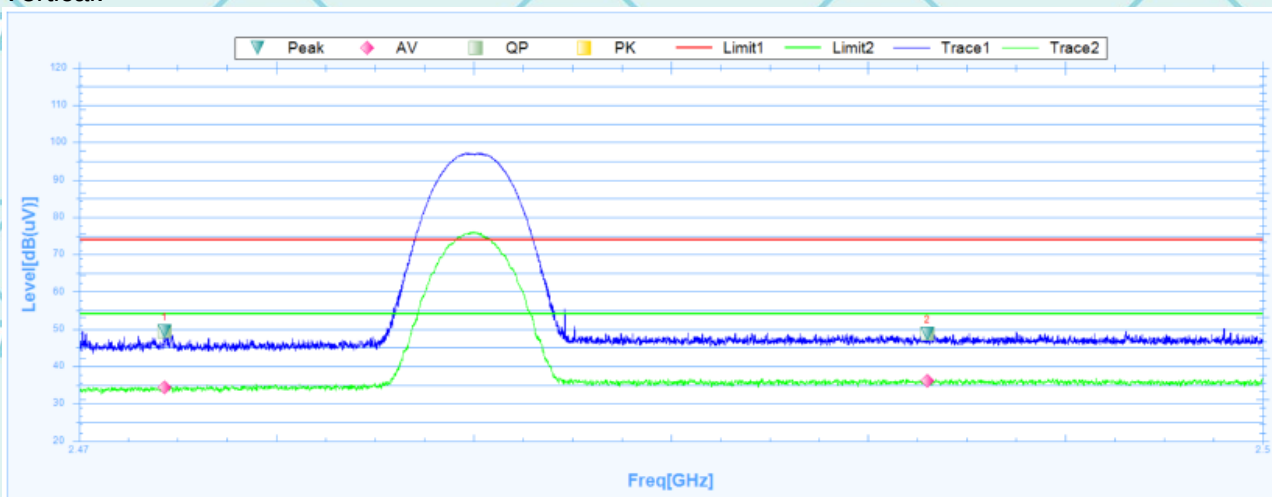

Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2472.1600	49.47	-36.19	85.66	74	-24.53	92.6	Vertical	PK	Pass
1	2472.1600	34.44	-36.19	70.63	54	-19.56	92.6	Vertical	AV	Pass
2	2491.5062	48.66	-36.13	84.79	74	-25.34	0.7	Vertical	PK	Pass
2	2491.5062	36.04	-36.13	72.17	54	-17.96	0.7	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz
Reading level (dB(uV)) = Receiver reading
Corr. Factor (dB) = Attenuation factor + Cable loss
Level (dB(uV)) = Reading level (dB(uV)) + Corr. Factor (dB)
Limit (dB(uV)) = Limit stated in standard

Report No.: WSCT-ANAB-R&E250700058A2-BT Issued Date: 04 August 2026

Margin (dB) = Level (dB μ V) – Limits (dB μ V)

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******