

Report No.: WSCT-ANAB-R&E260500034A-BT Issued Date: 12 May 2026

6.11.2. Test Data

Please refer to following diagram for individual

Below 1GHz


Horizontal:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		51.3400	29.91	-7.50	22.41	40.00	-17.59	QP
2		108.5700	30.48	-10.35	20.13	43.50	-23.37	QP
3		311.3000	27.41	-6.26	21.15	46.00	-24.85	QP
4		450.0100	26.76	-2.01	24.75	46.00	-21.25	QP
5		644.0100	26.29	2.19	28.48	46.00	-17.52	QP
6	*	818.6100	25.89	5.24	31.13	46.00	-14.87	QP

Report No.: WSCT-ANAB-R&E260500034A-BT Issued Date: 12 May 2026

Vertical:

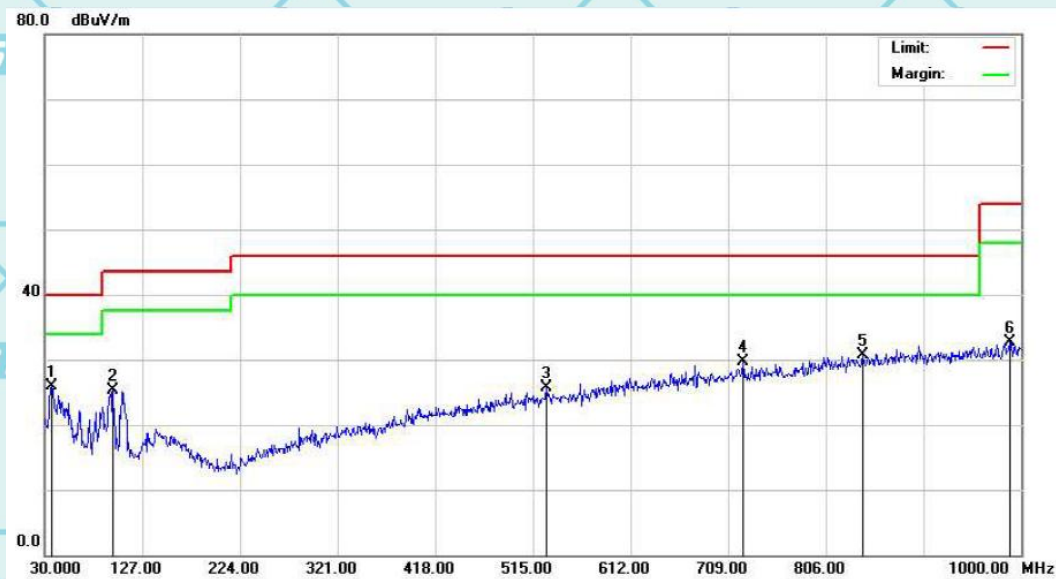

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	36.7900	46.40	-20.52	25.88	40.00	-14.12	QP
2		97.9000	45.57	-20.21	25.36	43.50	-18.14	QP
3		528.5800	43.72	-18.11	25.61	46.00	-20.39	QP
4		723.5500	46.82	-17.08	29.74	46.00	-16.26	QP
5		842.8600	47.00	-16.36	30.64	46.00	-15.36	QP
6		988.3600	48.07	-15.35	32.72	54.00	-21.28	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E260500034A-BT Issued Date: 12 May 2026

Above 1GHz


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

GFSK

Low channel: 2402MHz


Horizontal:

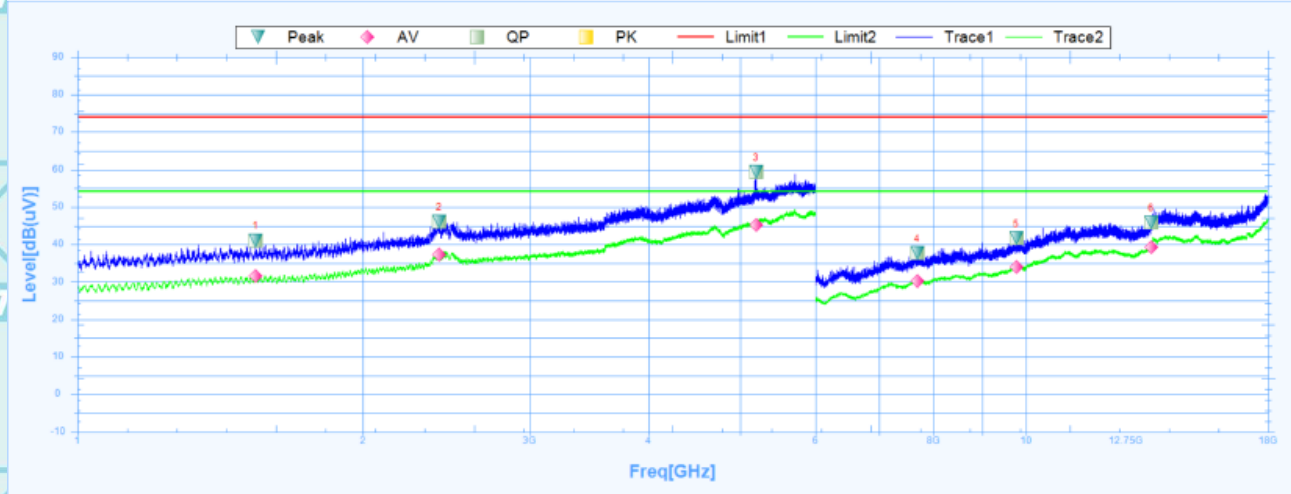

Susputed Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1541.8750	41.15	24.96	16.19	74	-32.85	360	Horizontal	PK	Pass
1	1541.8750	31.46	24.96	6.5	54	-22.54	360	Horizontal	AV	Pass
2	2406.8750	46.2	27.28	18.92	74	-27.8	348.1	Horizontal	PK	Pass
2	2406.8750	37.3	27.28	10.02	54	-16.7	348.1	Horizontal	AV	Pass
3	5196.8750	59.46	31.76	27.7	74	-14.54	360	Horizontal	PK	Pass
3	5196.8750	45.16	31.76	13.4	54	-8.84	360	Horizontal	AV	Pass
4	7681.5000	37.66	7.96	29.7	74	-36.34	0	Horizontal	PK	Pass
4	7681.5000	30.11	7.96	22.15	54	-23.89	0	Horizontal	AV	Pass
5	9772.5000	41.76	11.82	29.94	74	-32.24	120.5	Horizontal	PK	Pass
5	9772.5000	33.91	11.82	22.09	54	-20.09	120.5	Horizontal	AV	Pass
6	13555.5000	45.85	17.84	28.01	74	-28.15	342.6	Horizontal	PK	Pass
6	13555.5000	39.22	17.84	21.38	54	-14.78	342.6	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500034A-BT Issued Date: 12 May 2026

Vertical:

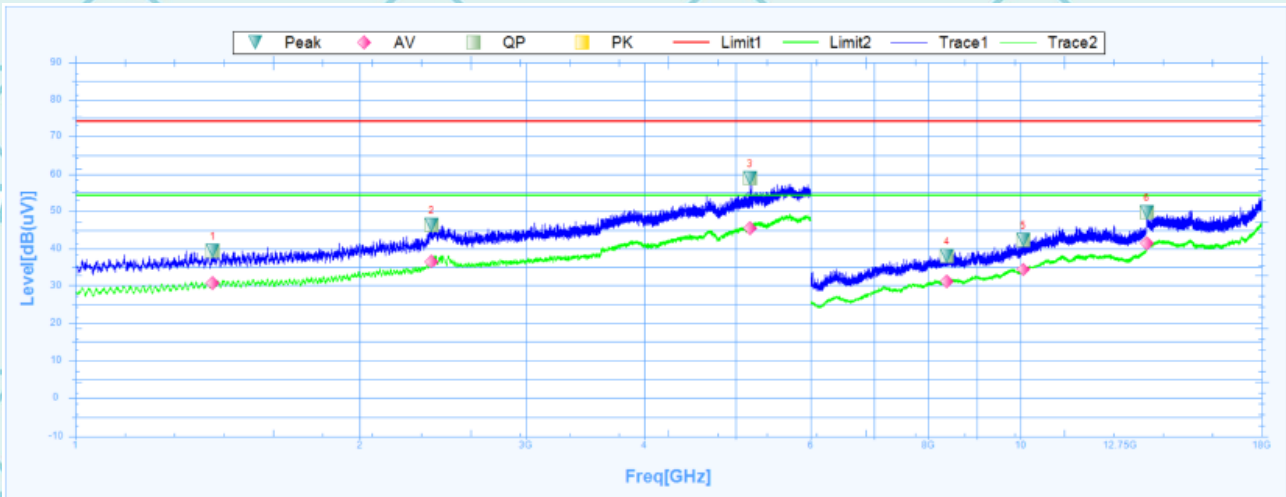


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1398.1250	39.55	25.09	14.46	74	-34.45	251.4	Vertical	PK	Pass
1	1398.1250	30.56	25.09	5.47	54	-23.44	251.4	Vertical	AV	Pass
2	2383.7500	46.42	27.2	19.22	74	-27.58	23.2	Vertical	PK	Pass
2	2383.7500	36.53	27.2	9.33	54	-17.47	23.2	Vertical	AV	Pass
3	5178.7500	58.88	31.74	27.14	74	-15.12	338.6	Vertical	PK	Pass
3	5178.7500	45.37	31.74	13.63	54	-8.63	338.6	Vertical	AV	Pass
4	8368.5000	38.08	9.04	29.04	74	-35.92	83.4	Vertical	PK	Pass
4	8368.5000	31.02	9.04	21.98	54	-22.98	83.4	Vertical	AV	Pass
5	10077.0000	42.45	12.59	29.86	74	-31.55	9.8	Vertical	PK	Pass
5	10077.0000	34.35	12.59	21.76	54	-19.65	9.8	Vertical	AV	Pass
6	13605.0000	49.72	17.98	31.74	74	-24.28	260.3	Vertical	PK	Pass
6	13605.0000	41.49	17.98	23.51	54	-12.51	260.3	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500034A-BT Issued Date: 12 May 2026

Middle channel: 2441MHz


Horizontal:

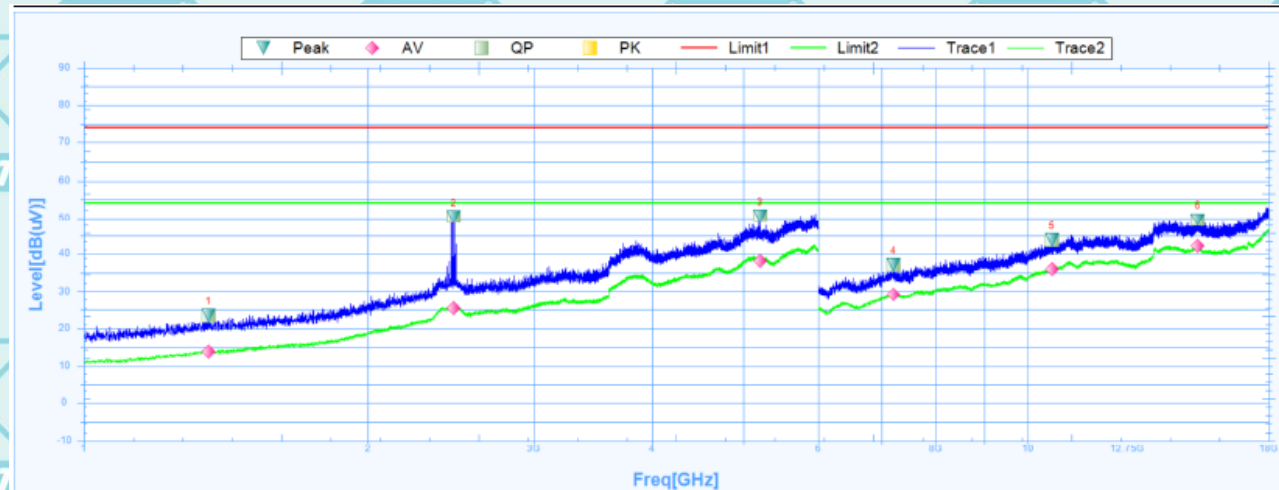

Susputed Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1355.6250	23.3	24.94	-1.64	74	-50.7	120	Horizontal	PK	Pass
1	1355.6250	13.82	24.94	-11.12	54	-40.18	120	Horizontal	AV	Pass
2	2466.2500	50.25	27.49	22.76	74	-23.75	84.2	Horizontal	PK	Pass
2	2466.2500	25.27	27.49	-2.22	54	-28.73	84.2	Horizontal	AV	Pass
3	5208.1250	50.58	31.77	18.81	74	-23.42	19	Horizontal	PK	Pass
3	5208.1250	38.09	31.77	6.32	54	-15.91	19	Horizontal	AV	Pass
4	7207.5000	37.11	6.99	30.12	74	-36.89	358.6	Horizontal	PK	Pass
4	7207.5000	29.17	6.99	22.18	54	-24.83	358.6	Horizontal	AV	Pass
5	10608.0000	43.75	14.35	29.4	74	-30.25	321.2	Horizontal	PK	Pass
5	10608.0000	36.02	14.35	21.67	54	-17.98	321.2	Horizontal	AV	Pass
6	15151.5000	49.53	19.52	30.01	74	-24.47	96.6	Horizontal	PK	Pass
6	15151.5000	42.21	19.52	22.69	54	-11.79	96.6	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500034A-BT Issued Date: 12 May 2026

Vertical:

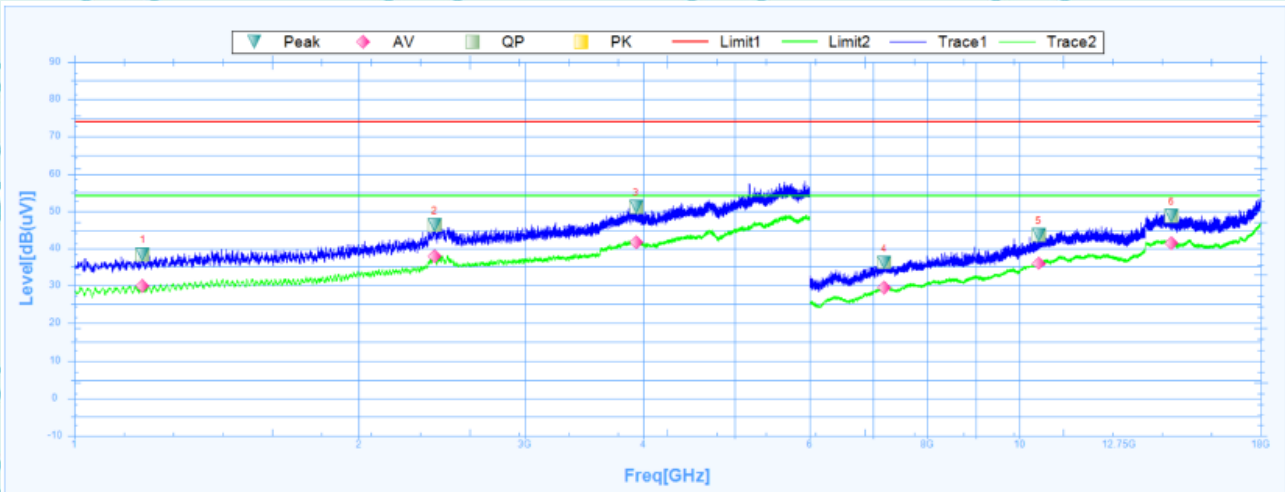


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1181.8750	38.5	24.39	14.11	74	-35.5	163.1	Vertical	PK	Pass
1	1181.8750	29.71	24.39	5.32	54	-24.29	163.1	Vertical	AV	Pass
2	2406.2500	46.41	27.28	19.13	74	-27.59	172.7	Vertical	PK	Pass
2	2406.2500	38	27.28	10.72	54	-16	172.7	Vertical	AV	Pass
3	3930.6250	51.1	29.53	21.57	74	-22.9	209.7	Vertical	PK	Pass
3	3930.6250	41.69	29.53	12.16	54	-12.31	209.7	Vertical	AV	Pass
4	7194.0000	36.26	7.01	29.25	74	-37.74	204.1	Vertical	PK	Pass
4	7194.0000	29.4	7.01	22.39	54	-24.6	204.1	Vertical	AV	Pass
5	10485.0000	43.67	13.88	29.79	74	-30.33	261.5	Vertical	PK	Pass
5	10485.0000	35.85	13.88	21.97	54	-18.15	261.5	Vertical	AV	Pass
6	14493.0000	48.73	18.63	30.1	74	-25.27	60.6	Vertical	PK	Pass
6	14493.0000	41.42	18.63	22.79	54	-12.58	60.6	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500034A-BT Issued Date: 12 May 2026


High channel: 2480MHz
Horizontal:

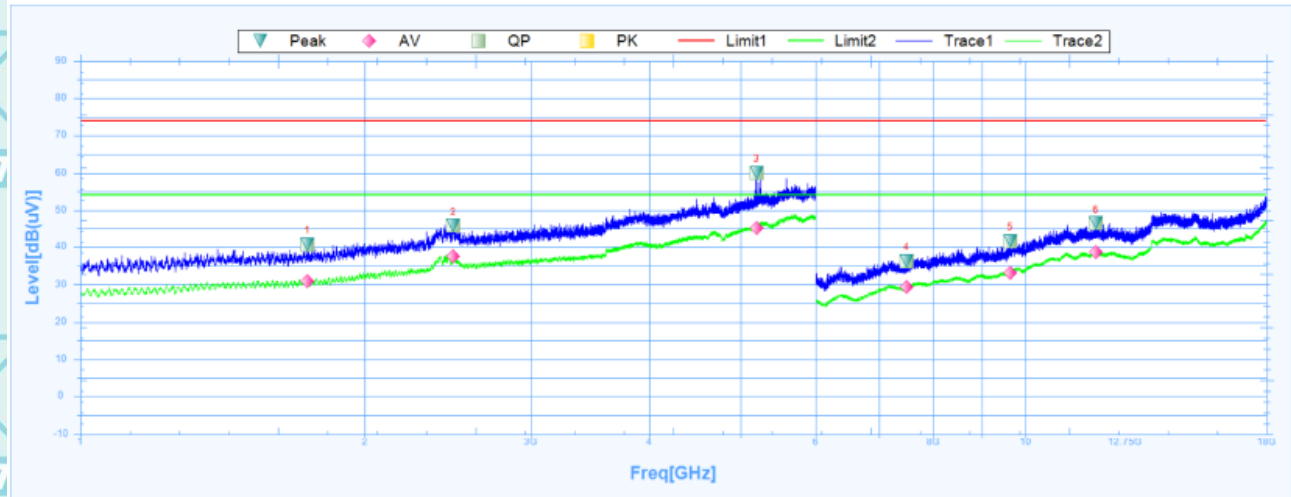

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1738.7500	40.54	24.97	15.57	74	-33.46	236	Horizontal	PK	Pass
1	1738.7500	30.86	24.97	5.89	54	-23.14	236	Horizontal	AV	Pass
2	2481.8750	45.67	27.54	18.13	74	-28.33	69.8	Horizontal	PK	Pass
2	2481.8750	37.44	27.54	9.9	54	-16.56	69.8	Horizontal	AV	Pass
3	5197.5000	59.99	31.76	28.23	74	-14.01	182.2	Horizontal	PK	Pass
3	5197.5000	45.06	31.76	13.3	54	-8.94	182.2	Horizontal	AV	Pass
4	7489.5000	36.27	7.48	28.79	74	-37.73	359.5	Horizontal	PK	Pass
4	7489.5000	29.33	7.48	21.85	54	-24.67	359.5	Horizontal	AV	Pass
5	9642.0000	41.4	11.48	29.92	74	-32.6	183.8	Horizontal	PK	Pass
5	9642.0000	33.02	11.48	21.54	54	-20.98	183.8	Horizontal	AV	Pass
6	11878.5000	46.36	16.46	29.9	74	-27.64	272.2	Horizontal	PK	Pass
6	11878.5000	38.7	16.46	22.24	54	-15.3	272.2	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500034A-BT Issued Date: 12 May 2026

Vertical:

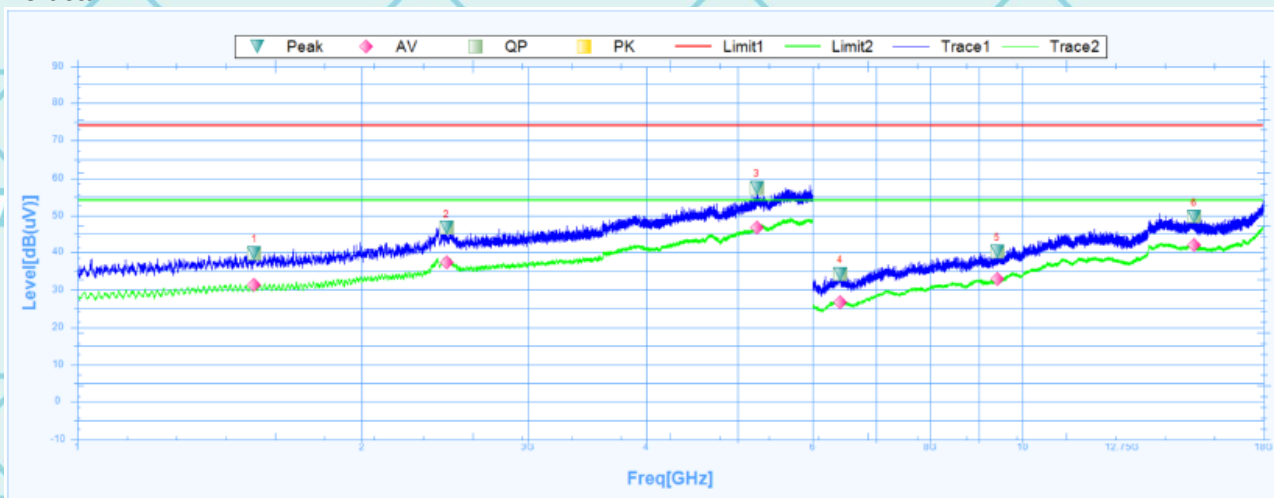

Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1539.3750	39.65	24.96	14.69	74	-34.35	97.2	Vertical	PK	Pass
1	1539.3750	31.43	24.96	6.47	54	-22.57	97.2	Vertical	AV	Pass
2	2458.1250	46.46	27.46	19	74	-27.54	51.8	Vertical	PK	Pass
2	2458.1250	37.31	27.46	9.85	54	-16.69	51.8	Vertical	AV	Pass
3	5236.2500	57.34	31.79	25.55	74	-16.66	44.6	Vertical	PK	Pass
3	5236.2500	46.66	31.79	14.87	54	-7.34	44.6	Vertical	AV	Pass
4	6414.0000	34.14	4.58	29.56	74	-39.86	359.5	Vertical	PK	Pass
4	6414.0000	26.77	4.58	22.19	54	-27.23	359.5	Vertical	AV	Pass
5	9405.0000	40.17	10.82	29.35	74	-33.83	241.1	Vertical	PK	Pass
5	9405.0000	32.76	10.82	21.94	54	-21.24	241.1	Vertical	AV	Pass
6	15195.0000	49.69	19.19	30.5	74	-24.31	28.3	Vertical	PK	Pass
6	15195.0000	41.97	19.19	22.78	54	-12.03	28.3	Vertical	AV	Pass

Note:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
- EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

Report No.: WSCT-ANAB-R&E260500034A-BT Issued Date: 12 May 2026


6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below

GFSK


Low channel

Horizontal:

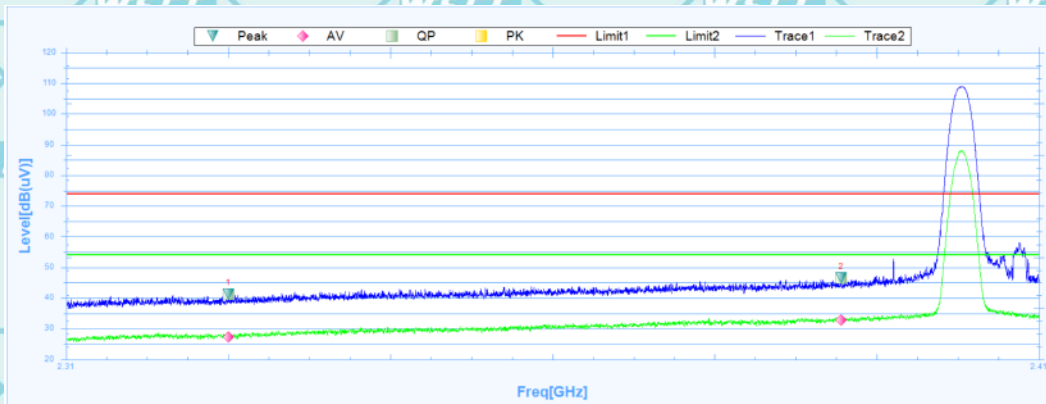

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2326.6500	41.23	13.91	27.32	74	-32.77	202.6	Horizontal	PK	Pass
1	2326.6500	27.31	13.91	13.4	54	-26.69	202.6	Horizontal	AV	Pass
2	2389.6750	46.61	18.73	27.88	74	-27.39	3.1	Horizontal	PK	Pass
2	2389.6750	32.79	18.73	14.06	54	-21.21	3.1	Horizontal	AV	Pass


Vertical:

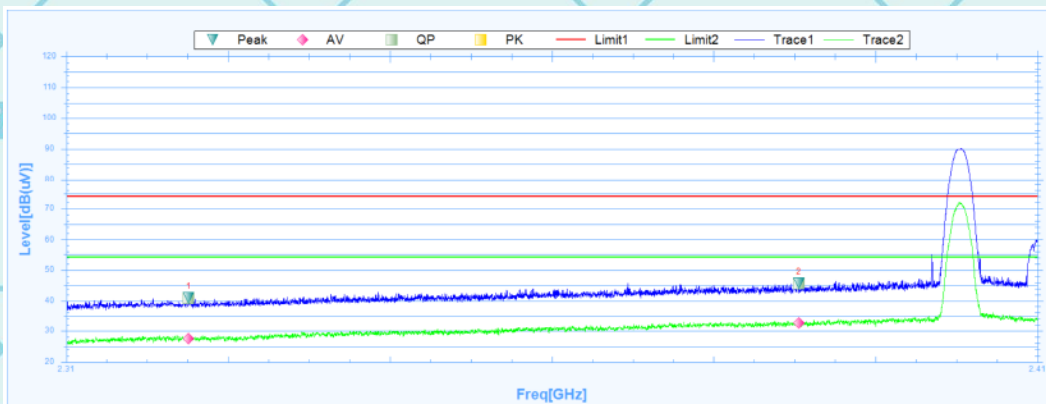

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2322.6125	40.89	13.6	27.29	74	-33.11	188.5	Vertical	PK	Pass
1	2322.6125	27.51	13.6	13.91	54	-26.49	188.5	Vertical	AV	Pass
2	2385.4375	45.59	18.4	27.19	74	-28.41	-0.1	Vertical	PK	Pass
2	2385.4375	32.61	18.4	14.21	54	-21.39	-0.1	Vertical	AV	Pass


Report No.: WSCT-ANAB-R&E260500034A-BT Issued Date: 12 May 2026

High channel
Horizontal:

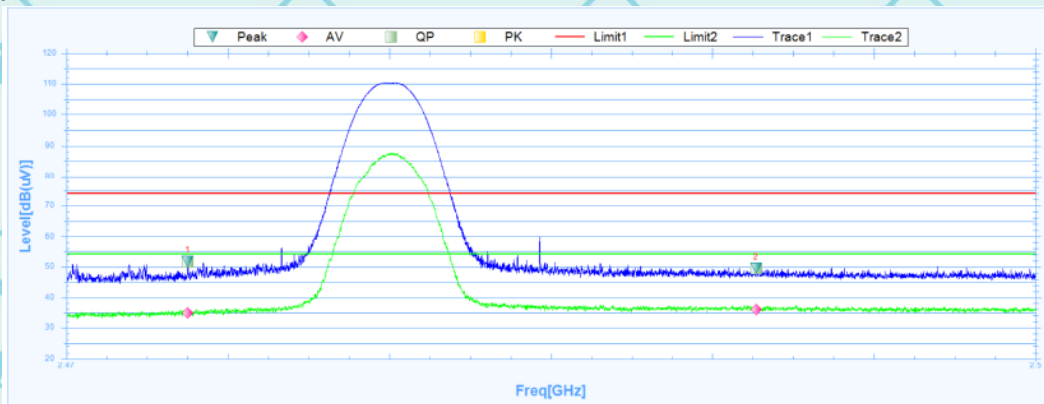

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2473.7575	51.69	19.52	32.17	74	-22.31	134.2	Horizontal	PK	Pass
1	2473.7575	34.74	19.52	15.22	54	-19.26	134.2	Horizontal	AV	Pass
2	2491.3488	49.43	21.47	27.96	74	-24.57	330.2	Horizontal	PK	Pass
2	2491.3488	35.83	21.47	14.36	54	-18.17	330.2	Horizontal	AV	Pass

Vertical:

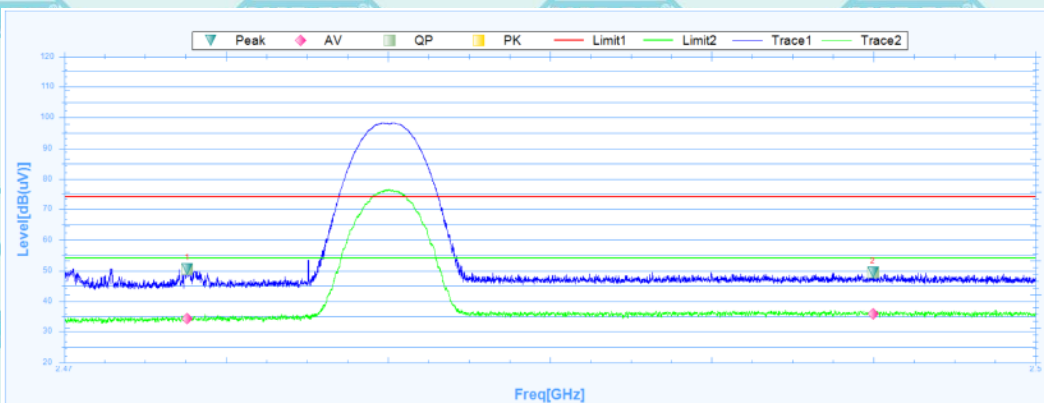

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2473.7988	50.42	19.52	30.9	74	-23.58	298.6	Vertical	PK	Pass
1	2473.7988	34.15	19.52	14.63	54	-19.85	298.6	Vertical	AV	Pass
2	2494.9788	49.33	21.48	27.85	74	-24.67	4.1	Vertical	PK	Pass
2	2494.9788	35.59	21.48	14.11	54	-18.41	4.1	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz
 Reading level (dBμV) = Receiver reading
 Corr. Factor (dB) = Attenuation factor + Cable loss
 Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)
 Limit (dBμV) = Limit stated in standard
 Margin (dB) = Level (dBμV) – Limits (dBμV)

Report No.: WSCT-ANAB-R&E260500034A-BT Issued Date: 12 May 2026

7. Test Setup Photographs

Please refer to Annex "Test Setup photos-15C" for test setup photos

*******END OF REPORT*******