




-26dB Bandwidth NVNT a 5500MHz Ant1

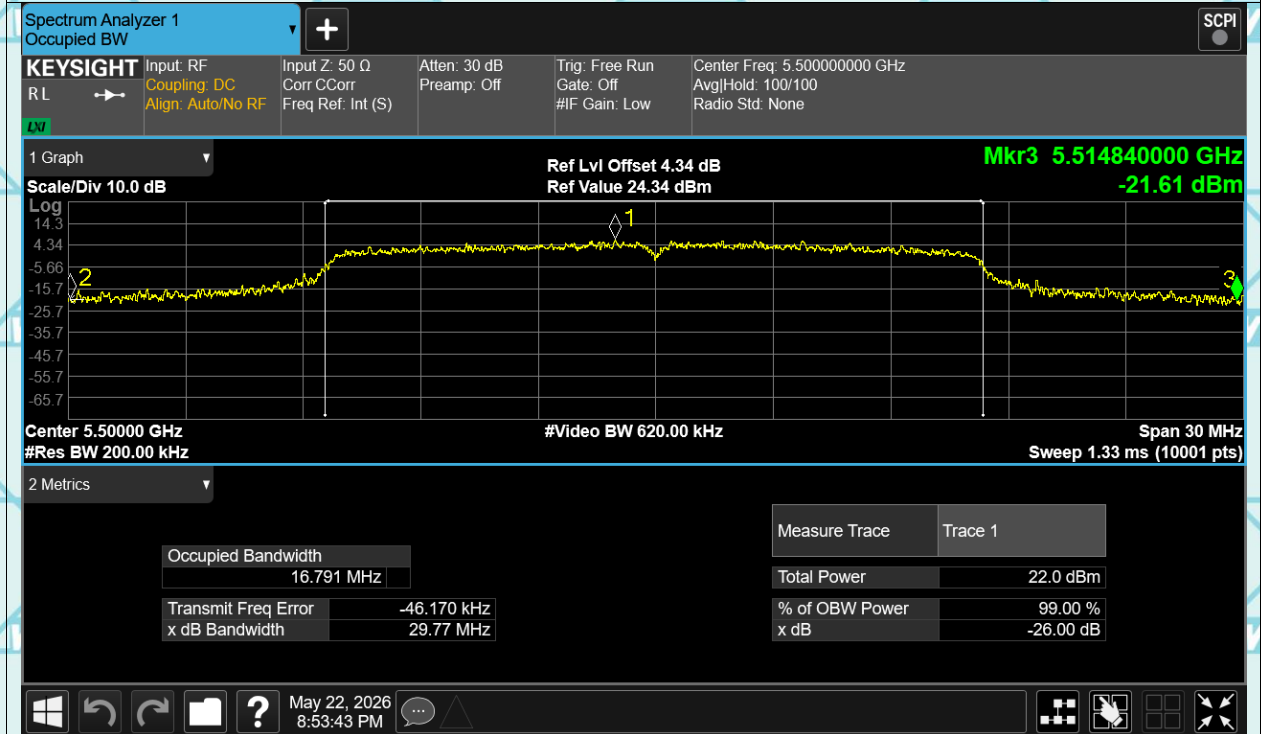


-26dB Bandwidth NVNT a 5700MHz Ant1

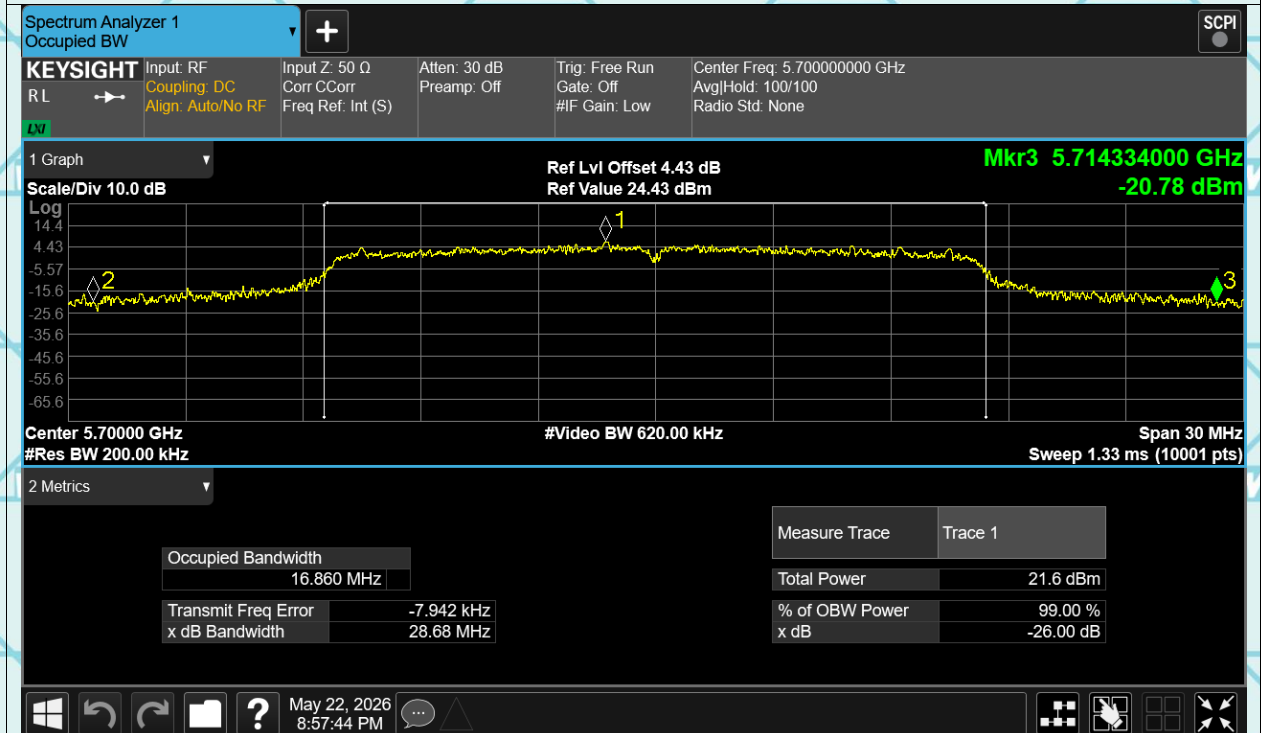


-26dB Bandwidth NVNT n20 5180MHz Ant1

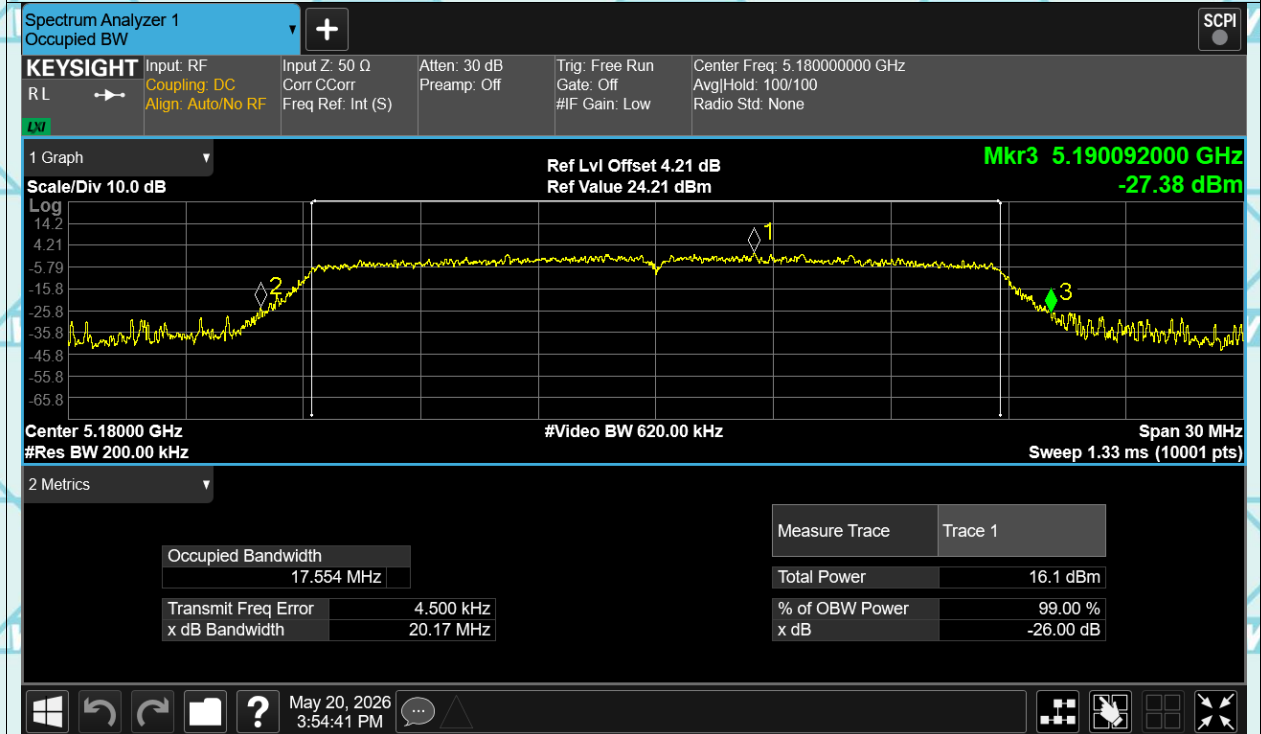


-26dB Bandwidth NVNT n20 5240MHz Ant1


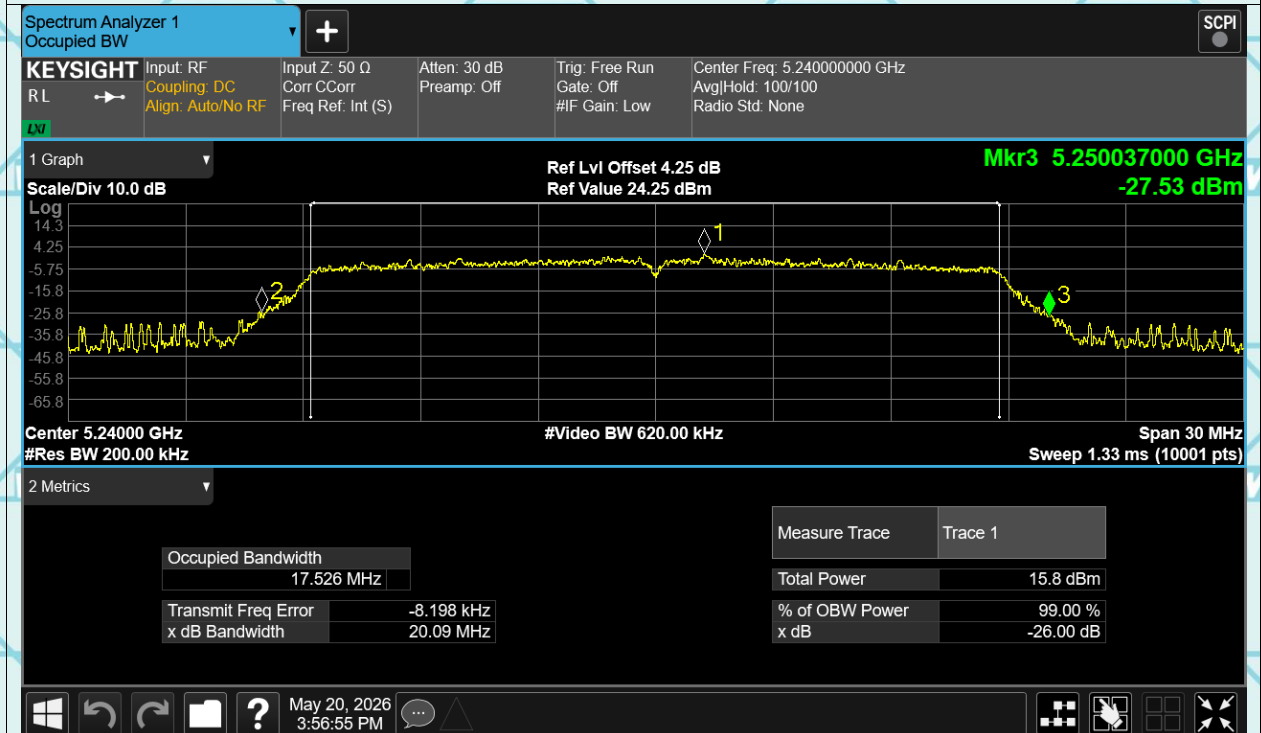


-26dB Bandwidth NVNT n20 5260MHz Ant1

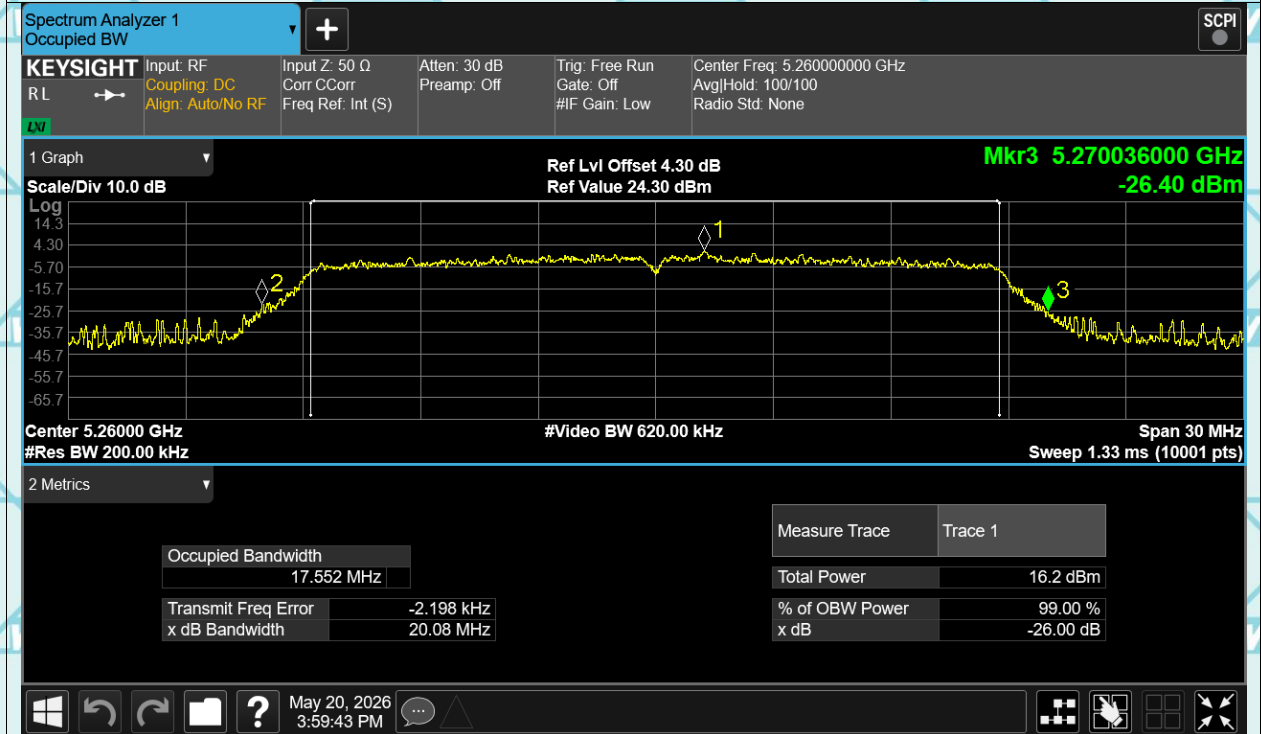


-26dB Bandwidth NVNT n20 5320MHz Ant1

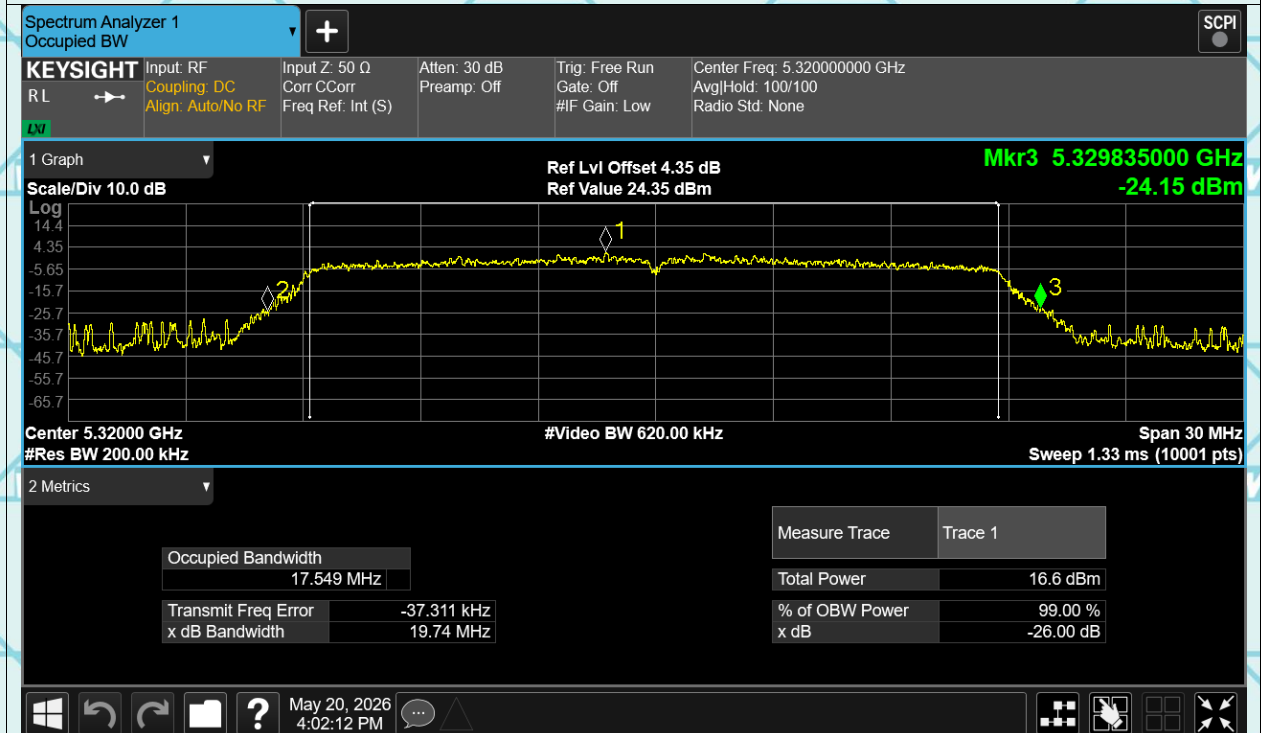


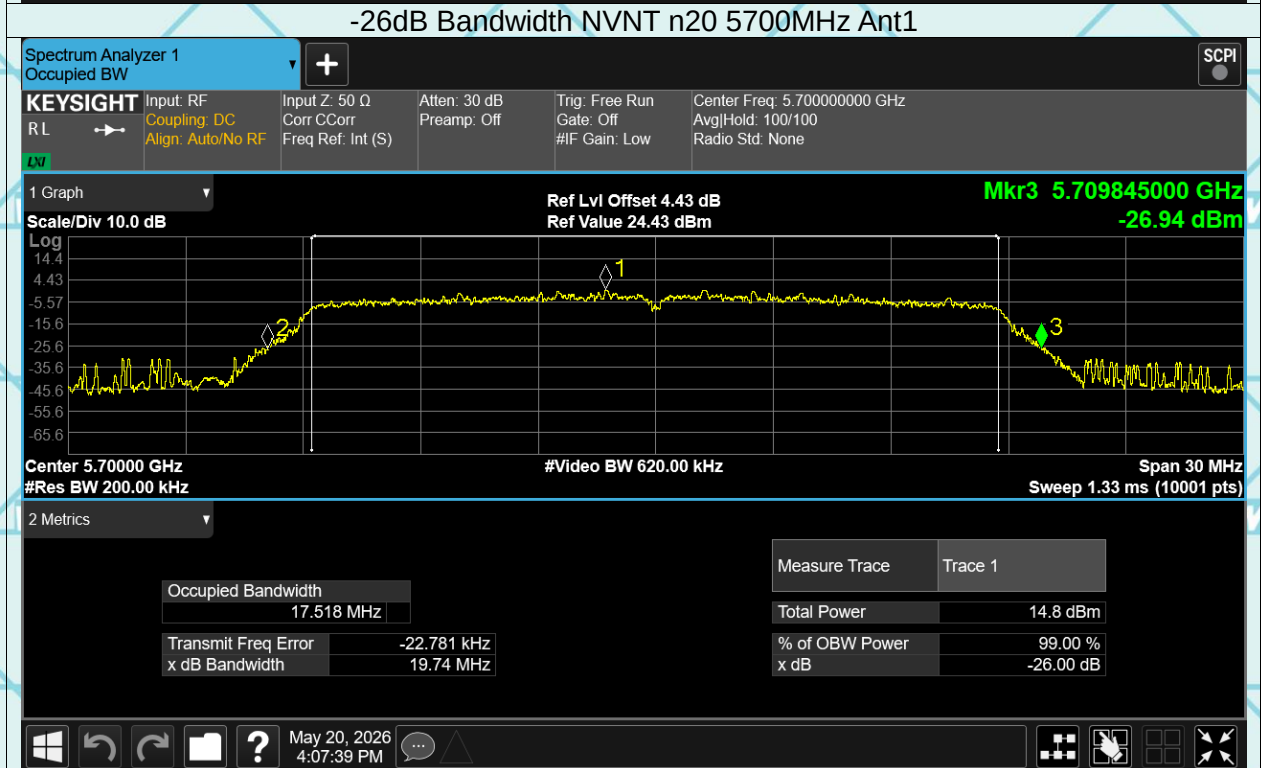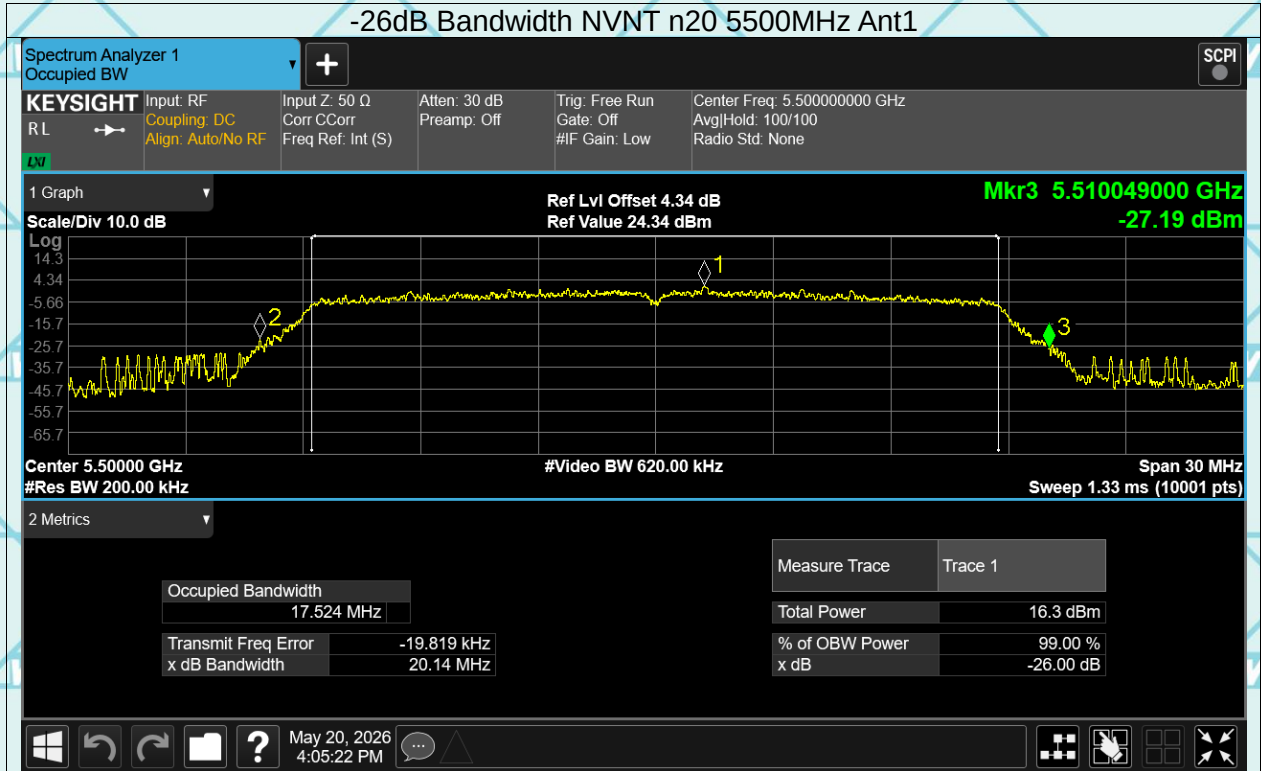


-26dB Bandwidth NVNT n40 5190MHz Ant1

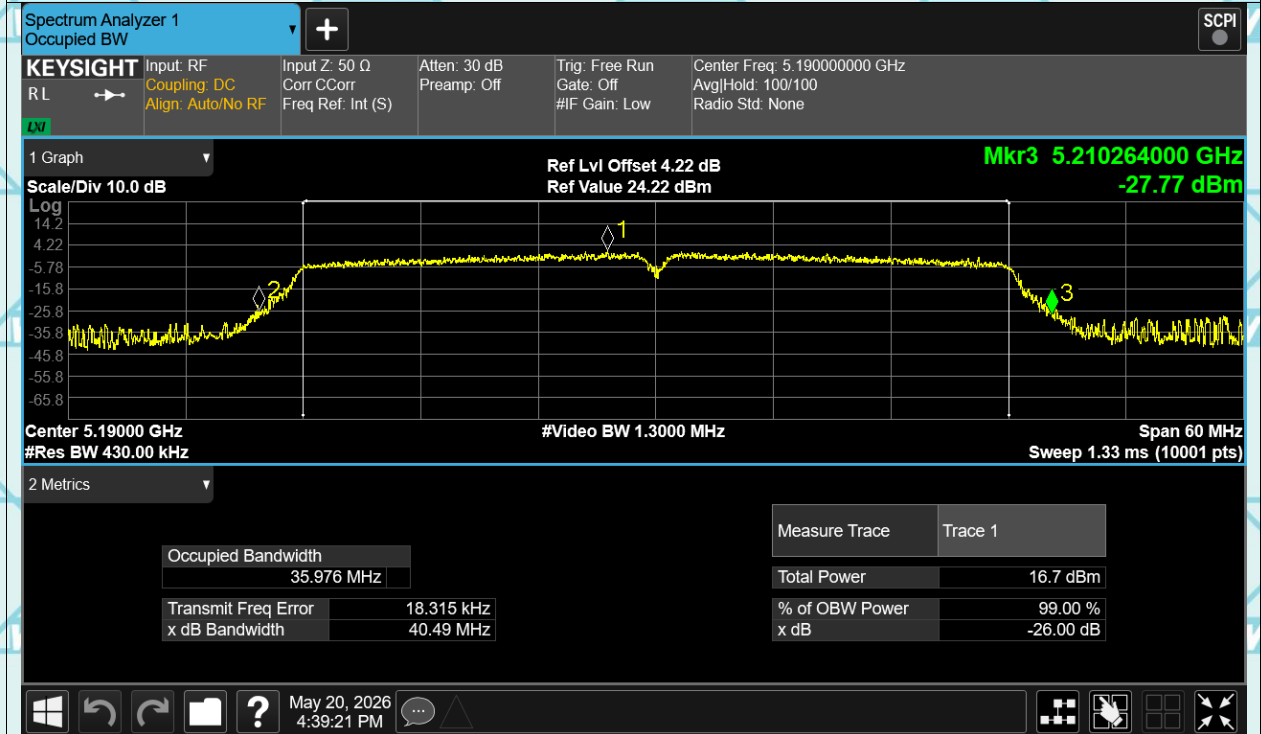


-26dB Bandwidth NVNT n40 5230MHz Ant1

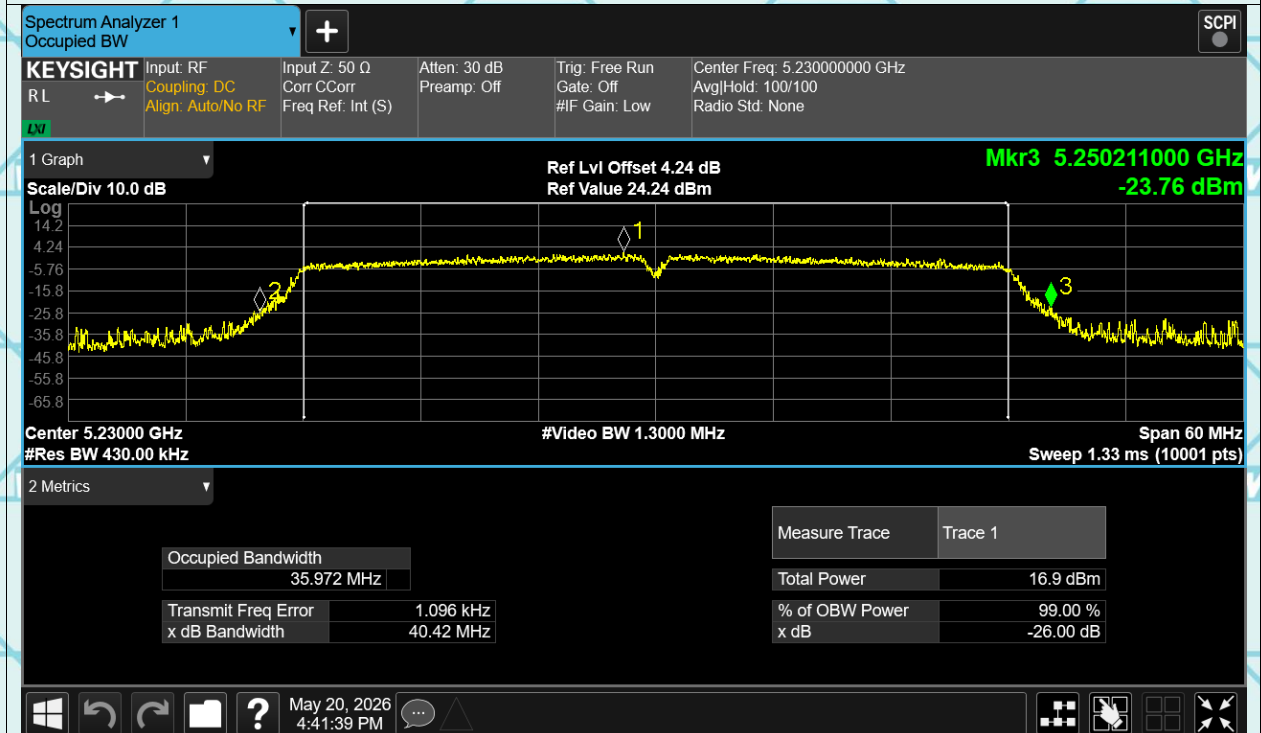


-26dB Bandwidth NVNT n40 5270MHz Ant1

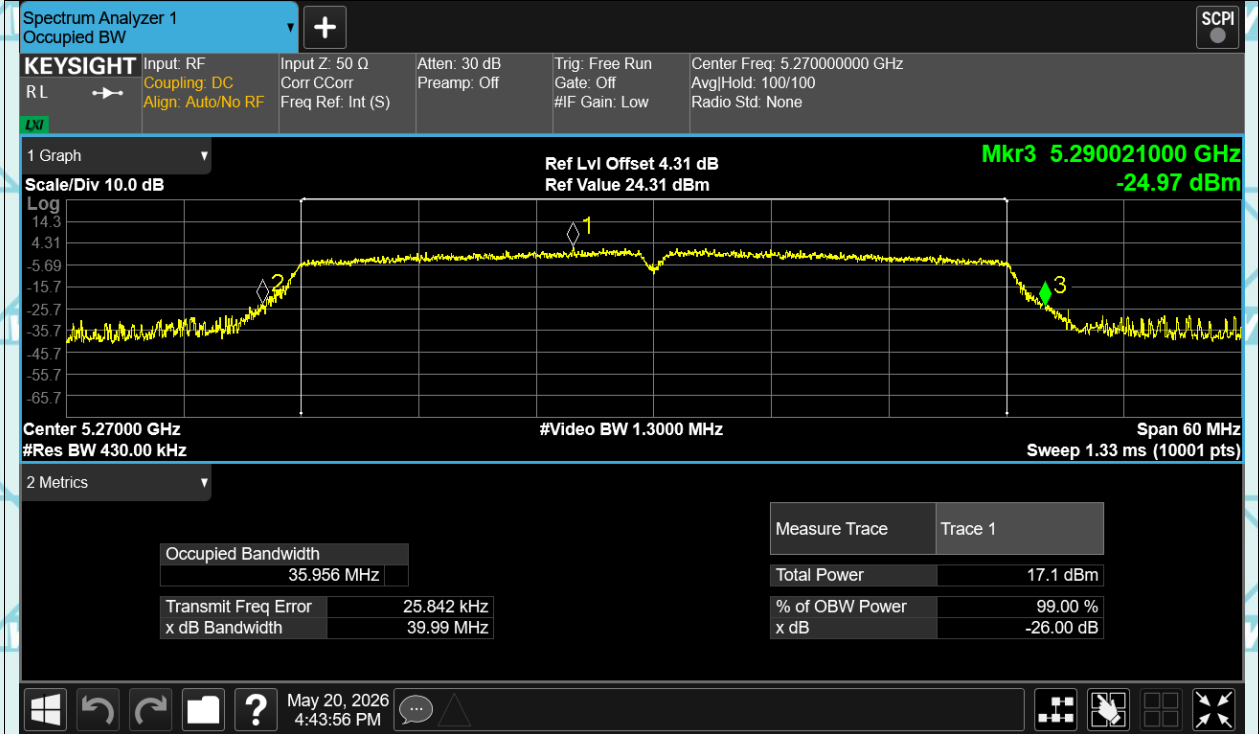


-26dB Bandwidth NVNT n40 5310MHz Ant1

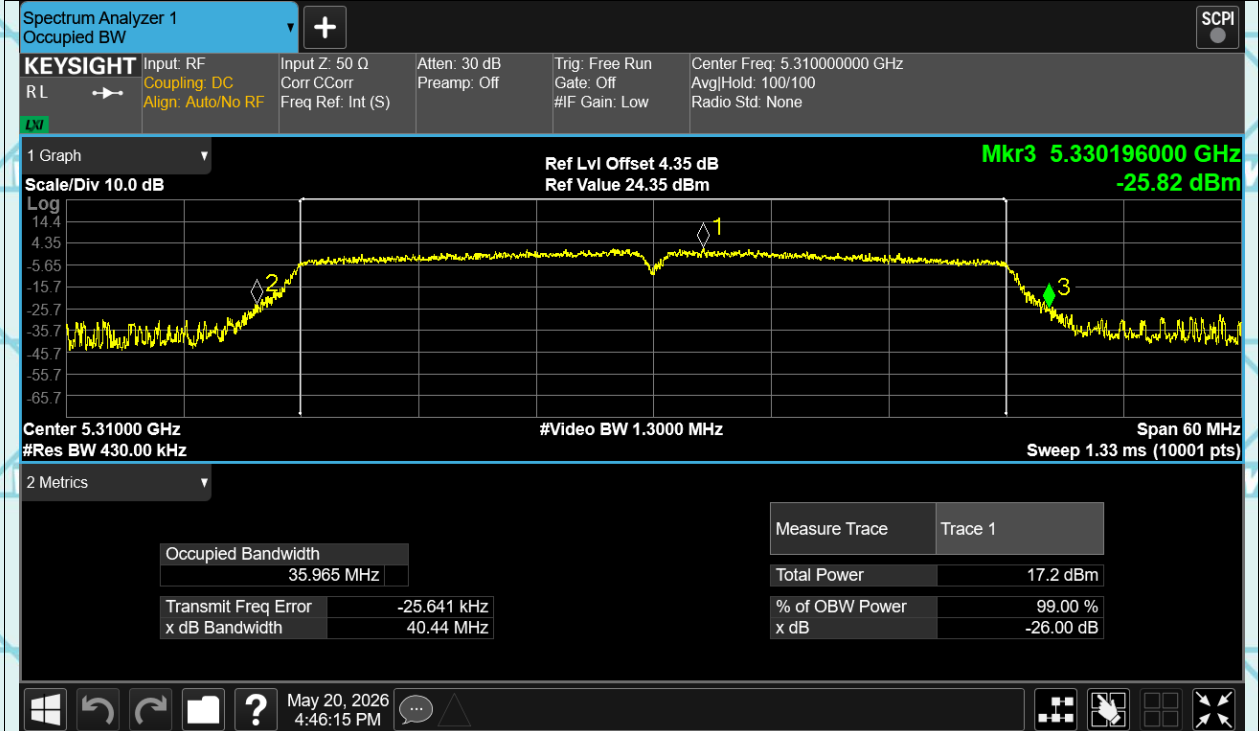


-26dB Bandwidth NVNT n40 5510MHz Ant1

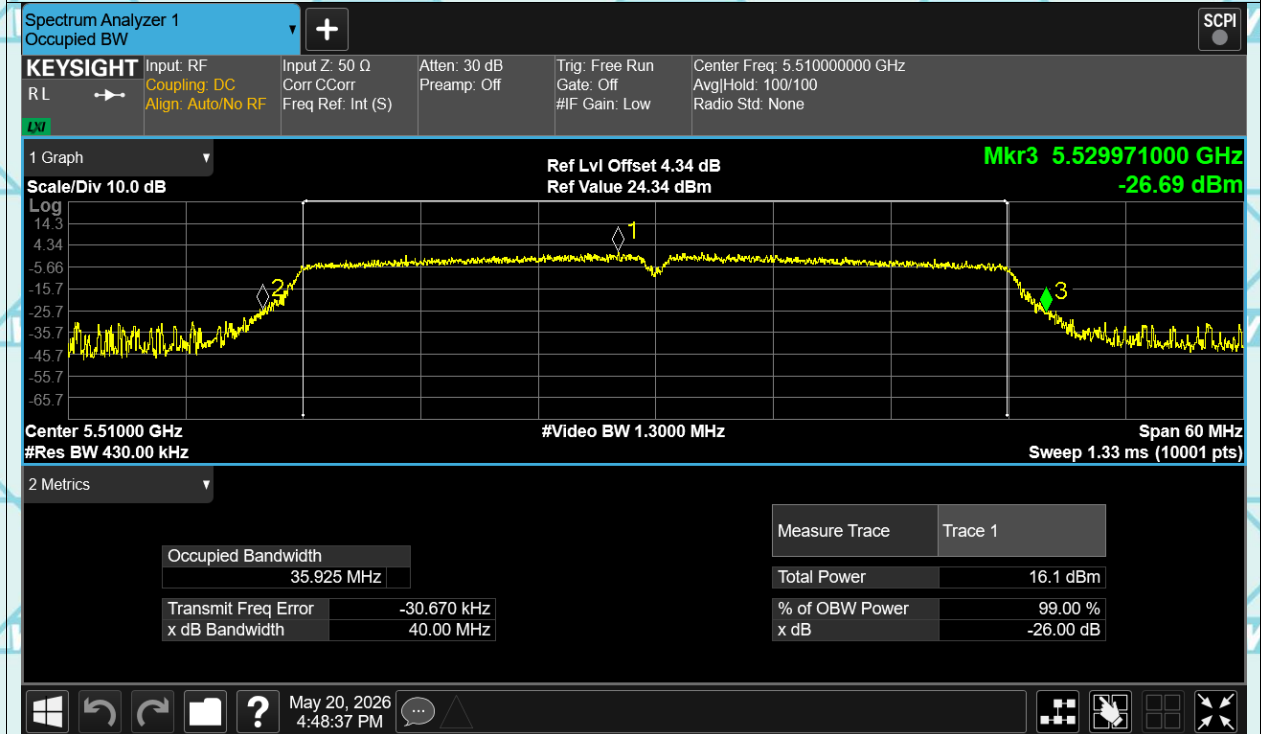


-26dB Bandwidth NVNT n40 5670MHz Ant1

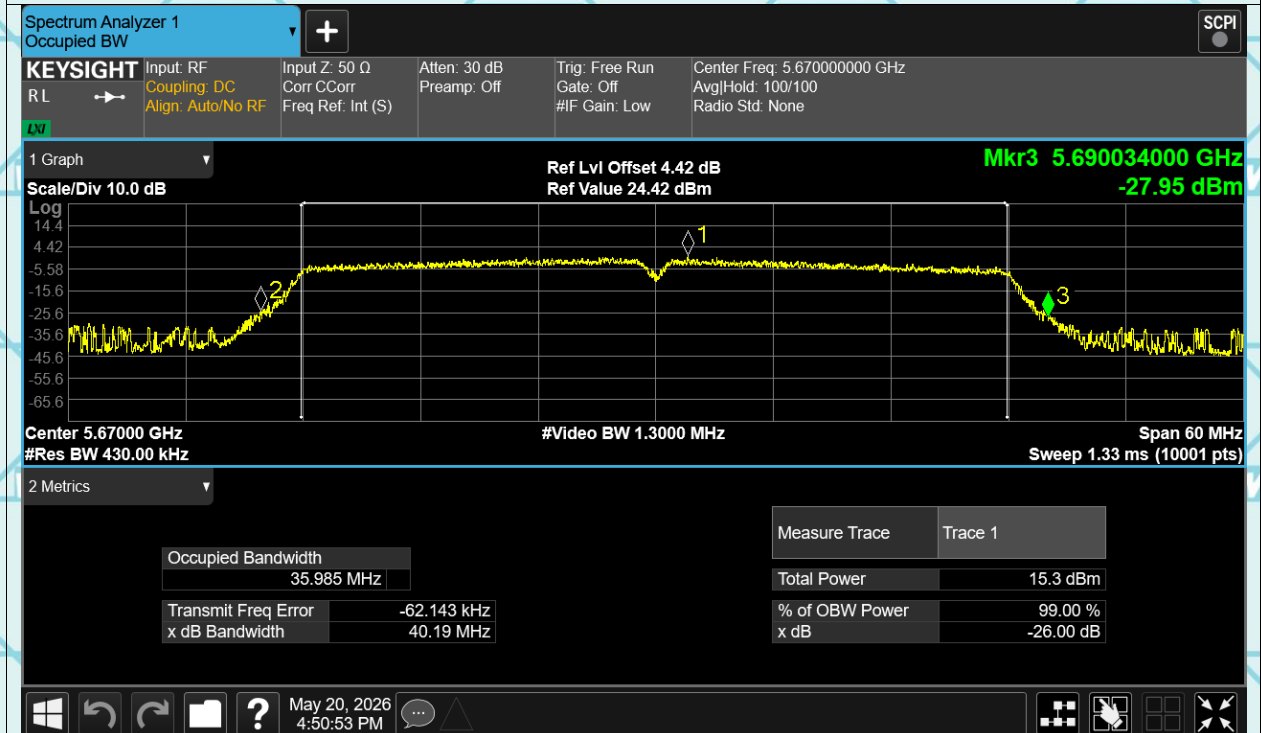


-26dB Bandwidth NVNT ac20 5180MHz Ant1

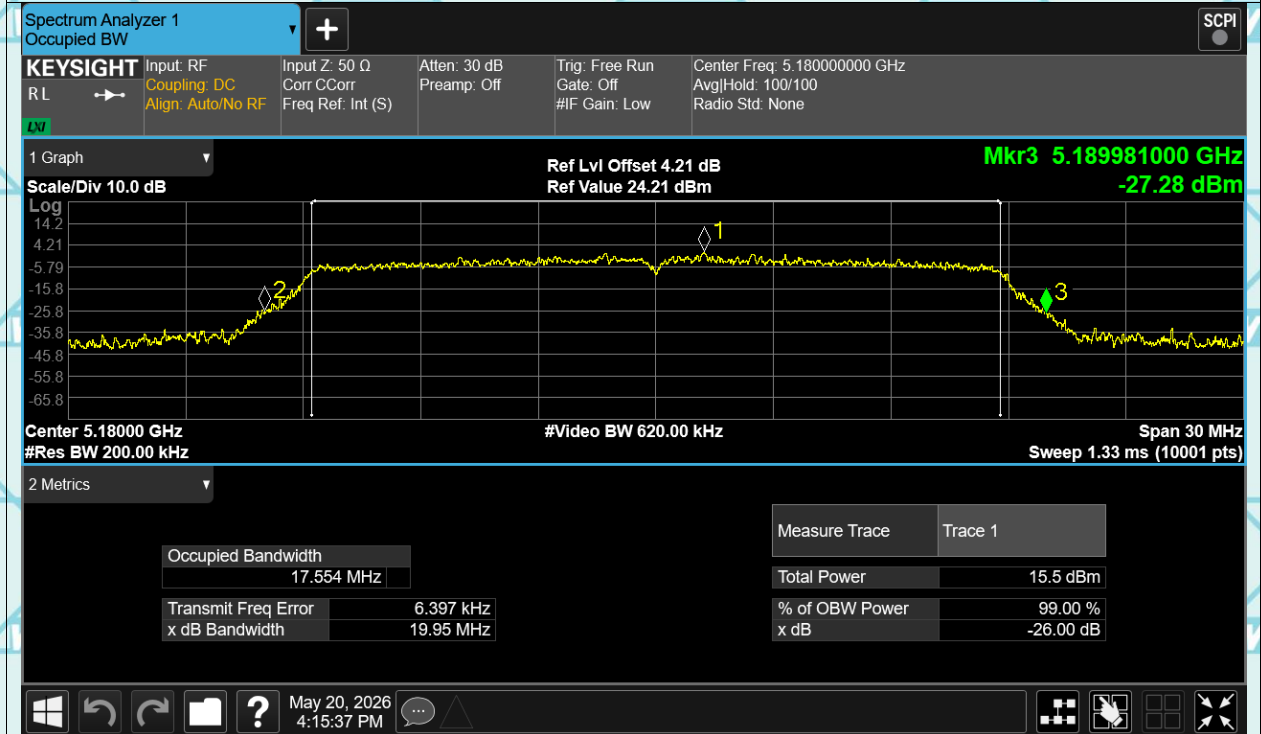


-26dB Bandwidth NVNT ac20 5240MHz Ant1

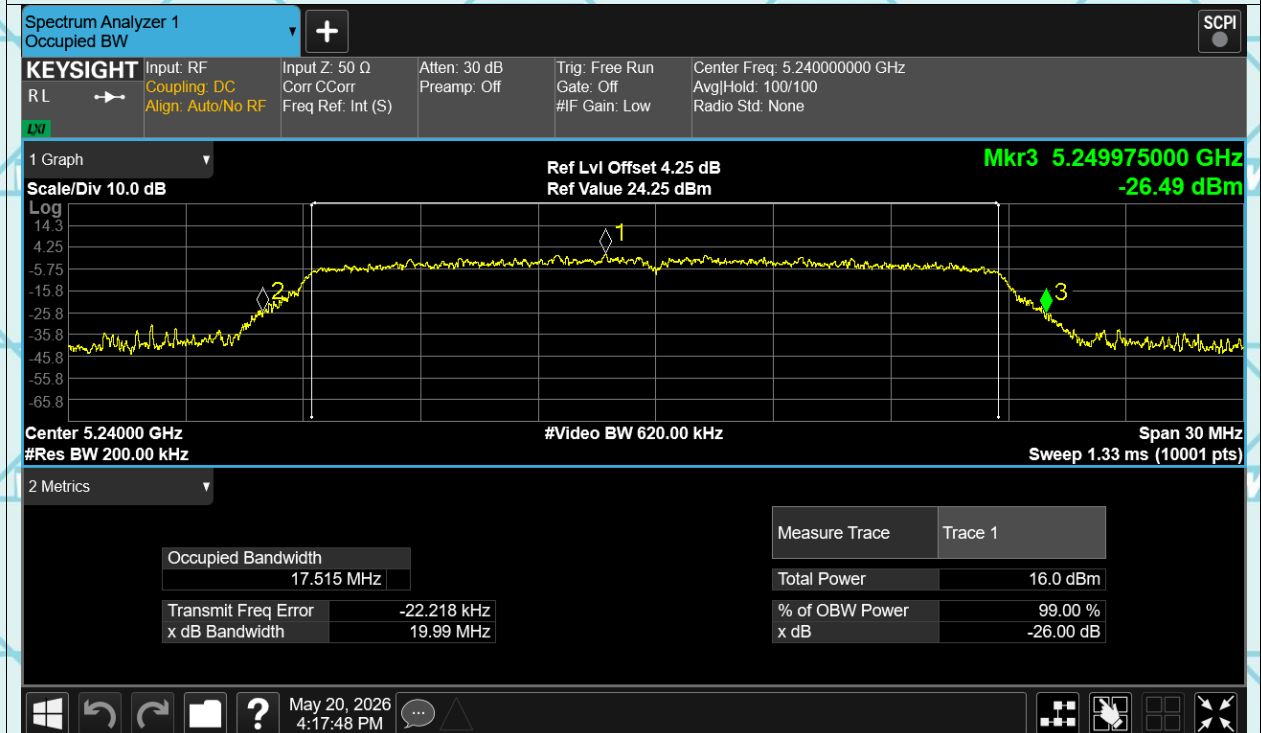


-26dB Bandwidth NVNT ac20 5260MHz Ant1

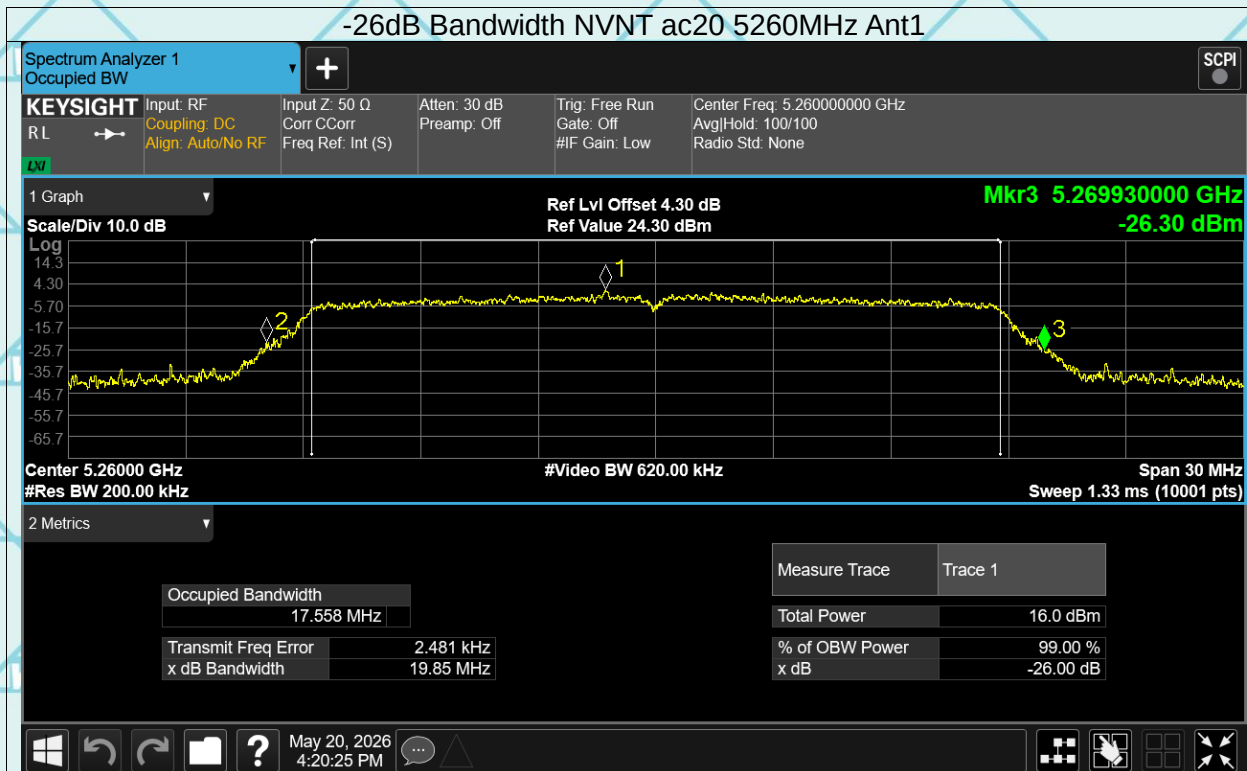


-26dB Bandwidth NVNT ac20 5320MHz Ant1

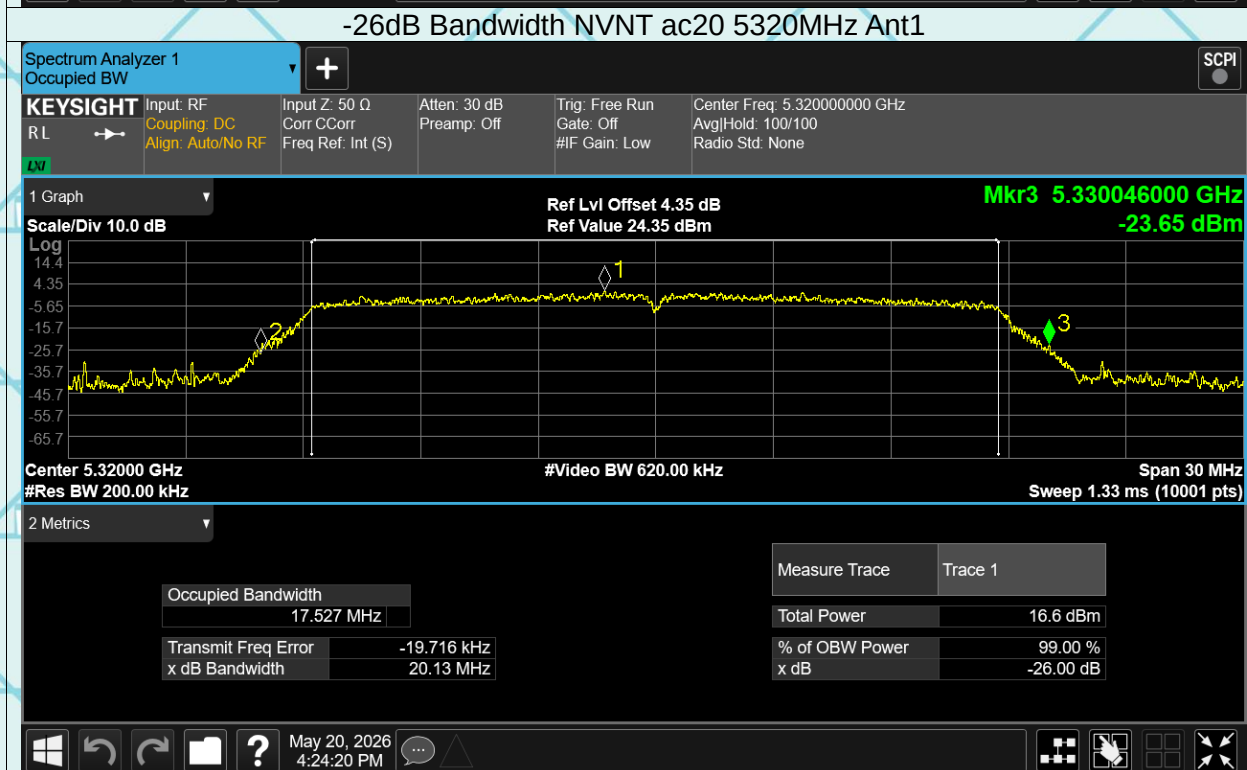


-26dB Bandwidth NVNT ac20 5500MHz Ant1

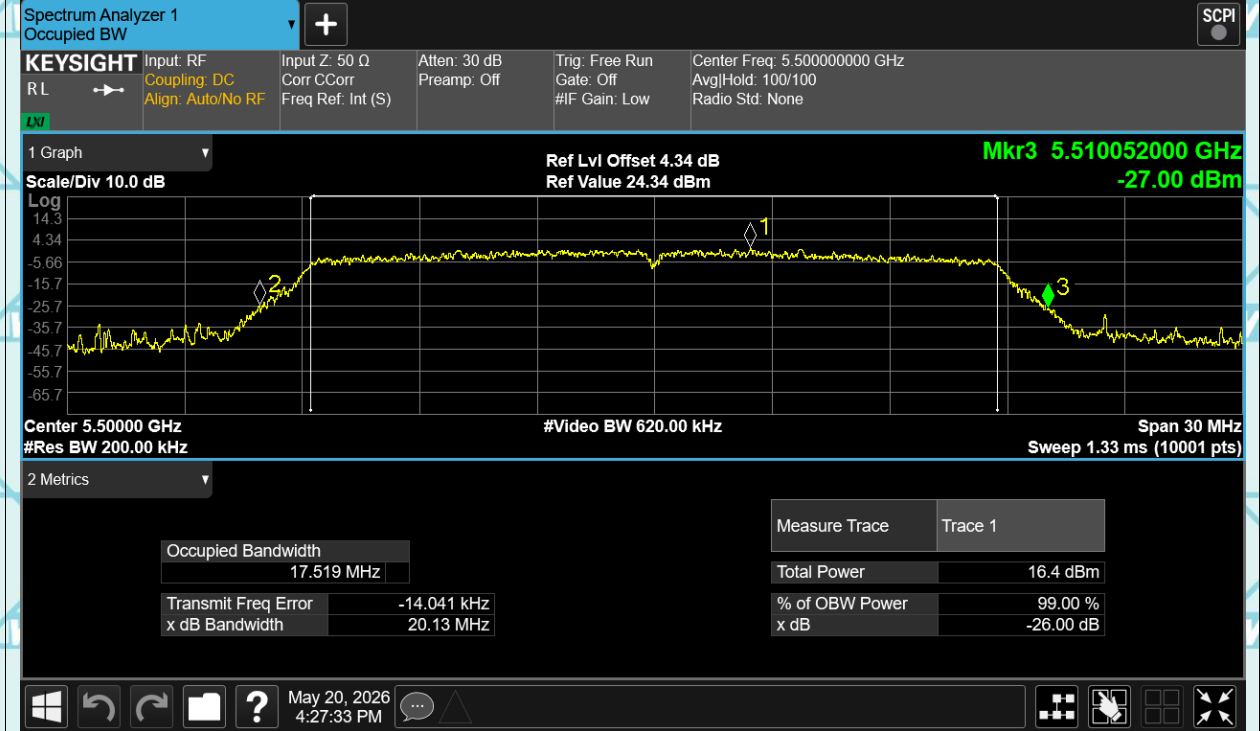


-26dB Bandwidth NVNT ac20 5700MHz Ant1

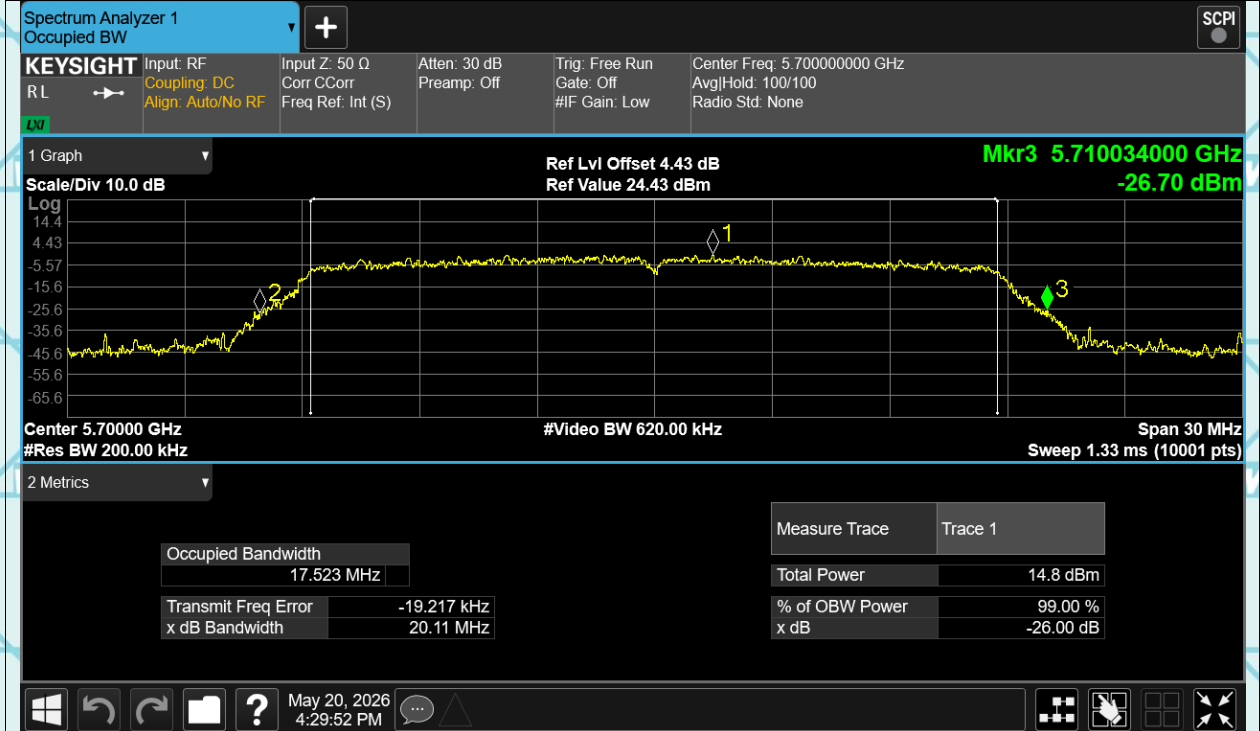


-26dB Bandwidth NVNT ac40 5190MHz Ant1

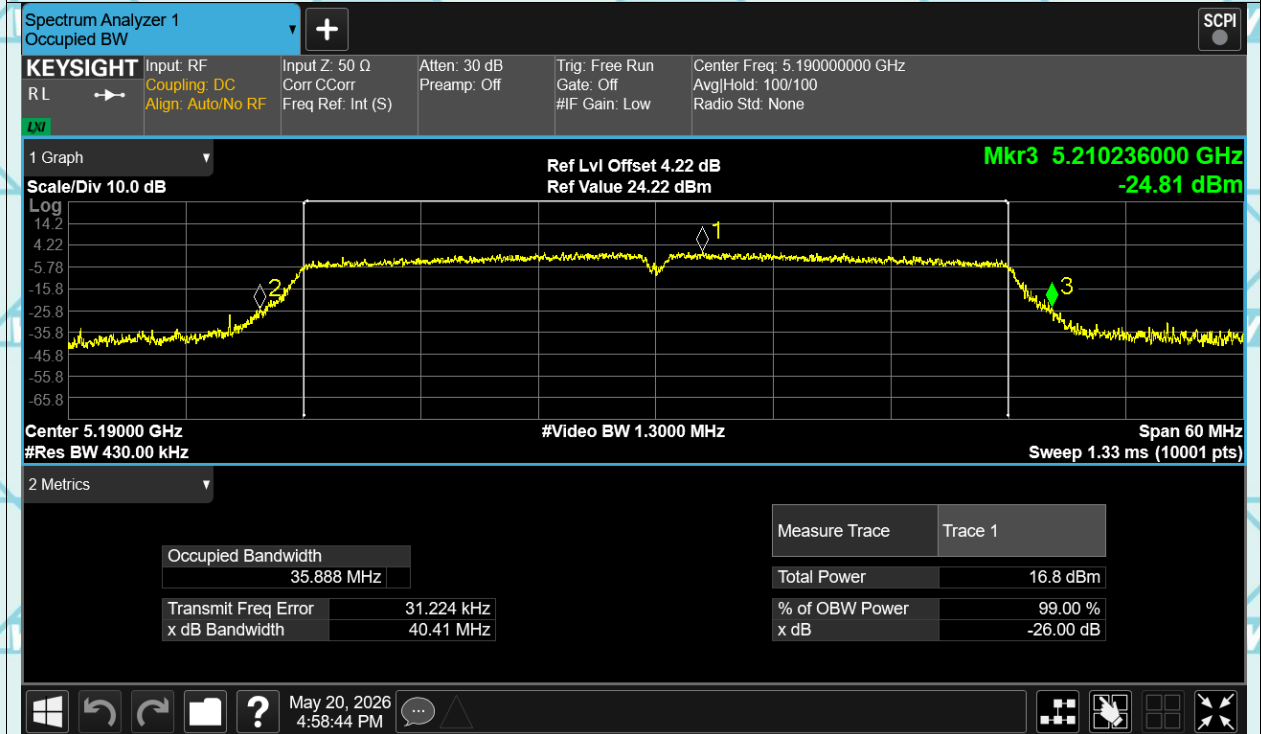


-26dB Bandwidth NVNT ac40 5230MHz Ant1

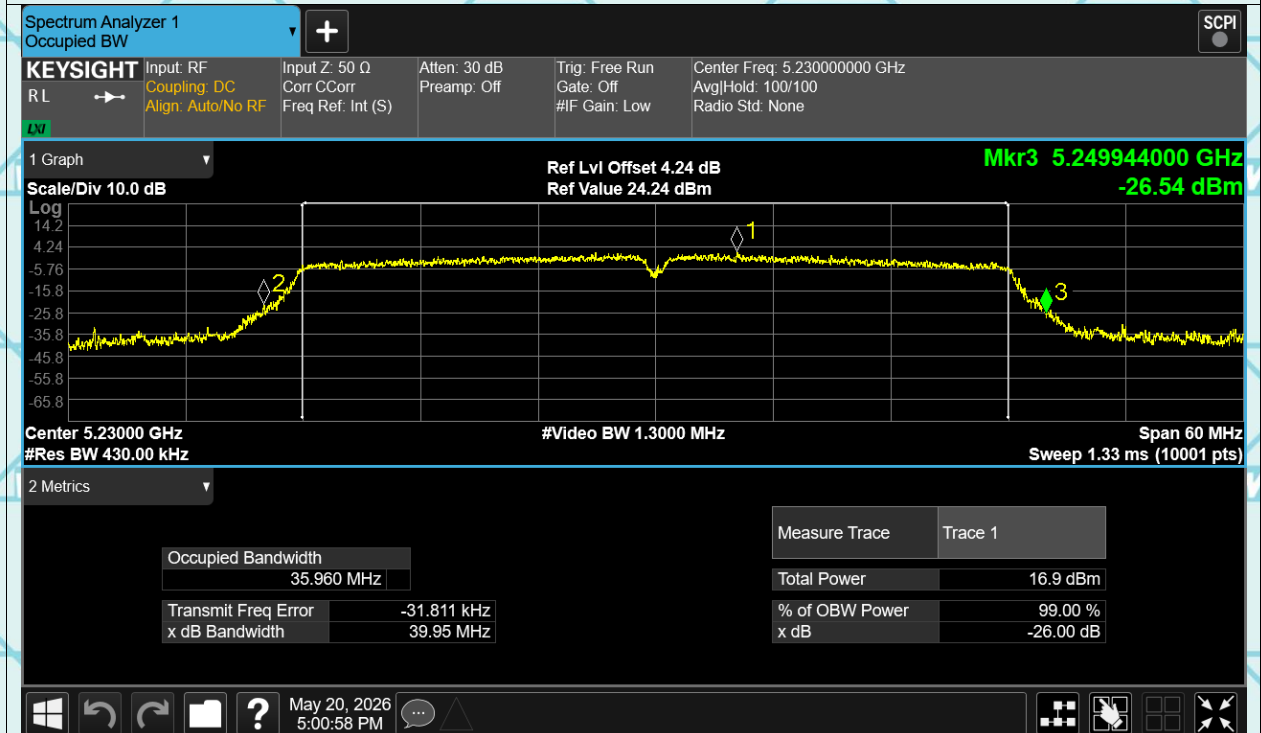


-26dB Bandwidth NVNT ac40 5270MHz Ant1

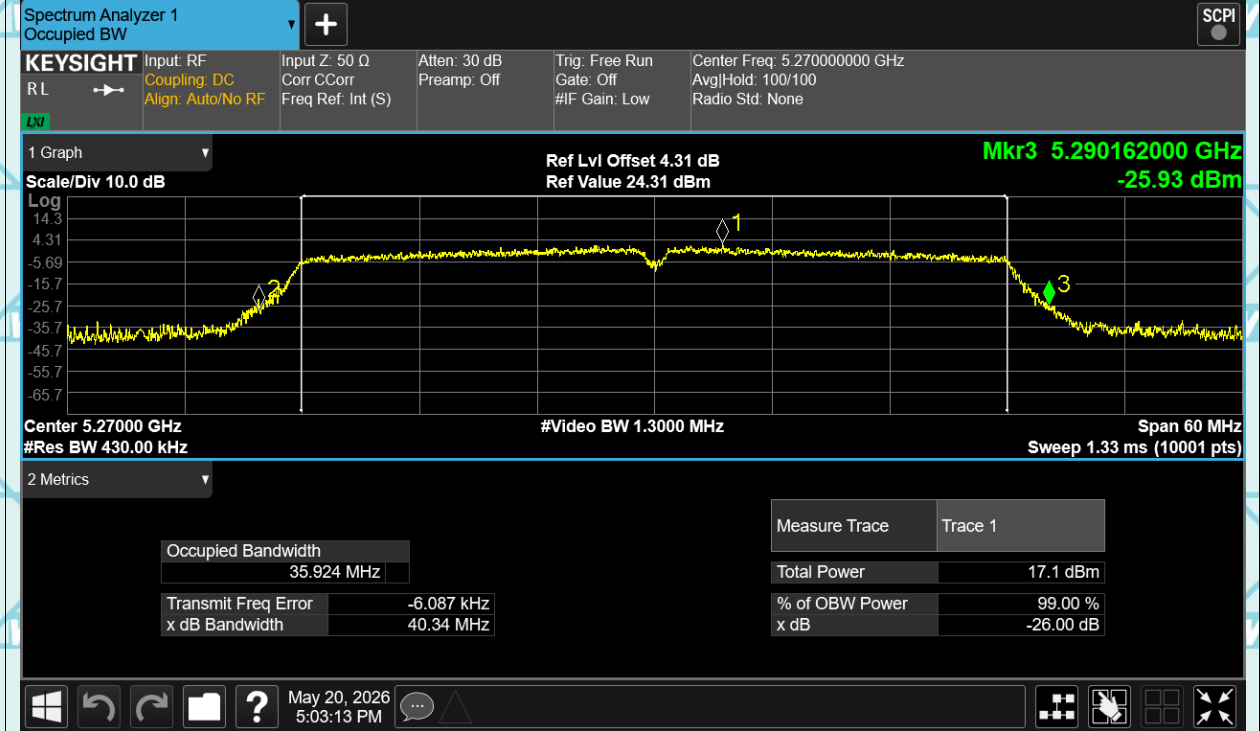


-26dB Bandwidth NVNT ac40 5310MHz Ant1

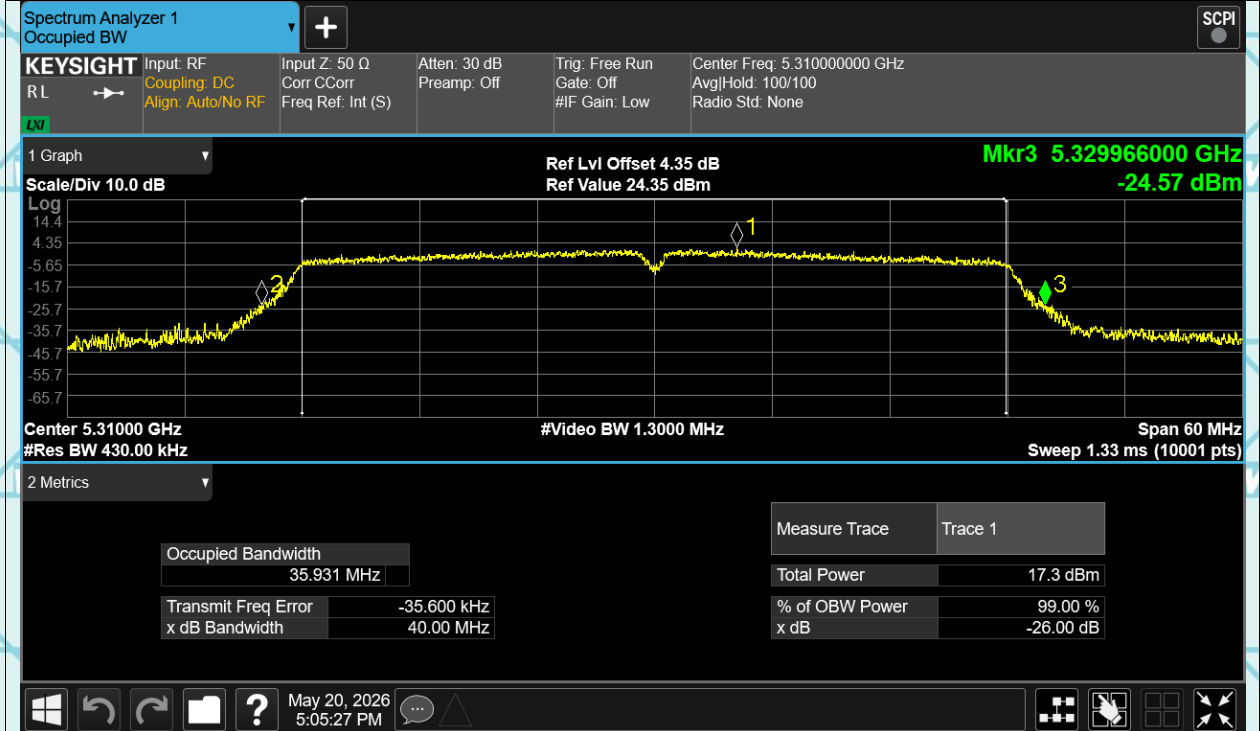


-26dB Bandwidth NVNT ac40 5510MHz Ant1

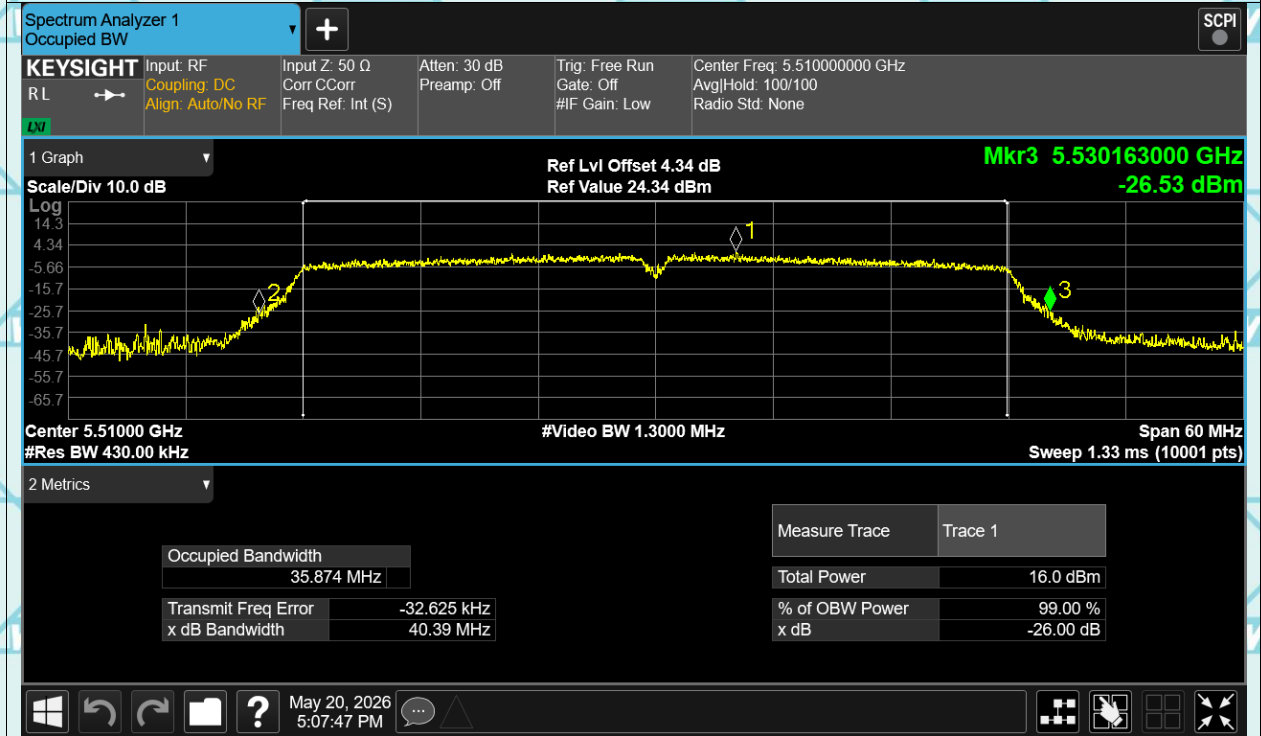


-26dB Bandwidth NVNT ac40 5670MHz Ant1

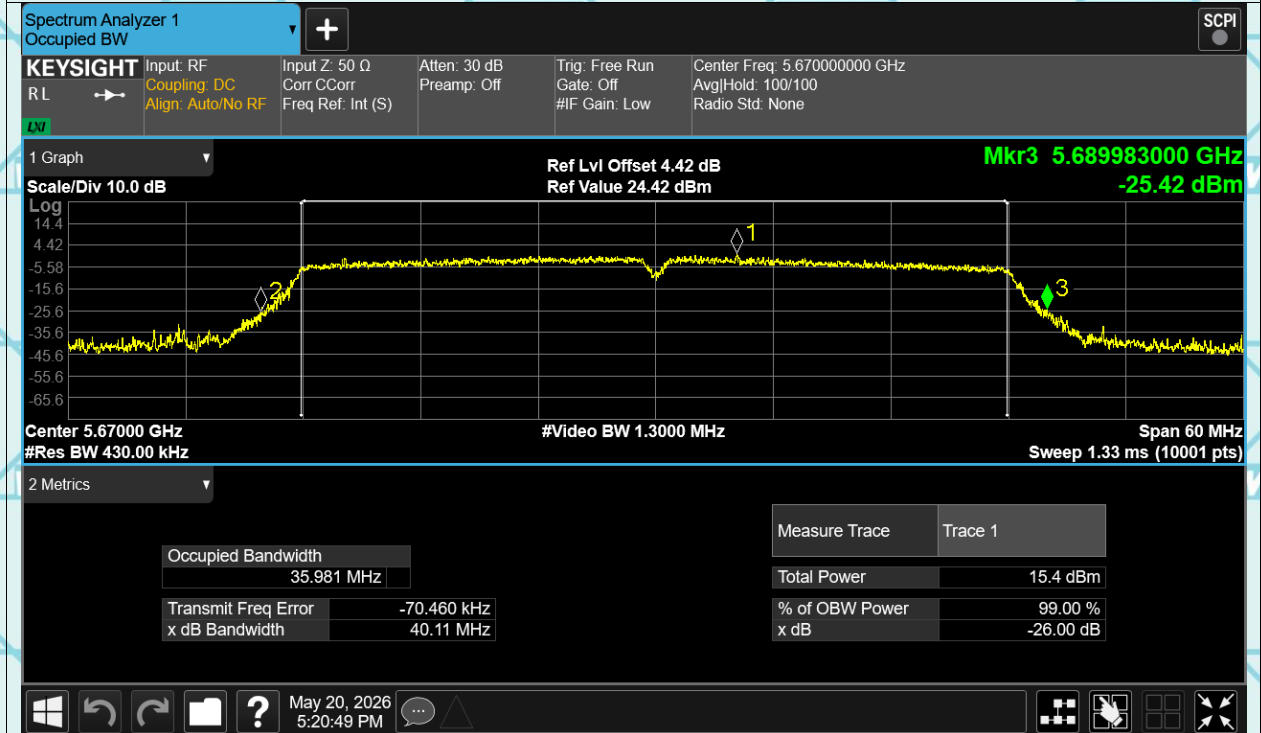


-26dB Bandwidth NVNT ac80 5210MHz Ant1

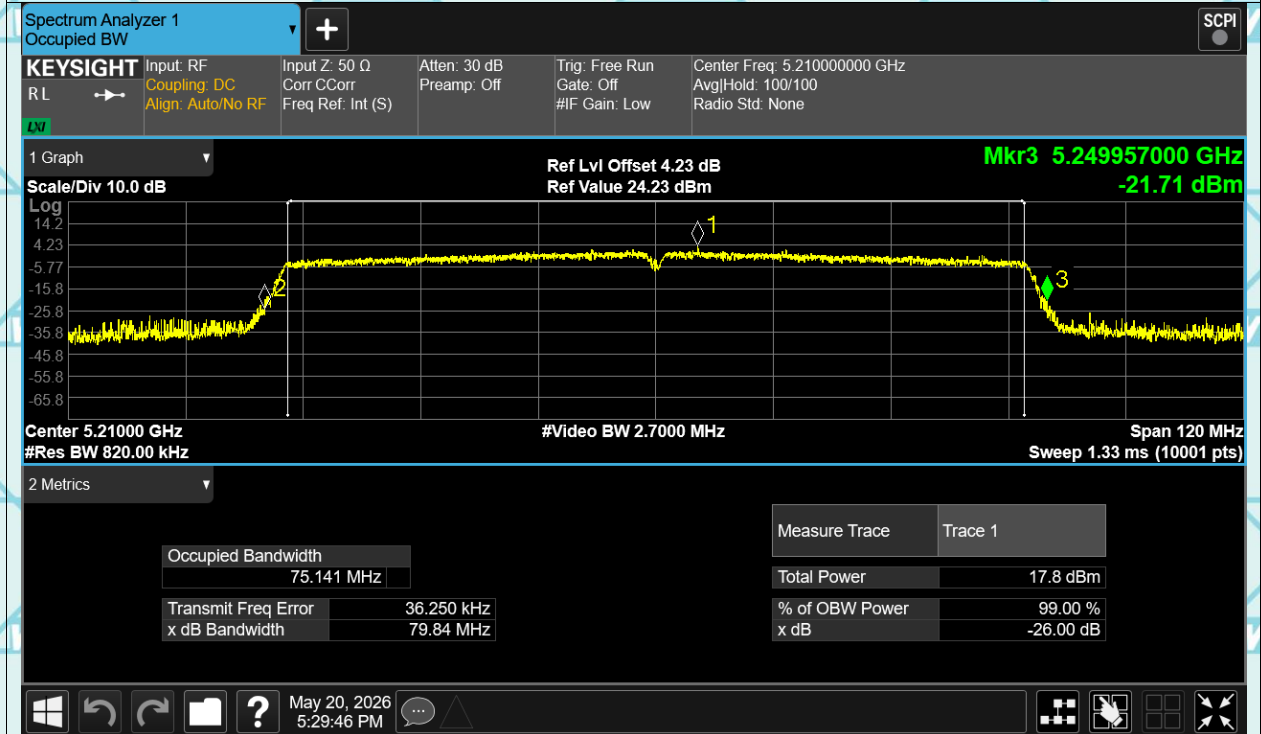


-26dB Bandwidth NVNT ac80 5290MHz Ant1

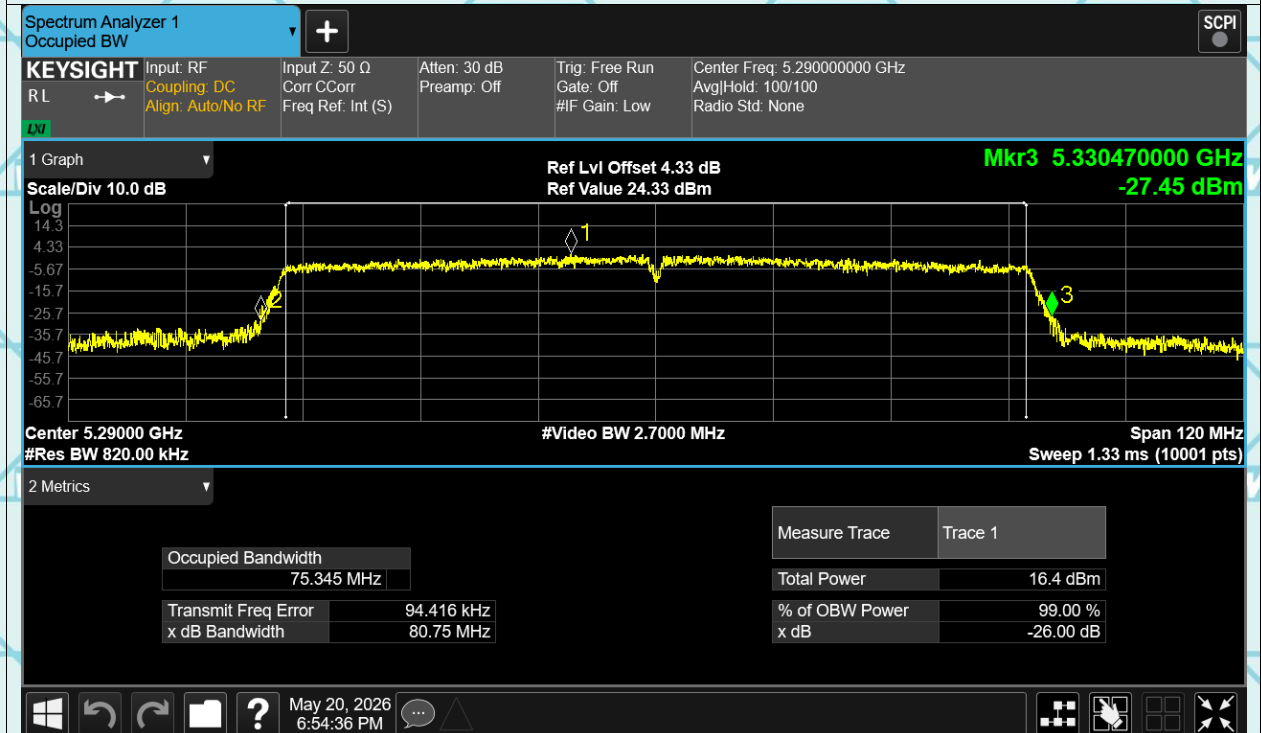

-26dB Bandwidth NVNT ac80 5530MHz Ant1


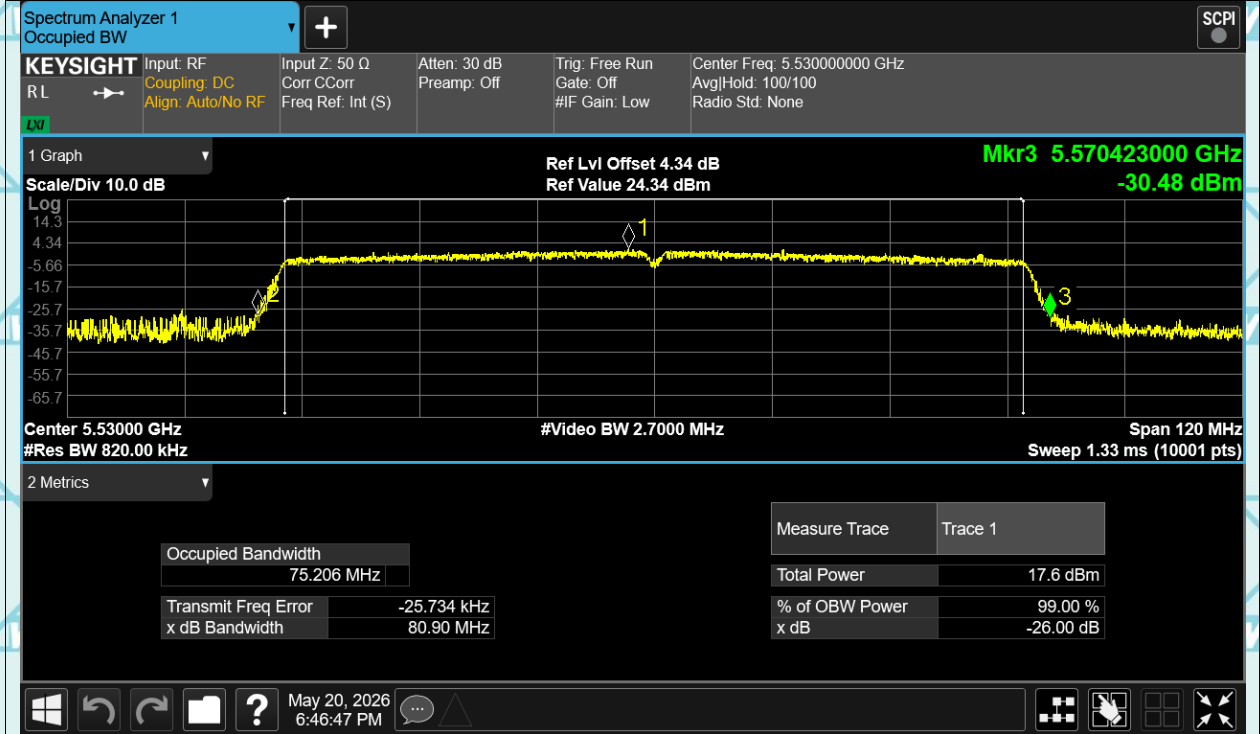




-26dB Bandwidth NVNT ac80 5610MHz Ant1


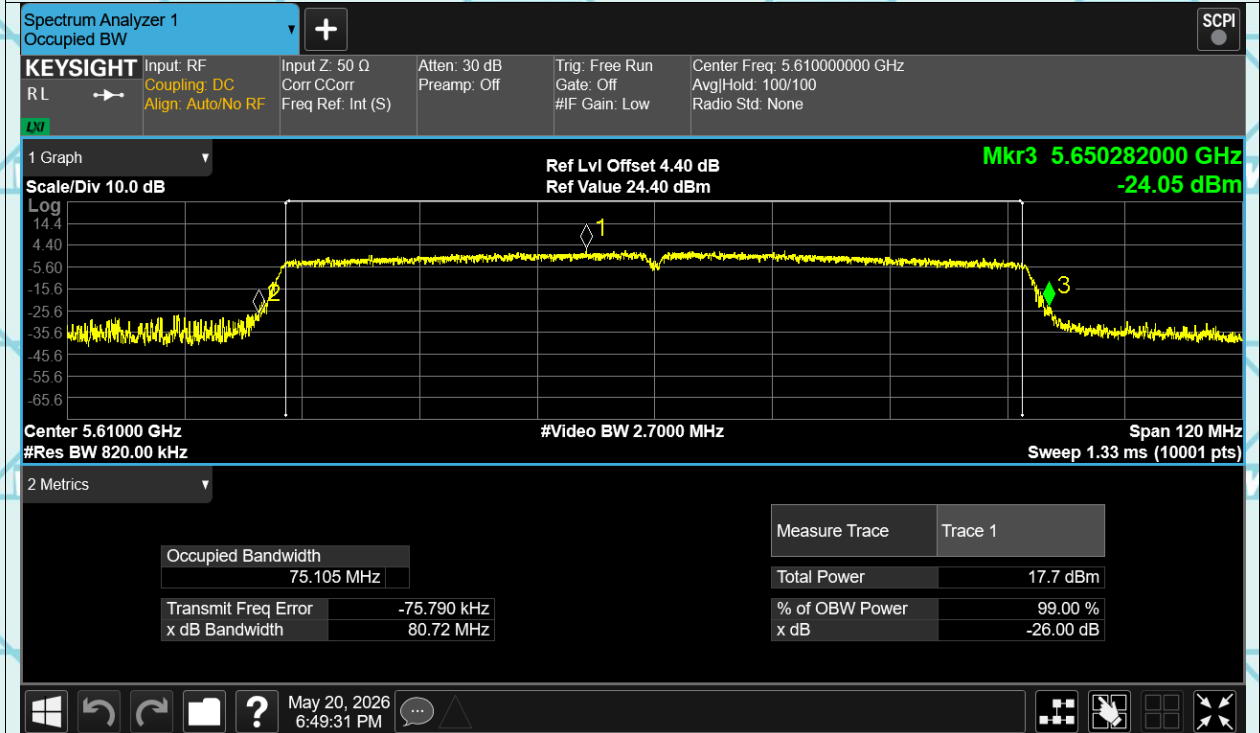


Report No.: WSCT-ANAB-R&E260500040A-Wi-Fi2 Issued Date: 26 May 2026


-6dB&99% Bandwidth

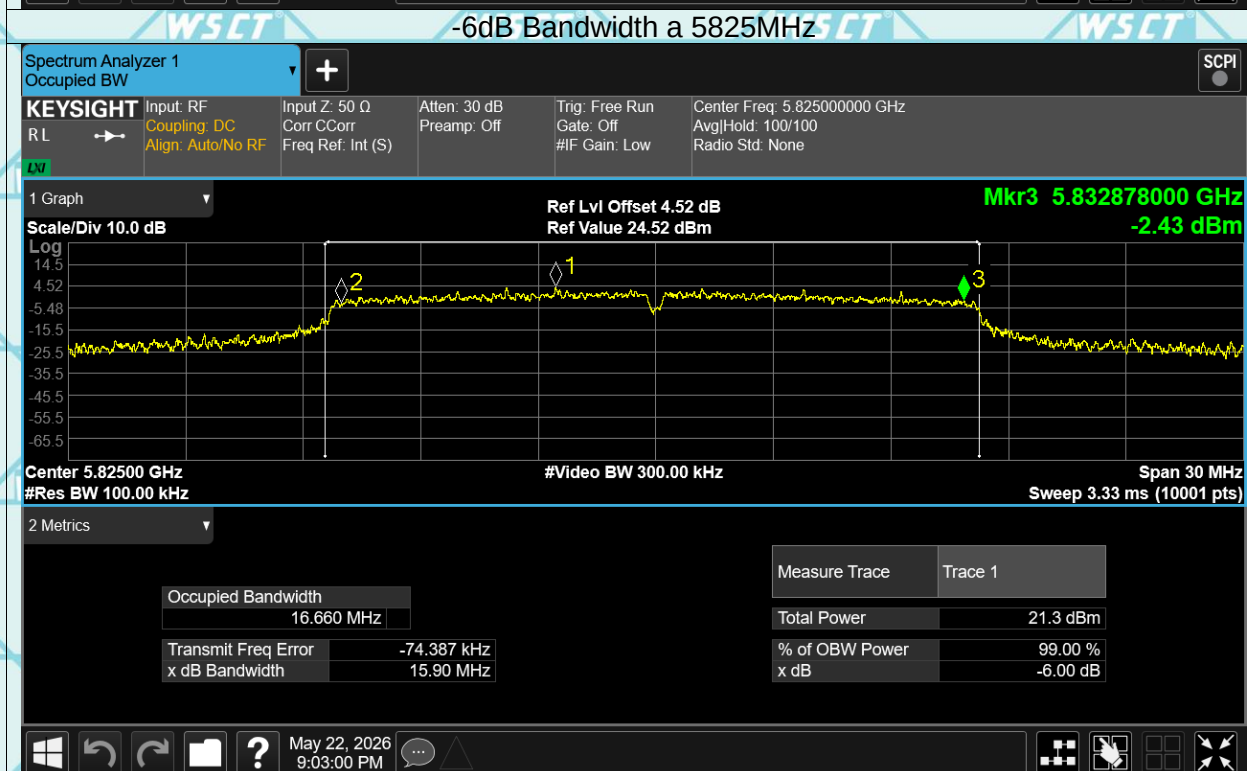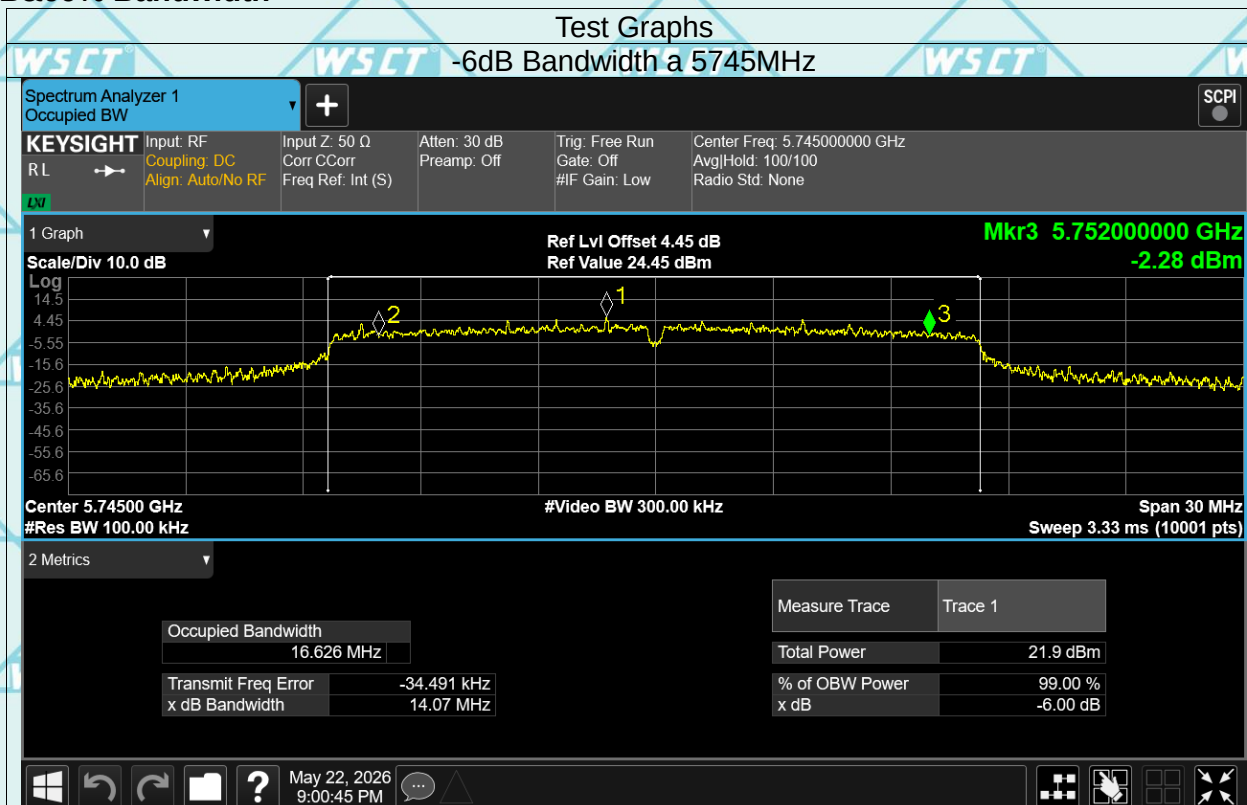

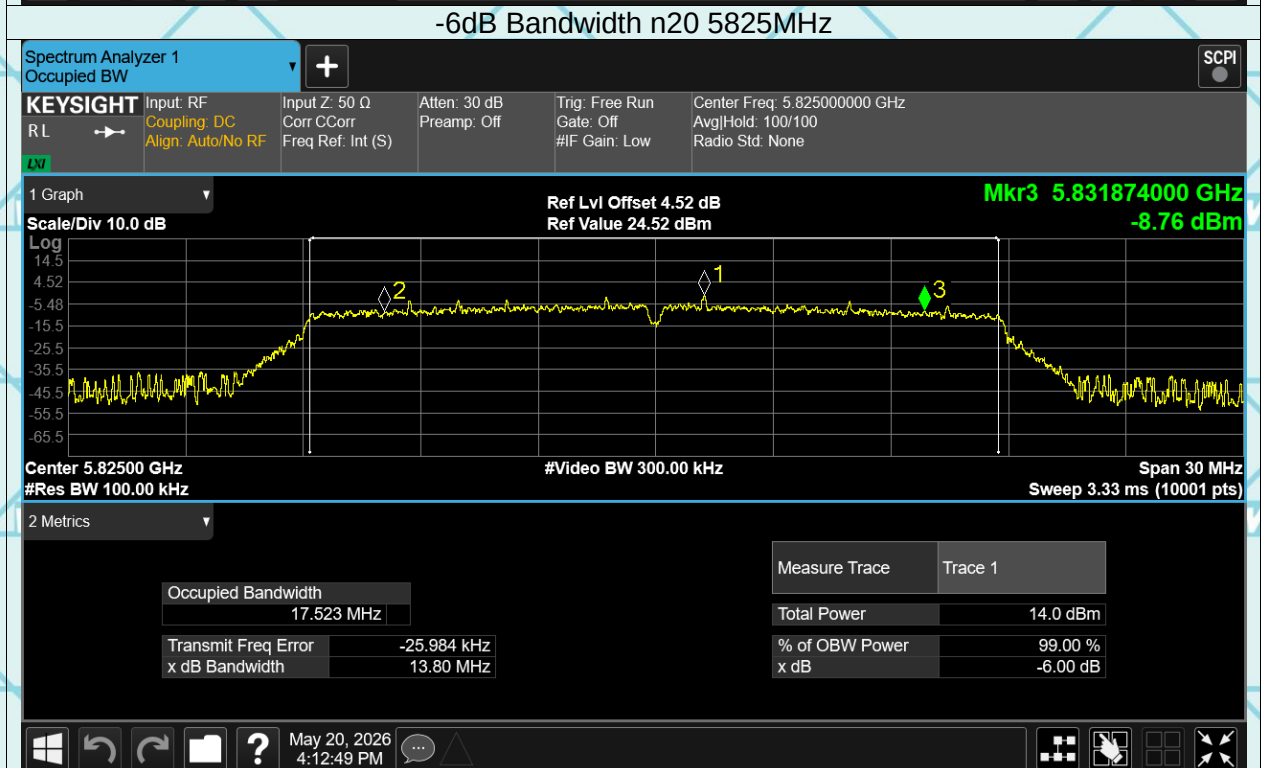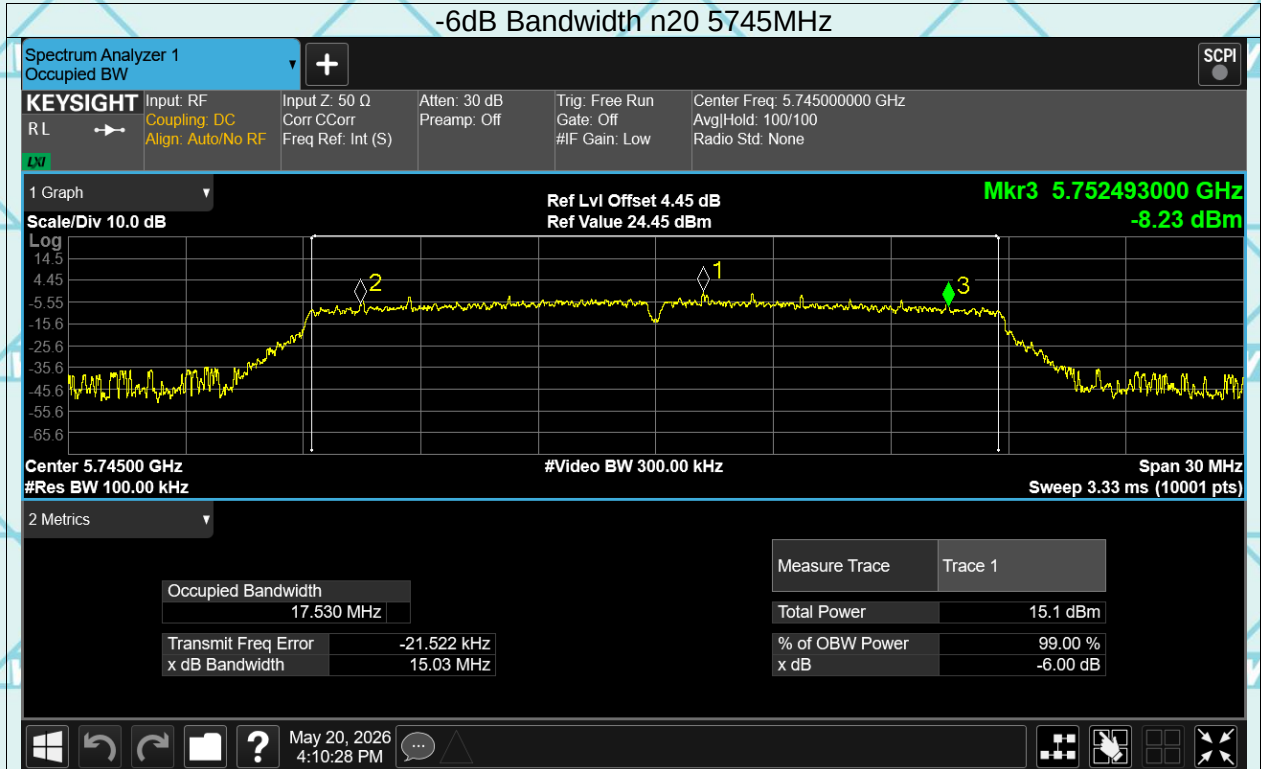


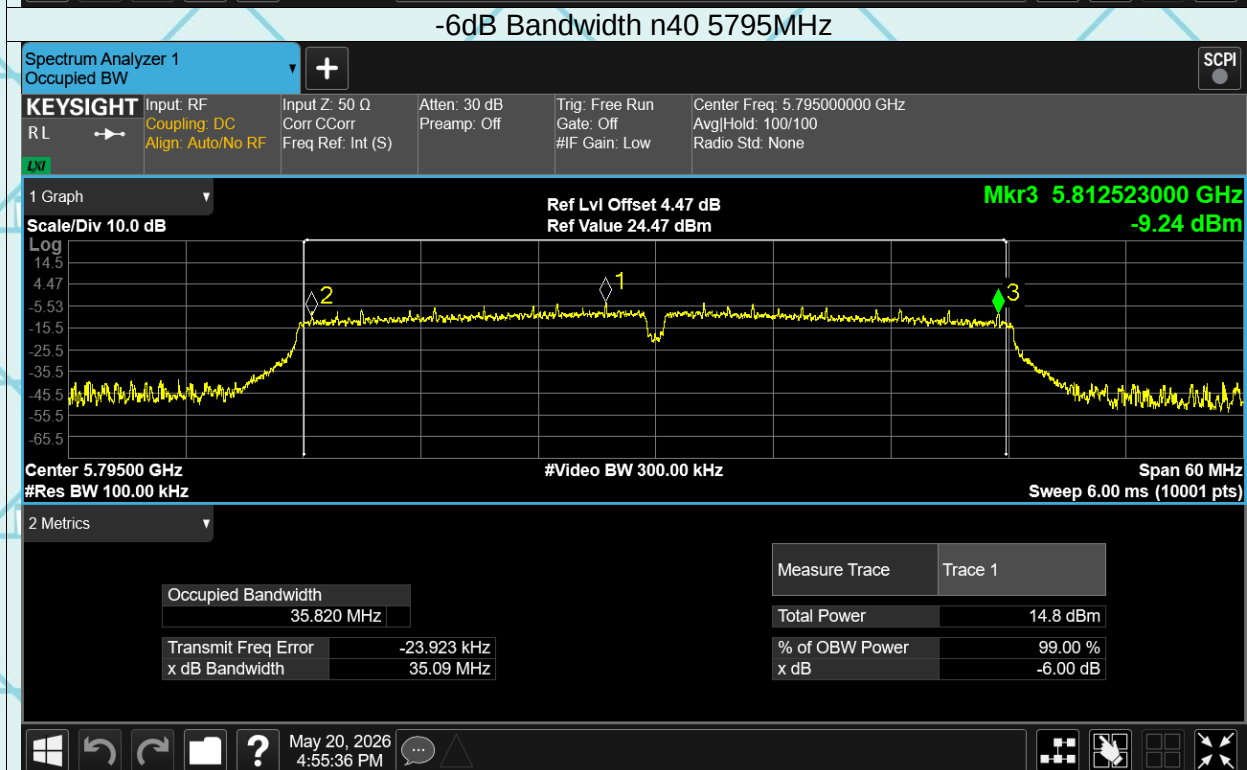
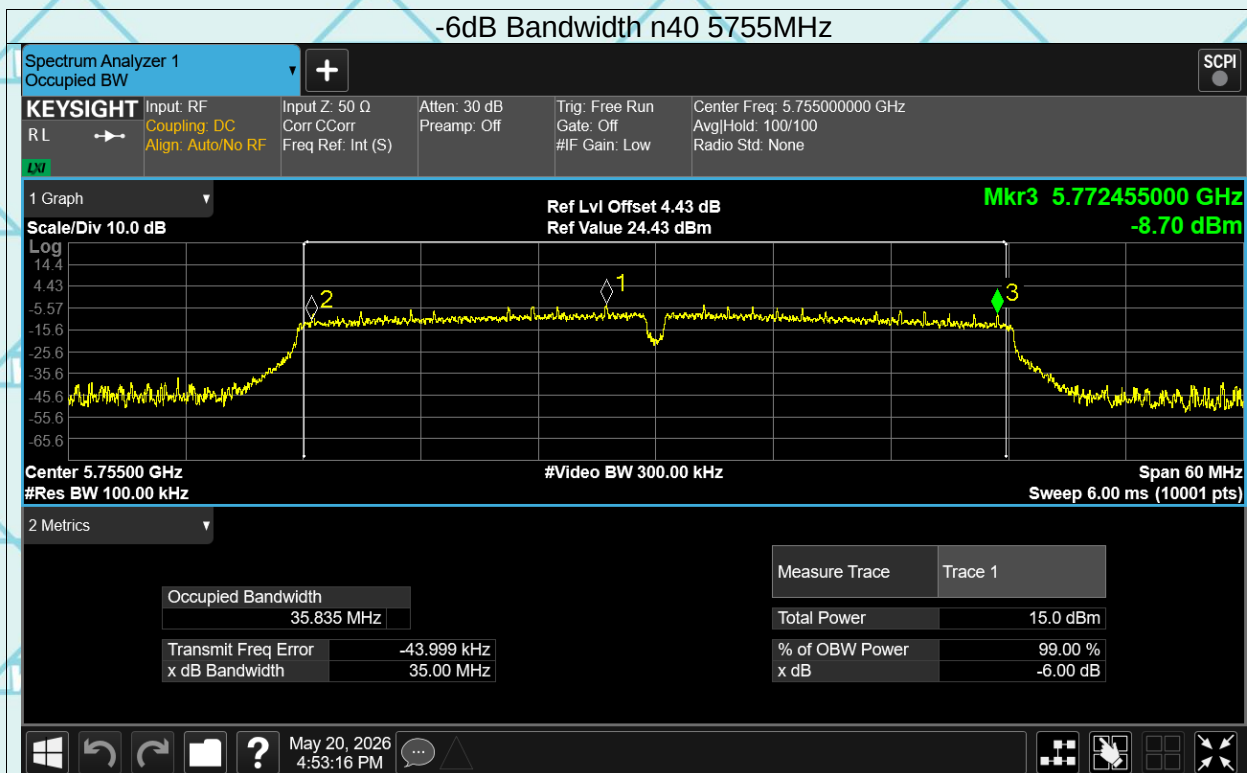



-6dB Bandwidth ac20 5745MHz

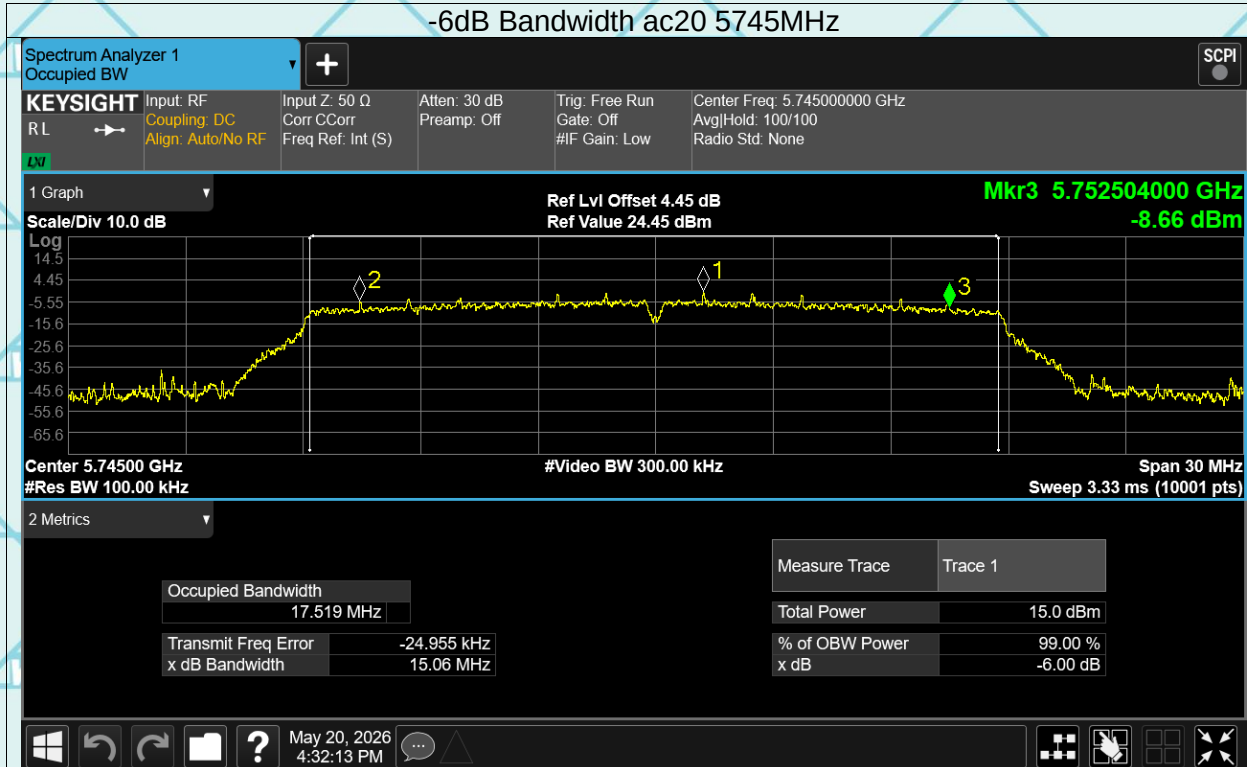

-6dB Bandwidth ac20 5825MHz

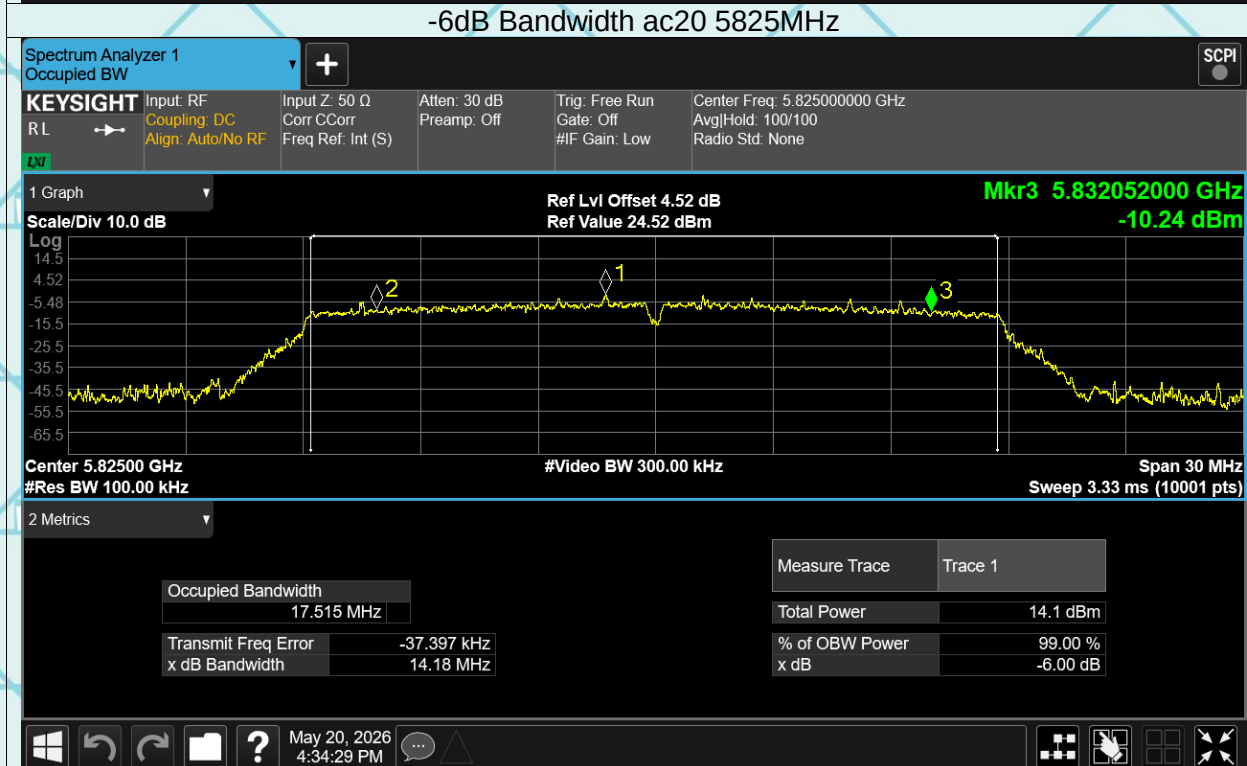

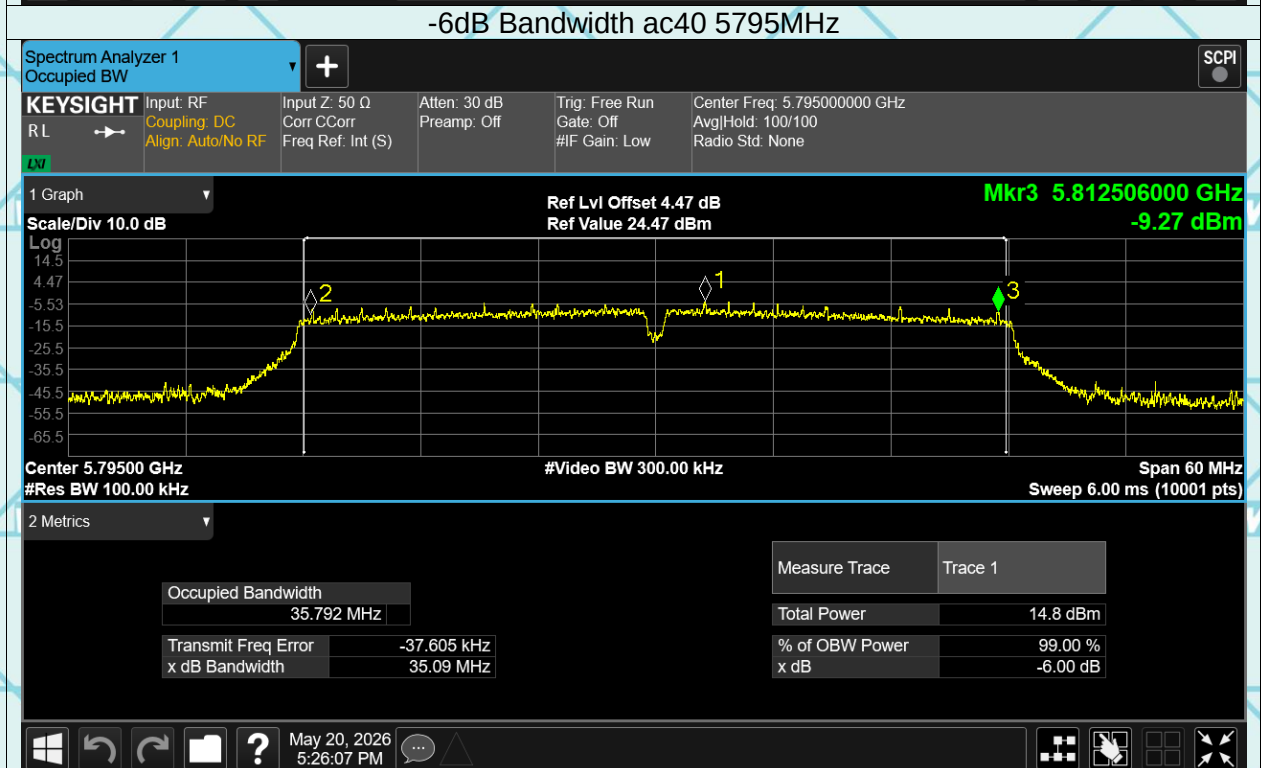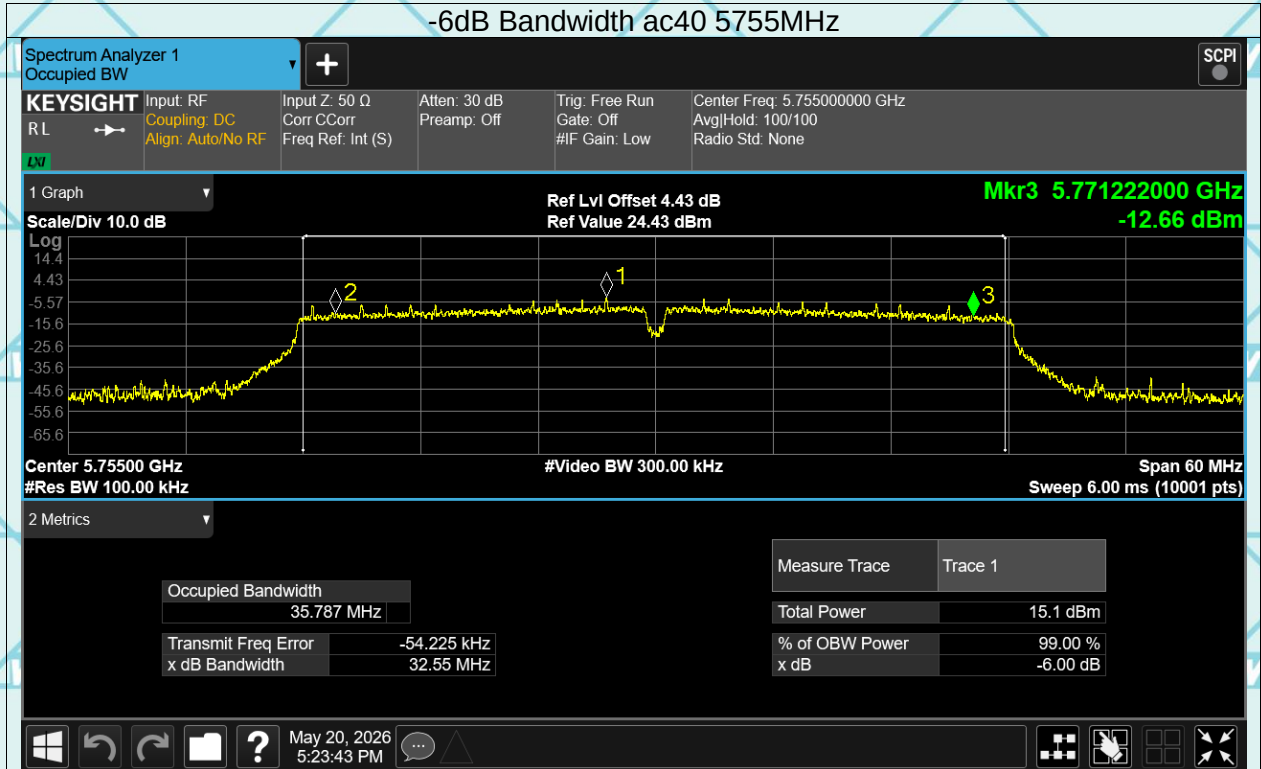

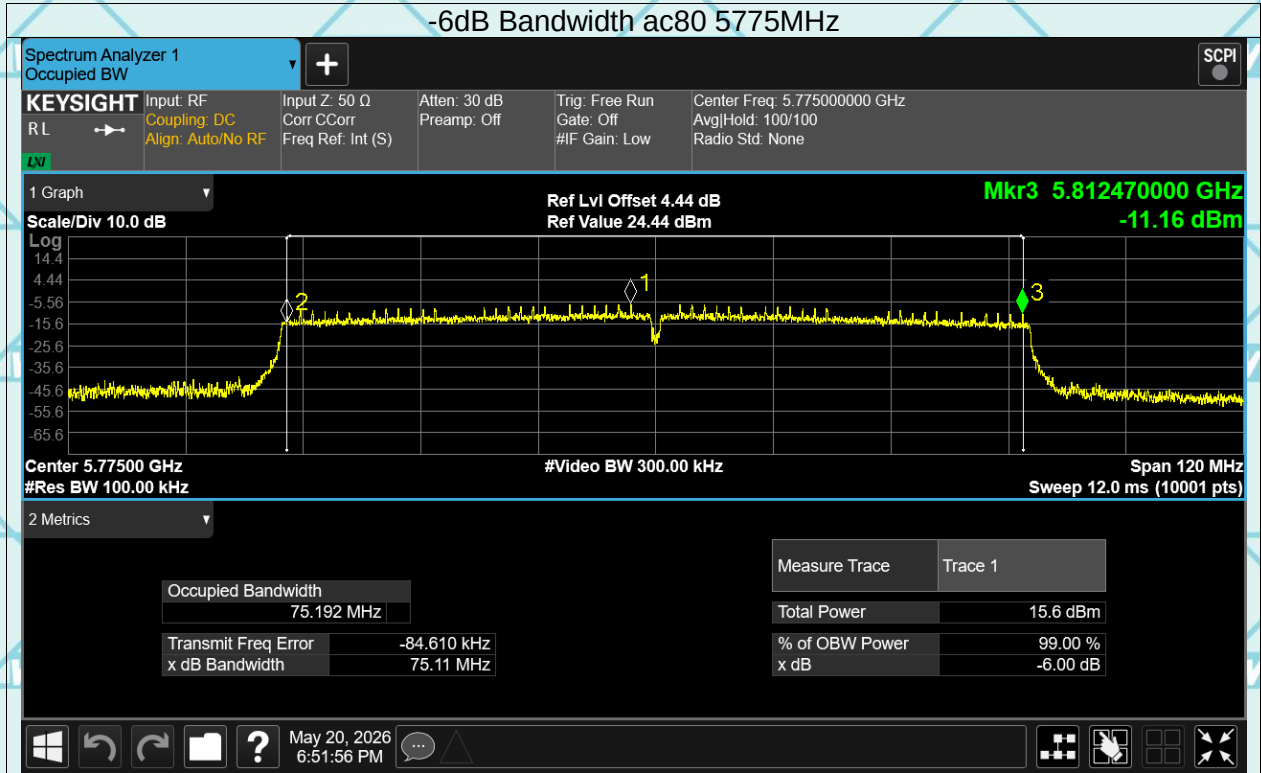

7.6 MAXIMUM CONDUCTED OUTPUT POWER

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: Maximum Conducted Output Power	Temperature	: 25 °C
Test Voltage	: DC 3.82V	Humidity	: 56%RH
Test Result	: PASS		

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	15.95	0.13	16.08	24	Pass
a	5240	15.48	0.13	15.61	24	Pass
a	5260	15.24	0.13	15.37	24	Pass
a	5320	14.84	0.13	14.97	24	Pass
a	5500	15.35	0.13	15.48	24	Pass
a	5700	15.93	0.13	16.06	24	Pass
a	5745	16.02	0.13	16.15	30	Pass
a	5825	16.44	0.13	16.57	30	Pass
n20	5180	16.87	0.14	17.01	24	Pass
n20	5240	16.35	0.14	16.49	24	Pass
n20	5260	16.04	0.14	16.18	24	Pass
n20	5320	15.6	0.14	15.74	24	Pass
n20	5500	16.06	0.14	16.2	24	Pass
n20	5700	16.58	0.14	16.72	24	Pass
n20	5745	16.59	0.14	16.73	30	Pass
n20	5825	16.93	0.14	17.07	30	Pass
n40	5190	14.16	0.28	14.44	24	Pass
n40	5230	14.17	0.28	14.45	24	Pass
n40	5270	13.24	0.44	13.68	24	Pass
n40	5310	12.96	0.28	13.24	24	Pass
n40	5510	13.23	0.28	13.51	24	Pass
n40	5670	14.13	0.44	14.57	24	Pass
n40	5755	17.6	0.44	18.04	30	Pass
n40	5795	17.27	0.44	17.71	30	Pass
ac20	5180	14.85	0.14	14.99	24	Pass
ac20	5240	14.63	0.14	14.77	24	Pass
ac20	5260	14.26	0.14	14.4	24	Pass
ac20	5320	13.85	0.14	13.99	24	Pass
ac20	5500	14.15	0.14	14.29	24	Pass
ac20	5700	15	0.14	15.14	24	Pass
ac20	5745	15.04	0.14	15.18	30	Pass
ac20	5825	15.56	0.14	15.7	30	Pass
ac40	5190	14.02	0.27	14.29	24	Pass
ac40	5230	13.77	0.27	14.04	24	Pass
ac40	5270	13.13	0.27	13.4	24	Pass
ac40	5310	12.87	0.27	13.14	24	Pass
ac40	5510	13.25	0.27	13.52	24	Pass
ac40	5670	14.07	0.27	14.34	24	Pass
ac40	5755	14.32	1.44	15.76	30	Pass
ac40	5795	14.43	1.53	15.96	30	Pass
ac80	5210	13.45	0.53	13.98	24	Pass
ac80	5290	12.7	0.53	13.23	24	Pass
ac80	5530	12.99	1.99	14.98	24	Pass
ac80	5610	13.52	1.83	15.35	24	Pass
ac80	5775	14.06	1.78	15.84	30	Pass

