

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.12.00

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2GWIFI 11a CH44


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

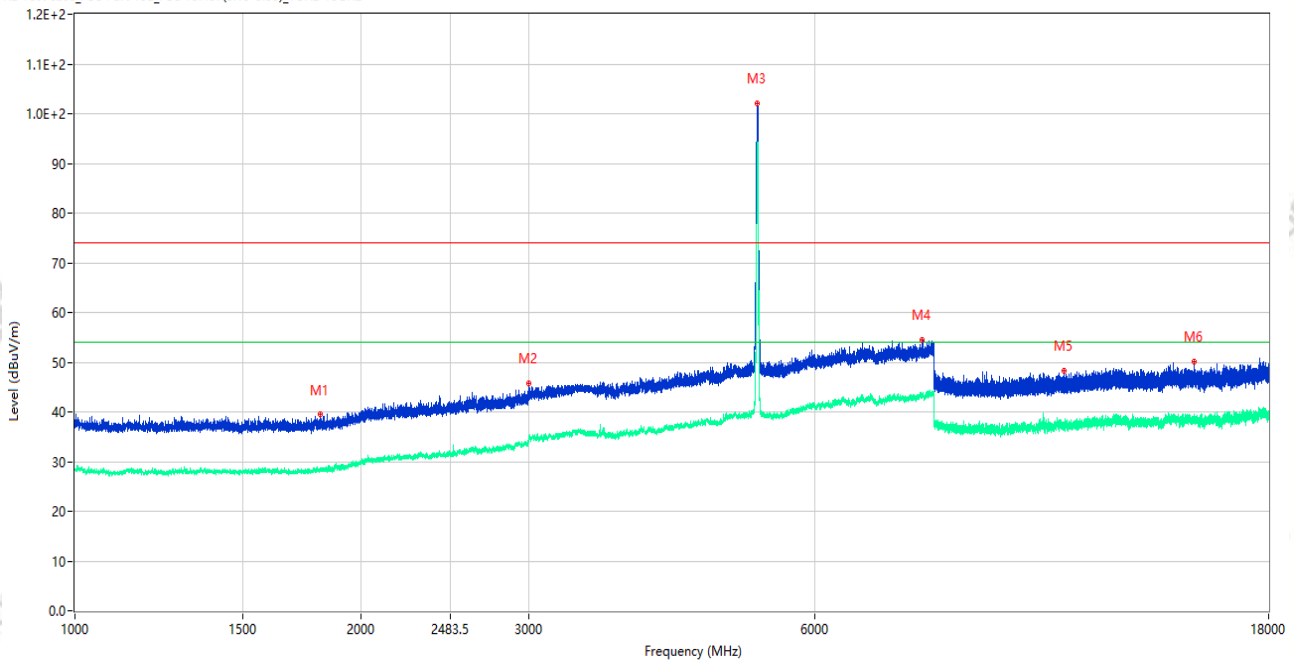

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1813.250	39.47	-16.01	74.0	34.53	Peak	156.00	150	Vertical	Pass
1**	1813.250	28.10	-16.01	54.0	25.90	AV	156.00	150	Vertical	Pass
2	3004.500	45.75	-8.00	74.0	28.25	Peak	196.00	150	Vertical	Pass
2**	3004.500	34.56	-8.00	54.0	19.44	AV	196.00	150	Vertical	Pass
3	5222.500	102.07	-2.36	74.0	-28.07	Peak	186.00	150	Vertical	N/A
3**	5222.500	94.17	-2.36	54.0	-40.17	AV	186.00	150	Vertical	N/A
4	7774.500	54.43	1.16	74.0	19.57	Peak	0.00	150	Vertical	Pass
4**	7774.500	42.92	1.16	54.0	11.08	AV	0.00	150	Vertical	Pass
5	10959.487	48.28	-3.25	74.0	25.72	Peak	264.00	150	Vertical	Pass
5**	10959.487	37.16	-3.25	54.0	16.84	AV	264.00	150	Vertical	Pass
6	15034.013	50.15	-2.30	74.0	23.85	Peak	360.00	150	Vertical	Pass
6**	15034.013	38.52	-2.30	54.0	15.48	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.07.42

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2GWIFI 11a CH44


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

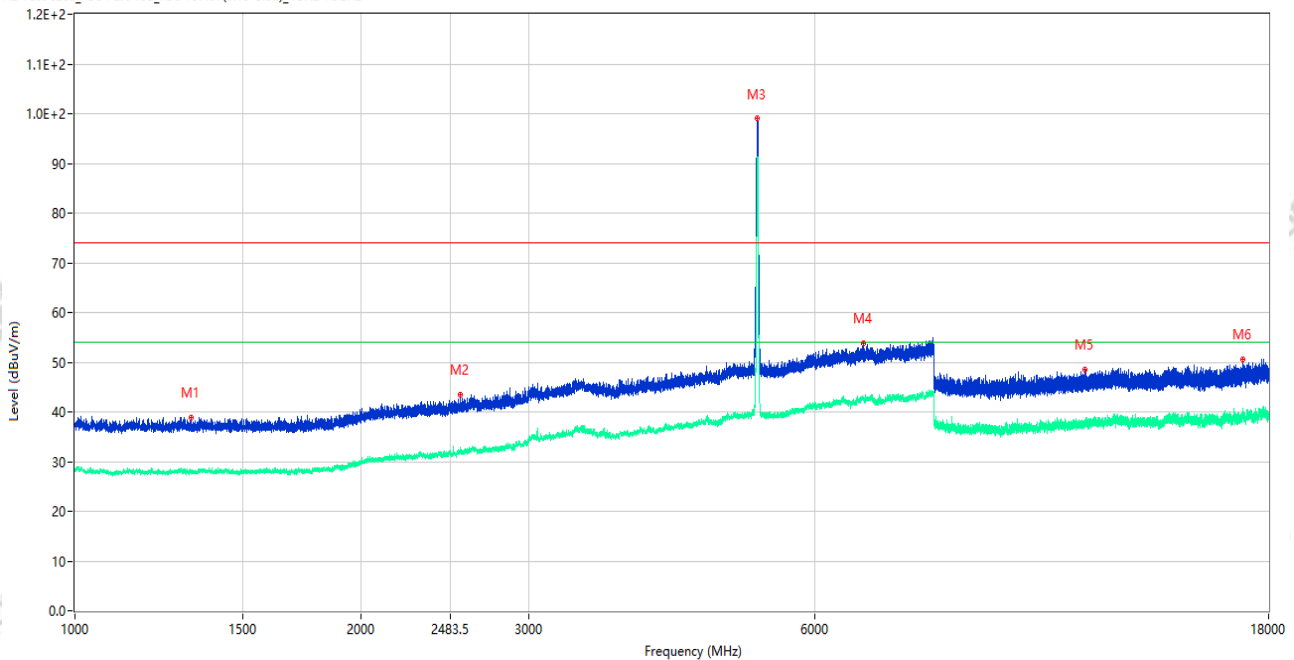

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1325.750	38.95	-15.89	74.0	35.05	Peak	360.00	150	Horizontal	Pass
1**	1325.750	27.83	-15.89	54.0	26.17	AV	360.00	150	Horizontal	Pass
2	2541.750	43.46	-11.02	74.0	30.54	Peak	216.00	150	Horizontal	Pass
2**	2541.750	32.84	-11.02	54.0	21.16	AV	216.00	150	Horizontal	Pass
3	5213.500	99.01	-2.34	74.0	-25.01	Peak	11.00	150	Horizontal	N/A
3**	5213.500	90.86	-2.34	54.0	-36.86	AV	11.00	150	Horizontal	N/A
4	6750.000	53.79	0.70	74.0	20.21	Peak	210.00	150	Horizontal	Pass
4**	6750.000	42.55	0.70	54.0	11.45	AV	210.00	150	Horizontal	Pass
5	11549.438	48.58	-2.57	74.0	25.42	Peak	99.00	150	Horizontal	Pass
5**	11549.438	37.35	-2.57	54.0	16.65	AV	99.00	150	Horizontal	Pass
6	16903.537	50.52	-0.94	74.0	23.48	Peak	320.00	150	Horizontal	Pass
6**	16903.537	39.64	-0.94	54.0	14.36	AV	320.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.21.47

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2GWIFI 11n20 CH44


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

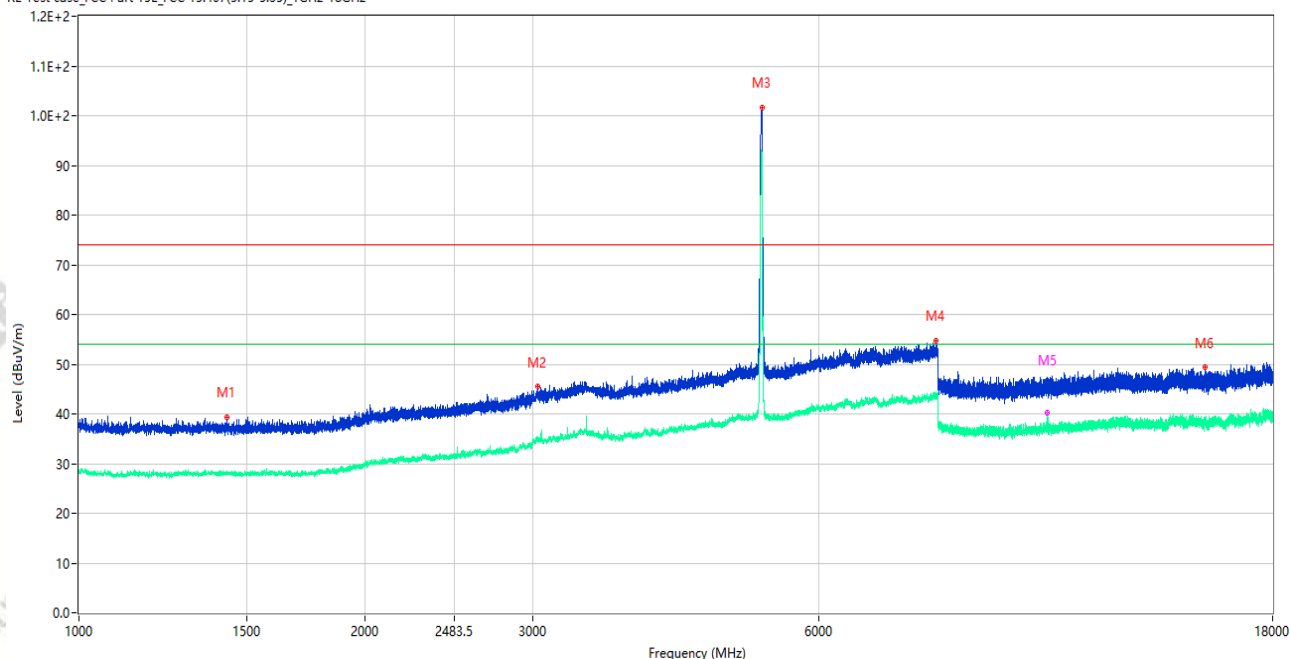

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1429.750	39.39	-15.99	74.0	34.61	Peak	233.00	150	Vertical	Pass
1**	1429.750	28.05	-15.99	54.0	25.95	AV	233.00	150	Vertical	Pass
2	3036.000	45.49	-8.07	74.0	28.51	Peak	109.00	150	Vertical	Pass
2**	3036.000	34.80	-8.07	54.0	19.20	AV	109.00	150	Vertical	Pass
3	5225.500	101.64	-2.34	74.0	-27.64	Peak	188.00	150	Vertical	N/A
3**	5225.500	91.58	-2.34	54.0	-37.58	AV	188.00	150	Vertical	N/A
4	7958.500	54.66	2.32	74.0	19.34	Peak	80.00	150	Vertical	Pass
4**	7958.500	43.45	2.32	54.0	10.55	AV	80.00	150	Vertical	Pass
5	10437.224	45.02	-3.31	74.0	28.98	Peak	191.00	150	Vertical	Pass
5**	10437.224	40.26	-3.31	54.0	13.74	AV	191.00	150	Vertical	Pass
6	15269.213	49.35	-1.21	74.0	24.65	Peak	360.00	150	Vertical	Pass
6**	15269.213	38.80	-1.21	54.0	15.20	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.22.47

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2GWIFI 11n20 CH44


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

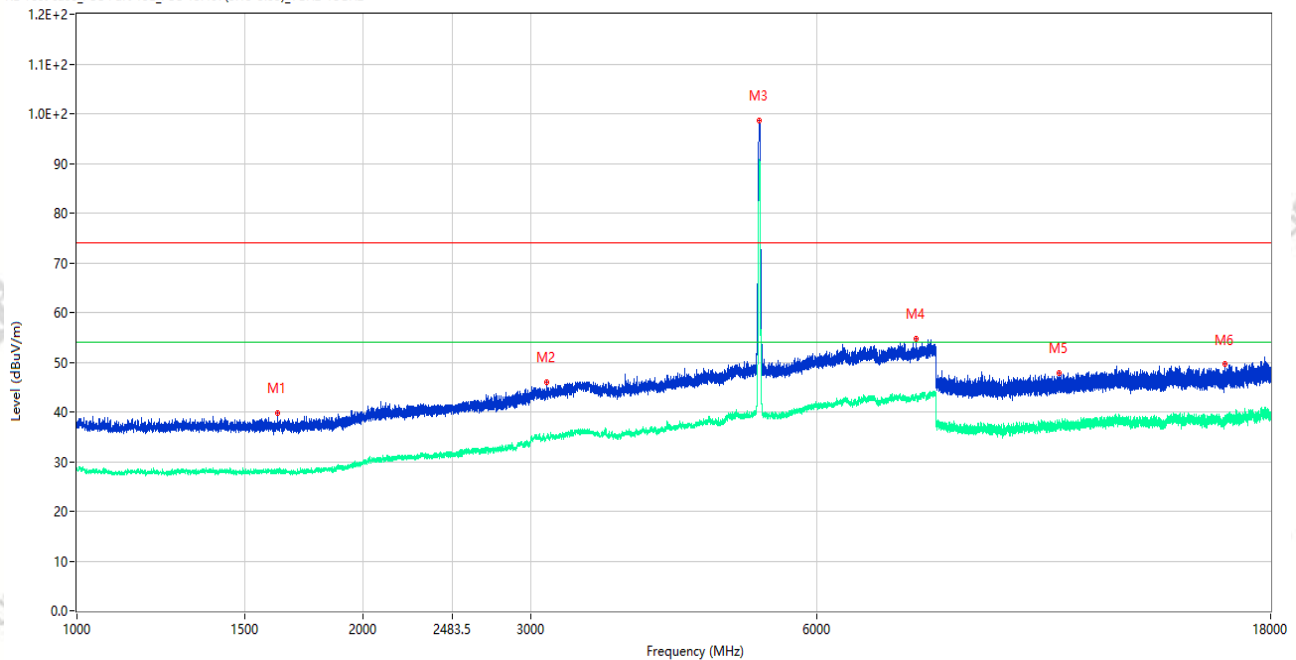

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1625.250	39.84	-15.99	74.0	34.16	Peak	360.00	150	Horizontal	Pass
1**	1625.250	28.18	-15.99	54.0	25.82	AV	360.00	150	Horizontal	Pass
2	3115.500	45.91	-7.96	74.0	28.09	Peak	59.00	150	Horizontal	Pass
2**	3115.500	34.93	-7.96	54.0	19.07	AV	59.00	150	Horizontal	Pass
3	5215.000	98.57	-2.34	74.0	-24.57	Peak	11.00	150	Horizontal	N/A
3**	5215.000	90.22	-2.34	54.0	-36.22	AV	11.00	150	Horizontal	N/A
4	7623.000	54.70	0.50	74.0	19.30	Peak	280.00	150	Horizontal	Pass
4**	7623.000	43.03	0.50	54.0	10.97	AV	280.00	150	Horizontal	Pass
5	10774.475	47.81	-3.01	74.0	26.19	Peak	260.00	150	Horizontal	Pass
5**	10774.475	38.28	-3.01	54.0	15.72	AV	260.00	150	Horizontal	Pass
6	16134.150	49.57	-1.52	74.0	24.43	Peak	217.00	150	Horizontal	Pass
6**	16134.150	38.48	-1.52	54.0	15.52	AV	217.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.31.54

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2GWIFI 11n40 CH38


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

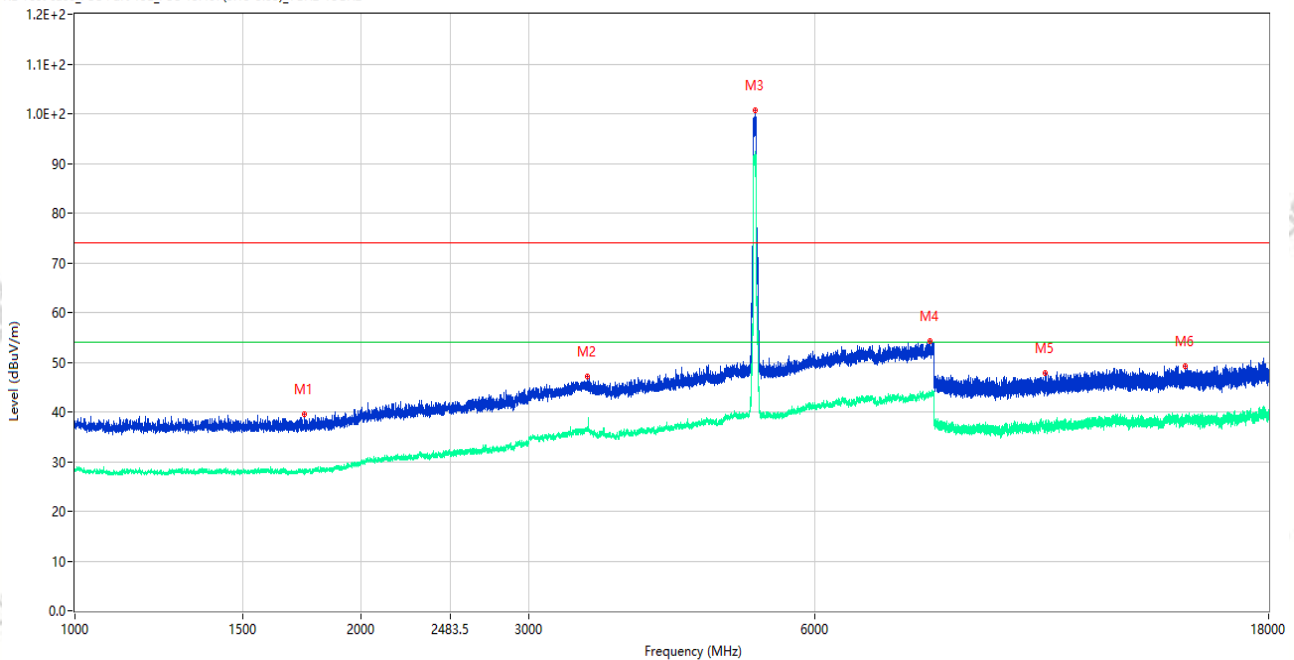

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1743.750	39.53	-16.10	74.0	34.47	Peak	360.00	150	Vertical	Pass
1**	1743.750	28.21	-16.10	54.0	25.79	AV	360.00	150	Vertical	Pass
2	3461.000	47.10	-4.96	74.0	26.90	Peak	198.00	150	Vertical	Pass
2**	3461.000	37.04	-4.96	54.0	16.96	AV	198.00	150	Vertical	Pass
3	5188.000	100.75	-2.32	74.0	-26.75	Peak	198.00	150	Vertical	N/A
3**	5188.000	92.45	-2.32	54.0	-38.45	AV	198.00	150	Vertical	N/A
4	7932.000	54.30	2.07	74.0	19.70	Peak	109.00	150	Vertical	Pass
4**	7932.000	43.38	2.07	54.0	10.62	AV	109.00	150	Vertical	Pass
5	10491.138	47.76	-3.35	74.0	26.24	Peak	145.00	150	Vertical	Pass
5**	10491.138	37.67	-3.35	54.0	16.33	AV	145.00	150	Vertical	Pass
6	14724.525	49.20	-1.67	74.0	24.80	Peak	360.00	150	Vertical	Pass
6**	14724.525	38.45	-1.67	54.0	15.55	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.28.04

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2GWIFI 11n40 CH38


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

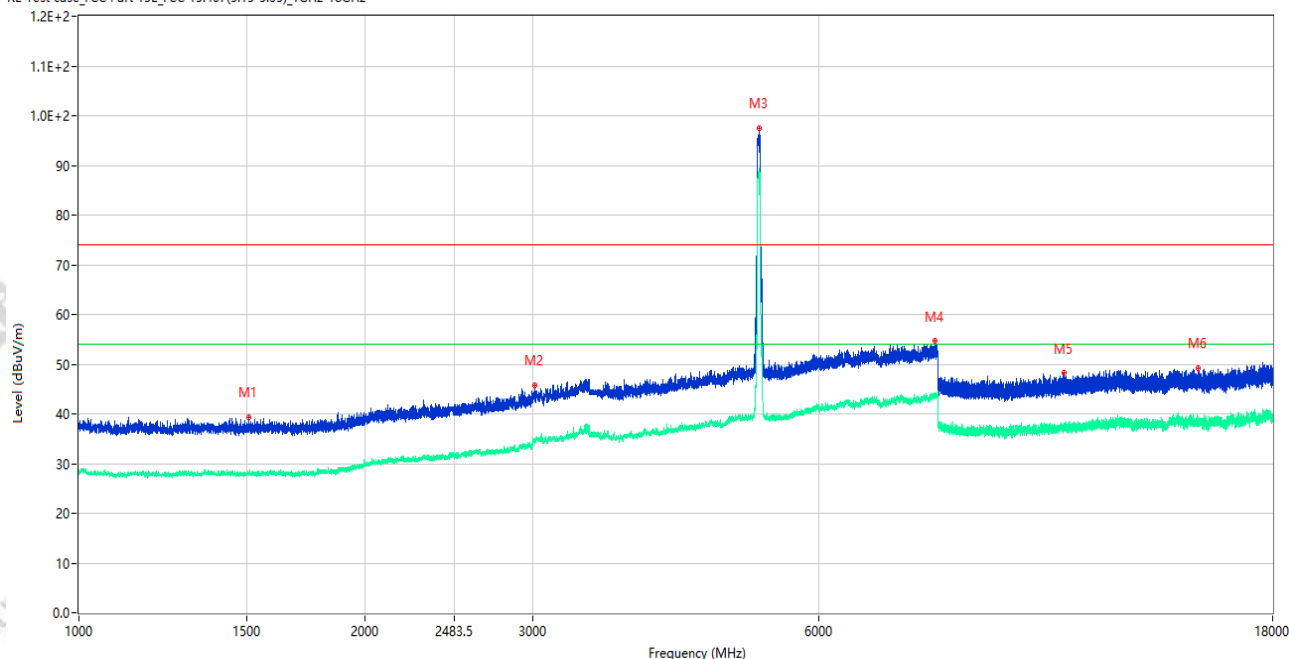

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1508.750	39.27	-16.04	74.0	34.73	Peak	60.00	150	Horizontal	Pass
1**	1508.750	28.33	-16.04	54.0	25.67	AV	60.00	150	Horizontal	Pass
2	3018.500	45.77	-7.86	74.0	28.23	Peak	131.00	150	Horizontal	Pass
2**	3018.500	34.25	-7.86	54.0	19.75	AV	131.00	150	Horizontal	Pass
3	5195.000	97.57	-2.33	74.0	-23.57	Peak	12.00	150	Horizontal	N/A
3**	5195.000	89.14	-2.33	54.0	-35.14	AV	12.00	150	Horizontal	N/A
4	7940.000	54.62	1.90	74.0	19.38	Peak	100.00	150	Horizontal	Pass
4**	7940.000	43.39	1.90	54.0	10.61	AV	100.00	150	Horizontal	Pass
5	10861.162	48.17	-3.28	74.0	25.83	Peak	239.00	150	Horizontal	Pass
5**	10861.162	37.39	-3.28	54.0	16.61	AV	239.00	150	Horizontal	Pass
6	15021.412	49.22	-2.61	74.0	24.78	Peak	359.00	150	Horizontal	Pass
6**	15021.412	38.78	-2.61	54.0	15.22	AV	359.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.54.25

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2GWIFI 11ac80 CH42


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

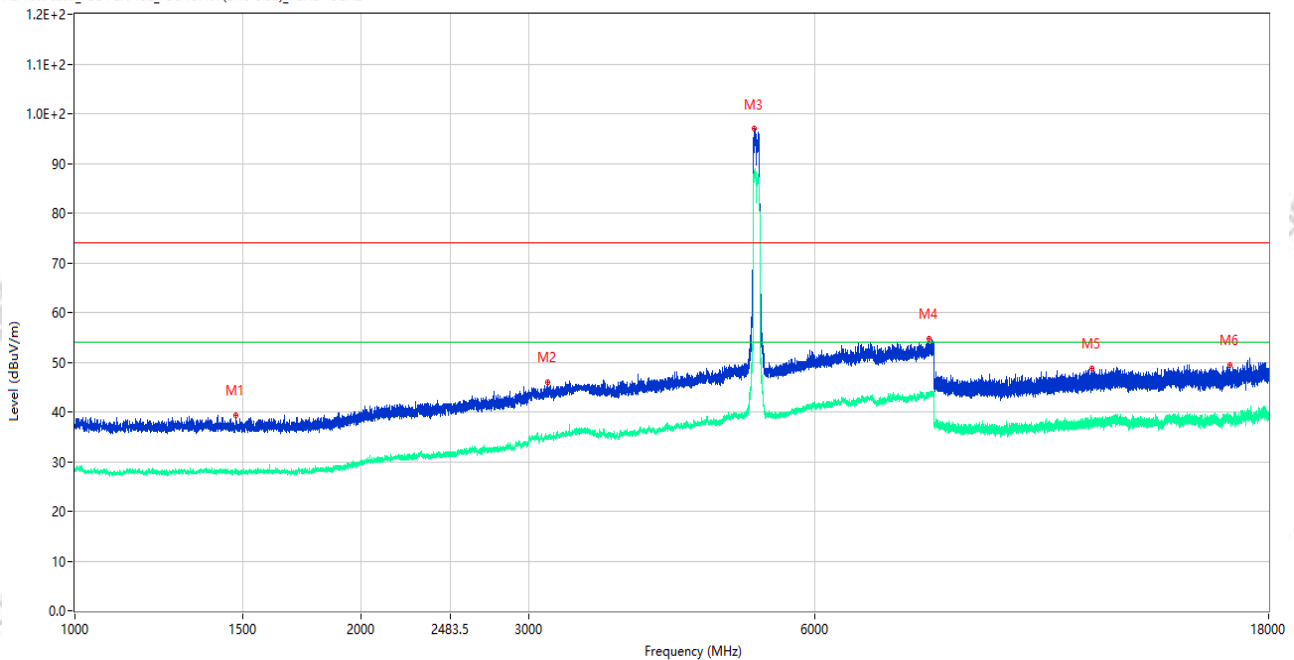

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1476.500	39.26	-16.30	74.0	34.74	Peak	360.00	150	Vertical	Pass
1**	1476.500	27.70	-16.30	54.0	26.30	AV	360.00	150	Vertical	Pass
2	3139.000	46.04	-7.74	74.0	27.96	Peak	178.00	150	Vertical	Pass
2**	3139.000	35.26	-7.74	54.0	18.74	AV	178.00	150	Vertical	Pass
3	5182.000	96.94	-2.33	74.0	-22.94	Peak	197.00	150	Vertical	N/A
3**	5182.000	87.45	-2.33	54.0	-33.45	AV	197.00	150	Vertical	N/A
4	7917.000	54.79	1.90	74.0	19.21	Peak	326.00	150	Vertical	Pass
4**	7917.000	43.99	1.90	54.0	10.01	AV	326.00	150	Vertical	Pass
5	11737.538	48.82	-2.98	74.0	25.18	Peak	2.00	150	Vertical	Pass
5**	11737.538	37.53	-2.98	54.0	16.47	AV	2.00	150	Vertical	Pass
6	16393.762	49.52	-1.09	74.0	24.48	Peak	48.00	150	Vertical	Pass
6**	16393.762	39.36	-1.09	54.0	14.64	AV	48.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.50.06

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2GWIFI 11ac80 CH42


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

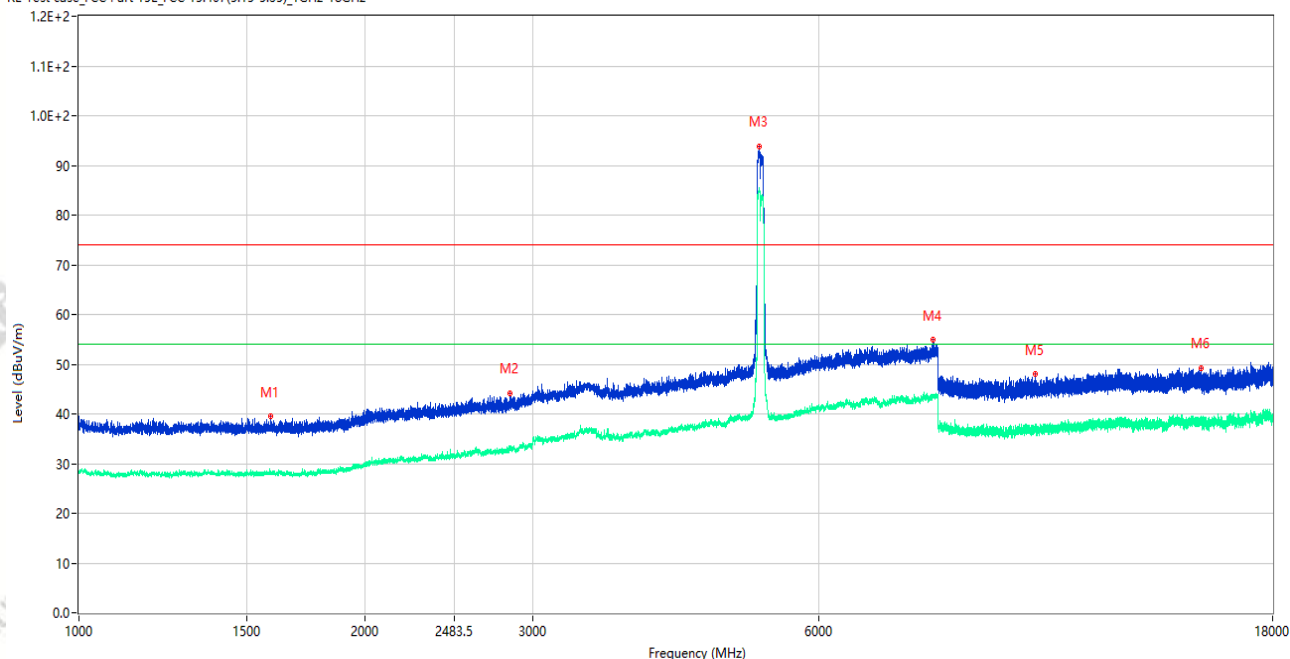


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1591.500	39.44	-16.20	74.0	34.56	Peak	360.00	150	Horizontal	Pass
1**	1591.500	27.90	-16.20	54.0	26.10	AV	360.00	150	Horizontal	Pass
2	2840.500	44.25	-9.49	74.0	29.75	Peak	360.00	150	Horizontal	Pass
2**	2840.500	33.13	-9.49	54.0	20.87	AV	360.00	150	Horizontal	Pass
3	5194.000	93.81	-2.31	74.0	-19.81	Peak	12.00	150	Horizontal	N/A
3**	5194.000	85.62	-2.31	54.0	-31.62	AV	12.00	150	Horizontal	N/A
4	7914.500	54.88	1.81	74.0	19.12	Peak	33.00	150	Horizontal	Pass
4**	7914.500	43.56	1.81	54.0	10.44	AV	33.00	150	Horizontal	Pass
5	10122.776	47.97	-4.05	74.0	26.03	Peak	215.00	150	Horizontal	Pass
5**	10122.776	36.42	-4.05	54.0	17.58	AV	215.00	150	Horizontal	Pass
6	15130.613	49.28	-2.33	74.0	24.72	Peak	223.00	150	Horizontal	Pass
6**	15130.613	38.46	-2.33	54.0	15.54	AV	223.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_15.05.16

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal working Link(5GWIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

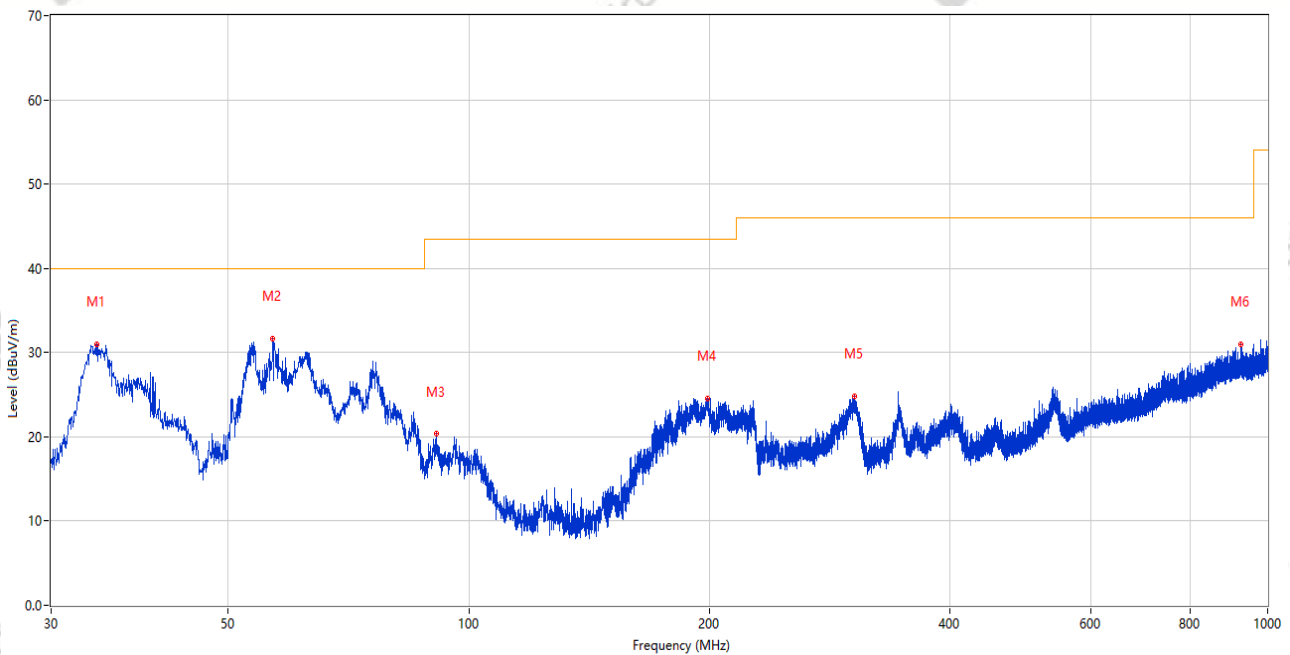


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.268	31.01	-28.03	40.0	8.99	Peak	348.00	100	Vertical	Pass
2	56.869	31.69	-25.38	40.0	8.31	Peak	239.00	100	Vertical	Pass
3	91.062	20.35	-27.75	43.5	23.15	Peak	245.00	100	Vertical	Pass
4	198.780	24.60	-25.69	43.5	18.90	Peak	313.00	200	Vertical	Pass
5	303.782	24.87	-23.26	46.0	21.13	Peak	182.00	100	Vertical	Pass
6	925.455	31.03	-8.93	46.0	14.97	Peak	77.00	200	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_15.07.40

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal working Link(5GWIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

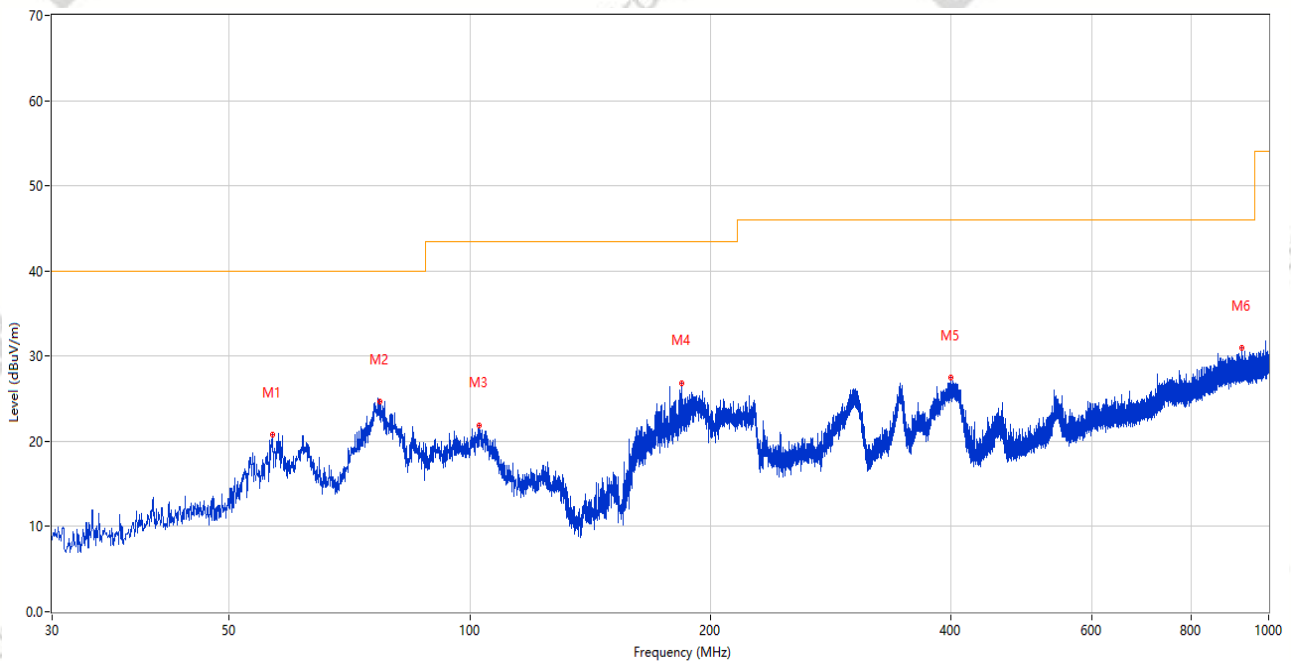

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	56.578	20.77	-25.32	40.0	19.23	Peak	360.00	100	Horizontal	Pass
2	77.093	24.63	-30.89	40.0	15.37	Peak	0.00	200	Horizontal	Pass
3	102.847	21.81	-26.13	43.5	21.69	Peak	0.00	200	Horizontal	Pass
4	184.230	26.87	-27.29	43.5	16.63	Peak	227.00	100	Horizontal	Pass
5	400.443	27.44	-20.40	46.0	18.56	Peak	86.00	100	Horizontal	Pass
6	925.746	30.91	-8.92	46.0	15.09	Peak	360.00	100	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_16.56.35

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3GWIFI 11a CH60


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

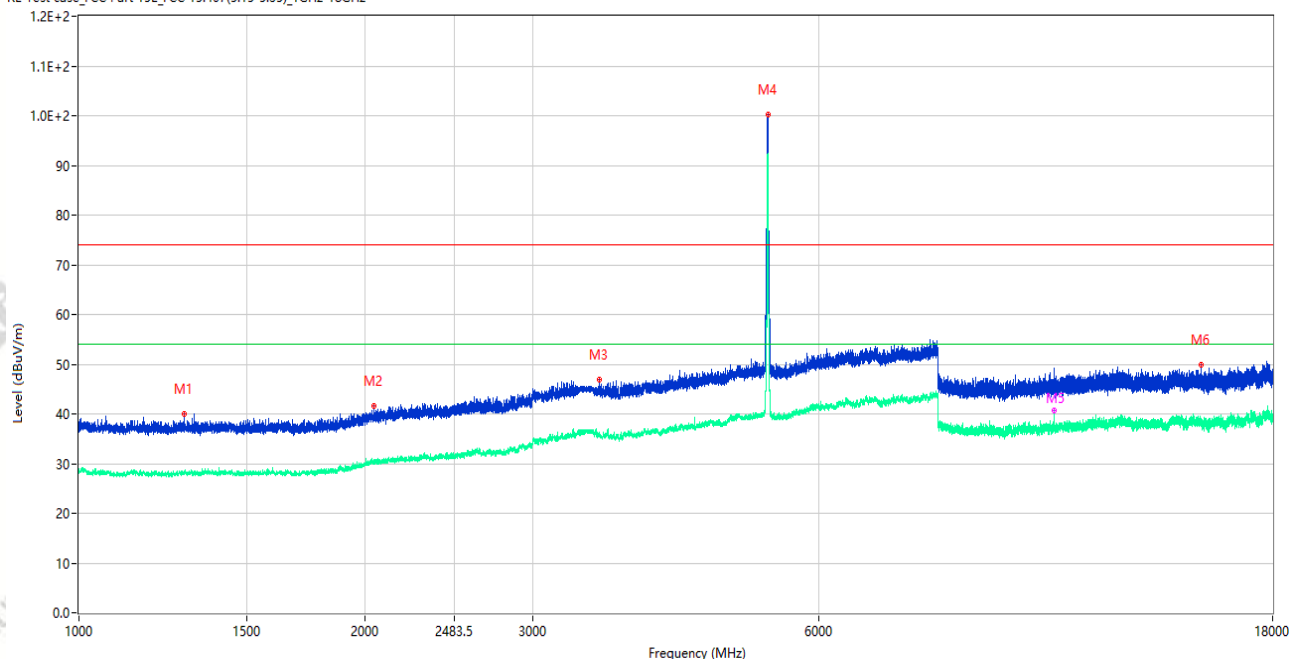

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1291.500	40.11	-15.83	74.0	33.89	Peak	38.00	150	Vertical	Pass
1**	1291.500	28.13	-15.83	54.0	25.87	AV	38.00	150	Vertical	Pass
2	2043.000	41.59	-13.35	74.0	32.41	Peak	335.00	150	Vertical	Pass
2**	2043.000	30.77	-13.35	54.0	23.23	AV	335.00	150	Vertical	Pass
3	3529.000	46.79	-6.29	74.0	27.21	Peak	9.00	150	Vertical	Pass
3**	3529.000	35.60	-6.29	54.0	18.40	AV	9.00	150	Vertical	Pass
4	5305.000	100.19	-2.03	74.0	-26.19	Peak	192.00	150	Vertical	N/A
4**	5305.000	92.08	-2.03	54.0	-38.08	AV	192.00	150	Vertical	N/A
5	10597.300	47.22	-3.64	74.0	26.78	Peak	191.00	150	Vertical	Pass
5**	10597.300	40.75	-3.64	54.0	13.25	AV	191.00	150	Vertical	Pass
6	15136.125	49.91	-2.49	74.0	24.09	Peak	139.00	150	Vertical	Pass
6**	15136.125	38.47	-2.49	54.0	15.53	AV	139.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_16.51.41

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3GWIFI 11a CH60


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

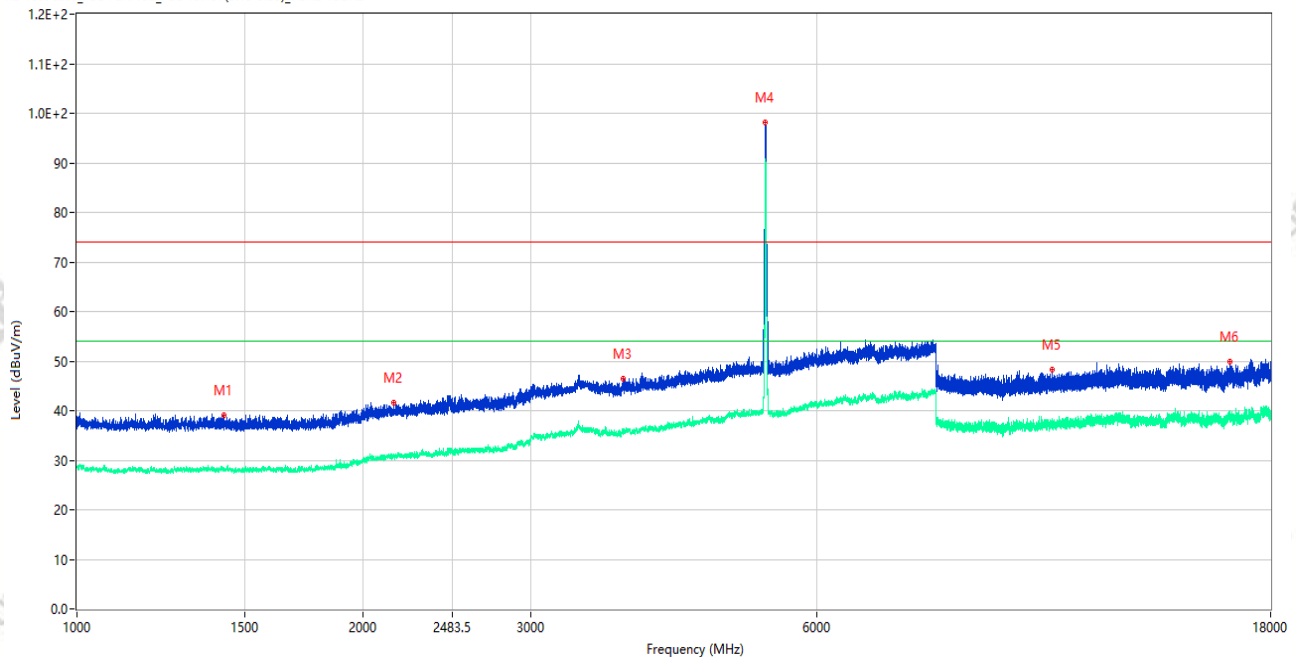

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1428.750	39.05	-15.99	74.0	34.95	Peak	74.00	150	Horizontal	Pass
1**	1428.750	28.16	-15.99	54.0	25.84	AV	74.00	150	Horizontal	Pass
2	2151.500	41.52	-13.63	74.0	32.48	Peak	0.00	150	Horizontal	Pass
2**	2151.500	30.74	-13.63	54.0	23.26	AV	0.00	150	Horizontal	Pass
3	3749.000	46.32	-4.70	74.0	27.68	Peak	360.00	150	Horizontal	Pass
3**	3749.000	35.83	-4.70	54.0	18.17	AV	360.00	150	Horizontal	Pass
4	5293.000	98.24	-1.96	74.0	-24.24	Peak	9.00	150	Horizontal	N/A
4**	5293.000	89.98	-1.96	54.0	-35.98	AV	9.00	150	Horizontal	N/A
5	10604.425	48.28	-3.66	74.0	25.72	Peak	264.00	150	Horizontal	Pass
5**	10604.425	37.66	-3.66	54.0	16.34	AV	264.00	150	Horizontal	Pass
6	16292.175	49.79	-1.45	74.0	24.21	Peak	0.00	150	Horizontal	Pass
6**	16292.175	39.11	-1.45	54.0	14.89	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_17.14.29

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3GWIFI 11n20 CH60


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

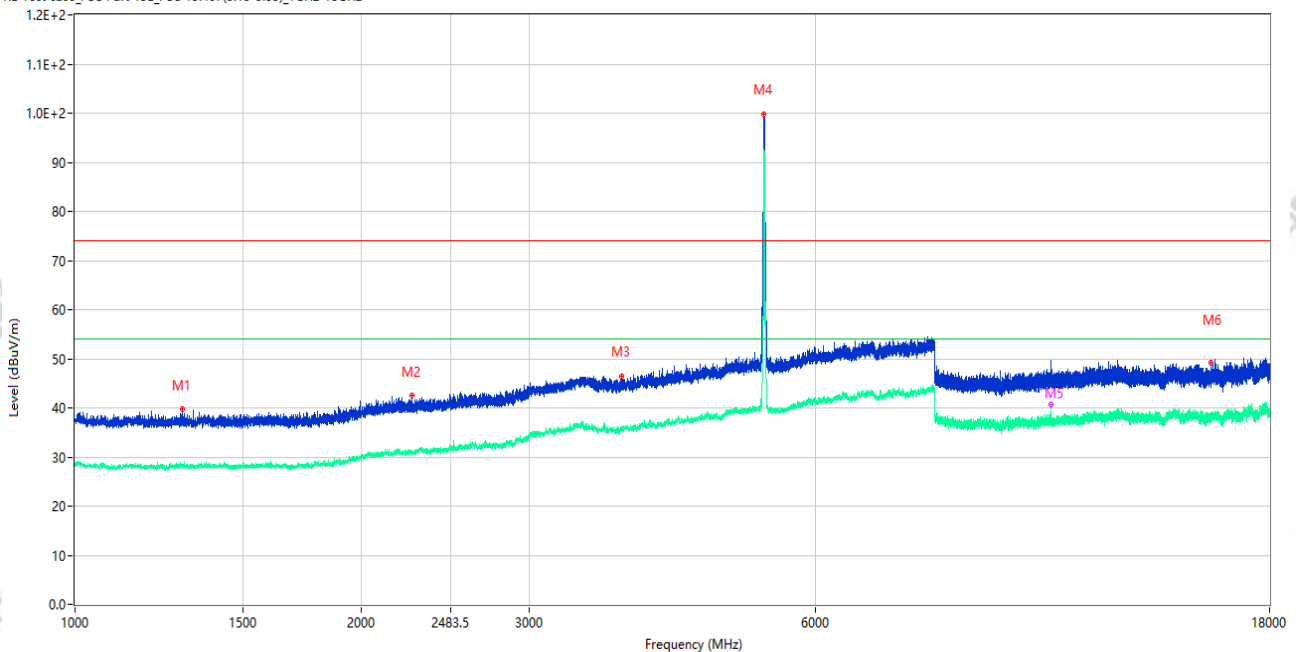

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1295.000	39.66	-15.73	74.0	34.34	Peak	328.00	150	Vertical	Pass
1**	1295.000	28.09	-15.73	54.0	25.91	AV	328.00	150	Vertical	Pass
2	2261.250	42.61	-13.26	74.0	31.39	Peak	319.00	150	Vertical	Pass
2**	2261.250	30.93	-13.26	54.0	23.07	AV	319.00	150	Vertical	Pass
3	3754.500	46.50	-4.72	74.0	27.50	Peak	144.00	150	Vertical	Pass
3**	3754.500	35.71	-4.72	54.0	18.29	AV	144.00	150	Vertical	Pass
4	5298.000	99.77	-2.04	74.0	-25.77	Peak	184.00	150	Vertical	N/A
4**	5298.000	92.31	-2.04	54.0	-38.31	AV	184.00	150	Vertical	N/A
5	10601.813	46.59	-3.67	74.0	27.41	Peak	170.00	150	Vertical	Pass
5**	10601.813	40.63	-3.67	54.0	13.37	AV	170.00	150	Vertical	Pass
6	15614.662	49.27	-2.21	74.0	24.73	Peak	345.00	150	Vertical	Pass
6**	15614.662	37.76	-2.21	54.0	16.24	AV	345.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_17.18.41

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3GWIFI 11n20 CH60


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

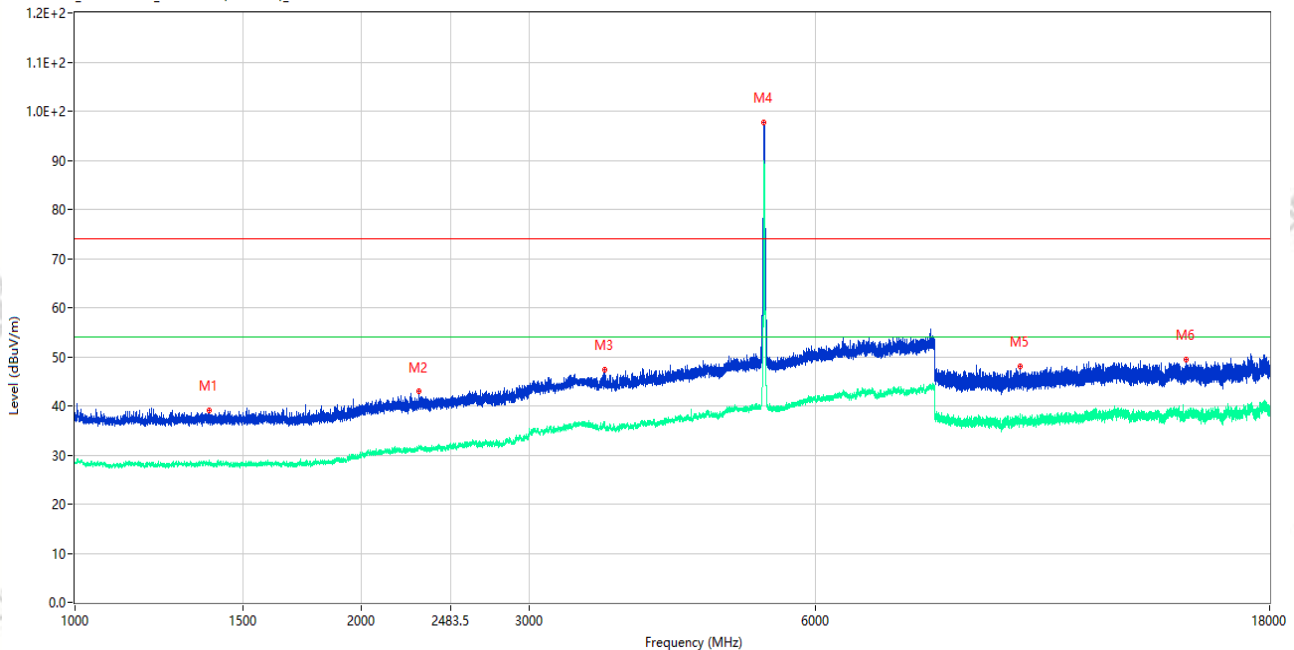

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1384.250	39.11	-15.97	74.0	34.89	Peak	70.00	150	Horizontal	Pass
1**	1384.250	28.64	-15.97	54.0	25.36	AV	70.00	150	Horizontal	Pass
2	2297.500	43.01	-13.19	74.0	30.99	Peak	343.00	150	Horizontal	Pass
2**	2297.500	31.50	-13.19	54.0	22.50	AV	343.00	150	Horizontal	Pass
3	3598.500	47.29	-5.07	74.0	26.71	Peak	360.00	150	Horizontal	Pass
3**	3598.500	36.73	-5.07	54.0	17.27	AV	360.00	150	Horizontal	Pass
4	5295.000	97.73	-2.00	74.0	-23.73	Peak	2.00	150	Horizontal	N/A
4**	5295.000	89.02	-2.00	54.0	-35.02	AV	2.00	150	Horizontal	N/A
5	9839.200	48.12	-3.89	74.0	25.88	Peak	0.00	150	Horizontal	Pass
5**	9839.200	36.54	-3.89	54.0	17.46	AV	0.00	150	Horizontal	Pass
6	14723.213	49.51	-1.74	74.0	24.49	Peak	12.00	150	Horizontal	Pass
6**	14723.213	38.22	-1.74	54.0	15.78	AV	12.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_17.40.38

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3GWIFI 11n40 CH54


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

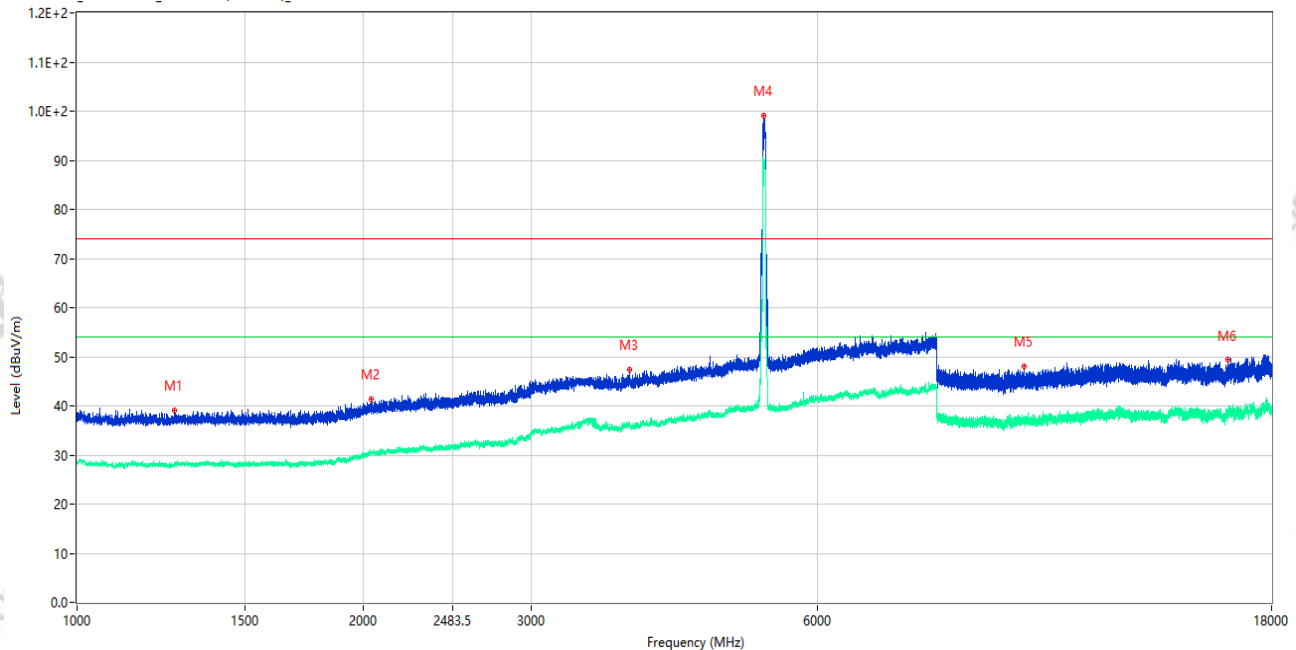

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1266.000	39.06	-15.94	74.0	34.94	Peak	70.00	150	Vertical	Pass
1**	1266.000	28.51	-15.94	54.0	25.49	AV	70.00	150	Vertical	Pass
2	2035.250	41.36	-13.37	74.0	32.64	Peak	75.00	150	Vertical	Pass
2**	2035.250	30.51	-13.37	54.0	23.49	AV	75.00	150	Vertical	Pass
3	3804.000	47.24	-4.38	74.0	26.76	Peak	60.00	150	Vertical	Pass
3**	3804.000	36.14	-4.38	54.0	17.86	AV	60.00	150	Vertical	Pass
4	5267.000	99.02	-2.39	74.0	-25.02	Peak	180.00	150	Vertical	N/A
4**	5267.000	89.92	-2.39	54.0	-35.92	AV	180.00	150	Vertical	N/A
5	9887.412	48.15	-4.11	74.0	25.85	Peak	120.00	150	Vertical	Pass
5**	9887.412	37.43	-4.11	54.0	16.57	AV	120.00	150	Vertical	Pass
6	16203.975	49.47	-1.21	74.0	24.53	Peak	245.00	150	Vertical	Pass
6**	16203.975	38.38	-1.21	54.0	15.62	AV	245.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_17.34.48

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3GWIFI 11n40 CH54


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

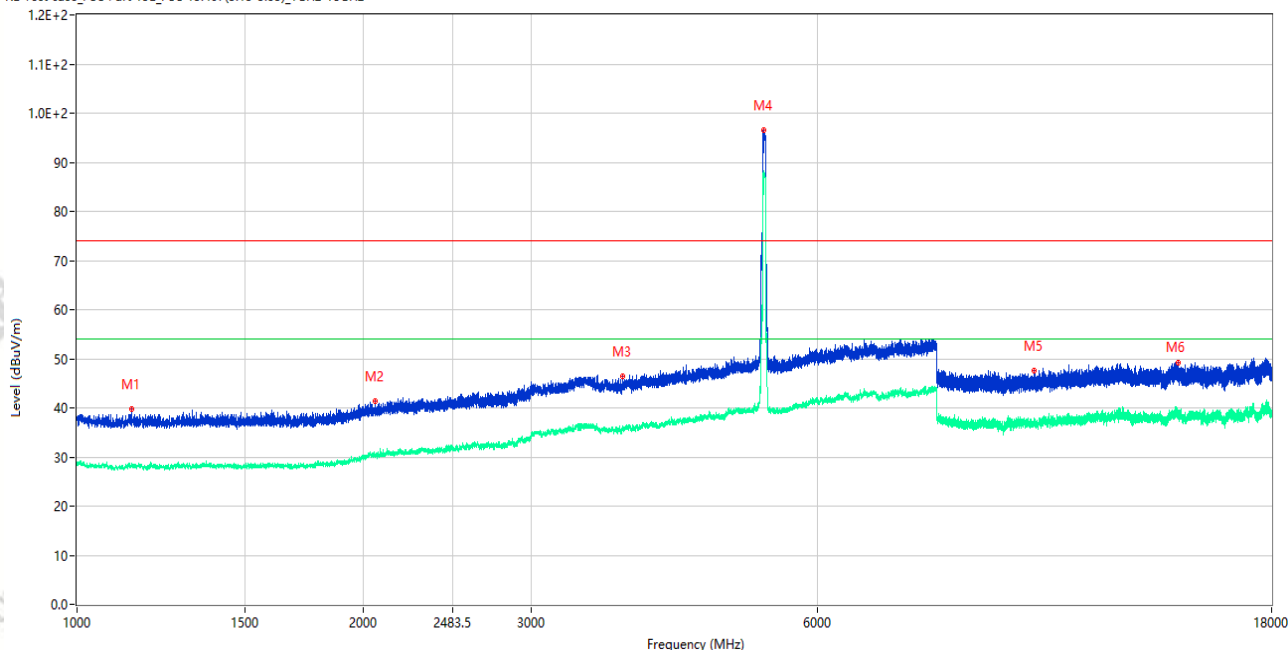

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1142.500	39.74	-15.58	74.0	34.26	Peak	248.00	150	Horizontal	Pass
1**	1142.500	28.26	-15.58	54.0	25.74	AV	248.00	150	Horizontal	Pass
2	2058.250	41.38	-13.87	74.0	32.62	Peak	191.00	150	Horizontal	Pass
2**	2058.250	30.42	-13.87	54.0	23.58	AV	191.00	150	Horizontal	Pass
3	3742.500	46.40	-4.76	74.0	27.60	Peak	360.00	150	Horizontal	Pass
3**	3742.500	35.70	-4.76	54.0	18.30	AV	360.00	150	Horizontal	Pass
4	5267.500	96.53	-2.40	74.0	-22.53	Peak	360.00	150	Horizontal	N/A
4**	5267.500	88.04	-2.40	54.0	-34.04	AV	360.00	150	Horizontal	N/A
5	10124.200	47.52	-4.07	74.0	26.48	Peak	216.00	150	Horizontal	Pass
5**	10124.200	36.76	-4.07	54.0	17.24	AV	216.00	150	Horizontal	Pass
6	14368.050	49.30	-1.38	74.0	24.70	Peak	107.00	150	Horizontal	Pass
6**	14368.050	38.71	-1.38	54.0	15.29	AV	107.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_18.00.53

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3GWIFI 11ac80 CH58


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

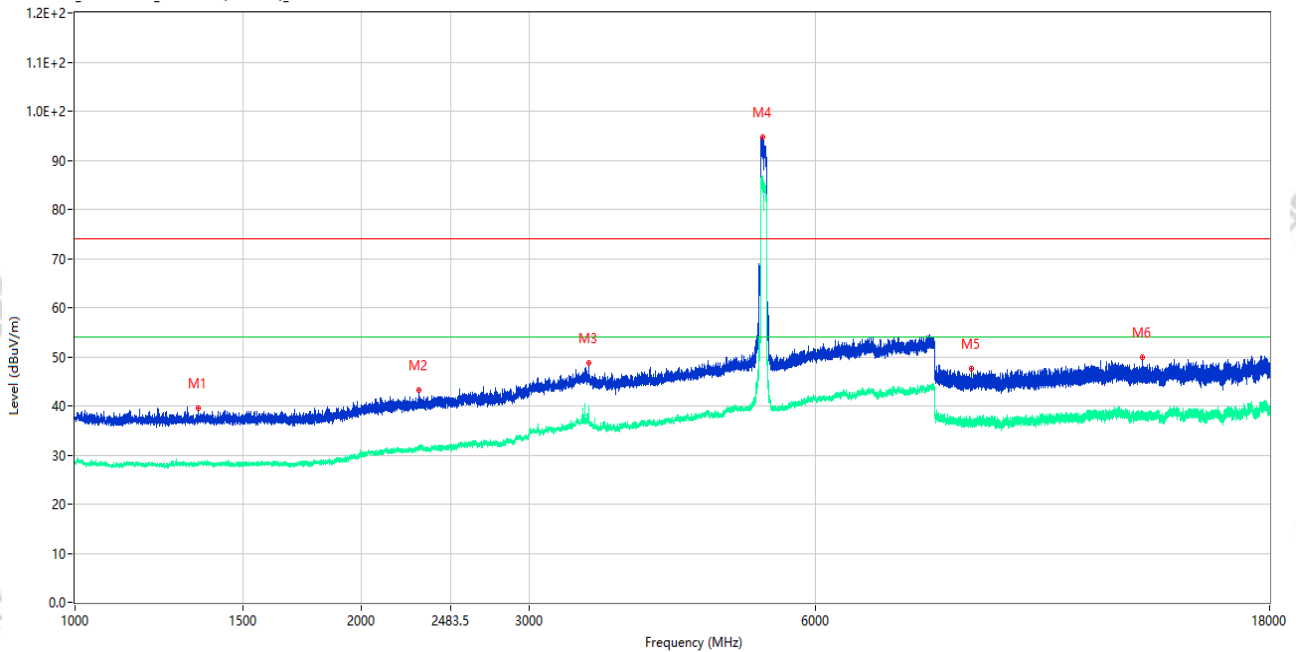

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1348.250	39.54	-16.01	74.0	34.46	Peak	77.00	150	Vertical	Pass
1**	1348.250	28.36	-16.01	54.0	25.64	AV	77.00	150	Vertical	Pass
2	2296.750	43.28	-13.21	74.0	30.72	Peak	144.00	150	Vertical	Pass
2**	2296.750	31.39	-13.21	54.0	22.61	AV	144.00	150	Vertical	Pass
3	3465.000	48.83	-5.10	74.0	25.17	Peak	63.00	150	Vertical	Pass
3**	3465.000	39.45	-5.10	54.0	14.55	AV	63.00	150	Vertical	Pass
4	5280.000	94.68	-2.31	74.0	-20.68	Peak	180.00	150	Vertical	N/A
4**	5280.000	85.91	-2.31	54.0	-31.91	AV	180.00	150	Vertical	N/A
5	8746.937	47.59	-5.09	74.0	26.41	Peak	72.00	150	Vertical	Pass
5**	8746.937	37.05	-5.09	54.0	16.95	AV	72.00	150	Vertical	Pass
6	13220.400	49.87	-2.70	74.0	24.13	Peak	345.00	150	Vertical	Pass
6**	13220.400	38.26	-2.70	54.0	15.74	AV	345.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_18.05.37

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3GWIFI 11ac80 CH58


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

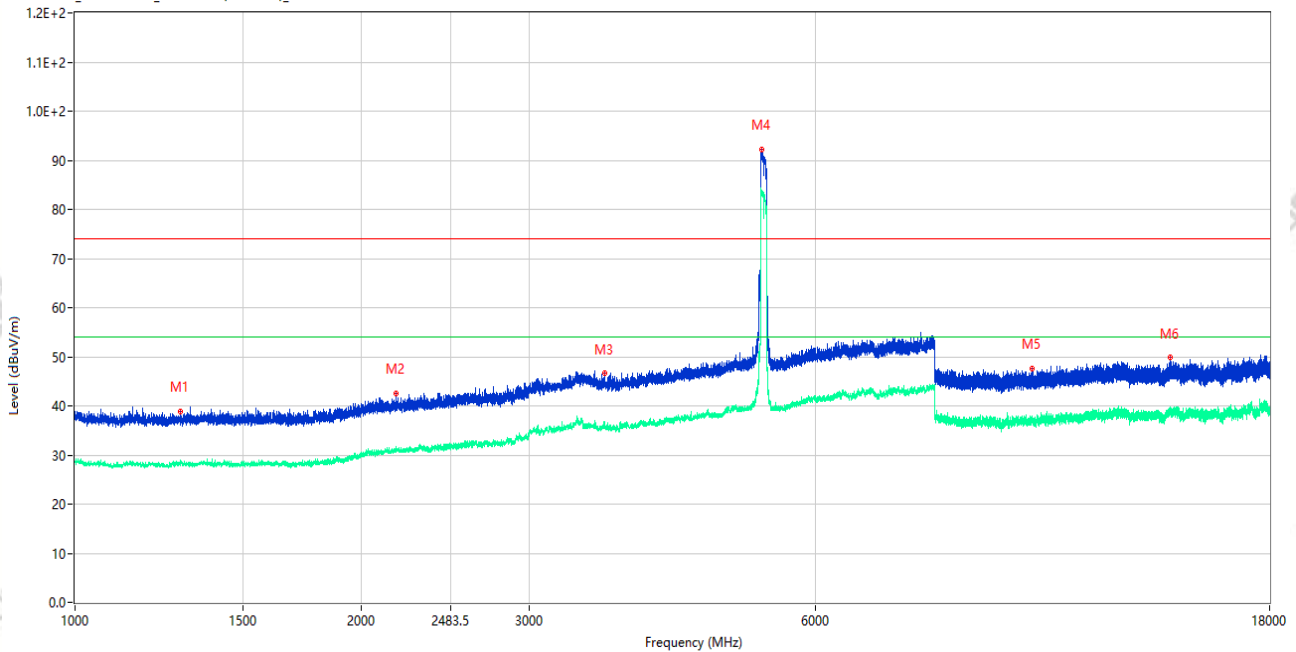

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1290.750	38.74	-15.82	74.0	35.26	Peak	173.00	150	Horizontal	Pass
1**	1290.750	28.44	-15.82	54.0	25.56	AV	173.00	150	Horizontal	Pass
2	2174.750	42.55	-12.94	74.0	31.45	Peak	47.00	150	Horizontal	Pass
2**	2174.750	30.66	-12.94	54.0	23.34	AV	47.00	150	Horizontal	Pass
3	3599.500	46.59	-4.99	74.0	27.41	Peak	229.00	150	Horizontal	Pass
3**	3599.500	36.75	-4.99	54.0	17.25	AV	229.00	150	Horizontal	Pass
4	5269.500	92.22	-2.47	74.0	-18.22	Peak	2.00	150	Horizontal	N/A
4**	5269.500	83.42	-2.47	54.0	-29.42	AV	2.00	150	Horizontal	N/A
5	10140.112	47.61	-4.07	74.0	26.39	Peak	239.00	150	Horizontal	Pass
5**	10140.112	36.77	-4.07	54.0	17.23	AV	239.00	150	Horizontal	Pass
6	14153.326	49.78	-1.25	74.0	24.22	Peak	310.00	150	Horizontal	Pass
6**	14153.326	38.70	-1.25	54.0	15.30	AV	310.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_19.31.04

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6GWIFI 11a CH116


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

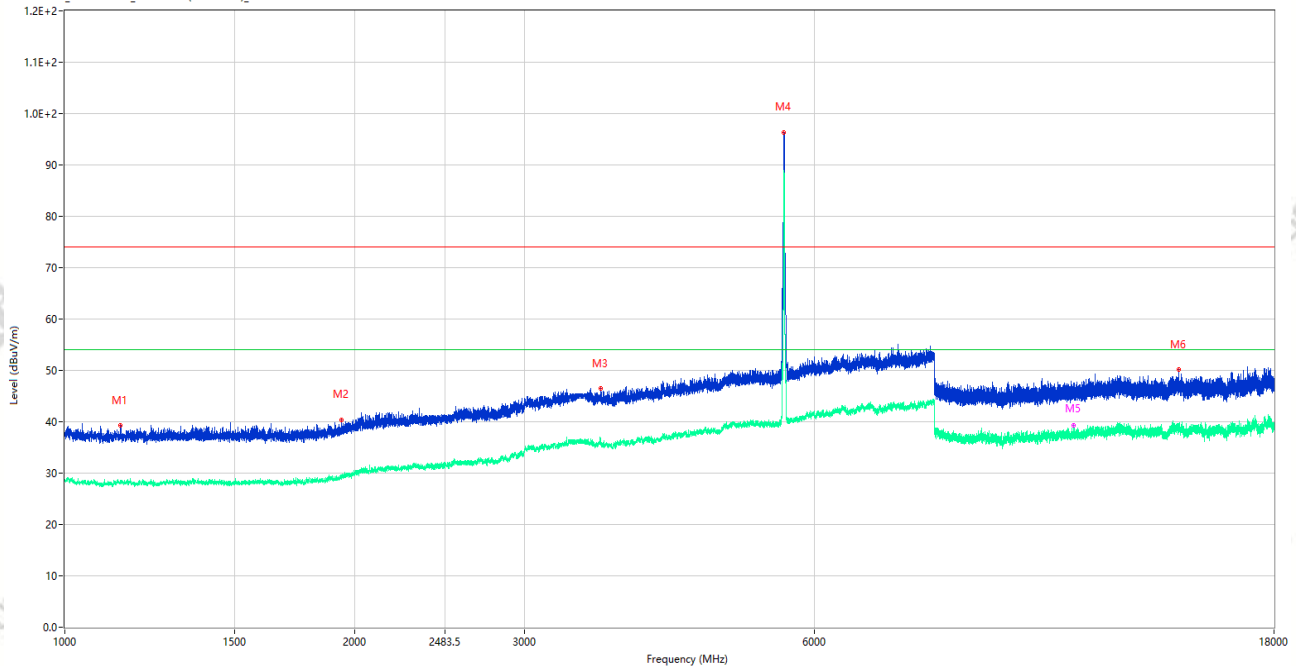

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1141.250	39.25	-15.58	74.0	34.75	Peak	301.00	150	Vertical	Pass
1**	1141.250	28.36	-15.58	54.0	25.64	AV	301.00	150	Vertical	Pass
2	1937.750	40.41	-15.12	74.0	33.59	Peak	360.00	150	Vertical	Pass
2**	1937.750	29.05	-15.12	54.0	24.95	AV	360.00	150	Vertical	Pass
3	3599.000	46.54	-5.03	74.0	27.46	Peak	3.00	150	Vertical	Pass
3**	3599.000	36.61	-5.03	54.0	17.39	AV	3.00	150	Vertical	Pass
4	5577.000	96.23	-2.90	74.0	-22.23	Peak	207.00	150	Vertical	N/A
4**	5577.000	88.56	-2.90	54.0	-34.56	AV	207.00	150	Vertical	N/A
5	11158.750	45.28	-4.02	74.0	28.72	Peak	169.00	150	Vertical	Pass
5**	11158.750	39.34	-4.02	54.0	14.66	AV	169.00	150	Vertical	Pass
6	14344.688	50.13	-2.23	74.0	23.87	Peak	15.00	150	Vertical	Pass
6**	14344.688	38.22	-2.23	54.0	15.78	AV	15.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_19.35.43

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6GWIFI 11a CH116


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

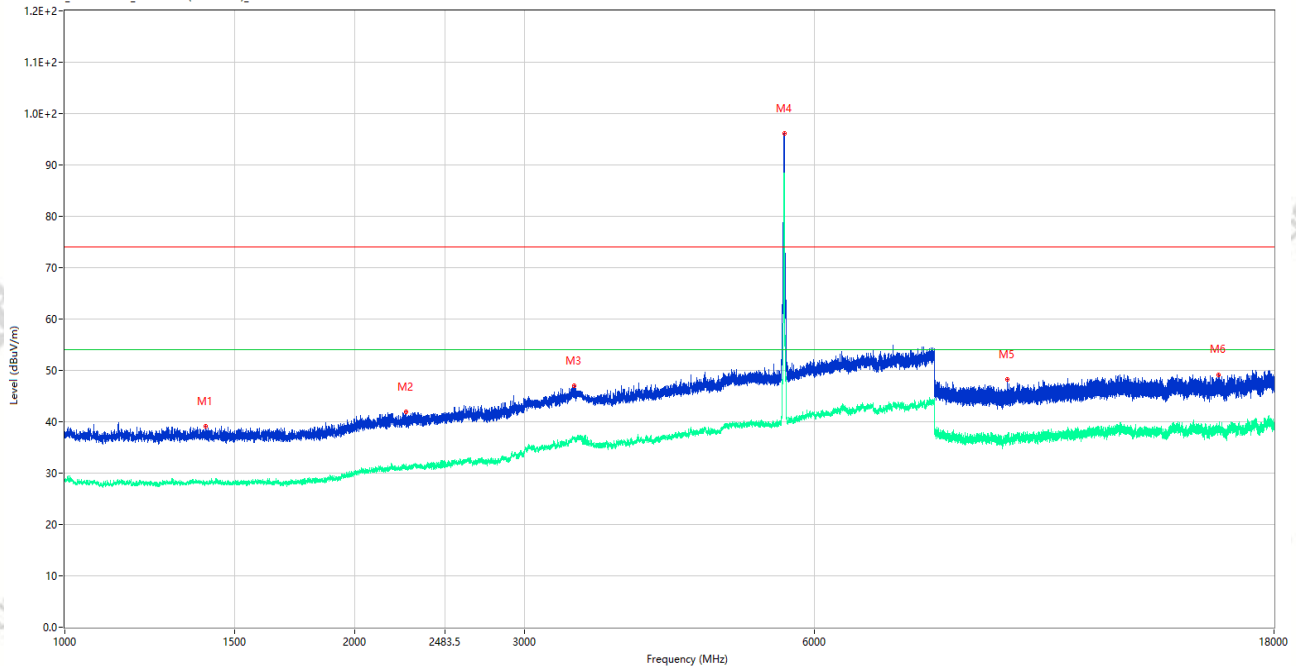

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1399.000	39.04	-15.99	74.0	34.96	Peak	6.00	150	Horizontal	Pass
1**	1399.000	27.81	-15.99	54.0	26.19	AV	6.00	150	Horizontal	Pass
2	2258.500	41.85	-13.20	74.0	32.15	Peak	341.00	150	Horizontal	Pass
2**	2258.500	31.03	-13.20	54.0	22.97	AV	341.00	150	Horizontal	Pass
3	3375.500	46.99	-4.84	74.0	27.01	Peak	108.00	150	Horizontal	Pass
3**	3375.500	36.73	-4.84	54.0	17.27	AV	108.00	150	Horizontal	Pass
4	5586.500	96.09	-2.81	74.0	-22.09	Peak	308.00	150	Horizontal	N/A
4**	5586.500	87.89	-2.81	54.0	-33.89	AV	308.00	150	Horizontal	N/A
5	9513.349	48.23	-2.97	74.0	25.77	Peak	239.00	150	Horizontal	Pass
5**	9513.349	37.12	-2.97	54.0	16.88	AV	239.00	150	Horizontal	Pass
6	15759.037	49.16	-1.96	74.0	24.84	Peak	149.00	150	Horizontal	Pass
6**	15759.037	38.73	-1.96	54.0	15.27	AV	149.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_19.58.35

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6GWIFI 11n20 CH116


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

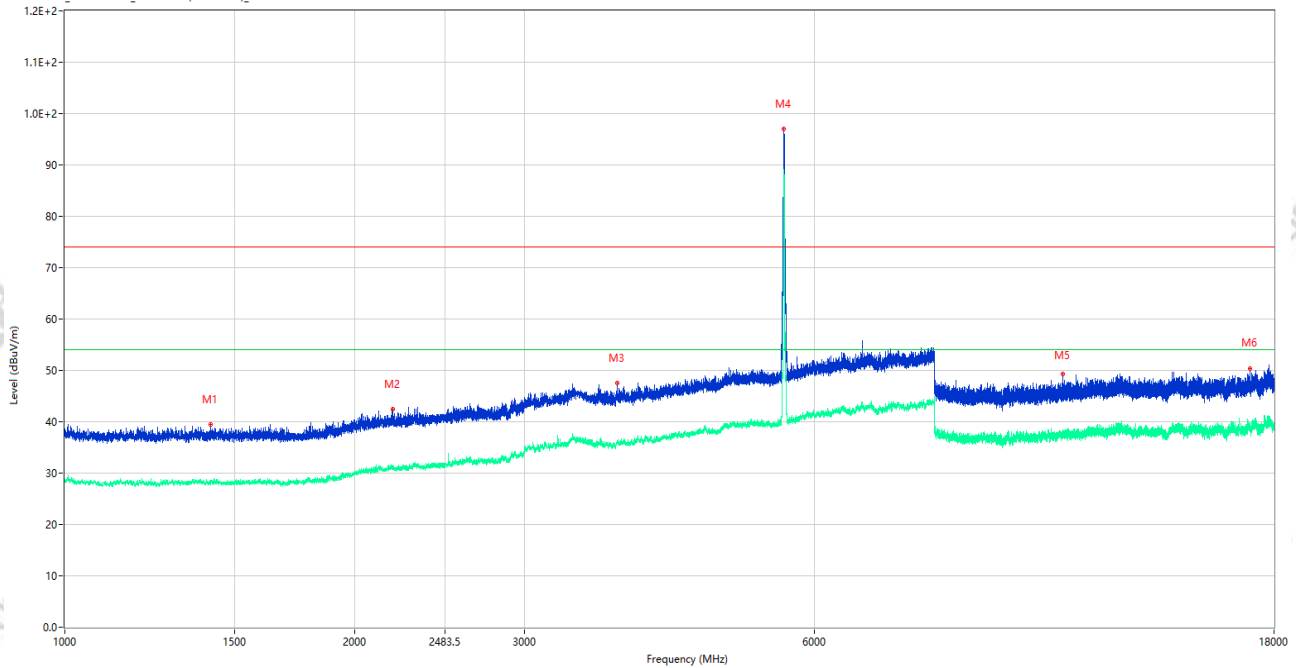

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1418.000	39.40	-15.91	74.0	34.60	Peak	7.00	150	Vertical	Pass
1**	1418.000	27.94	-15.91	54.0	26.06	AV	7.00	150	Vertical	Pass
2	2188.750	42.51	-13.29	74.0	31.49	Peak	7.00	150	Vertical	Pass
2**	2188.750	31.08	-13.29	54.0	22.92	AV	7.00	150	Vertical	Pass
3	3743.000	47.59	-4.71	74.0	26.41	Peak	46.00	150	Vertical	Pass
3**	3743.000	35.75	-4.71	54.0	18.25	AV	46.00	150	Vertical	Pass
4	5576.500	96.96	-2.92	74.0	-22.96	Peak	193.00	150	Vertical	N/A
4**	5576.500	89.10	-2.92	54.0	-35.10	AV	193.00	150	Vertical	N/A
5	10869.474	49.24	-3.27	74.0	24.76	Peak	72.00	150	Vertical	Pass
5**	10869.474	38.26	-3.27	54.0	15.74	AV	72.00	150	Vertical	Pass
6	16984.651	50.40	-1.25	74.0	23.60	Peak	345.00	150	Vertical	Pass
6**	16984.651	38.98	-1.25	54.0	15.02	AV	345.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_19.53.23

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6GWIFI 11n20 CH116


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

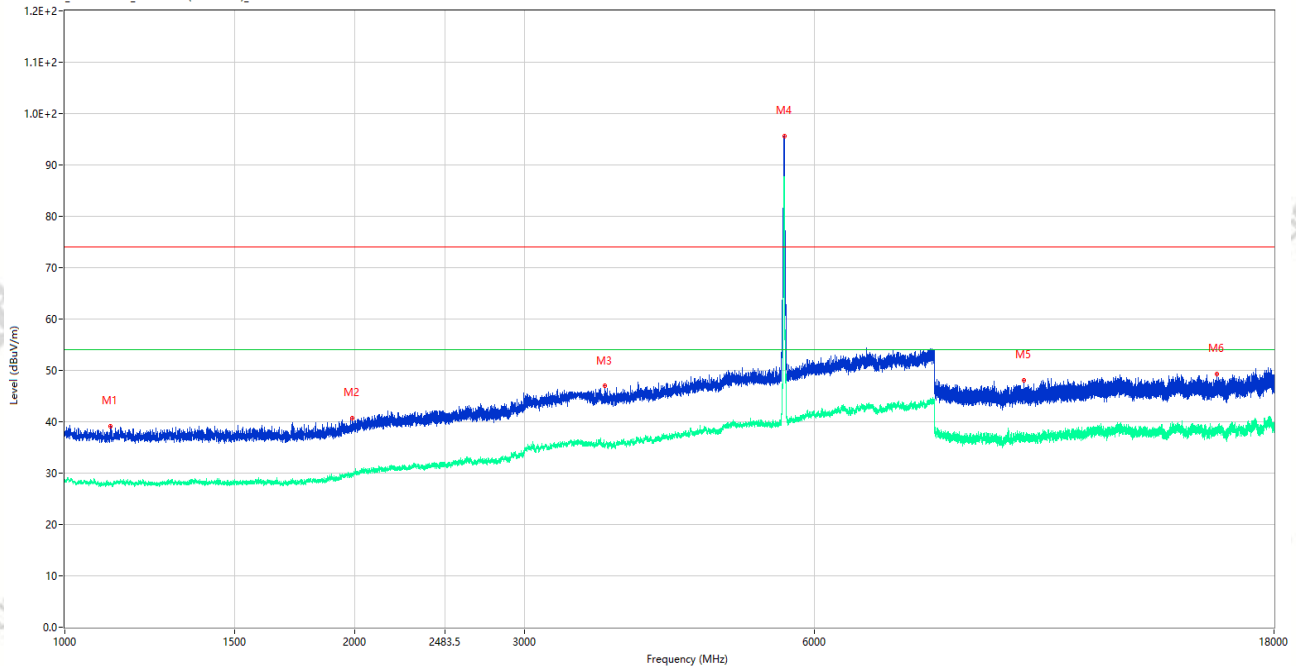

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1114.750	39.20	-15.78	74.0	34.80	Peak	45.00	150	Horizontal	Pass
1**	1114.750	27.77	-15.78	54.0	26.23	AV	45.00	150	Horizontal	Pass
2	1989.250	40.75	-14.80	74.0	33.25	Peak	0.00	150	Horizontal	Pass
2**	1989.250	29.76	-14.80	54.0	24.24	AV	0.00	150	Horizontal	Pass
3	3634.000	47.03	-5.81	74.0	26.97	Peak	260.00	150	Horizontal	Pass
3**	3634.000	35.20	-5.81	54.0	18.80	AV	260.00	150	Horizontal	Pass
4	5587.500	95.70	-2.84	74.0	-21.70	Peak	290.00	150	Horizontal	N/A
4**	5587.500	87.50	-2.84	54.0	-33.50	AV	290.00	150	Horizontal	N/A
5	9903.563	48.04	-4.39	74.0	25.96	Peak	213.00	150	Horizontal	Pass
5**	9903.563	36.85	-4.39	54.0	17.15	AV	213.00	150	Horizontal	Pass
6	15691.312	49.28	-1.89	74.0	24.72	Peak	360.00	150	Horizontal	Pass
6**	15691.312	38.23	-1.89	54.0	15.77	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_02.47.37

EUT Name: Tablet

Temp.(°C): 23.3

Model Number: P10005L

Humidity (%RH): 51

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6GWIFI 11n40 CH118


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

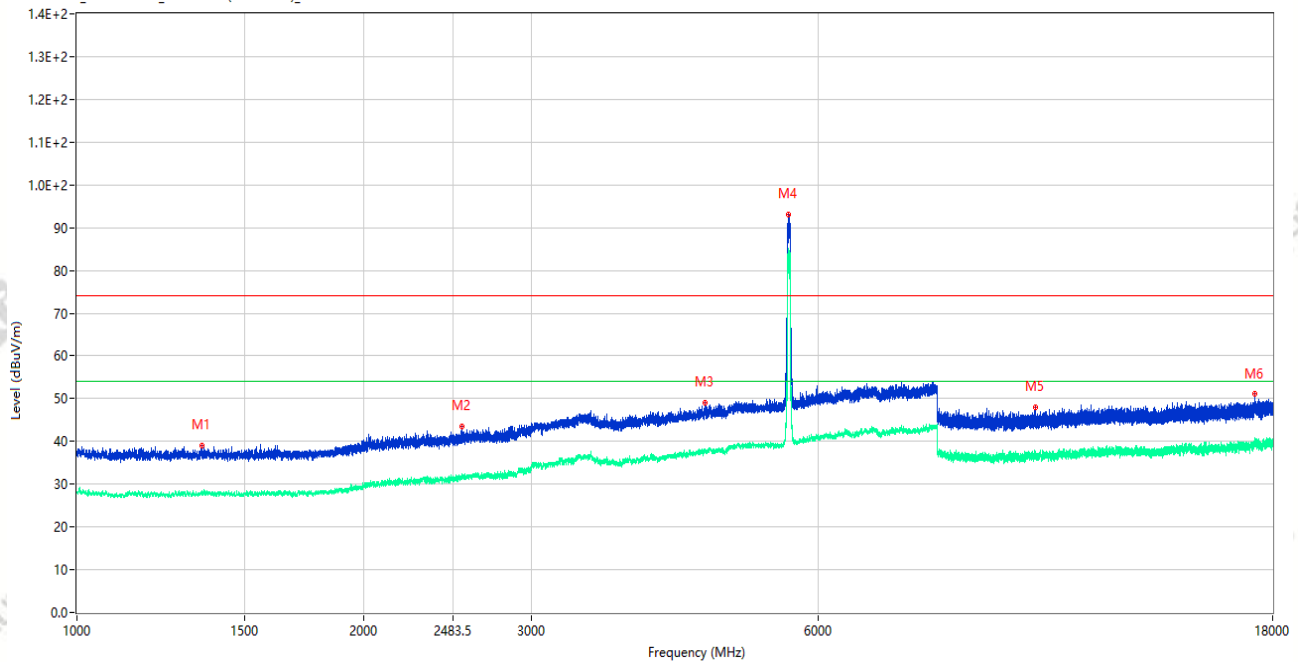

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1352.750	39.11	-15.91	74.0	34.89	Peak	360.00	150	Vertical	Pass
1**	1352.750	27.83	-15.91	54.0	26.17	AV	360.00	150	Vertical	Pass
2	2536.750	43.40	-11.02	74.0	30.60	Peak	15.00	150	Vertical	Pass
2**	2536.750	32.32	-11.02	54.0	21.68	AV	15.00	150	Vertical	Pass
3	4567.500	49.03	-3.02	74.0	24.97	Peak	136.00	150	Vertical	Pass
3**	4567.500	37.77	-3.02	54.0	16.23	AV	136.00	150	Vertical	Pass
4	5577.500	93.13	-2.89	74.0	-19.13	Peak	196.00	150	Vertical	N/A
4**	5577.500	84.13	-2.89	54.0	-30.13	AV	196.00	150	Vertical	N/A
5	10142.963	47.92	-4.18	74.0	26.08	Peak	0.00	150	Vertical	Pass
5**	10142.963	36.79	-4.18	54.0	17.21	AV	0.00	150	Vertical	Pass
6	17255.551	51.02	-0.96	74.0	22.98	Peak	15.00	150	Vertical	Pass
6**	17255.551	39.10	-0.96	54.0	14.90	AV	15.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_02.53.25

EUT Name: Tablet

Temp.(°C): 23.3

Model Number: P10005L

Humidity (%RH): 51

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6GWIFI 11n40 CH118


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

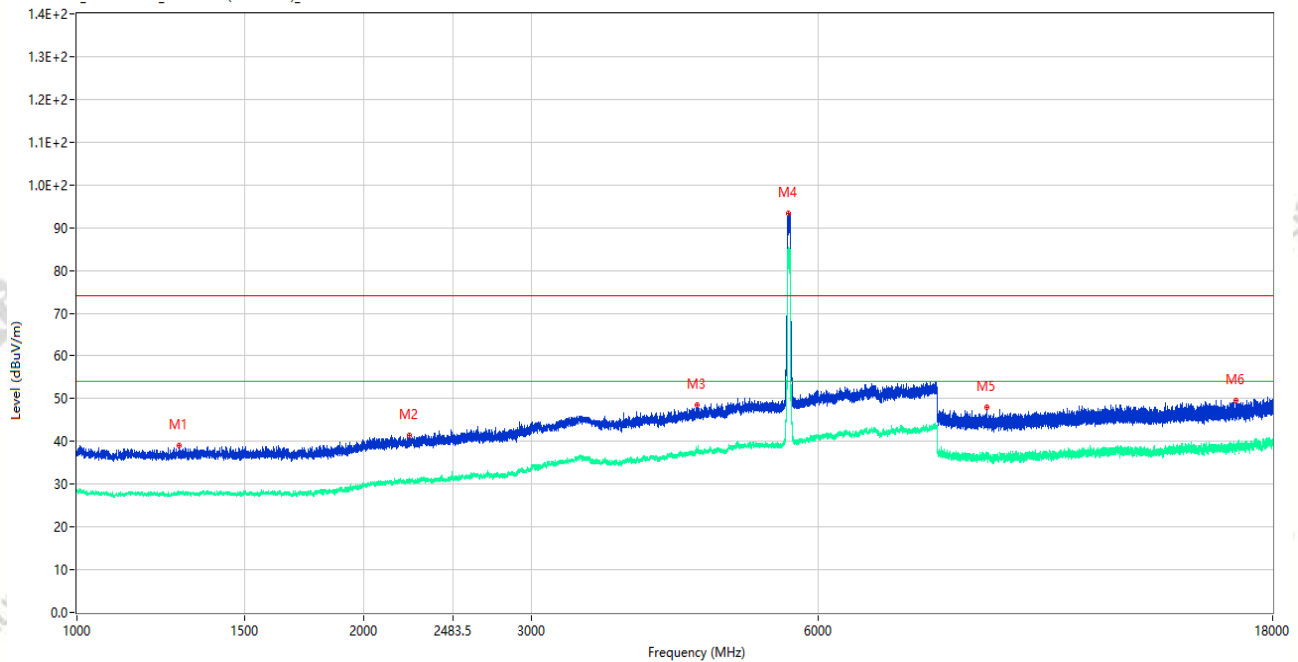

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1279.000	39.09	-15.88	74.0	34.91	Peak	4.00	150	Horizontal	Pass
1**	1279.000	27.91	-15.88	54.0	26.09	AV	4.00	150	Horizontal	Pass
2	2231.750	41.30	-13.08	74.0	32.70	Peak	170.00	150	Horizontal	Pass
2**	2231.750	30.42	-13.08	54.0	23.58	AV	170.00	150	Horizontal	Pass
3	4475.500	48.60	-3.79	74.0	25.40	Peak	315.00	150	Horizontal	Pass
3**	4475.500	37.84	-3.79	54.0	16.16	AV	315.00	150	Horizontal	Pass
4	5580.500	93.41	-2.85	74.0	-19.41	Peak	305.00	150	Horizontal	N/A
4**	5580.500	84.89	-2.85	54.0	-30.89	AV	305.00	150	Horizontal	N/A
5	9026.475	48.05	-4.29	74.0	25.95	Peak	95.00	150	Horizontal	Pass
5**	9026.475	36.55	-4.29	54.0	17.45	AV	95.00	150	Horizontal	Pass
6	16465.425	49.54	-1.84	74.0	24.46	Peak	149.00	150	Horizontal	Pass
6**	16465.425	38.41	-1.84	54.0	15.59	AV	149.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_20.34.56

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6GWIFI 11ac80 CH122


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

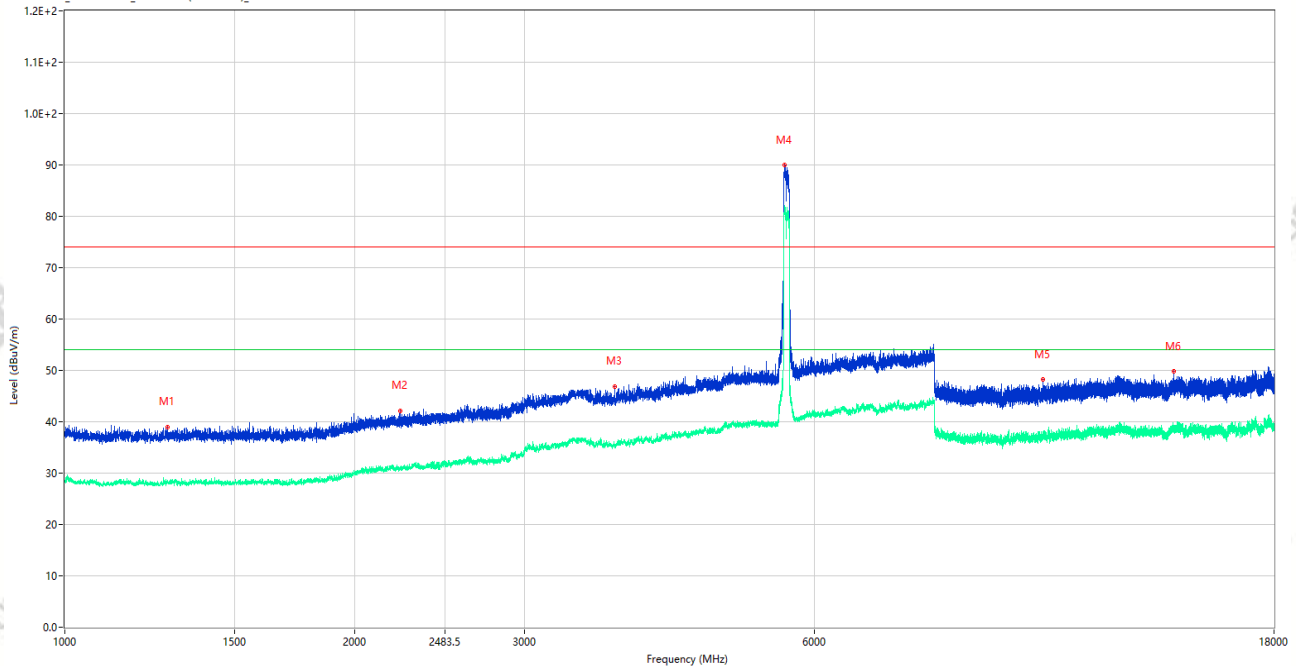

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1279.500	39.03	-15.87	74.0	34.97	Peak	314.00	150	Vertical	Pass
1**	1279.500	28.13	-15.87	54.0	25.87	AV	314.00	150	Vertical	Pass
2	2230.250	42.14	-13.09	74.0	31.86	Peak	194.00	150	Vertical	Pass
2**	2230.250	30.91	-13.09	54.0	23.09	AV	194.00	150	Vertical	Pass
3	3721.500	46.82	-5.04	74.0	27.18	Peak	184.00	150	Vertical	Pass
3**	3721.500	35.27	-5.04	54.0	18.73	AV	184.00	150	Vertical	Pass
4	5588.500	89.97	-2.79	74.0	-15.97	Peak	6.00	150	Vertical	N/A
4**	5588.500	80.35	-2.79	54.0	-26.35	AV	6.00	150	Vertical	N/A
5	10366.687	48.17	-3.23	74.0	25.83	Peak	143.00	150	Vertical	Pass
5**	10366.687	36.85	-3.23	54.0	17.15	AV	143.00	150	Vertical	Pass
6	14155.950	49.87	-1.53	74.0	24.13	Peak	142.00	150	Vertical	Pass
6**	14155.950	38.54	-1.53	54.0	15.46	AV	142.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_20.39.16

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6GWIFI 11ac80 CH122


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

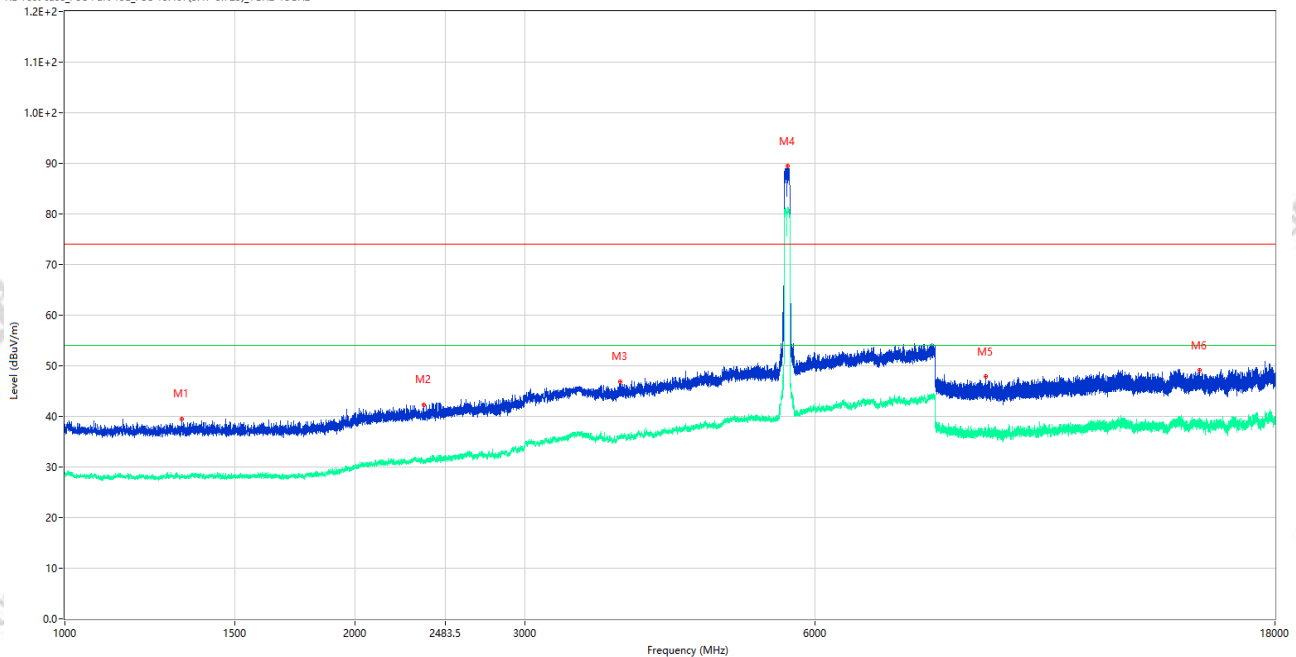

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1323.250	39.53	-15.87	74.0	34.47	Peak	71.00	150	Horizontal	Pass
1**	1323.250	27.92	-15.87	54.0	26.08	AV	71.00	150	Horizontal	Pass
2	2355.000	42.32	-12.65	74.0	31.68	Peak	137.00	150	Horizontal	Pass
2**	2355.000	31.14	-12.65	54.0	22.86	AV	137.00	150	Horizontal	Pass
3	3766.000	46.80	-4.68	74.0	27.20	Peak	81.00	150	Horizontal	Pass
3**	3766.000	35.89	-4.68	54.0	18.11	AV	81.00	150	Horizontal	Pass
4	5617.500	89.44	-2.34	74.0	-15.44	Peak	321.00	150	Horizontal	N/A
4**	5617.500	80.97	-2.34	54.0	-26.97	AV	321.00	150	Horizontal	N/A
5	9021.963	47.83	-4.40	74.0	26.17	Peak	0.00	150	Horizontal	Pass
5**	9021.963	36.74	-4.40	54.0	17.26	AV	0.00	150	Horizontal	Pass
6	15038.737	49.12	-2.10	74.0	24.88	Peak	345.00	150	Horizontal	Pass
6**	15038.737	38.55	-2.10	54.0	15.45	AV	345.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_20.56.33

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8GWIFI 11a CH157


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

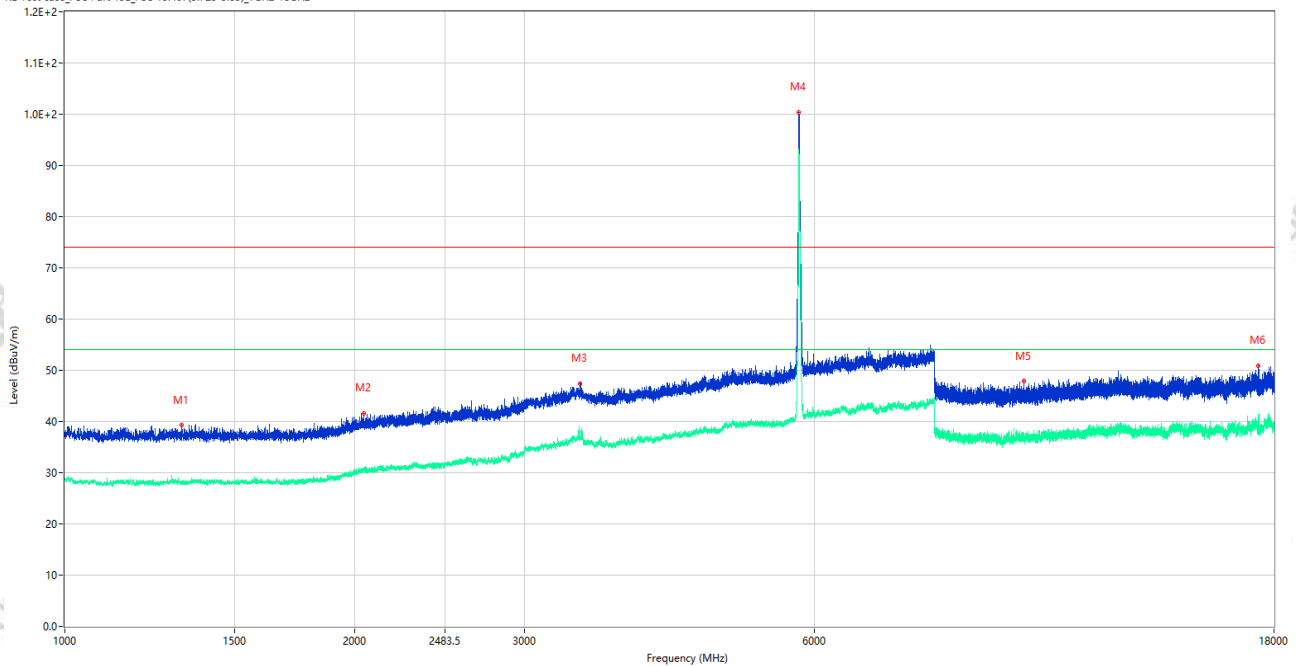

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1322.000	39.29	-15.87	74.0	34.71	Peak	181.00	150	Vertical	Pass
1**	1322.000	28.23	-15.87	54.0	25.77	AV	181.00	150	Vertical	Pass
2	2043.750	41.53	-13.38	74.0	32.47	Peak	291.00	150	Vertical	Pass
2**	2043.750	30.52	-13.38	54.0	23.48	AV	291.00	150	Vertical	Pass
3	3427.000	47.31	-4.94	74.0	26.69	Peak	360.00	150	Vertical	Pass
3**	3427.000	36.55	-4.94	54.0	17.45	AV	360.00	150	Vertical	Pass
4	5781.000	100.37	-1.51	74.0	-26.37	Peak	185.00	150	Vertical	N/A
4**	5781.000	92.72	-1.51	54.0	-38.72	AV	185.00	150	Vertical	N/A
5	9894.537	47.81	-4.32	74.0	26.19	Peak	360.00	150	Vertical	Pass
5**	9894.537	37.36	-4.32	54.0	16.64	AV	360.00	150	Vertical	Pass
6	17349.526	50.94	-0.08	74.0	23.06	Peak	210.00	150	Vertical	Pass
6**	17349.526	39.89	-0.08	54.0	14.11	AV	210.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_21.00.50

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8GWIFI 11a CH157


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_407(5.725-5.85)_1GHz-18GHz

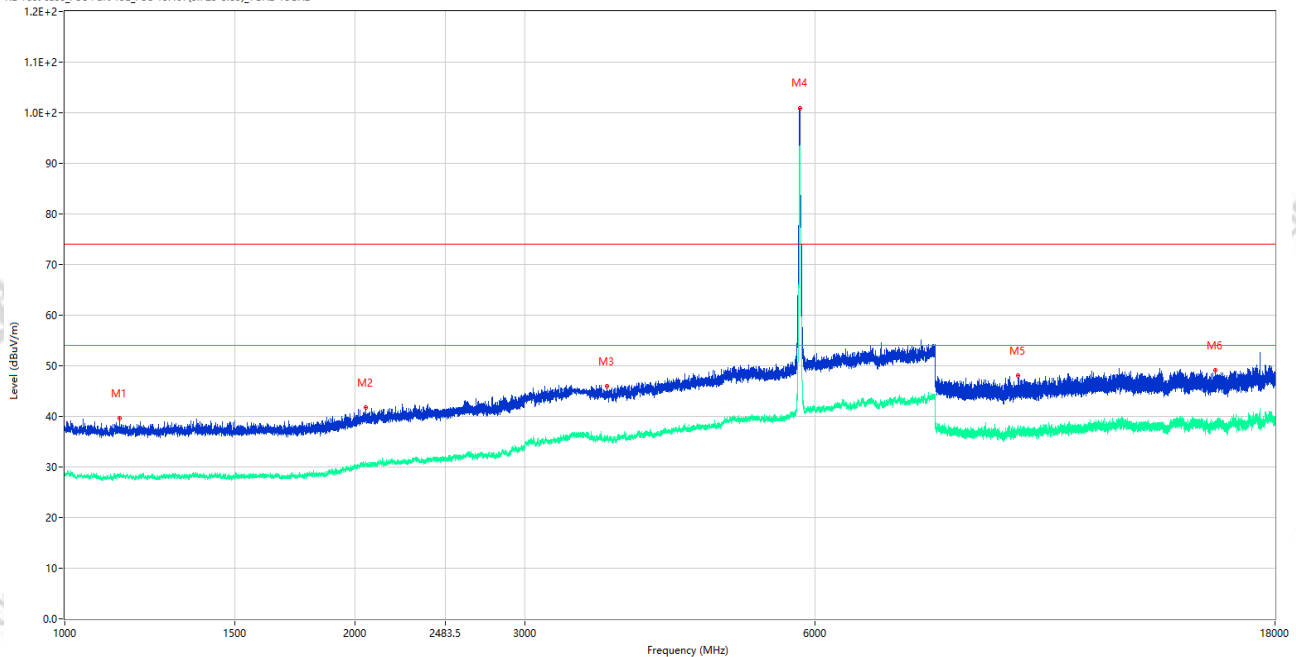

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1140.250	39.58	-15.58	74.0	34.42	Peak	359.00	150	Horizontal	Pass
1**	1140.250	28.09	-15.58	54.0	25.91	AV	359.00	150	Horizontal	Pass
2	2053.500	41.71	-13.74	74.0	32.29	Peak	314.00	150	Horizontal	Pass
2**	2053.500	30.53	-13.74	54.0	23.47	AV	314.00	150	Horizontal	Pass
3	3652.000	46.00	-5.08	74.0	28.00	Peak	211.00	150	Horizontal	Pass
3**	3652.000	35.24	-5.08	54.0	18.76	AV	211.00	150	Horizontal	Pass
4	5788.000	100.94	-1.55	74.0	-26.94	Peak	300.00	150	Horizontal	N/A
4**	5788.000	92.86	-1.55	54.0	-38.86	AV	300.00	150	Horizontal	N/A
5	9738.738	48.06	-4.01	74.0	25.94	Peak	124.00	150	Horizontal	Pass
5**	9738.738	36.93	-4.01	54.0	17.07	AV	124.00	150	Horizontal	Pass
6	15621.224	49.08	-1.80	74.0	24.92	Peak	360.00	150	Horizontal	Pass
6**	15621.224	38.35	-1.80	54.0	15.65	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_21.21.07

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8GWIFI 11n20 CH157


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

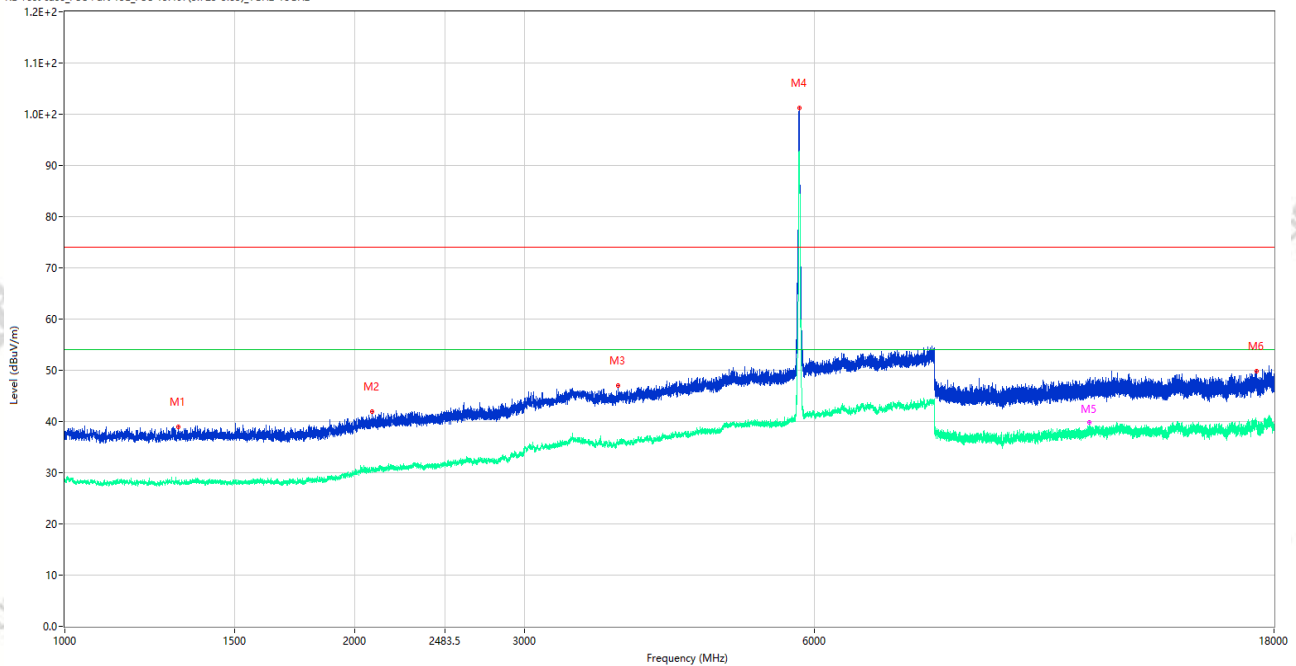

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1312.500	38.91	-15.82	74.0	35.09	Peak	240.00	150	Vertical	Pass
1**	1312.500	28.21	-15.82	54.0	25.79	AV	240.00	150	Vertical	Pass
2	2083.500	41.85	-13.81	74.0	32.15	Peak	353.00	150	Vertical	Pass
2**	2083.500	30.70	-13.81	54.0	23.30	AV	353.00	150	Vertical	Pass
3	3750.500	46.97	-4.72	74.0	27.03	Peak	241.00	150	Vertical	Pass
3**	3750.500	35.89	-4.72	54.0	18.11	AV	241.00	150	Vertical	Pass
4	5789.000	101.23	-1.53	74.0	-27.23	Peak	31.00	150	Vertical	N/A
4**	5789.000	92.73	-1.53	54.0	-38.73	AV	31.00	150	Vertical	N/A
5	11572.475	46.39	-2.50	74.0	27.61	Peak	99.00	150	Vertical	Pass
5**	11572.475	39.77	-2.50	54.0	14.23	AV	99.00	150	Vertical	Pass
6	17272.613	49.79	-1.10	74.0	24.21	Peak	144.00	150	Vertical	Pass
6**	17272.613	39.04	-1.10	54.0	14.96	AV	144.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_21.15.20

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8GWIFI 11n20 CH157


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

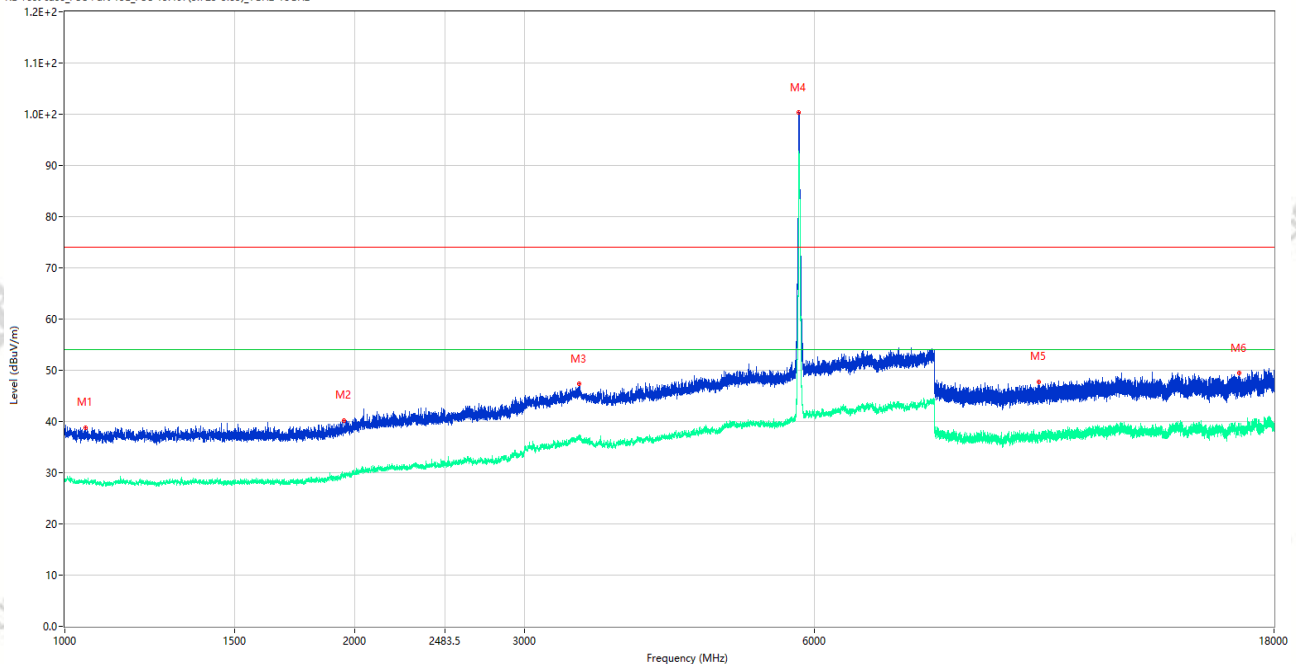

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1049.750	38.78	-15.40	74.0	35.22	Peak	0.00	150	Horizontal	Pass
1**	1049.750	28.10	-15.40	54.0	25.90	AV	0.00	150	Horizontal	Pass
2	1949.500	40.26	-14.84	74.0	33.74	Peak	0.00	150	Horizontal	Pass
2**	1949.500	29.37	-14.84	54.0	24.63	AV	0.00	150	Horizontal	Pass
3	3416.000	47.34	-5.14	74.0	26.66	Peak	143.00	150	Horizontal	Pass
3**	3416.000	37.44	-5.14	54.0	16.56	AV	143.00	150	Horizontal	Pass
4	5780.000	100.32	-1.51	74.0	-26.32	Peak	302.00	150	Horizontal	N/A
4**	5780.000	92.27	-1.51	54.0	-38.27	AV	302.00	150	Horizontal	N/A
5	10255.537	47.77	-3.17	74.0	26.23	Peak	193.00	150	Horizontal	Pass
5**	10255.537	37.37	-3.17	54.0	16.63	AV	193.00	150	Horizontal	Pass
6	16575.675	49.43	-0.71	74.0	24.57	Peak	243.00	150	Horizontal	Pass
6**	16575.675	38.91	-0.71	54.0	15.09	AV	243.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_21.44.29

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8GWIFI 11n40 CH159


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

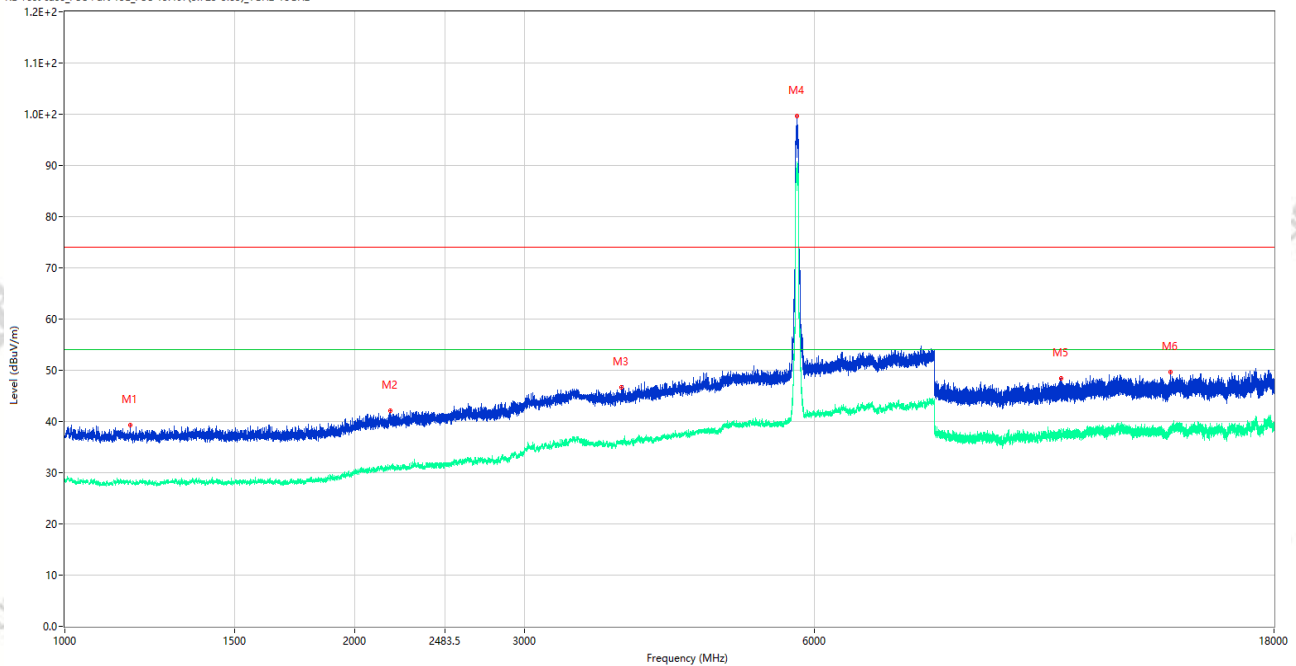

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1169.000	39.36	-15.50	74.0	34.64	Peak	346.00	150	Vertical	Pass
1**	1169.000	28.27	-15.50	54.0	25.73	AV	346.00	150	Vertical	Pass
2	2177.000	42.03	-12.87	74.0	31.97	Peak	222.00	150	Vertical	Pass
2**	2177.000	30.63	-12.87	54.0	23.37	AV	222.00	150	Vertical	Pass
3	3785.000	46.66	-5.33	74.0	27.34	Peak	360.00	150	Vertical	Pass
3**	3785.000	36.02	-5.33	54.0	17.98	AV	360.00	150	Vertical	Pass
4	5758.500	99.62	-1.97	74.0	-25.62	Peak	35.00	150	Vertical	N/A
4**	5758.500	90.45	-1.97	54.0	-36.45	AV	35.00	150	Vertical	N/A
5	10816.513	48.50	-3.04	74.0	25.50	Peak	145.00	150	Vertical	Pass
5**	10816.513	37.47	-3.04	54.0	16.53	AV	145.00	150	Vertical	Pass
6	14053.313	49.68	-1.79	74.0	24.32	Peak	345.00	150	Vertical	Pass
6**	14053.313	38.79	-1.79	54.0	15.21	AV	345.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_21.40.18

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8GWIFI 11n40 CH151


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

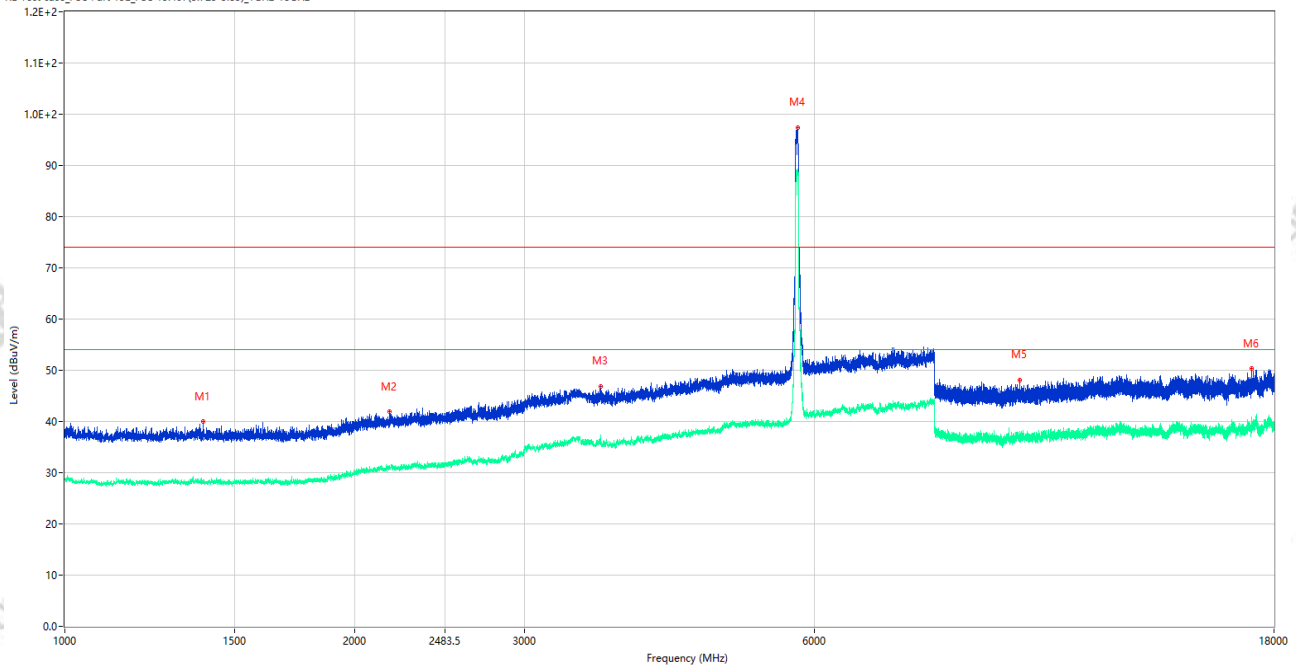

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1391.250	40.00	-16.01	74.0	34.00	Peak	342.00	150	Horizontal	Pass
1**	1391.250	28.24	-16.01	54.0	25.76	AV	342.00	150	Horizontal	Pass
2	2173.000	41.91	-12.95	74.0	32.09	Peak	173.00	150	Horizontal	Pass
2**	2173.000	31.33	-12.95	54.0	22.67	AV	173.00	150	Horizontal	Pass
3	3596.500	46.84	-5.11	74.0	27.16	Peak	5.00	150	Horizontal	Pass
3**	3596.500	36.90	-5.11	54.0	17.10	AV	5.00	150	Horizontal	Pass
4	5765.000	97.39	-1.82	74.0	-23.39	Peak	301.00	150	Horizontal	N/A
4**	5765.000	88.54	-1.82	54.0	-34.54	AV	301.00	150	Horizontal	N/A
5	9800.724	48.12	-3.43	74.0	25.88	Peak	168.00	150	Horizontal	Pass
5**	9800.724	37.64	-3.43	54.0	16.36	AV	168.00	150	Horizontal	Pass
6	17073.113	50.27	-0.66	74.0	23.73	Peak	278.00	150	Horizontal	Pass
6**	17073.113	39.24	-0.66	54.0	14.76	AV	278.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_22.09.52

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8GWIFI 11ac80 CH155


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

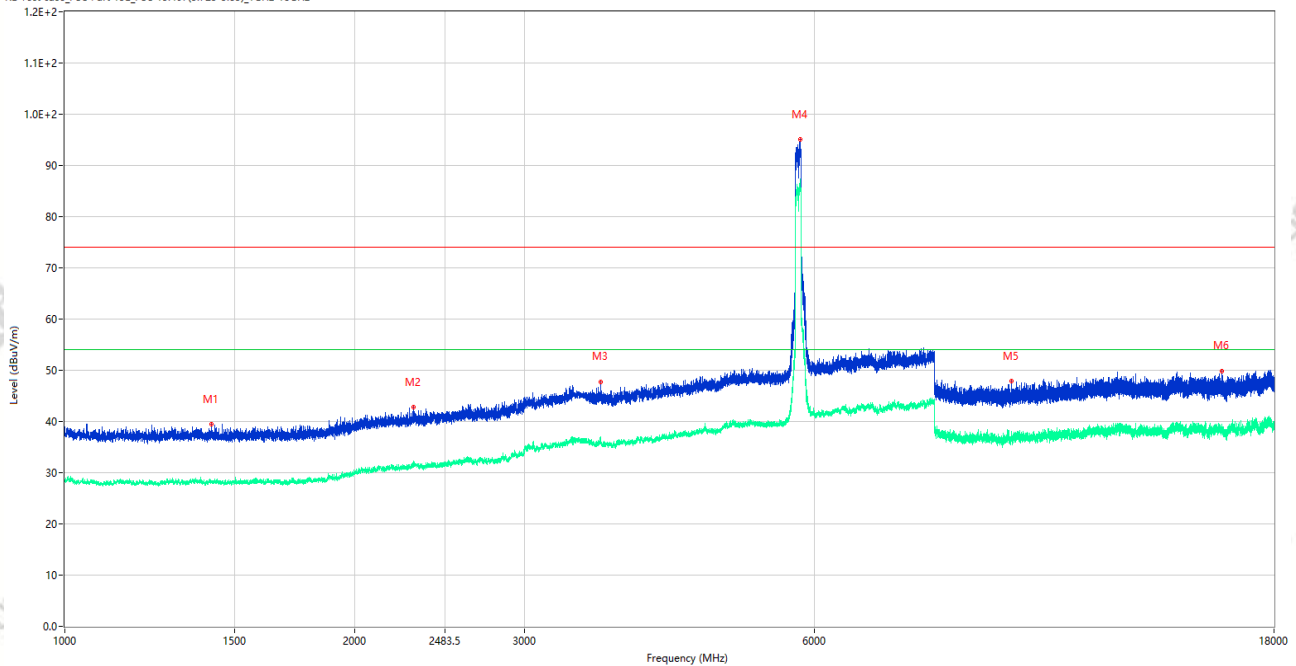

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1419.500	39.43	-15.92	74.0	34.57	Peak	347.00	150	Vertical	Pass
1**	1419.500	28.40	-15.92	54.0	25.60	AV	347.00	150	Vertical	Pass
2	2303.250	42.72	-12.87	74.0	31.28	Peak	260.00	150	Vertical	Pass
2**	2303.250	31.31	-12.87	54.0	22.69	AV	260.00	150	Vertical	Pass
3	3597.000	47.65	-5.11	74.0	26.35	Peak	360.00	150	Vertical	Pass
3**	3597.000	36.50	-5.11	54.0	17.50	AV	360.00	150	Vertical	Pass
4	5801.000	95.12	-1.39	74.0	-21.12	Peak	28.00	150	Vertical	N/A
4**	5801.000	86.87	-1.39	54.0	-32.87	AV	28.00	150	Vertical	N/A
5	9616.663	47.83	-3.45	74.0	26.17	Peak	358.00	150	Vertical	Pass
5**	9616.663	37.28	-3.45	54.0	16.72	AV	358.00	150	Vertical	Pass
6	15894.225	49.84	-1.67	74.0	24.16	Peak	278.00	150	Vertical	Pass
6**	15894.225	38.73	-1.67	54.0	15.27	AV	278.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_22.00.57

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8GWIFI 11ac80 CH155


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

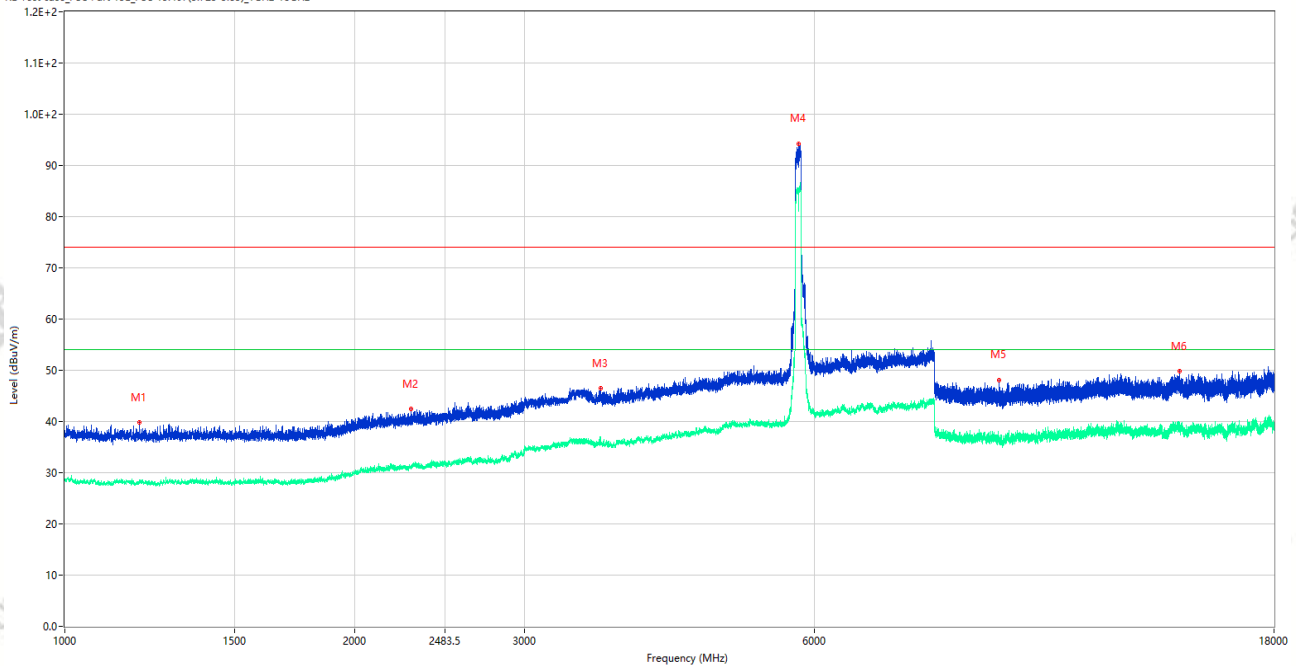

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1194.500	39.75	-15.75	74.0	34.25	Peak	356.00	150	Horizontal	Pass
1**	1194.500	27.97	-15.75	54.0	26.03	AV	356.00	150	Horizontal	Pass
2	2289.250	42.41	-13.01	74.0	31.59	Peak	0.00	150	Horizontal	Pass
2**	2289.250	31.19	-13.01	54.0	22.81	AV	0.00	150	Horizontal	Pass
3	3599.500	46.43	-4.99	74.0	27.57	Peak	302.00	150	Horizontal	Pass
3**	3599.500	36.98	-4.99	54.0	17.02	AV	302.00	150	Horizontal	Pass
4	5781.500	94.29	-1.53	74.0	-20.29	Peak	290.00	150	Horizontal	N/A
4**	5781.500	85.13	-1.53	54.0	-31.13	AV	290.00	150	Horizontal	N/A
5	9326.200	47.98	-5.22	74.0	26.02	Peak	360.00	150	Horizontal	Pass
5**	9326.200	35.78	-5.22	54.0	18.22	AV	360.00	150	Horizontal	Pass
6	14370.413	49.75	-1.49	74.0	24.25	Peak	278.00	150	Horizontal	Pass
6**	14370.413	39.30	-1.49	54.0	14.70	AV	278.00	150	Horizontal	Pass