

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-09_21.38.59

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=14


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

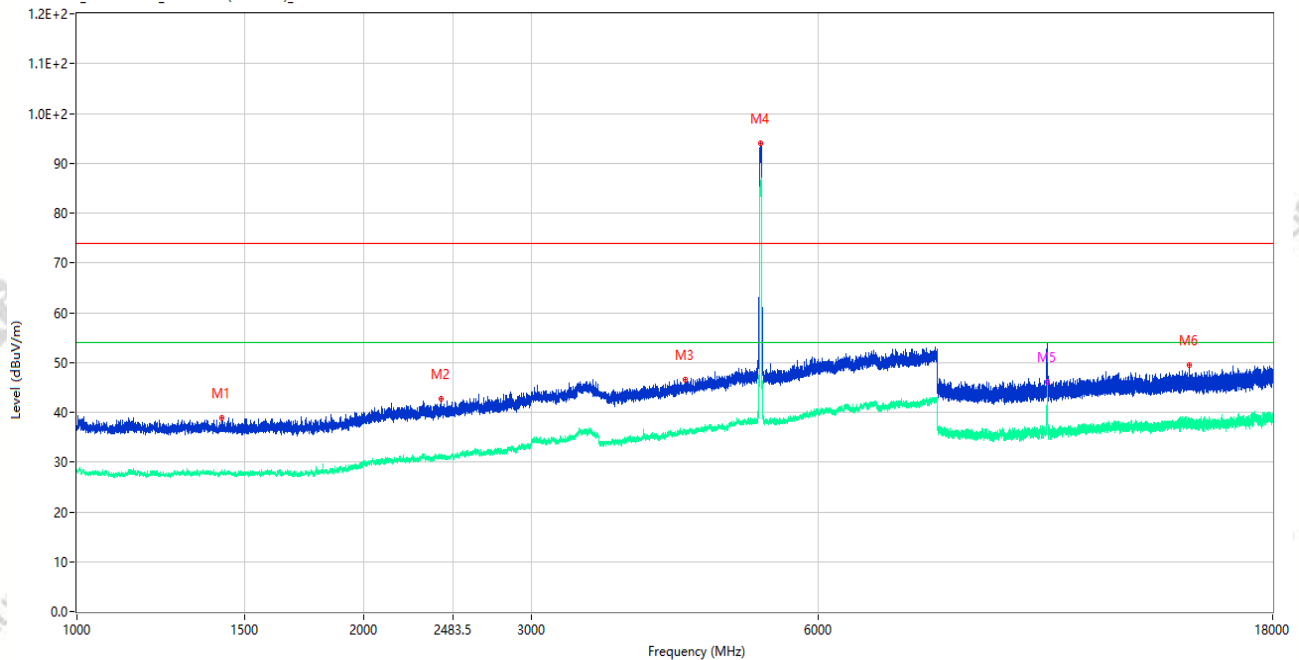

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1418.500	38.89	-15.90	74.0	35.11	Peak	360.00	150	Vertical	Pass
1**	1418.500	28.10	-15.90	54.0	25.90	AV	360.00	150	Vertical	Pass
2	2414.000	42.75	-12.55	74.0	31.25	Peak	349.00	150	Vertical	Pass
2**	2414.000	30.80	-12.55	54.0	23.20	AV	349.00	150	Vertical	Pass
3	4355.000	46.53	-3.48	74.0	27.47	Peak	59.00	150	Vertical	Pass
3**	4355.000	36.15	-3.48	54.0	17.85	AV	59.00	150	Vertical	Pass
4	5226.000	93.93	-2.32	74.0	-19.93	Peak	237.00	150	Vertical	N/A
4**	5226.000	85.65	-2.32	54.0	-31.65	AV	237.00	150	Vertical	N/A
5	10440.549	51.84	-3.38	74.0	22.16	Peak	360.00	150	Vertical	Pass
5**	10440.549	46.01	-3.38	54.0	7.99	AV	360.00	150	Vertical	Pass
6	14729.775	49.48	-1.70	74.0	24.52	Peak	283.00	150	Vertical	Pass
6**	14729.775	37.60	-1.70	54.0	16.40	AV	283.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-09_21.43.18

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=14


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

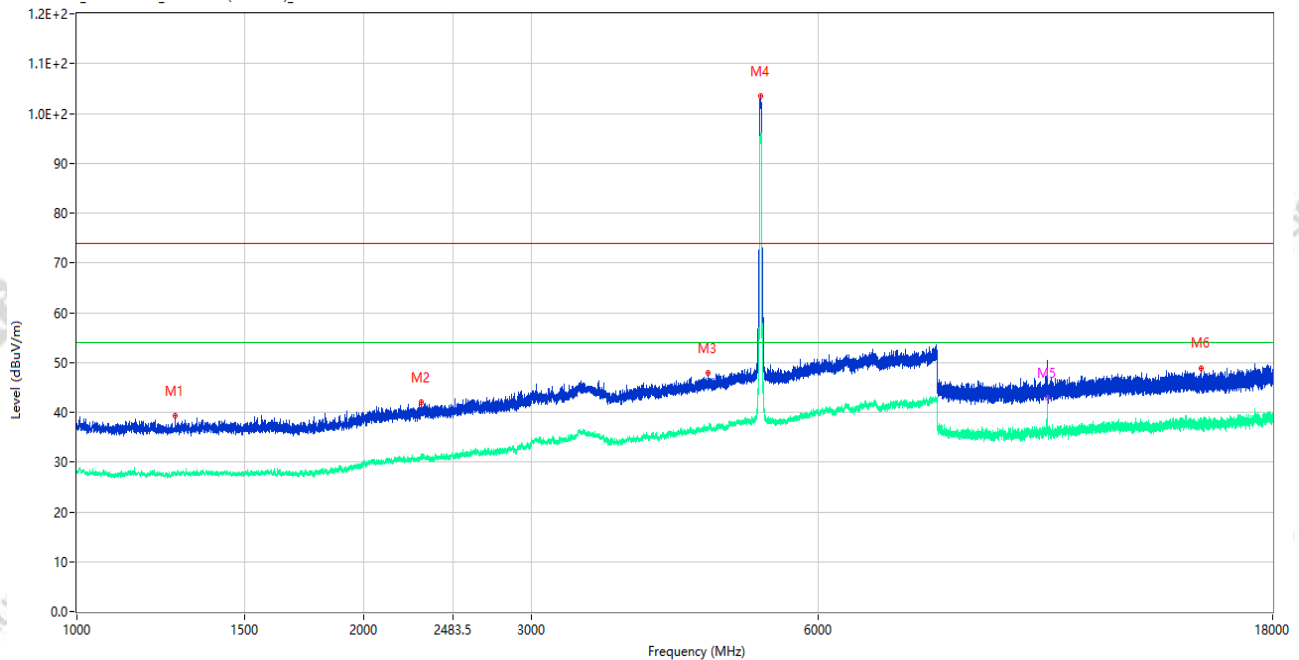

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1268.250	39.22	-15.93	74.0	34.78	Peak	22.00	150	Horizontal	Pass
1**	1268.250	27.79	-15.93	54.0	26.21	AV	22.00	150	Horizontal	Pass
2	2296.500	42.05	-13.20	74.0	31.95	Peak	63.00	150	Horizontal	Pass
2**	2296.500	31.18	-13.20	54.0	22.82	AV	63.00	150	Horizontal	Pass
3	4595.500	47.83	-3.41	74.0	26.17	Peak	11.00	150	Horizontal	Pass
3**	4595.500	36.68	-3.41	54.0	17.32	AV	11.00	150	Horizontal	Pass
4	5224.000	103.51	-2.34	74.0	-29.51	Peak	48.00	150	Horizontal	N/A
4**	5224.000	95.87	-2.34	54.0	-41.87	AV	48.00	150	Horizontal	N/A
5	10441.026	47.48	-3.33	74.0	26.52	Peak	217.00	150	Horizontal	Pass
5**	10441.026	42.92	-3.33	54.0	11.08	AV	217.00	150	Horizontal	Pass
6	15129.825	48.92	-2.33	74.0	25.08	Peak	286.00	150	Horizontal	Pass
6**	15129.825	37.91	-2.33	54.0	16.09	AV	286.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-09_21.54.58

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac20 CH44 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

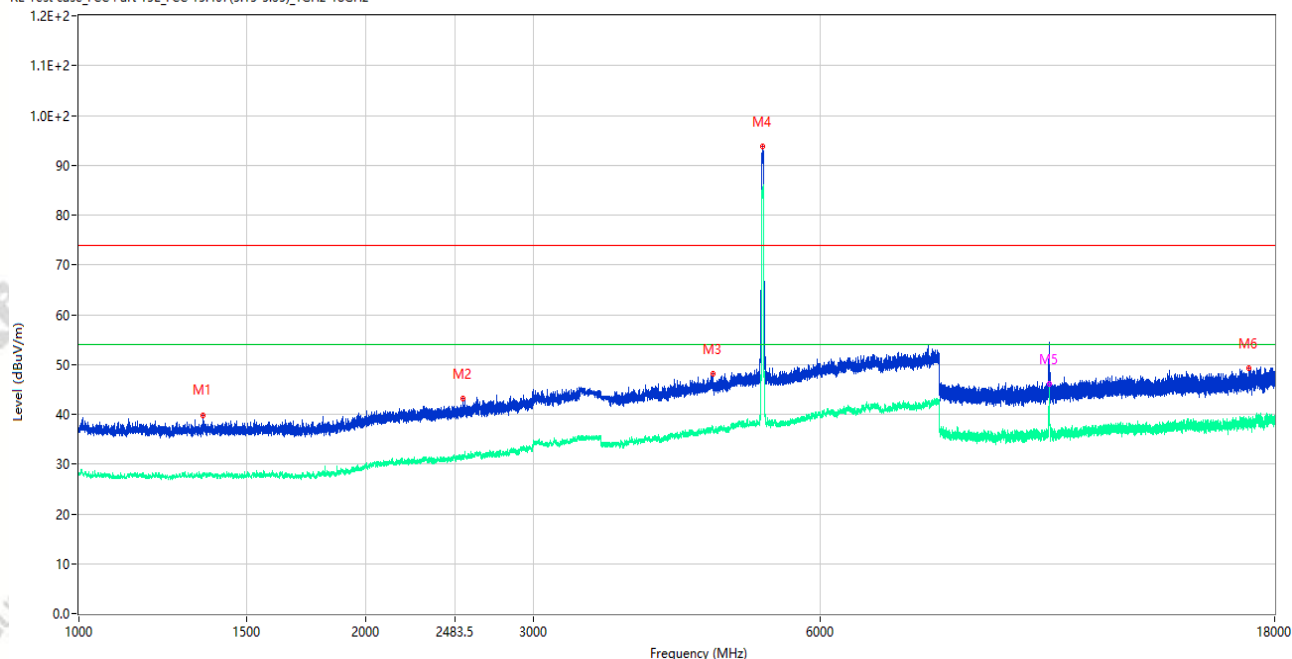

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1349.000	39.88	-15.99	74.0	34.12	Peak	106.00	150	Vertical	Pass
1**	1349.000	27.73	-15.99	54.0	26.27	AV	106.00	150	Vertical	Pass
2	2530.750	43.05	-11.34	74.0	30.95	Peak	360.00	150	Vertical	Pass
2**	2530.750	31.38	-11.34	54.0	22.62	AV	360.00	150	Vertical	Pass
3	4629.000	48.22	-2.59	74.0	25.78	Peak	80.00	150	Vertical	Pass
3**	4629.000	36.89	-2.59	54.0	17.11	AV	80.00	150	Vertical	Pass
4	5226.500	93.81	-2.32	74.0	-19.81	Peak	246.00	150	Vertical	N/A
4**	5226.500	85.25	-2.32	54.0	-31.25	AV	246.00	150	Vertical	N/A
5	10440.313	52.08	-3.40	74.0	21.92	Peak	360.00	150	Vertical	Pass
5**	10440.313	46.12	-3.40	54.0	7.88	AV	360.00	150	Vertical	Pass
6	16931.887	49.31	-1.11	74.0	24.69	Peak	285.00	150	Vertical	Pass
6**	16931.887	38.55	-1.11	54.0	15.45	AV	285.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-09_21.50.55

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac20 CH44 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

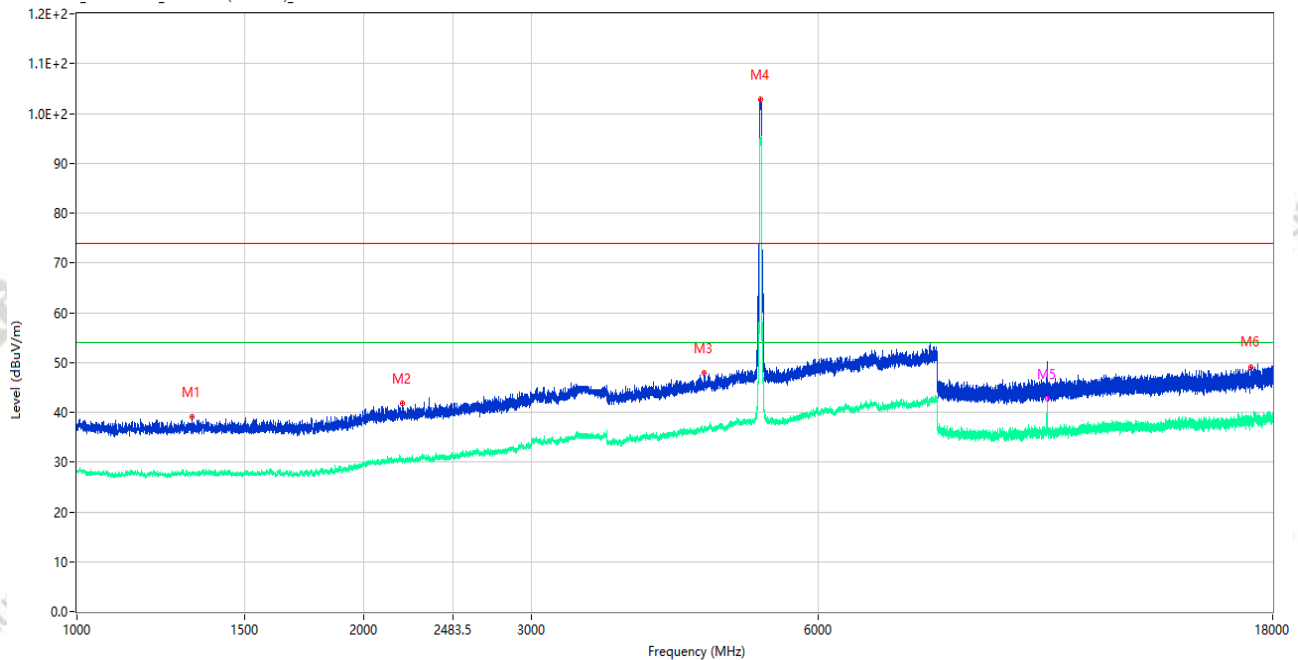

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1320.500	39.07	-15.86	74.0	34.93	Peak	360.00	150	Horizontal	Pass
1**	1320.500	27.72	-15.86	54.0	26.28	AV	360.00	150	Horizontal	Pass
2	2195.750	41.76	-13.32	74.0	32.24	Peak	263.00	150	Horizontal	Pass
2**	2195.750	30.24	-13.32	54.0	23.76	AV	263.00	150	Horizontal	Pass
3	4557.000	47.85	-2.79	74.0	26.15	Peak	11.00	150	Horizontal	Pass
3**	4557.000	36.72	-2.79	54.0	17.28	AV	11.00	150	Horizontal	Pass
4	5223.500	102.89	-2.34	74.0	-28.89	Peak	40.00	150	Horizontal	N/A
4**	5223.500	94.78	-2.34	54.0	-40.78	AV	40.00	150	Horizontal	N/A
5	10441.026	47.31	-3.33	74.0	26.69	Peak	168.00	150	Horizontal	Pass
5**	10441.026	42.66	-3.33	54.0	11.34	AV	168.00	150	Horizontal	Pass
6	17083.088	49.08	-1.10	74.0	24.92	Peak	15.00	150	Horizontal	Pass
6**	17083.088	38.03	-1.10	54.0	15.97	AV	15.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-09_22.07.19

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac40 CH38 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

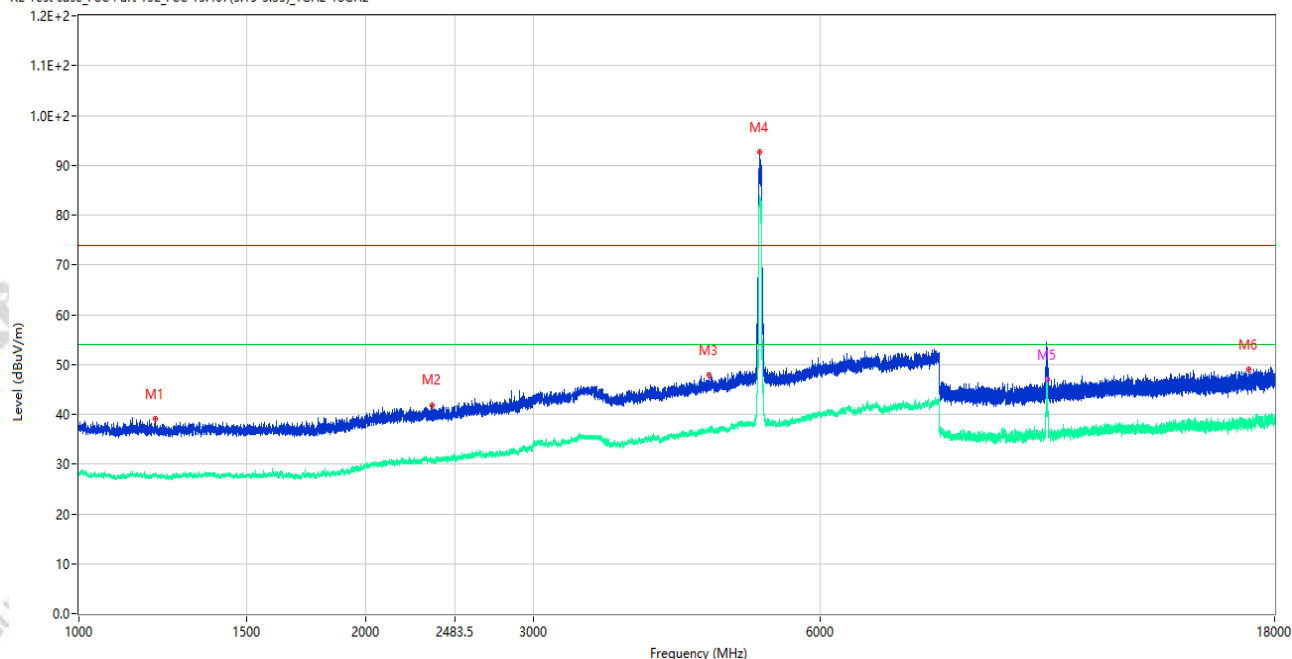

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1204.000	39.06	-15.77	74.0	34.94	Peak	340.00	150	Vertical	Pass
1**	1204.000	27.70	-15.77	54.0	26.30	AV	340.00	150	Vertical	Pass
2	2351.000	41.91	-12.40	74.0	32.09	Peak	254.00	150	Vertical	Pass
2**	2351.000	30.29	-12.40	54.0	23.71	AV	254.00	150	Vertical	Pass
3	4589.500	47.82	-3.36	74.0	26.18	Peak	28.00	150	Vertical	Pass
3**	4589.500	36.88	-3.36	54.0	17.12	AV	28.00	150	Vertical	Pass
4	5186.500	92.69	-2.33	74.0	-18.69	Peak	69.00	150	Vertical	N/A
4**	5186.500	83.62	-2.33	54.0	-29.62	AV	69.00	150	Vertical	N/A
5	10380.225	52.45	-3.39	74.0	21.55	Peak	0.00	150	Vertical	Pass
5**	10380.225	46.93	-3.39	54.0	7.07	AV	0.00	150	Vertical	Pass
6	16892.511	49.04	-0.46	74.0	24.96	Peak	0.00	150	Vertical	Pass
6**	16892.511	38.49	-0.46	54.0	15.51	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-09_22.03.03

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac40 CH38 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

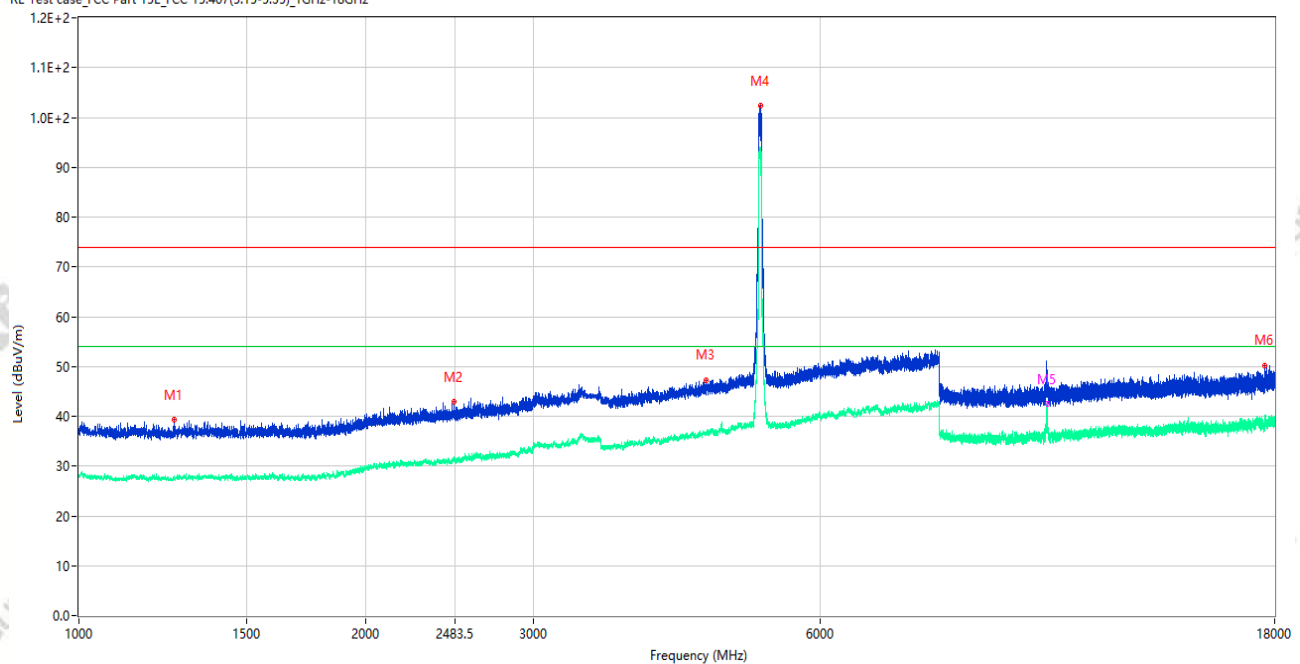

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1259.000	39.39	-16.04	74.0	34.61	Peak	93.00	150	Horizontal	Pass
1**	1259.000	27.64	-16.04	54.0	26.36	AV	93.00	150	Horizontal	Pass
2	2476.750	42.85	-11.07	74.0	31.15	Peak	30.00	150	Horizontal	Pass
2**	2476.750	31.51	-11.07	54.0	22.49	AV	30.00	150	Horizontal	Pass
3	4553.500	47.32	-2.99	74.0	26.68	Peak	92.00	150	Horizontal	Pass
3**	4553.500	36.70	-2.99	54.0	17.30	AV	92.00	150	Horizontal	Pass
4	5195.500	102.32	-2.34	74.0	-28.32	Peak	41.00	150	Horizontal	N/A
4**	5195.500	93.36	-2.34	54.0	-39.36	AV	41.00	150	Horizontal	N/A
5	10381.412	46.79	-3.29	74.0	27.21	Peak	51.00	150	Horizontal	Pass
5**	10381.412	42.56	-3.29	54.0	11.44	AV	51.00	150	Horizontal	Pass
6	17589.187	50.06	0.69	74.0	23.94	Peak	285.00	150	Horizontal	Pass
6**	17589.187	38.82	0.69	54.0	15.18	AV	285.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-09_22.20.38

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac80 CH42 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

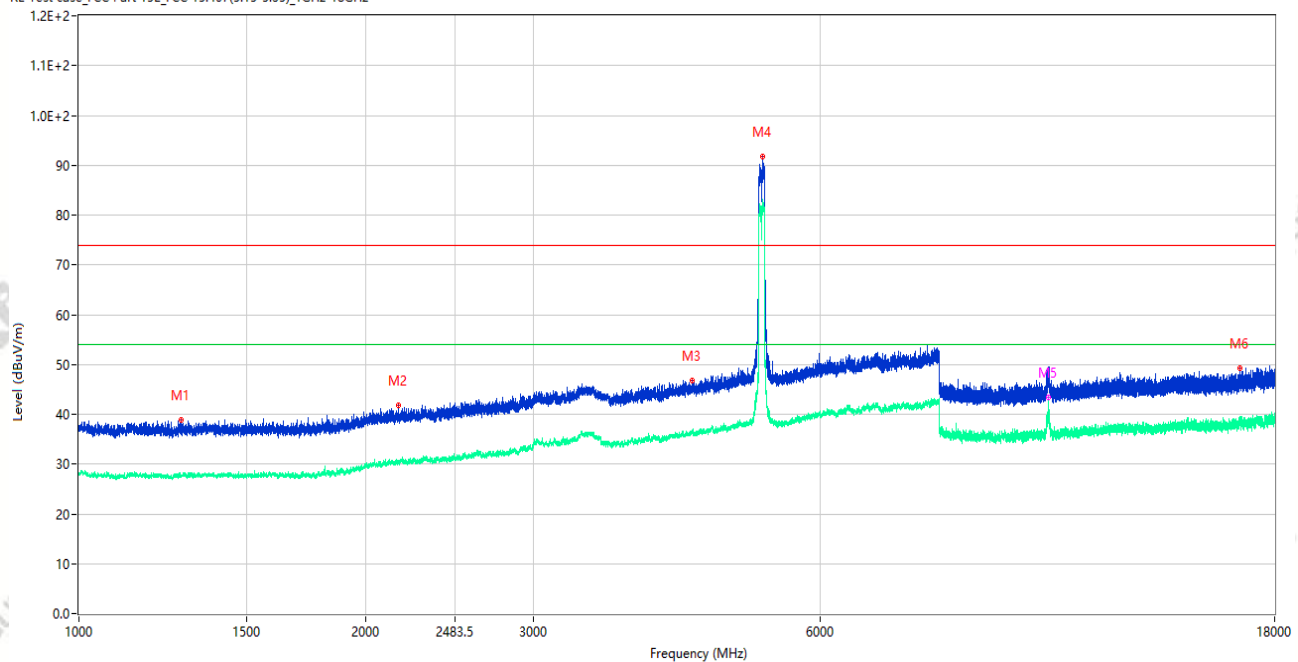

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1281.500	38.77	-15.91	74.0	35.23	Peak	59.00	150	Vertical	Pass
1**	1281.500	27.62	-15.91	54.0	26.38	AV	59.00	150	Vertical	Pass
2	2165.000	41.73	-13.18	74.0	32.27	Peak	169.00	150	Vertical	Pass
2**	2165.000	30.29	-13.18	54.0	23.71	AV	169.00	150	Vertical	Pass
3	4406.500	46.78	-3.01	74.0	27.22	Peak	123.00	150	Vertical	Pass
3**	4406.500	36.70	-3.01	54.0	17.30	AV	123.00	150	Vertical	Pass
4	5226.000	91.73	-2.32	74.0	-17.73	Peak	25.00	150	Vertical	N/A
4**	5226.000	82.60	-2.32	54.0	-28.60	AV	25.00	150	Vertical	N/A
5	10420.125	48.84	-3.42	74.0	25.16	Peak	0.00	150	Vertical	Pass
5**	10420.125	43.36	-3.42	54.0	10.64	AV	0.00	150	Vertical	Pass
6	16554.412	49.18	-0.86	74.0	24.82	Peak	41.00	150	Vertical	Pass
6**	16554.412	38.87	-0.86	54.0	15.13	AV	41.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-09_22.25.59

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac80 CH42 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

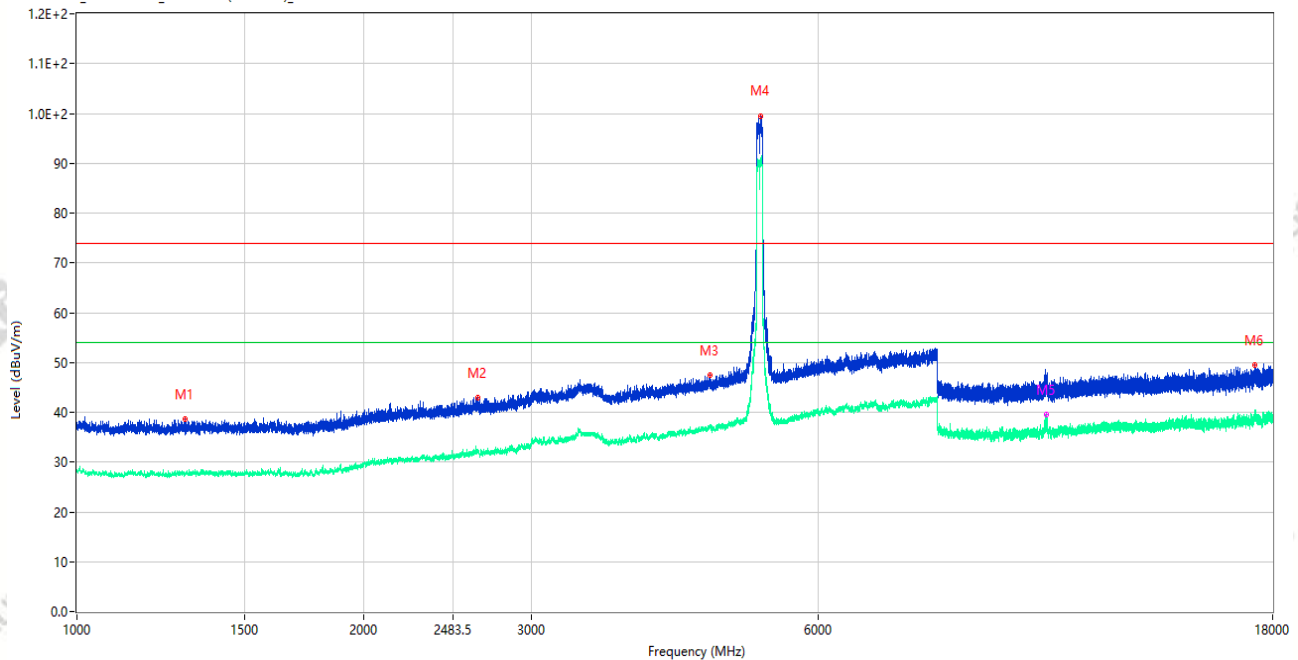

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1298.500	38.68	-15.63	74.0	35.32	Peak	222.00	150	Horizontal	Pass
1**	1298.500	27.39	-15.63	54.0	26.61	AV	222.00	150	Horizontal	Pass
2	2637.500	42.91	-10.10	74.0	31.09	Peak	0.00	150	Horizontal	Pass
2**	2637.500	32.28	-10.10	54.0	21.72	AV	0.00	150	Horizontal	Pass
3	4615.500	47.36	-3.12	74.0	26.64	Peak	37.00	150	Horizontal	Pass
3**	4615.500	37.10	-3.12	54.0	16.90	AV	37.00	150	Horizontal	Pass
4	5227.000	99.53	-2.33	74.0	-25.53	Peak	25.00	150	Horizontal	N/A
4**	5227.000	90.26	-2.33	54.0	-36.26	AV	25.00	150	Horizontal	N/A
5	10419.174	45.21	-3.47	74.0	28.79	Peak	333.00	150	Horizontal	Pass
5**	10419.174	39.54	-3.47	54.0	14.46	AV	333.00	150	Horizontal	Pass
6	17222.474	49.46	-0.84	74.0	24.54	Peak	0.00	150	Horizontal	Pass
6**	17222.474	38.69	-0.84	54.0	15.31	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-09_16.33.58

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIF)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A12

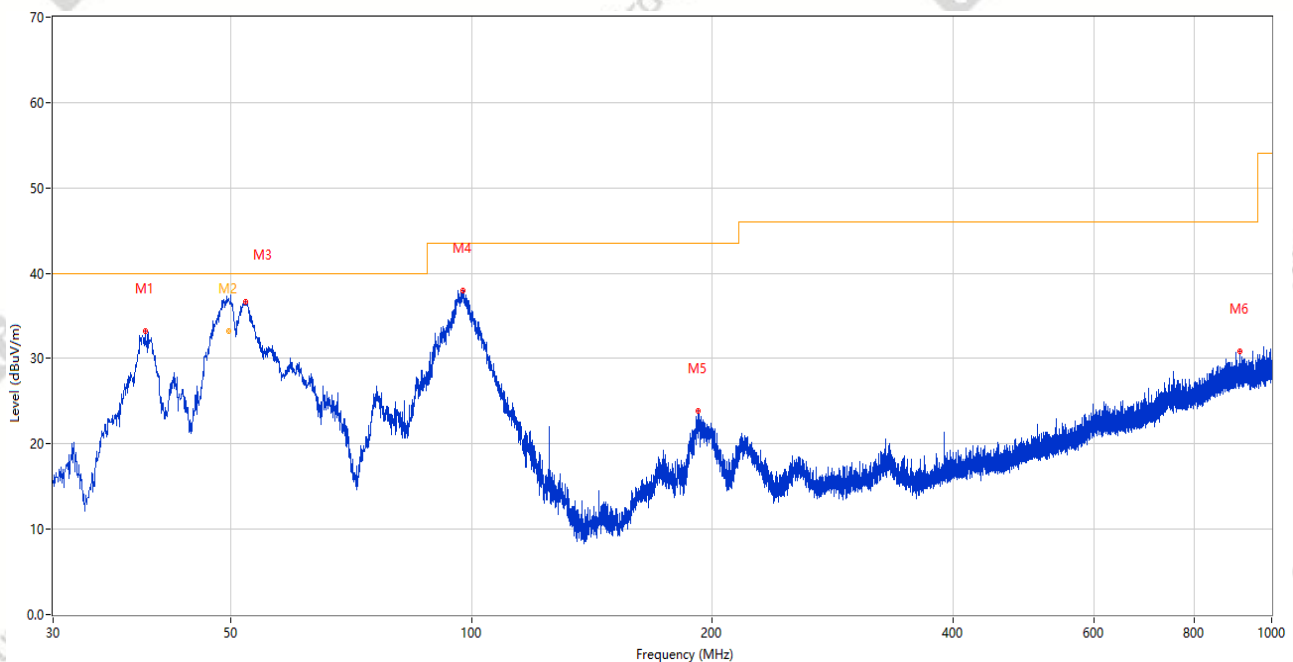

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.118	33.20	-26.21	40.0	6.80	Peak	81.00	100	Vertical	Pass
2	49.762	36.79	-24.51	40.0	3.21	Peak	69.00	100	Vertical	N/A
2*	49.762	33.16	-24.51	40.0	6.84	QP	69.00	100	Vertical	Pass
3	52.261	36.69	-24.71	40.0	3.31	Peak	197.00	100	Vertical	Pass
4	97.609	37.94	-26.28	43.5	5.56	Peak	359.00	100	Vertical	Pass
5	191.796	23.89	-26.03	43.5	19.61	Peak	162.00	200	Vertical	Pass
6	911.827	30.91	-9.20	46.0	15.09	Peak	173.00	100	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-09_16.40.39

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIF)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A12

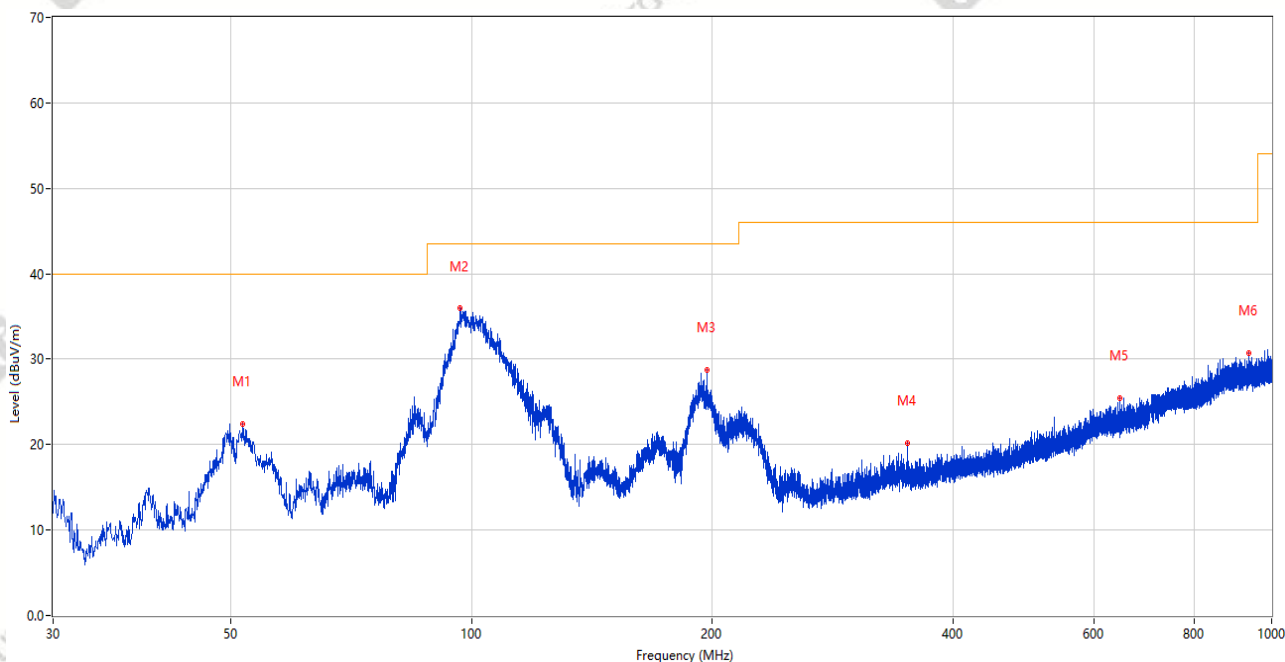

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	51.728	22.43	-24.68	40.0	17.57	Peak	360.00	100	Horizontal	Pass
2	96.833	35.93	-26.39	43.5	7.57	Peak	181.00	200	Horizontal	Pass
3	196.792	28.69	-25.54	43.5	14.81	Peak	279.00	200	Horizontal	Pass
4	350.925	20.15	-21.49	46.0	25.85	Peak	274.00	100	Horizontal	Pass
5	646.580	25.50	-14.47	46.0	20.50	Peak	272.00	200	Horizontal	Pass
6	935.834	30.67	-8.93	46.0	15.33	Peak	296.00	200	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-09_23.15.11

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=14


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

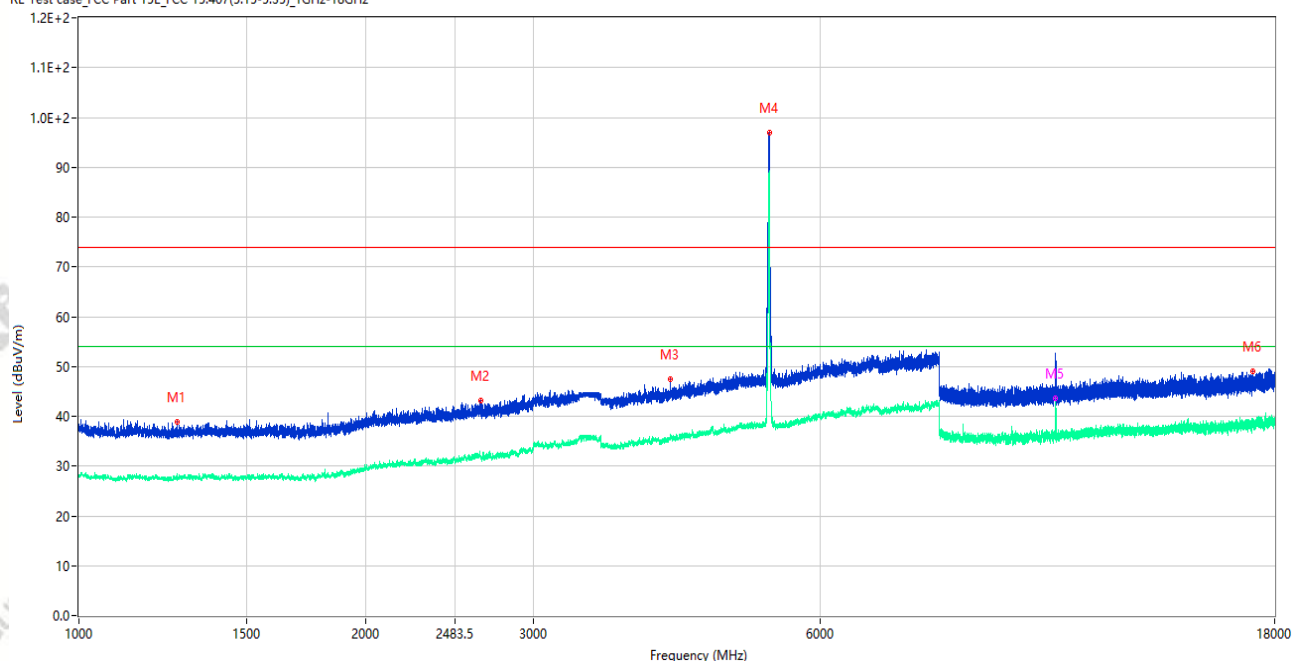

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1266.750	38.84	-15.95	74.0	35.16	Peak	219.00	150	Vertical	Pass
1**	1266.750	27.80	-15.95	54.0	26.20	AV	219.00	150	Vertical	Pass
2	2642.750	43.14	-10.49	74.0	30.86	Peak	0.00	150	Vertical	Pass
2**	2642.750	31.58	-10.49	54.0	22.42	AV	0.00	150	Vertical	Pass
3	4181.500	47.36	-4.00	74.0	26.64	Peak	4.00	150	Vertical	Pass
3**	4181.500	35.50	-4.00	54.0	18.50	AV	4.00	150	Vertical	Pass
4	5303.500	96.88	-2.02	74.0	-22.88	Peak	13.00	150	Vertical	N/A
4**	5303.500	88.84	-2.02	54.0	-34.84	AV	13.00	150	Vertical	N/A
5	10600.625	50.18	-3.67	74.0	23.82	Peak	350.00	150	Vertical	Pass
5**	10600.625	43.57	-3.67	54.0	10.43	AV	350.00	150	Vertical	Pass
6	17069.438	48.96	-0.82	74.0	25.04	Peak	360.00	150	Vertical	Pass
6**	17069.438	39.28	-0.82	54.0	14.72	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-09_23.24.29

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=14


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

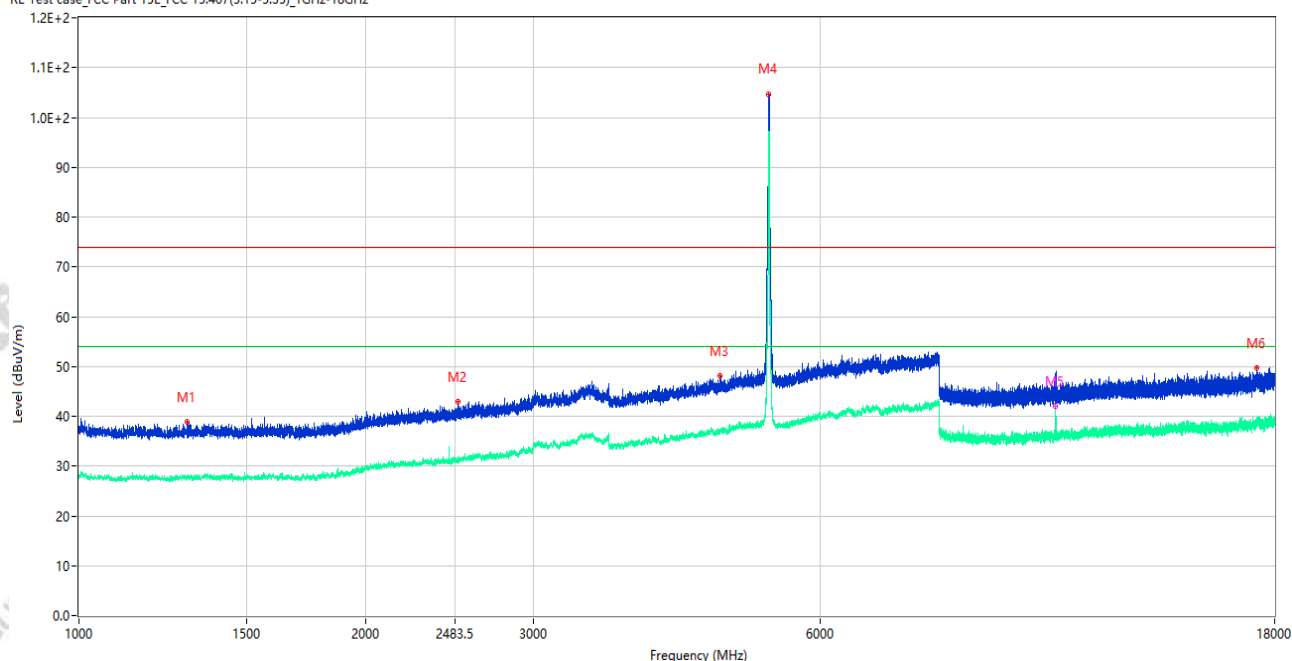

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1300.250	38.86	-15.60	74.0	35.14	Peak	164.00	150	Horizontal	Pass
1**	1300.250	27.41	-15.60	54.0	26.59	AV	164.00	150	Horizontal	Pass
2	2500.250	43.04	-12.02	74.0	30.96	Peak	0.00	150	Horizontal	Pass
2**	2500.250	31.72	-12.02	54.0	22.28	AV	0.00	150	Horizontal	Pass
3	4708.500	48.04	-3.87	74.0	25.96	Peak	174.00	150	Horizontal	Pass
3**	4708.500	37.02	-3.87	54.0	16.98	AV	174.00	150	Horizontal	Pass
4	5293.500	104.73	-1.96	74.0	-30.73	Peak	10.00	150	Horizontal	N/A
4**	5293.500	96.76	-1.96	54.0	-42.76	AV	10.00	150	Horizontal	N/A
5	10599.675	48.00	-3.67	74.0	26.00	Peak	6.00	150	Horizontal	Pass
5**	10599.675	42.12	-3.67	54.0	11.88	AV	6.00	150	Horizontal	Pass
6	17247.412	49.70	-0.72	74.0	24.30	Peak	74.00	150	Horizontal	Pass
6**	17247.412	39.67	-0.72	54.0	14.33	AV	74.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_11.00.59

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac20 CH60 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

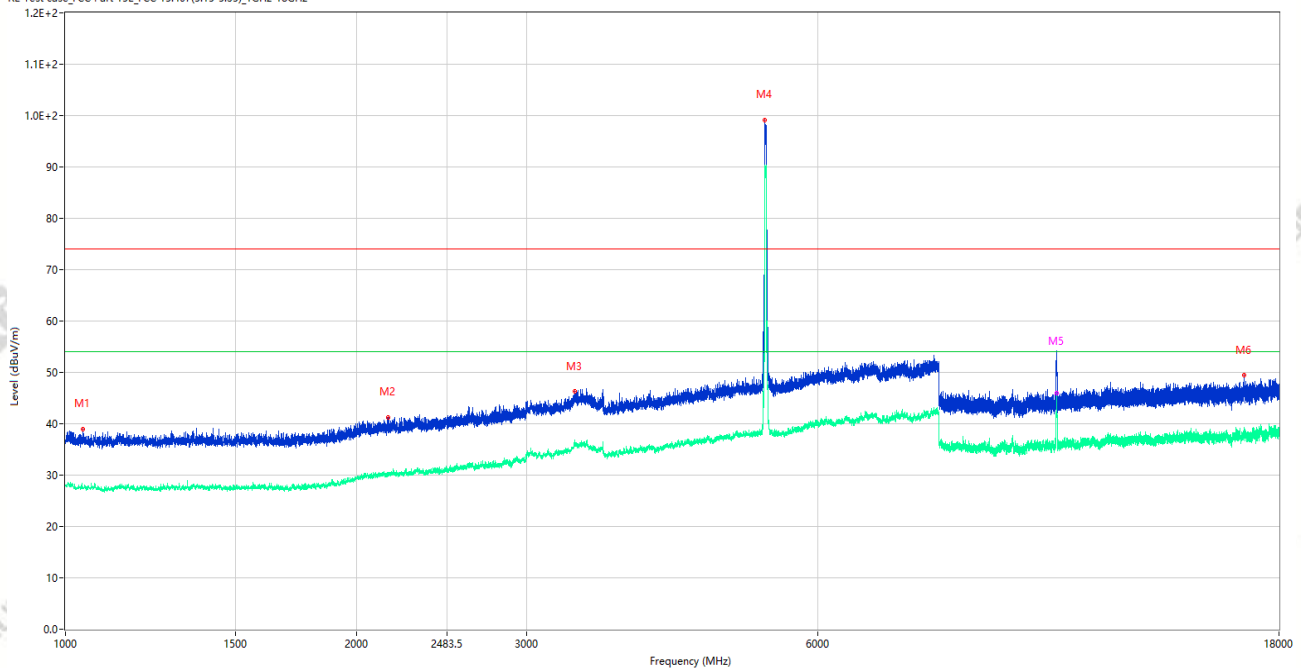

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1042.250	38.96	-15.38	74.0	35.04	Peak	127.00	150	Vertical	Pass
1**	1042.250	27.53	-15.38	54.0	26.47	AV	127.00	150	Vertical	Pass
2	2155.250	41.28	-13.49	74.0	32.72	Peak	65.00	150	Vertical	Pass
2**	2155.250	30.36	-13.49	54.0	23.64	AV	65.00	150	Vertical	Pass
3	3363.500	46.37	-5.35	74.0	27.63	Peak	89.00	150	Vertical	Pass
3**	3363.500	35.83	-5.35	54.0	18.17	AV	89.00	150	Vertical	Pass
4	5293.000	99.16	-1.96	74.0	-25.16	Peak	48.00	150	Vertical	N/A
4**	5293.000	90.30	-1.96	54.0	-36.30	AV	48.00	150	Vertical	N/A
5	10600.150	52.32	-3.67	74.0	21.68	Peak	360.00	150	Vertical	Pass
5**	10600.150	45.91	-3.67	54.0	8.09	AV	360.00	150	Vertical	Pass
6	16570.425	49.41	-0.85	74.0	24.59	Peak	182.00	150	Vertical	Pass
6**	16570.425	38.16	-0.85	54.0	15.84	AV	182.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_11.05.57

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac20 CH60 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

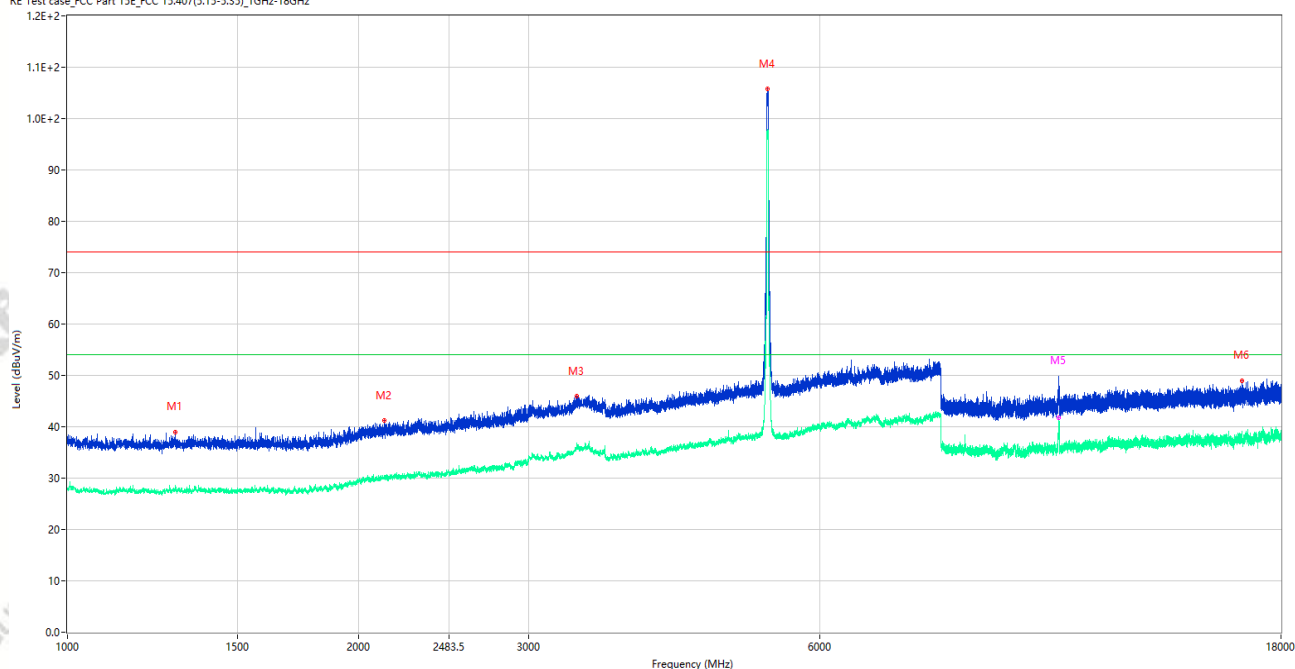

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1294.000	38.96	-15.75	74.0	35.04	Peak	214.00	150	Horizontal	Pass
1**	1294.000	27.79	-15.75	54.0	26.21	AV	214.00	150	Horizontal	Pass
2	2129.000	41.17	-13.26	74.0	32.83	Peak	360.00	150	Horizontal	Pass
2**	2129.000	30.34	-13.26	54.0	23.66	AV	360.00	150	Horizontal	Pass
3	3363.500	46.01	-5.35	74.0	27.99	Peak	169.00	150	Horizontal	Pass
3**	3363.500	35.99	-5.35	54.0	18.01	AV	169.00	150	Horizontal	Pass
4	5303.000	105.71	-2.03	74.0	-31.71	Peak	50.00	150	Horizontal	N/A
4**	5303.000	97.58	-2.03	54.0	-43.58	AV	50.00	150	Horizontal	N/A
5	10600.388	48.96	-3.67	74.0	25.04	Peak	172.00	150	Horizontal	Pass
5**	10600.388	41.74	-3.67	54.0	12.26	AV	172.00	150	Horizontal	Pass
6	16396.650	49.00	-1.28	74.0	25.00	Peak	0.00	150	Horizontal	Pass
6**	16396.650	38.48	-1.28	54.0	15.52	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_11.17.07

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac40 CH54 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

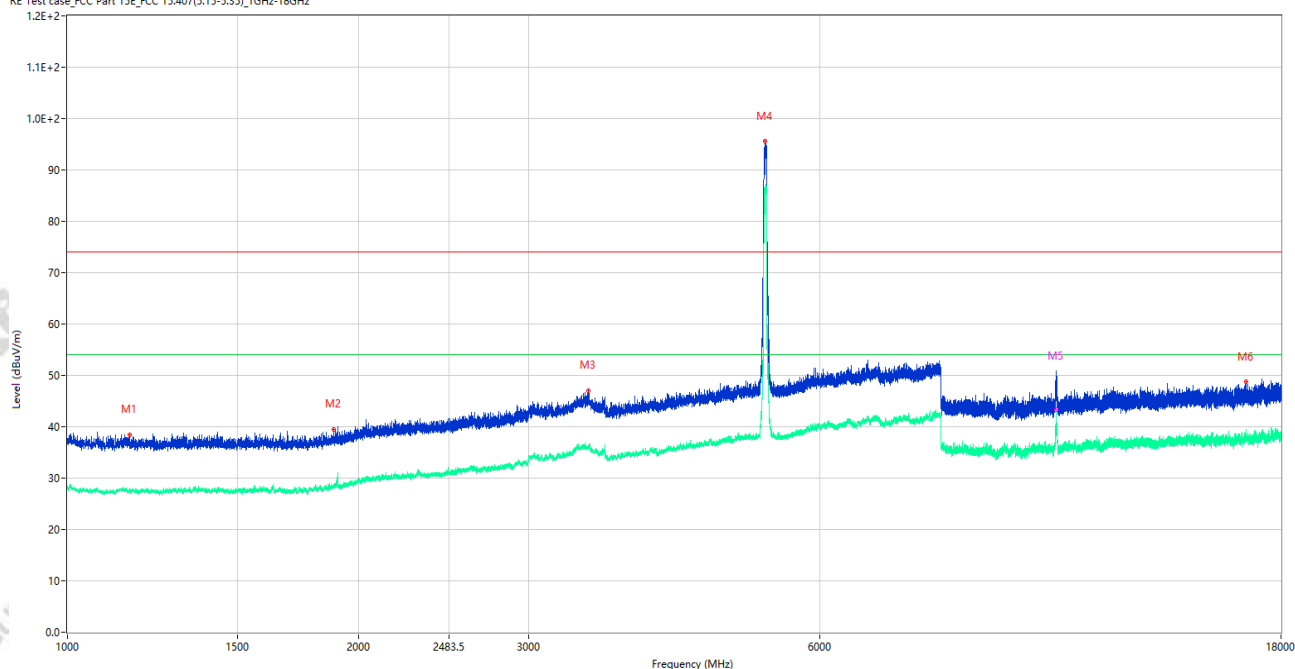

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1159.250	38.46	-15.52	74.0	35.54	Peak	303.00	150	Vertical	Pass
1**	1159.250	27.78	-15.52	54.0	26.22	AV	303.00	150	Vertical	Pass
2	1886.750	39.42	-15.32	74.0	34.58	Peak	173.00	150	Vertical	Pass
2**	1886.750	28.67	-15.32	54.0	25.33	AV	173.00	150	Vertical	Pass
3	3456.000	47.06	-4.89	74.0	26.94	Peak	0.00	150	Vertical	Pass
3**	3456.000	36.05	-4.89	54.0	17.95	AV	0.00	150	Vertical	Pass
4	5266.500	95.58	-2.39	74.0	-21.58	Peak	210.00	150	Vertical	N/A
4**	5266.500	86.43	-2.39	54.0	-32.43	AV	210.00	150	Vertical	N/A
5	10540.300	49.71	-3.05	74.0	24.29	Peak	333.00	150	Vertical	Pass
5**	10540.300	43.37	-3.05	54.0	10.63	AV	333.00	150	Vertical	Pass
6	16553.099	48.72	-0.89	74.0	25.28	Peak	148.00	150	Vertical	Pass
6**	16553.099	38.64	-0.89	54.0	15.36	AV	148.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_11.12.17

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac40 CH54 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

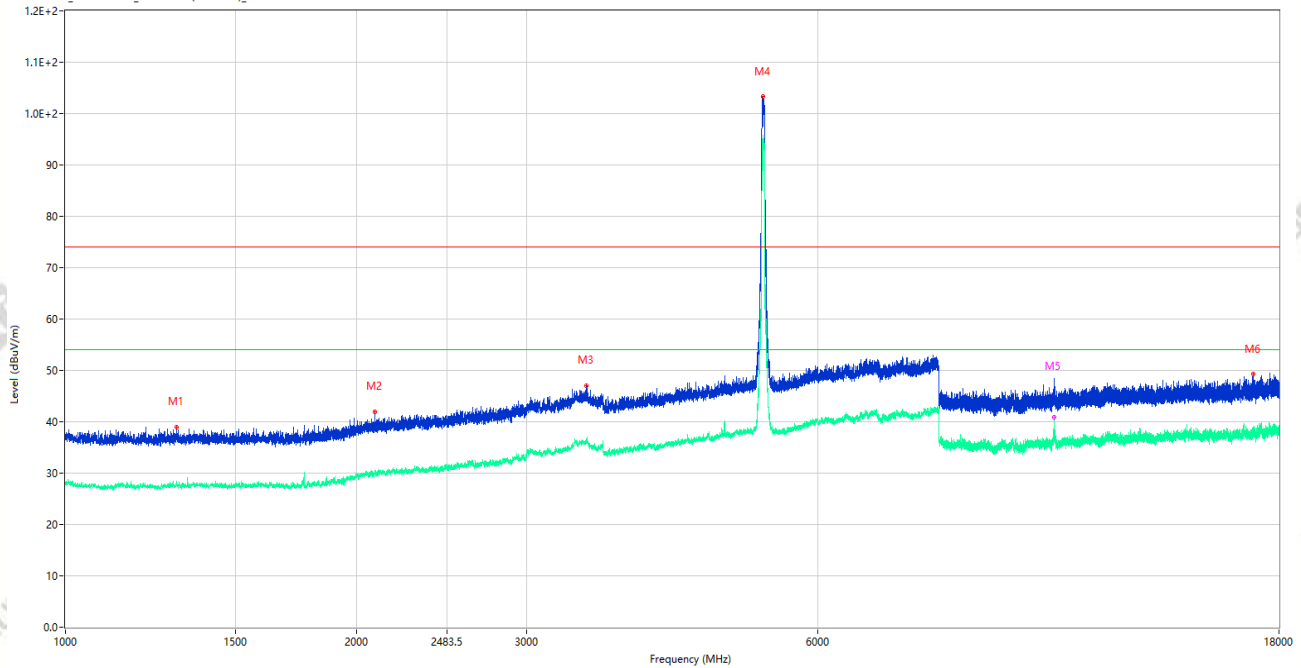

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1303.250	39.03	-15.59	74.0	34.97	Peak	60.00	150	Horizontal	Pass
1**	1303.250	28.03	-15.59	54.0	25.97	AV	60.00	150	Horizontal	Pass
2	2091.250	41.85	-13.67	74.0	32.15	Peak	325.00	150	Horizontal	Pass
2**	2091.250	29.93	-13.67	54.0	24.07	AV	325.00	150	Horizontal	Pass
3	3459.000	47.03	-4.94	74.0	26.97	Peak	0.00	150	Horizontal	Pass
3**	3459.000	36.54	-4.94	54.0	17.46	AV	0.00	150	Horizontal	Pass
4	5264.000	103.30	-2.30	74.0	-29.30	Peak	17.00	150	Horizontal	N/A
4**	5264.000	95.26	-2.30	54.0	-41.26	AV	17.00	150	Horizontal	N/A
5	10538.875	43.94	-3.12	74.0	30.06	Peak	309.00	150	Horizontal	Pass
5**	10538.875	37.93	-3.12	54.0	16.07	AV	309.00	150	Horizontal	Pass
6	16933.988	49.27	-1.08	74.0	24.73	Peak	0.00	150	Horizontal	Pass
6**	16933.988	38.22	-1.08	54.0	15.78	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_10.54.26

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac80 CH58 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

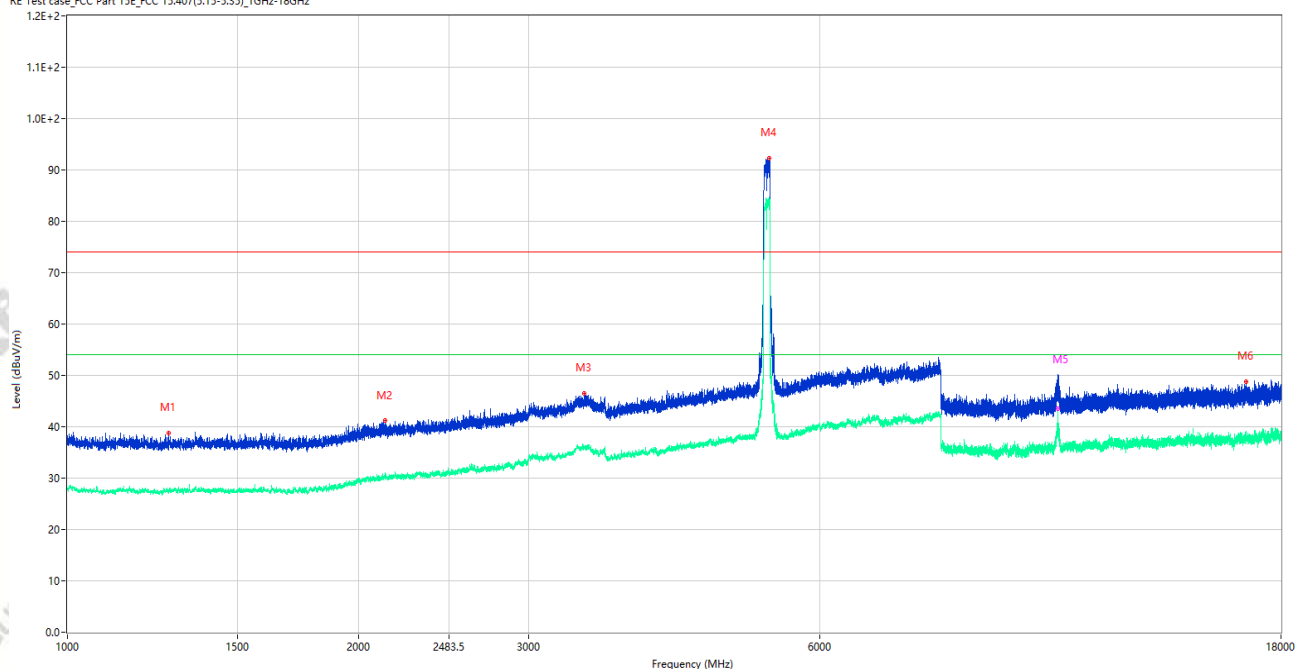

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1272.750	38.85	-15.86	74.0	35.15	Peak	51.00	150	Vertical	Pass
1**	1272.750	27.36	-15.86	54.0	26.64	AV	51.00	150	Vertical	Pass
2	2131.000	41.15	-13.27	74.0	32.85	Peak	108.00	150	Vertical	Pass
2**	2131.000	29.71	-13.27	54.0	24.29	AV	108.00	150	Vertical	Pass
3	3421.000	46.53	-4.95	74.0	27.47	Peak	156.00	150	Vertical	Pass
3**	3421.000	35.91	-4.95	54.0	18.09	AV	156.00	150	Vertical	Pass
4	5314.500	92.33	-2.06	74.0	-18.33	Peak	49.00	150	Vertical	N/A
4**	5314.500	83.63	-2.06	54.0	-29.63	AV	49.00	150	Vertical	N/A
5	10580.200	48.87	-3.36	74.0	25.13	Peak	360.00	150	Vertical	Pass
5**	10580.200	43.53	-3.36	54.0	10.47	AV	360.00	150	Vertical	Pass
6	16559.400	48.69	-0.96	74.0	25.31	Peak	346.00	150	Vertical	Pass
6**	16559.400	38.64	-0.96	54.0	15.36	AV	346.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_10.48.45

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac80 CH58 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

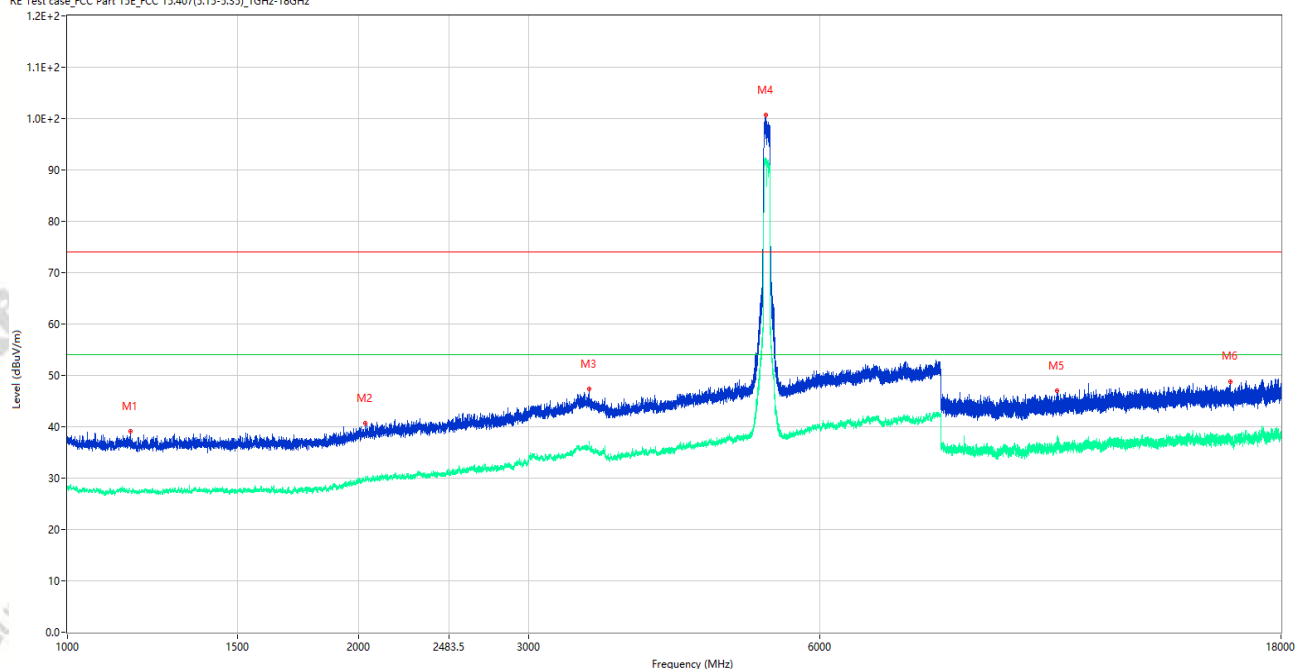

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1163.000	39.12	-15.47	74.0	34.88	Peak	126.00	150	Horizontal	Pass
1**	1163.000	27.48	-15.47	54.0	26.52	AV	126.00	150	Horizontal	Pass
2	2033.250	40.68	-13.45	74.0	33.32	Peak	302.00	150	Horizontal	Pass
2**	2033.250	29.67	-13.45	54.0	24.33	AV	302.00	150	Horizontal	Pass
3	3467.000	47.33	-5.24	74.0	26.67	Peak	0.00	150	Horizontal	Pass
3**	3467.000	35.86	-5.24	54.0	18.14	AV	0.00	150	Horizontal	Pass
4	5275.000	100.66	-2.43	74.0	-26.66	Peak	40.00	150	Horizontal	N/A
4**	5275.000	92.18	-2.43	54.0	-38.18	AV	40.00	150	Horizontal	N/A
5	10563.338	47.00	-3.24	74.0	27.00	Peak	360.00	150	Horizontal	Pass
5**	10563.338	36.45	-3.24	54.0	17.55	AV	360.00	150	Horizontal	Pass
6	15945.413	48.78	-2.56	74.0	25.22	Peak	0.00	150	Horizontal	Pass
6**	15945.413	37.12	-2.56	54.0	16.88	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_09.02.15

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

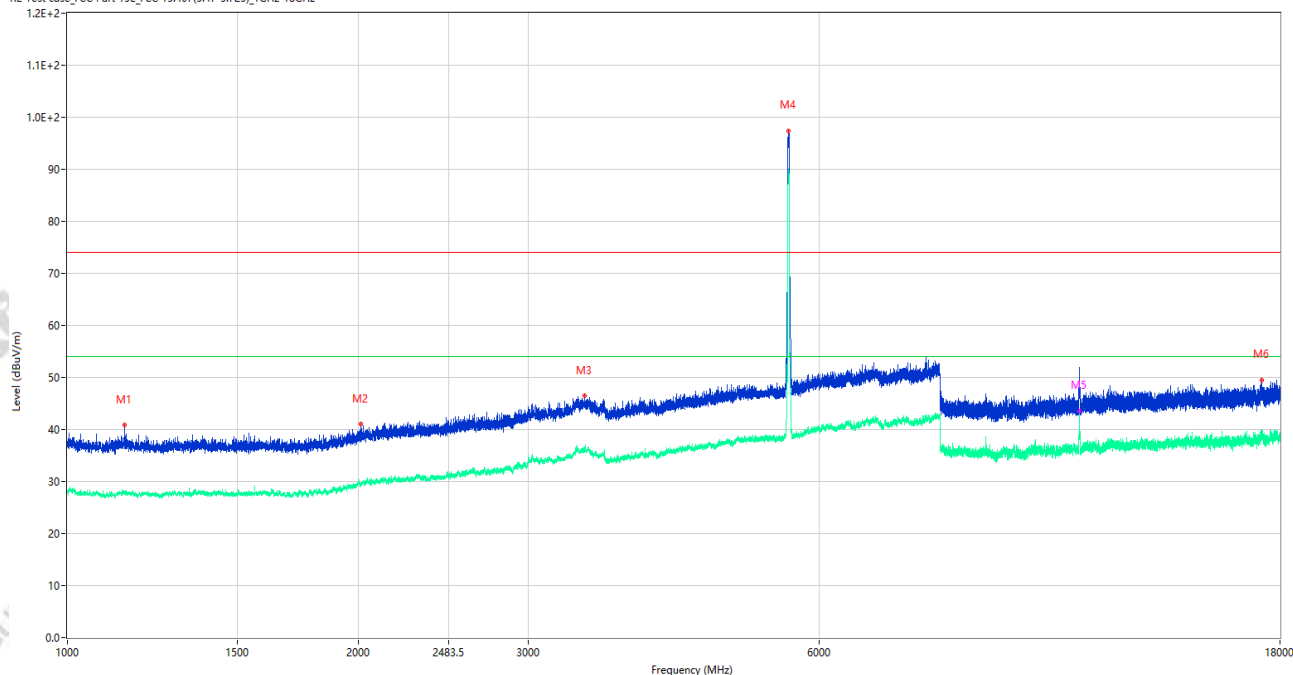

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1145.250	40.79	-15.62	74.0	33.21	Peak	0.00	150	Vertical	Pass
1**	1145.250	27.68	-15.62	54.0	26.32	AV	0.00	150	Vertical	Pass
2	2011.500	41.04	-14.22	74.0	32.96	Peak	15.00	150	Vertical	Pass
2**	2011.500	29.74	-14.22	54.0	24.26	AV	15.00	150	Vertical	Pass
3	3433.500	46.48	-5.15	74.0	27.52	Peak	273.00	150	Vertical	Pass
3**	3433.500	35.90	-5.15	54.0	18.10	AV	273.00	150	Vertical	Pass
4	5573.000	97.39	-2.97	74.0	-23.39	Peak	31.00	150	Vertical	N/A
4**	5573.000	89.81	-2.97	54.0	-35.81	AV	31.00	150	Vertical	N/A
5	11158.513	51.11	-4.02	74.0	22.89	Peak	308.00	150	Vertical	Pass
5**	11158.513	43.54	-4.02	54.0	10.46	AV	308.00	150	Vertical	Pass
6	17230.875	49.49	-0.38	74.0	24.51	Peak	345.00	150	Vertical	Pass
6**	17230.875	39.39	-0.38	54.0	14.61	AV	345.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_09.09.46

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

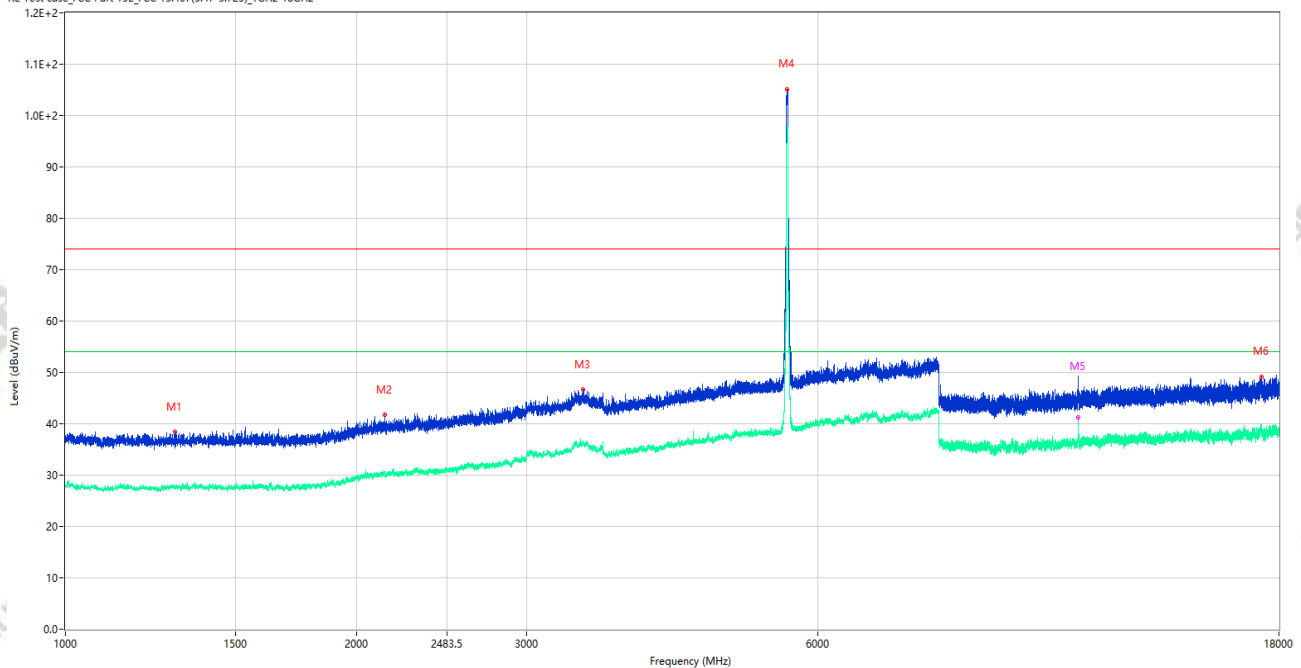

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1297.250	38.40	-15.68	74.0	35.60	Peak	87.00	150	Horizontal	Pass
1**	1297.250	27.15	-15.68	54.0	26.85	AV	87.00	150	Horizontal	Pass
2	2137.750	41.73	-13.67	74.0	32.27	Peak	267.00	150	Horizontal	Pass
2**	2137.750	30.48	-13.67	54.0	23.52	AV	267.00	150	Horizontal	Pass
3	3432.000	46.61	-5.06	74.0	27.39	Peak	357.00	150	Horizontal	Pass
3**	3432.000	36.19	-5.06	54.0	17.81	AV	357.00	150	Horizontal	Pass
4	5576.500	105.09	-2.92	74.0	-31.09	Peak	21.00	150	Horizontal	N/A
4**	5576.500	97.58	-2.92	54.0	-43.58	AV	21.00	150	Horizontal	N/A
5	11159.700	47.27	-4.02	74.0	26.73	Peak	236.00	150	Horizontal	Pass
5**	11159.700	41.29	-4.02	54.0	12.71	AV	236.00	150	Horizontal	Pass
6	17274.974	49.16	-0.95	74.0	24.84	Peak	44.00	150	Horizontal	Pass
6**	17274.974	38.94	-0.95	54.0	15.06	AV	44.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_08.12.29

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac20 CH116 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

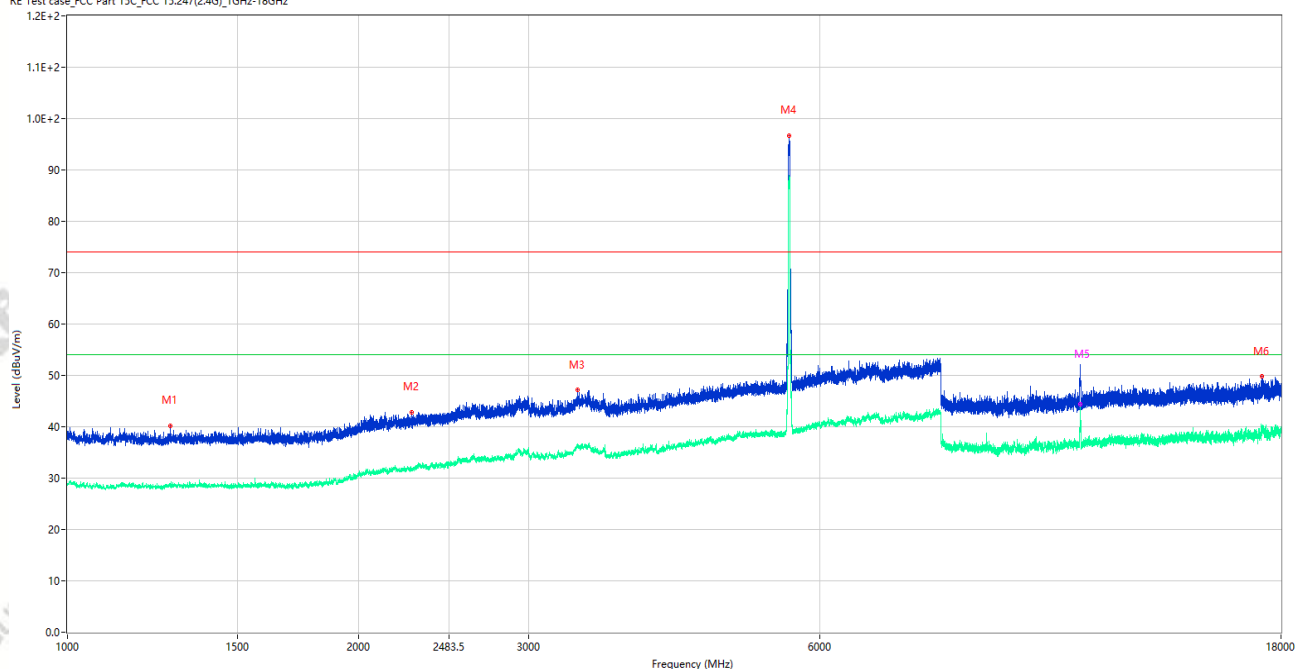

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1278.000	40.19	-15.88	74.0	33.81	Peak	360.00	150	Vertical	Pass
1**	1278.000	28.37	-15.88	54.0	25.63	AV	360.00	150	Vertical	Pass
2	2269.250	42.88	-13.14	74.0	31.12	Peak	228.00	150	Vertical	Pass
2**	2269.250	31.75	-13.14	54.0	22.25	AV	228.00	150	Vertical	Pass
3	3372.000	47.19	-4.82	74.0	26.81	Peak	358.00	150	Vertical	Pass
3**	3372.000	36.06	-4.82	54.0	17.94	AV	358.00	150	Vertical	Pass
4	5577.000	96.72	-2.90	74.0	-22.72	Peak	39.00	150	Vertical	N/A
4**	5577.000	88.86	-2.90	54.0	-34.86	AV	39.00	150	Vertical	N/A
5	11160.500	51.57	-4.02	74.0	22.43	Peak	0.00	150	Vertical	Pass
5**	11160.500	44.30	-4.02	54.0	9.70	AV	0.00	150	Vertical	Pass
6	17186.001	49.80	0.15	74.0	24.20	Peak	322.00	150	Vertical	Pass
6**	17186.001	38.99	0.15	54.0	15.01	AV	322.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_08.06.57

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac20 CH116 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

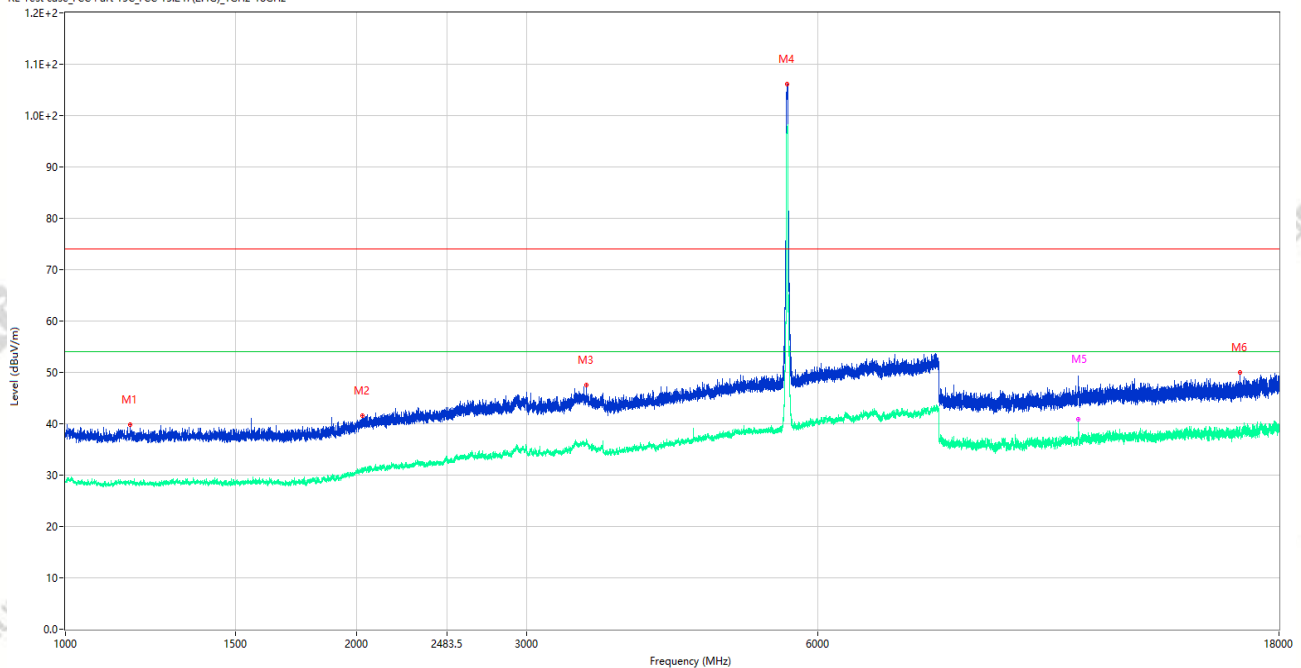

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1167.250	39.79	-15.47	74.0	34.21	Peak	356.00	150	Horizontal	Pass
1**	1167.250	28.42	-15.47	54.0	25.58	AV	356.00	150	Horizontal	Pass
2	2029.250	41.67	-13.71	74.0	32.33	Peak	254.00	150	Horizontal	Pass
2**	2029.250	30.55	-13.71	54.0	23.45	AV	254.00	150	Horizontal	Pass
3	3457.500	47.54	-4.92	74.0	26.46	Peak	53.00	150	Horizontal	Pass
3**	3457.500	36.50	-4.92	54.0	17.50	AV	53.00	150	Horizontal	Pass
4	5582.500	106.09	-2.84	74.0	-32.09	Peak	23.00	150	Horizontal	N/A
4**	5582.500	97.75	-2.84	54.0	-43.75	AV	23.00	150	Horizontal	N/A
5	11160.500	47.04	-4.02	74.0	26.96	Peak	266.00	150	Horizontal	Pass
5**	11160.500	40.87	-4.02	54.0	13.13	AV	266.00	150	Horizontal	Pass
6	16415.000	49.99	-1.63	74.0	24.01	Peak	266.00	150	Horizontal	Pass
6**	16415.000	37.95	-1.63	54.0	16.05	AV	266.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_08.20.33

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac40 CH118 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

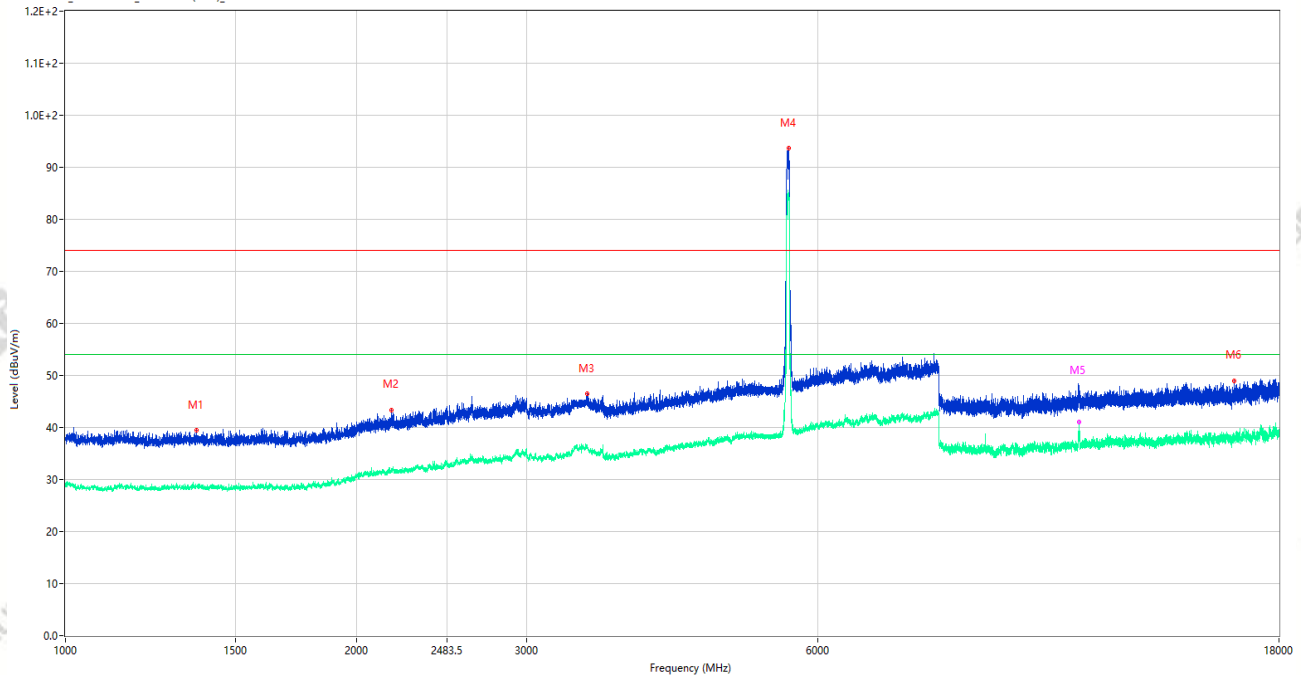

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1365.250	39.46	-15.86	74.0	34.54	Peak	25.00	150	Vertical	Pass
1**	1365.250	28.69	-15.86	54.0	25.31	AV	25.00	150	Vertical	Pass
2	2174.000	43.38	-12.94	74.0	30.62	Peak	286.00	150	Vertical	Pass
2**	2174.000	31.94	-12.94	54.0	22.06	AV	286.00	150	Vertical	Pass
3	3463.000	46.54	-5.05	74.0	27.46	Peak	1.00	150	Vertical	Pass
3**	3463.000	36.29	-5.05	54.0	17.71	AV	1.00	150	Vertical	Pass
4	5601.500	93.67	-2.81	74.0	-19.67	Peak	23.00	150	Vertical	N/A
4**	5601.500	84.62	-2.81	54.0	-30.62	AV	23.00	150	Vertical	N/A
5	11180.500	47.27	-4.15	74.0	26.73	Peak	0.00	150	Vertical	Pass
5**	11180.500	41.12	-4.15	54.0	12.88	AV	0.00	150	Vertical	Pass
6	16192.500	49.02	-1.35	74.0	24.98	Peak	65.00	150	Vertical	Pass
6**	16192.500	37.56	-1.35	54.0	16.44	AV	65.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_08.25.33

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11 ac40 CH118 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

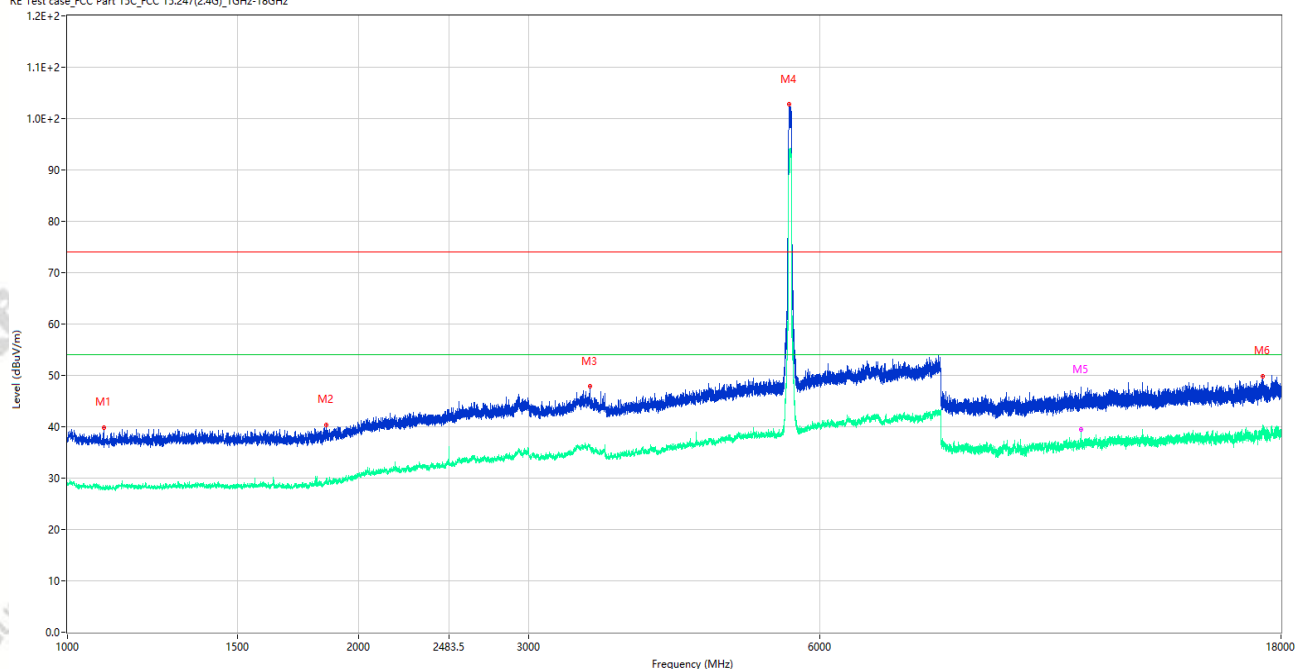

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1091.500	39.86	-15.83	74.0	34.14	Peak	96.00	150	Horizontal	Pass
1**	1091.500	27.81	-15.83	54.0	26.19	AV	96.00	150	Horizontal	Pass
2	1852.250	40.34	-15.82	74.0	33.66	Peak	270.00	150	Horizontal	Pass
2**	1852.250	29.76	-15.82	54.0	24.24	AV	270.00	150	Horizontal	Pass
3	3472.000	47.85	-5.75	74.0	26.15	Peak	319.00	150	Horizontal	Pass
3**	3472.000	35.67	-5.75	54.0	18.33	AV	319.00	150	Horizontal	Pass
4	5583.000	102.74	-2.83	74.0	-28.74	Peak	20.00	150	Horizontal	N/A
4**	5583.000	93.87	-2.83	54.0	-39.87	AV	20.00	150	Horizontal	N/A
5	11180.500	45.33	-4.15	74.0	28.67	Peak	121.00	150	Horizontal	Pass
5**	11180.500	39.55	-4.15	54.0	14.45	AV	121.00	150	Horizontal	Pass
6	17231.499	49.90	-0.39	74.0	24.10	Peak	0.00	150	Horizontal	Pass
6**	17231.499	39.65	-0.39	54.0	14.35	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_08.48.32

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH122 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

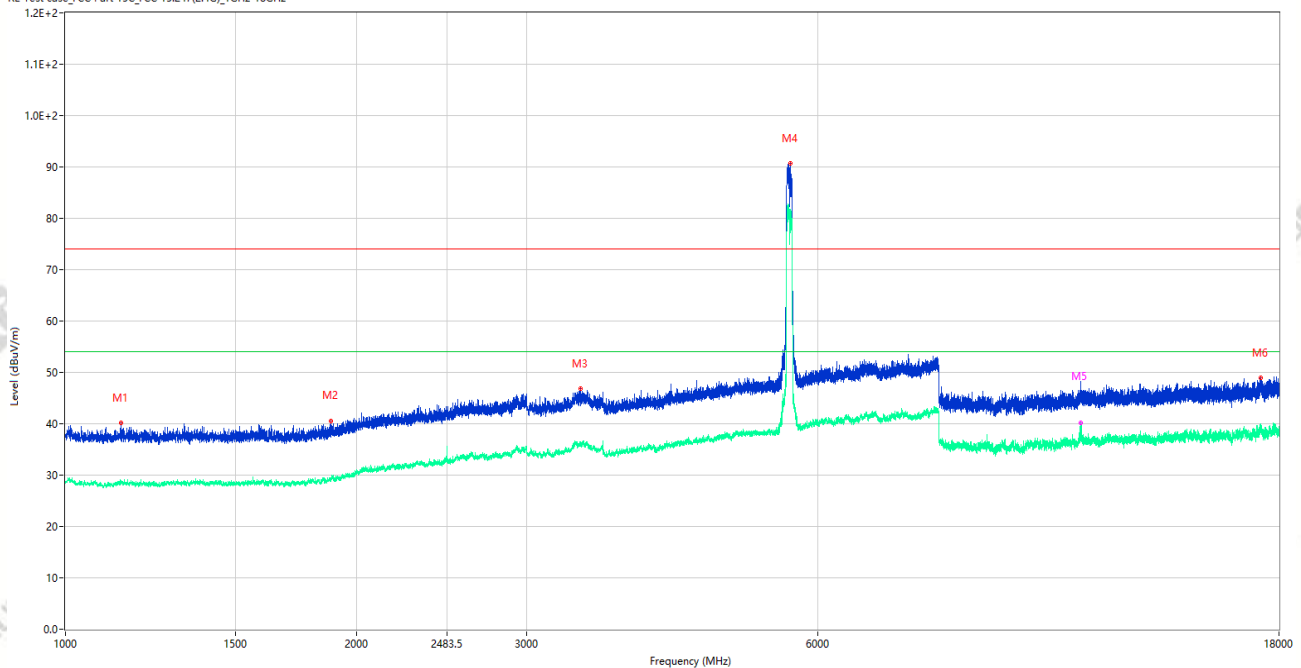

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1142.250	40.09	-15.58	74.0	33.91	Peak	328.00	150	Vertical	Pass
1**	1142.250	28.68	-15.58	54.0	25.32	AV	328.00	150	Vertical	Pass
2	1880.000	40.49	-15.37	74.0	33.51	Peak	27.00	150	Vertical	Pass
2**	1880.000	28.88	-15.37	54.0	25.12	AV	27.00	150	Vertical	Pass
3	3410.000	46.80	-5.33	74.0	27.20	Peak	340.00	150	Vertical	Pass
3**	3410.000	35.90	-5.33	54.0	18.10	AV	340.00	150	Vertical	Pass
4	5619.000	90.66	-2.32	74.0	-16.66	Peak	29.00	150	Vertical	N/A
4**	5619.000	81.69	-2.32	54.0	-27.69	AV	29.00	150	Vertical	N/A
5	11220.500	46.82	-4.06	74.0	27.18	Peak	294.00	150	Vertical	Pass
5**	11220.500	40.15	-4.06	54.0	13.85	AV	294.00	150	Vertical	Pass
6	17247.001	48.89	-0.72	74.0	25.11	Peak	265.00	150	Vertical	Pass
6**	17247.001	39.96	-0.72	54.0	14.04	AV	265.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_08.43.36

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH122 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

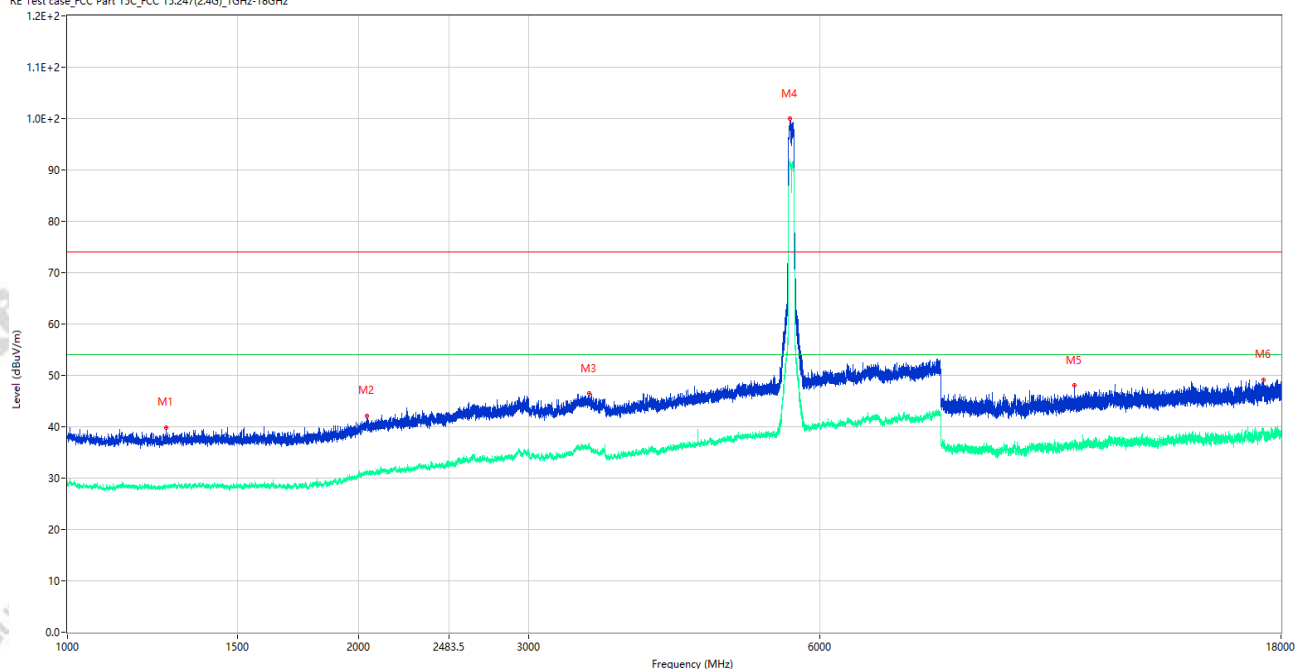

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1265.500	39.90	-15.95	74.0	34.10	Peak	312.00	150	Horizontal	Pass
1**	1265.500	28.25	-15.95	54.0	25.75	AV	312.00	150	Horizontal	Pass
2	2041.750	42.04	-13.30	74.0	31.96	Peak	0.00	150	Horizontal	Pass
2**	2041.750	31.44	-13.30	54.0	22.56	AV	0.00	150	Horizontal	Pass
3	3463.000	46.48	-5.05	74.0	27.52	Peak	254.00	150	Horizontal	Pass
3**	3463.000	35.84	-5.05	54.0	18.16	AV	254.00	150	Horizontal	Pass
4	5587.500	99.94	-2.84	74.0	-25.94	Peak	19.00	150	Horizontal	N/A
4**	5587.500	91.73	-2.84	54.0	-37.73	AV	19.00	150	Horizontal	N/A
5	11014.000	48.01	-3.20	74.0	25.99	Peak	10.00	150	Horizontal	Pass
5**	11014.000	36.70	-3.20	54.0	17.30	AV	10.00	150	Horizontal	Pass
6	17254.500	49.19	-0.95	74.0	24.81	Peak	0.00	150	Horizontal	Pass
6**	17254.500	39.15	-0.95	54.0	14.85	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_14.45.02

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=14


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

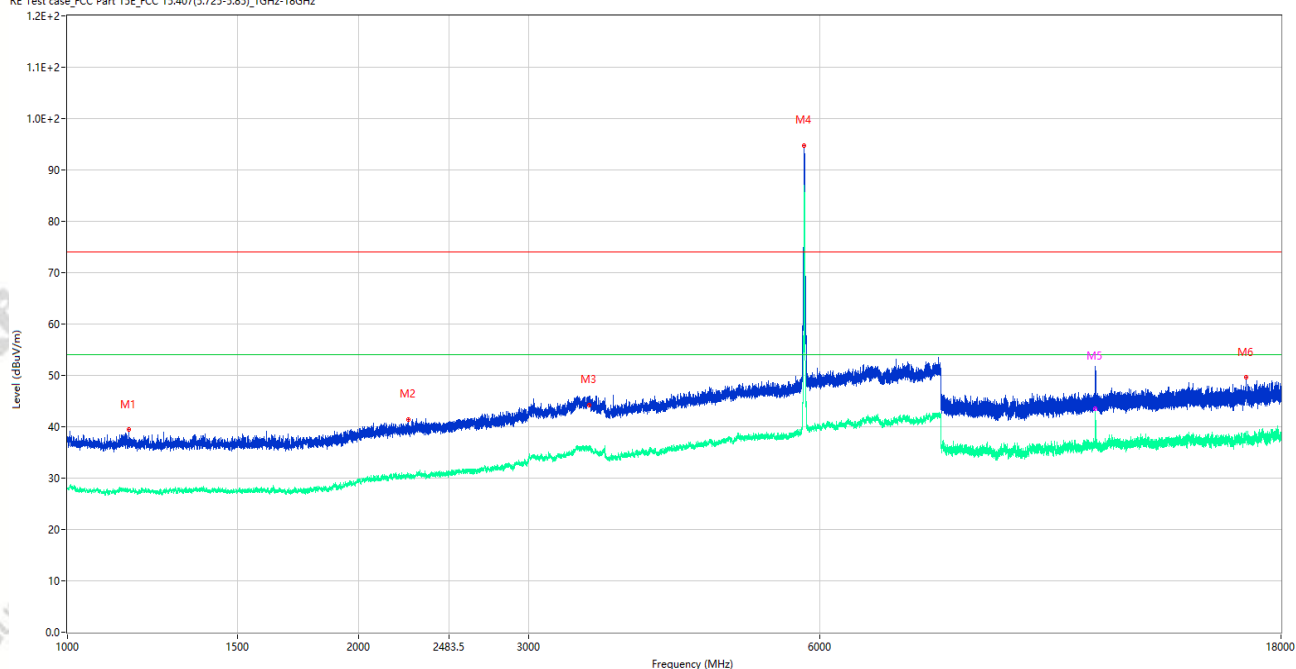

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1158.250	39.44	-15.54	74.0	34.56	Peak	298.00	150	Vertical	Pass
1**	1158.250	27.71	-15.54	54.0	26.29	AV	298.00	150	Vertical	Pass
2	2252.500	41.41	-12.96	74.0	32.59	Peak	313.00	150	Vertical	Pass
2**	2252.500	30.62	-12.96	54.0	23.38	AV	313.00	150	Vertical	Pass
3	3464.000	47.10	-5.05	74.0	26.90	Peak	360.00	150	Vertical	Pass
3**	3464.000	35.81	-5.05	54.0	18.19	AV	360.00	150	Vertical	Pass
4	5780.500	94.77	-1.50	74.0	-20.77	Peak	272.00	150	Vertical	N/A
4**	5780.500	86.62	-1.50	54.0	-32.62	AV	272.00	150	Vertical	N/A
5	11570.813	49.22	-2.37	74.0	24.78	Peak	327.00	150	Vertical	Pass
5**	11570.813	43.52	-2.37	54.0	10.48	AV	327.00	150	Vertical	Pass
6	16575.412	49.56	-0.71	74.0	24.44	Peak	360.00	150	Vertical	Pass
6**	16575.412	38.03	-0.71	54.0	15.97	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_14.50.54

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=14


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

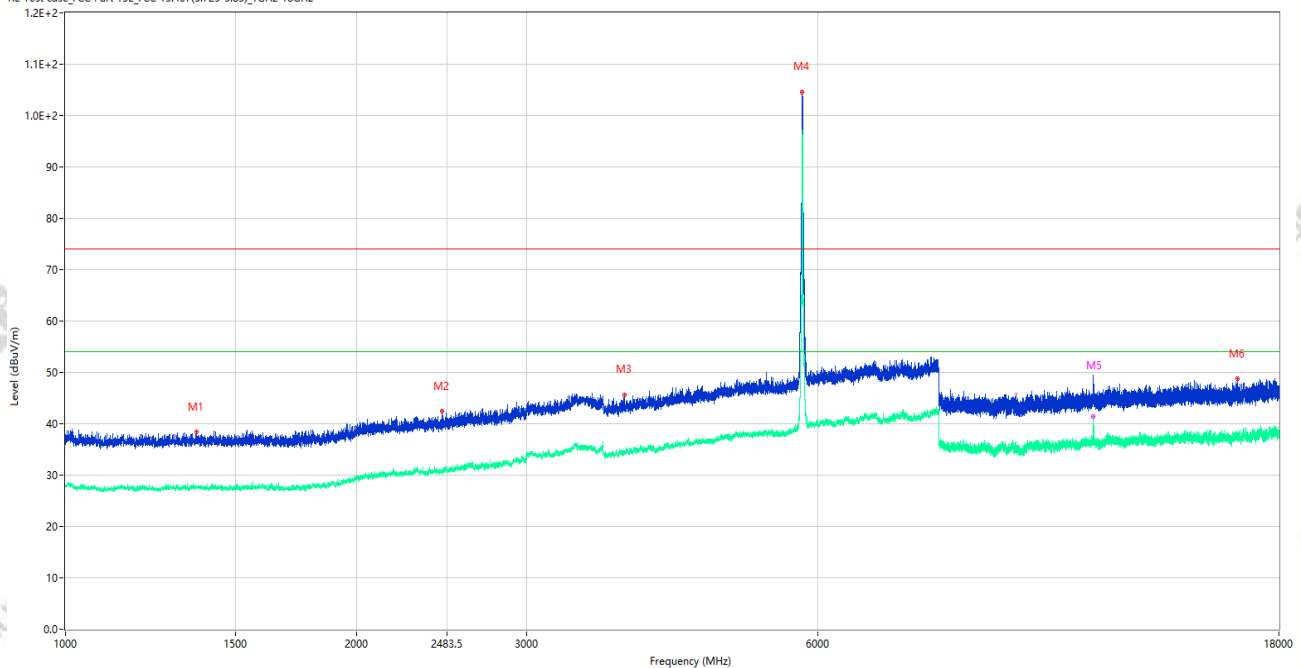

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1366.500	38.42	-15.86	74.0	35.58	Peak	0.00	150	Horizontal	Pass
1**	1366.500	27.74	-15.86	54.0	26.26	AV	0.00	150	Horizontal	Pass
2	2453.000	42.42	-12.47	74.0	31.58	Peak	0.00	150	Horizontal	Pass
2**	2453.000	30.65	-12.47	54.0	23.35	AV	0.00	150	Horizontal	Pass
3	3786.000	45.54	-5.35	74.0	28.46	Peak	243.00	150	Horizontal	Pass
3**	3786.000	34.55	-5.35	54.0	19.45	AV	243.00	150	Horizontal	Pass
4	5780.500	104.57	-1.50	74.0	-30.57	Peak	20.00	150	Horizontal	N/A
4**	5780.500	96.68	-1.50	54.0	-42.68	AV	20.00	150	Horizontal	N/A
5	11564.637	45.65	-2.23	74.0	28.35	Peak	142.00	150	Horizontal	Pass
5**	11564.637	41.44	-2.23	54.0	12.56	AV	142.00	150	Horizontal	Pass
6	16299.000	48.72	-1.50	74.0	25.28	Peak	313.00	150	Horizontal	Pass
6**	16299.000	37.91	-1.50	54.0	16.09	AV	313.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_15.24.28

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac20 CH157 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

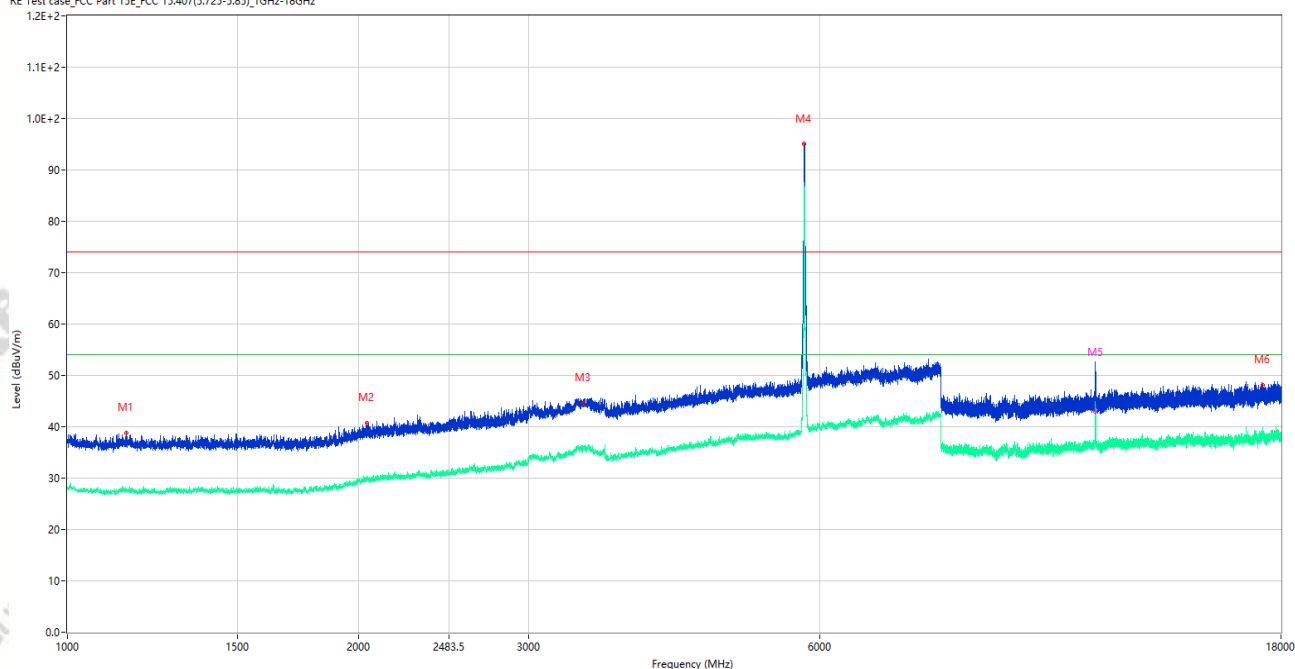

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1149.500	38.83	-15.66	74.0	35.17	Peak	342.00	150	Vertical	Pass
1**	1149.500	27.47	-15.66	54.0	26.53	AV	342.00	150	Vertical	Pass
2	2042.250	40.68	-13.32	74.0	33.32	Peak	345.00	150	Vertical	Pass
2**	2042.250	30.14	-13.32	54.0	23.86	AV	345.00	150	Vertical	Pass
3	3418.500	46.16	-5.08	74.0	27.84	Peak	360.00	150	Vertical	Pass
3**	3418.500	35.33	-5.08	54.0	18.67	AV	360.00	150	Vertical	Pass
4	5780.500	95.17	-1.50	74.0	-21.17	Peak	332.00	150	Vertical	N/A
4**	5780.500	86.96	-1.50	54.0	-32.96	AV	332.00	150	Vertical	N/A
5	11571.763	45.66	-2.45	74.0	28.34	Peak	26.00	150	Vertical	Pass
5**	11571.763	40.81	-2.45	54.0	13.19	AV	26.00	150	Vertical	Pass
6	17229.562	48.13	-0.39	74.0	25.87	Peak	360.00	150	Vertical	Pass
6**	17229.562	38.09	-0.39	54.0	15.91	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_15.20.13

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac20 CH157 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

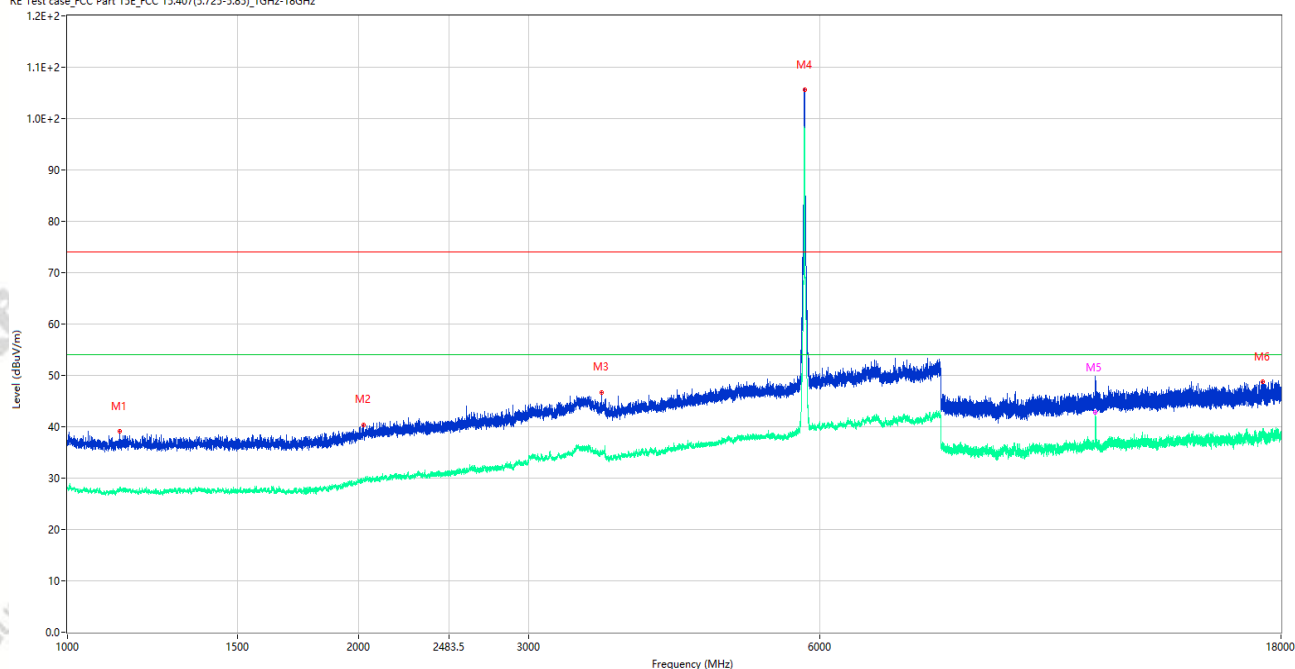

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1131.750	39.08	-15.53	74.0	34.92	Peak	55.00	150	Horizontal	Pass
1**	1131.750	27.47	-15.53	54.0	26.53	AV	55.00	150	Horizontal	Pass
2	2023.250	40.40	-14.07	74.0	33.60	Peak	276.00	150	Horizontal	Pass
2**	2023.250	29.74	-14.07	54.0	24.26	AV	276.00	150	Horizontal	Pass
3	3571.500	46.71	-6.69	74.0	27.29	Peak	245.00	150	Horizontal	Pass
3**	3571.500	34.51	-6.69	54.0	19.49	AV	245.00	150	Horizontal	Pass
4	5788.500	102.81	-1.55	74.0	-28.81	Peak	360.00	150	Horizontal	N/A
4**	5788.500	94.05	-1.55	54.0	-40.05	AV	360.00	150	Horizontal	N/A
5	11569.150	49.90	-2.32	74.0	24.10	Peak	145.00	150	Horizontal	Pass
5**	11569.150	42.81	-2.32	54.0	11.19	AV	145.00	150	Horizontal	Pass
6	17228.249	48.81	-0.40	74.0	25.19	Peak	360.00	150	Horizontal	Pass
6**	17228.249	38.18	-0.40	54.0	15.82	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_15.34.08

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac40 CH151 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

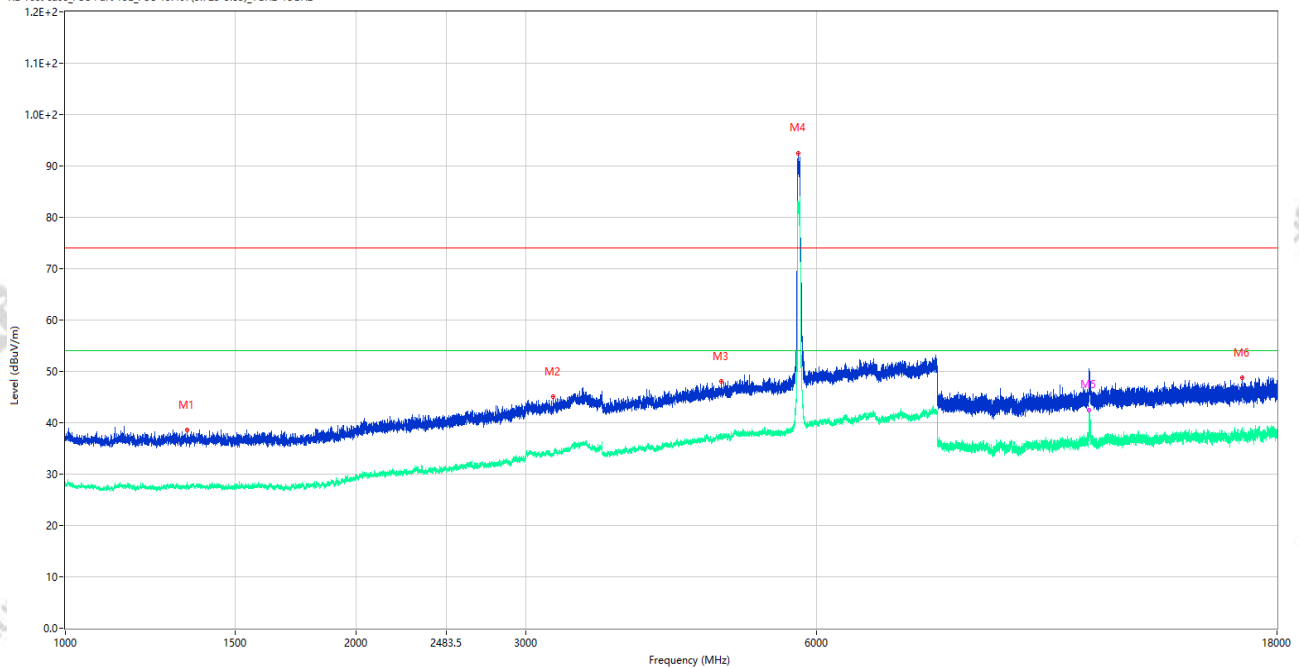

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1336.750	38.55	-16.05	74.0	35.45	Peak	221.00	150	Vertical	Pass
1**	1336.750	28.35	-16.05	54.0	25.65	AV	221.00	150	Vertical	Pass
2	3201.500	45.05	-7.67	74.0	28.95	Peak	124.00	150	Vertical	Pass
2**	3201.500	33.68	-7.67	54.0	20.32	AV	124.00	150	Vertical	Pass
3	4783.500	48.00	-3.01	74.0	26.00	Peak	46.00	150	Vertical	Pass
3**	4783.500	37.19	-3.01	54.0	16.81	AV	46.00	150	Vertical	Pass
4	5743.000	92.51	-2.19	74.0	-18.51	Peak	58.00	150	Vertical	N/A
4**	5743.000	81.60	-2.19	54.0	-27.60	AV	58.00	150	Vertical	N/A
5	11506.213	48.11	-3.01	74.0	25.89	Peak	329.00	150	Vertical	Pass
5**	11506.213	42.46	-3.01	54.0	11.54	AV	329.00	150	Vertical	Pass
6	16570.162	48.77	-0.86	74.0	25.23	Peak	360.00	150	Vertical	Pass
6**	16570.162	38.04	-0.86	54.0	15.96	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_15.40.23

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac40 CH151 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

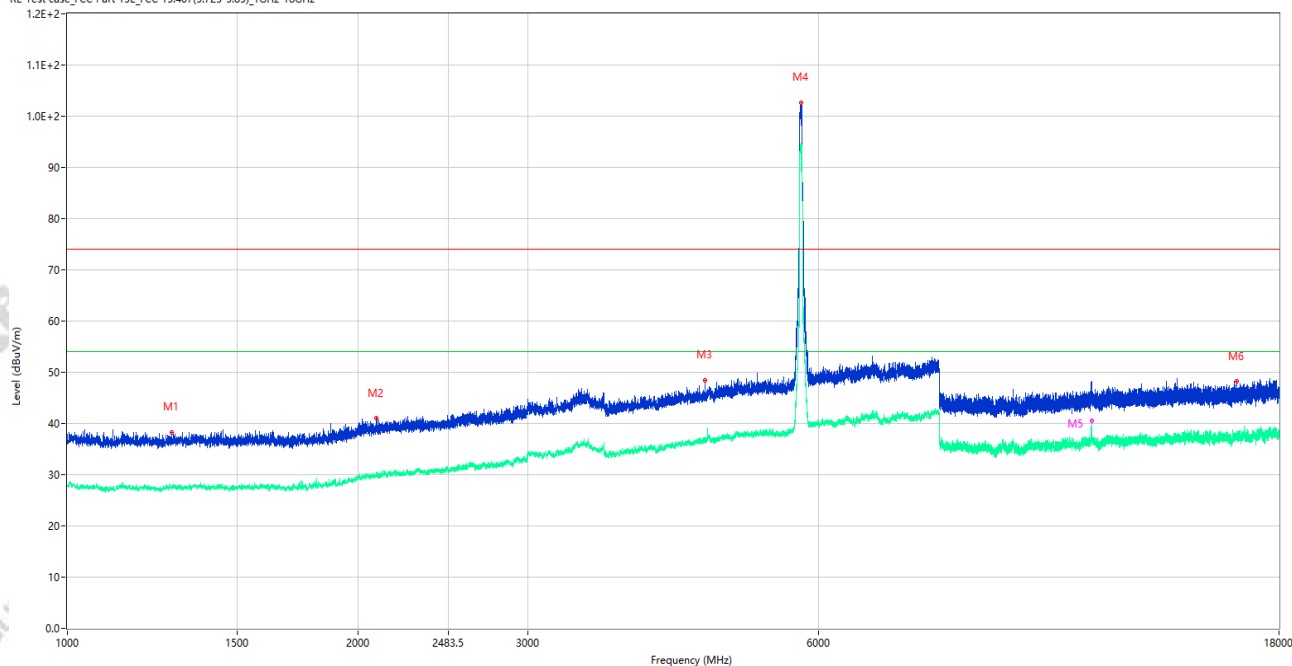

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1282.250	38.33	-15.94	74.0	35.67	Peak	68.00	150	Horizontal	Pass
1**	1282.250	27.36	-15.94	54.0	26.64	AV	68.00	150	Horizontal	Pass
2	2088.500	40.98	-13.68	74.0	33.02	Peak	277.00	150	Horizontal	Pass
2**	2088.500	30.17	-13.68	54.0	23.83	AV	277.00	150	Horizontal	Pass
3	4577.000	48.51	-3.39	74.0	25.49	Peak	206.00	150	Horizontal	Pass
3**	4577.000	36.77	-3.39	54.0	17.23	AV	206.00	150	Horizontal	Pass
4	5760.000	102.67	-1.94	74.0	-28.67	Peak	25.00	150	Horizontal	N/A
4**	5760.000	94.06	-1.94	54.0	-40.06	AV	25.00	150	Horizontal	N/A
5	11510.250	46.10	-3.01	74.0	27.90	Peak	145.00	150	Horizontal	Pass
5**	11510.250	40.48	-3.01	54.0	13.52	AV	145.00	150	Horizontal	Pass
6	16290.338	48.20	-1.56	74.0	25.80	Peak	313.00	150	Horizontal	Pass
6**	16290.338	37.62	-1.56	54.0	16.38	AV	313.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_16.05.39

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

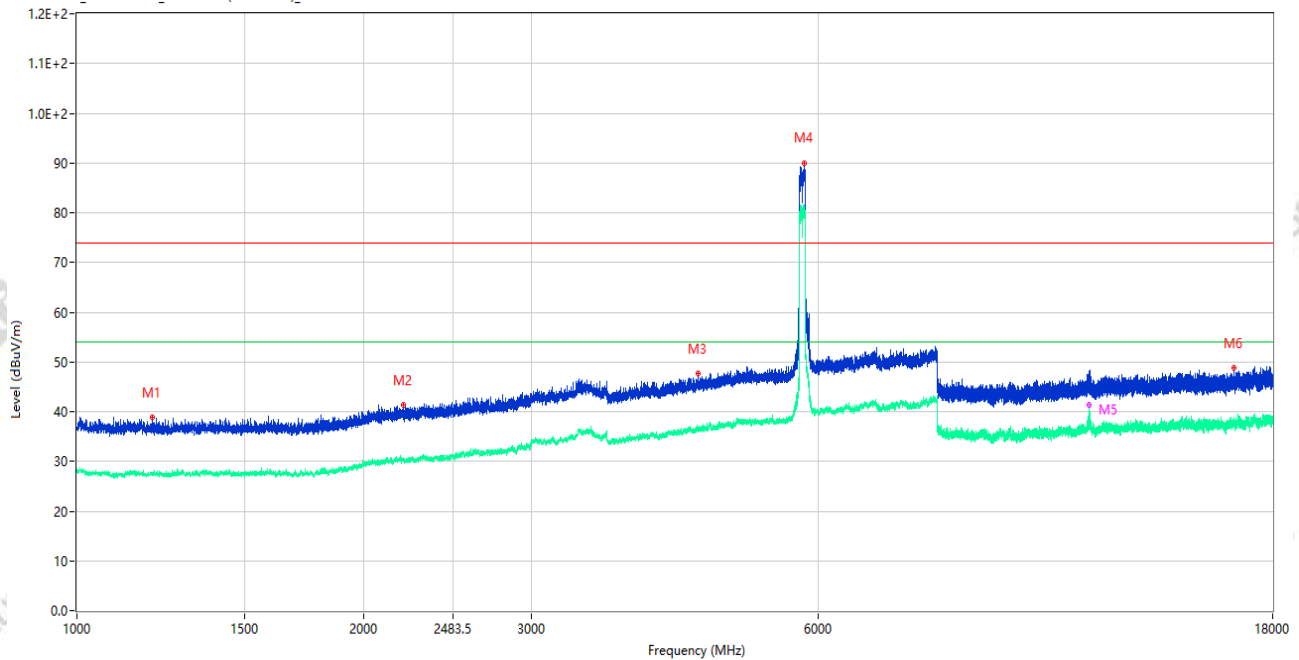

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.000	38.87	-15.75	74.0	35.13	Peak	210.00	150	Vertical	Pass
1**	1199.000	27.75	-15.75	54.0	26.25	AV	210.00	150	Vertical	Pass
2	2202.250	41.37	-13.34	74.0	32.63	Peak	146.00	150	Vertical	Pass
2**	2202.250	30.67	-13.34	54.0	23.33	AV	146.00	150	Vertical	Pass
3	4489.500	47.63	-3.35	74.0	26.37	Peak	360.00	150	Vertical	Pass
3**	4489.500	36.52	-3.35	54.0	17.48	AV	360.00	150	Vertical	Pass
4	5796.000	90.04	-1.43	74.0	-16.04	Peak	204.00	150	Vertical	N/A
4**	5796.000	81.58	-1.43	54.0	-27.58	AV	204.00	150	Vertical	N/A
5	11550.387	46.87	-2.55	74.0	27.13	Peak	306.00	150	Vertical	Pass
5**	11550.387	41.40	-2.55	54.0	12.60	AV	306.00	150	Vertical	Pass
6	16386.150	48.78	-1.30	74.0	25.22	Peak	278.00	150	Vertical	Pass
6**	16386.150	38.48	-1.30	54.0	15.52	AV	278.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010339

Test Time: 2026-02-10_15.59.18

EUT Name: Mobile Phone

Temp.(°C): 23.2

Model Number: P685L

Humidity (%RH): 52

Sample Number: CC26010359-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11 ac80 CH155 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A01+数据线: A12

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

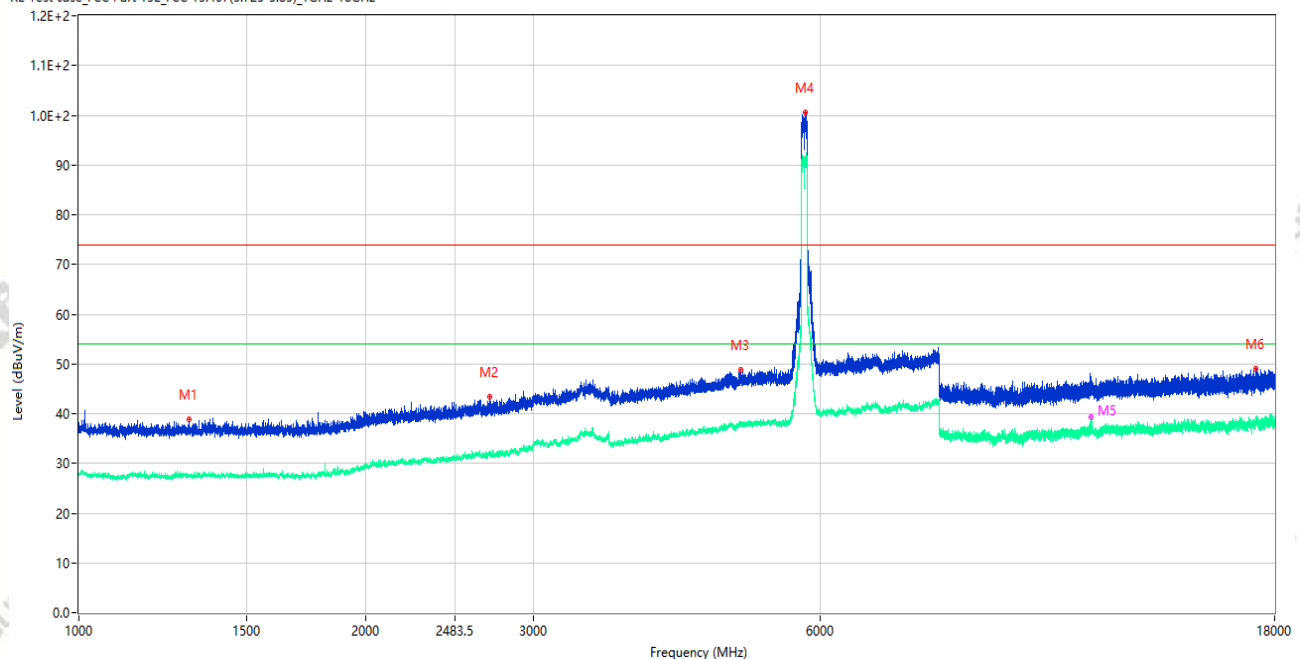

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1303.500	38.95	-15.59	74.0	35.05	Peak	5.00	150	Horizontal	Pass
1**	1303.500	27.49	-15.59	54.0	26.51	AV	5.00	150	Horizontal	Pass
2	2702.000	43.28	-10.42	74.0	30.72	Peak	272.00	150	Horizontal	Pass
2**	2702.000	32.21	-10.42	54.0	21.79	AV	272.00	150	Horizontal	Pass
3	4955.500	48.73	-1.75	74.0	25.27	Peak	360.00	150	Horizontal	Pass
3**	4955.500	37.75	-1.75	54.0	16.25	AV	360.00	150	Horizontal	Pass
4	5791.500	100.56	-1.53	74.0	-26.56	Peak	14.00	150	Horizontal	N/A
4**	5791.500	91.38	-1.53	54.0	-37.38	AV	14.00	150	Horizontal	N/A
5	11549.438	47.52	-2.57	74.0	26.48	Peak	142.00	150	Horizontal	Pass
5**	11549.438	39.41	-2.57	54.0	14.59	AV	142.00	150	Horizontal	Pass
6	17181.262	49.01	-0.05	74.0	24.99	Peak	212.00	150	Horizontal	Pass
6**	17181.262	38.76	-0.05	54.0	15.24	AV	212.00	150	Horizontal	Pass