

Test Plot 1#: GSM 850_Head Left Cheek_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.598 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.50 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.926 W/kg

SAR(1 g) = 0.535 W/kg; SAR(10 g) = 0.341 W/kg

Maximum value of SAR (measured) = 0.551 W/kg

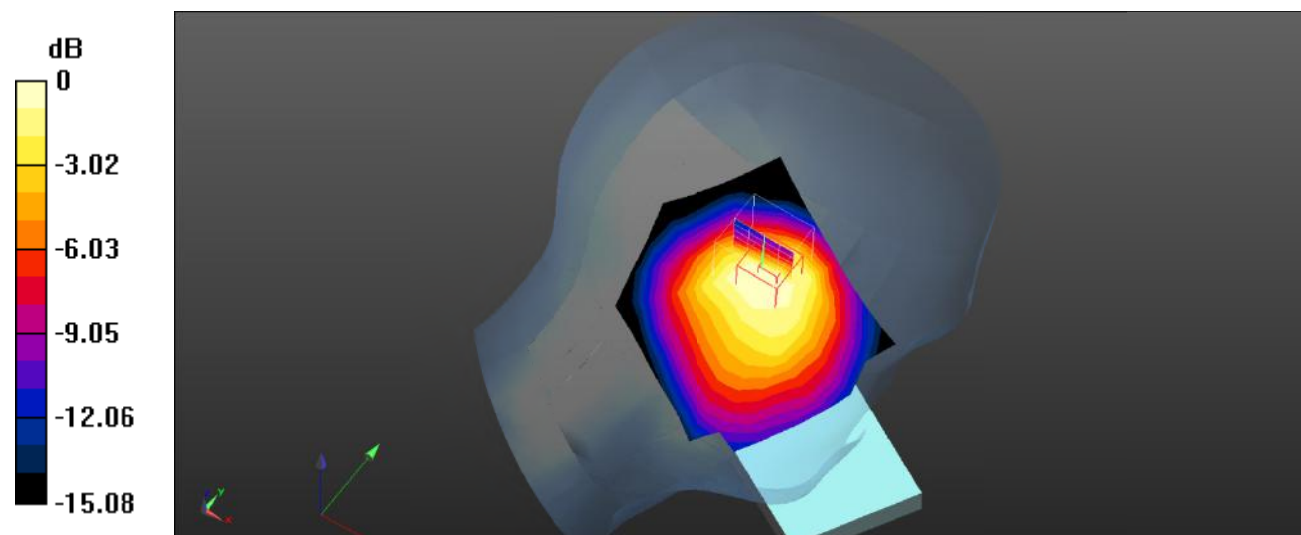

0 dB = 0.551 W/kg = -2.59 dB dBW/kg

Test Plot 2#: GSM 850_Head Left Tilt_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.531 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.11 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.856 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.503 W/kg

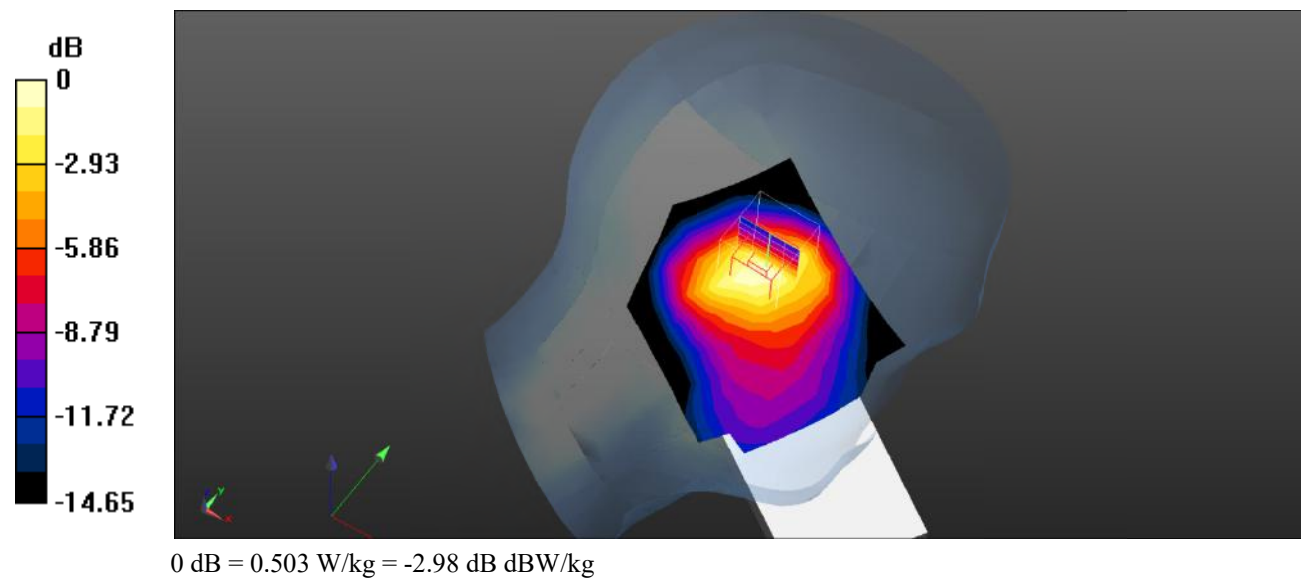

Test Plot 3#: GSM 850_Head Right Cheek_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.383 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.32 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.556 W/kg

SAR(1 g) = 0.361 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.383 W/kg

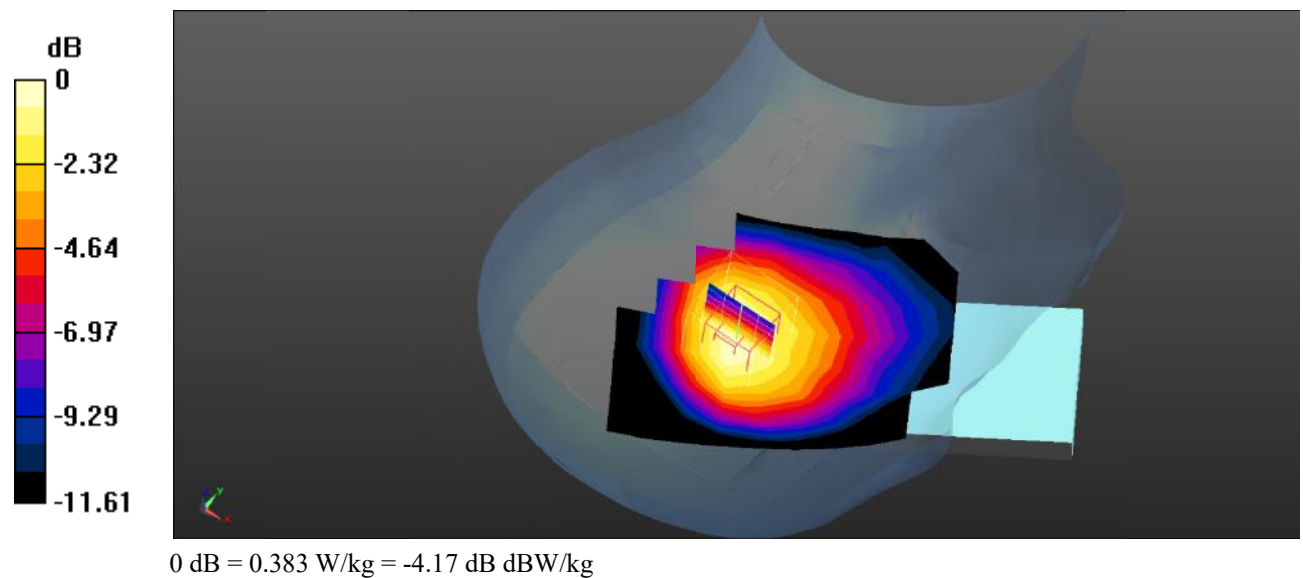

Test Plot 4#: GSM 850_Head Right Tilt_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.289 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.46 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.322 W/kg

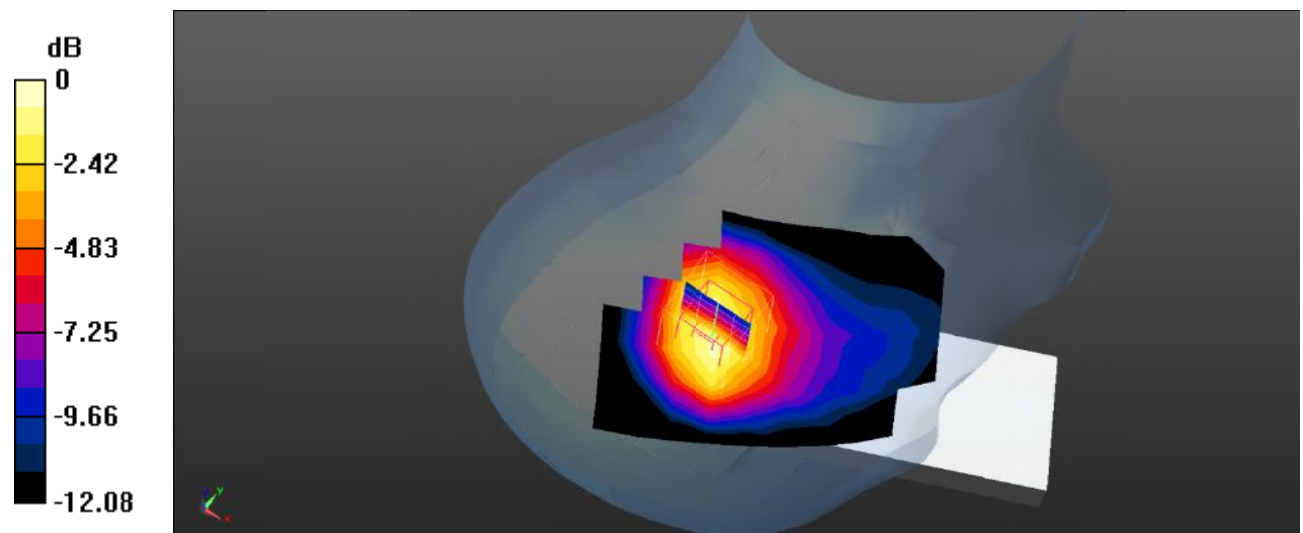

0 dB = 0.322 W/kg = -4.92 dB dBW/kg

Test Plot 5#: GSM 850_Body Worn Back_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.180 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.10 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.189 W/kg

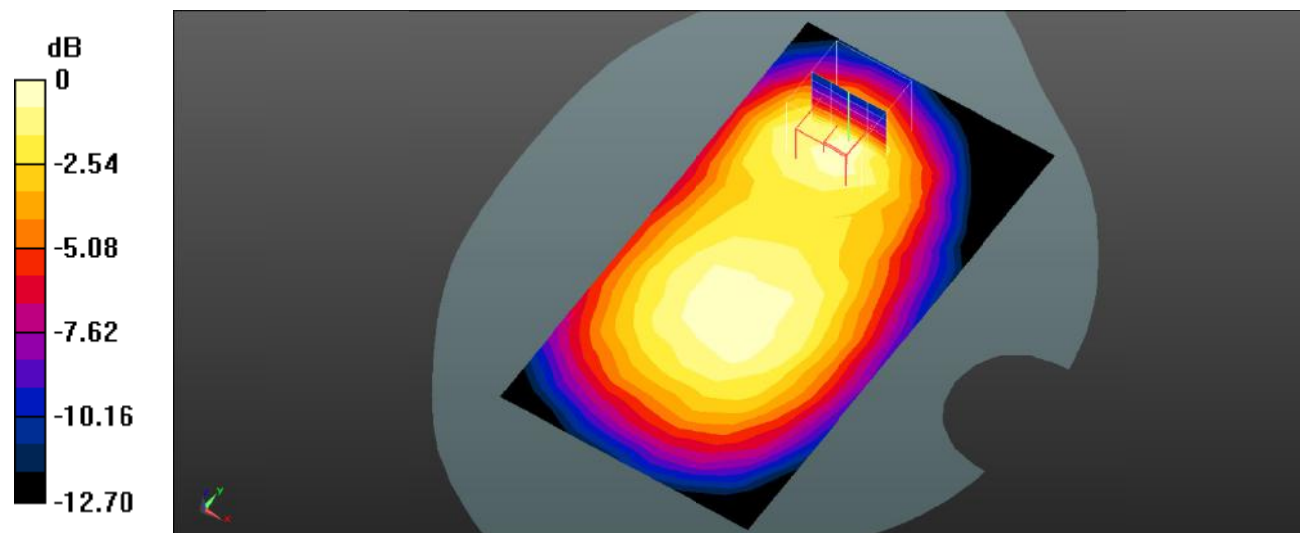

0 dB = 0.189 W/kg = -7.24 dB dBW/kg

Test Plot 6#: GSM 850_Body Front_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.108 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.01 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.103 W/kg

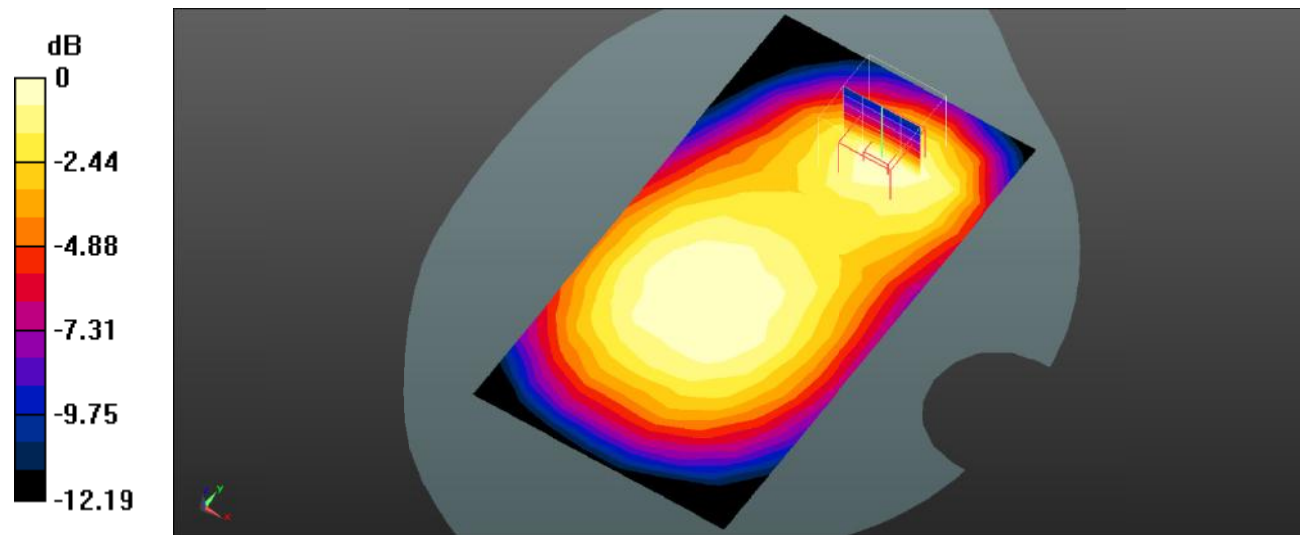

0 dB = 0.103 W/kg = -9.87 dB dBW/kg

Test Plot 7#: GSM 850_Body Back_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.194 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.70 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.187 W/kg

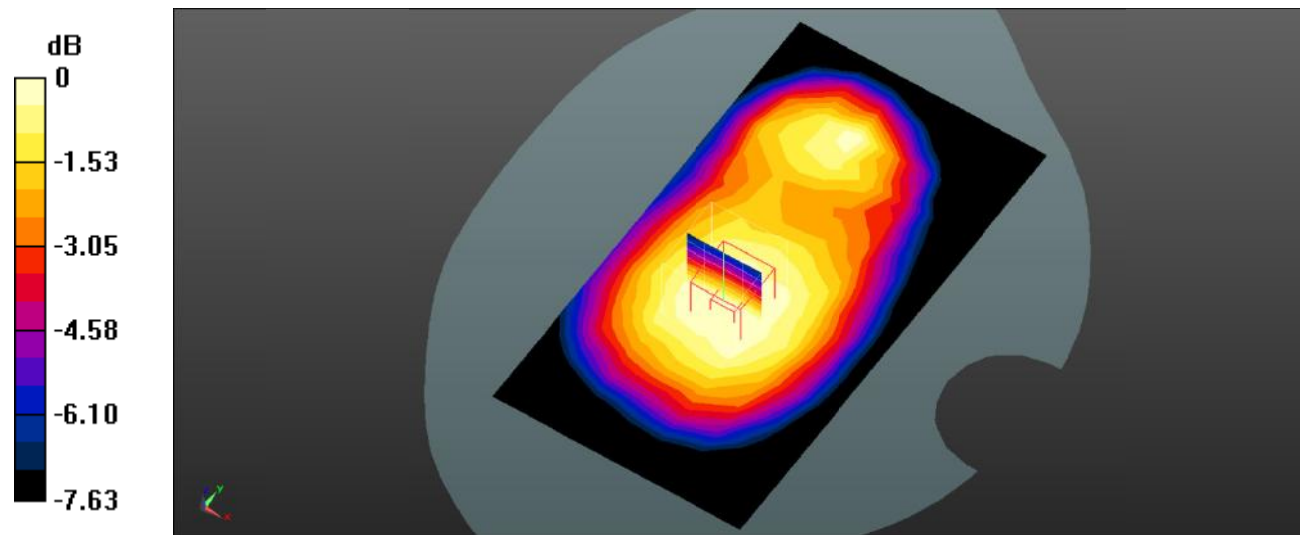

0 dB = 0.187 W/kg = -7.28 dB dBW/kg

Test Plot 8#: GSM 850_Body Right_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.162 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.87 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.202 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

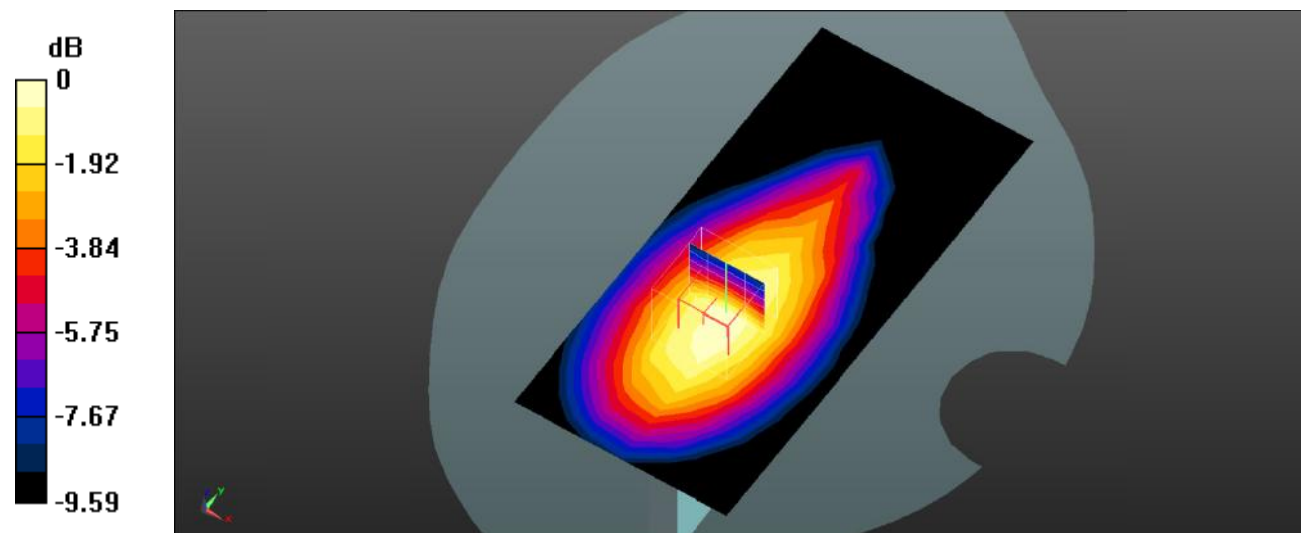

Test Plot 9#: GSM 850_Body Top_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.142 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.93 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

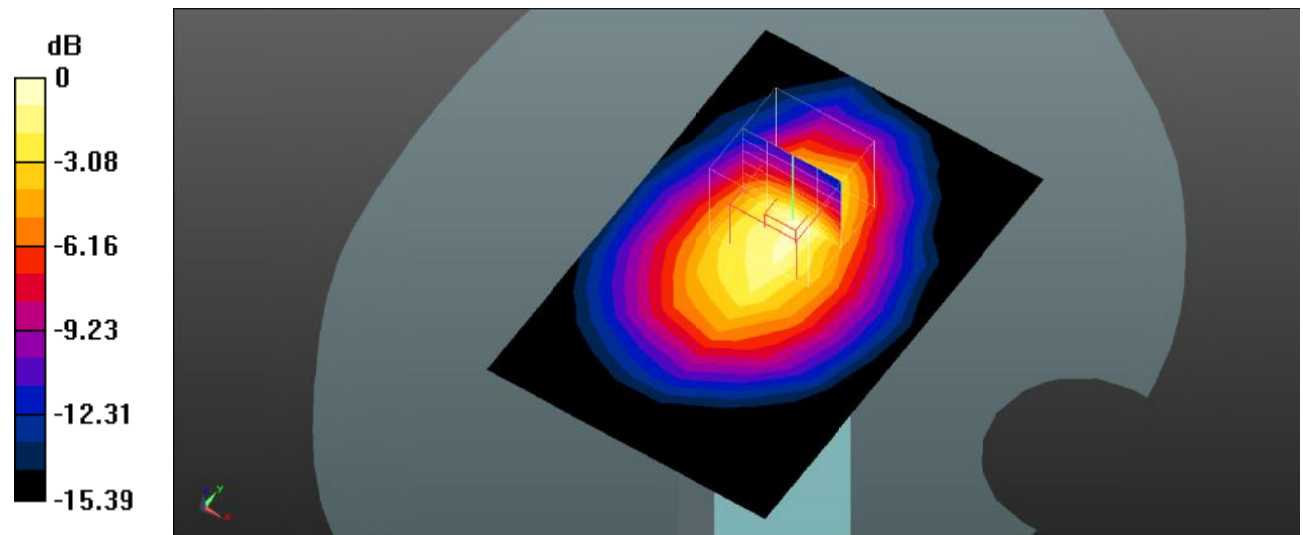

0 dB = 0.150 W/kg = -8.24 dB dBW/kg

Test Plot 10#: PCS 1900_Head Left Cheek_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.590 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.02 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.322 W/kg

Maximum value of SAR (measured) = 0.703 W/kg

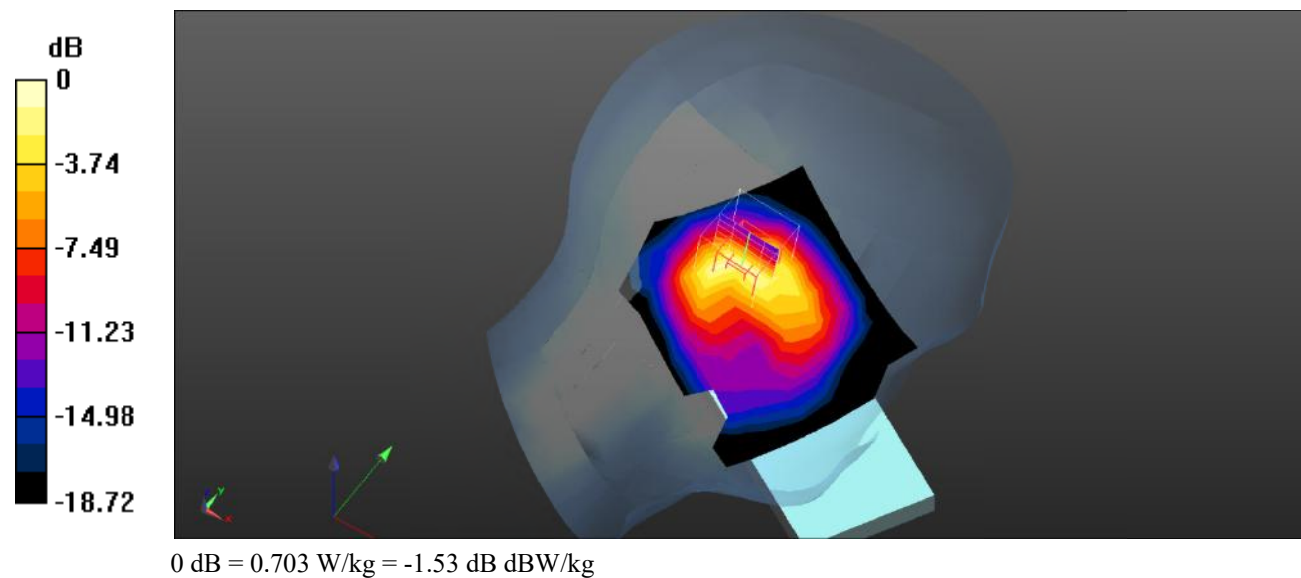

Test Plot 11#: PCS 1900_Head Left Tilt_Low**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.775$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1850.2 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.942 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.96 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.989 W/kg; SAR(10 g) = 0.497 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

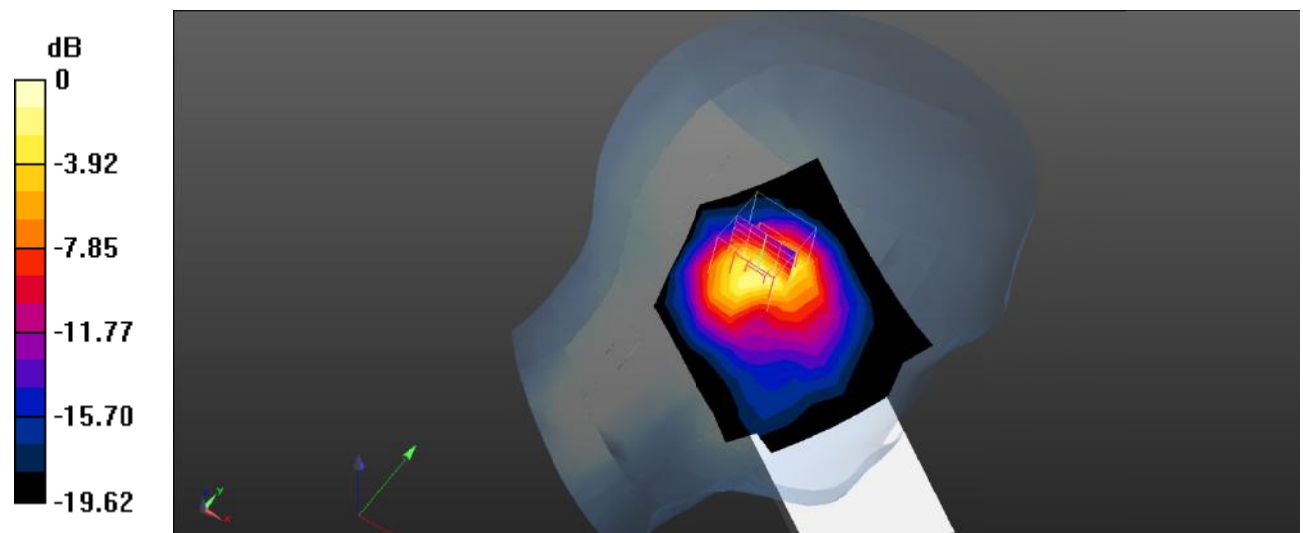

0 dB = 1.15 W/kg = 0.61 dB dBW/kg

Test Plot 12#: PCS 1900_Head Left Tilt_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.932 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.12 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.970 W/kg; SAR(10 g) = 0.497 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

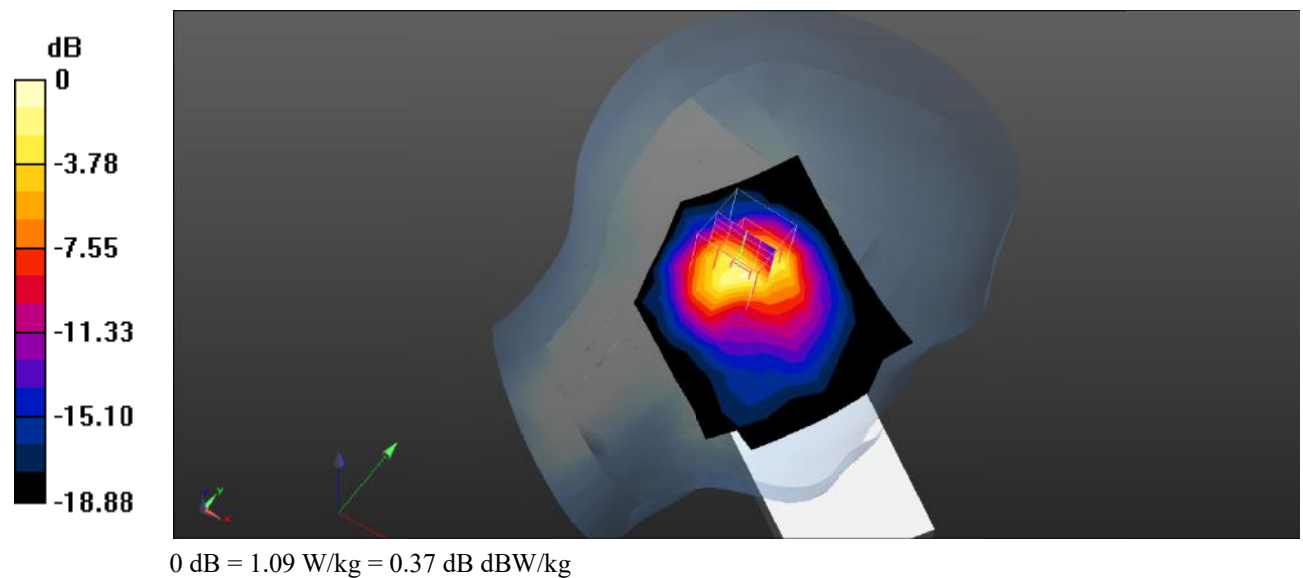

Test Plot 13#: PCS 1900_Head Left Tilt_High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 39.623$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1909.8 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.855 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.13 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.891 W/kg; SAR(10 g) = 0.453 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

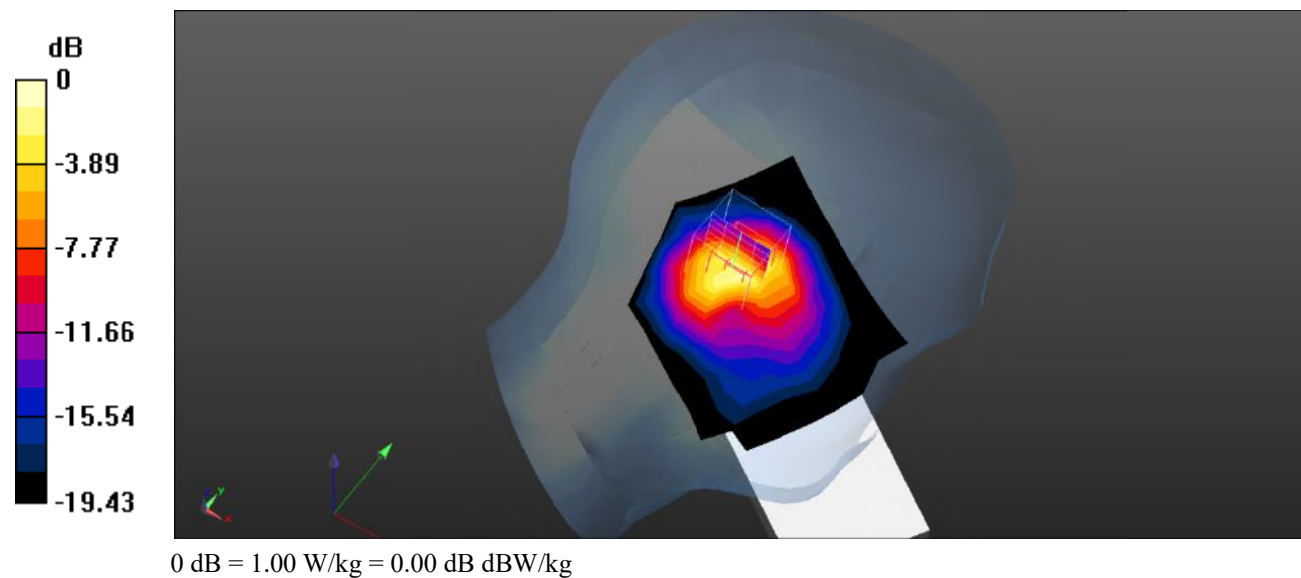

Test Plot 14#: PCS 1900_Head Right Cheek_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.783 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.12 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.748 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 0.855 W/kg

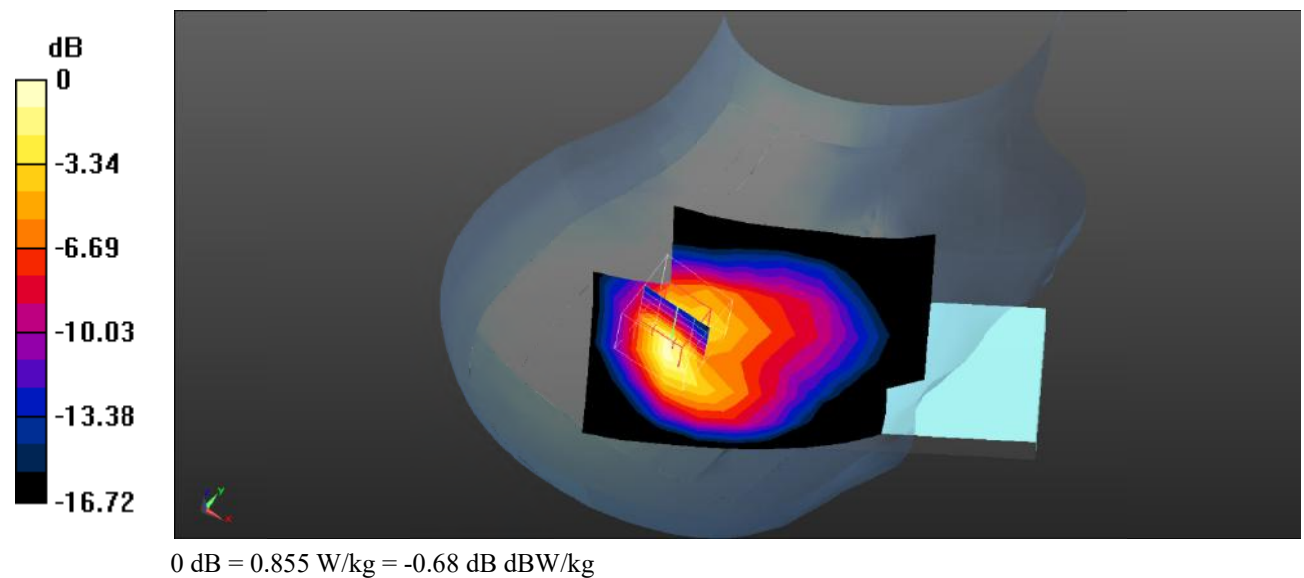

Test Plot 15#: PCS 1900_Head Right Tilt_Low**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.775$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1850.2 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.718 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.56 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.925 W/kg; SAR(10 g) = 0.475 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

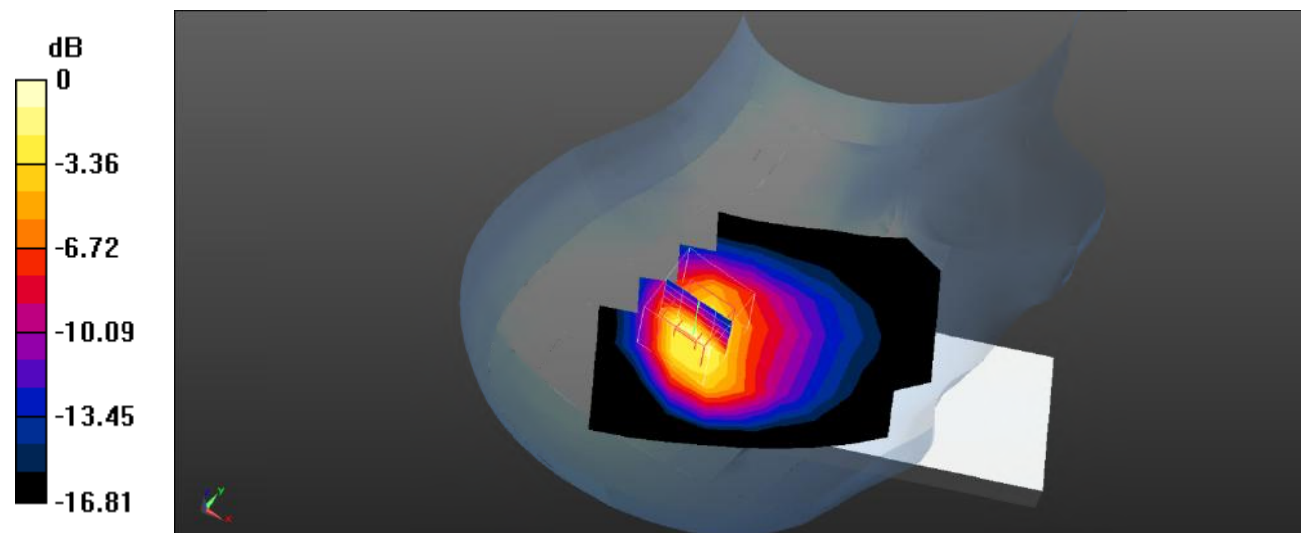

0 dB = 1.06 W/kg = 0.25 dB dBW/kg

Test Plot 16#: PCS 1900_Head Right Tilt_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.717 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.07 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.919 W/kg; SAR(10 g) = 0.468 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

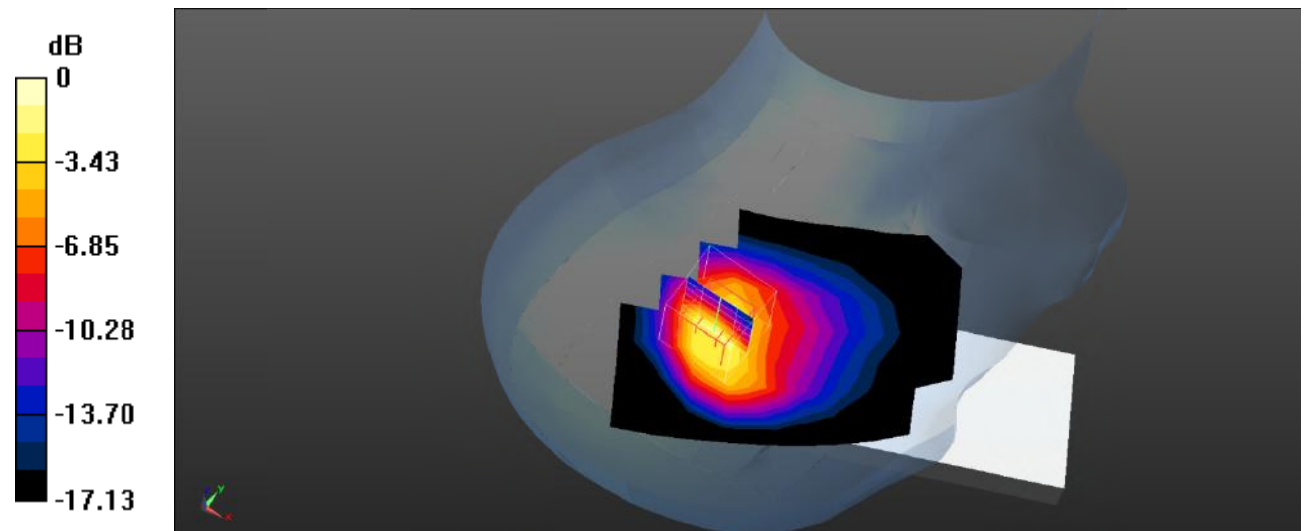

0 dB = 1.07 W/kg = 0.29 dB dBW/kg

Test Plot 17#: PCS 1900_Head Right Tilt_High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 39.623$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1909.8 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.638 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.94 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.834 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 0.964 W/kg

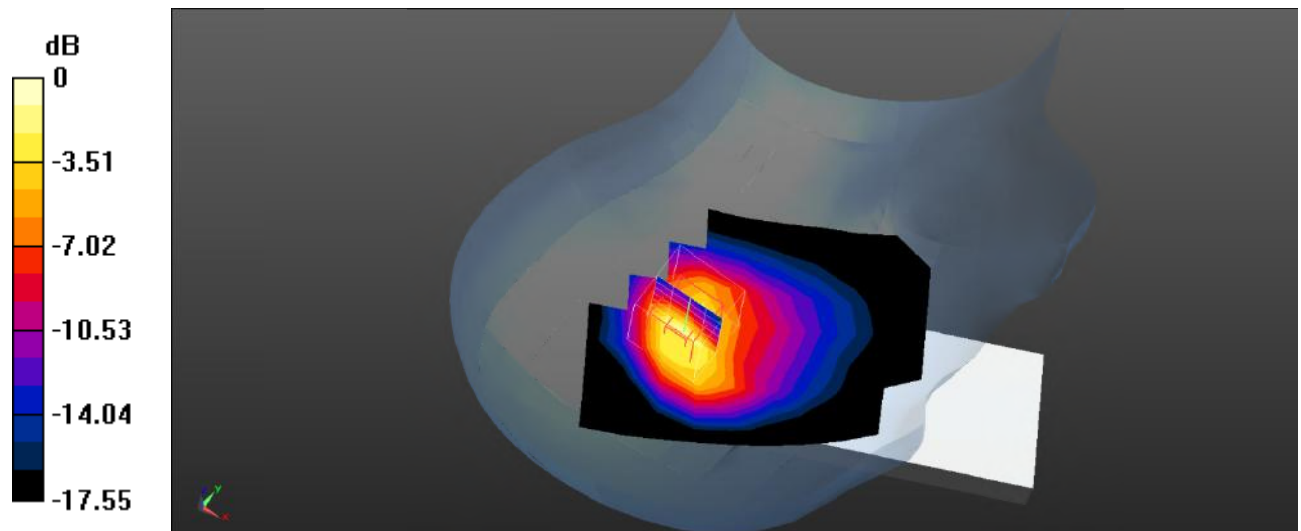

Test Plot 18#: PCS 1900_Body Worn Back_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.470 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.649 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.458 W/kg

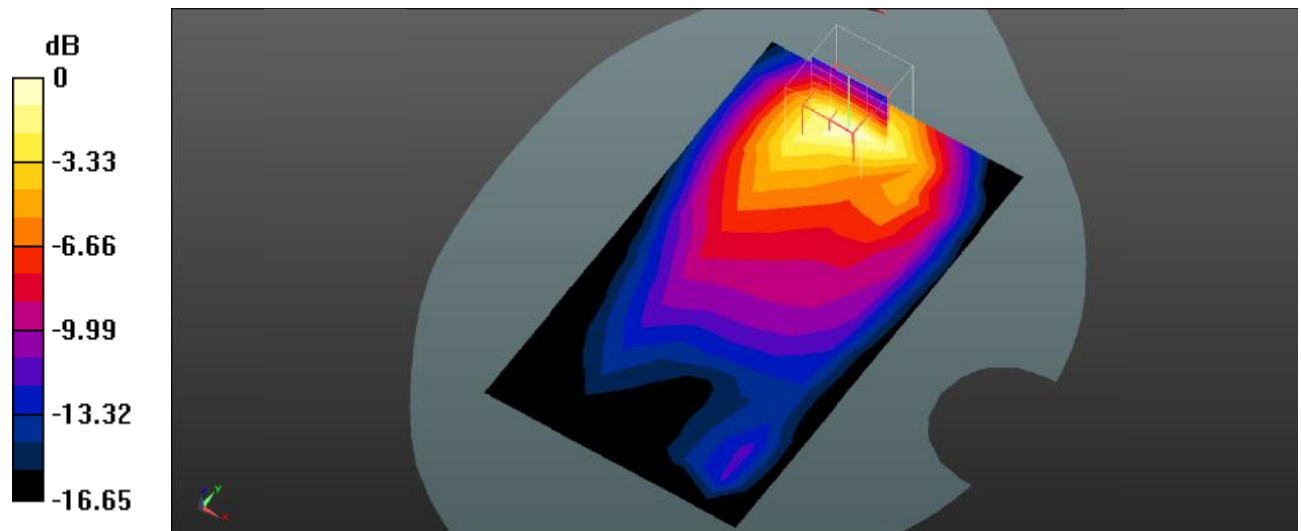

0 dB = 0.458 W/kg = -3.39 dB dBW/kg

Test Plot 19#: PCS 1900_Body Front_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.262 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.874 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.279 W/kg

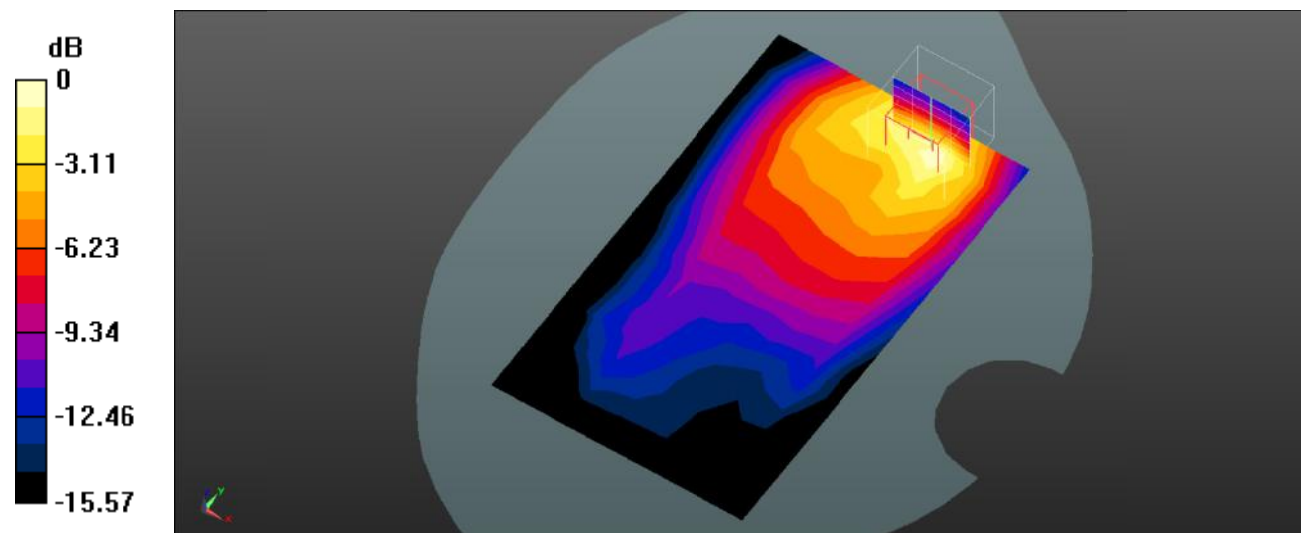

0 dB = 0.279 W/kg = -5.54 dB dBW/kg

Test Plot 20#: PCS 1900_Body Back_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.551 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.462 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.536 W/kg

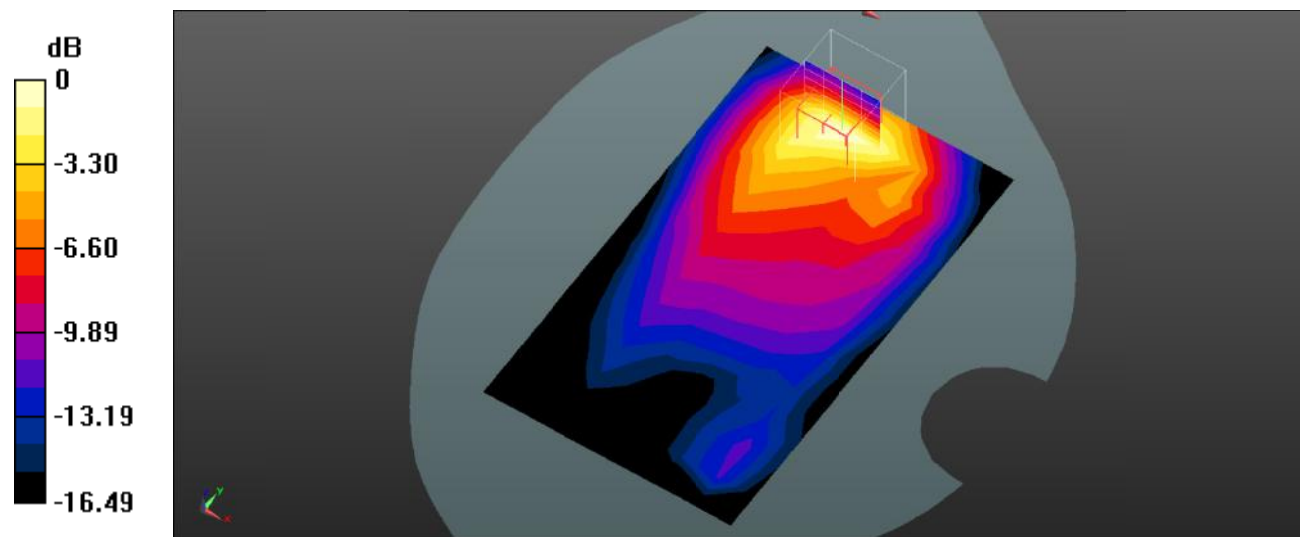

0 dB = 0.536 W/kg = -2.71 dB dBW/kg

Test Plot 21#: PCS 1900_Body Right_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0413 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.681 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0550 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0385 W/kg

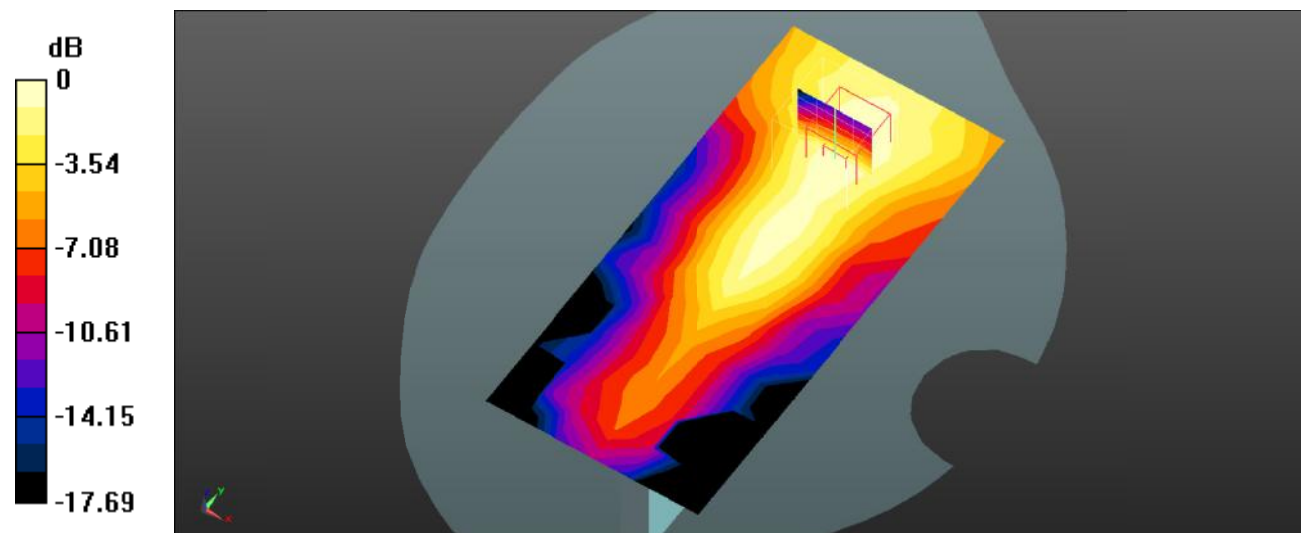

0 dB = 0.0385 W/kg = -14.15 dB dBW/kg

Test Plot 22#: PCS 1900_Body Top_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.609 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.24 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.936 W/kg

SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 0.636 W/kg

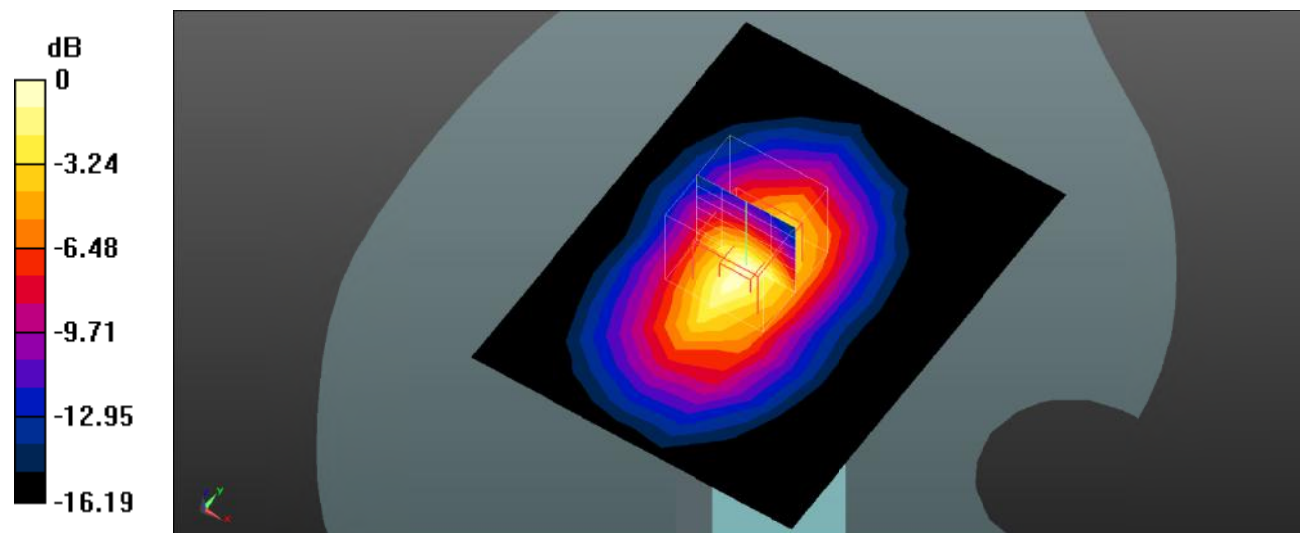

Test Plot 23#: WCDMA Band 2_Head Left Cheek_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.450 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.44 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.848 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.542 W/kg

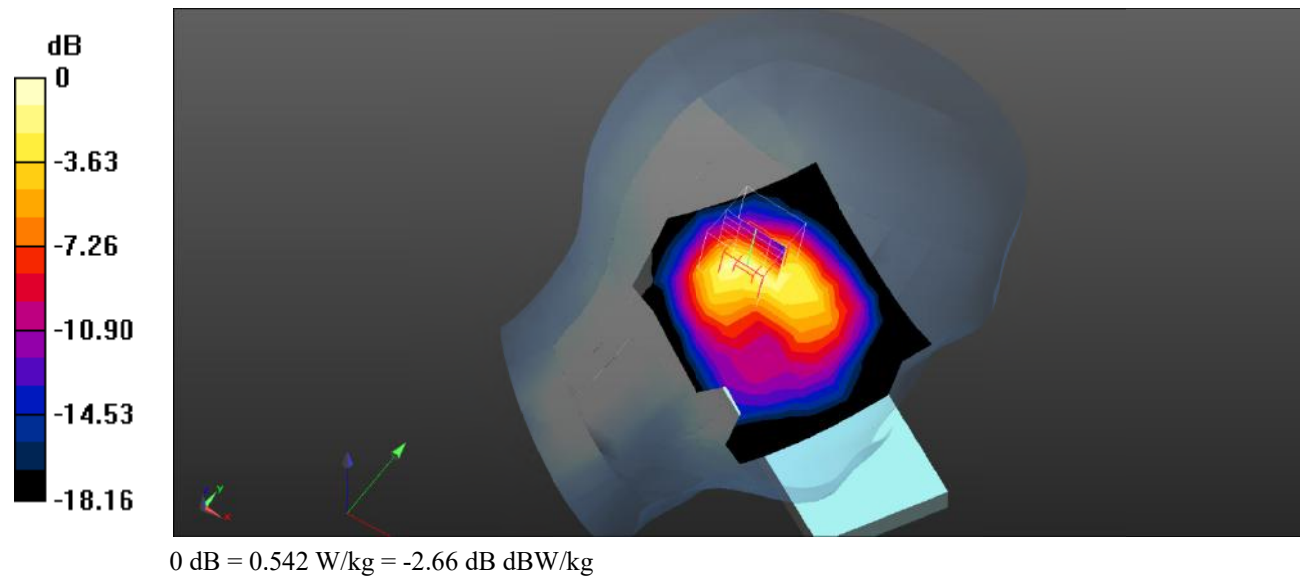

Test Plot 24#: WCDMA Band 2_Head Left Tilt_Low**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40.082$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1852.4 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.982 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.25 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.542 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

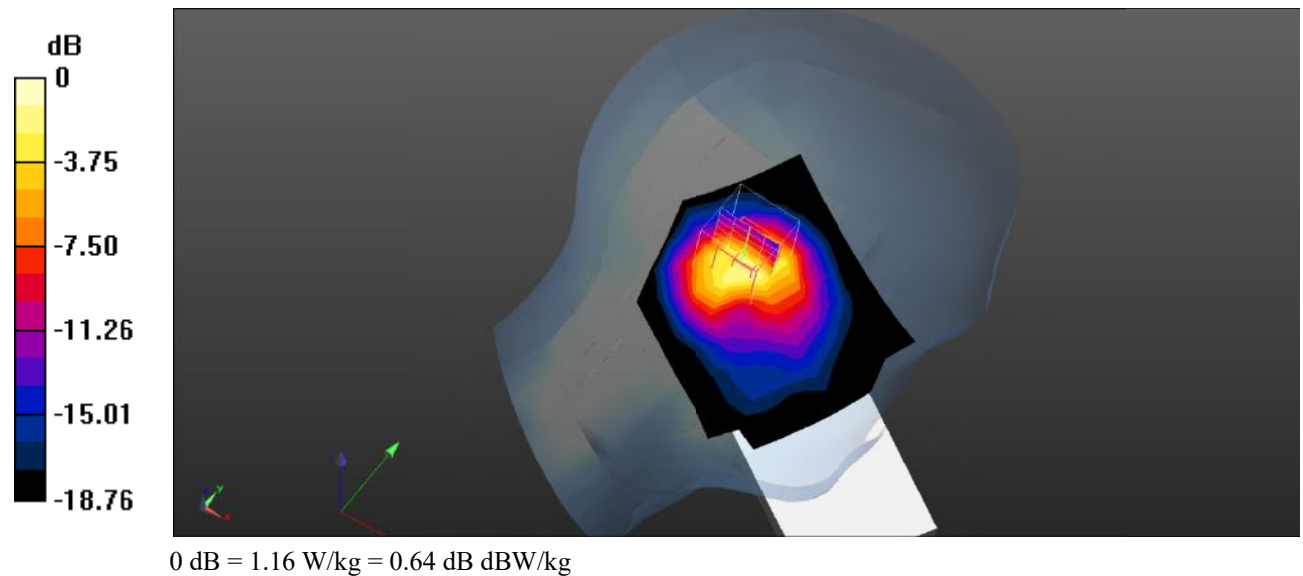

Test Plot 25#: WCDMA Band 2_Head Left Tilt_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.987 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.74 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.525 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

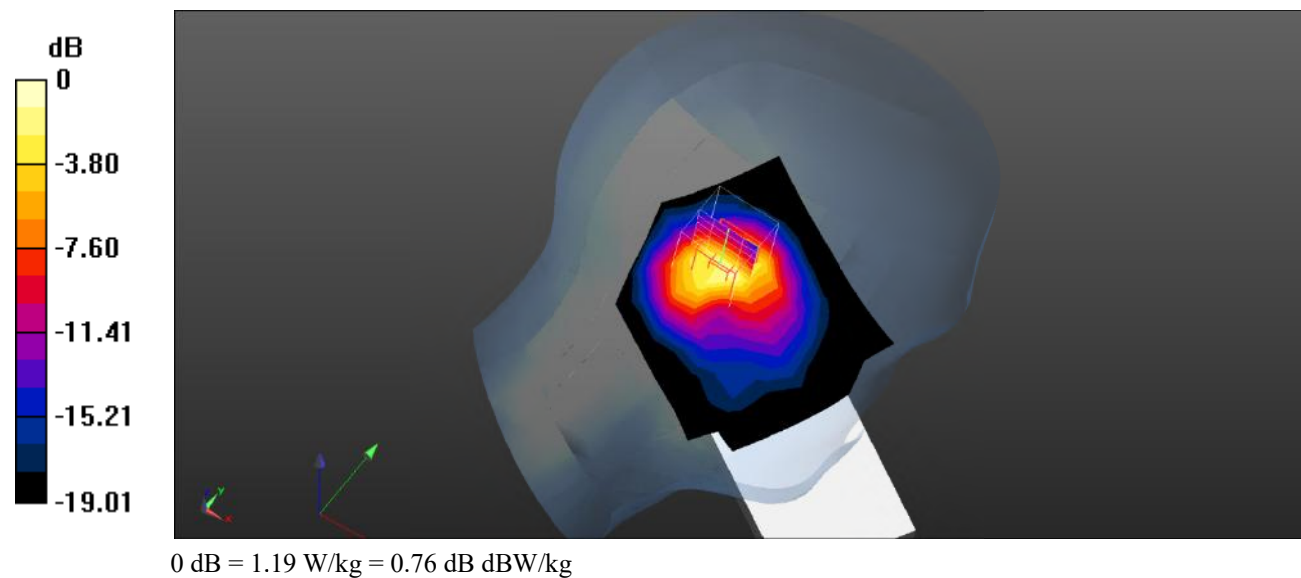

Test Plot 26#: WCDMA Band 2_Head Left Tilt_High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.447$ S/m; $\epsilon_r = 39.003$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1907.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.945 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.70 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.507 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

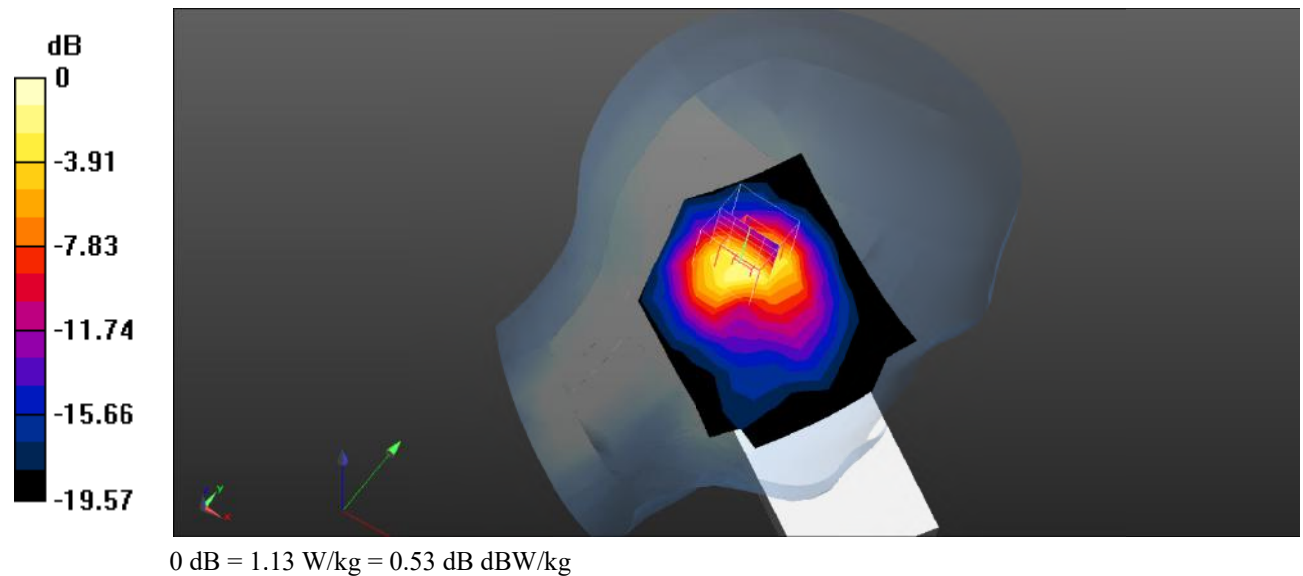

Test Plot 27#: WCDMA Band 2_Head Right Cheek_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.520 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.83 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 0.764 W/kg

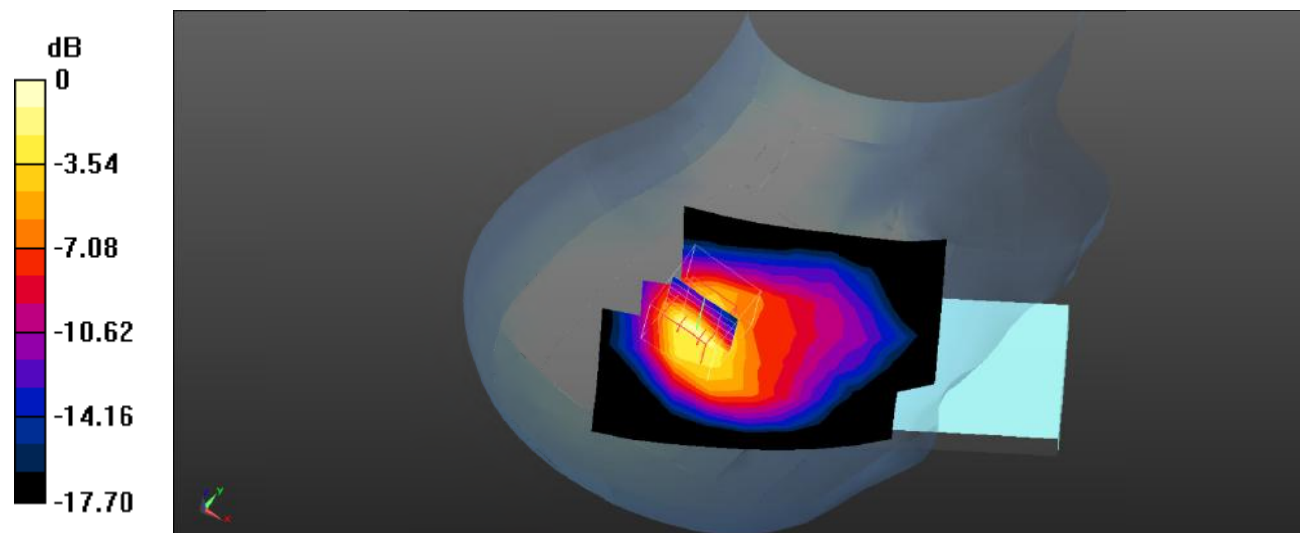

0 dB = 0.764 W/kg = -1.17 dB dBW/kg

Test Plot 28#: WCDMA Band 2_Head Right Tilt_Low**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40.082$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1852.4 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.694 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.63 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.853 W/kg; SAR(10 g) = 0.430 W/kg

Maximum value of SAR (measured) = 0.997 W/kg

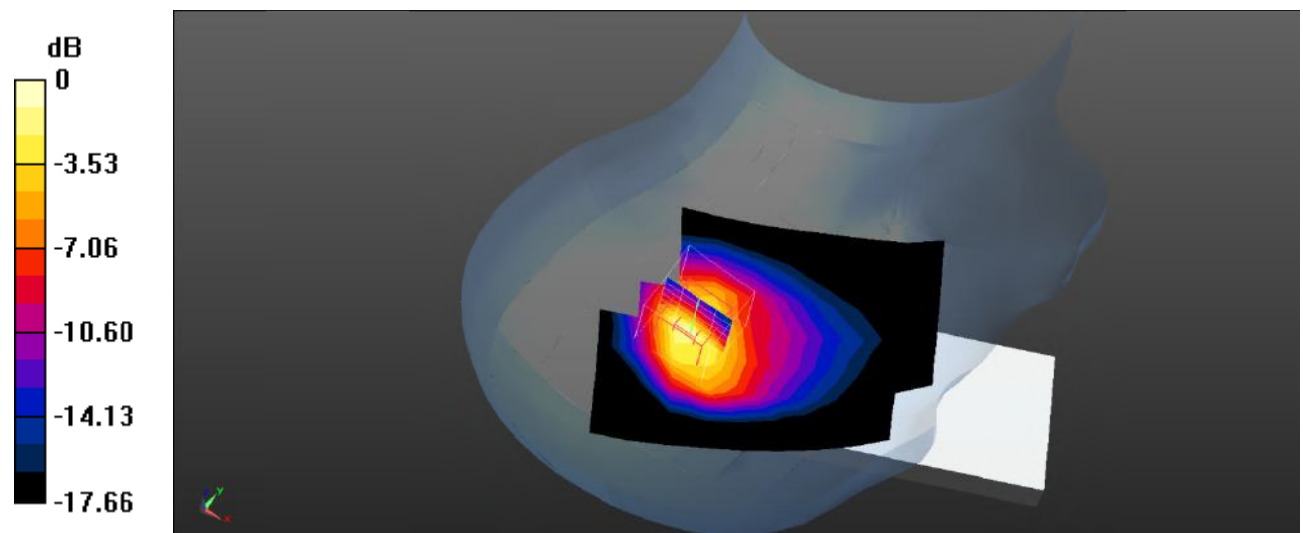

0 dB = 0.997 W/kg = -0.01 dB dBW/kg

Test Plot 29#: WCDMA Band 2_Head Right Tilt_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.690 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.38 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.420 W/kg

Maximum value of SAR (measured) = 0.982 W/kg

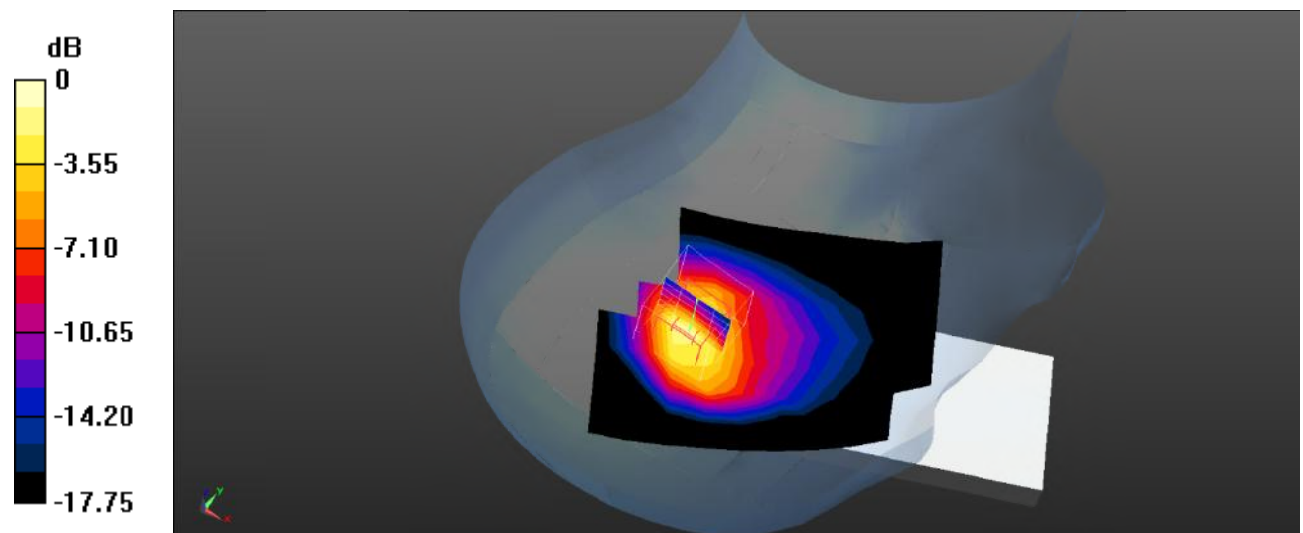

0 dB = 0.982 W/kg = -0.08 dB dBW/kg

Test Plot 30#: WCDMA Band 2_Head Right Tilt_High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.447$ S/m; $\epsilon_r = 39.003$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1907.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.726 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.82 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.424 W/kg

Maximum value of SAR (measured) = 0.999 W/kg

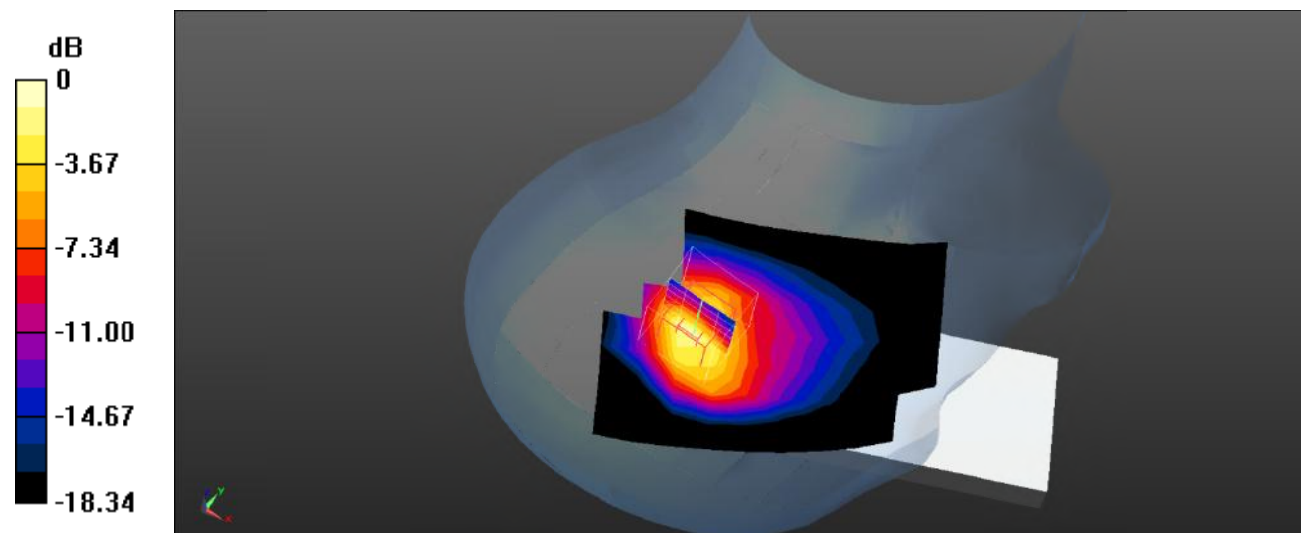

0 dB = 0.999 W/kg = -0.00 dB dBW/kg

Test Plot 31#: WCDMA Band 2_Body Front_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.200 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.176 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

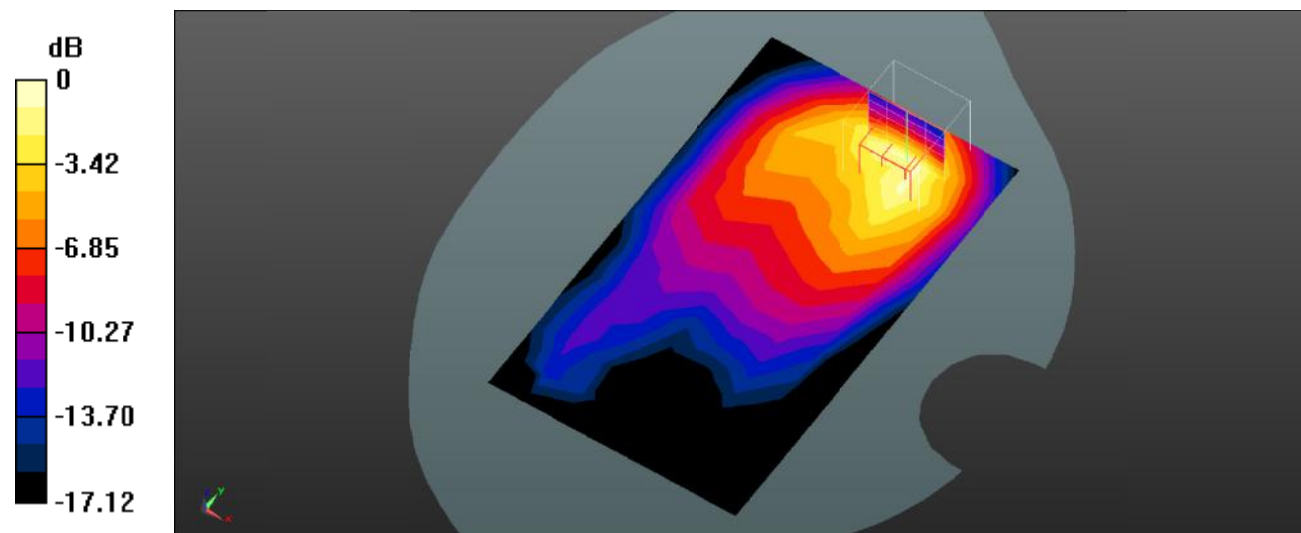

0 dB = 0.234 W/kg = -6.31 dB dBW/kg

Test Plot 32#: WCDMA Band 2_Body Back_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.341 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.426 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.370 W/kg

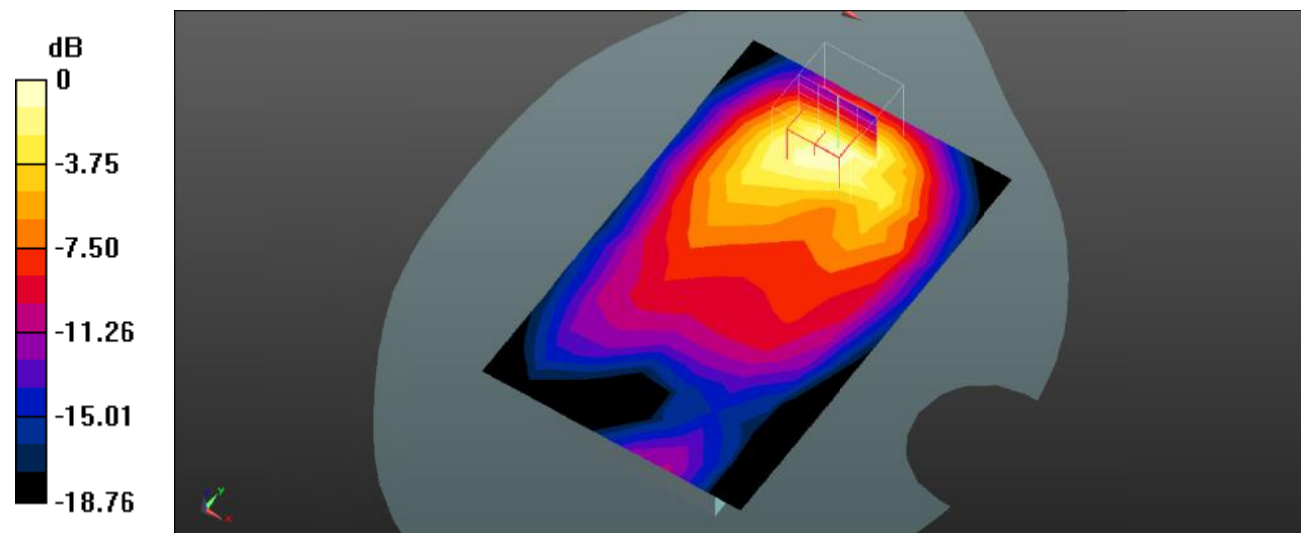

0 dB = 0.370 W/kg = -4.32 dB dBW/kg

Test Plot 33#: WCDMA Band 2_Body Right_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0450 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.824 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0470 W/kg

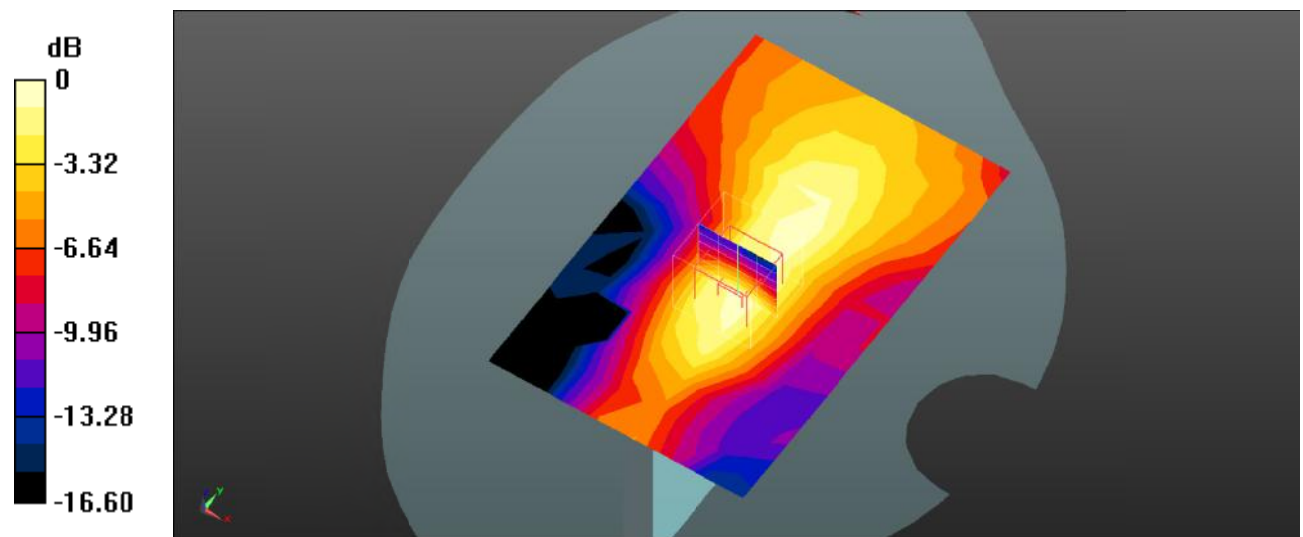

Test Plot 34#: WCDMA Band 2_Body Top_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.532 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.03 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.855 W/kg

SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 0.572 W/kg

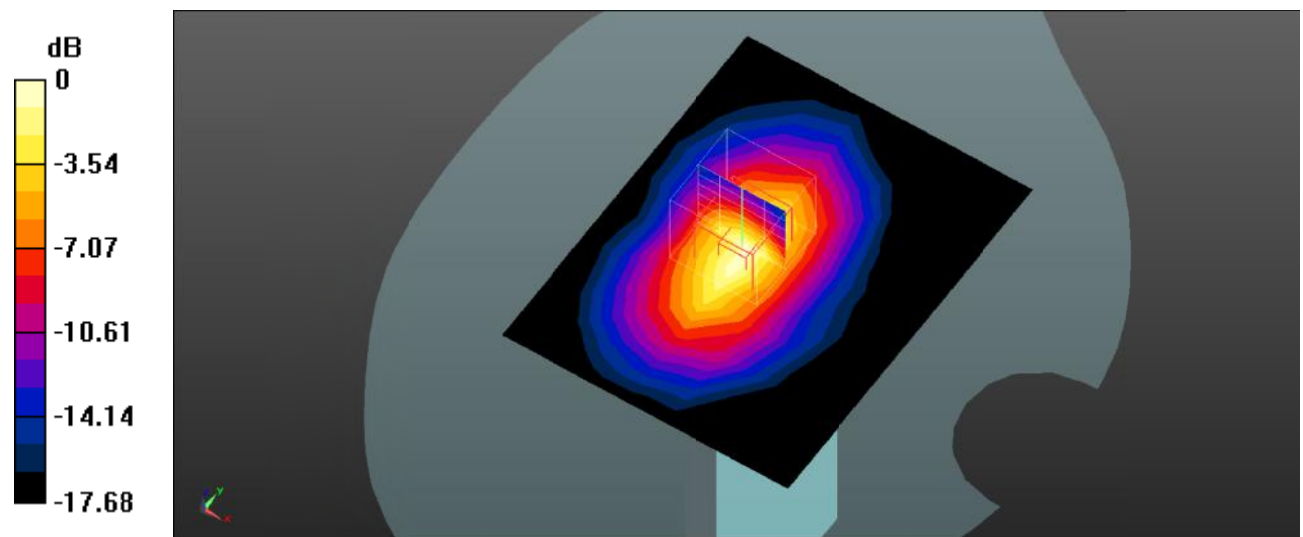

0 dB = 0.572 W/kg = -2.43 dB dBW/kg

Test Plot 35#: WCDMA Band 4_Head Left Cheek_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.393$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.470 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.53 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.479 W/kg

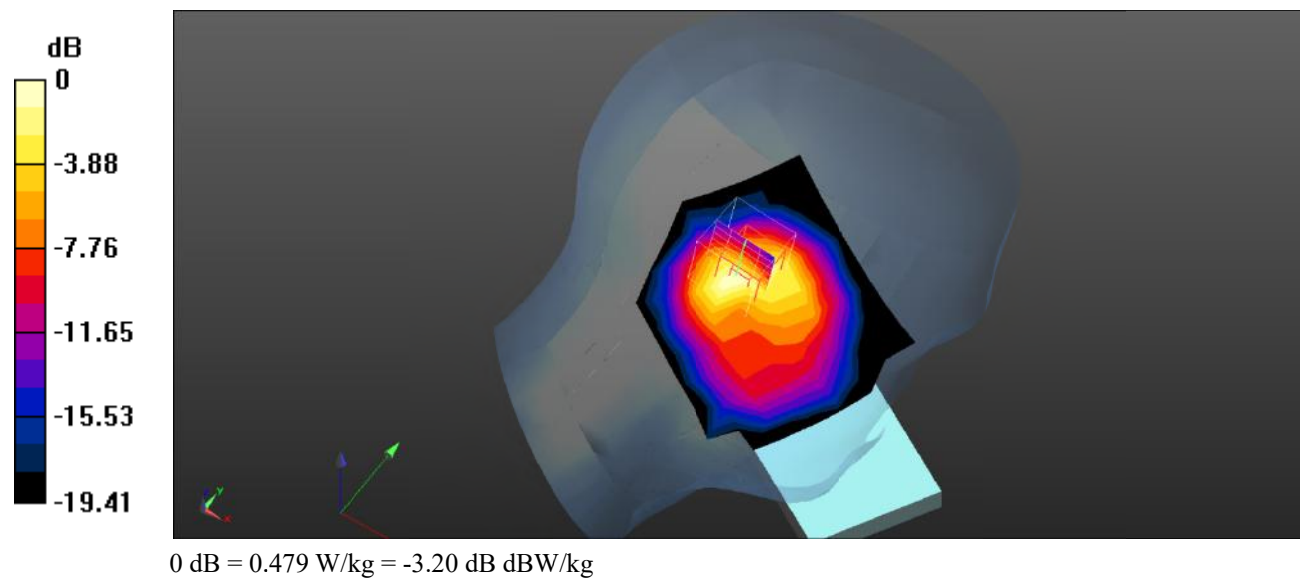

Test Plot 36#: WCDMA Band 4_Head Left Tilt_Low**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.851$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1712.4 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.633 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.11 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 0.769 W/kg

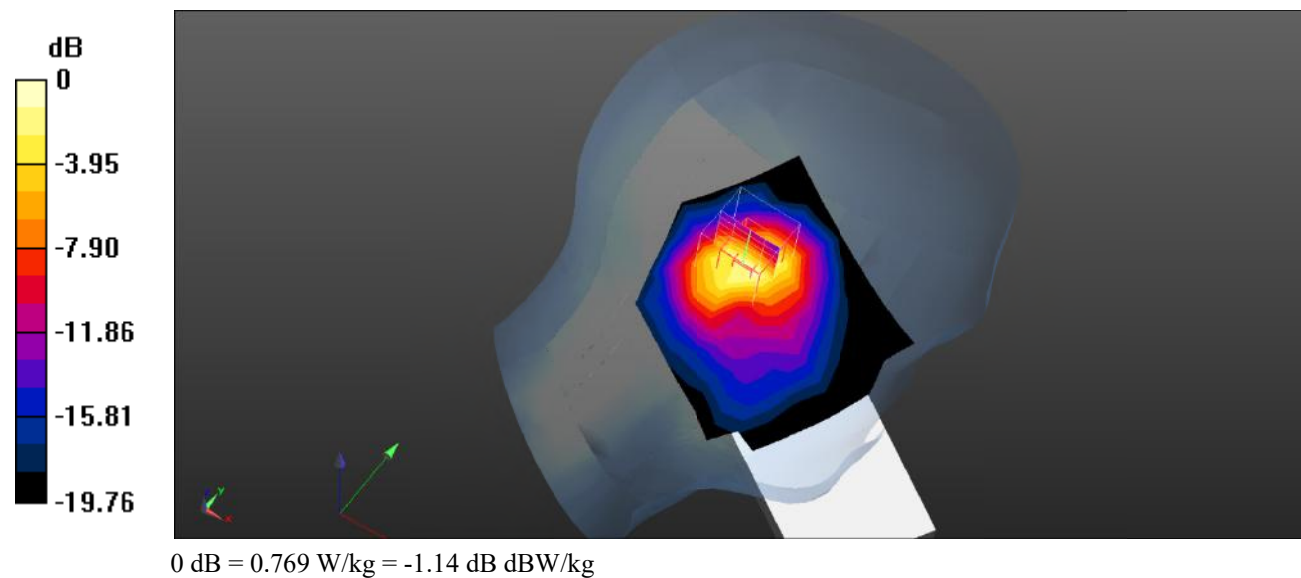

Test Plot 37#: WCDMA Band 4_Head Left Tilt_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.393$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.780 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.39 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.861 W/kg; SAR(10 g) = 0.439 W/kg

Maximum value of SAR (measured) = 0.932 W/kg

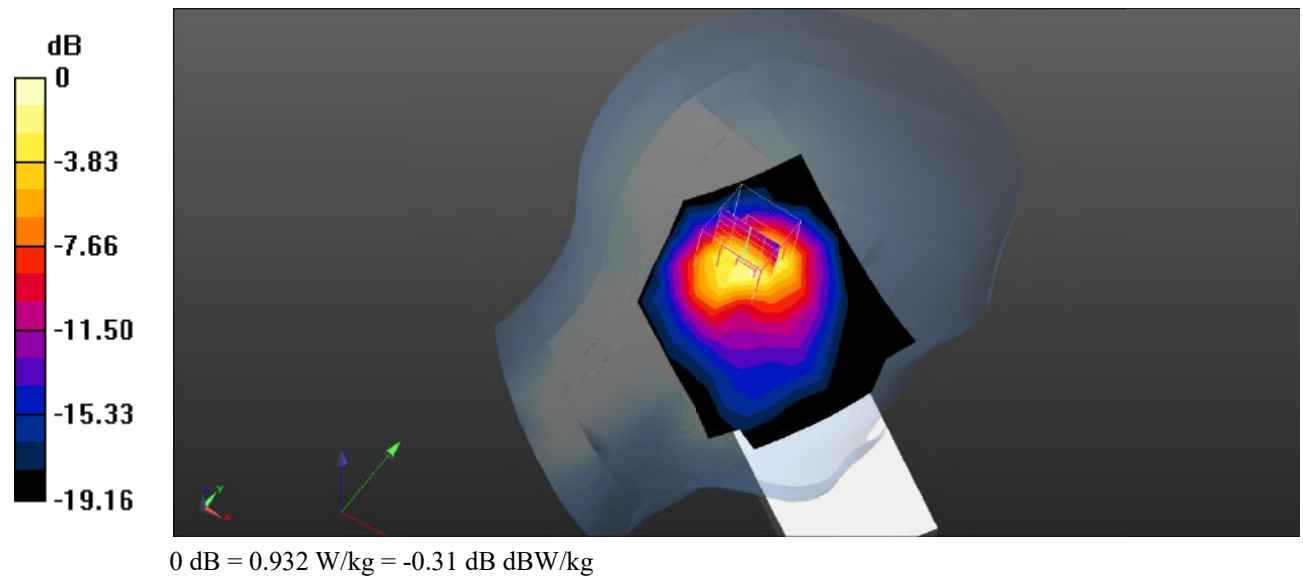

Test Plot 38#: WCDMA Band 4_Head Left Tilt_High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.346$ S/m; $\epsilon_r = 41.93$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @ 1752.6 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Tilt/WCDMA Band 4 High/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.562 W/kg


Head Left Tilt/WCDMA Band 4 High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.54 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 0.661 W/kg

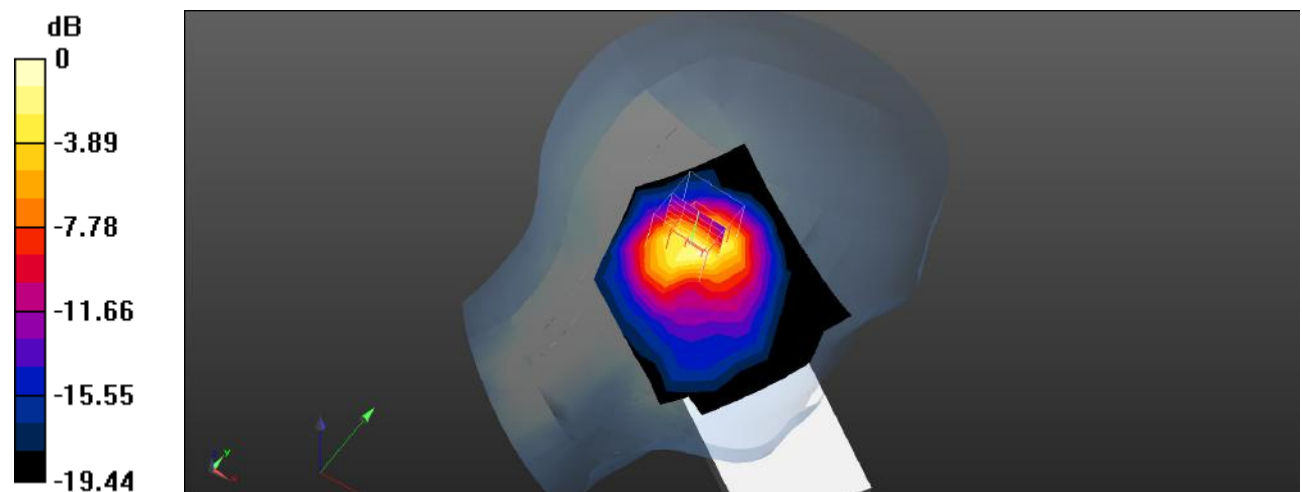

Test Plot 39#: WCDMA Band 4_Head Right Cheek_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.393$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.471 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.79 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 0.684 W/kg

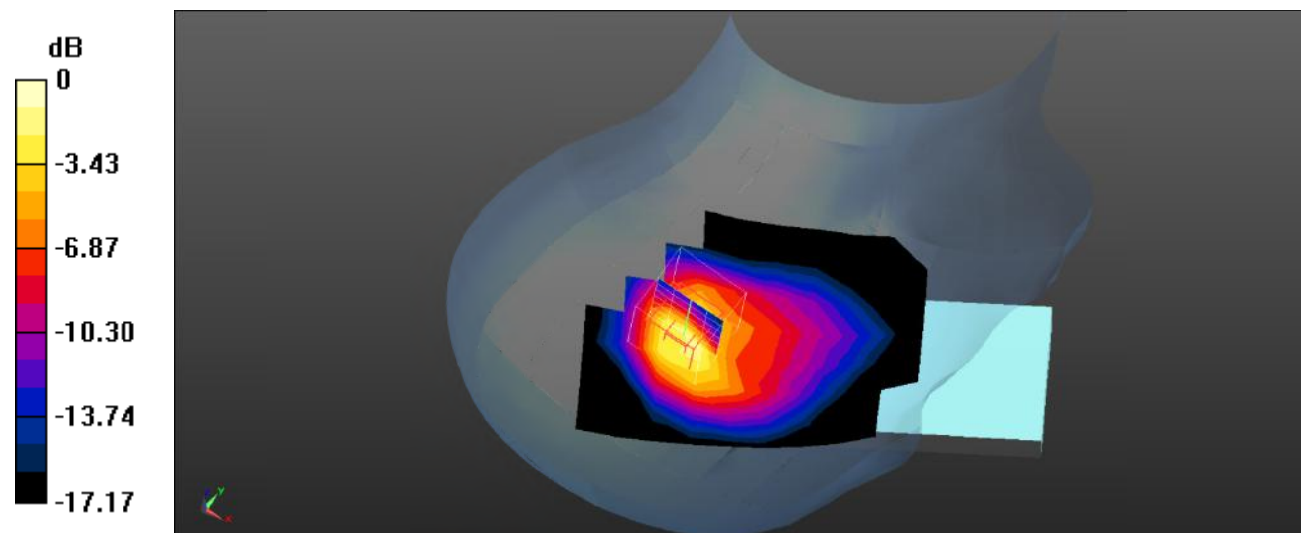

0 dB = 0.684 W/kg = -1.65 dB dBW/kg

Test Plot 40#: WCDMA Band 4_Head Right Tilt_Low**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.851$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1712.4 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.458 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.33 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.651 W/kg; SAR(10 g) = 0.324 W/kg

Maximum value of SAR (measured) = 0.742 W/kg

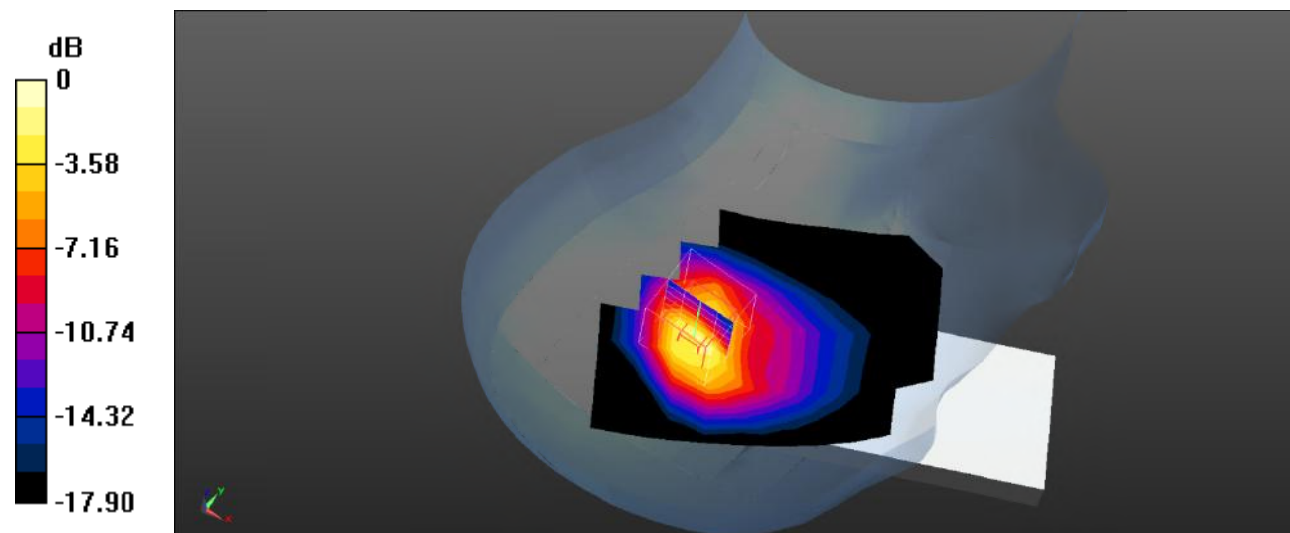

0 dB = 0.742 W/kg = -1.30 dB dBW/kg

Test Plot 41#: WCDMA Band 4_Head Right Tilt_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.393$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.562 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.88 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.803 W/kg; SAR(10 g) = 0.399 W/kg

Maximum value of SAR (measured) = 0.917 W/kg

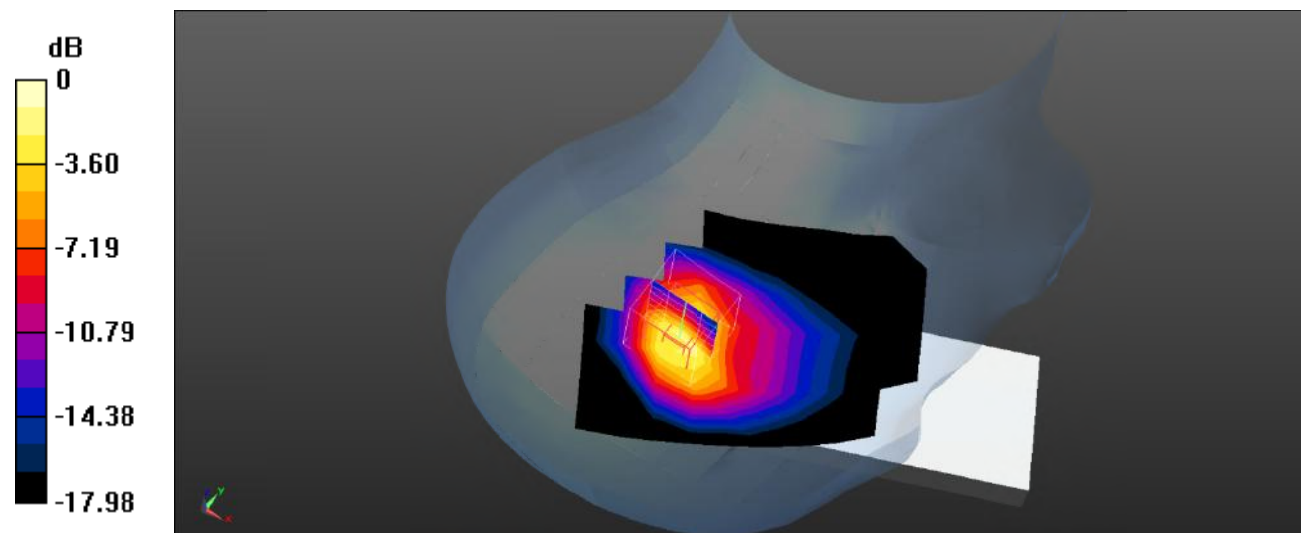

Test Plot 42#: WCDMA Band 4_Head Right Tilt_High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 40.346$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1752.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.400 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.48 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.652 W/kg

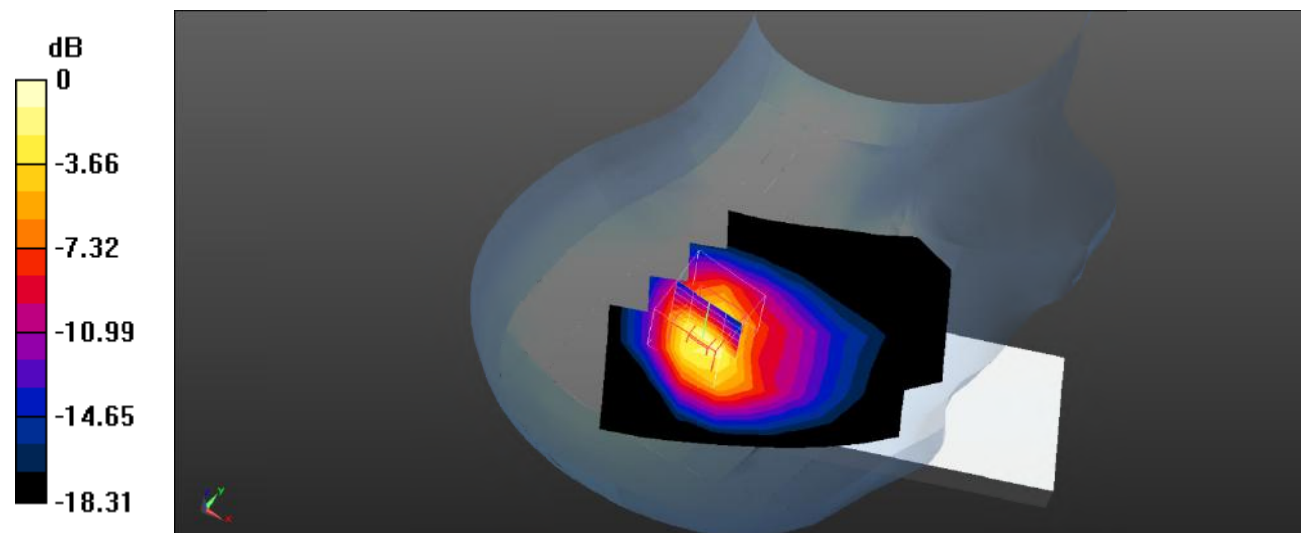

0 dB = 0.652 W/kg = -1.86 dB dBW/kg

Test Plot 43#: WCDMA Band 4_Body Front_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.393$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.168 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.932 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.198 W/kg

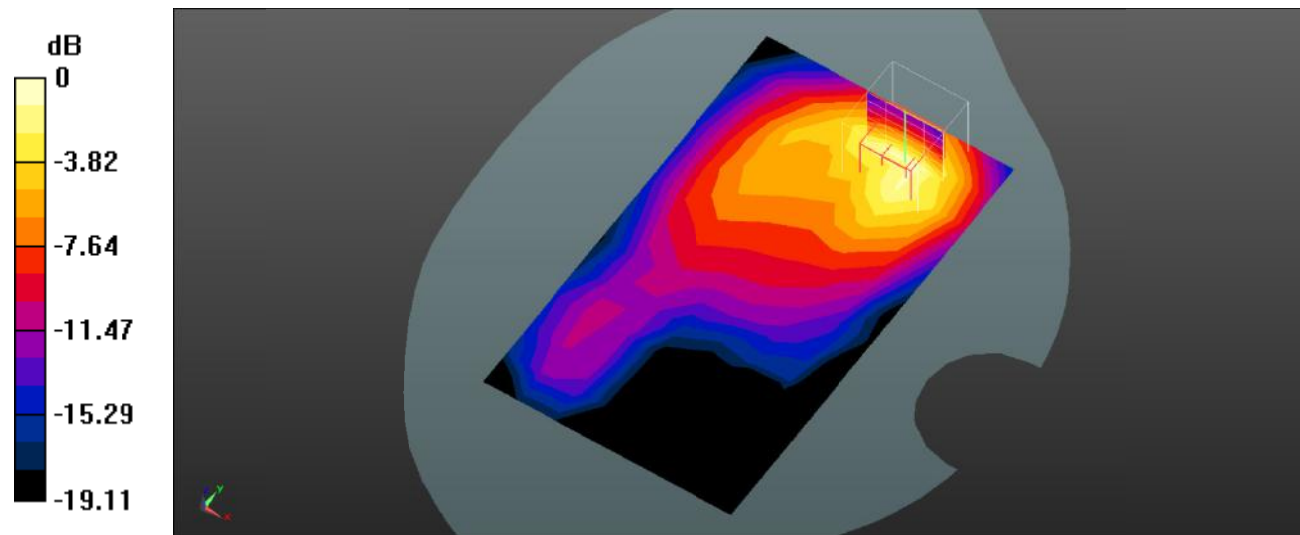

0 dB = 0.198 W/kg = -7.03 dB dBW/kg

Test Plot 44#: WCDMA Band 4_Body Back_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.393$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.302 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.066 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 0.300 W/kg

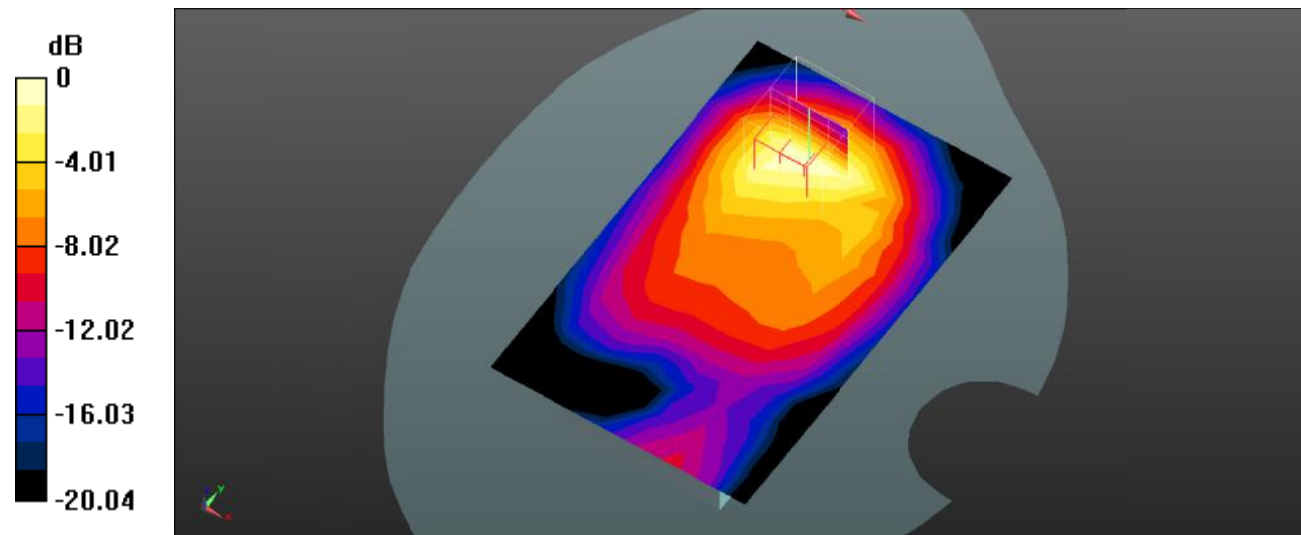

Test Plot 45#: WCDMA Band 4_Body Right_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.393$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0361 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.159 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0411 W/kg

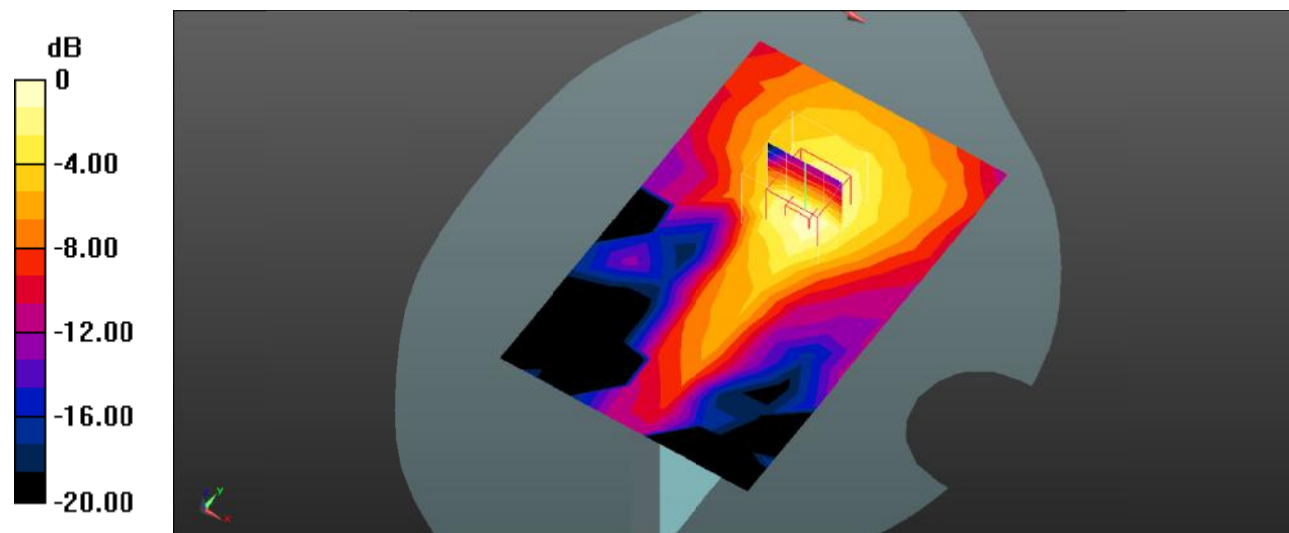

0 dB = 0.0411 W/kg = -13.86 dB dBW/kg

Test Plot 46#: WCDMA Band 4_Body Top_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.393$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1732.6 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.363 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.43 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.596 W/kg

SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.401 W/kg

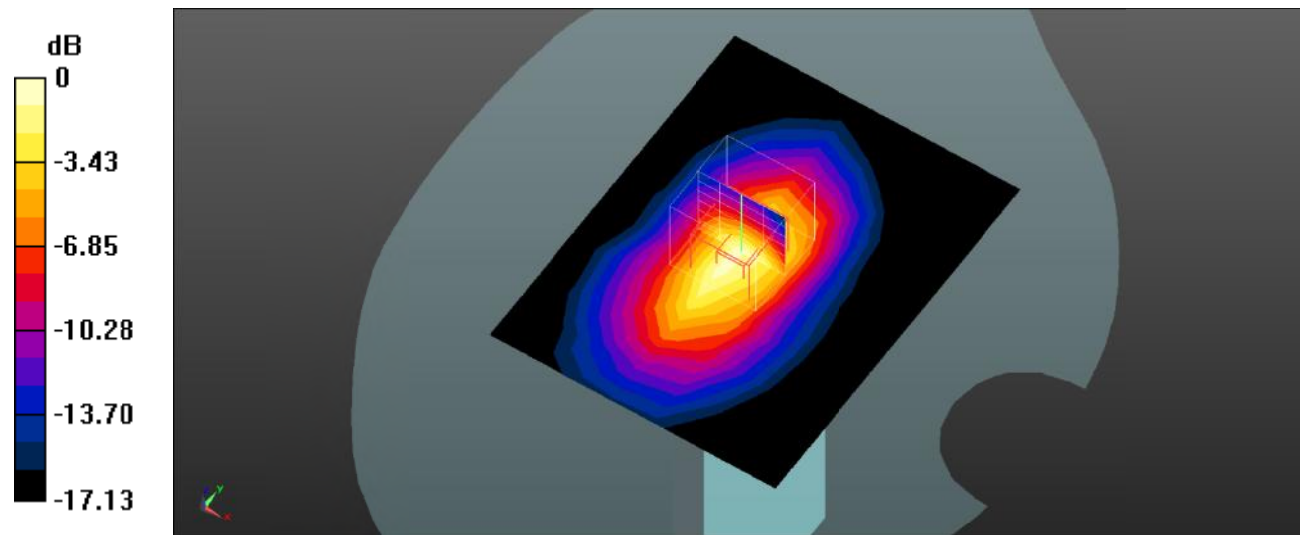

0 dB = 0.401 W/kg = -3.97 dB dBW/kg

Test Plot 47#: WCDMA Band 5_Head Left Cheek_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**


Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ S/m}$; $\epsilon_r = 41.603$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @ 836.6 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

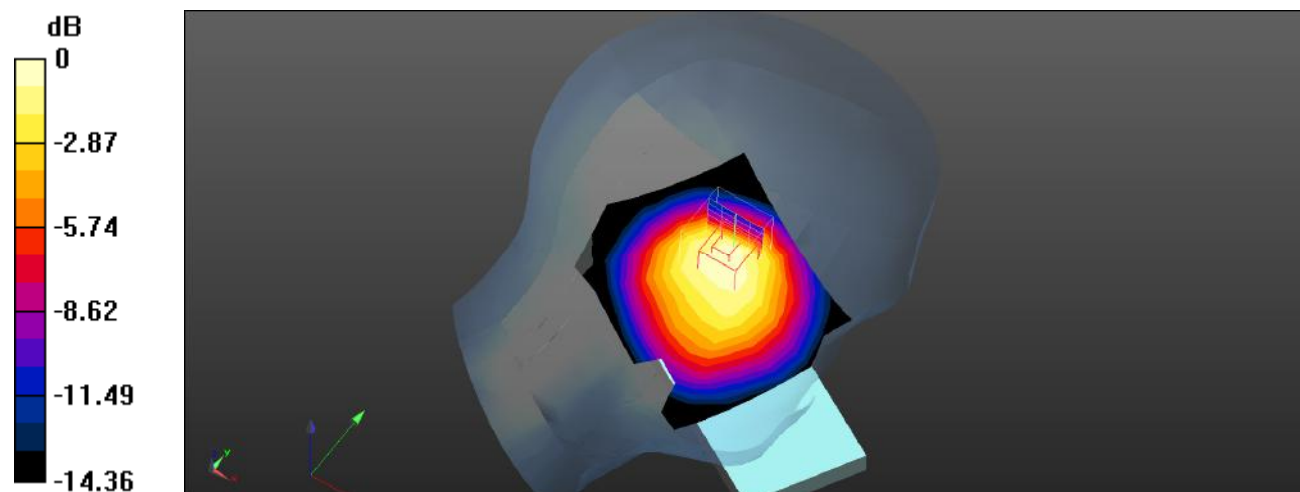Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.494 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 19.89 V/m ; Power Drift = -0.16 dB Peak SAR (extrapolated) = 0.832 W/kg **SAR(1 g) = 0.471 W/kg ; SAR(10 g) = 0.301 W/kg** Maximum value of SAR (measured) = 0.496 W/kg  $0 \text{ dB} = 0.496 \text{ W/kg} = -3.05 \text{ dBW/kg}$

Test Plot 48#: WCDMA Band 5_Head Left Tilt_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @ 836.6 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.569 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.61 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.283 W/kg

Maximum value of SAR (measured) = 0.516 W/kg

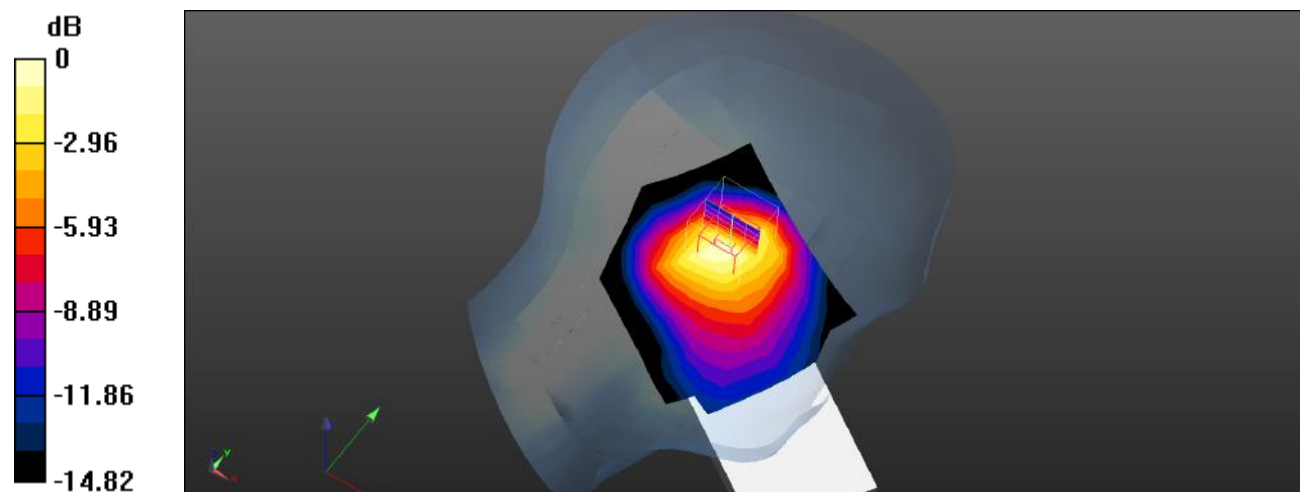

0 dB = 0.516 W/kg = -2.87 dBW/kg

Test Plot 49#: WCDMA Band 5_ Head Right Cheek _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @ 836.6 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.333 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.51 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.340 W/kg

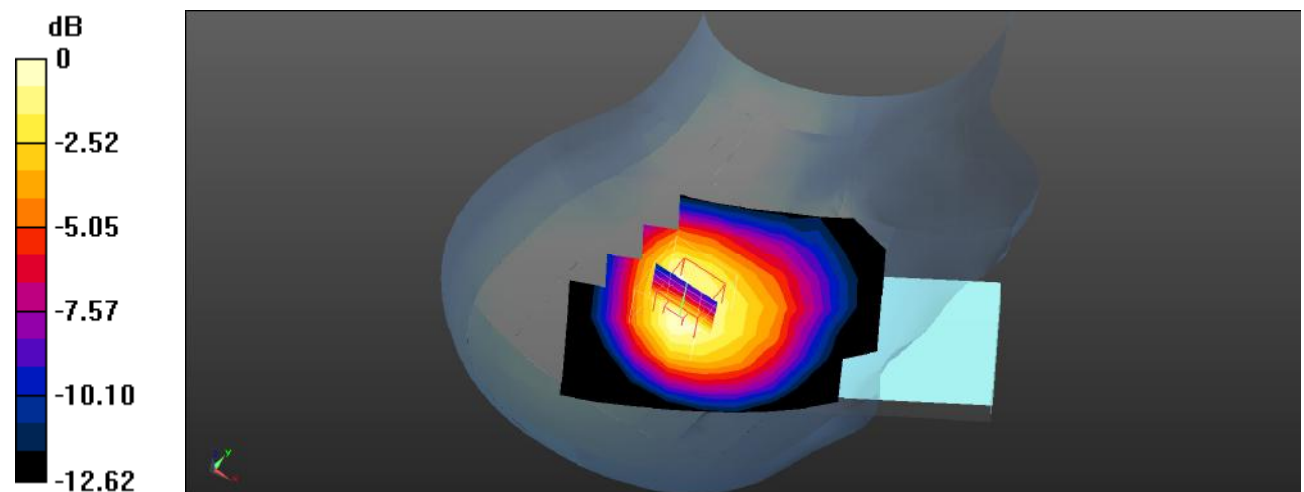

0 dB = 0.340 W/kg = -4.69 dBW/kg

Test Plot 50#: WCDMA Band 5_ Head Right Tilt _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @ 836.6 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.308 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.38 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.300 W/kg

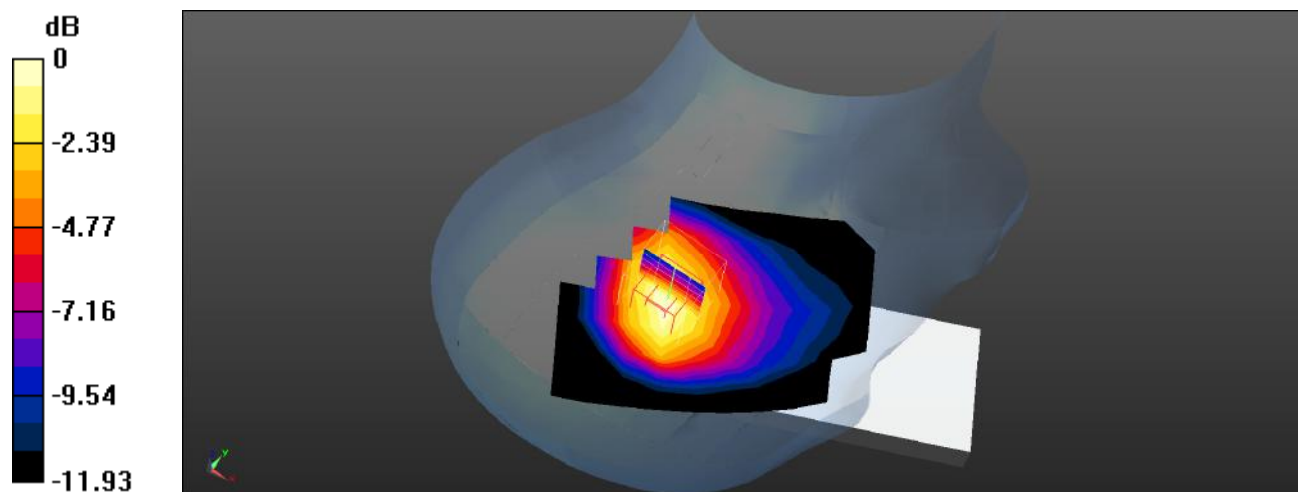

0 dB = 0.300 W/kg = -5.23 dBW/kg

Test Plot 51#: WCDMA Band 5_ Body Front _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**


Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ S/m}$; $\epsilon_r = 41.603$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @ 836.6 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

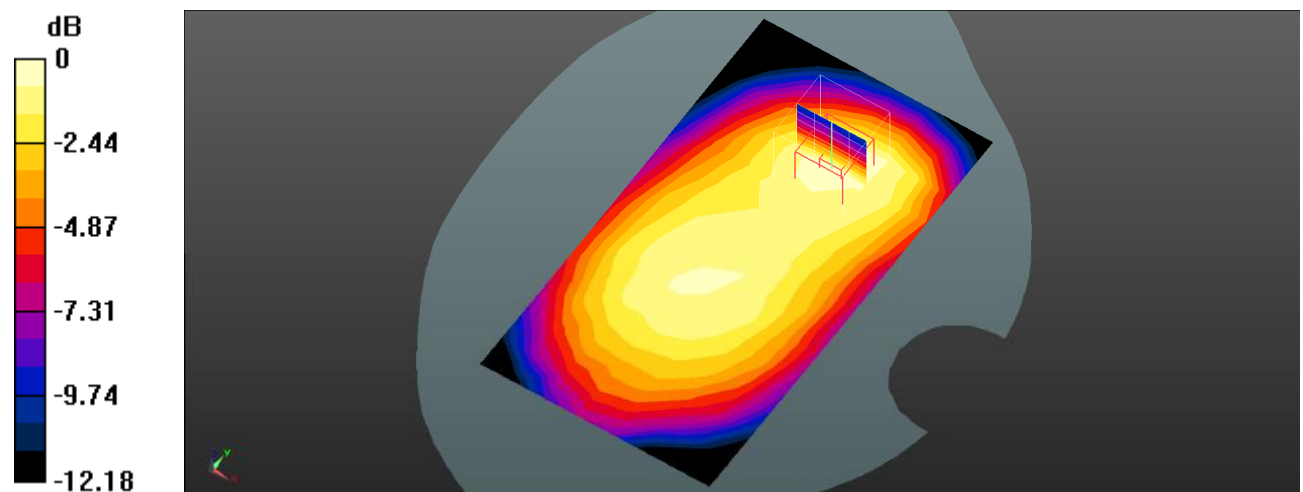Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0947 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.883 V/m ; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.128 W/kg **SAR(1 g) = 0.085 W/kg ; SAR(10 g) = 0.055 W/kg** Maximum value of SAR (measured) = 0.0906 W/kg 0 dB = 0.0906 W/kg = -10.43 dBW/kg

Test Plot 52#: WCDMA Band 5 _Body Back _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @ 836.6 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.195 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.71 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.199 W/kg

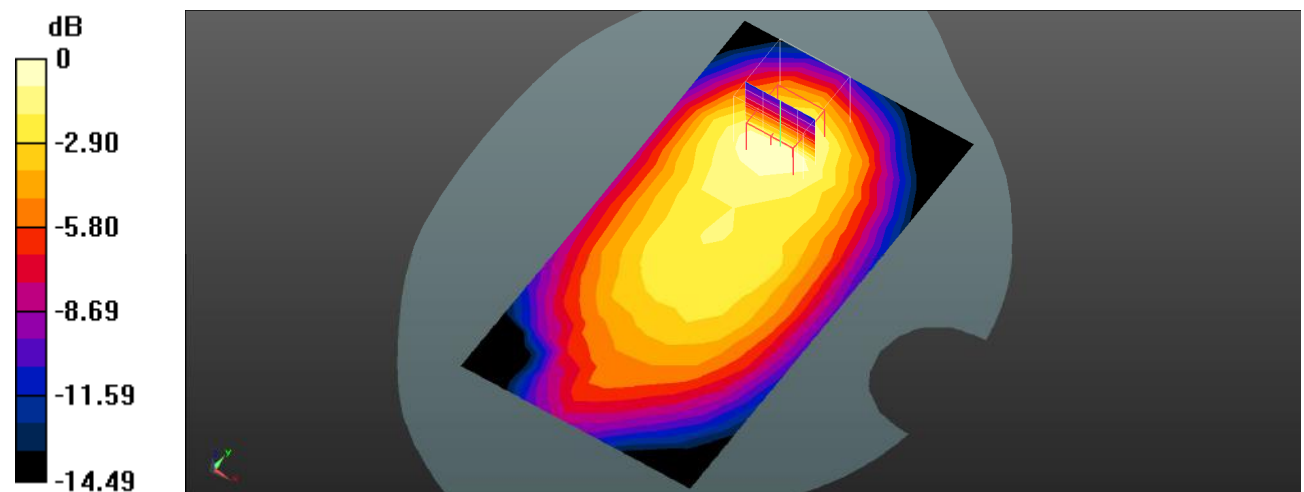

0 dB = 0.199 W/kg = -7.01 dBW/kg

Test Plot 53#: WCDMA Band 5 _Body Right _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @ 836.6 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.102 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.59 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

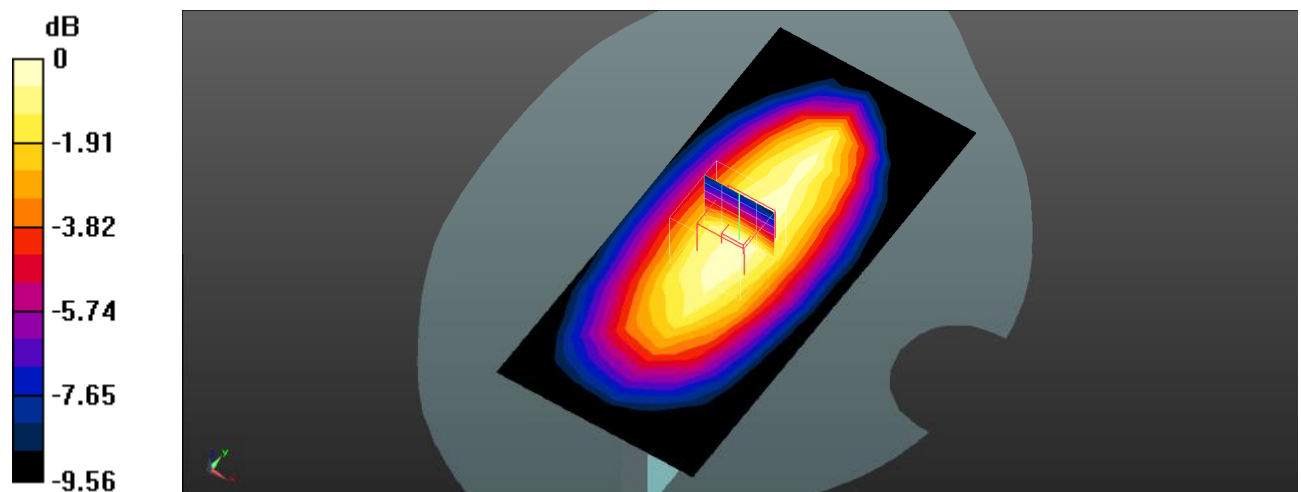

Test Plot 54#: WCDMA Band 5 _Body Top _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @ 836.6 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.109 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.65 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.202 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.129 W/kg

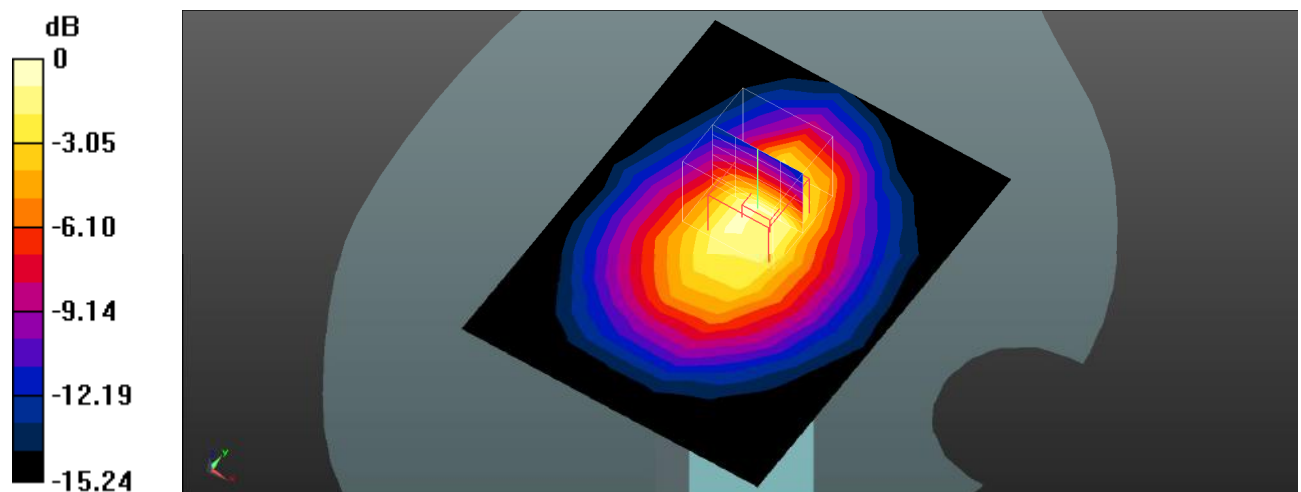

0 dB = 0.129 W/kg = -8.89 dBW/kg

Test Plot 55#: LTE Band 2_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.406 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.30 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.227 W/kg

Maximum value of SAR (measured) = 0.440 W/kg

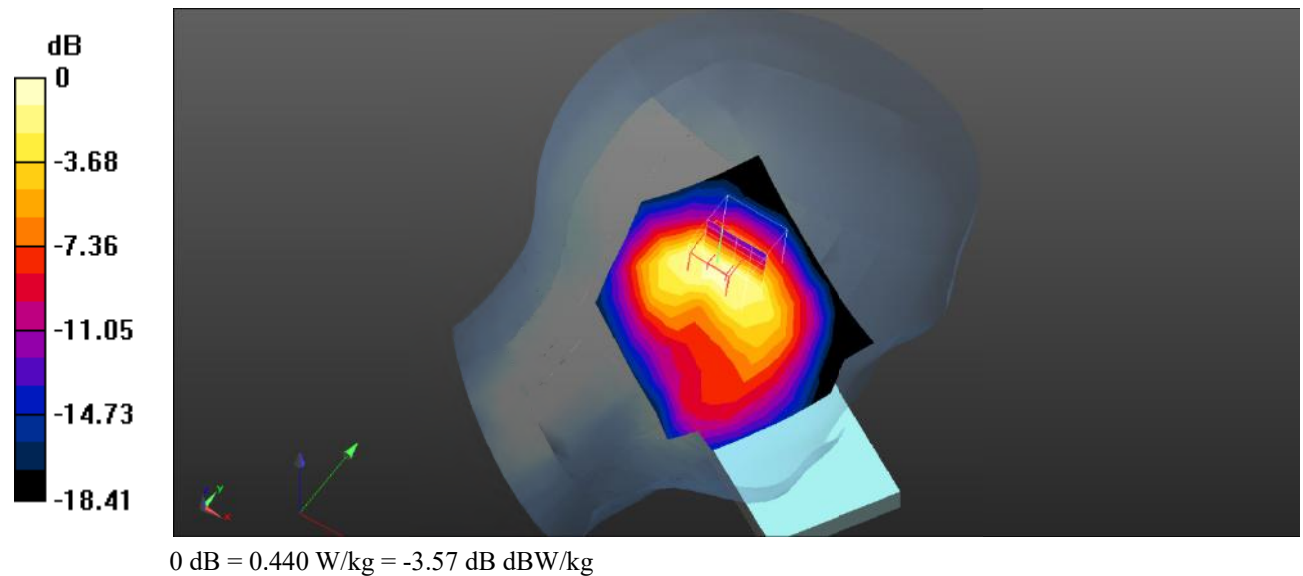

Test Plot 56#: LTE Band 2_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.281 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.542 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.307 W/kg

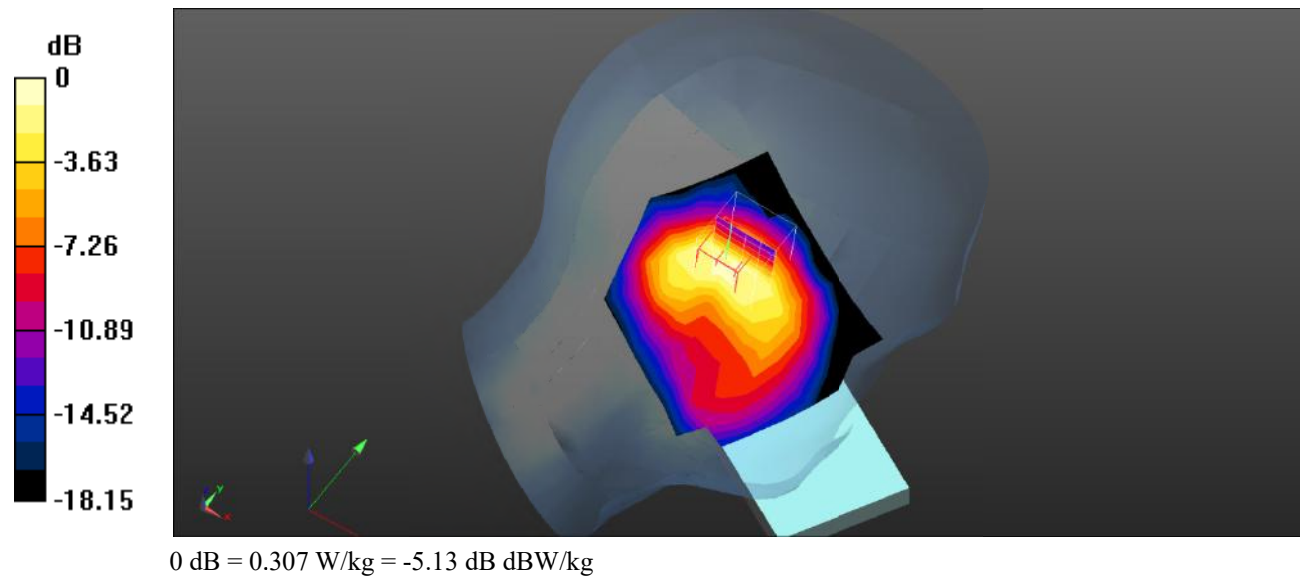

Test Plot 57#: LTE Band 2_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.482 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.61 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.873 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.574 W/kg

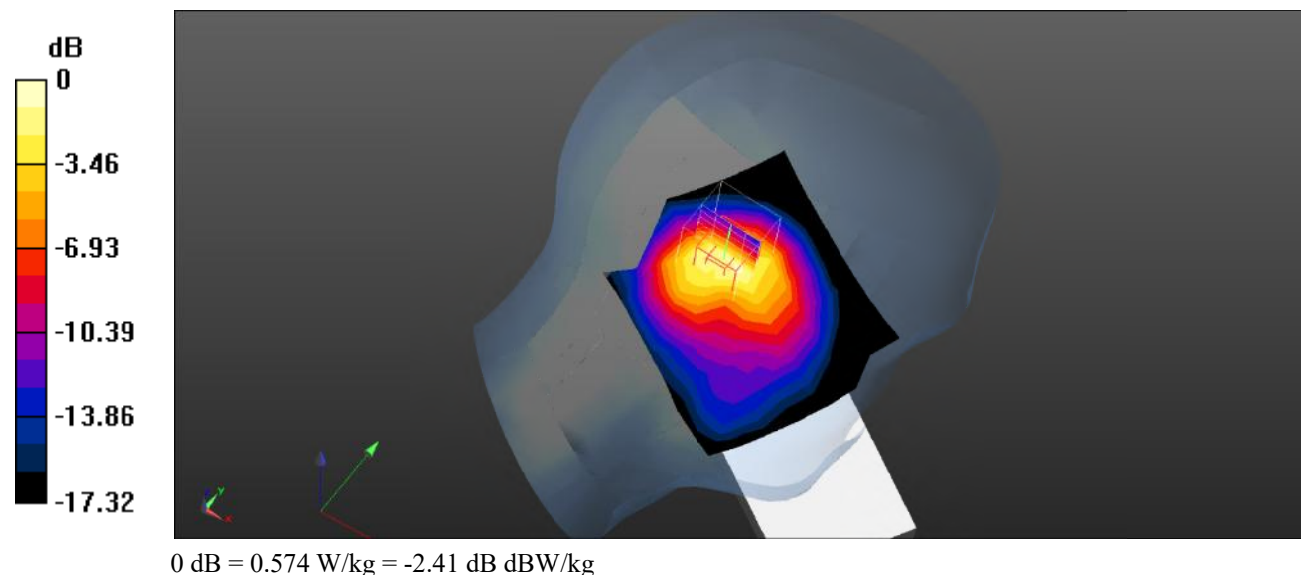

Test Plot 58#: LTE Band 2_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.340 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.723 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.412 W/kg

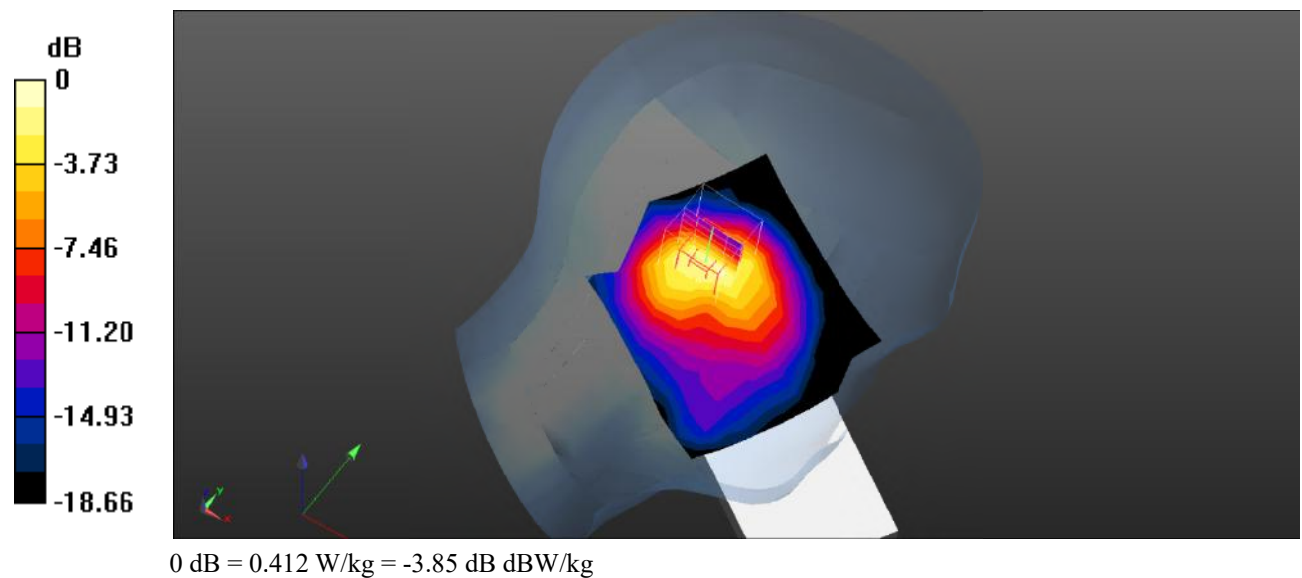

Test Plot 59#: LTE Band 2_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.471 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.73 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.870 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.584 W/kg

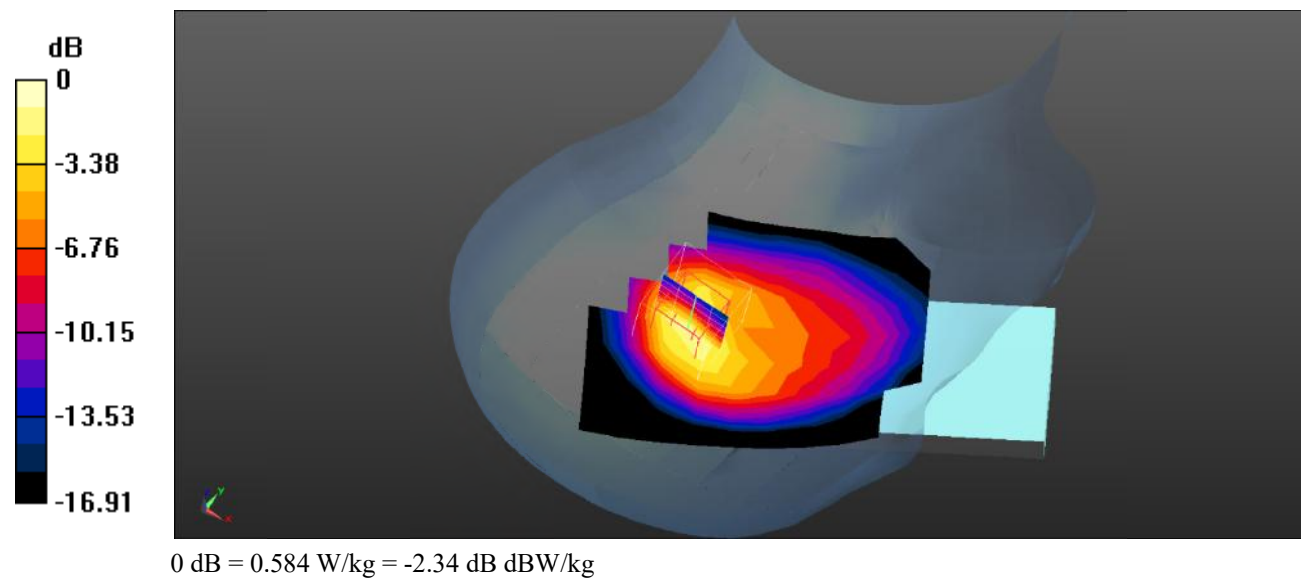

Test Plot 60#: LTE Band 2_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.329 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.82 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.411 W/kg

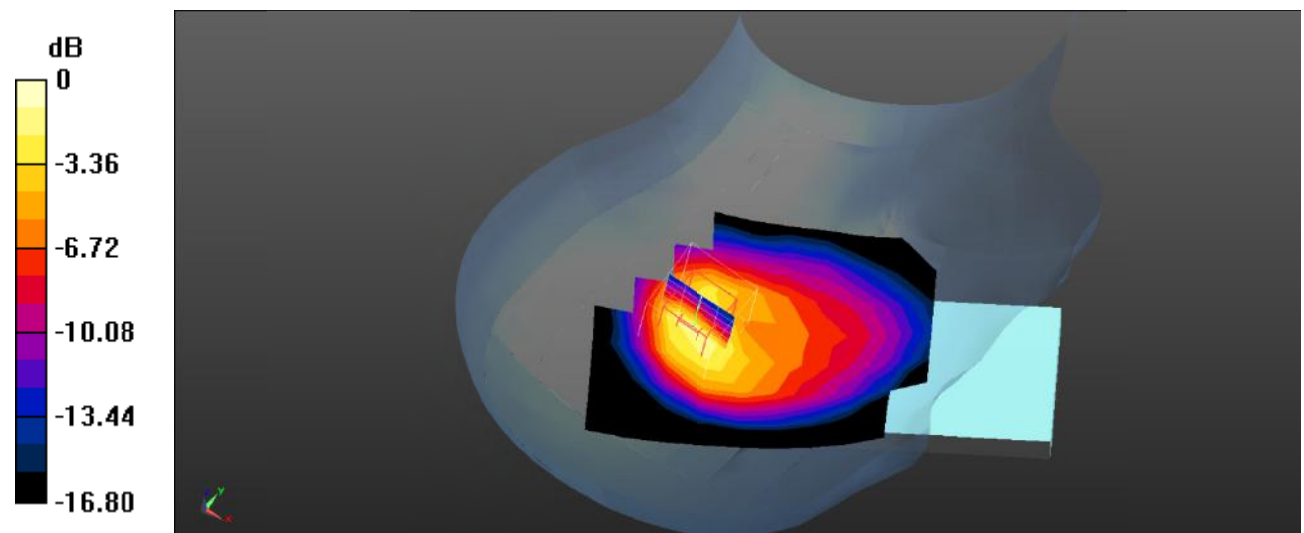

0 dB = 0.411 W/kg = -3.86 dB dBW/kg

Test Plot 61#: LTE Band 2_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.593 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.60 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.655 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 0.721 W/kg

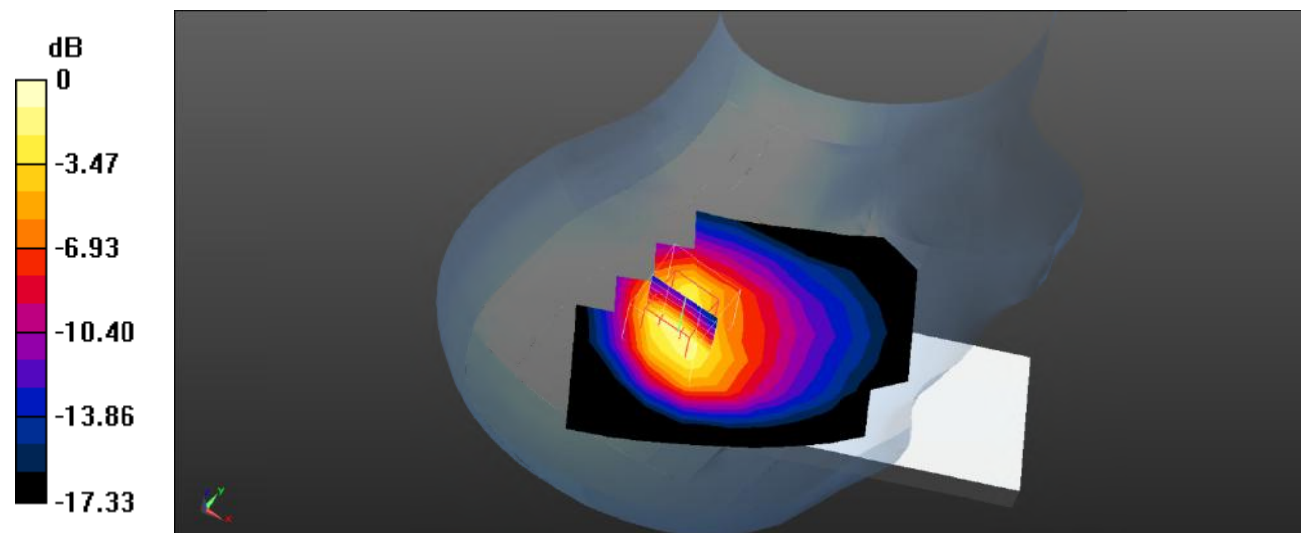

0 dB = 0.721 W/kg = -1.42 dB dBW/kg

Test Plot 62#: LTE Band 2_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.422 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.20 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.810 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.532 W/kg

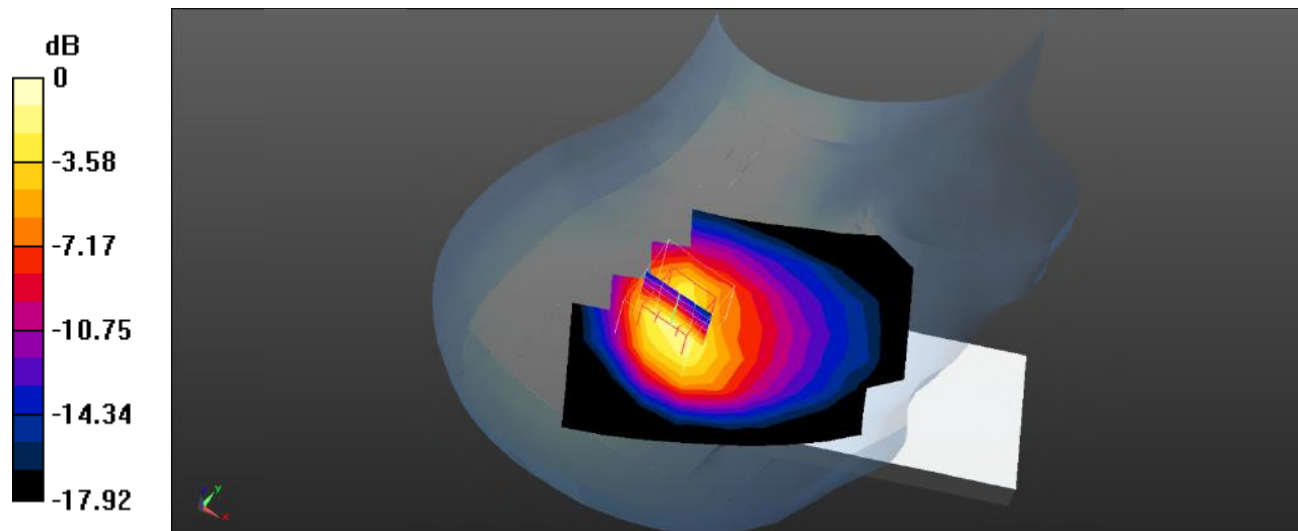

0 dB = 0.532 W/kg = -2.74 dB dBW/kg

Test Plot 63#: LTE Band 2_Body Front_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.266 W/kg


Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.537 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.308 W/kg

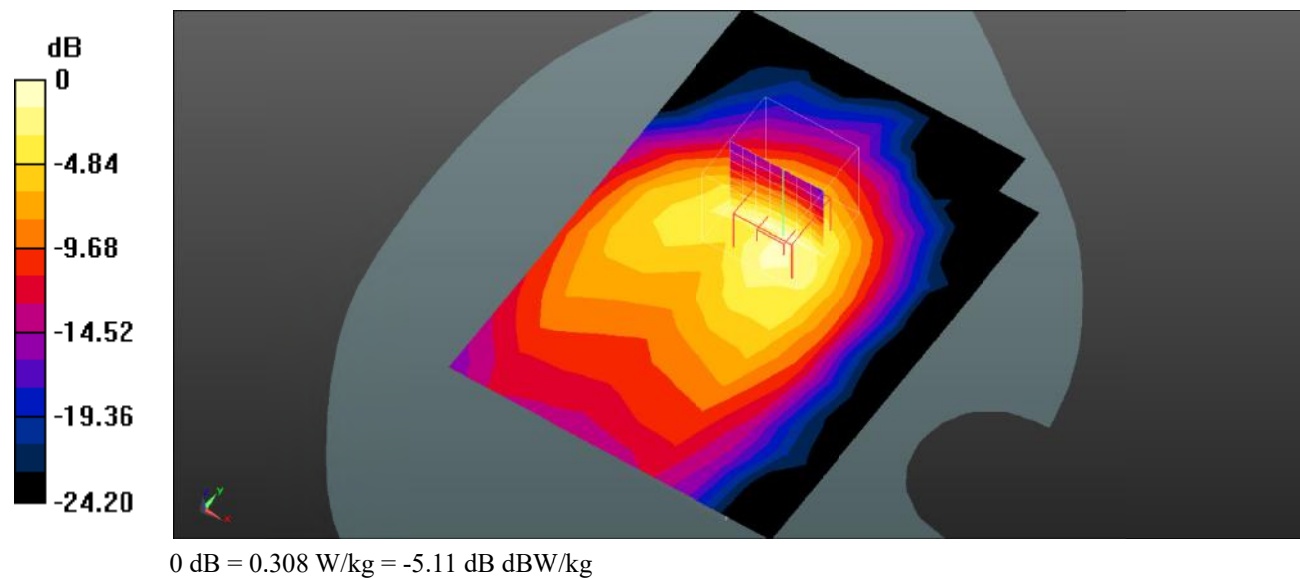

Test Plot 64#: LTE Band 2_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.186 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.216 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.216 W/kg

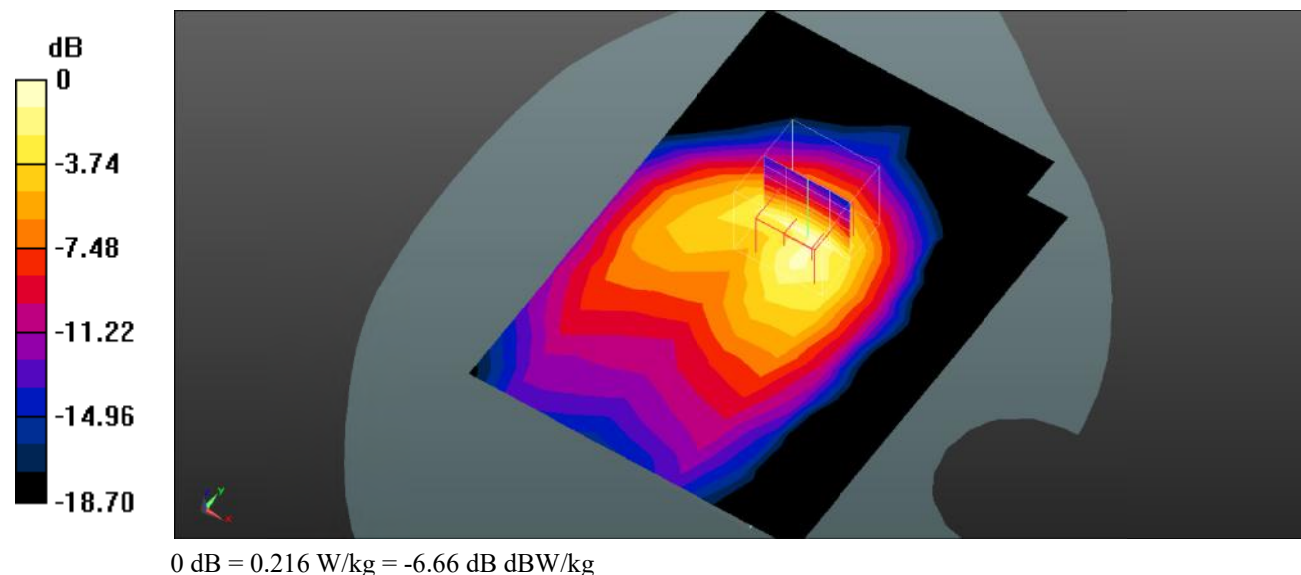

Test Plot 65#: LTE Band 2_Body Back_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.471 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.275 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.841 W/kg

SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 0.525 W/kg

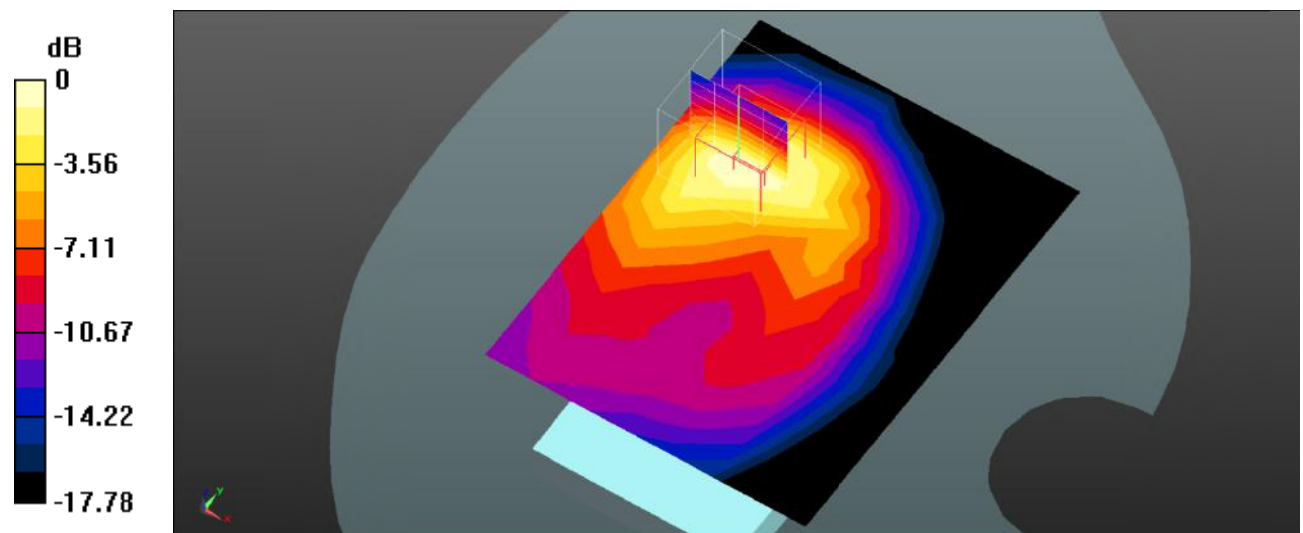

0 dB = 0.525 W/kg = -2.80 dB dBW/kg

Test Plot 66#: LTE Band 2_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.381 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.570 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.386 W/kg

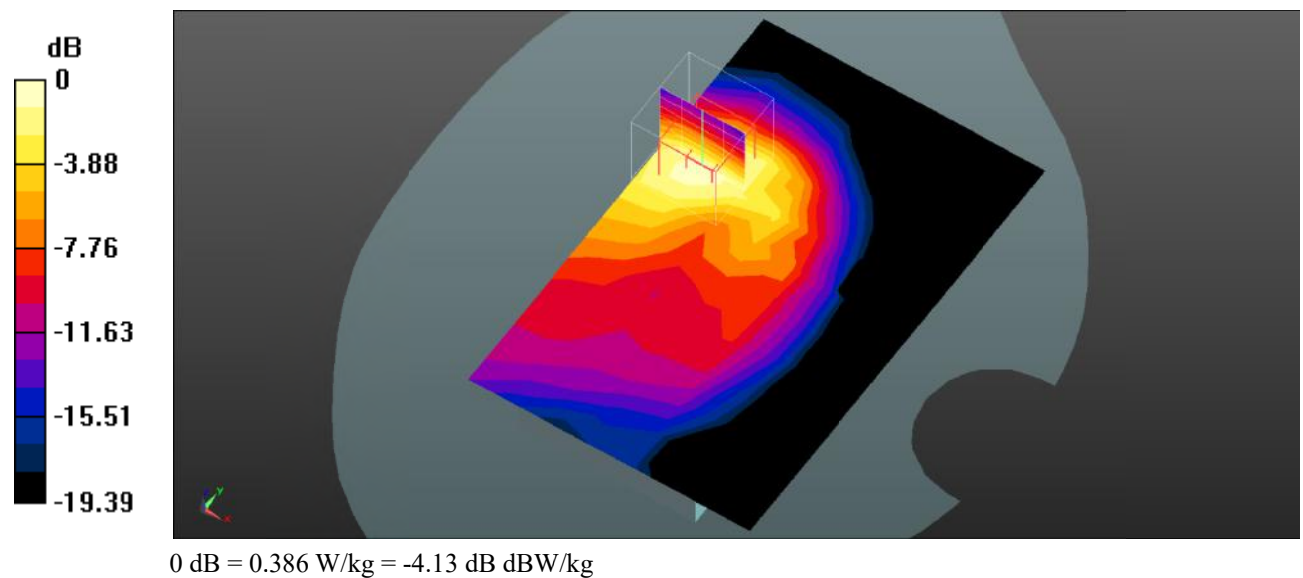

Test Plot 67#: LTE Band 2_Body Right_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0504 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.083 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0466 W/kg

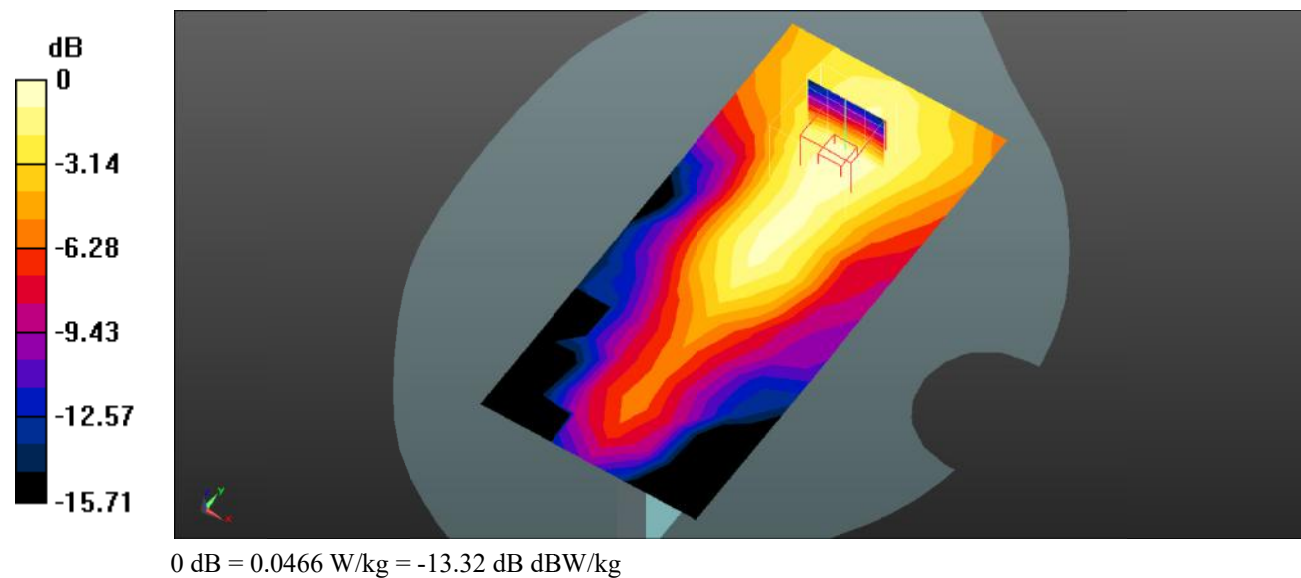

Test Plot 68#: LTE Band 2_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0332 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.158 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0315 W/kg

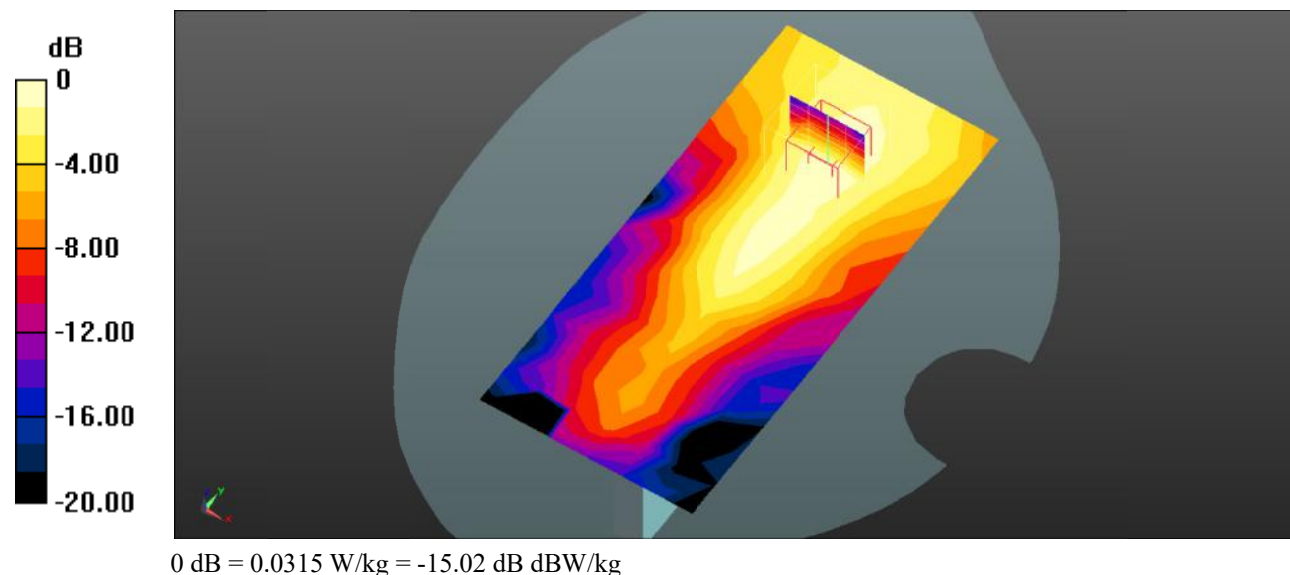

Test Plot 69#: LTE Band 2_Body Top_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.389 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.19 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.608 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.422 W/kg

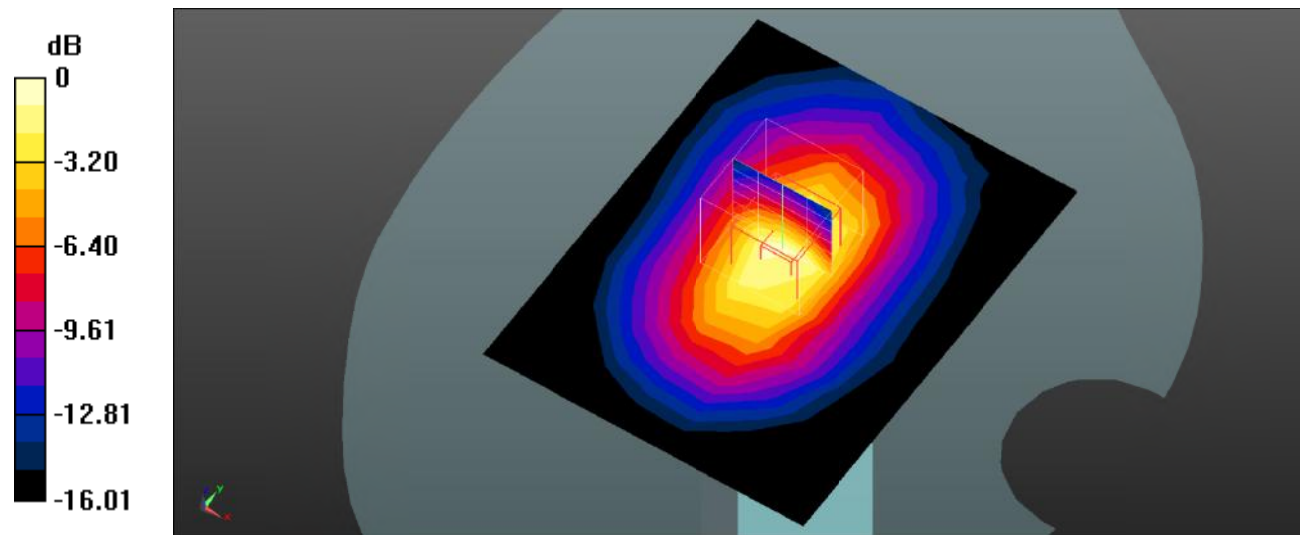

0 dB = 0.422 W/kg = -3.75 dB dBW/kg

Test Plot 70#: LTE Band 2_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.341 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.98 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.516 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.363 W/kg

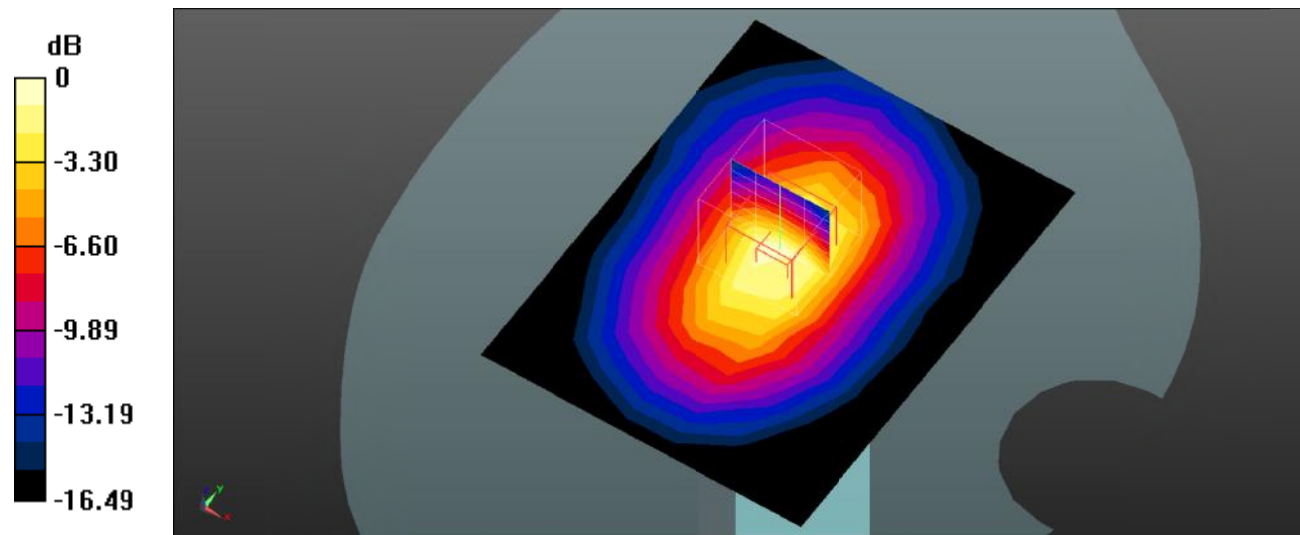

Test Plot 71#: LTE Band 5_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.438 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.50 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.447 W/kg

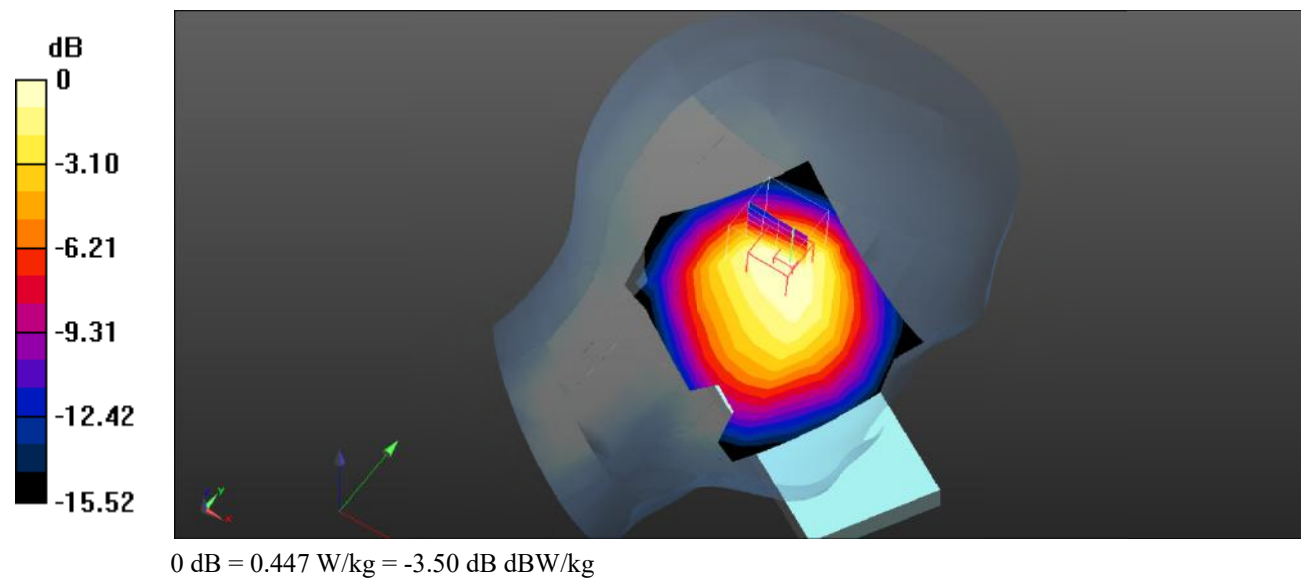

Test Plot 72#: LTE Band 5_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.381 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.61 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 0.394 W/kg

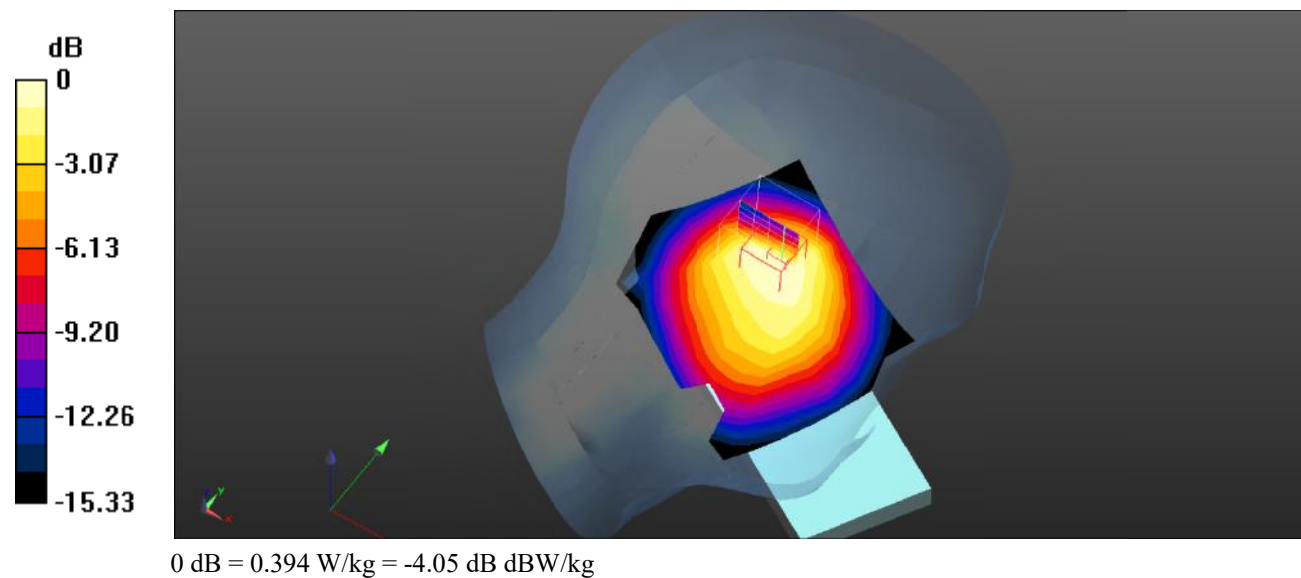

Test Plot 73#: LTE Band 5_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.377 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.78 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.815 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 0.480 W/kg

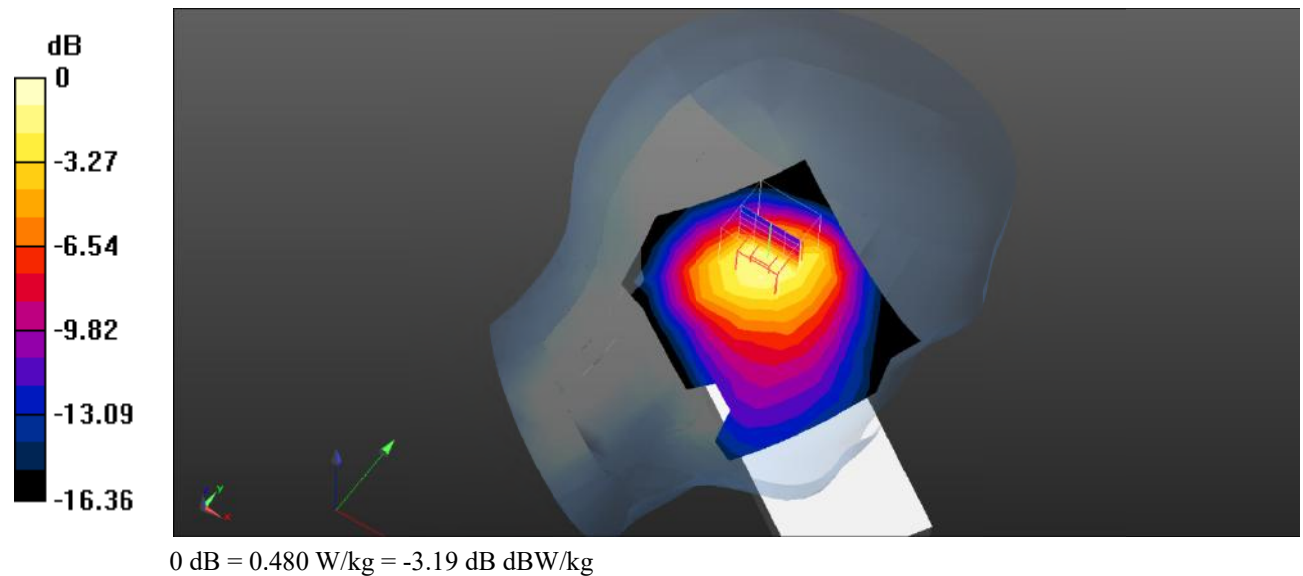

Test Plot 74#: LTE Band 5_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.322 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.60 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.699 W/kg

SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.403 W/kg

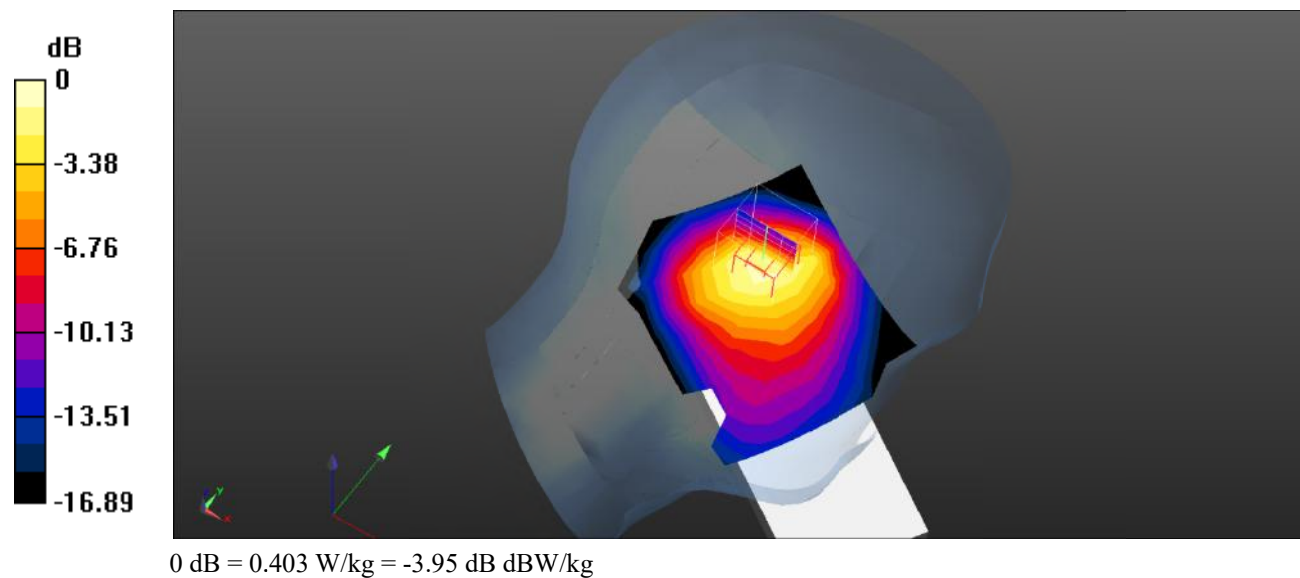

Test Plot 75#: LTE Band 5_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.332 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.51 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.219 W/kg

Maximum value of SAR (measured) = 0.350 W/kg

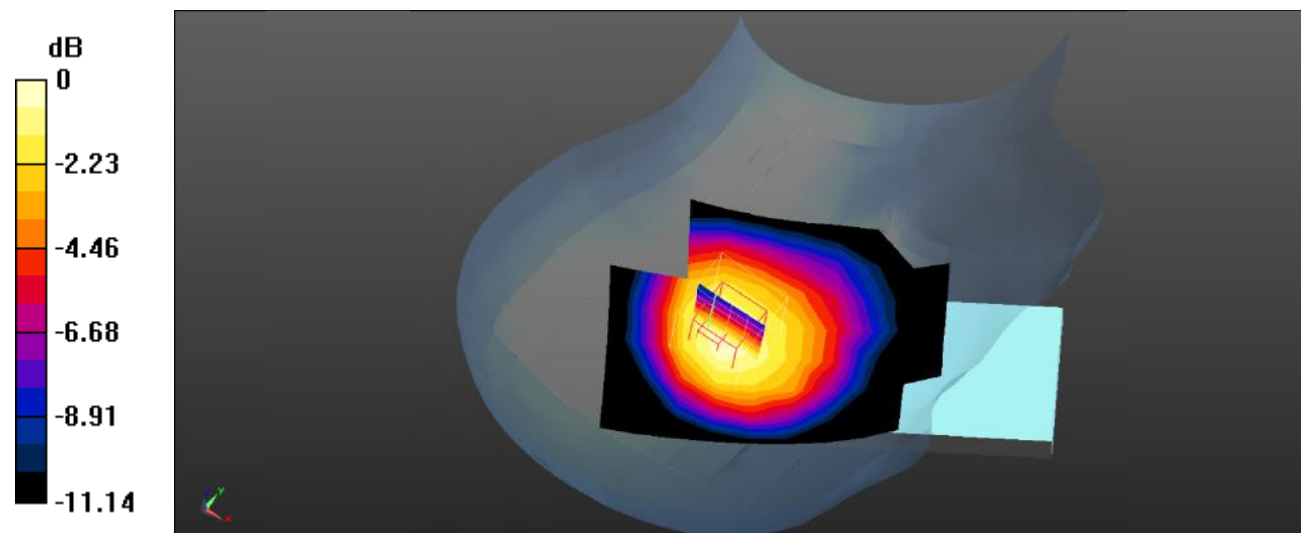

0 dB = 0.350 W/kg = -4.56 dB dBW/kg

Test Plot 76#: LTE Band 5_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.293 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.38 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.300 W/kg

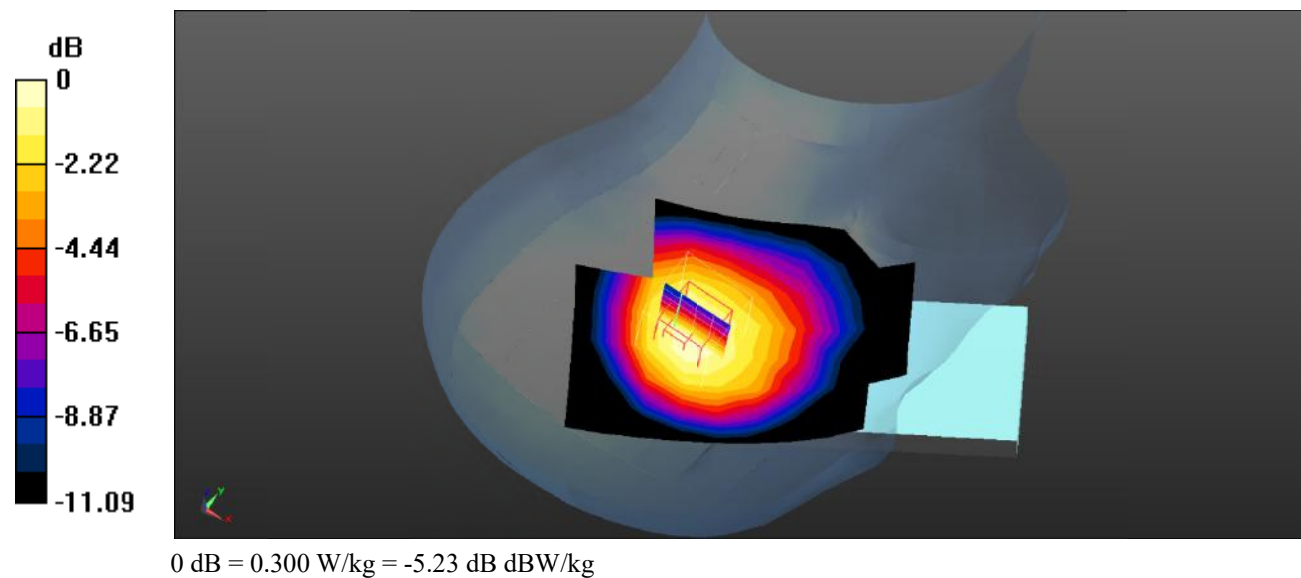

Test Plot 77#: LTE Band 5_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.241 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.80 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.287 W/kg

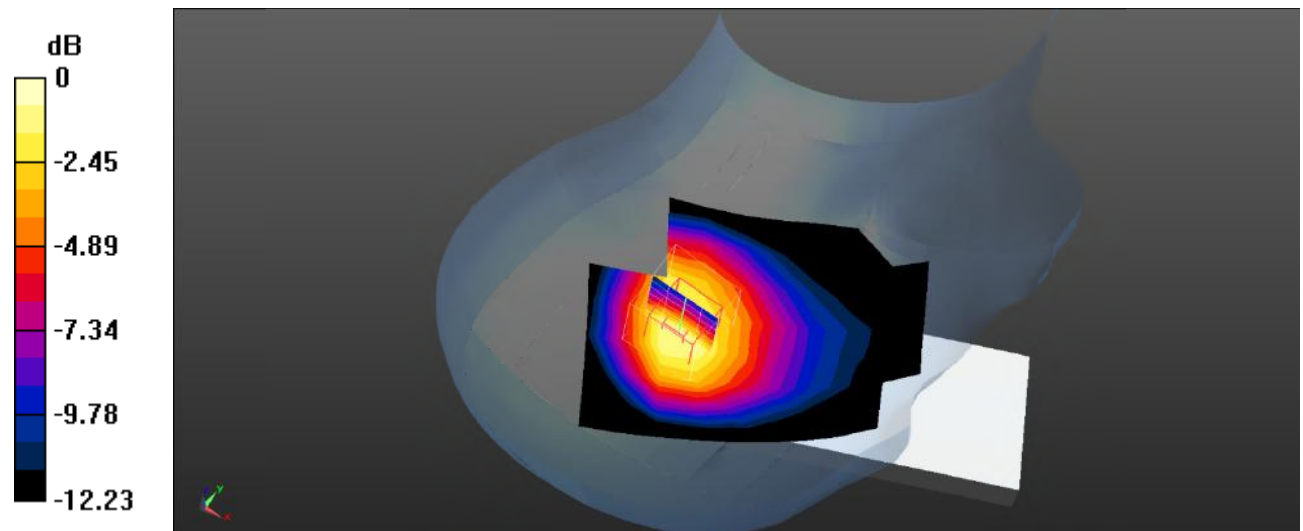

0 dB = 0.287 W/kg = -5.42 dB dBW/kg

Test Plot 78#: LTE Band 5_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.208 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.08 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

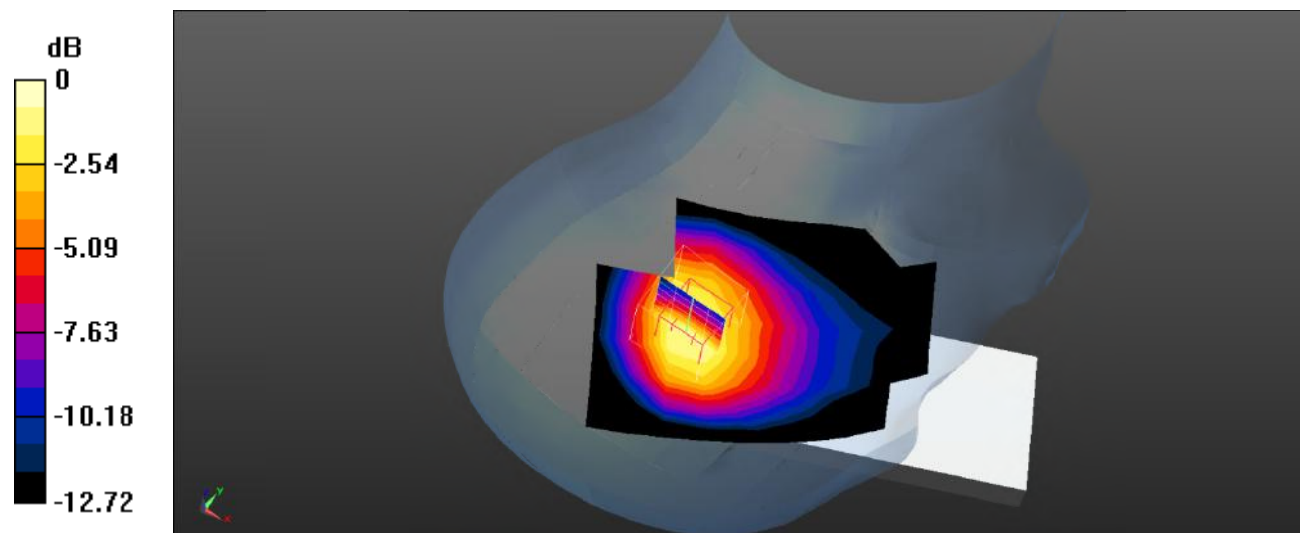

0 dB = 0.258 W/kg = -5.88 dB dBW/kg

Test Plot 79#: LTE Band 5_Body Front_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.115 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.474 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

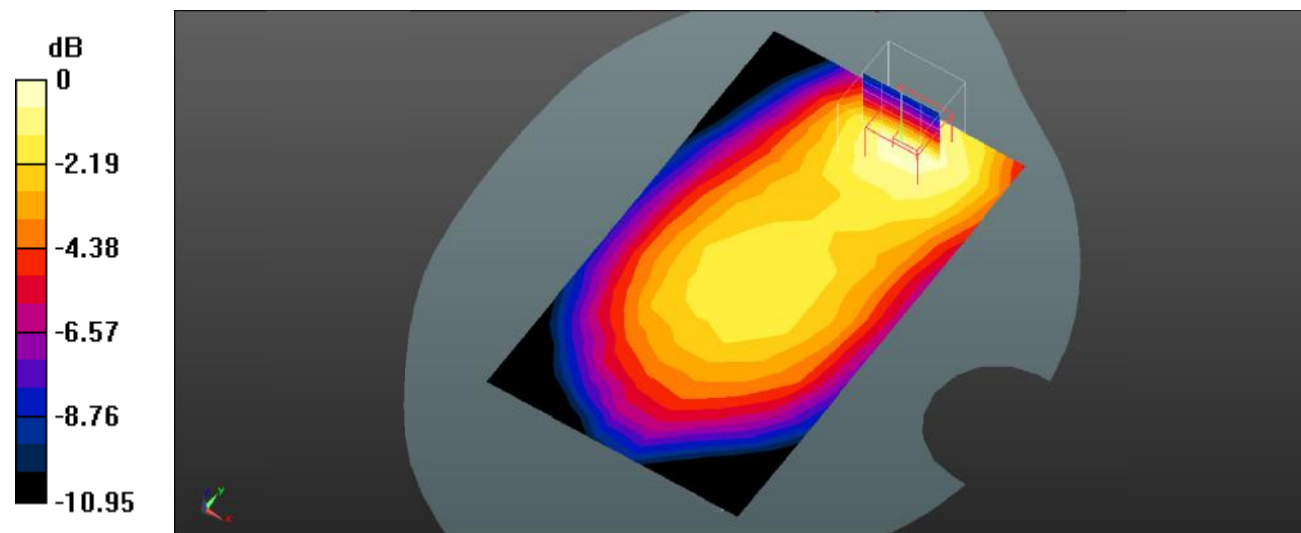

0 dB = 0.119 W/kg = -9.24 dB dBW/kg

Test Plot 80#: LTE Band 5_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.103 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.290 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

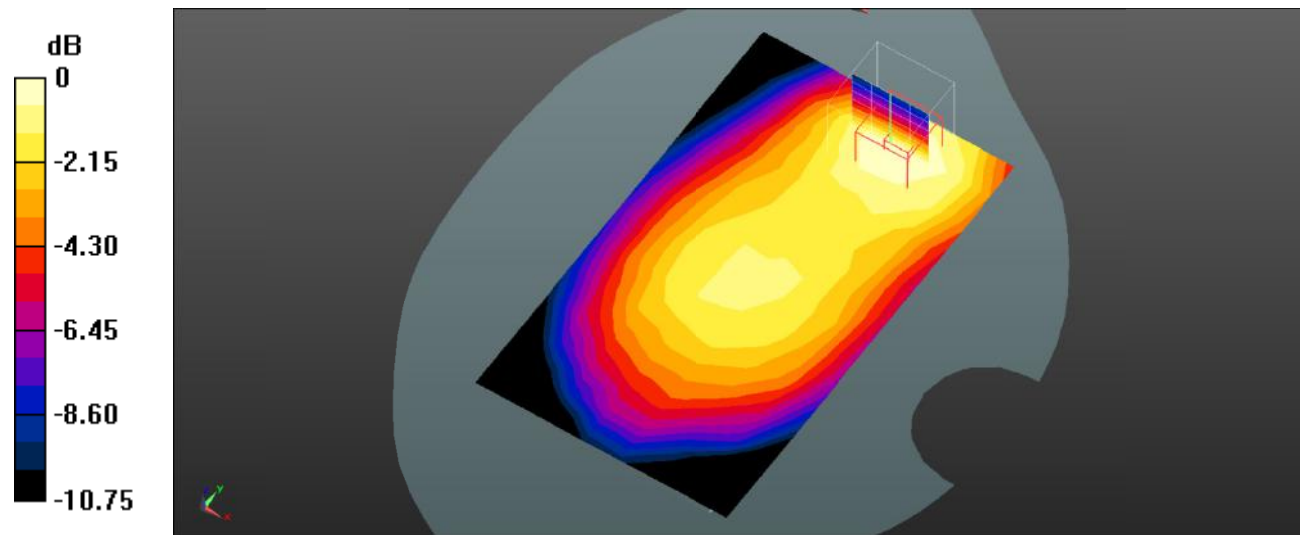

0 dB = 0.101 W/kg = -9.96 dB dBW/kg

Test Plot 81#: LTE Band 5_Body Back_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.214 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.53 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.230 W/kg

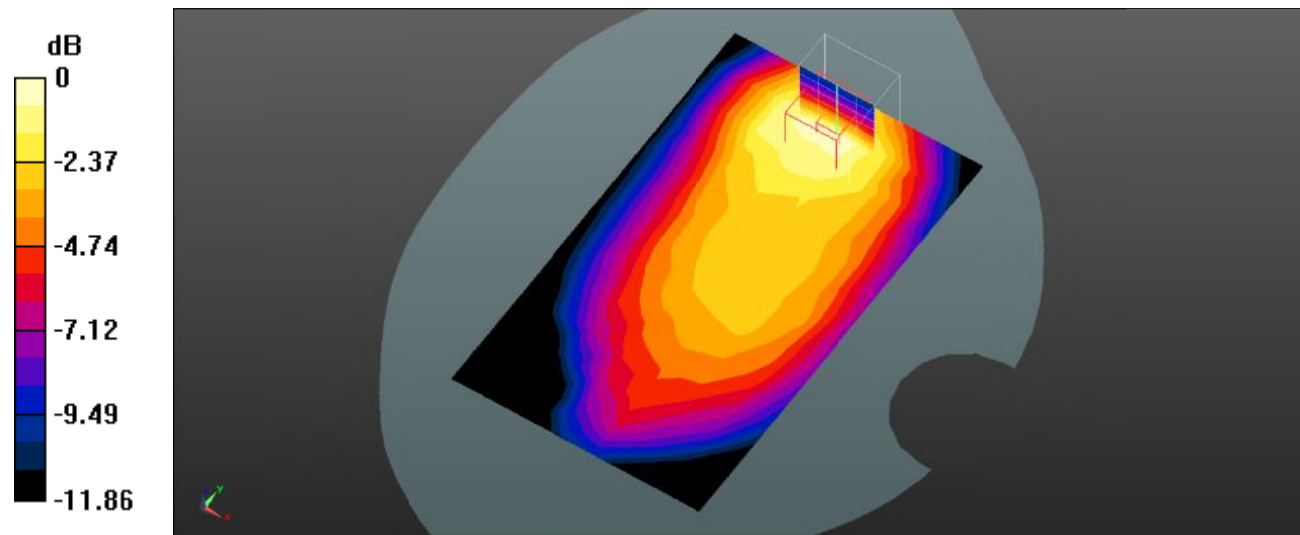

0 dB = 0.230 W/kg = -6.38 dB dBW/kg

Test Plot 82#: LTE Band 5_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.181 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.25 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.195 W/kg

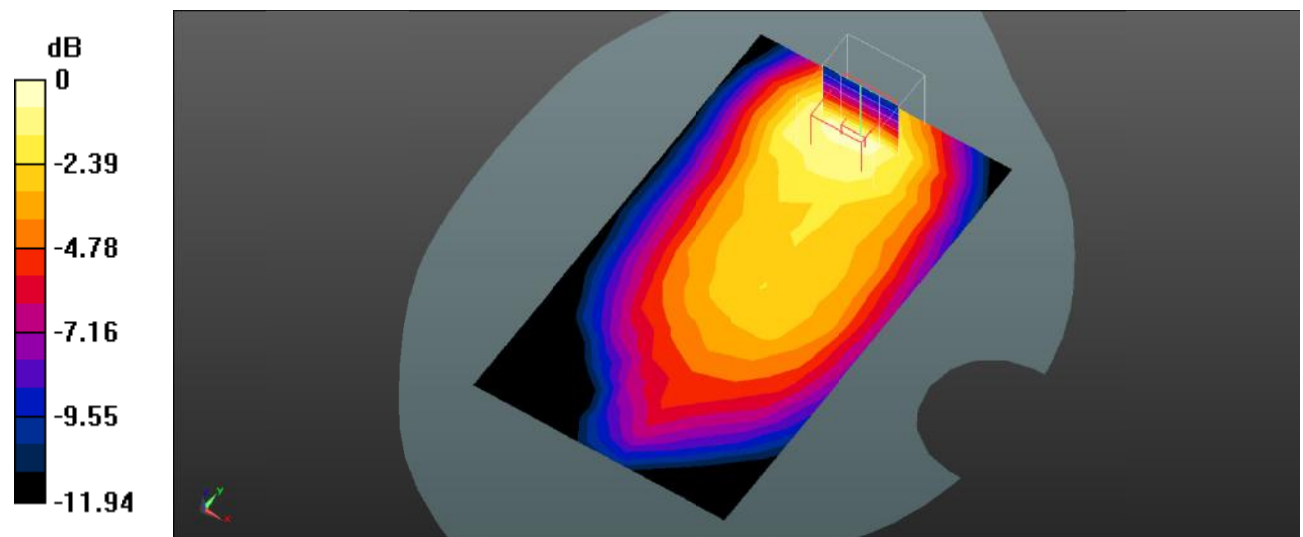

0 dB = 0.195 W/kg = -7.10 dB dBW/kg

Test Plot 83#: LTE Band 5_Body Right_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0629 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.206 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0605 W/kg

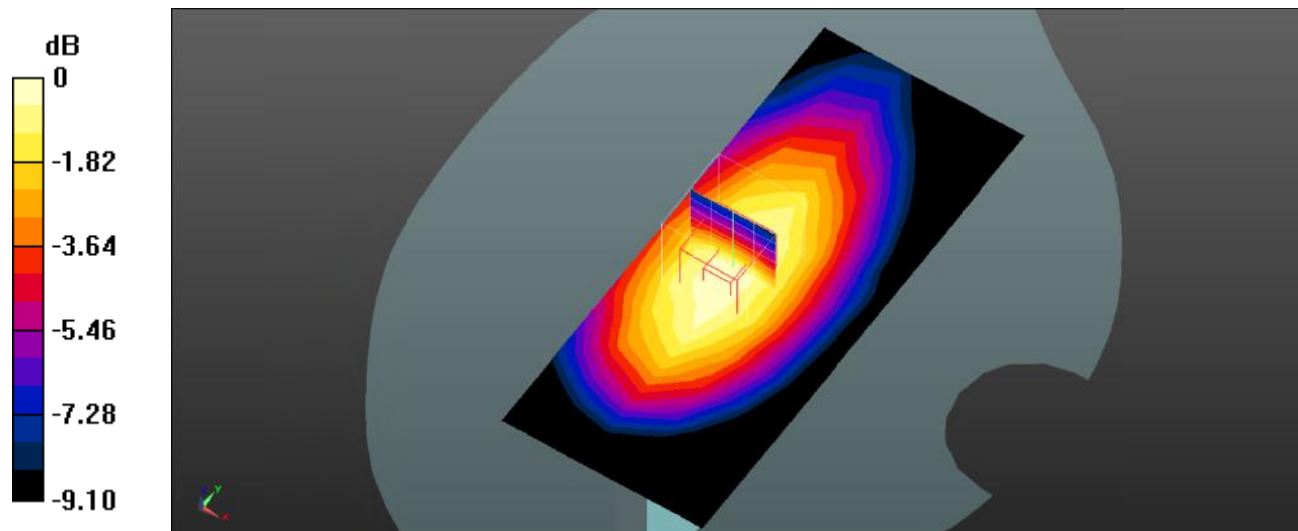

Test Plot 84#: LTE Band 5_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0537 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.355 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0534 W/kg

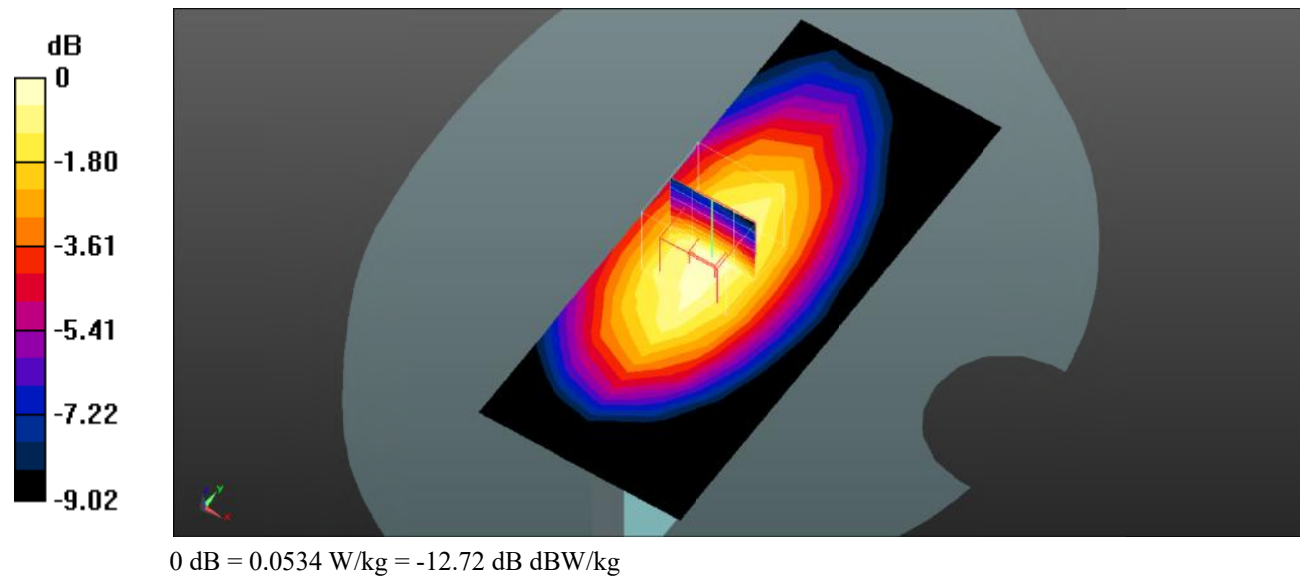

Test Plot 85#: LTE Band 5_Body Top_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.106 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.38 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.135 W/kg

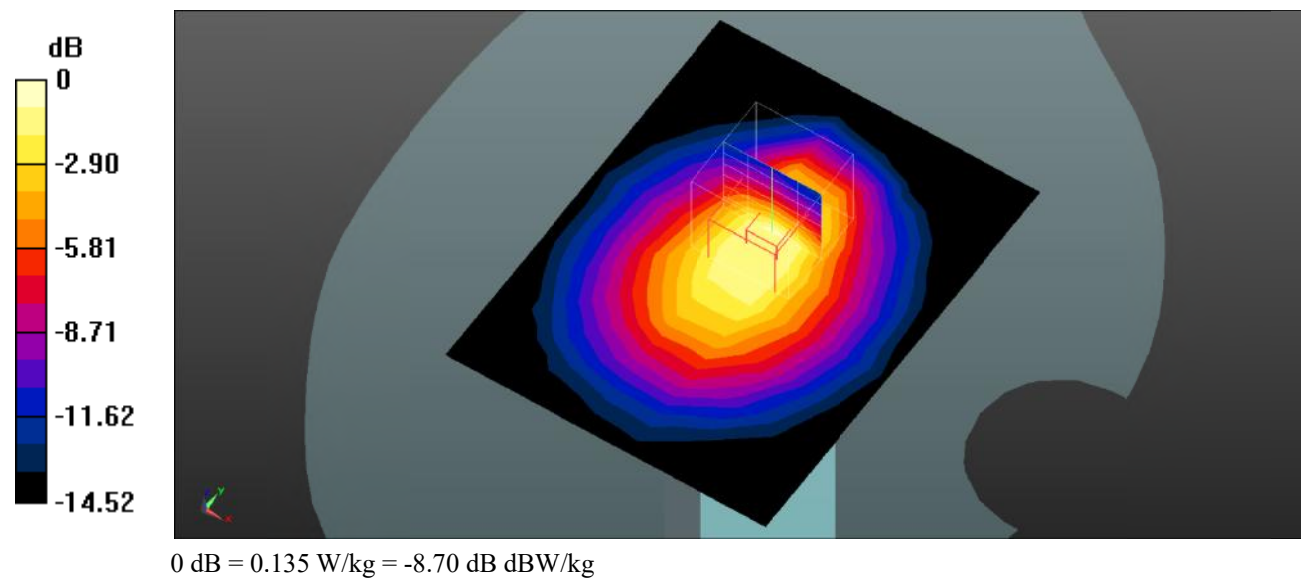

Test Plot 86#: LTE Band 5_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @836.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0888 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.16 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.118 W/kg

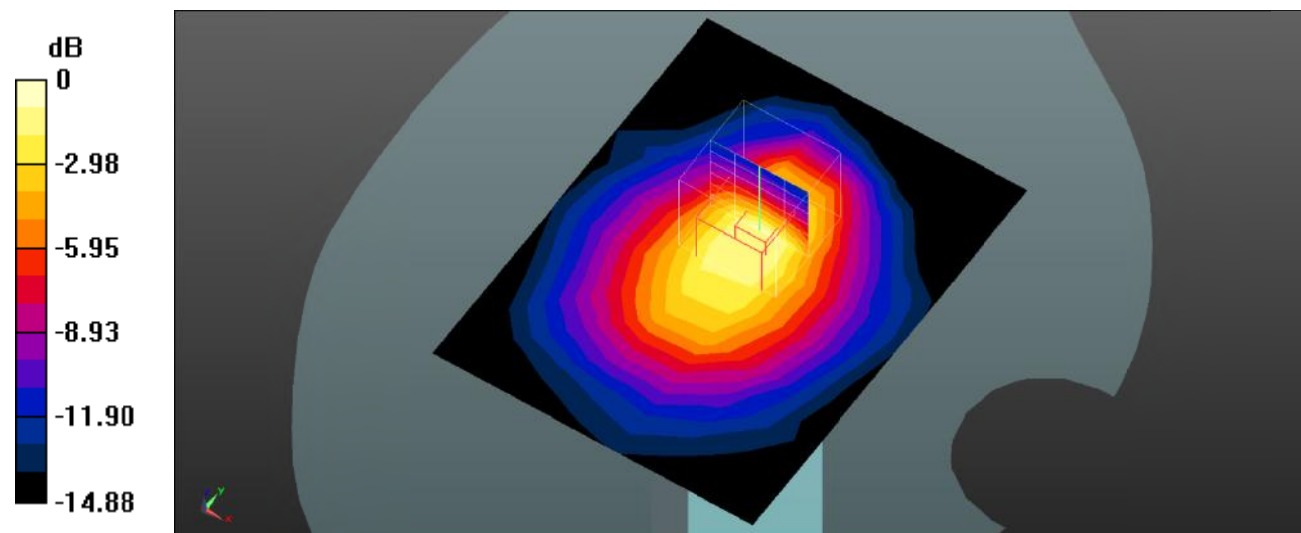

0 dB = 0.118 W/kg = -9.28 dB dBW/kg

Test Plot 87#: LTE Band 7_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.666 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.305 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 0.665 W/kg

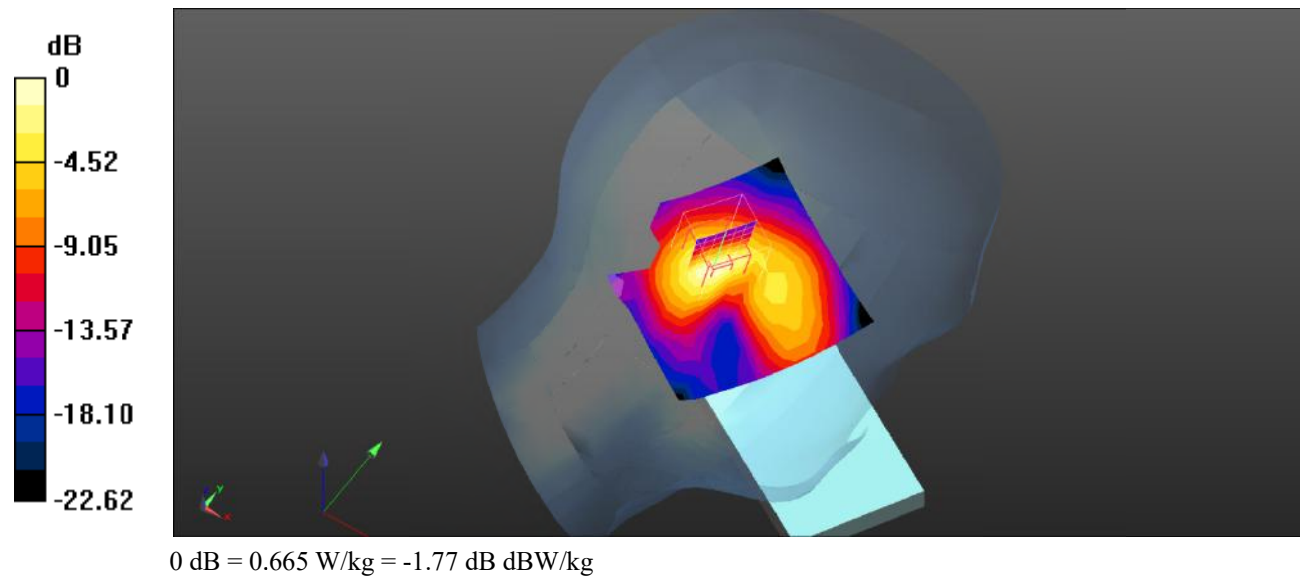

Test Plot 88#: LTE Band 7_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.437 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.682 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.759 W/kg

SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.433 W/kg

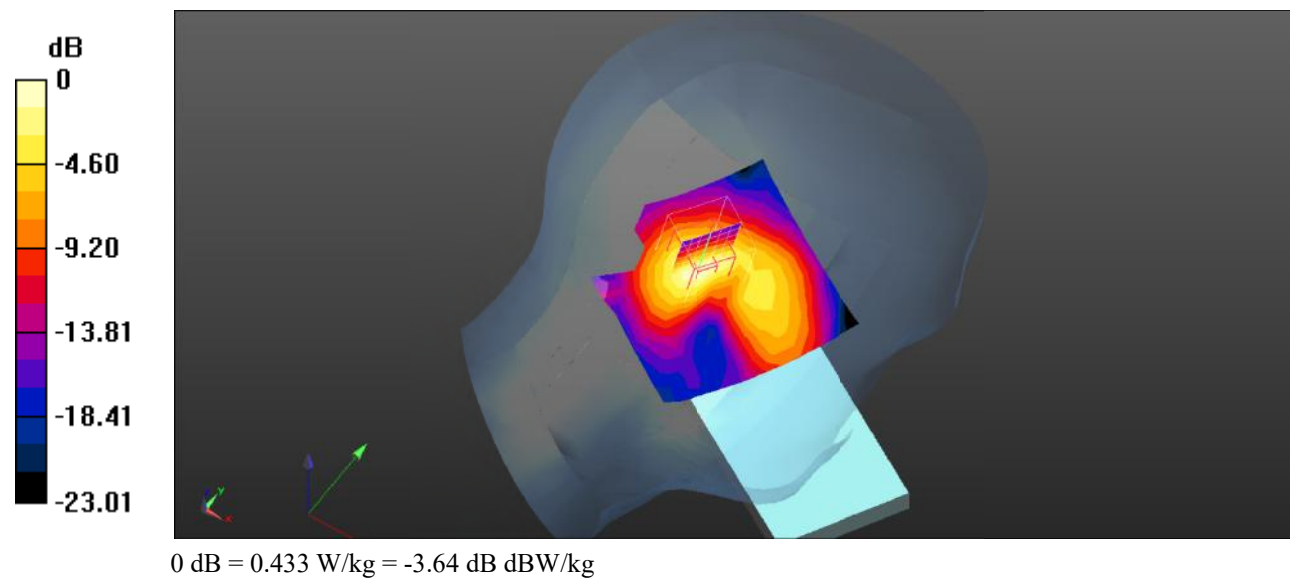

Test Plot 89#: LTE Band 7_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.731 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.435 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.647 W/kg; SAR(10 g) = 0.307 W/kg

Maximum value of SAR (measured) = 0.728 W/kg

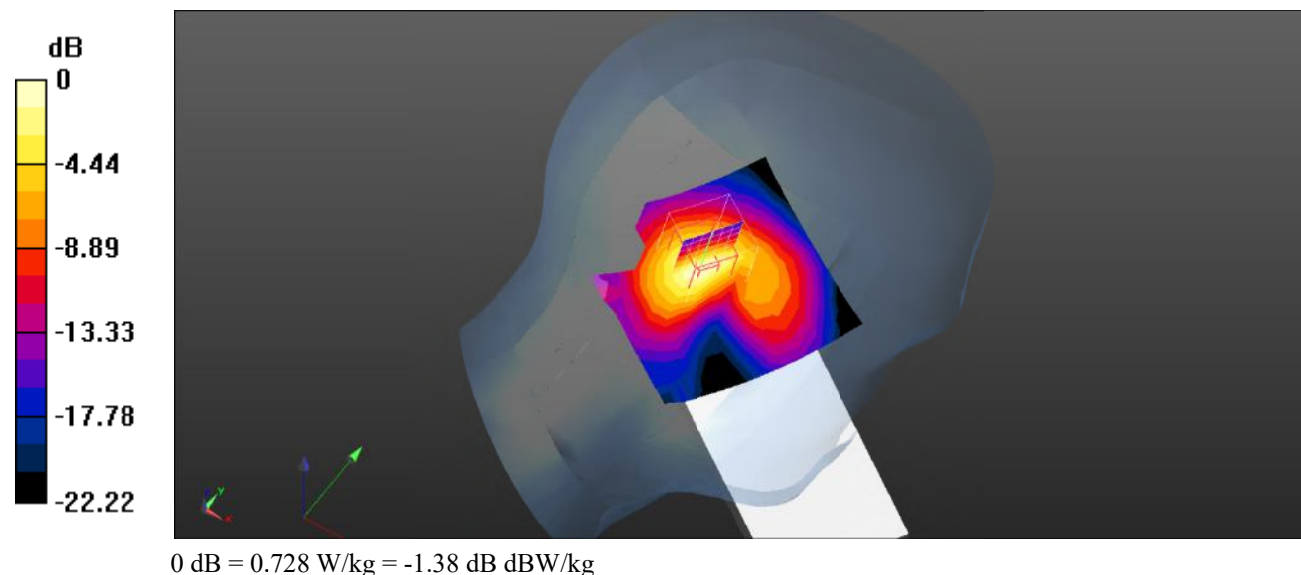

Test Plot 90#: LTE Band 7_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.477 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.259 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.479 W/kg

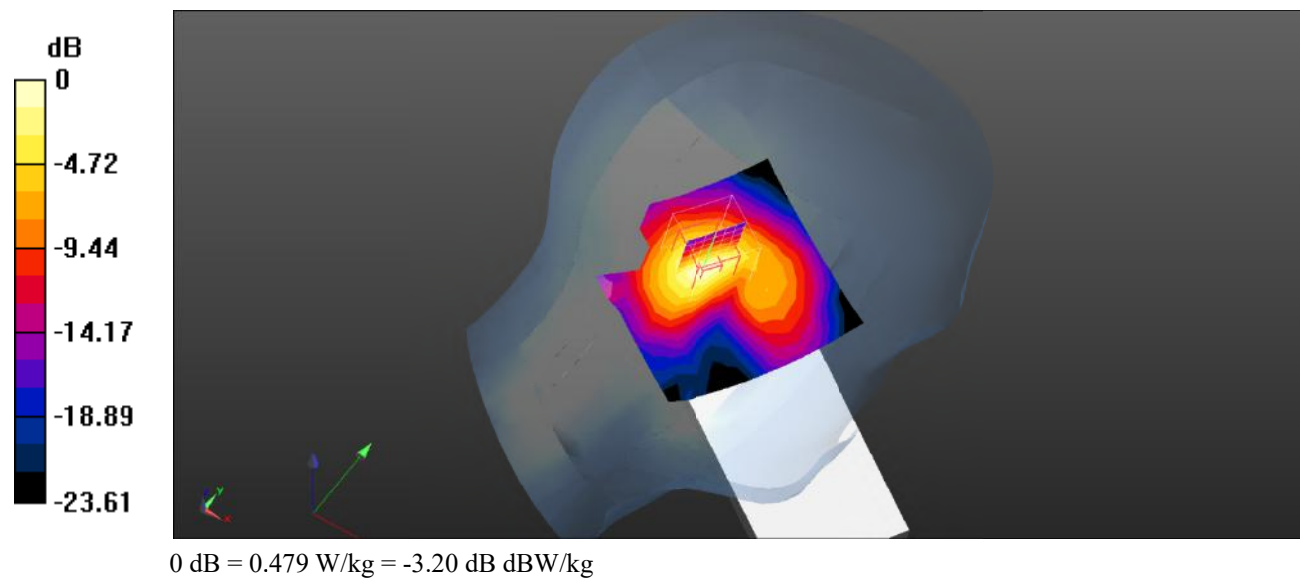

Test Plot 91#: LTE Band 7_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.502 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.743 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 0.588 W/kg

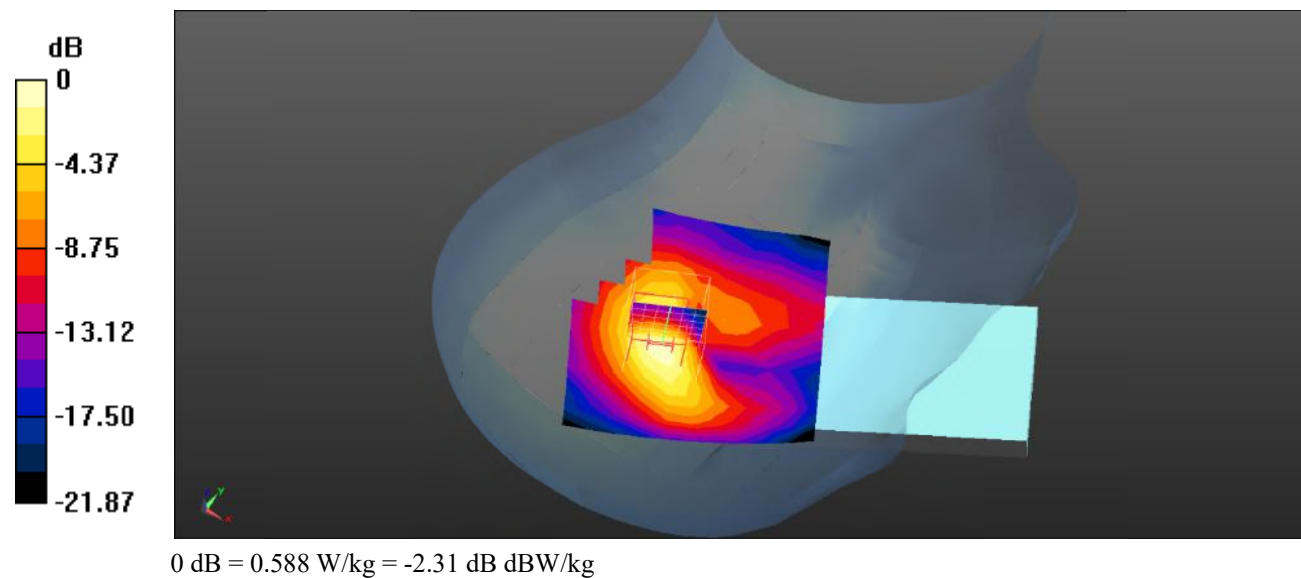

Test Plot 92#: LTE Band 7_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.317 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.564 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.632 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.371 W/kg

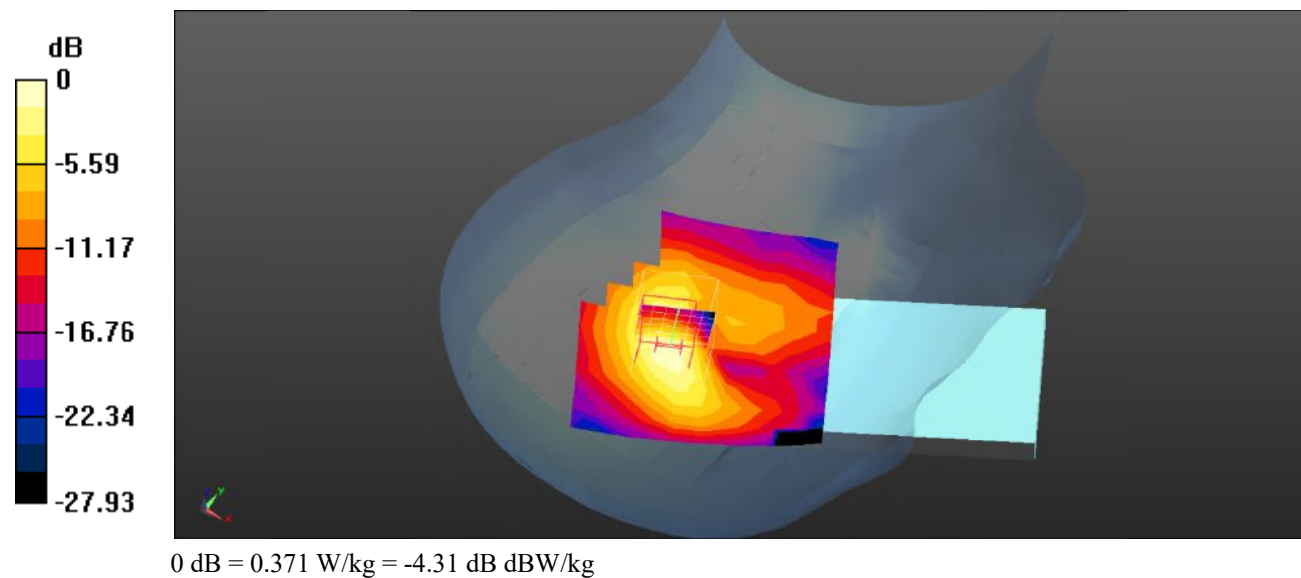

Test Plot 93#: LTE Band 7_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.662 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.575 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.640 W/kg; SAR(10 g) = 0.310 W/kg

Maximum value of SAR (measured) = 0.712 W/kg

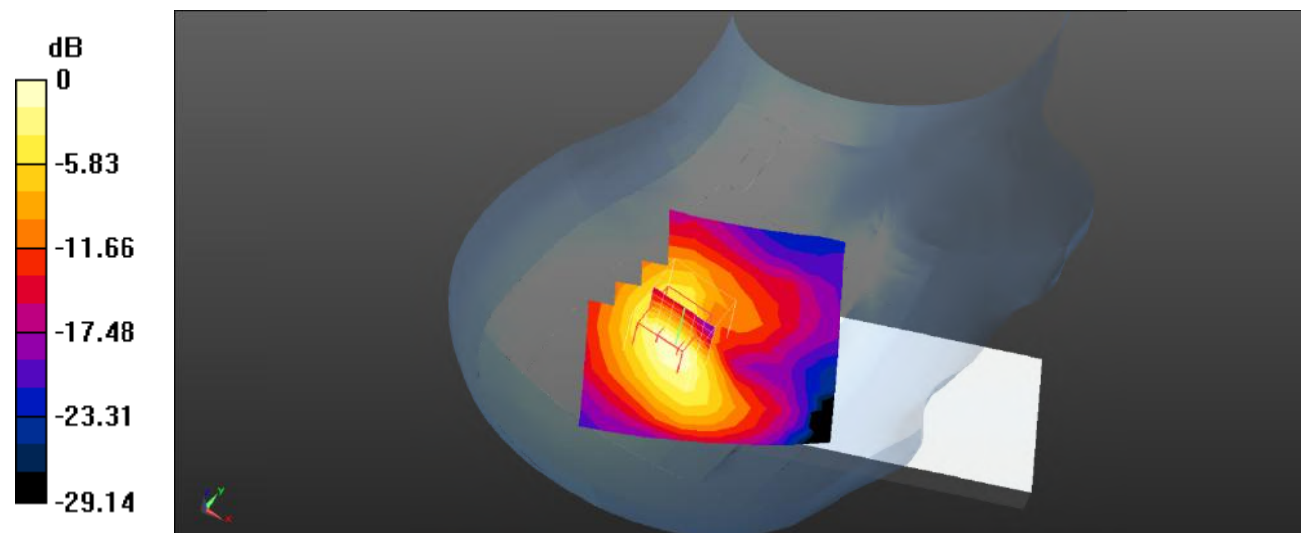

0 dB = 0.712 W/kg = -1.48 dB dBW/kg

Test Plot 94#: LTE Band 7_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.443 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.614 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.759 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.449 W/kg

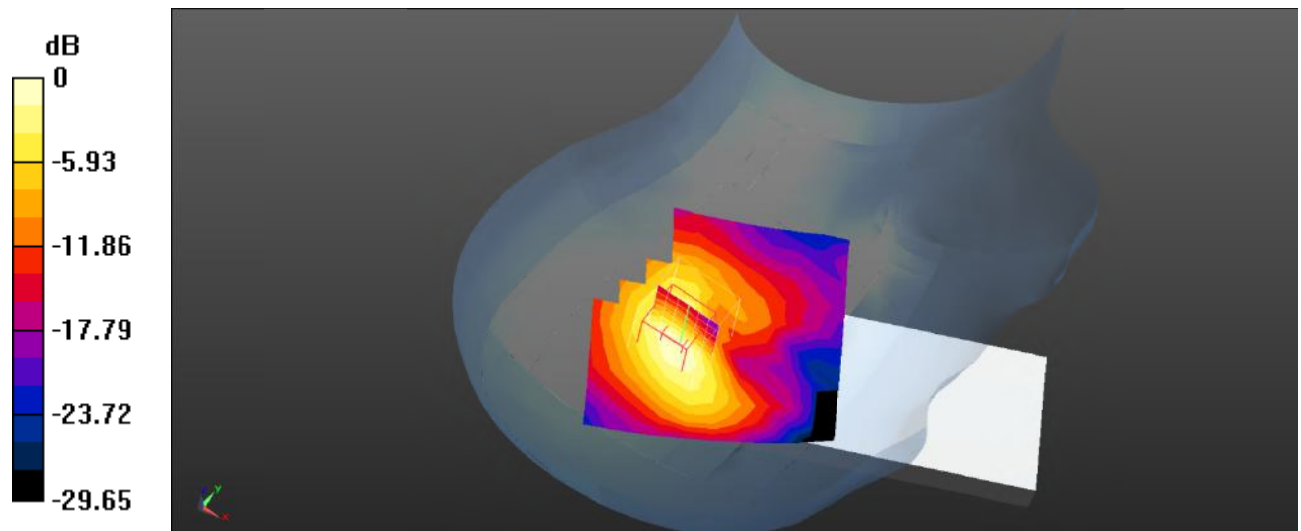

0 dB = 0.449 W/kg = -3.48 dB dBW/kg

Test Plot 95#: LTE Band 7_Body Front_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (13x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.275 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.914 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.280 W/kg

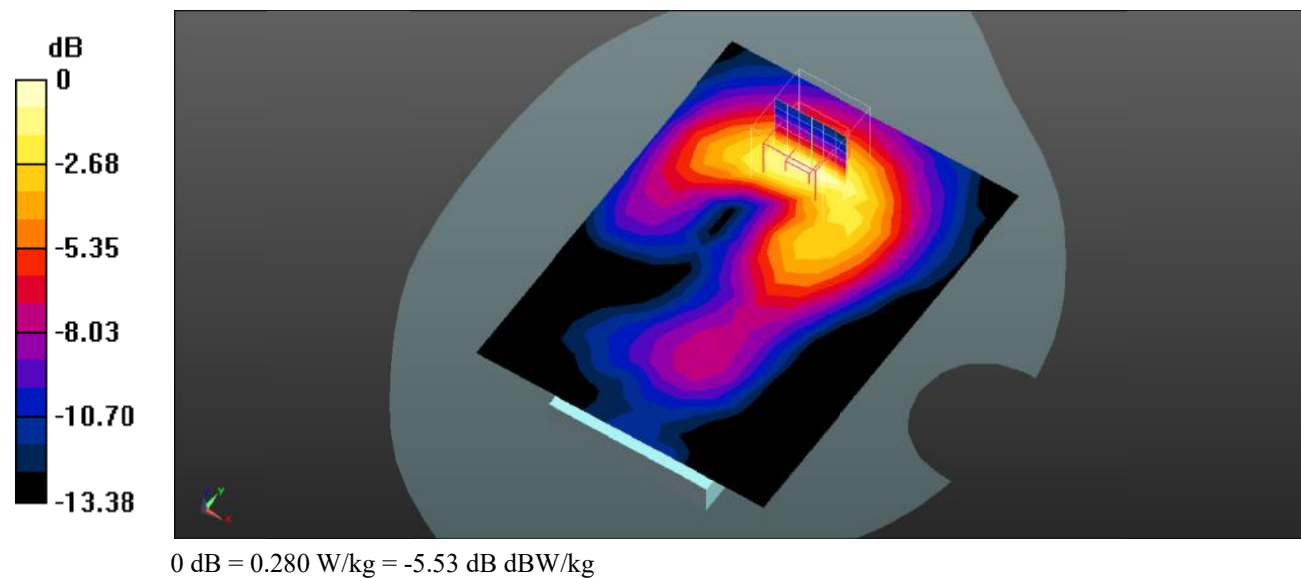

Test Plot 96#: LTE Band 7_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (13x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.194 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.961 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

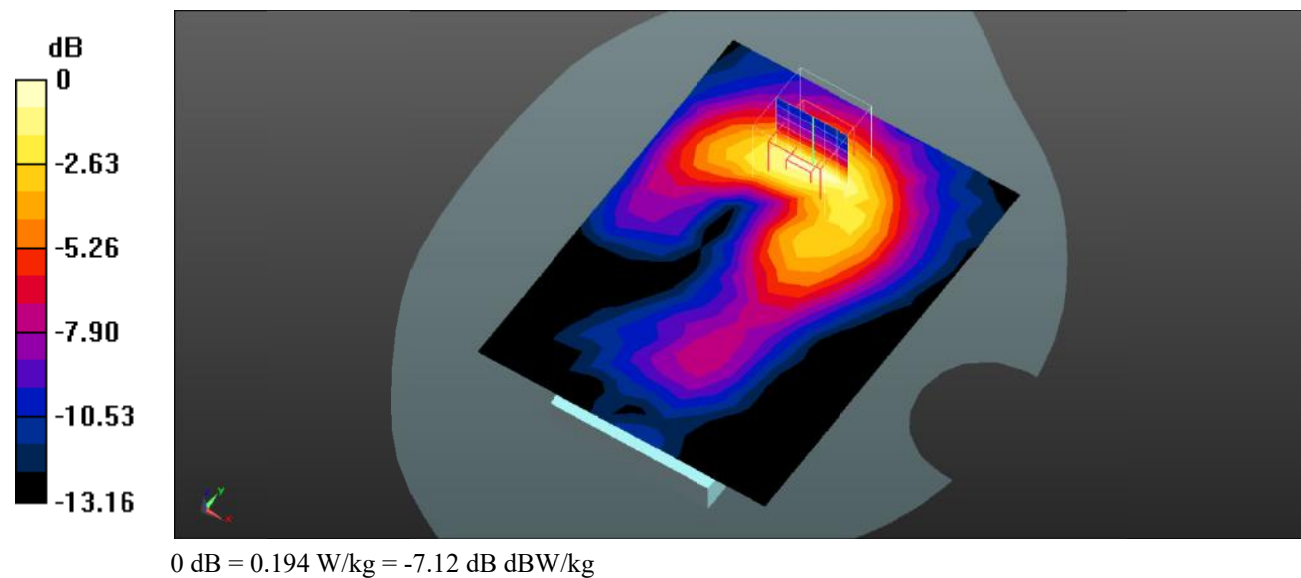

Test Plot 97#: LTE Band 7_Body Back_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.628 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.414 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.622 W/kg

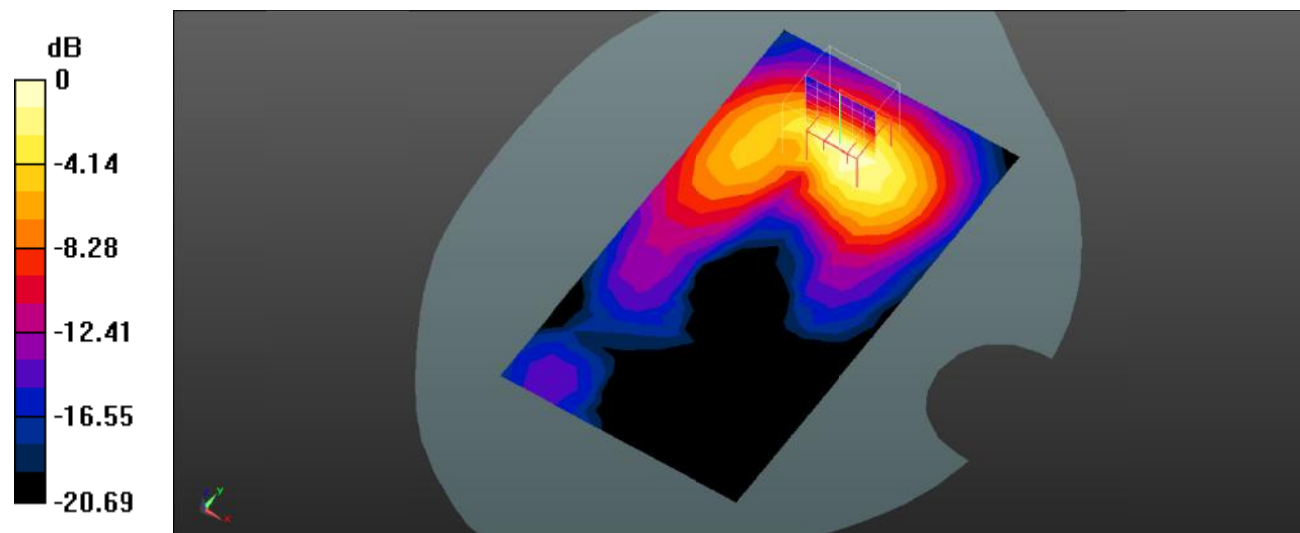

0 dB = 0.622 W/kg = -2.06 dB dBW/kg

Test Plot 98#: LTE Band 7_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.400 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.081 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.663 W/kg

SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.412 W/kg

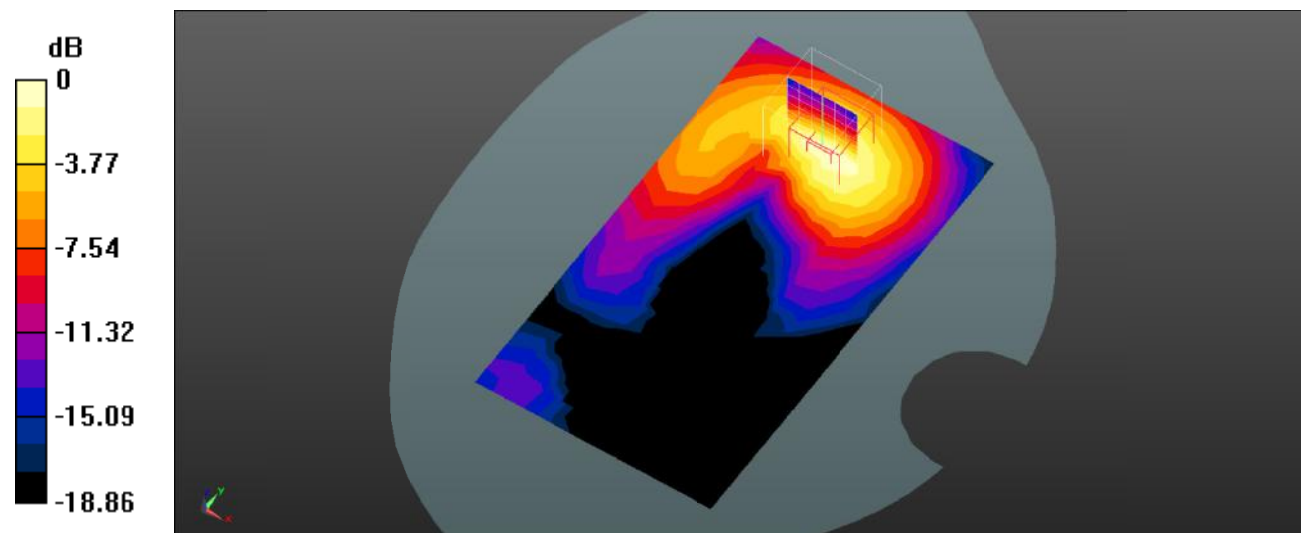

0 dB = 0.412 W/kg = -3.85 dB dBW/kg

Test Plot 99#: LTE Band 7_Body Right_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0998 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.031 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0947 W/kg

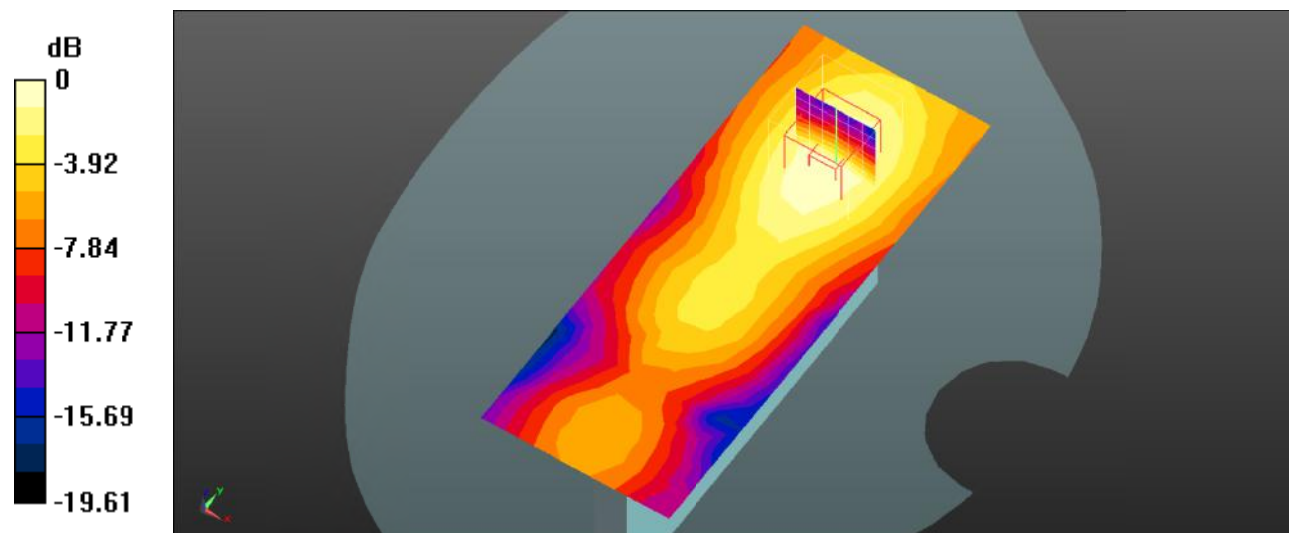

0 dB = 0.0947 W/kg = -10.24 dB dBW/kg

Test Plot 100#: LTE Band 7_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0686 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.077 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0689 W/kg

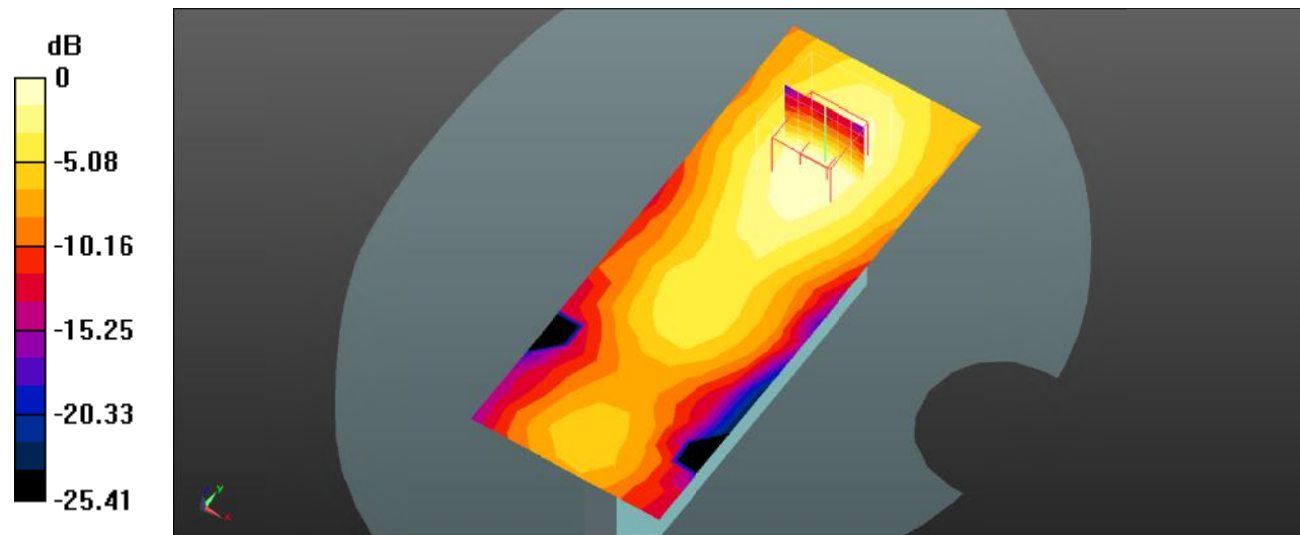

0 dB = 0.0689 W/kg = -11.62 dB dBW/kg

Test Plot 101#: LTE Band 7_Body Top_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.537 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.77 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.882 W/kg

SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 0.559 W/kg

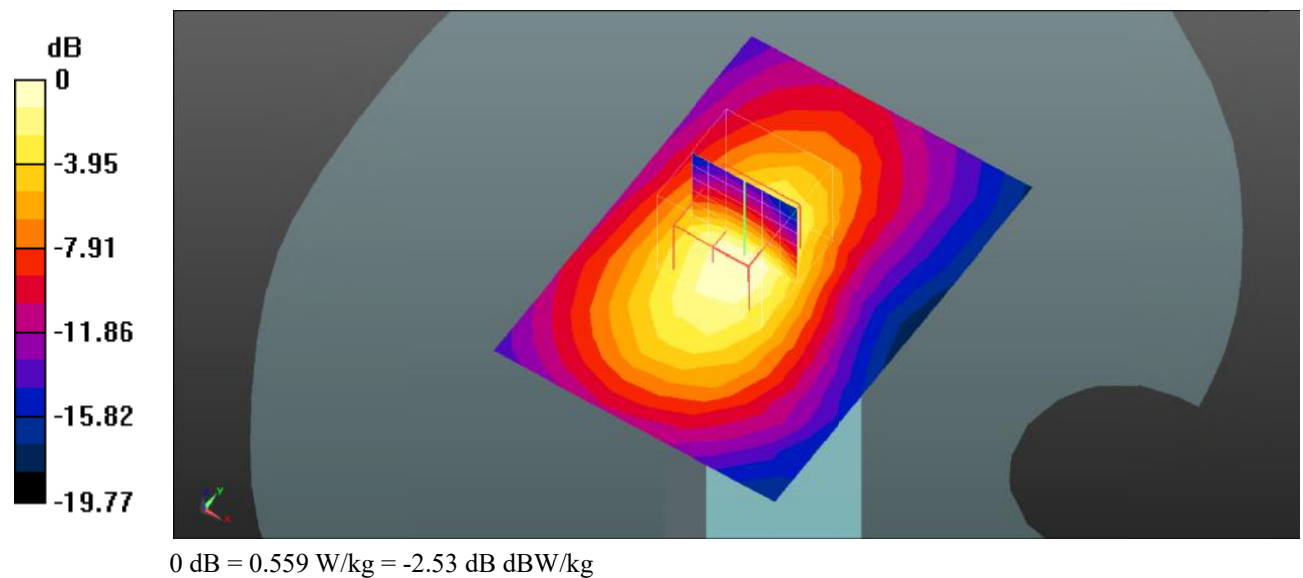

Test Plot 102#: LTE Band 7_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @2535 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.360 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.10 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.373 W/kg

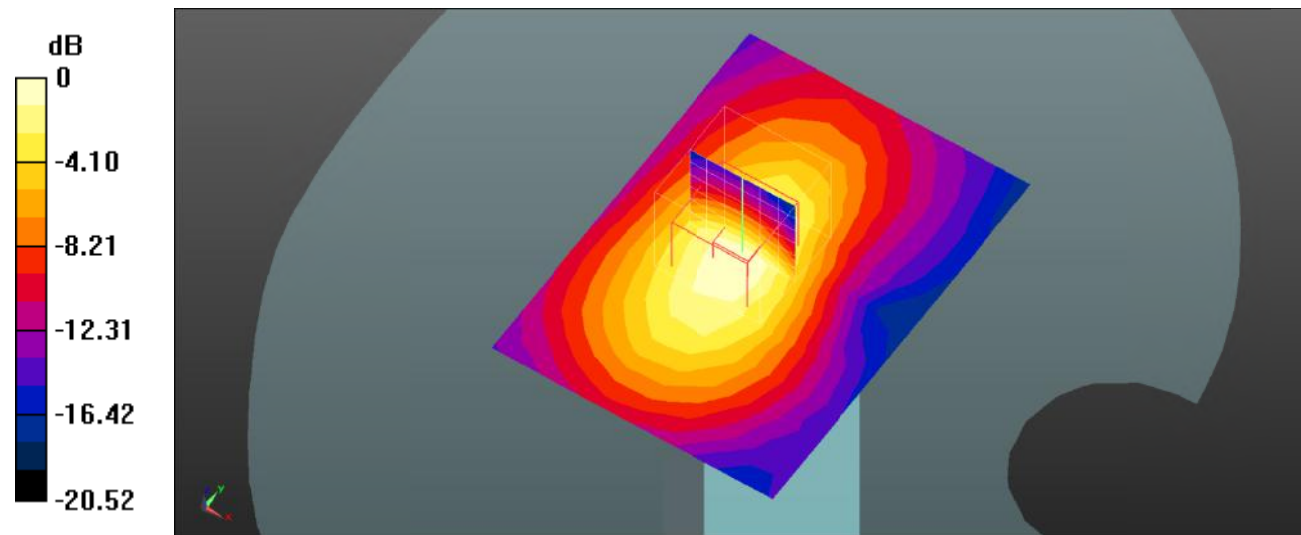

0 dB = 0.373 W/kg = -4.28 dB dBW/kg

Test Plot 103#: LTE Band 12_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0880 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.459 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.0847 W/kg

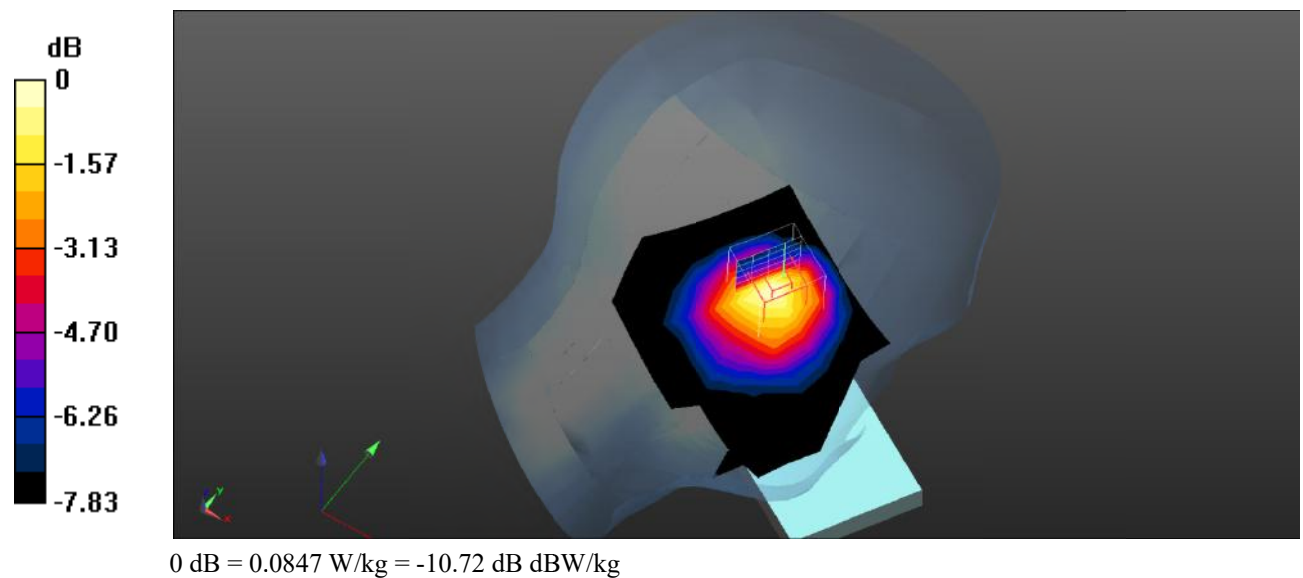

Test Plot 104#: LTE Band 12_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0709 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.147 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.0737 W/kg

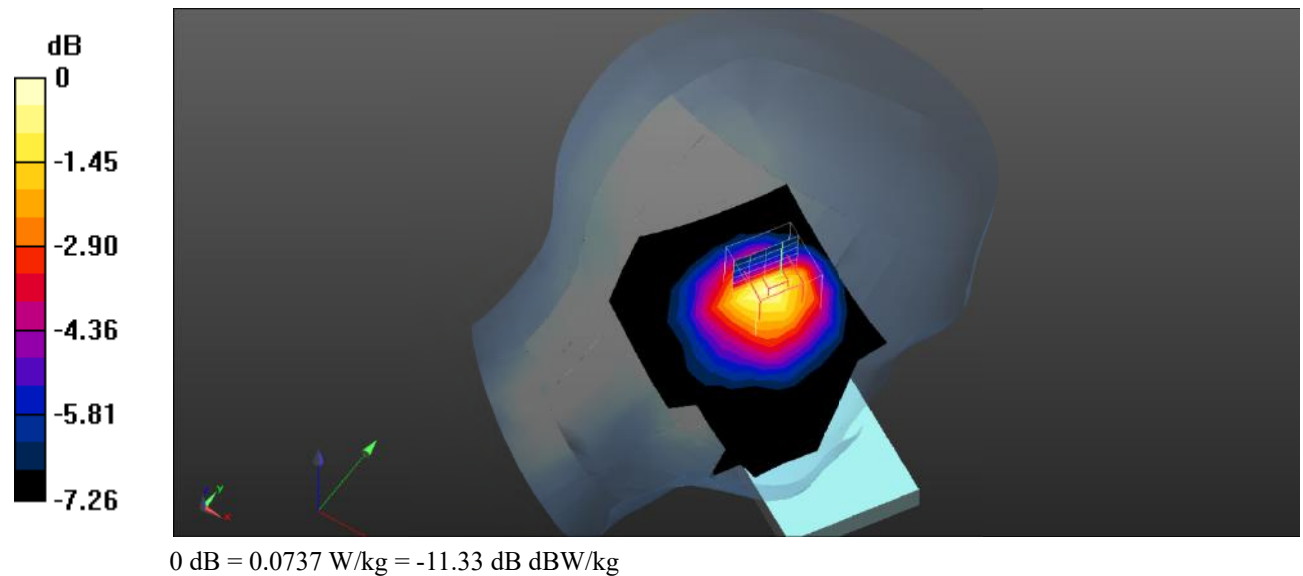

Test Plot 105#: LTE Band 12_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0852 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.892 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0903 W/kg

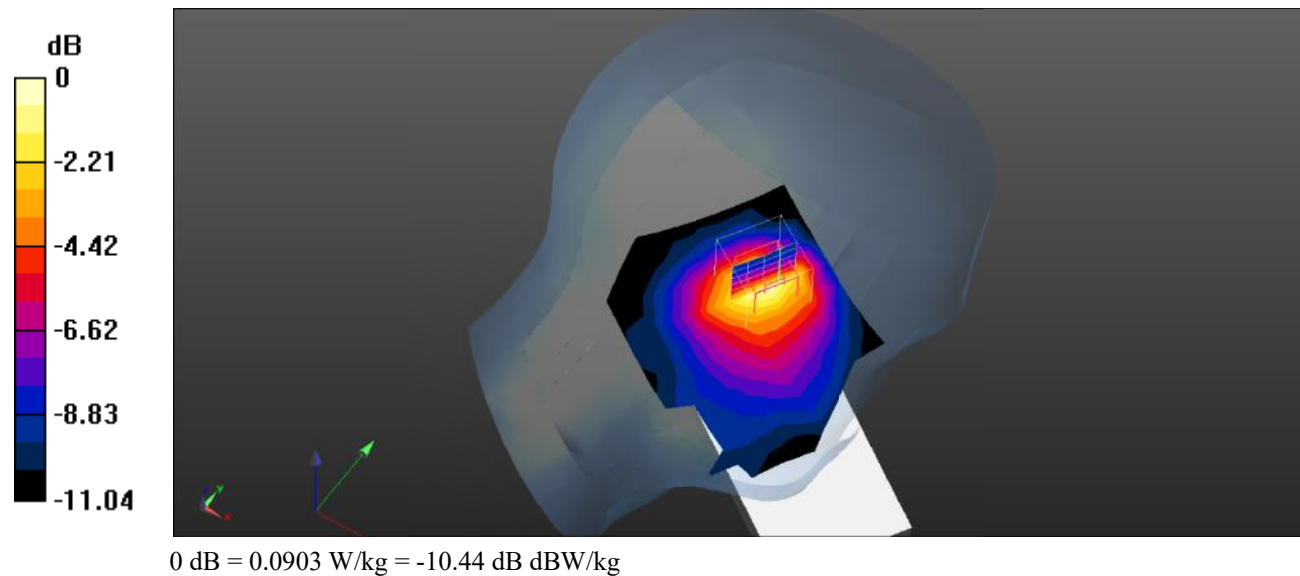

Test Plot 106#: LTE Band 12_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0668 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.362 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0730 W/kg

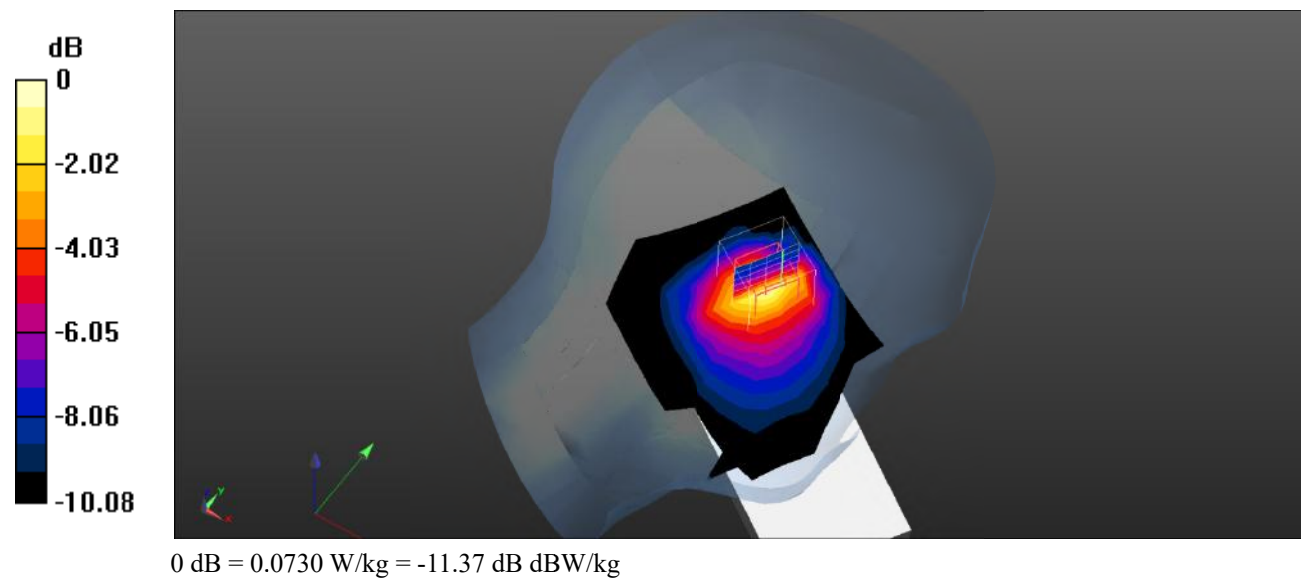

Test Plot 107#: LTE Band 12_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0326 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.659 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0377 W/kg

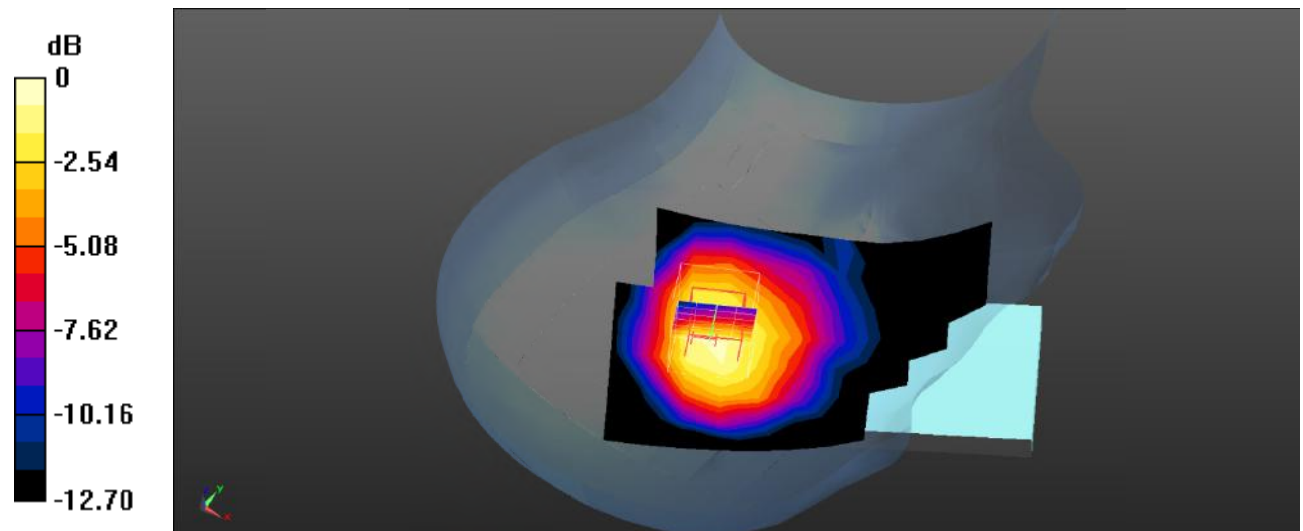

0 dB = 0.0377 W/kg = -14.24 dB dBW/kg

Test Plot 108#: LTE Band 12_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0261 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.105 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0305 W/kg

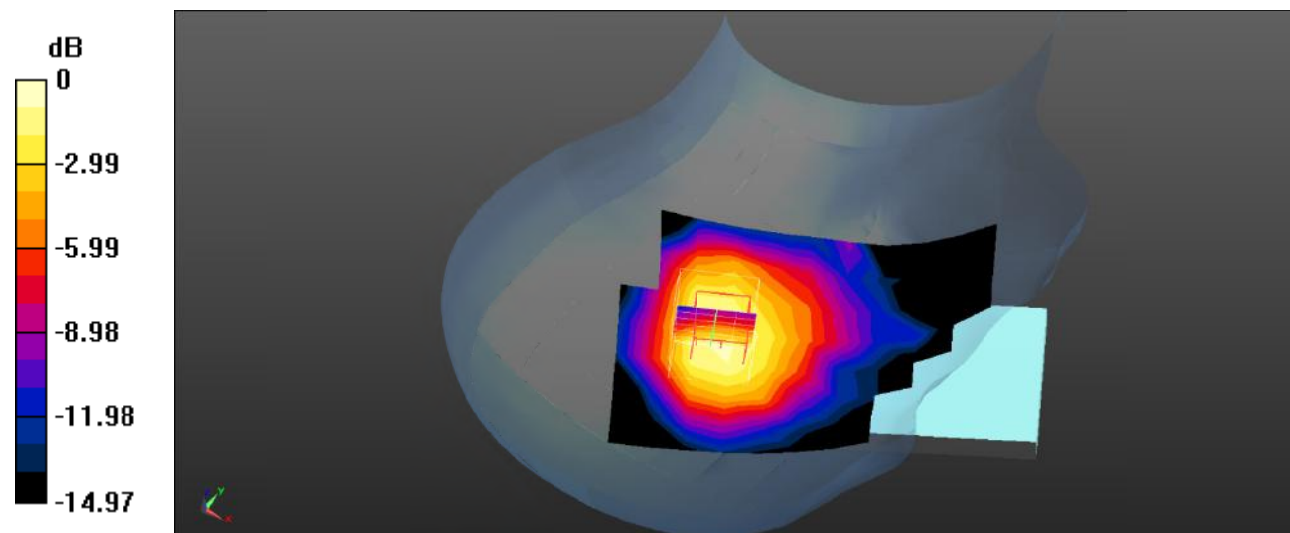

0 dB = 0.0305 W/kg = -15.16 dB dBW/kg

Test Plot 109#: LTE Band 12_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0150 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.771 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0180 W/kg

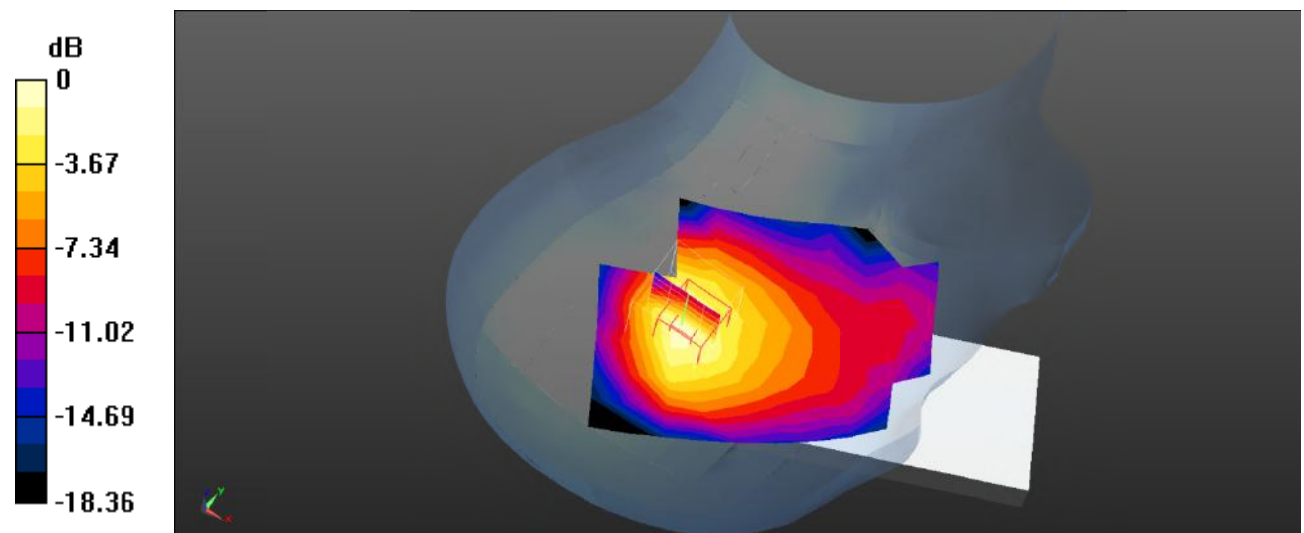

0 dB = 0.0180 W/kg = -17.45 dB dBW/kg

Test Plot 110#: LTE Band 12_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0285 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.982 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0330 W/kg

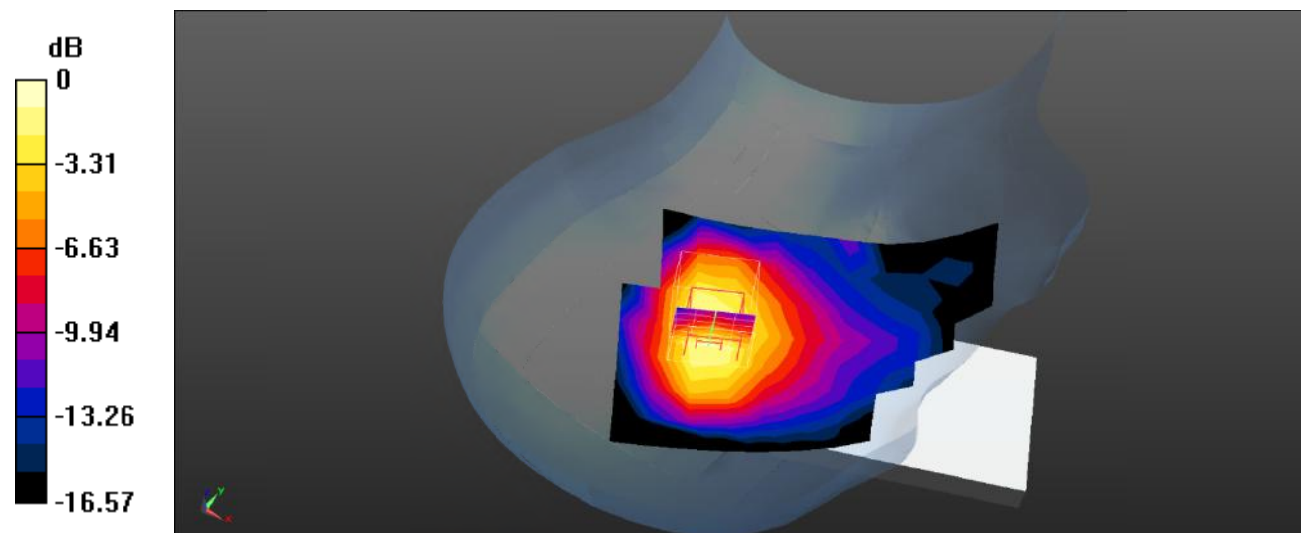

0 dB = 0.0330 W/kg = -14.81 dB dBW/kg

Test Plot 111#: LTE Band 12_Body Front_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0112 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.705 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0113 W/kg

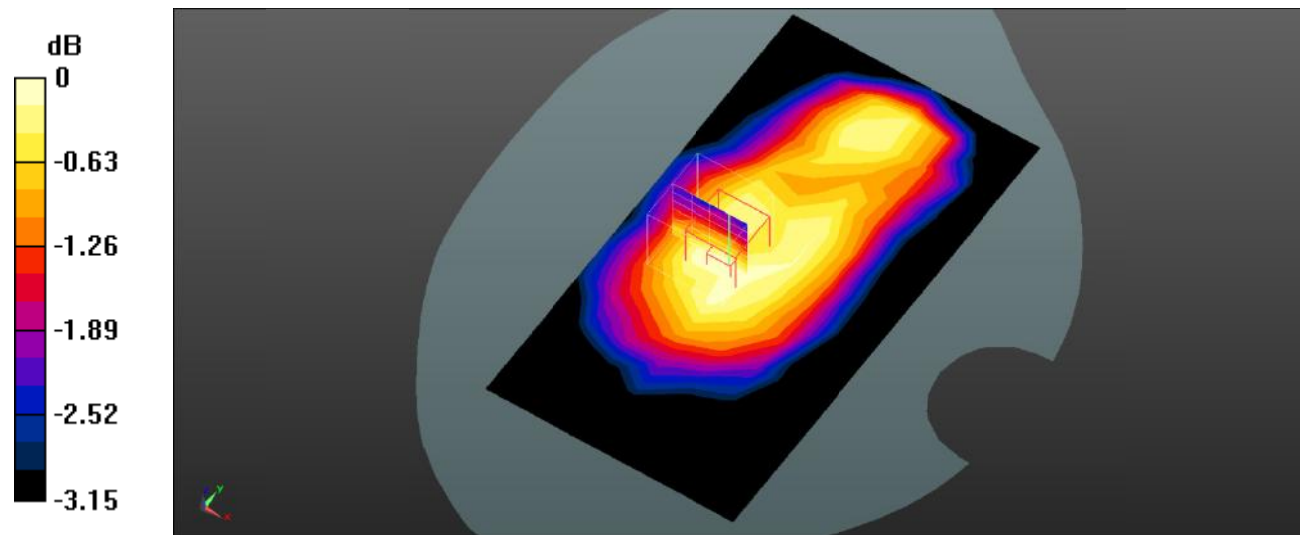

0 dB = 0.0113 W/kg = -19.47 dB dBW/kg

Test Plot 112#: LTE Band 12_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00847 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.235 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0100 W/kg

SAR(1 g) = 0.00880 W/kg; SAR(10 g) = 0.00736 W/kg

Maximum value of SAR (measured) = 0.00880 W/kg

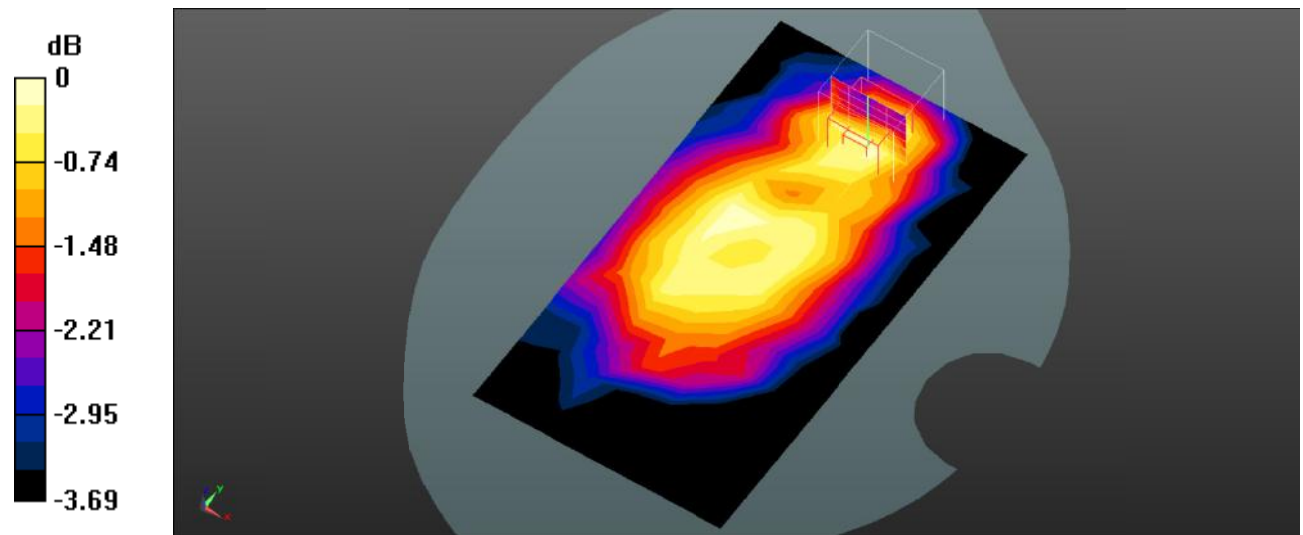

Test Plot 113#: LTE Band 12_Body Back_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0171 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.388 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0168 W/kg

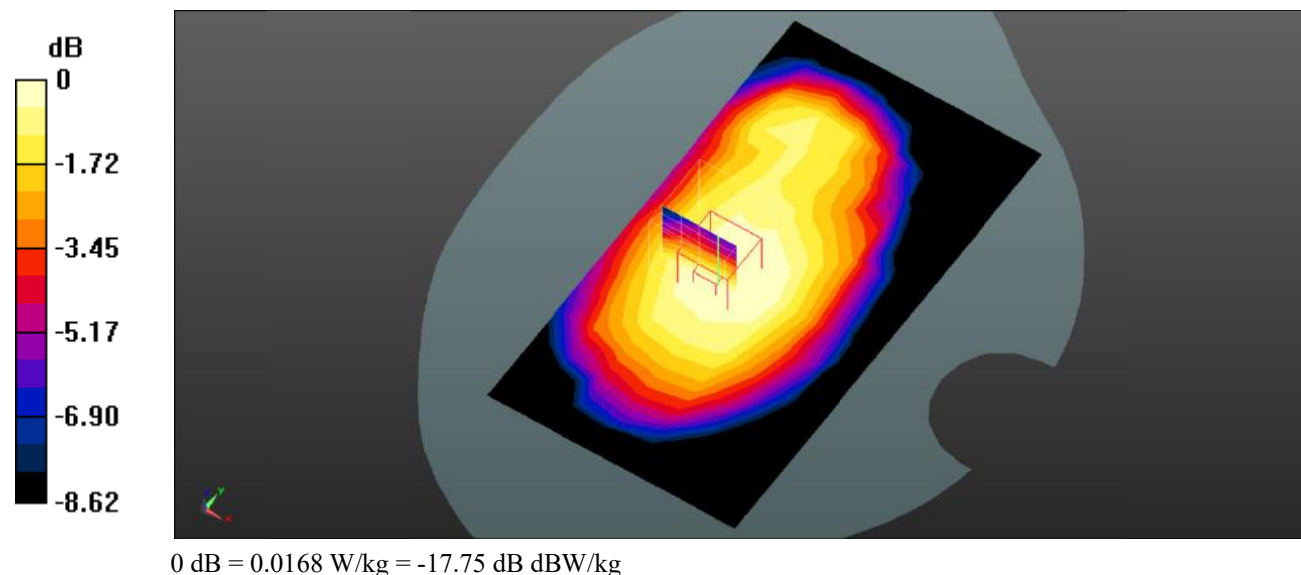

Test Plot 114#: LTE Band 12_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0131 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.923 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0134 W/kg

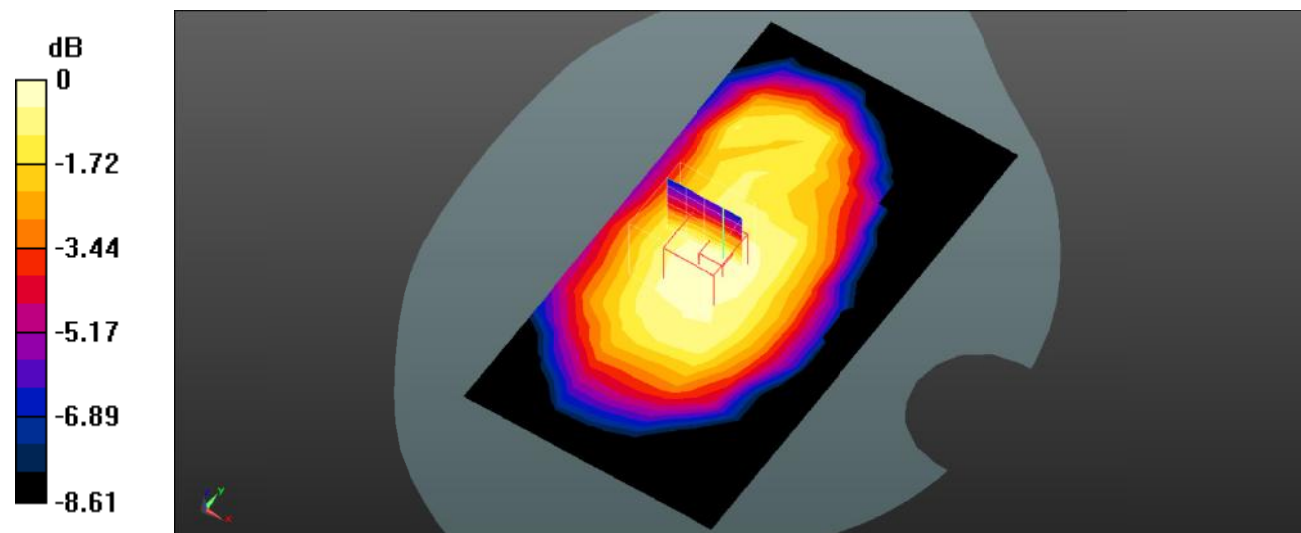

0 dB = 0.0134 W/kg = -18.73 dB dBW/kg

Test Plot 115#: LTE Band 12_Body Right_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0166 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.023 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0160 W/kg

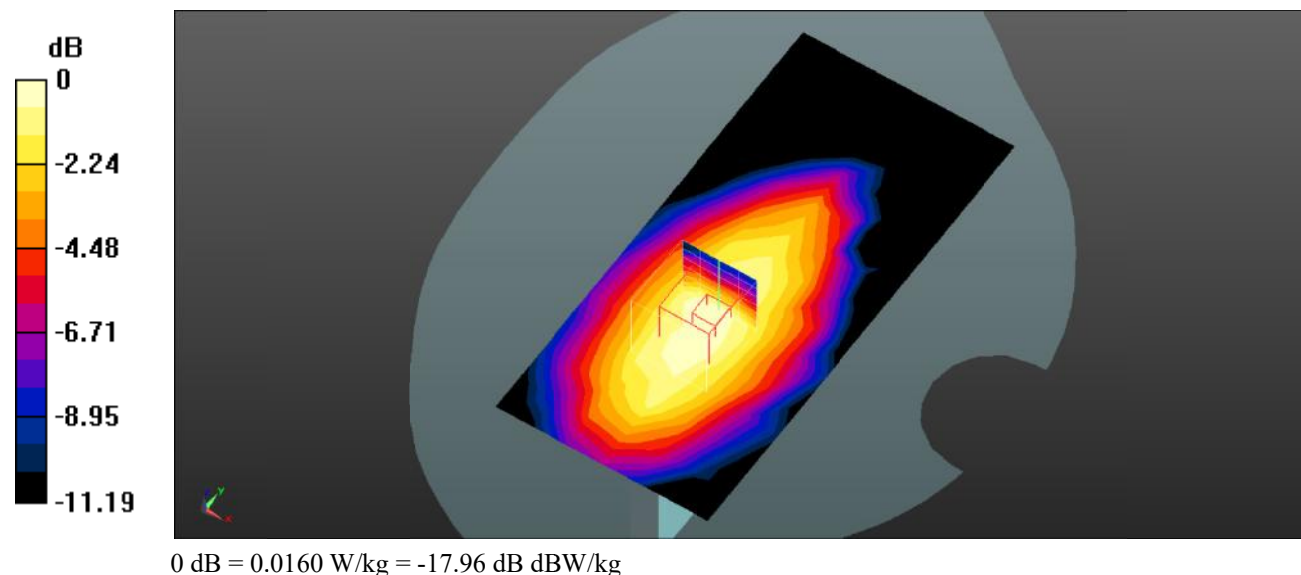

Test Plot 116#: LTE Band 12_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0123 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.422 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00768 W/kg

Maximum value of SAR (measured) = 0.0119 W/kg

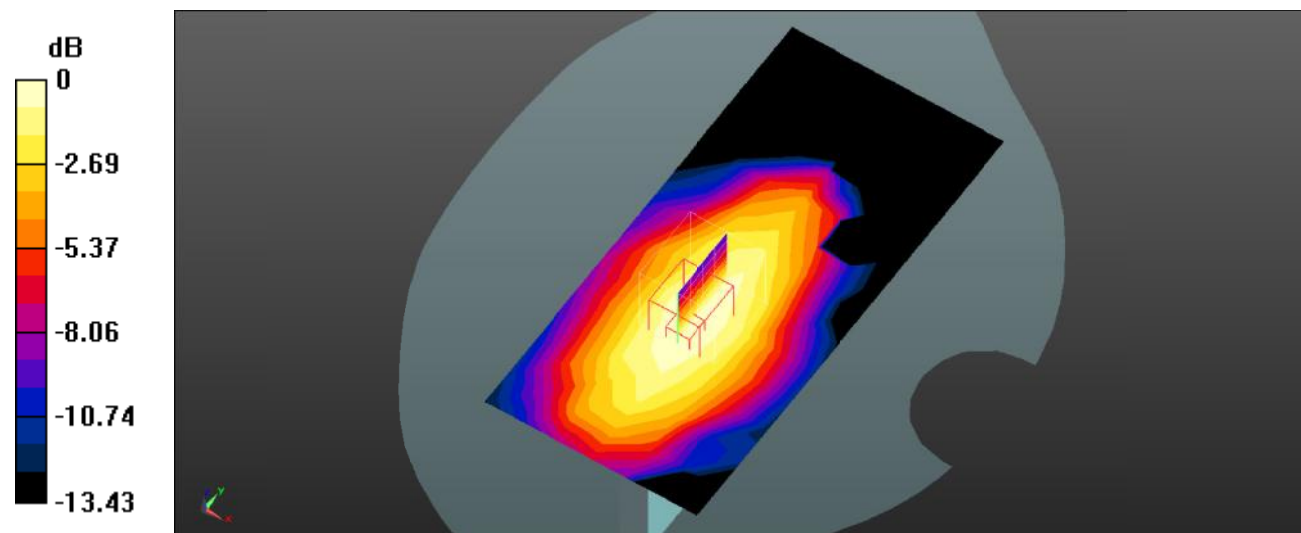

0 dB = 0.0119 W/kg = -19.24 dB dBW/kg

Test Plot 117#: LTE Band 12_Body Top_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00751 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.989 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.00787 W/kg; SAR(10 g) = 0.00433 W/kg

Maximum value of SAR (measured) = 0.00870 W/kg

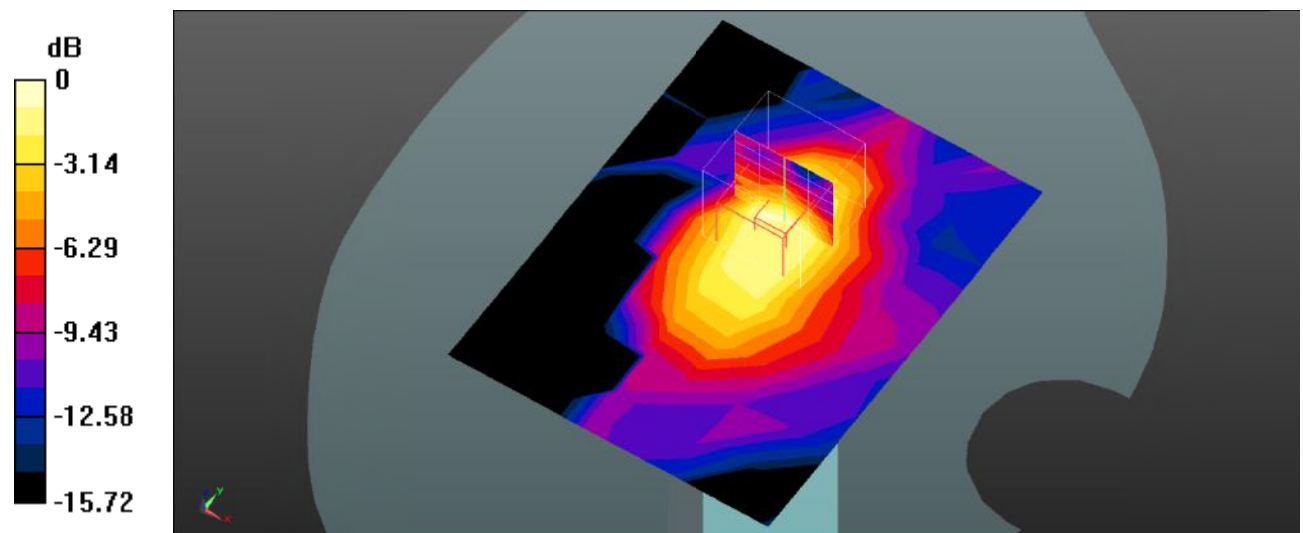

0 dB = 0.00870 W/kg = -20.60 dB dBW/kg

Test Plot 118#: LTE Band 12_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.944$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00532 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.293 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.00626 W/kg; SAR(10 g) = 0.0035 W/kg

Maximum value of SAR (measured) = 0.00662 W/kg

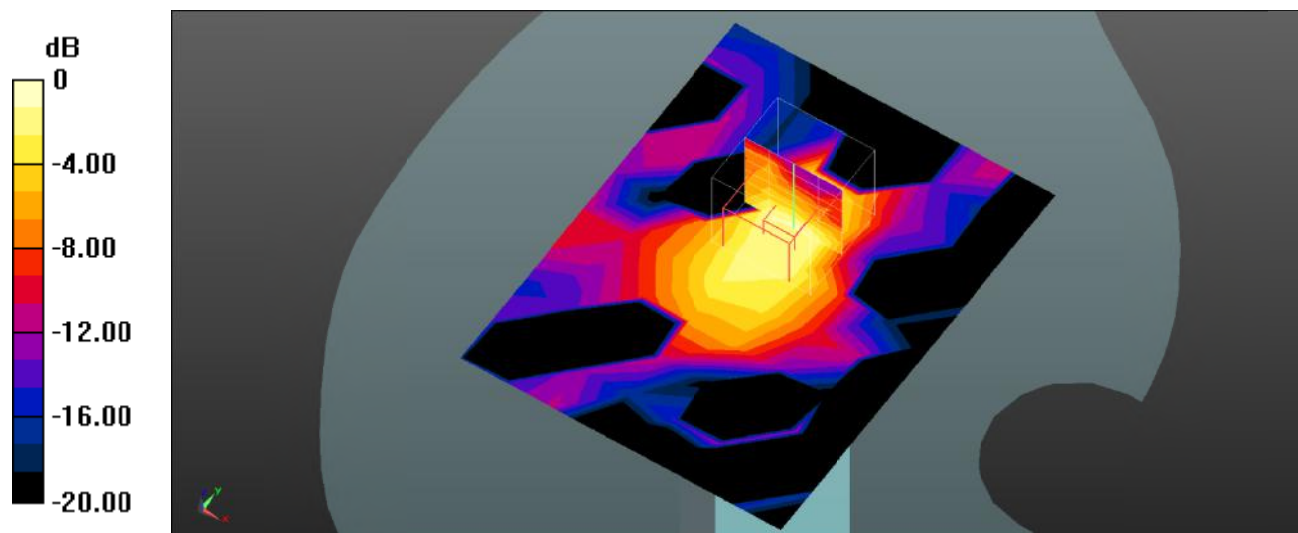

0 dB = 0.00662 W/kg = -21.79 dB dBW/kg

Test Plot 119#: LTE Band 41_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.743 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.68 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.299 W/kg

Maximum value of SAR (measured) = 0.746 W/kg

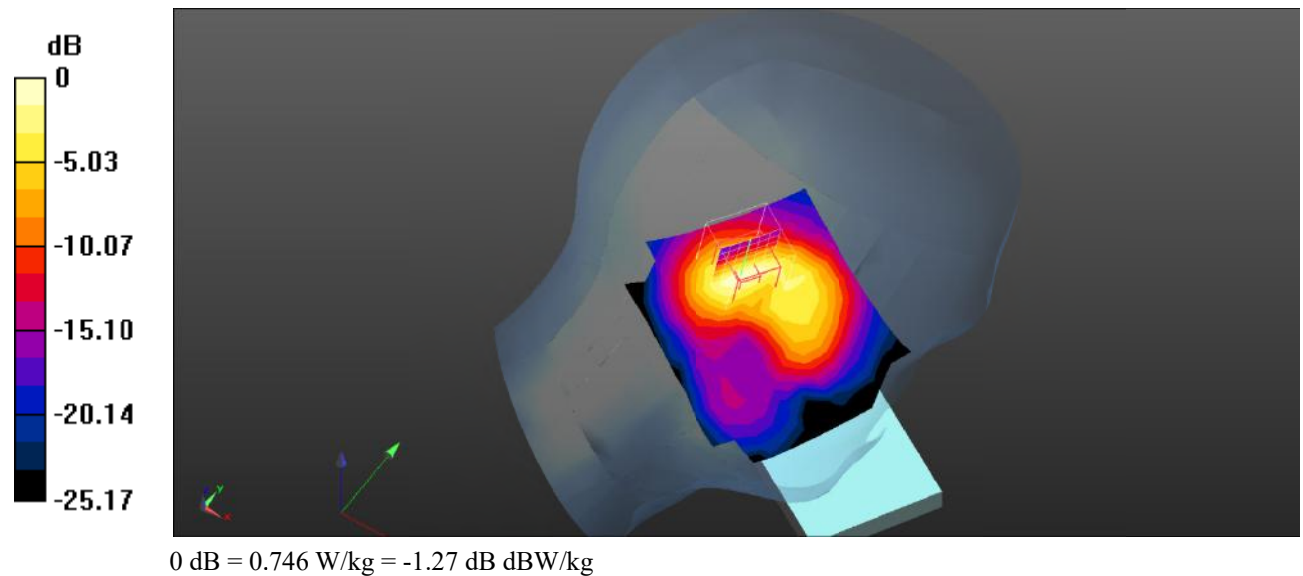

Test Plot 120#: LTE Band 41_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.595 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.63 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.542 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

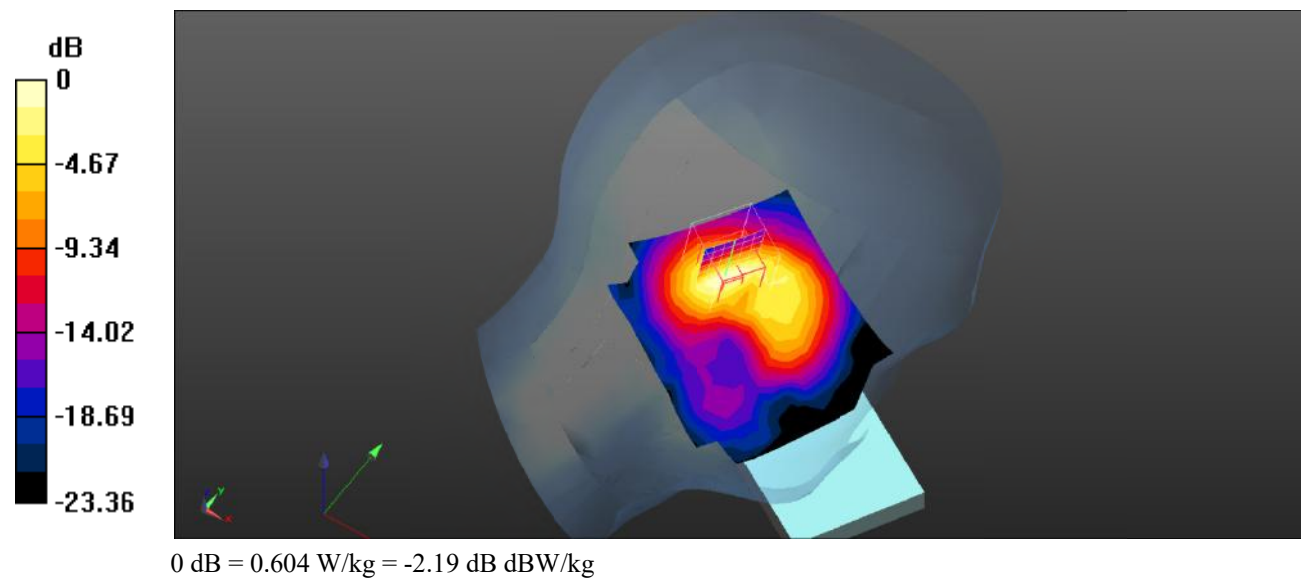

Test Plot 121#: LTE Band 41_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.834 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.07 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.344 W/kg

Maximum value of SAR (measured) = 0.886 W/kg

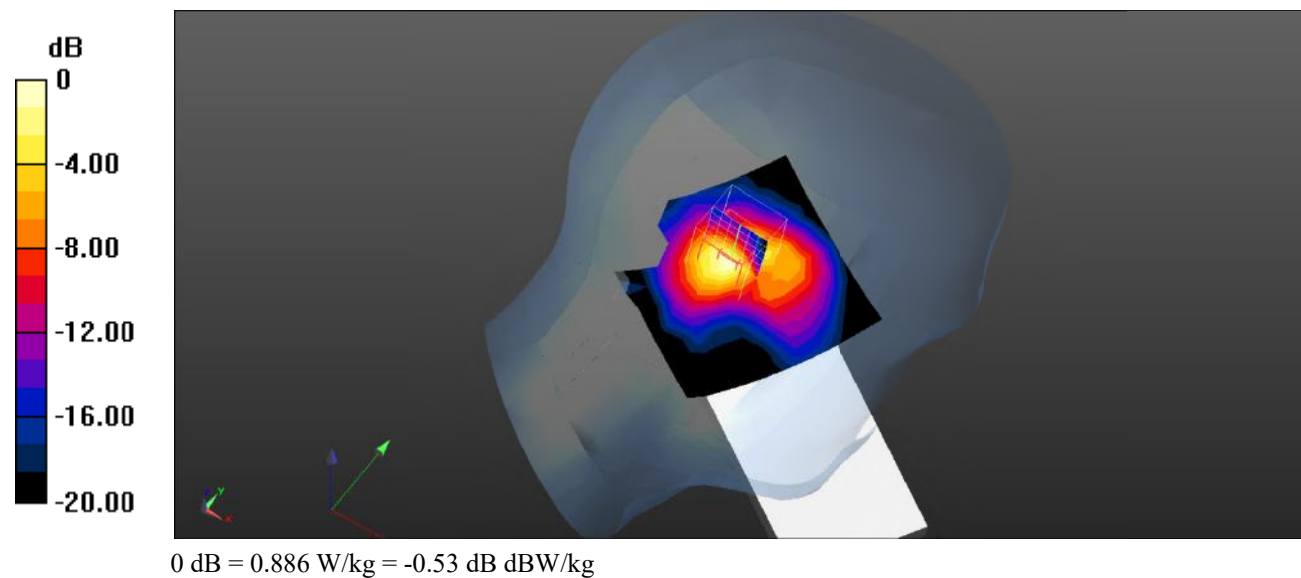

Test Plot 122#: LTE Band 41_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.657 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.100 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.718 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 0.828 W/kg

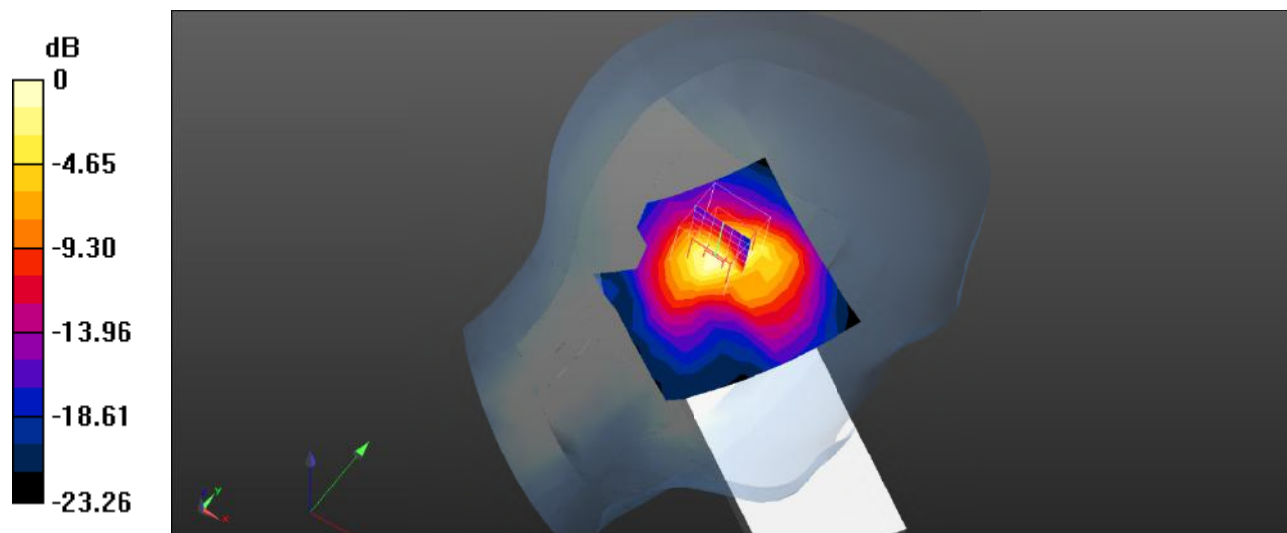

0 dB = 0.828 W/kg = -0.82 dB dBW/kg

Test Plot 123#: LTE Band 41_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.250 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.509 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.251 W/kg

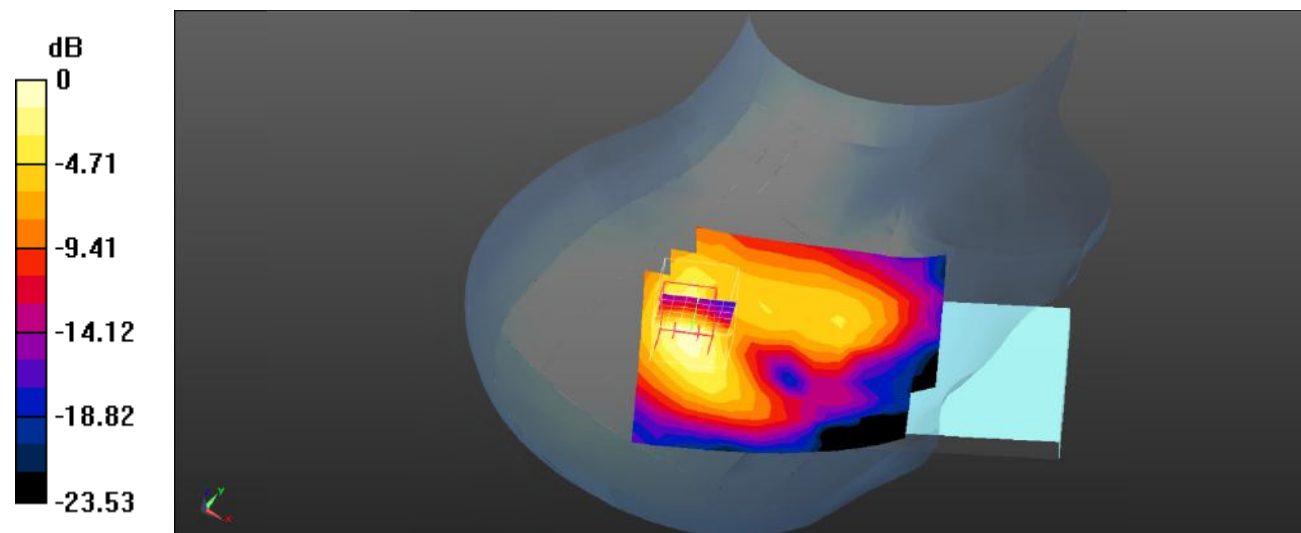

0 dB = 0.251 W/kg = -6.00 dB dBW/kg

Test Plot 124#: LTE Band 41_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.208 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.963 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.367 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.207 W/kg

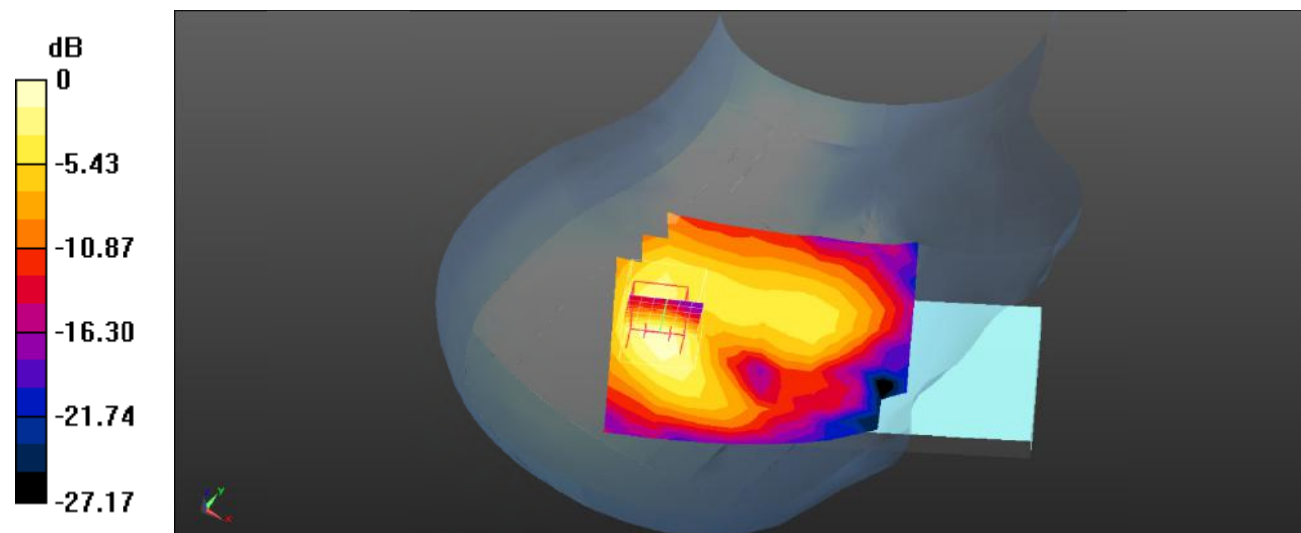

0 dB = 0.207 W/kg = -6.84 dB dBW/kg

Test Plot 125#: LTE Band 41_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.502 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.109 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.983 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 0.567 W/kg

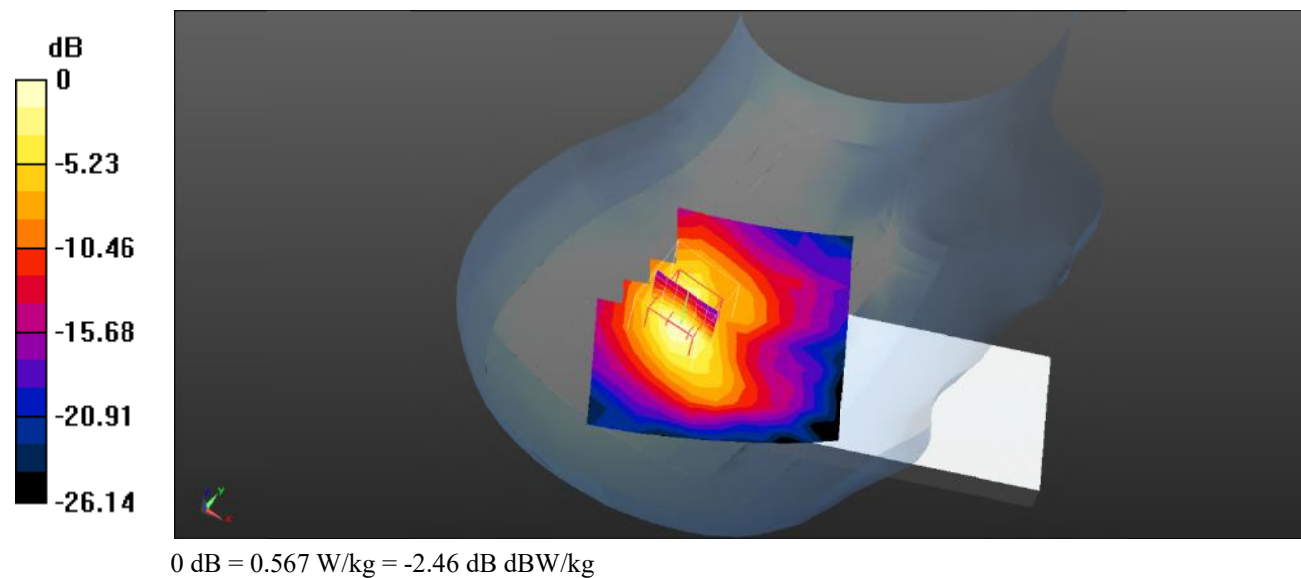

Test Plot 126#: LTE Band 41_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.524 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.430 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.918 W/kg

SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 0.527 W/kg

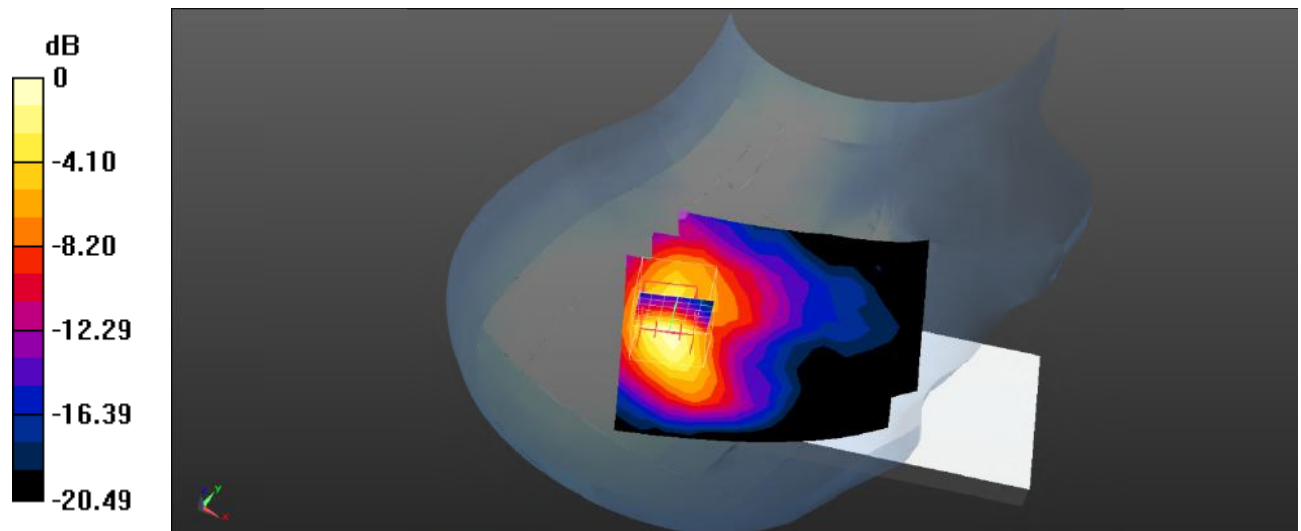

0 dB = 0.527 W/kg = -2.78 dB dBW/kg

Test Plot 127#: LTE Band 41_Body Front_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.137 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.661 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.134 W/kg

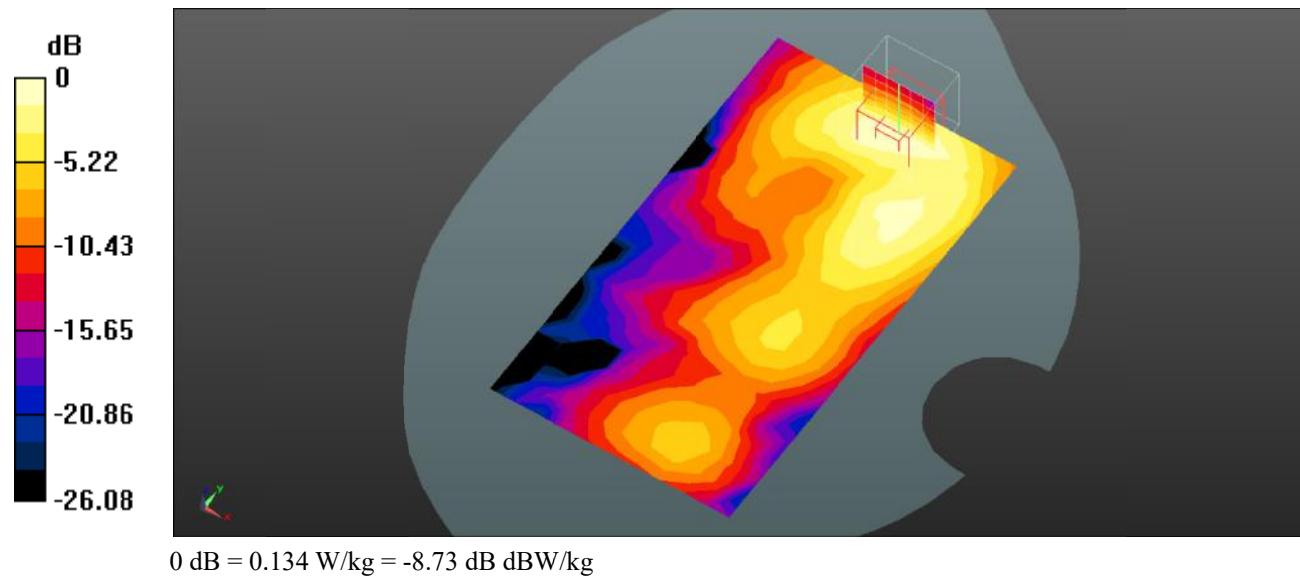

Test Plot 128#: LTE Band 41_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.107 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.653 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.108 W/kg

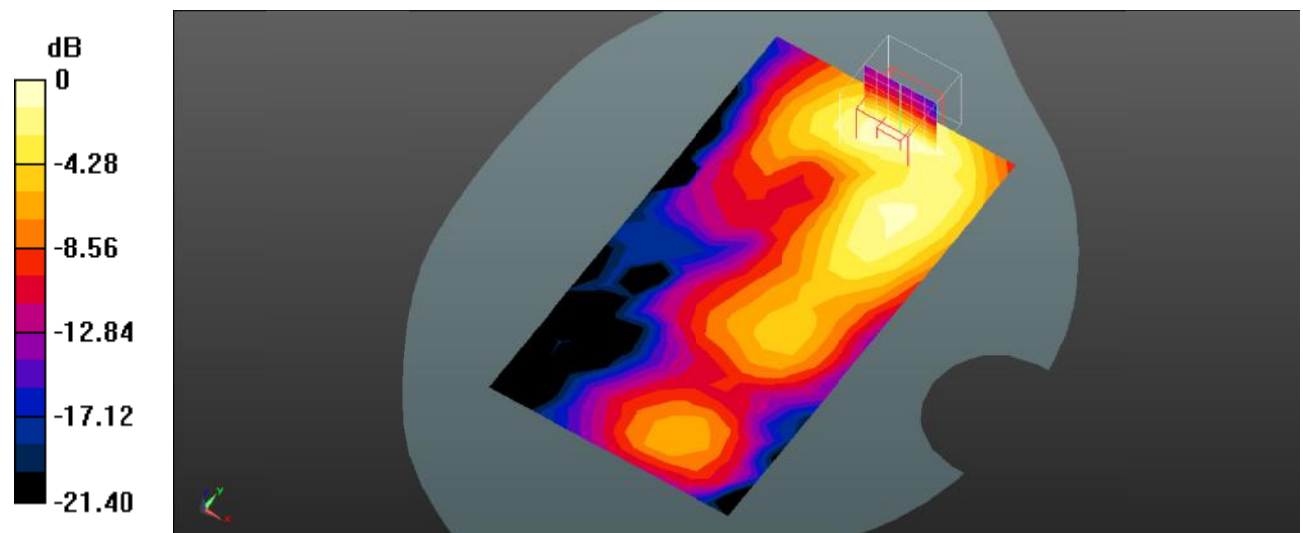

0 dB = 0.108 W/kg = -9.67 dB dBW/kg

Test Plot 129#: LTE Band 41_Body Back_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.567 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.869 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.592 W/kg

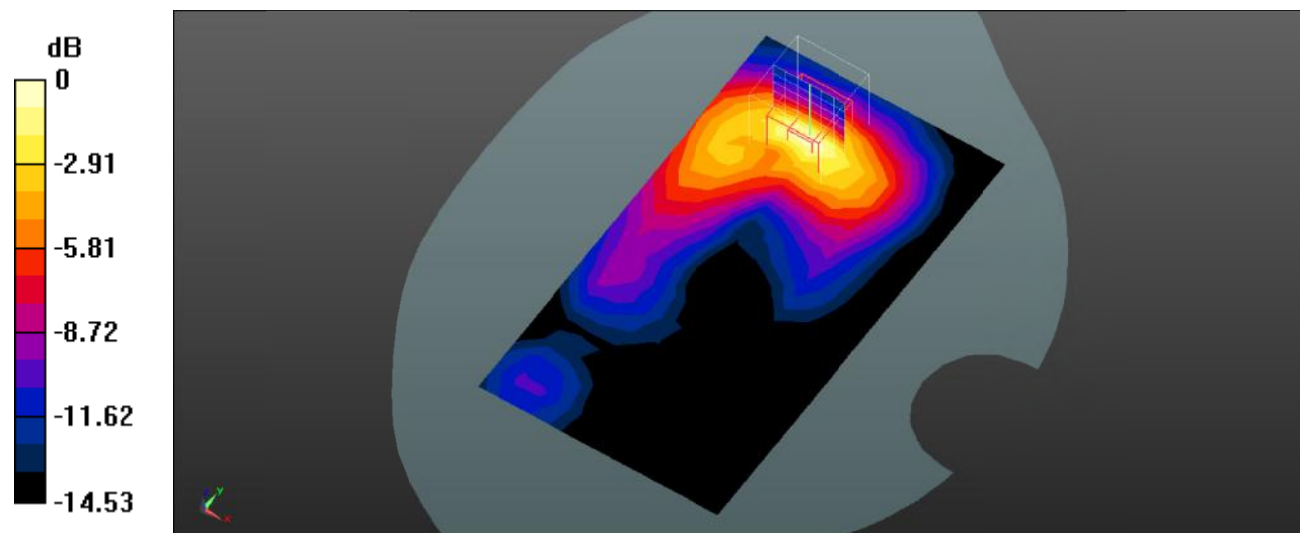

Test Plot 130#: LTE Band 41_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.450 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.983 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.814 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.476 W/kg

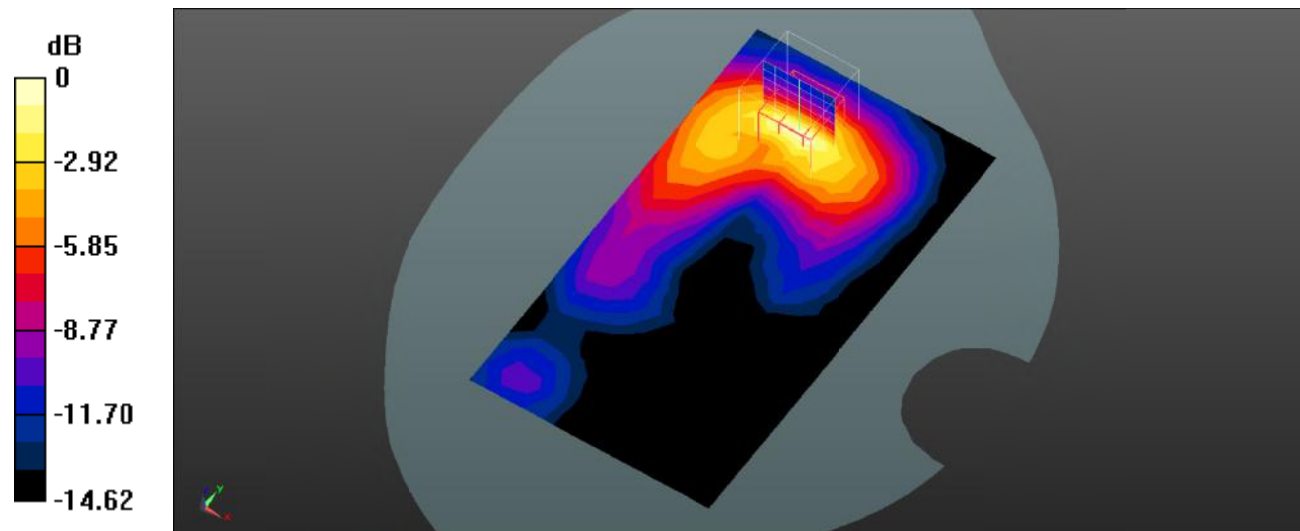

Test Plot 131#: LTE Band 41_Body Right_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0218 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.575 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0236 W/kg

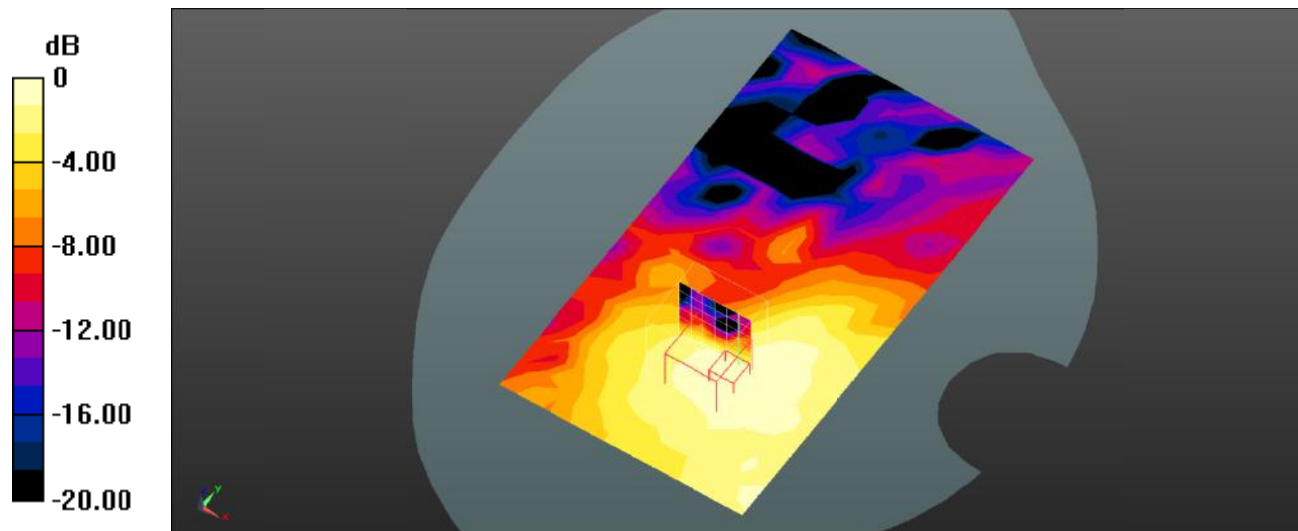

0 dB = 0.0236 W/kg = -16.27 dB dBW/kg

Test Plot 132#: LTE Band 41_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0210 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.156 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0310 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00837 W/kg

Maximum value of SAR (measured) = 0.0192 W/kg

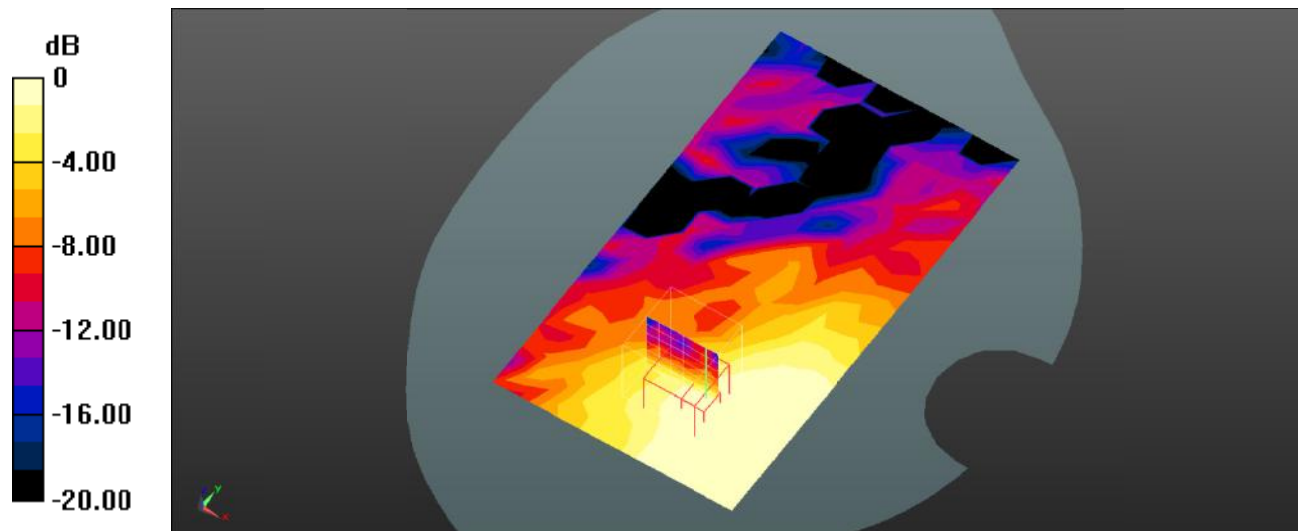

0 dB = 0.0192 W/kg = -17.17 dB dBW/kg

Test Plot 133#: LTE Band 41_Body Top_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.639 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.45 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 0.619 W/kg

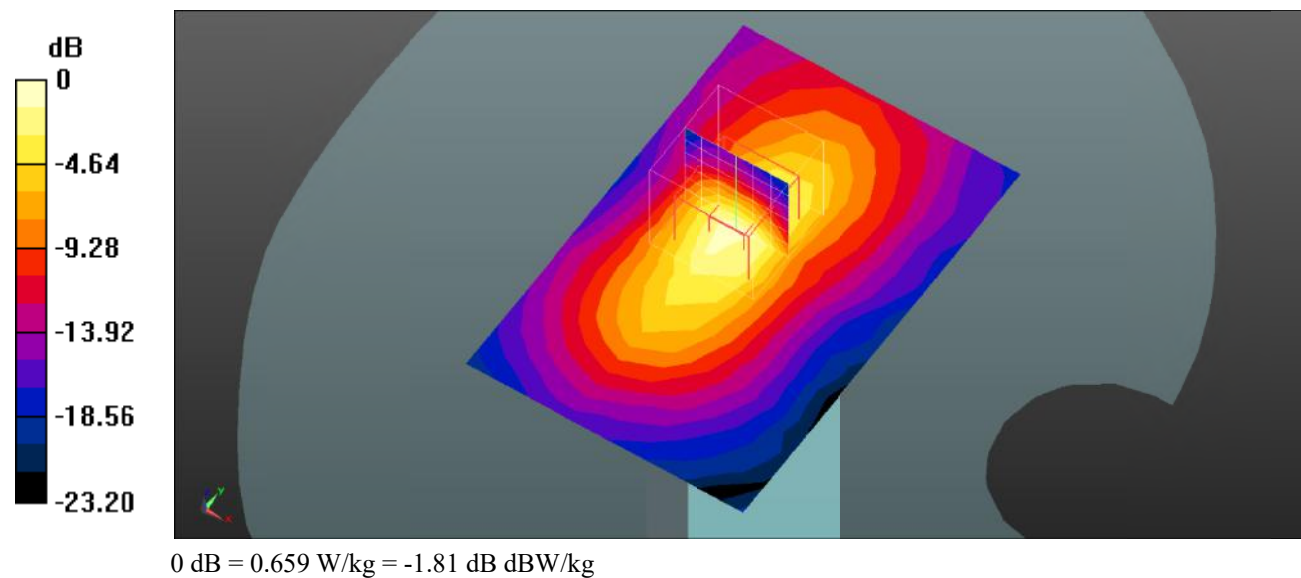

Test Plot 134#: LTE Band 41_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.454$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.485 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.867 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.503 W/kg

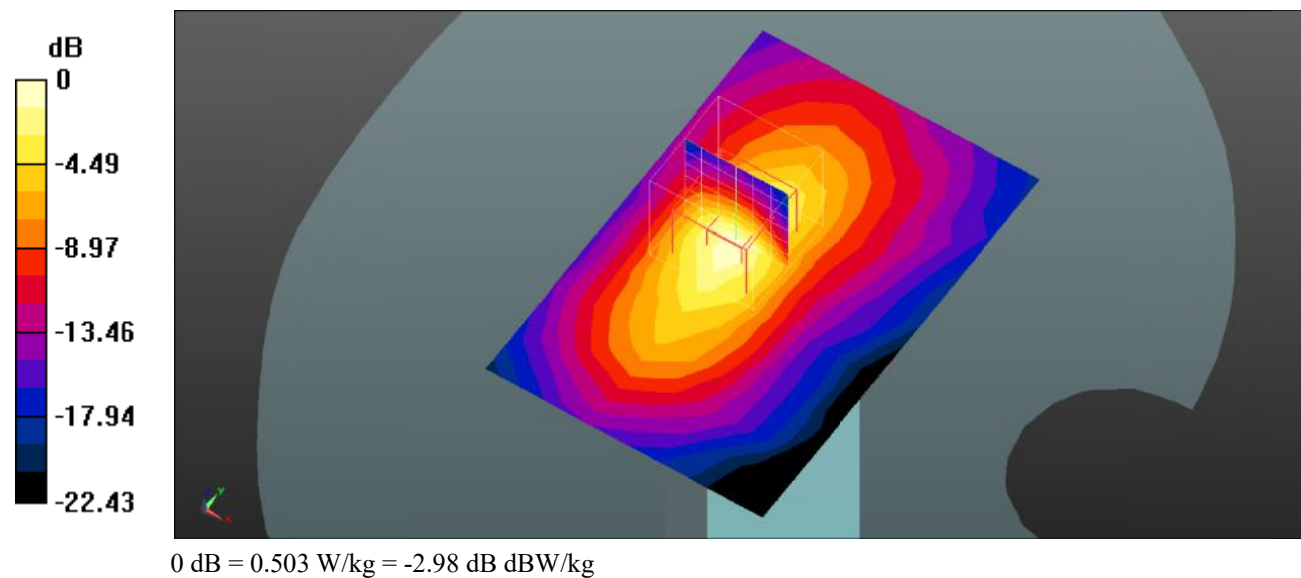

Test Plot 135#: LTE Band 66_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.453 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.33 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 0.543 W/kg

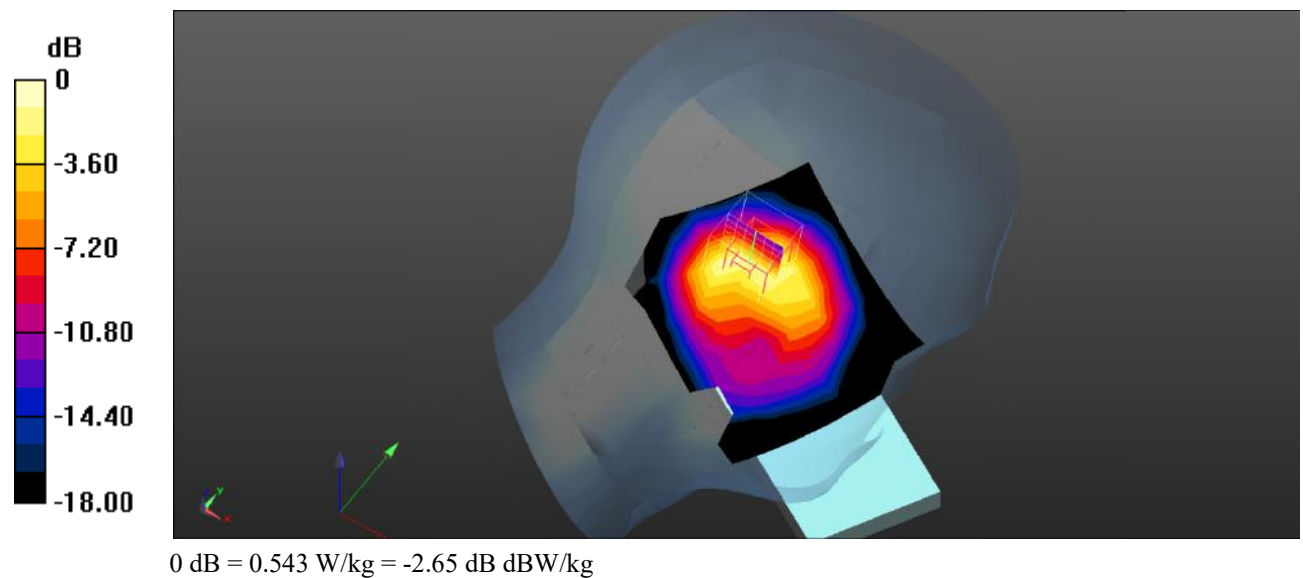

Test Plot 136#: LTE Band 66_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.299 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.530 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.366 W/kg

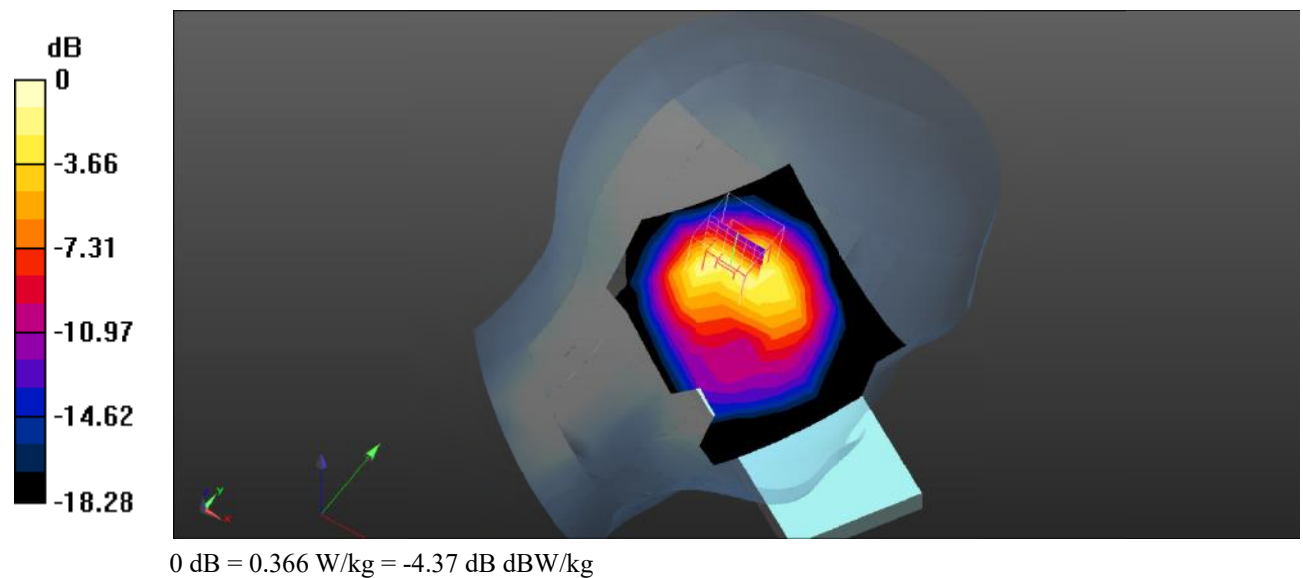

Test Plot 137#: LTE Band 66_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.672 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.77 V/m; Power Drift = -00 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.712 W/kg; SAR(10 g) = 0.369 W/kg

Maximum value of SAR (measured) = 0.798 W/kg

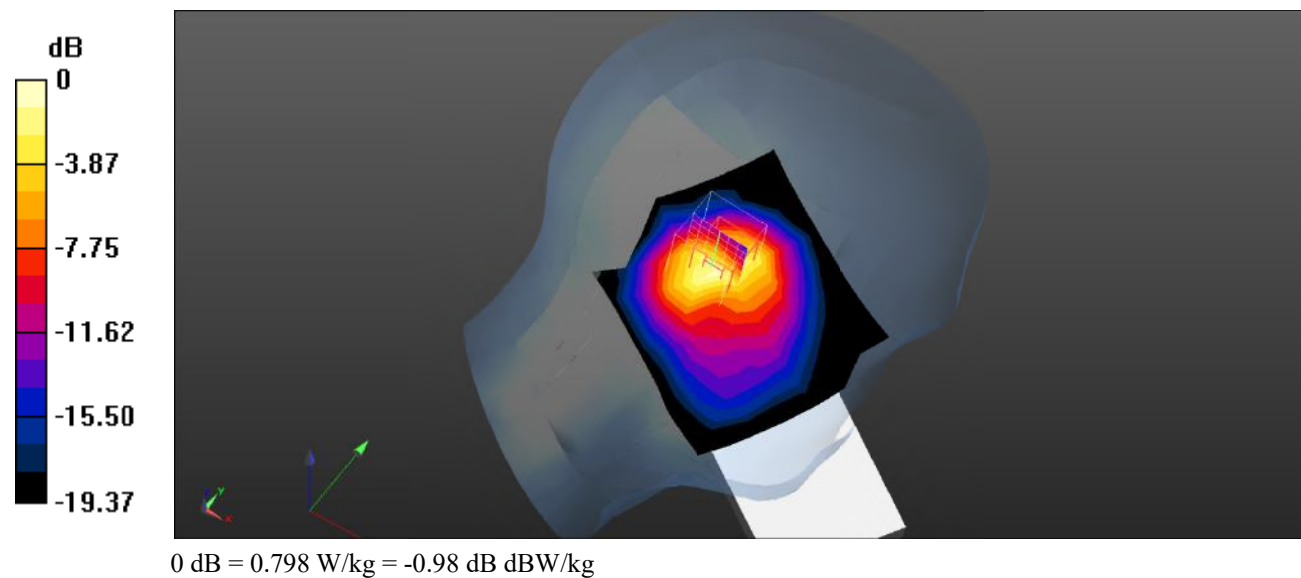

Test Plot 138#: LTE Band 66_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.441 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.32 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.809 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 0.528 W/kg

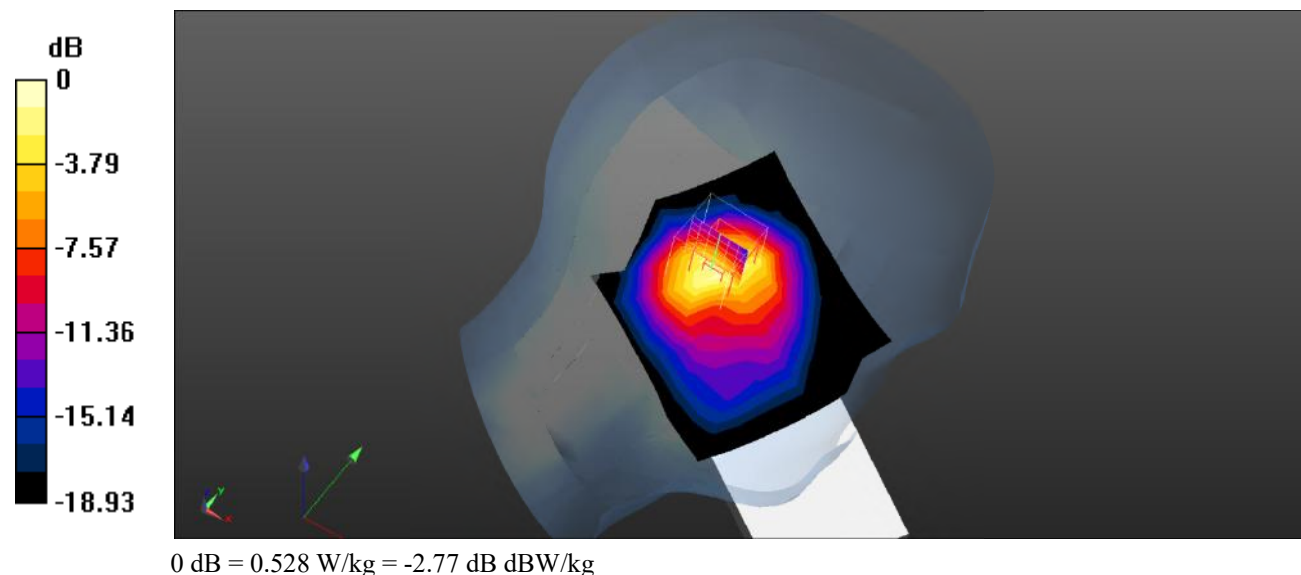

Test Plot 139#: LTE Band 66_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.719 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.29 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.691 W/kg; SAR(10 g) = 0.349 W/kg

Maximum value of SAR (measured) = 0.791 W/kg

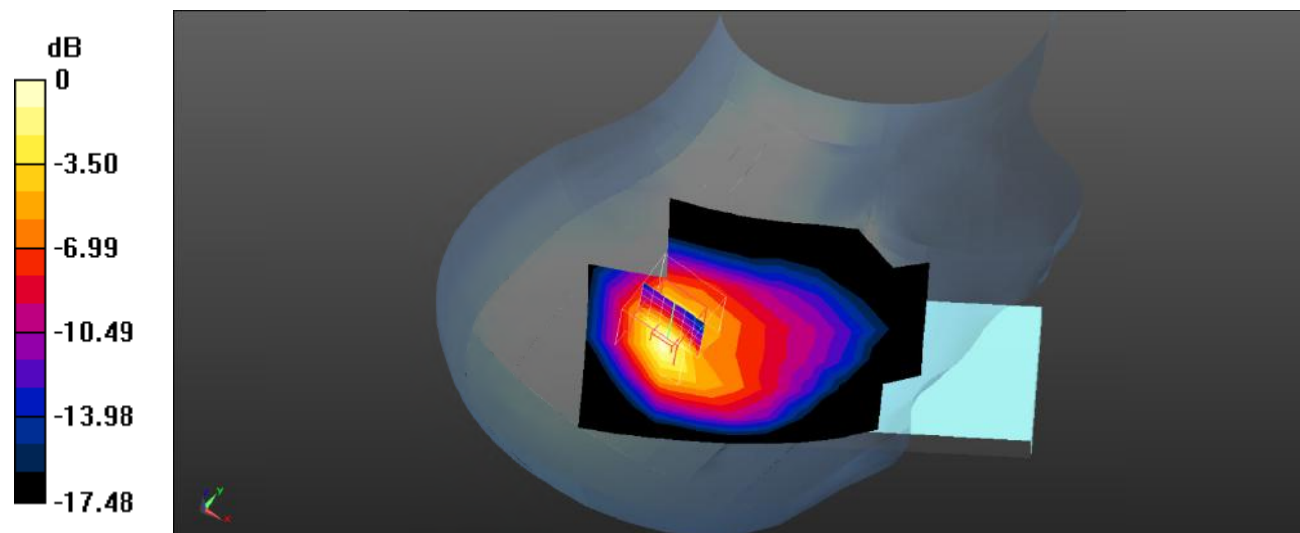

0 dB = 0.791 W/kg = -1.02 dB dBW/kg

Test Plot 140#: LTE Band 66_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.479 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.721 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.848 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.527 W/kg

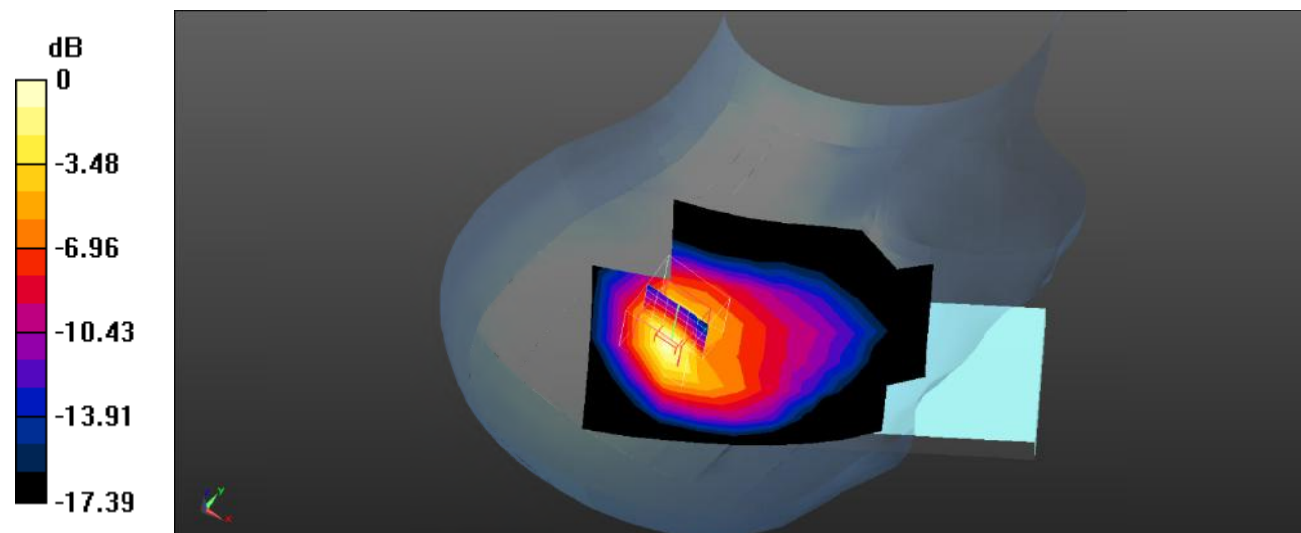

0 dB = 0.527 W/kg = -2.78 dB dBW/kg

Test Plot 141#: LTE Band 66_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.549 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.10 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.757 W/kg; SAR(10 g) = 0.383 W/kg

Maximum value of SAR (measured) = 0.840 W/kg

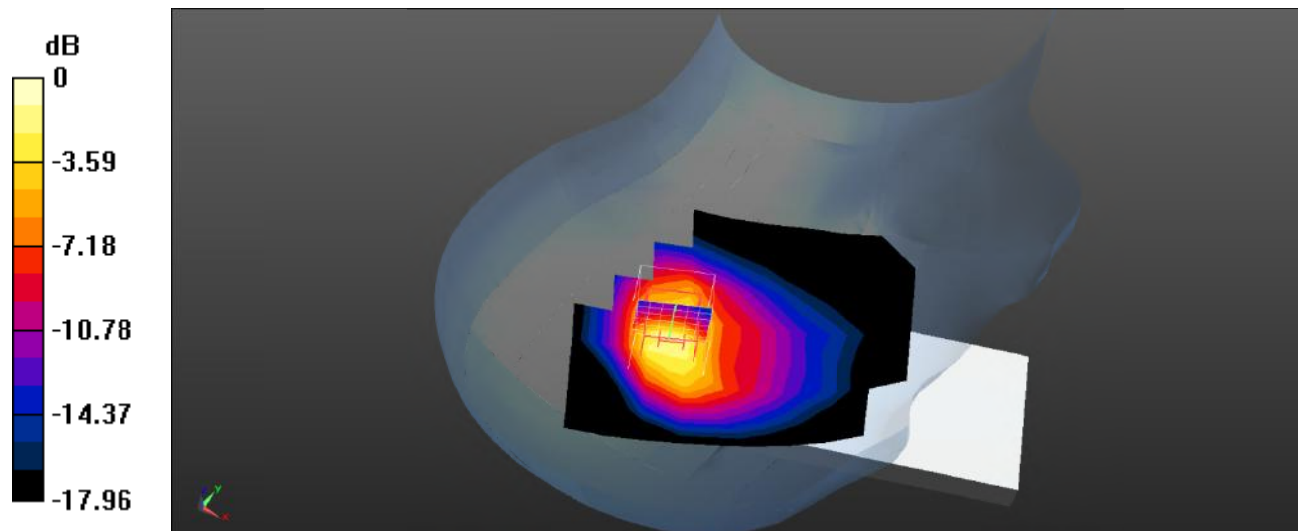

0 dB = 0.840 W/kg = -0.76 dB dBW/kg

Test Plot 142#: LTE Band 66_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.518 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.05 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.598 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.673 W/kg

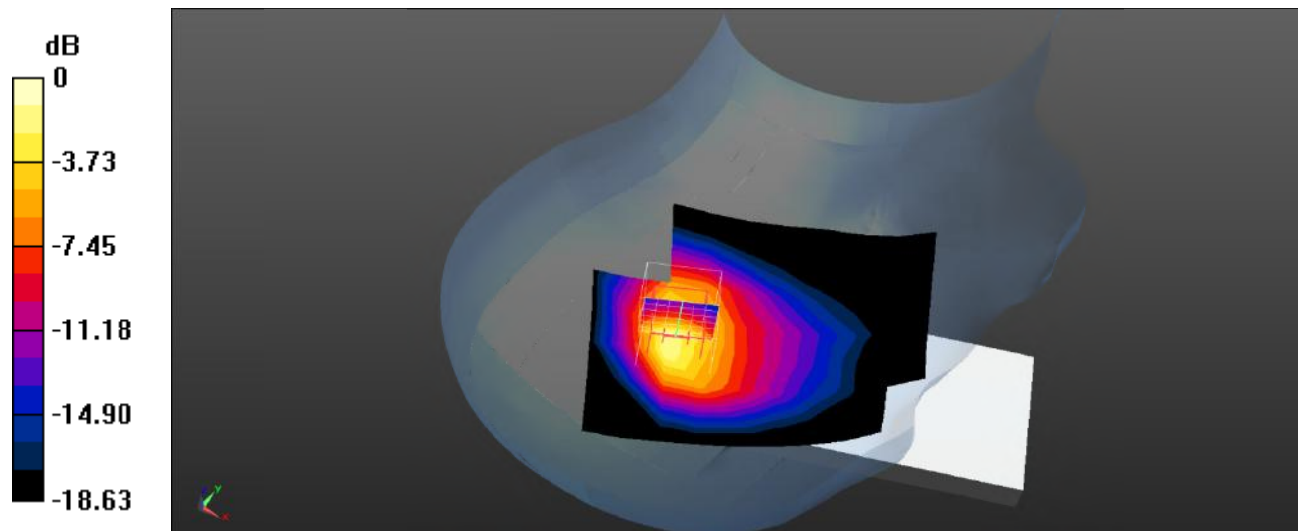

0 dB = 0.673 W/kg = -1.72 dB dBW/kg

Test Plot 143#: LTE Band 66_Body Front_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.185 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.875 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

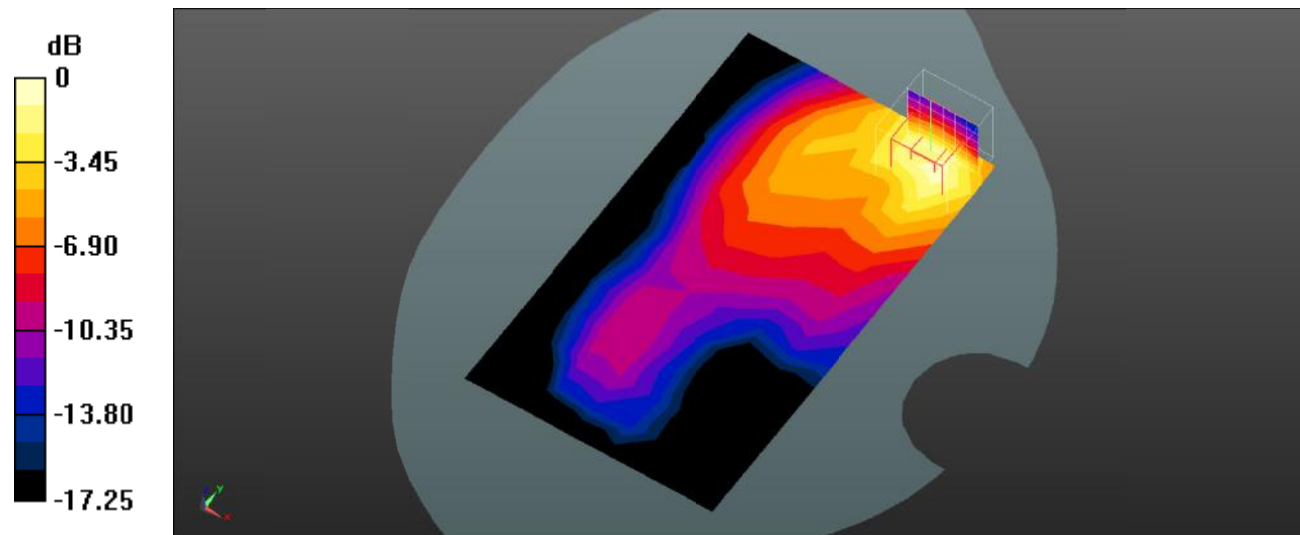

0 dB = 0.203 W/kg = -6.93 dB dBW/kg

Test Plot 144#: LTE Band 66_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.120 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.292 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

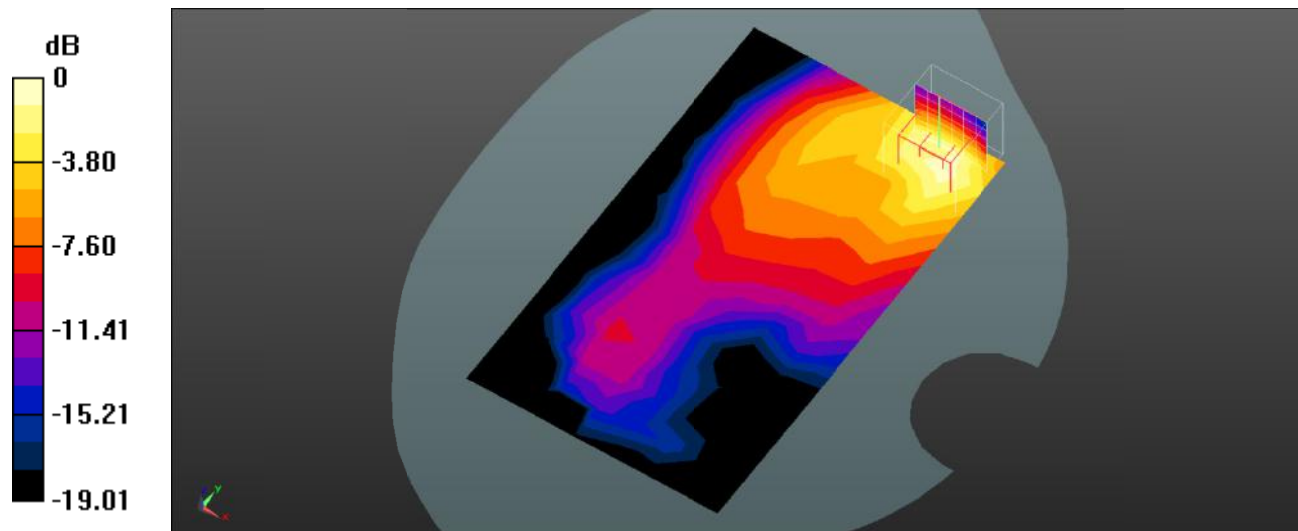

0 dB = 0.130 W/kg = -8.86 dB dBW/kg

Test Plot 145#: LTE Band 66_Body Back_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.320 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.673 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

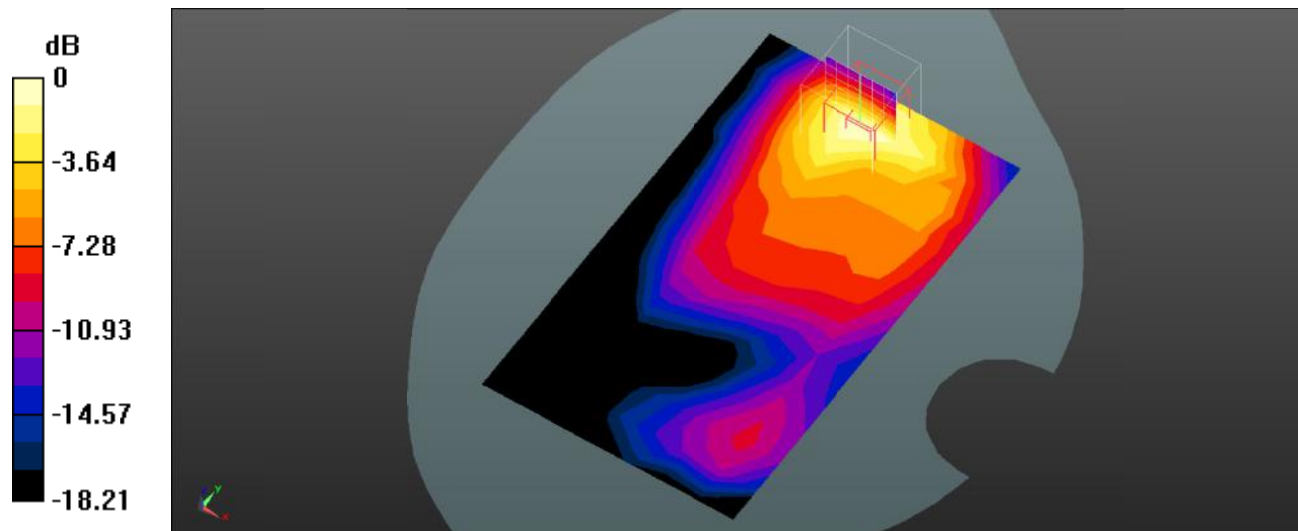

0 dB = 0.323 W/kg = -4.91 dB dBW/kg

Test Plot 146#: LTE Band 66_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.209 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.596 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.210 W/kg

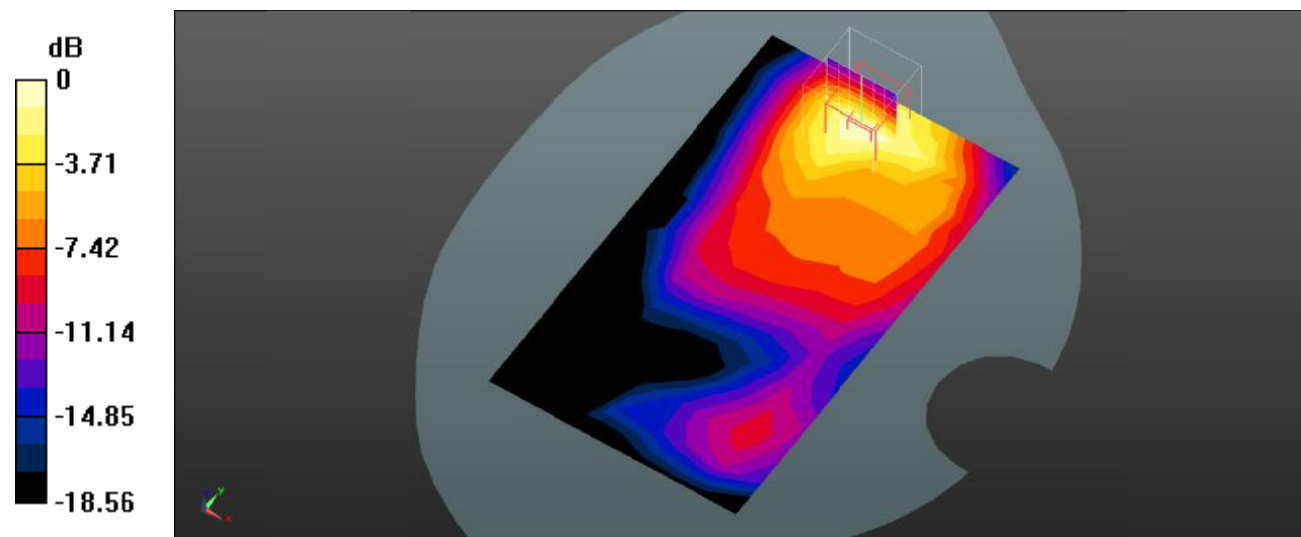

Test Plot 147#: LTE Band 66_Body Right_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0481 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.434 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0680 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0475 W/kg

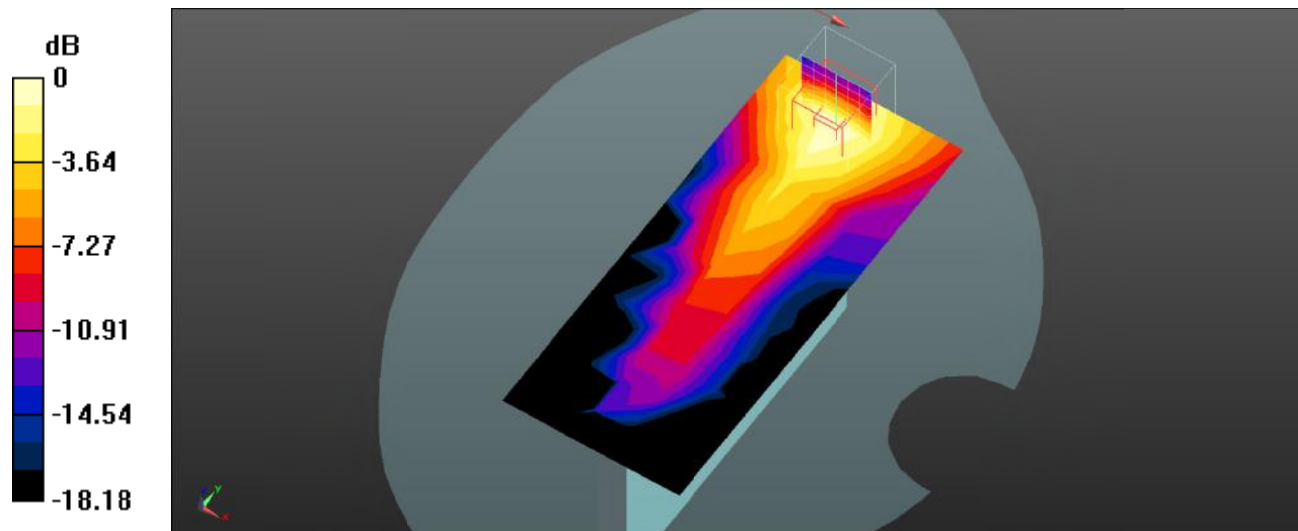

0 dB = 0.0475 W/kg = -13.23 dB dBW/kg

Test Plot 148#: LTE Band 66_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0309 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.803 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0302 W/kg

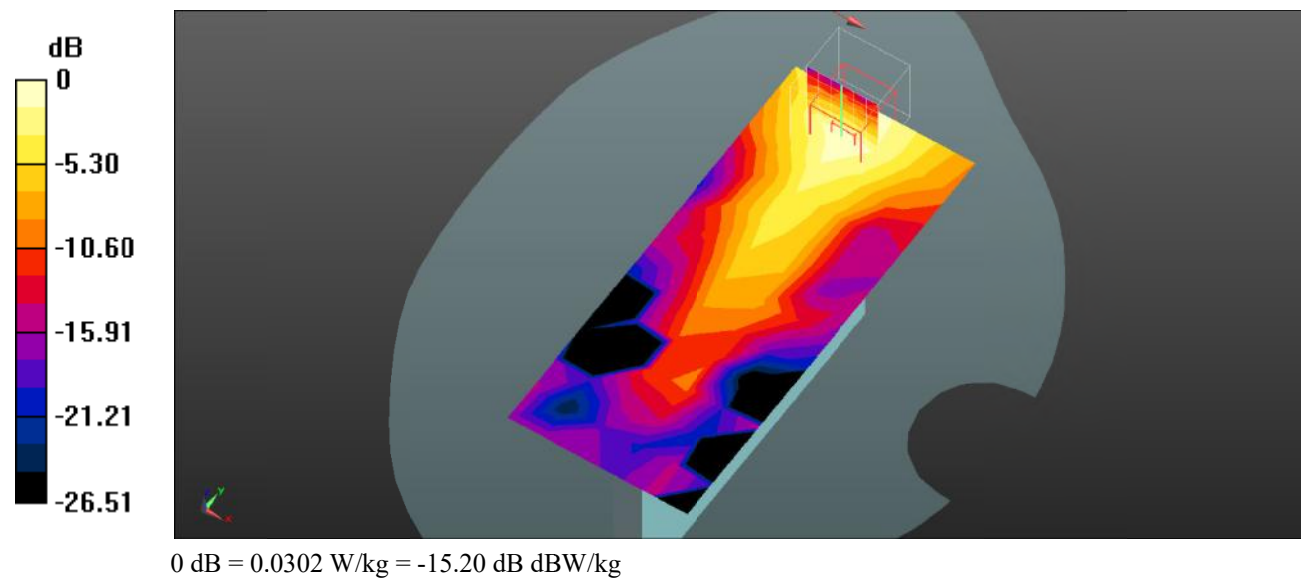

Test Plot 149#: LTE Band 66_Body Top_1RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.404 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.49 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.701 W/kg

SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.493 W/kg

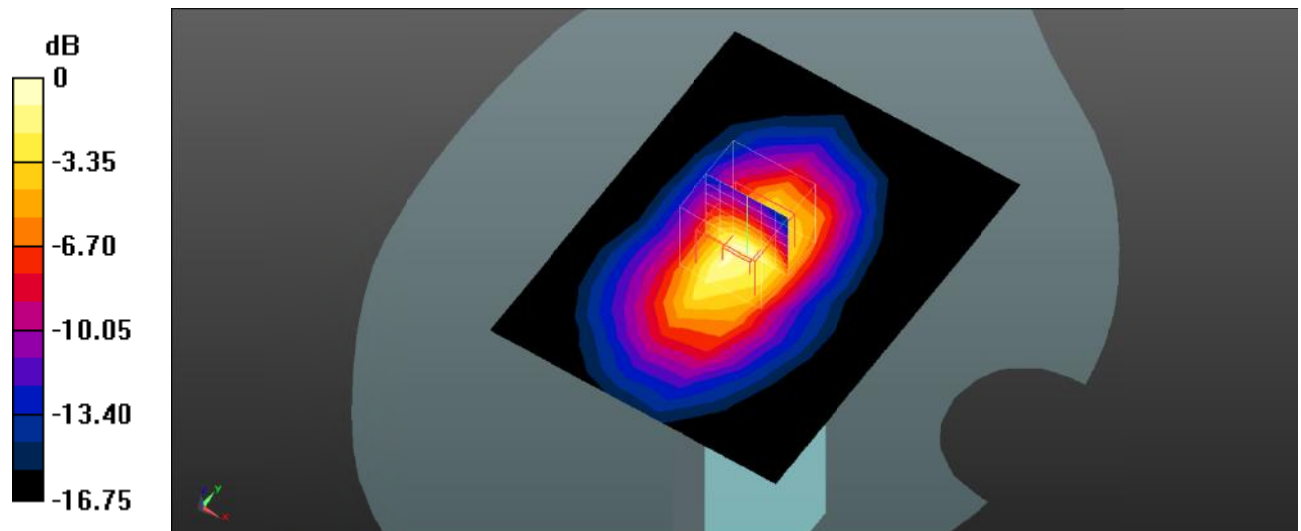

Test Plot 150#: LTE Band 66_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.866$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.12 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.273 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.64 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

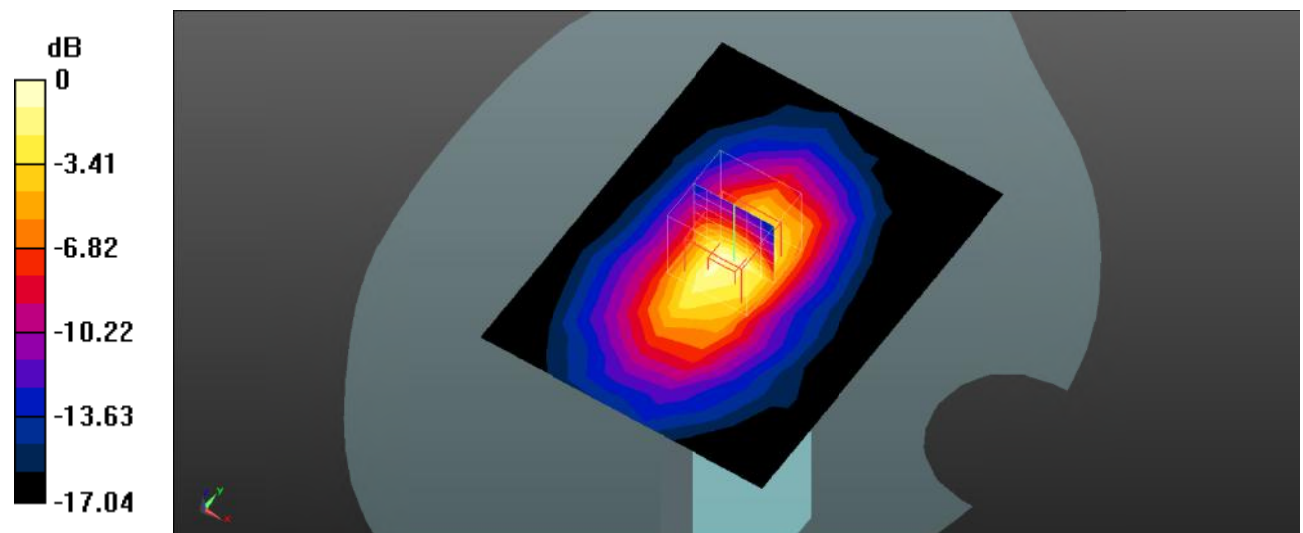

Test Plot 151#: WLAN 802.11b_ Head Left Cheek _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 38.281$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2442 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.141 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.983 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.136 W/kg

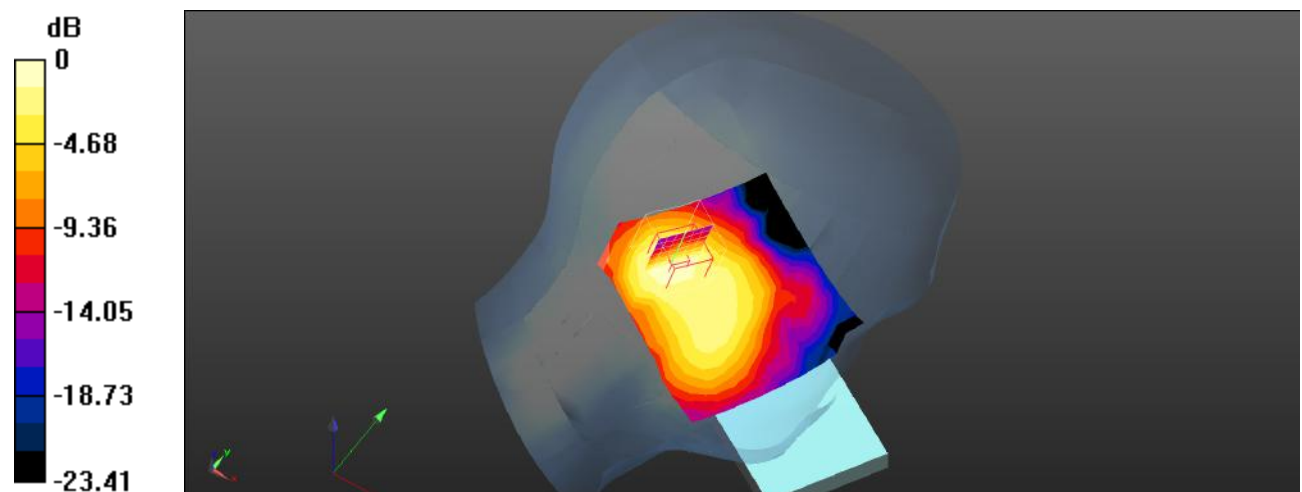

0 dB = 0.136 W/kg = -8.66 dBW/kg

Test Plot 152#: WLAN 802.11b_ Head Left Tilt _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 38.281$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2442 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.278 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.432 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.276 W/kg

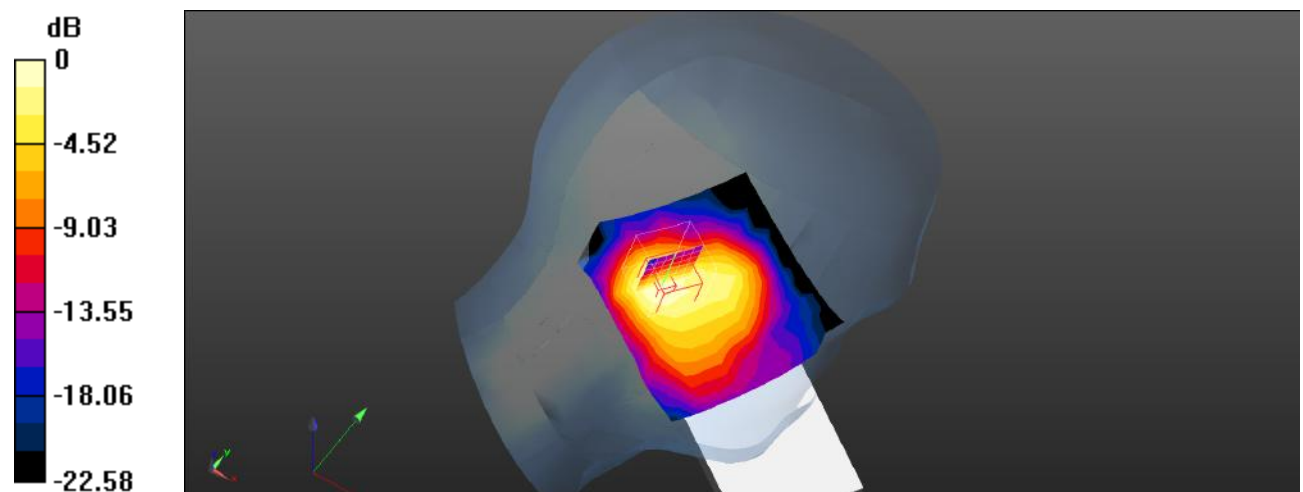

0 dB = 0.276 W/kg = -5.59 dBW/kg

Test Plot 153#: WLAN 802.11b_ Head Right Cheek _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 38.281$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2442 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.313 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.413 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.331 W/kg

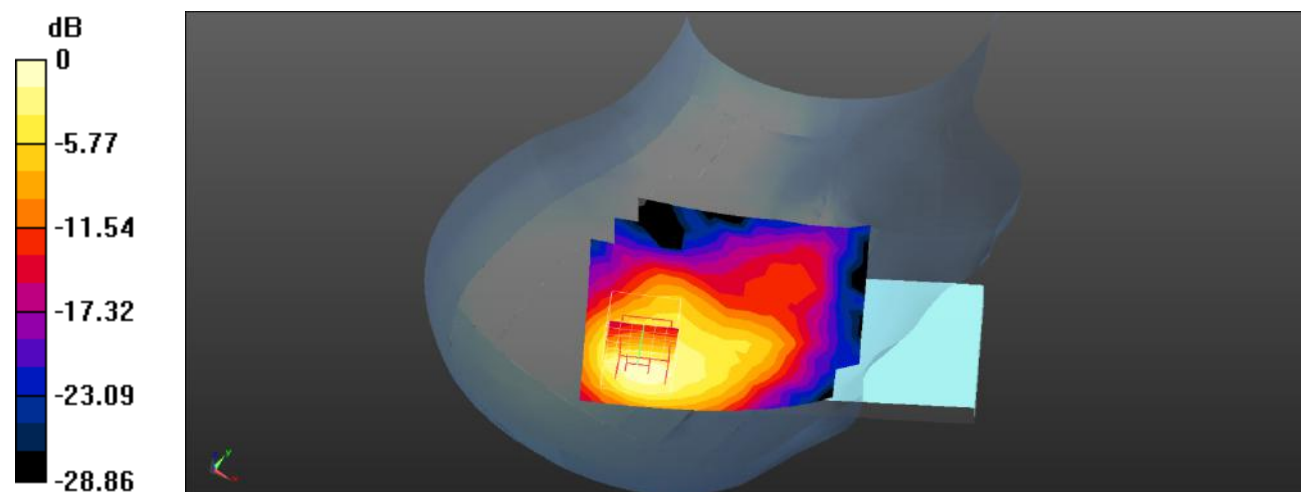

0 dB = 0.331 W/kg = -4.80 dBW/kg

Test Plot 154#: WLAN 802.11b_ Head Right Tilt _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 38.281$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2442 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.528 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.471 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.417 W/kg

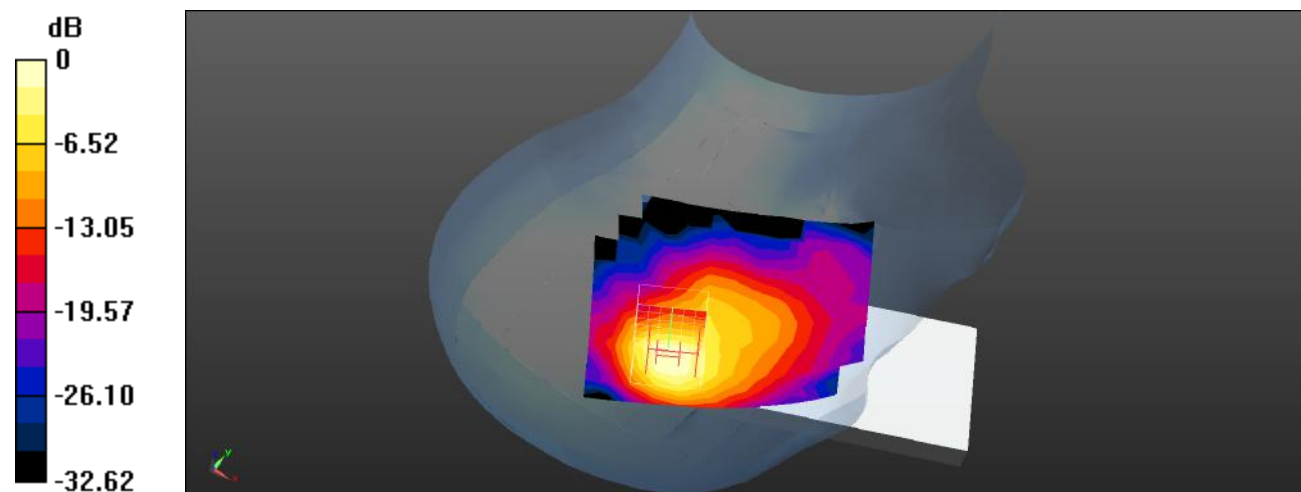

0 dB = 0.617 W/kg = -2.10 dBW/kg

Test Plot 155#: WLAN 802.11b_ Body Front _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 38.281$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2442 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.152 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.200 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.132 W/kg

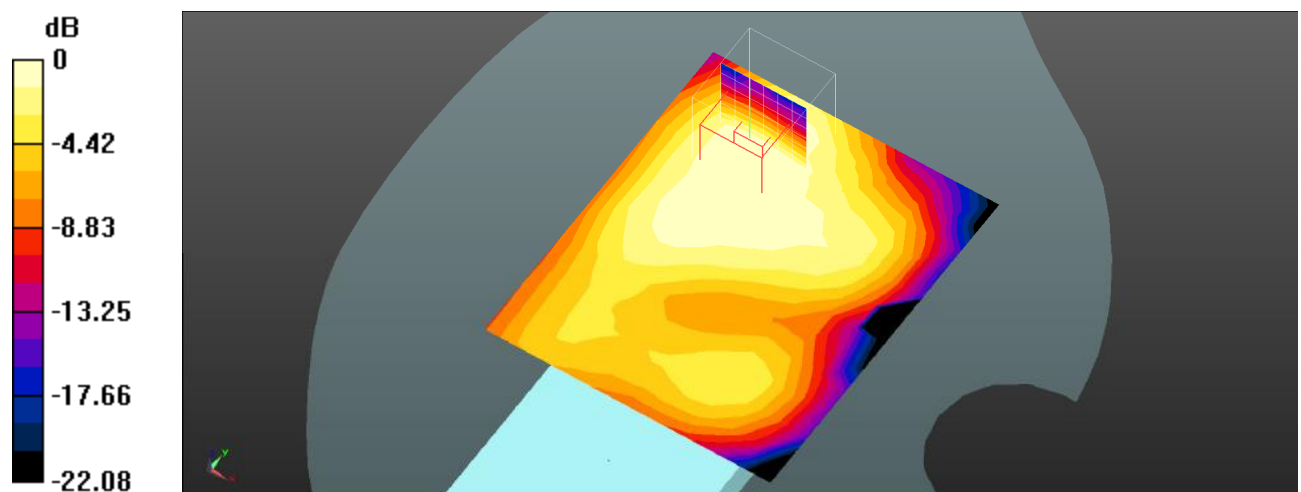

0 dB = 0.132 W/kg = -8.79 dBW/kg

Test Plot 156#: WLAN 802.11b_ Body Back _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 38.281$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2442 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.287 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.869 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.265 W/kg

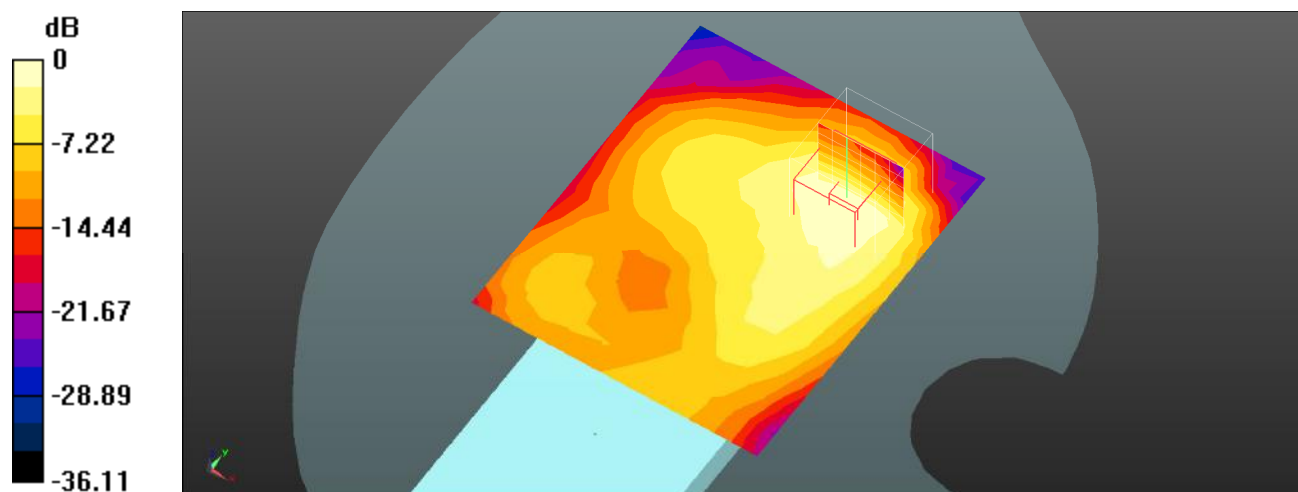

0 dB = 0.265 W/kg = -5.77 dBW/kg

Test Plot 157#: WLAN 802.11b_ Body Left _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 38.281$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2442 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.173 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.116 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.273 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.170 W/kg

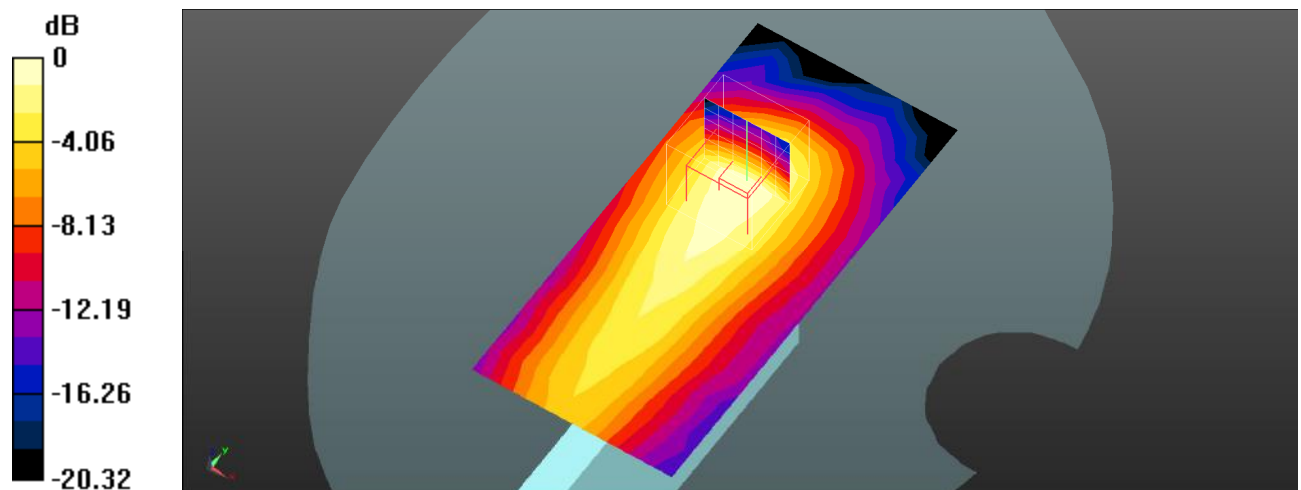

0 dB = 0.170 W/kg = -7.70 dBW/kg

Test Plot 158#: WLAN 802.11b_ Body Top _Middle**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 38.281$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2442 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.151 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.698 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.141 W/kg

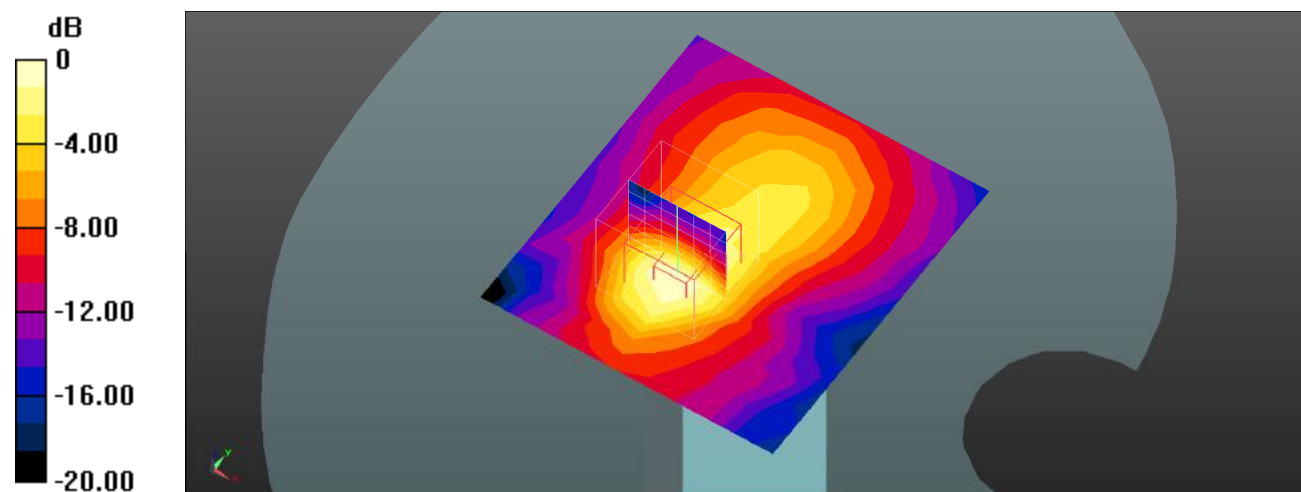

Test Plot 159#: Bluetooth Head Left Cheek _High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30317

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.328$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2480 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0109 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.239 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00502 W/kg

Maximum value of SAR (measured) = 0.0122 W/kg

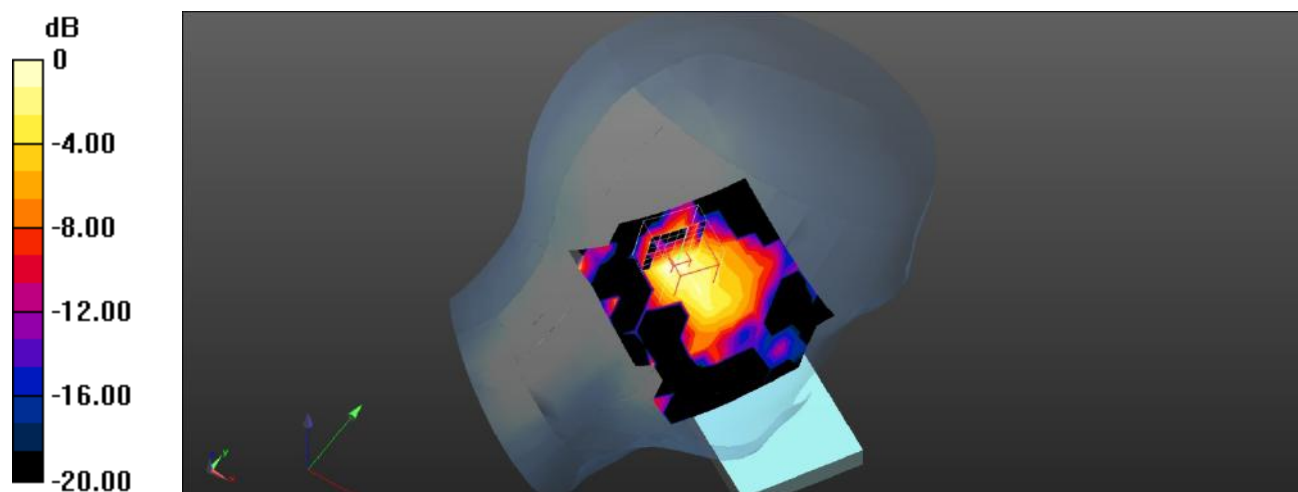

0 dB = 0.0122 W/kg = -19.14 dBW/kg

Test Plot 160#: Bluetooth Head Left Tilt _High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30317

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.328$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2480 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00501 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.1750 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.00570 W/kg

SAR(1 g) = 0.00031 W/kg; SAR(10 g) = 0.00003 W/kg

Maximum value of SAR (measured) = 0.00323 W/kg

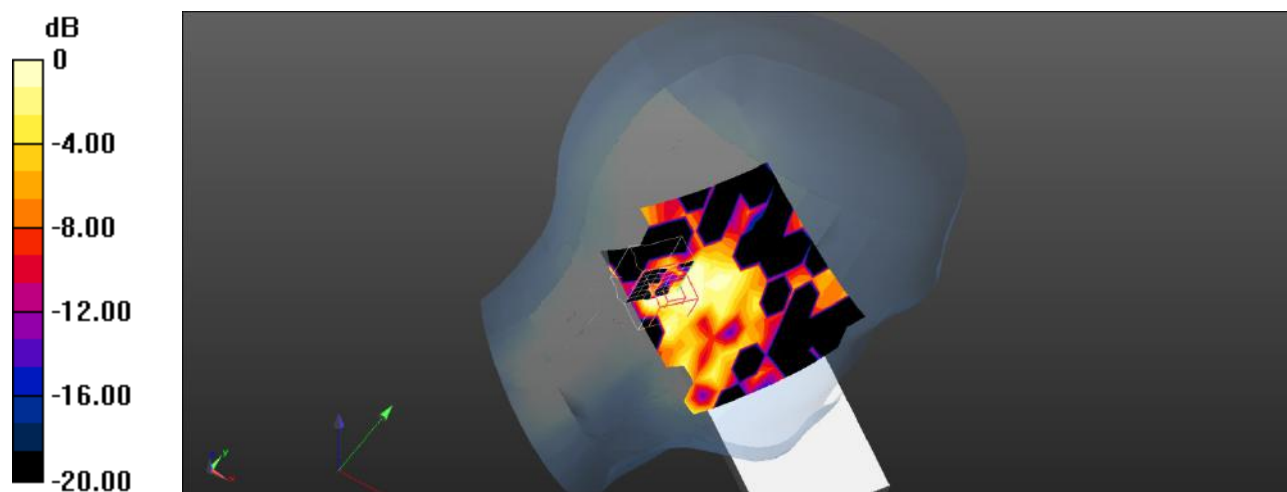

0 dB = 0.00323 W/kg = -24.91 dBW/kg

Test Plot 161#: Bluetooth Head Right Cheek _High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30317

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.328$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2480 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00474 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.4830 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.00456 W/kg; SAR(10 g) = 0.00158 W/kg

Maximum value of SAR (measured) = 0.00542 W/kg

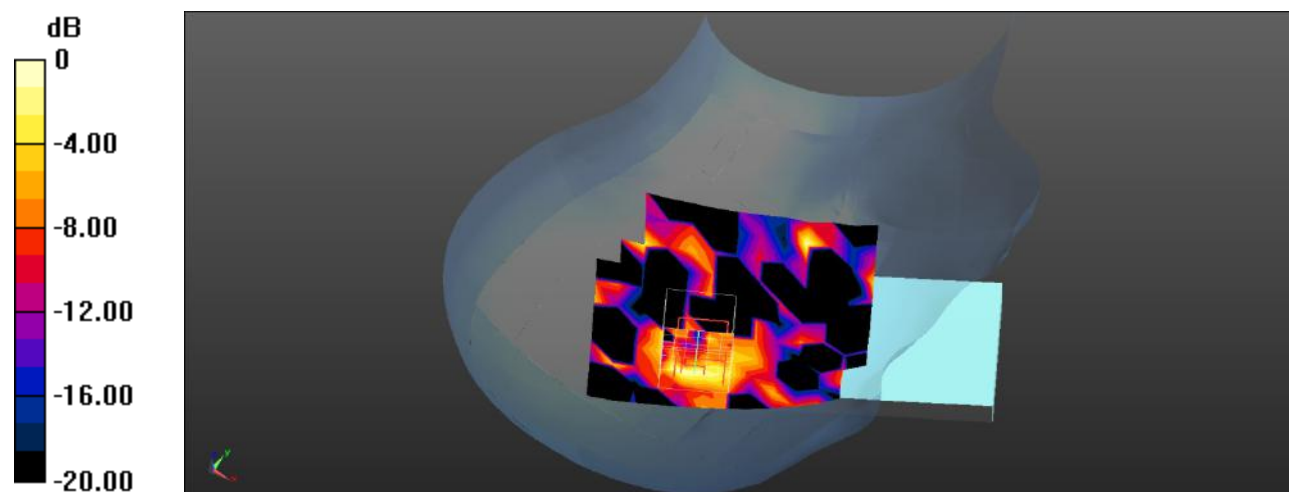

0 dB = 0.00542 W/kg = -22.66 dBW/kg

Test Plot 162#: Bluetooth Head Right Tilt _High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30317

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.328$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2480 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00605 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.7290 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.00728 W/kg; SAR(10 g) = 0.00191 W/kg

Maximum value of SAR (measured) = 0.00789 W/kg

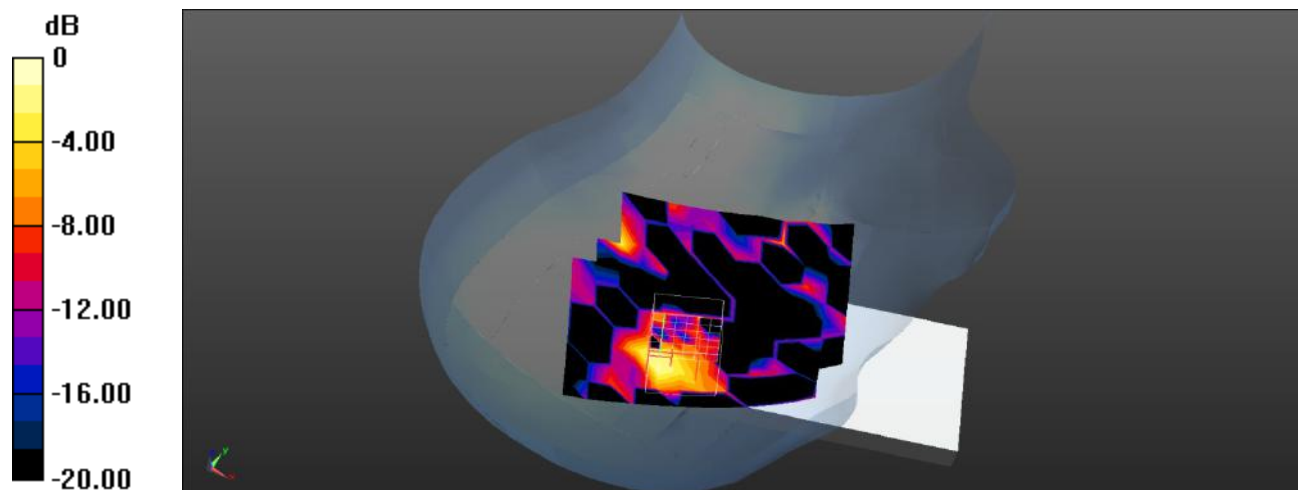

0 dB = 0.00789 W/kg = -21.03 dBW/kg

Test Plot 163#: Bluetooth Body Front _High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30317

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.328$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2480 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00497 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.2660 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.00557 W/kg; SAR(10 g) = 0.00129 W/kg

Maximum value of SAR (measured) = 0.00596 W/kg

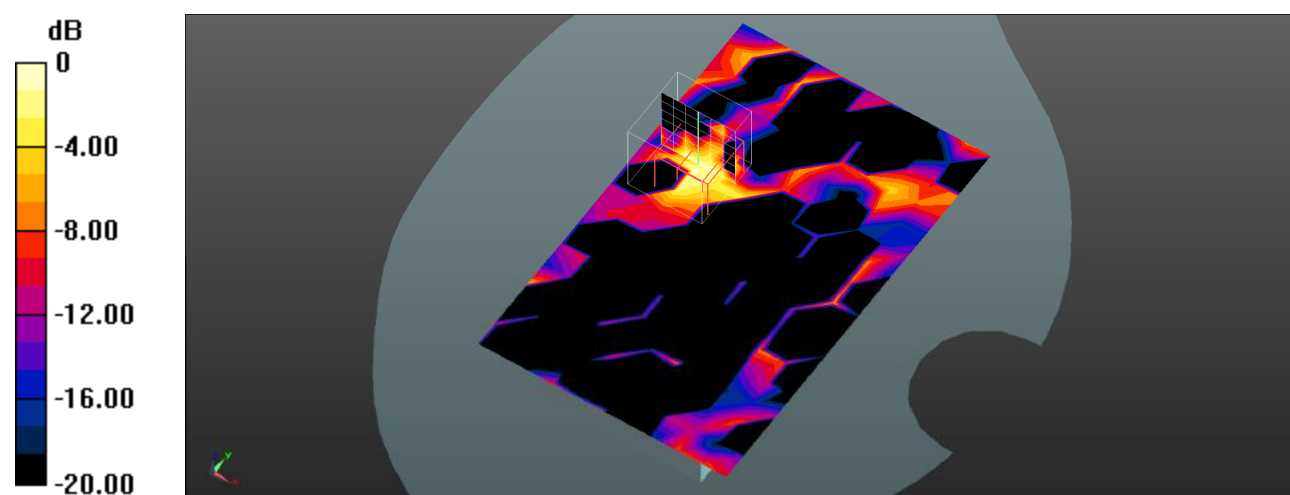

0 dB = 0.00596 W/kg = -22.25 dBW/kg

Test Plot 164#: Bluetooth Body Back _High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30317

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.328$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2480 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0114 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.6980 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0590 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00298 W/kg

Maximum value of SAR (measured) = 0.0113 W/kg

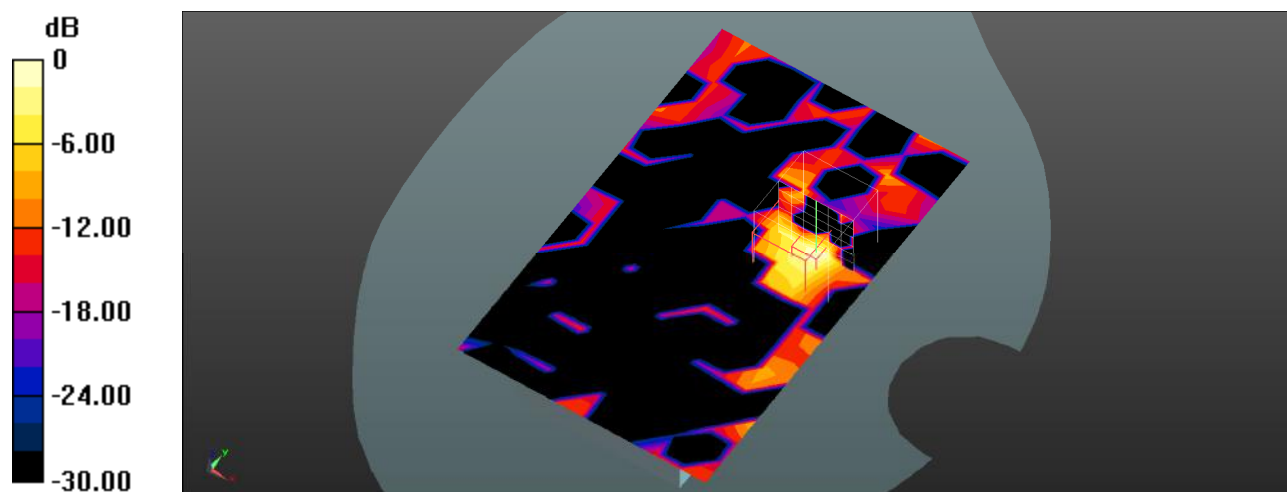

0 dB = 0.0113 W/kg = -19.47 dBW/kg

Test Plot 165#: Bluetooth Body Left _High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30317

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.328$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2480 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00184 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.00194 W/kg

SAR(1 g) = 0.00014 W/kg; SAR(10 g) = 0.00001 W/kg

Maximum value of SAR (measured) = 0.00194 W/kg

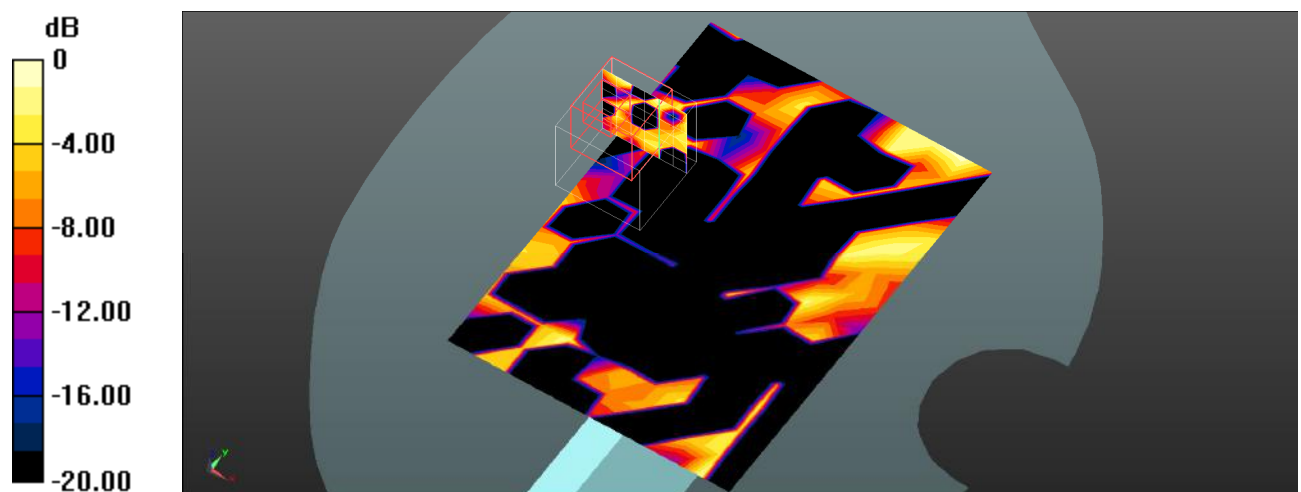

0 dB = 0.00194 W/kg = -27.12 dBW/kg

Test Plot 166#: Bluetooth Body Top _High**DUT: Mobile Phone; Type: S661LP; Serial: RA221026-49391E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30317

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.328$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2480 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0121 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.00961 W/kg; SAR(10 g) = 0.00194 W/kg

Maximum value of SAR (measured) = 0.0117 W/kg

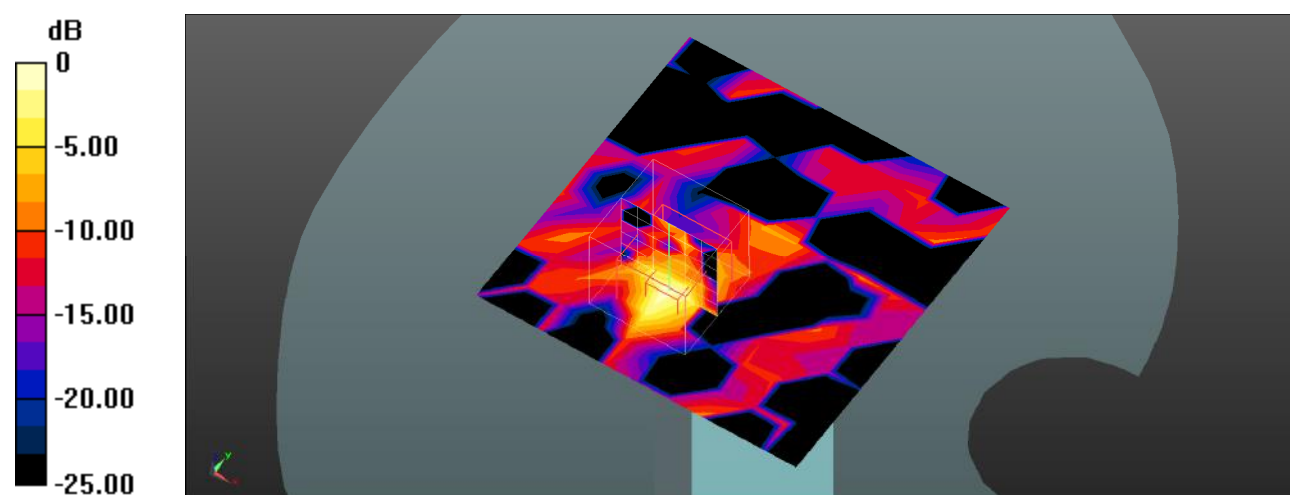

0 dB = 0.0117 W/kg = -19.32 dBW/kg