




FCC CO-LOCATION RADIO TEST REPORT

FCC ID : 2AJN7-TP00170AL
Equipment : Notebook Computer
Brand Name : Lenovo
Model Name : TP00170A
Applicant : LC Future Center Limited Taiwan Branch
7F., No.780, Beian Rd., Zhongshan Dist., Taipei 104, Taiwan
Manufacturer : Lenovo Ireland International Limited
Viscount House, 6/7 Fitzwilliam Square East, Dublin, D02
Y447, Ireland
Standard : FCC 47 CFR Part 2, 22(H), 27

Equipment: Rolling Wireless RW220-GL tested inside of Lenovo Notebook Computer.

The product was received on Dec. 09, 2025 and testing was performed from Feb. 09, 2026 to Feb. 10, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	7
2.3 Support Unit used in test configuration and system	8
2.4 Frequency List of Low/Middle/High Channels	8
3 Radiated Test Items	9
3.1 Measuring Instruments	9
3.2 Radiated Spurious Emission Measurement	11
4 List of Measuring Equipment.....	12
5 Measurement Uncertainty	13
Appendix A. Test Results of Radiated Test	
Appendix B. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG5D0919-01K	01	Initial issue of report	Feb. 23, 2026
FG5D0919-01K	02	Revise section 2.1 and section 2.4. This report is an updated version, replacing the report issued on Feb. 23, 2026.	Mar. 03, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1053 §22.917 (a) §27.53 (g)	Radiated Spurious Emission (Band 12) (Band 26)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo

Report Producer: Freda Wu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	TP00170A
Sample 1	AWAN Antenna
Sample 2	Amphenol Antenna
Integrated WLAN Module	Brand Name: Intel Model Name: BE211D2W FCC ID: PD9BE211D2
Integrated NFC Module	Brand Name: Foxconn Model Name: T77H747 FCC ID: MCLT77H747
EUT supports Radios application	WCDMA/HSPA/LTE/GNSS/NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 WLAN 11be EHT20/ EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer.
2. Equipment: Rolling Wireless RW220-GL tested inside of Lenovo Notebook Computer.

WWAN Antenna Information for Host				
Main Antenna	Manufacturer	Amphenol	Peak gain (dBi)	LTE Band 12 : -1.66 LTE Band 26 : -0.38
	Part number	SA31Q71821	Type	PIFA
	Manufacturer	AWAN	Peak gain (dBi)	LTE Band 12 : -1.86 LTE Band 26 : -0.33
	Part number	SA31Q71822	Type	PIFA

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

Support band and evaluated information	
Supported band	B5, B12, B26
Evaluated and Tested band	B12, B26
Main Antenna	B12, B26

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	LTE Band 12: 699 MHz ~ 716MHz LTE Band 26 (Part22H): 824 MHz ~ 849 MHz
Rx Frequency	LTE Band 12: 729 MHz ~ 746MHz LTE Band 26 (Part22H): 869 MHz ~ 894 MHz
Bandwidth	LTE Band 12: 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 26: 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz
Type of Modulation	QPSK / 16QAM

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Test Site No.	Sporton Site No.
	03CH12-HY
Test Engineer	Tim Lee, Wilson Wu and Gerry Wei
Temperature (°C)	20~25
Relative Humidity (%)	50~60

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW3786

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, 22(H), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in Notebook Type, and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures. Only the worst case emissions were reported in this report.

Ant	Mode	Band	Test Mode			
			Bandwidth	Modulation	RB Size	Channel
Main	Mode 1	LTE Band 26 + WLAN (2.4GHz)_11be EHT20_Ch07_Ant 1+2	BW 15M	QPSK	1RB0	M
Main	Mode 2	LTE Band 12 + WLAN (5GHz)_11n HT20_Ch149_Ant 1+2	BW 10M	QPSK	1RB0	M
Main	Mode 3	LTE Band 26 + WLAN (5GHz)_11be EHT80_Ch171_Ant 1+2	BW 15M	QPSK	1RB0	M
Main	Mode 4	LTE Band 12 + WLAN (6GHz)_11be EHT40_Ch91_Ant 1+2	BW 10M	QPSK	1RB0	M

2.2 Connection Diagram of Test System

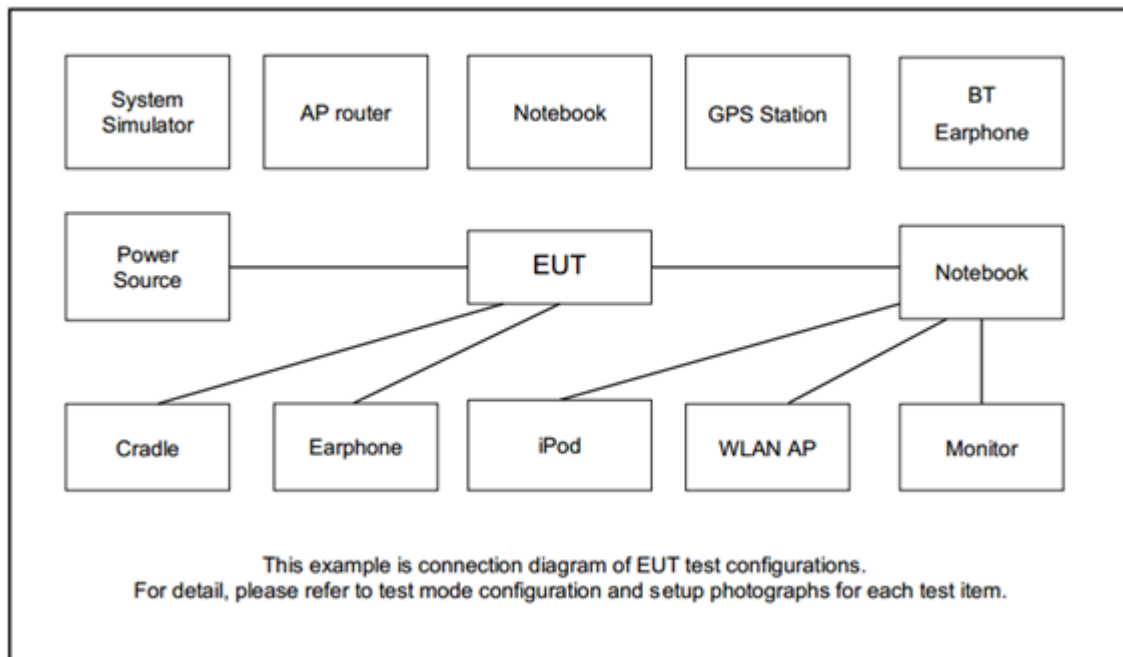

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	Earphone	Apple	N/A	N/A	Unshielded, 1.0 m	N/A

2.4 Frequency List of Low/Middle/High Channels

LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
LTE Band 26 Channel and Frequency List (Part22H)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	26865	26915	26965
	Frequency	831.5	836.5	841.5


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


For radiated test below 30MHz

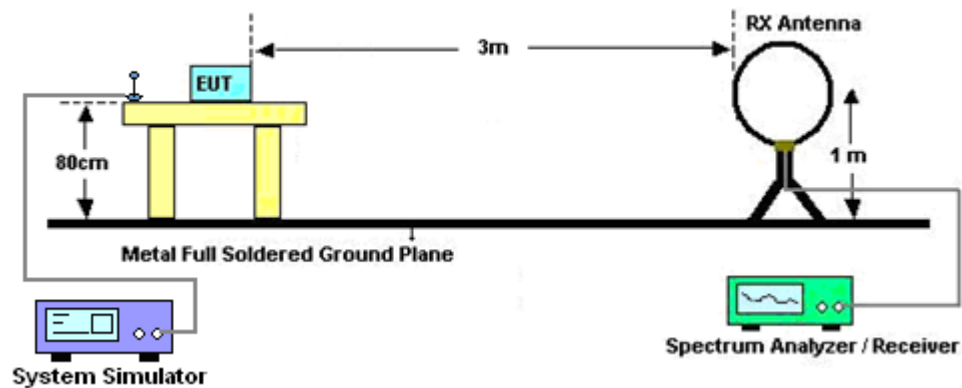

For radiated test from 30MHz to 1GHz

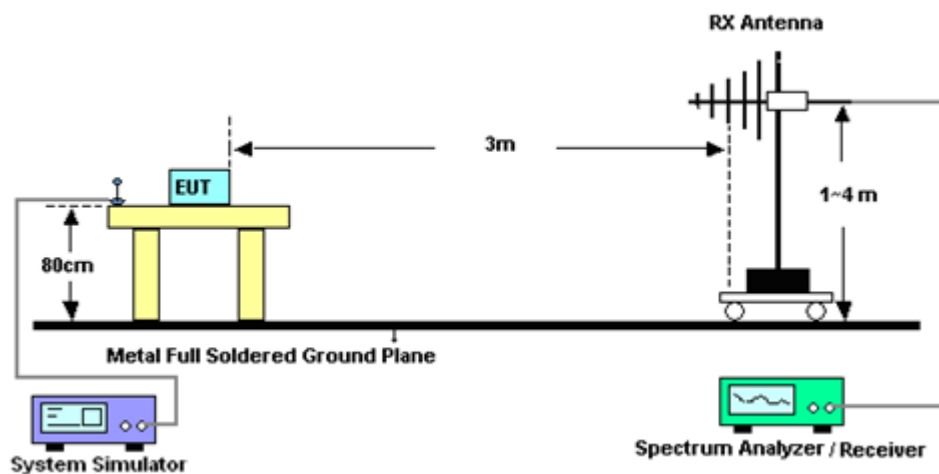

For radiated test above 1GHz

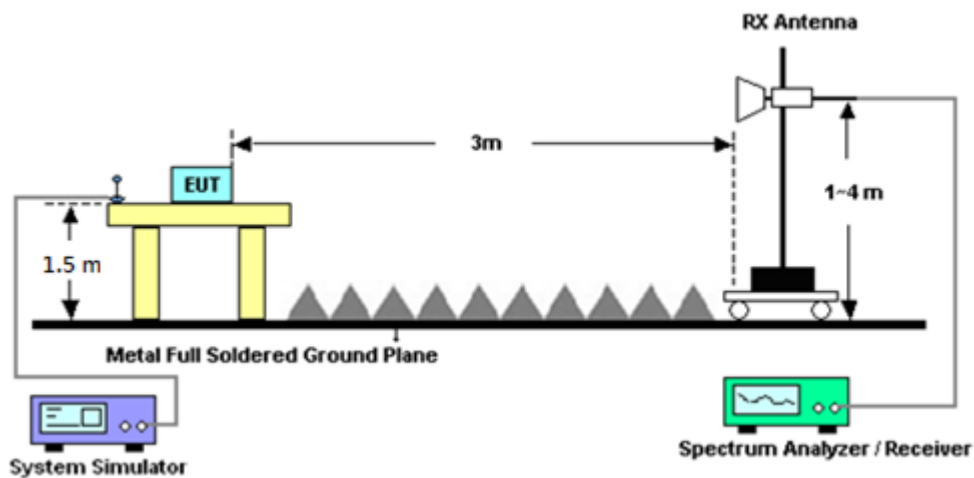

3.1.2 Test Result of Radiated Test

Please refer to Appendix A.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.2 Radiated Spurious Emission Measurement

3.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7.
$$\text{Field Strength Level (dBm)} = \text{Spectrum Reading (dBm)} + \text{Antenna Factor} + \text{Cable Loss} + \text{Read Level} - \text{Preamp Factor}.$$
8.
$$\text{ERP (dBm)} = \text{EIRP (dBm)} - 2.15$$
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 06, 2025	Feb. 09, 2026~ Feb. 10, 2026	Mar. 05, 2026	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Nov. 26, 2025	Feb. 09, 2026~ Feb. 10, 2026	Nov. 25, 2026	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02114	1GHz~18GHz	Jul. 02, 2025	Feb. 09, 2026~ Feb. 10, 2026	Jul. 01, 2026	Radiation (03CH12-HY)
Amplifier	EMCI	EMC051845SE	980729	1-18GHz	Dec. 17, 2025	Feb. 09, 2026~ Feb. 10, 2026	Dec. 16, 2026	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Sep. 09, 2025	Feb. 09, 2026~ Feb. 10, 2026	Sep. 08, 2026	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	Feb. 06, 2026	Feb. 09, 2026~ Feb. 10, 2026	Feb. 05, 2027	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX12-900-100 0-15000-60SS	SN11	1GHz High Pass Filter	Mar. 12, 2025	Feb. 09, 2026~ Feb. 10, 2026	Mar. 11, 2026	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803955/2	30MHz~40GHz	Oct. 31, 2025	Feb. 09, 2026~ Feb. 10, 2026	Oct. 30, 2026	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Oct. 31, 2025	Feb. 09, 2026~ Feb. 10, 2026	Oct. 30, 2026	Radiation (03CH12-HY)
RF Cable	EMCI	EMC101Y-KM-K M-1000	240905	30MHz~40GHz	Oct. 31, 2025	Feb. 09, 2026~ Feb. 10, 2026	Oct. 30, 2026	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLEX 104	EC-A5-300-5 757,805935/ 4	9kHz~30MHz	Oct. 01, 2025	Feb. 09, 2026~ Feb. 10, 2026	Sep. 30, 2026	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP210090	N/A	Aug. 26, 2025	Feb. 09, 2026~ Feb. 10, 2026	Aug. 25, 2026	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 09, 2026~ Feb. 10, 2026	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Feb. 09, 2026~ Feb. 10, 2026	N/A	Radiation (03CH12-HY)
Radio Communicatio n Analyzer	Anritsu	MT8821C	6272278353	LTE FDD/TDD DLCA/ULCA	Oct. 28, 2025	Feb. 09, 2026~ Feb. 10, 2026	Oct. 27, 2026	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Feb. 09, 2026~ Feb. 10, 2026	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Feb. 09, 2026~ Feb. 10, 2026	N/A	Radiation (03CH12-HY)

5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	6.50 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.60 dB
--	---------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.70 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.90 dB
--	---------



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Tim Lee, Wilson Wu and Gerry Wei	Relative Humidity(%):	50~60%
		Temperature(°C):	20~25°C

A1. Summary of each worse mode

Mode	Part	Band	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	Part 22H	LTE B26	M	2490	-48.40	RMS	28.00	-27.15	0.21	-95.23	45.77	-13.00	-35.40	V	Main
3	Part 22H	LTE B26	M	2490	-50.48	RMS	28.00	-27.15	0.21	-95.23	43.69	-13.00	-37.48	V	Main
2	Part 27H	LTE B12	M	2109	-40.91	RMS	27.59	-27.58	0.18	-95.23	53.97	-13.00	-27.91	V	Main
4	Part 27H	LTE B12	M	2109	-40.5	RMS	27.59	-27.58	0.34	-95.23	54.38	-13.00	-27.5	H	Main




Ant. Main

Part 22H Mode 1


LTE B26 15M Ch26915 1RB0 QPSK

M

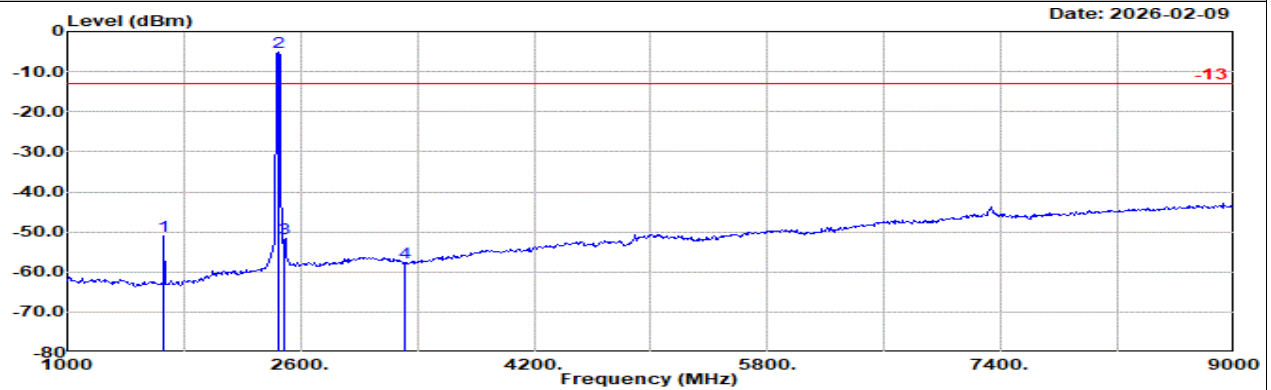

Site : 03CH12-HY
Condition: -13 3m 9120D-02114-250702 Horizontal
: NR Band 26 15M Ch26915 1RB1 BPSK
: WLAN 2.4G_11be20_Ch07_MIMO
: #2 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1660.00	-51.14	RMS	25.50	-29.39	0.40	-95.23	47.58	-13.00	-38.14	Horizontal
2	2448.00	-5.21	RMS	27.68	-27.26	0.23	-95.23	89.37	-13.00	7.79	Horizontal
3	2490.00	-51.51	RMS	28.00	-27.15	0.21	-95.23	42.66	-13.00	-38.51	Horizontal
4	3319.00	-57.63	RMS	29.70	-26.03	0.22	-95.23	33.71	-13.00	-44.63	Horizontal

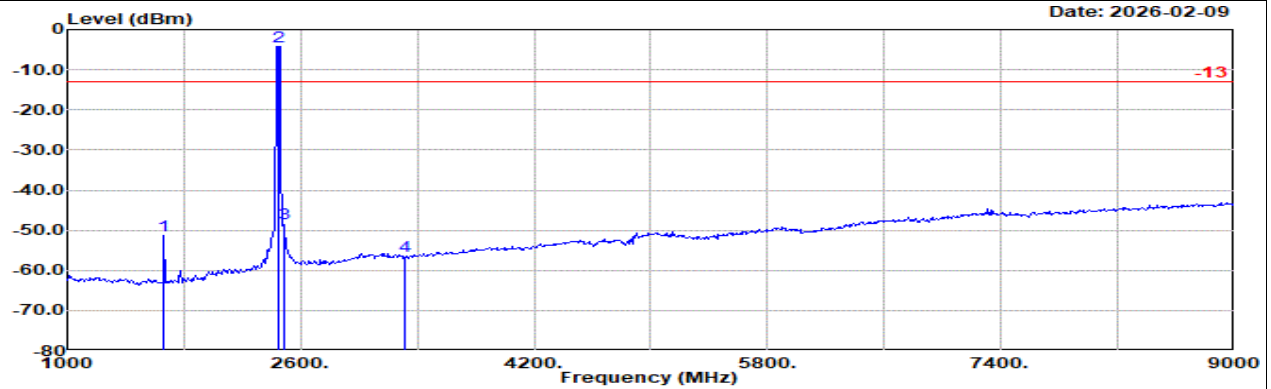

Site : 03CH12-HY
Condition: -13 3m 9120D-02114-250702 Vertical
: NR Band 26 15M Ch26915 1RB1 BPSK
: WLAN 2.4G_11be20_Ch07_MIMO
: #2 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dBuV	dBm	dB	
1	1660.00	-51.27	RMS		25.50	-29.39	0.40	-95.23	47.45	-13.00	-38.27 Vertical
2	2448.00	-4.14	RMS		27.68	-27.26	0.23	-95.23	90.44	-13.00	8.86 Vertical
3	2490.00	-48.40	RMS		28.00	-27.15	0.21	-95.23	45.77	-13.00	-35.40 Vertical
4	3319.00	-56.48	RMS		29.70	-26.03	0.22	-95.23	34.86	-13.00	-43.48 Vertical




Ant. Main

Part 22H Mode 3


LTE B26 15M Ch26915 1RB0 QPSK

M

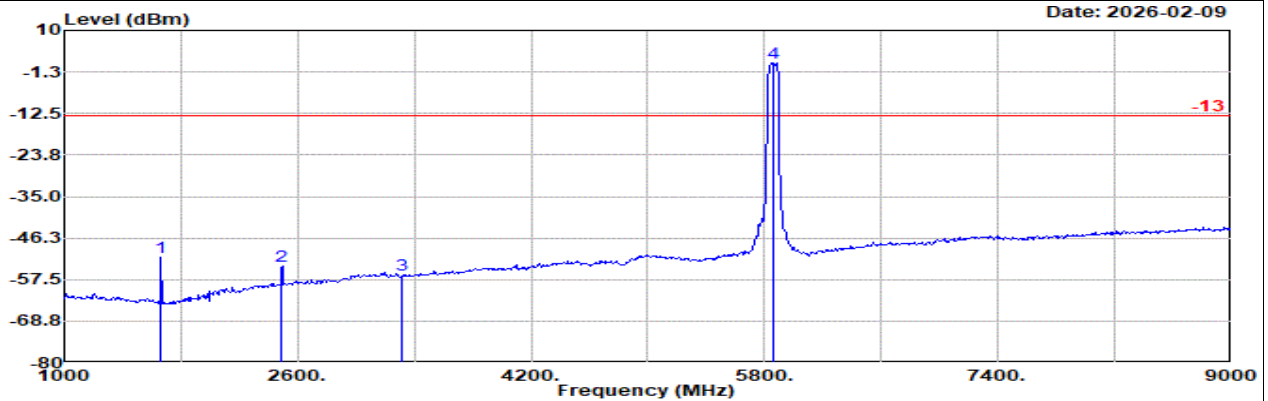

Site : 03CH12-HY
Condition: -13 3m 9120D-02114-250702 Horizontal
: NR Band 26 15M Ch26915 1RB1 BPSK
: WLAN 5G UNII-4_11be80_Ch171_MIMO

	Freq	Level	Detector	Ant	Amp\Cb	Filter		Readin	Limit		
	MHz	dBm		Factor	1		EIRPCF	g		Margin	Pol
1	1660.00	-51.61	RMS	25.50	-29.39	0.40	-95.23	47.11	-13.00	-38.61	Horizontal
2	2490.00	-54.01	RMS	28.00	-27.15	0.21	-95.23	40.16	-13.00	-41.01	Horizontal
3	3319.00	-56.23	RMS	29.70	-26.03	0.22	-95.23	35.11	-13.00	-43.23	Horizontal
4	5855.00	1.31	RMS	34.40	-22.78	0.28	-95.23	84.64	-13.00	14.31	Horizontal

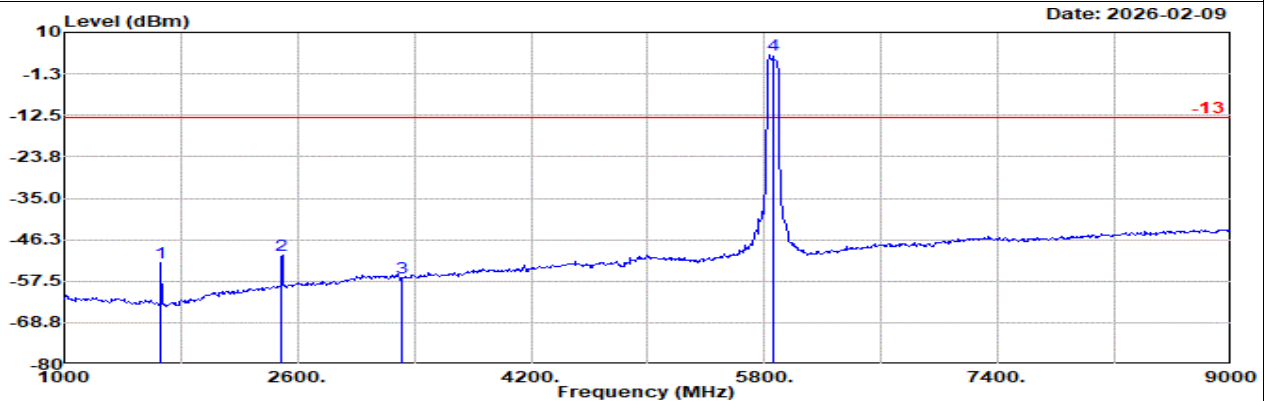

Site : 03CH12-HY
Condition: -13 3m 9120D-02114-250702 Vertical
: NR Band 26 15M Ch26915 1RB1 BPSK
: WLAN 5G UNII-4_11be80_Ch171_MIMO

	Freq	Level	Detector	Ant	Amp\Cb	Filter		Readin	Limit		
	MHz	dBm		Factor	1		EIRPCF	g		Margin	Pol
1	1660.00	-52.52	RMS	25.50	-29.39	0.40	-95.23	46.20	-13.00	-39.52	Vertical
2	2490.00	-50.48	RMS	28.00	-27.15	0.21	-95.23	43.69	-13.00	-37.48	Vertical
3	3319.00	-56.51	RMS	29.70	-26.03	0.22	-95.23	34.83	-13.00	-43.51	Vertical
4	5855.00	4.03	RMS	34.40	-22.78	0.28	-95.23	87.36	-13.00	17.03	Vertical




Ant. Main

Part 27H Mode 2


LTE B12 10M Ch23095 1RB0 QPSK

M

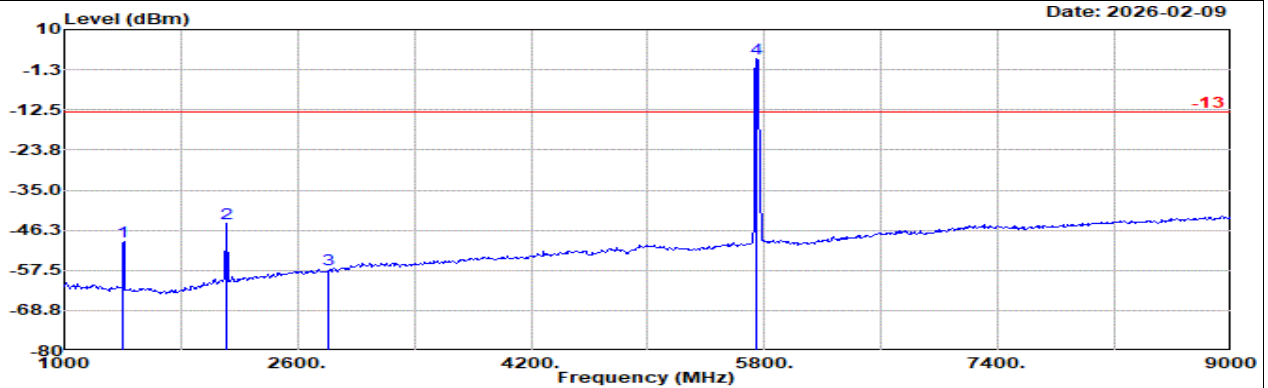

Site : 03CH12-HY
Condition: -13 3m 9120D-02114-250702 Horizontal
: LTE Band 12 10M Ch23095 1RB0 QPSK
: WLAN 5G_11n20_Ch149_MIMO (Setting 23)
: #4 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant	Amp\Cb	Filter		Readin	Limit	Margin	Pol
	MHz	dBm		Factor	1		EIRPCF	g	dBm	dB	
1	1406.00	-49.48	RMS	25.80	-29.65	0.62	-95.23	48.98	-13.00	-36.48	Horizontal
2	2109.00	-44.31	RMS	27.59	-27.58	0.34	-95.23	50.57	-13.00	-31.31	Horizontal
3	2812.00	-57.33	RMS	28.60	-26.00	0.18	-95.23	35.12	-13.00	-44.33	Horizontal
4	5745.00	1.90	RMS	33.88	-21.70	0.24	-95.23	84.71	-13.00	14.90	Horizontal

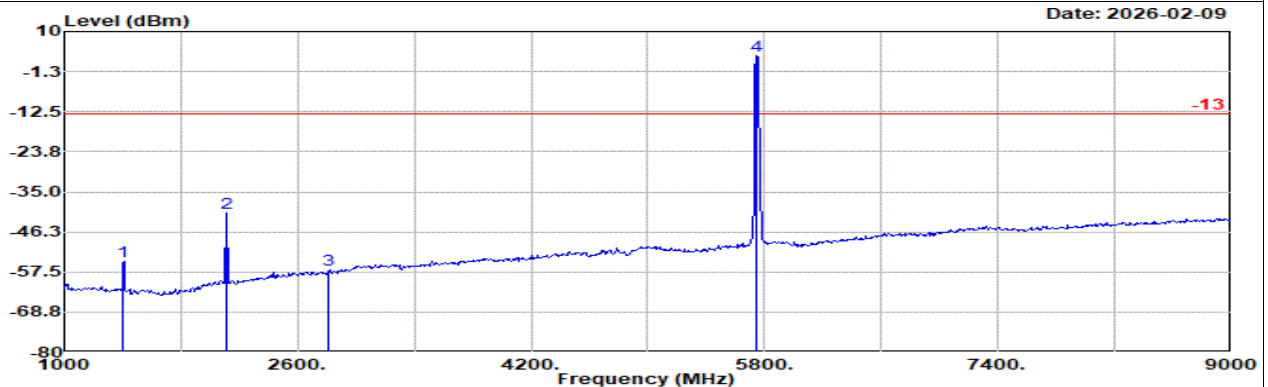

Site : 03CH12-HY
Condition: -13 3m 9120D-02114-250702 Vertical
: LTE Band 12 10M Ch23095 1RB0 QPSK
: WLAN 5G_11n20_Ch149_MIMO (Setting 23)
: #4 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant	Amp\Cb	Filter		Readin	Limit	Margin	Pol
	MHz	dBm		Factor	1		EIRPCF	g	dBm	dB	
1	1406.00	-54.42	RMS	25.80	-29.65	0.62	-95.23	44.04	-13.00	-41.42	Vertical
2	2109.00	-40.91	RMS	27.59	-27.58	0.34	-95.23	53.97	-13.00	-27.91	Vertical
3	2812.00	-56.94	RMS	28.60	-26.00	0.18	-95.23	35.51	-13.00	-43.94	Vertical
4	5745.00	3.13	RMS	33.88	-21.70	0.24	-95.23	85.94	-13.00	16.13	Vertical




Ant. Main

Part 27H Mode 4

LTE B12 10M Ch23095 1RB0 QPSK

M

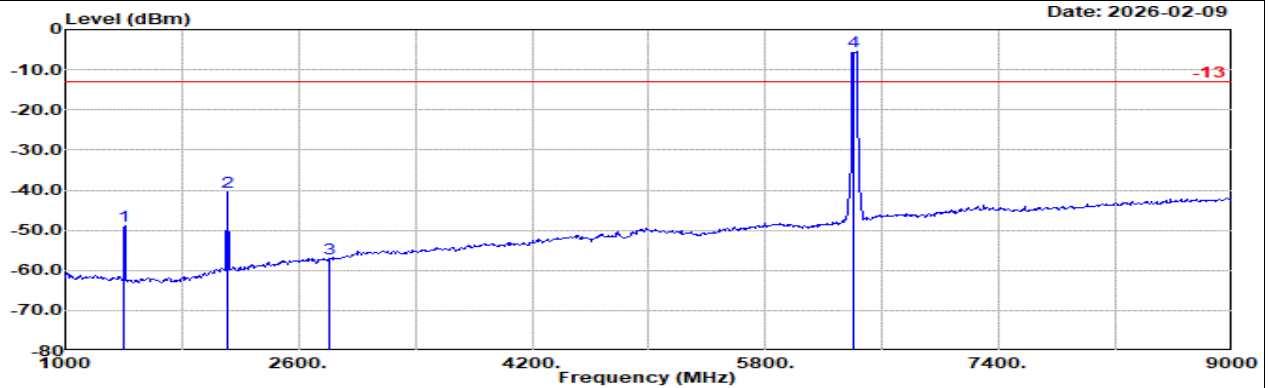

Site : 03CH12-HY


Condition: -13 3m 9120D-02114-250702 Horizontal

: LTE Band 12 10M Ch23095 1RB0 QPSK

: WLAN 6G_11be40_Ch91_MIMO (Setting 21)

: #4 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant	Amp\Cb	Filter		Readin	Limit	Margin	Pol
	MHz	dBm		Factor	1		EIRPCF	g	dBm	dB	
1	1406.00	-48.86	RMS	25.80	-29.65	0.62	-95.23	49.60	-13.00	-35.86	Horizontal
2	2109.00	-40.50	RMS	27.59	-27.58	0.34	-95.23	54.38	-13.00	-27.50	Horizontal
3	2812.00	-57.03	RMS	28.60	-26.00	0.18	-95.23	35.42	-13.00	-44.03	Horizontal
4	6405.00	-5.48	RMS	34.92	-21.15	0.14	-95.23	75.84	-13.00	7.52	Horizontal

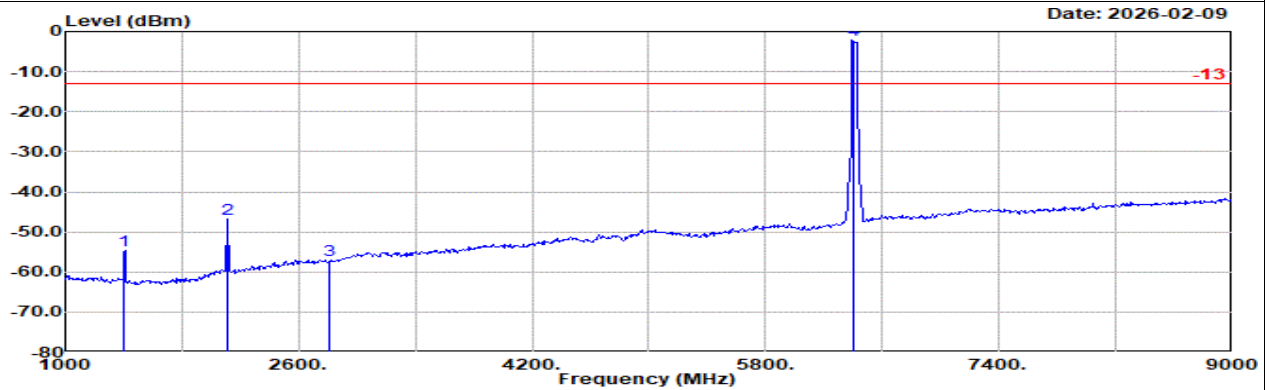

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-250702 Vertical

: LTE Band 12 10M Ch23095 1RB0 QPSK

: WLAN 6G_11be40_Ch91_MIMO (Setting 21)

: #4 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant	Amp\Cb	Filter		Readin	Limit	Margin	Pol
	MHz	dBm		Factor	1		EIRPCF	g	dBm	dB	
1	1406.00	-54.49	RMS	25.80	-29.65	0.62	-95.23	43.97	-13.00	-41.49	Vertical
2	2109.00	-46.77	RMS	27.59	-27.58	0.34	-95.23	48.11	-13.00	-33.77	Vertical
3	2812.00	-57.09	RMS	28.60	-26.00	0.18	-95.23	35.36	-13.00	-44.09	Vertical
4	6405.00	-2.23	RMS	34.92	-21.15	0.14	-95.23	79.09	-13.00	10.77	Vertical




Ant. Main

Part 27H Mode 4


LTE B12 10M Ch23095 1RB0 QPSK

M

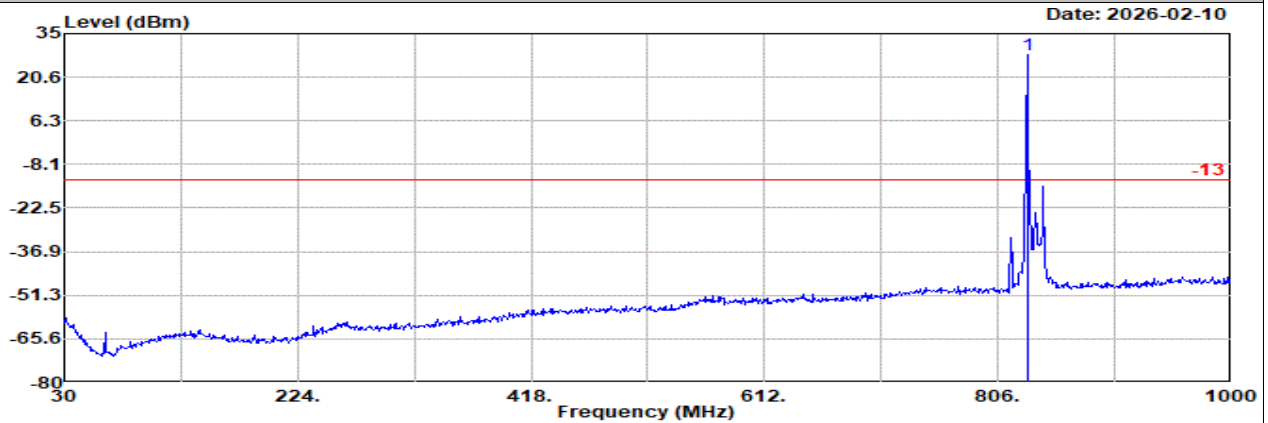

Site : 03CH12-HY
Condition: -13 3m Bilog_37059 & 01_251126 Horizontal
: LTE Band 12 10M Ch23095 1RB0 QPSK
: WLAN 6G_11be40_Ch91_MIMO (Setting 21)
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	830.25	28.05	RMS	28.46	3.84	0.00	-95.23	90.98	-13.00	41.05	Horizontal

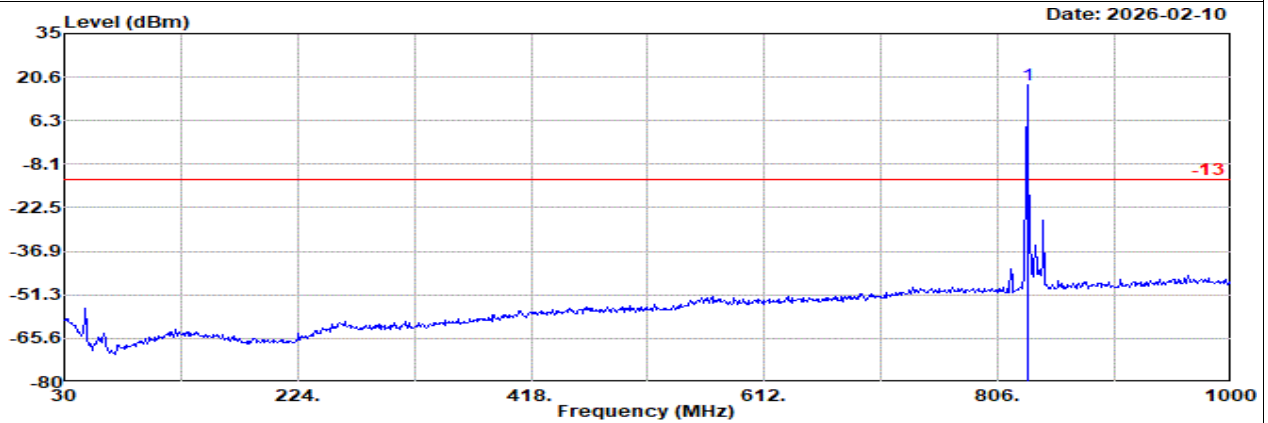

Site : 03CH12-HY
Condition: -13 3m Bilog_37059 & 01_251126 Vertical
: LTE Band 12 10M Ch23095 1RB0 QPSK
: WLAN 6G_11be40_Ch91_MIMO (Setting 21)
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	830.25	18.25	RMS	28.46	3.84	0.00	-95.23	81.18	-13.00	31.25	Vertical