


Appendix A. Test Result of Radiated Emissions and Co-location


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B2_20M_QPSK_1RB0_CH19100+TX_be20_5745MHz
Test BY :Rock

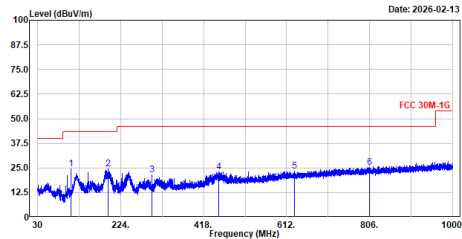

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	188.473	24.44	43.50	-19.06	51.49	-27.05	QP
2	195.094	24.37	43.50	-19.13	51.07	-26.70	QP
3	297.041	21.55	46.00	-24.45	44.81	-23.26	QP
4	453.502	22.92	46.00	-23.08	41.88	-18.96	QP
5	631.206	23.25	46.00	-22.75	38.42	-15.17	QP
6	806.388	25.27	46.00	-20.73	37.78	-12.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B2_20M_QPSK_1RB0_CH19100+TX_be20_5745MHz
Test BY :Rock

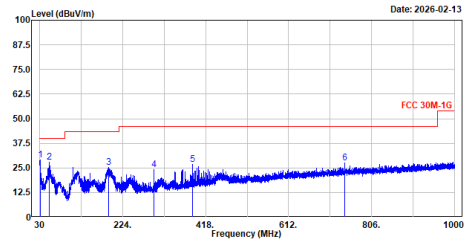

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	30.679	28.94	40.00	-11.06	53.85	-24.91	QP
2	52.213	27.77	40.00	-12.23	51.33	-23.56	QP
3	191.020	25.24	43.50	-18.26	51.76	-26.52	QP
4	297.041	24.24	46.00	-21.76	47.50	-23.26	QP
5	387.938	26.82	46.00	-19.18	47.52	-20.70	QP
6	742.562	27.59	46.00	-18.41	40.72	-13.13	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B2_20M_QPSK_1RB0_CH19100+TX_be20_5745MHz
Test BY :Ashton

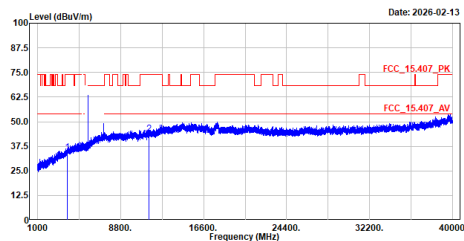

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	3800.000	34.45	74.00	-39.55	53.77	-19.32	Peak
2	11490.000	43.68	74.00	-30.32	45.64	-1.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B2_20M_QPSK_1RB0_CH19100+TX_be20_5745MHz
Test BY :Ashton

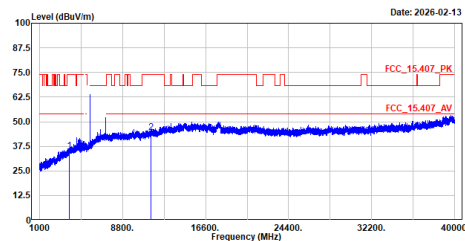

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	3800.000	35.22	74.00	-38.78	54.54	-19.32	Peak
2	11490.000	44.70	74.00	-29.30	46.66	-1.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_1RB0_CH20850+TX_be20_5745MHz
Test BY :Rock

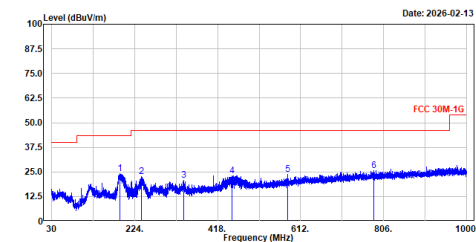


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	188.983	23.99	43.50	-19.51	50.52	-26.53	QP
2	240.393	22.64	46.00	-23.36	47.72	-25.08	QP
3	338.751	20.67	46.00	-25.33	42.68	-22.01	QP
4	451.756	23.13	46.00	-22.87	42.14	-19.01	QP
5	581.154	23.64	46.00	-22.36	39.98	-16.34	QP
6	782.623	25.63	46.00	-20.37	38.38	-12.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_1RB0_CH20850+TX_be20_5745MHz
Test BY :Rock

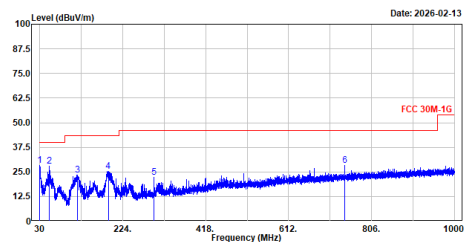


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.000	28.26	40.00	-11.74	53.09	-24.83	QP
2	52.698	28.06	40.00	-11.94	51.56	-23.50	QP
3	118.852	23.30	43.50	-20.20	49.59	-26.29	QP
4	190.341	25.39	43.50	-18.11	51.91	-26.52	QP
5	297.841	22.08	46.00	-23.92	45.34	-23.26	QP
6	742.562	28.43	46.00	-17.57	41.56	-13.13	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_1RB0_CH20850+TX_be20_5745MHz
Test BY :Rock

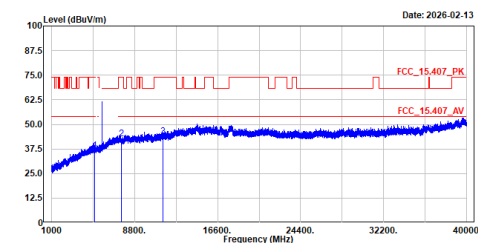


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5020.000	36.68	74.00	-37.32	50.70	-14.02	Peak
2	7530.000	42.73	74.00	-31.27	50.00	-7.27	Peak
3	11490.000	43.65	74.00	-30.35	45.61	-1.96	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_1RB0_CH20850+TX_be20_5745MHz
Test BY :Rock

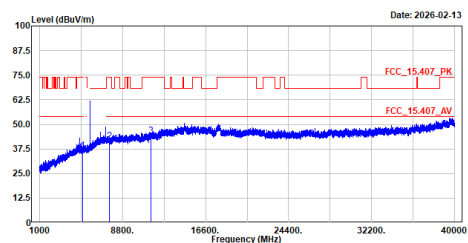


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5020.000	36.44	74.00	-37.56	50.46	-14.02	Peak
2	7530.000	41.32	74.00	-32.68	48.59	-7.27	Peak
3	11490.000	44.03	74.00	-29.97	45.99	-1.96	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B14_5M_QPSK_1RB0_CH23305+TX_be20_2462MHz
Test BY :Rock

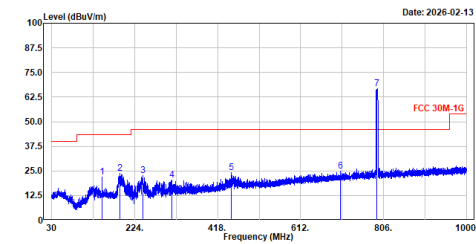


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	148.534	21.95	43.50	-21.55	45.90	-23.95	QP
2	189.080	23.73	43.50	-19.77	50.26	-26.53	QP
3	243.691	22.64	46.00	-23.36	47.65	-25.01	QP
4	311.106	20.25	46.00	-25.75	43.03	-22.78	QP
5	450.592	24.20	46.00	-21.80	43.24	-19.04	QP
6	795.411	24.89	46.00	-21.11	38.97	-14.08	QP
7	790.500	66.77	-----	-----	79.43	-12.66	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B14_5M_QPSK_1RB0_CH23305+TX_be20_2462MHz
Test BY :Rock

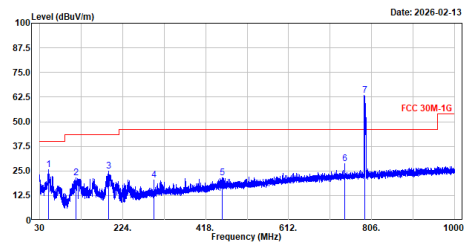


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	50.273	25.55	40.00	-14.45	49.11	-23.56	QP
2	115.069	21.50	43.50	-22.00	48.10	-26.60	QP
3	191.408	24.96	43.50	-18.54	51.48	-26.52	QP
4	297.041	20.19	46.00	-25.81	43.45	-23.26	QP
5	456.606	21.48	46.00	-24.52	40.38	-18.90	QP
6	742.562	28.68	46.00	-17.32	41.81	-13.13	QP
7	790.500	63.27	-----	-----	75.99	-12.72	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B14_5M_QPSK_1RB0_CH23305+TX_be20_2462MHz
Test BY :Rock

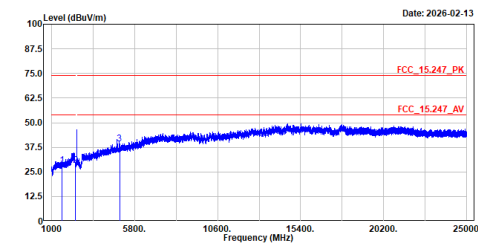


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1581.000	28.26	74.00	-45.74	53.94	-25.68	Peak
2	2371.500	28.41	74.00	-45.59	52.14	-23.73	Peak
3	4924.000	39.08	74.00	-34.92	53.38	-14.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B14_5M_QPSK_1RB0_CH23305+TX_be20_2462MHz
Test BY :Rock

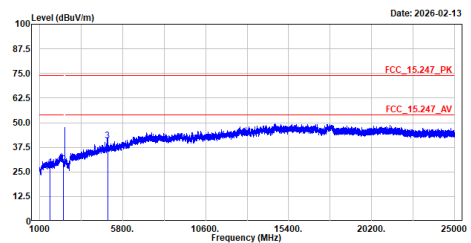


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1581.000	27.28	74.00	-46.72	52.96	-25.68	Peak
2	2371.500	28.69	74.00	-45.31	52.42	-23.73	Peak
3	4924.000	40.58	74.00	-33.42	54.88	-14.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_20M_QPSK_1RB0_CH56640+TX_ax20_5955MHz
Test BY :Rock

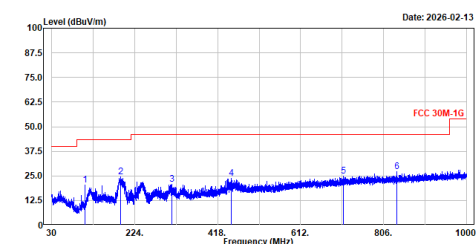


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	188.473	20.31	43.50	-23.19	47.36	-27.05	QP
2	190.535	24.52	43.50	-18.98	51.04	-26.52	QP
3	310.718	20.71	46.00	-25.29	43.50	-22.79	QP
4	409.234	23.71	46.00	-22.29	42.79	-19.08	QP
5	711.716	24.99	46.00	-21.01	38.91	-13.92	QP
6	837.622	27.27	46.00	-18.73	39.56	-12.29	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_20M_QPSK_1RB0_CH56640+TX_ax20_5955MHz
Test BY :Rock

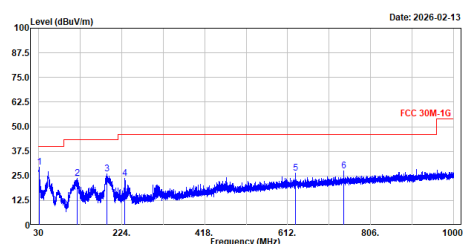


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	31.067	29.52	40.00	-10.48	54.48	-24.96	QP
2	120.016	23.82	43.50	-19.68	50.20	-26.38	QP
3	188.886	26.16	43.50	-17.34	52.67	-26.51	QP
4	231.469	23.61	46.00	-22.39	49.40	-25.79	QP
5	631.206	26.33	46.00	-19.67	41.50	-15.17	QP
6	742.562	27.64	46.00	-18.36	40.77	-13.13	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_20M_QPSK_1RB0_CH56640+TX_ax20_5955MHz
Test BY :Rock

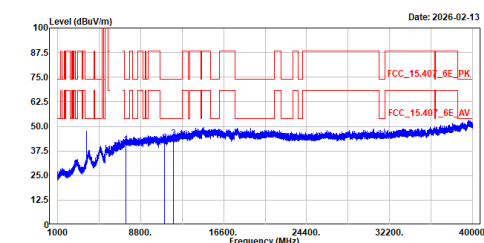


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	7380.000	40.79	74.00	-33.21	47.70	-6.91	Peak
2	11070.000	41.69	74.00	-32.31	44.57	-2.88	Peak
3	11910.000	43.66	74.00	-30.34	45.25	-1.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_20M_QPSK_1RB0_CH56640+TX_ax20_5955MHz
Test BY :Rock

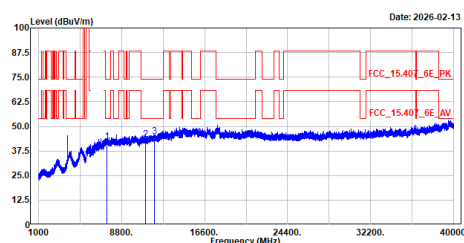


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	7380.000	42.14	74.00	-31.86	49.05	-6.91	Peak
2	11070.000	43.35	74.00	-30.65	46.23	-2.88	Peak
3	11910.000	45.04	74.00	-28.96	46.63	-1.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :iCDMA_B5_CH4233+TX_be20_2462MHz
Test BY :Rock

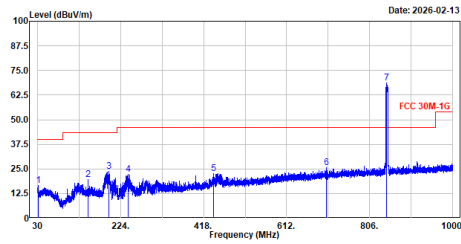

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	30.776	16.45	40.00	-23.55	41.37	-24.92	QP
2	148.534	19.72	43.50	-23.78	43.67	-23.95	QP
3	195.773	23.62	43.50	-19.88	50.32	-26.70	QP
4	241.751	22.35	46.00	-23.65	47.40	-25.05	QP
5	441.280	22.66	46.00	-23.34	41.93	-19.27	QP
6	704.926	25.48	46.00	-20.52	39.57	-14.09	QP
7	846.600	68.80	-----	-----	80.95	-12.15	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :iCDMA_B5_CH4233+TX_be20_2462MHz
Test BY :Rock

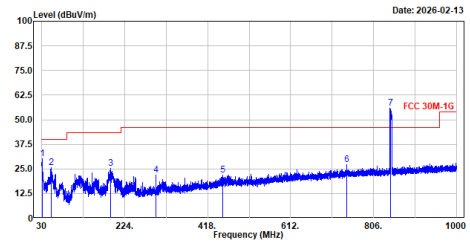

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	30.970	30.07	40.00	-9.93	55.00	-24.93	QP
2	51.631	25.70	40.00	-14.30	49.24	-23.54	QP
3	191.311	25.39	43.50	-18.11	51.91	-26.52	QP
4	297.841	21.84	46.00	-24.16	45.10	-23.26	QP
5	453.696	22.04	46.00	-23.96	41.00	-18.96	QP
6	742.562	27.29	46.00	-18.71	40.42	-13.13	QP
7	846.600	55.76	-----	-----	67.95	-12.19	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :iCDMA_B5_CH4233+TX_be20_2462MHz
Test BY :Rock

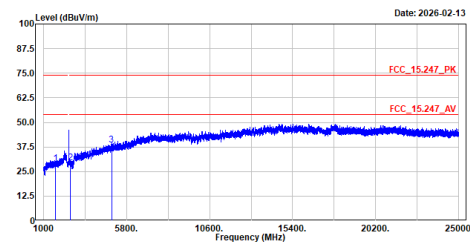

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1693.200	29.16	74.00	-44.84	54.73	-25.57	Peak
2	2539.800	29.29	74.00	-44.71	53.01	-23.72	Peak
3	4924.000	38.42	74.00	-35.58	52.72	-14.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :iCDMA_B5_CH4233+TX_be20_2462MHz
Test BY :Rock

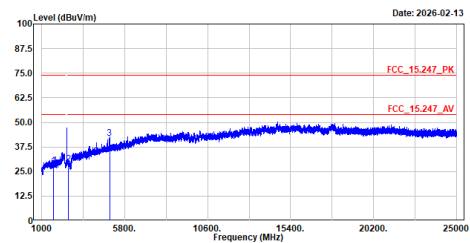

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1693.200	28.03	74.00	-45.97	53.60	-25.57	Peak
2	2539.800	28.80	74.00	-45.20	52.52	-23.72	Peak
3	4924.000	41.87	74.00	-32.13	56.17	-14.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B2_20M_QPSK_1RB0_CH19100
Test BY :Rock

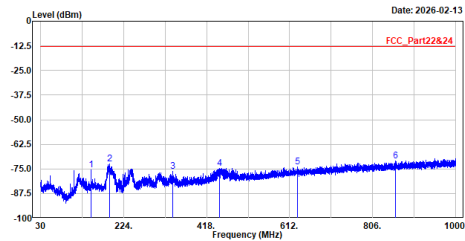

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	148.534	-75.62	-13.00	-62.62	-61.32	-14.30	Peak
2	190.923	-72.63	-13.00	-59.63	-55.76	-16.87	Peak
3	339.527	-76.32	-13.00	-63.32	-63.97	-12.35	Peak
4	447.682	-74.53	-13.00	-61.53	-65.06	-9.47	Peak
5	631.206	-73.96	-13.00	-60.96	-68.44	-5.52	Peak
6	860.029	-71.04	-13.00	-58.04	-68.73	-2.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B2_20M_QPSK_1RB0_CH19100
Test BY :Rock

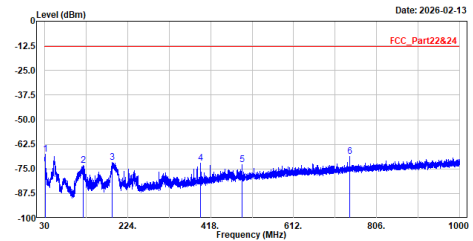

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	30.776	-67.62	-13.00	-54.62	-52.35	-15.27	Peak
2	119.725	-73.36	-13.00	-60.36	-56.66	-16.70	Peak
3	188.013	-71.80	-13.00	-58.80	-55.11	-16.69	Peak
4	395.011	-72.20	-13.00	-59.20	-61.33	-10.87	Peak
5	490.944	-72.97	-13.00	-59.97	-64.23	-8.74	Peak
6	742.562	-68.61	-13.00	-55.61	-65.13	-3.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B2_20M_QPSK_1RB0_CH19100
Test BY :Rock

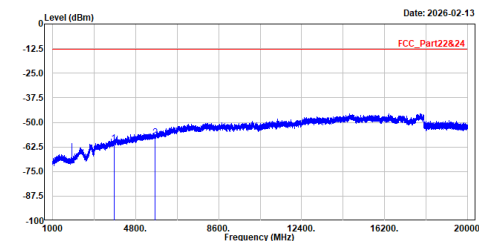

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	3800.000	-60.80	-13.00	-47.80	-53.28	-7.52	Peak
2	5700.000	-57.70	-13.00	-44.70	-57.68	-0.02	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B2_20M_QPSK_1RB0_CH19100
Test BY :Rock

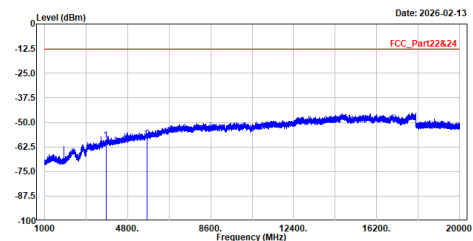

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	3800.000	-59.25	-13.00	-46.25	-51.73	-7.52	Peak
2	5700.000	-58.53	-13.00	-45.53	-58.51	-0.02	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_1RB0_CH20850
Test BY :Rock

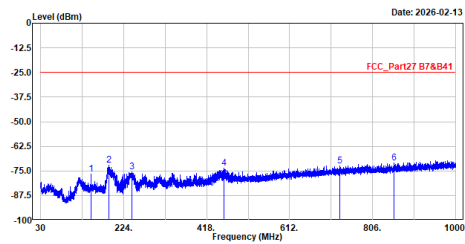

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	148.534	-76.55	-25.00	-51.55	-62.25	-14.30	Peak
2	188.789	-72.23	-25.00	-47.23	-55.39	-16.84	Peak
3	243.012	-75.35	-25.00	-50.35	-59.97	-15.38	Peak
4	458.158	-73.76	-25.00	-48.76	-64.54	-9.22	Peak
5	730.146	-72.45	-25.00	-47.45	-68.68	-3.77	Peak
6	856.634	-70.86	-25.00	-45.86	-68.48	-2.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_1RB0_CH20850
Test BY :Rock

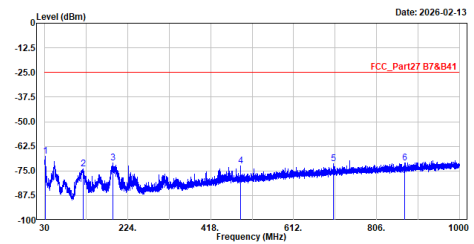

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	30.970	-67.71	-25.00	-42.71	-52.43	-15.28	Peak
2	119.628	-73.91	-25.00	-48.91	-57.22	-16.69	Peak
3	189.177	-71.12	-25.00	-46.12	-54.24	-16.88	Peak
4	487.355	-72.32	-25.00	-47.32	-63.51	-8.81	Peak
5	705.411	-71.40	-25.00	-46.40	-66.97	-4.43	Peak
6	872.057	-70.80	-25.00	-45.80	-68.46	-2.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_1RB0_CH20850
Test BY :Rock

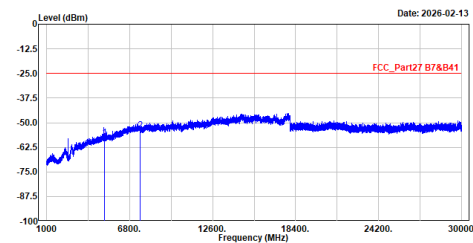

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5020.000	-57.91	-25.00	-32.91	-55.69	-2.22	Peak
2	7530.000	-53.95	-25.00	-28.95	-58.48	4.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_1RB0_CH20850
Test BY :Rock

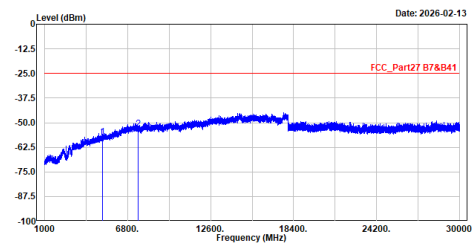

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	5020.000	-57.21	-25.00	-32.21	-54.99	-2.22	Peak
2	7530.000	-53.24	-25.00	-28.24	-57.77	4.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B14_5M_QPSK_1RB0_CH23305
Test BY :Rock

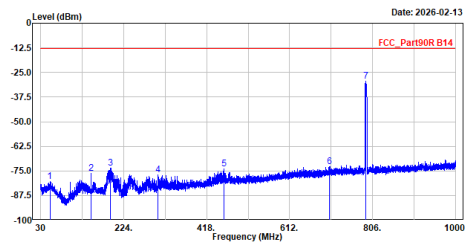


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	51.437	-80.40	-13.00	-67.40	-66.52	-13.88	Peak
2	148.534	-76.30	-13.00	-63.30	-62.00	-14.30	Peak
3	193.736	-73.57	-13.00	-60.57	-56.51	-17.06	Peak
4	304.704	-76.83	-13.00	-63.83	-63.41	-13.42	Peak
5	458.934	-74.09	-13.00	-61.09	-64.90	-9.19	Peak
6	795.314	-72.74	-13.00	-59.74	-68.31	-4.43	Peak
7	790.500	-29.56	-----	-----	-26.51	-3.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B14_5M_QPSK_1RB0_CH23305
Test BY :Rock

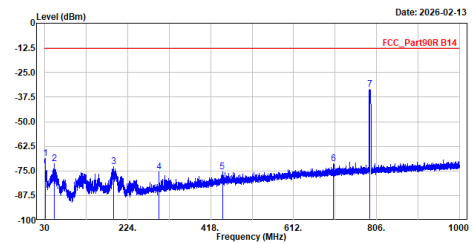


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	30.679	-68.86	-13.00	-55.86	-53.60	-15.26	Peak
2	52.795	-71.36	-13.00	-58.36	-57.52	-13.84	Peak
3	191.796	-72.76	-13.00	-59.76	-55.89	-16.87	Peak
4	297.041	-75.47	-13.00	-62.47	-61.86	-13.61	Peak
5	445.548	-75.47	-13.00	-62.47	-65.95	-9.52	Peak
6	795.993	-71.44	-13.00	-58.44	-67.02	-4.42	Peak
7	790.500	-33.69	-----	-----	-30.66	-3.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B14_5M_QPSK_1RB0_CH23305
Test BY :Ashton

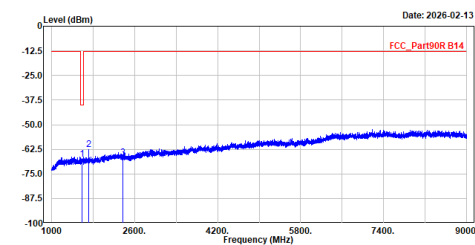


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1581.000	-67.50	-40.00	-27.50	-51.47	-16.03	Peak
2	1712.300	-62.60	-13.00	-49.60	-46.74	-15.86	Peak
3	2371.500	-66.98	-13.00	-53.98	-52.90	-14.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B14_5M_QPSK_1RB0_CH23305
Test BY :Ashton

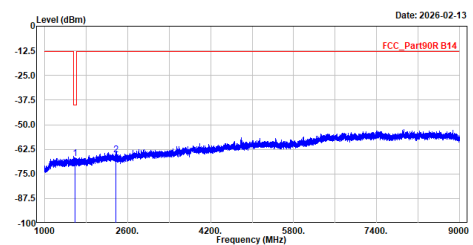


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1581.000	-67.00	-40.00	-27.00	-50.97	-16.03	Peak
2	2371.500	-65.10	-13.00	-52.10	-51.02	-14.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B40_20M_QPSK_1RB0_CH56640
Test BY :Rock

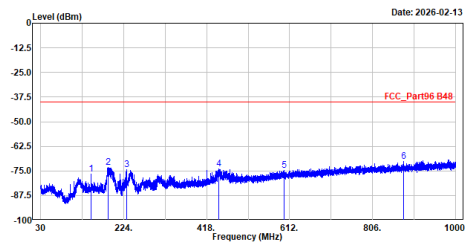


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	148.534	-76.71	-40.00	-36.71	-62.41	-14.30	Peak
2	187.334	-73.37	-40.00	-33.37	-56.81	-16.56	Peak
3	230.790	-74.18	-40.00	-34.18	-57.97	-16.21	Peak
4	446.518	-74.01	-40.00	-34.01	-64.52	-9.49	Peak
5	599.972	-74.56	-40.00	-34.56	-68.46	-6.10	Peak
6	878.265	-70.27	-40.00	-30.27	-68.09	-2.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B40_20M_QPSK_1RB0_CH56640
Test BY :Rock

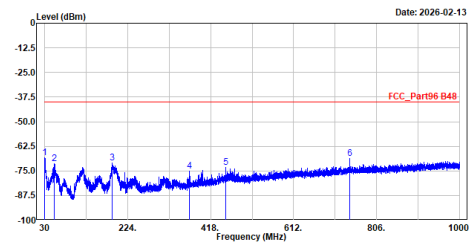


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	30.291	-68.45	-40.00	-28.45	-53.24	-15.21	Peak
2	52.989	-71.17	-40.00	-31.17	-57.35	-13.82	Peak
3	188.498	-70.90	-40.00	-30.90	-54.11	-16.79	Peak
4	309.112	-75.22	-40.00	-35.22	-63.52	-11.70	Peak
5	453.890	-73.18	-40.00	-33.18	-63.88	-9.30	Peak
6	742.562	-68.83	-40.00	-28.83	-65.35	-3.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B40_20M_QPSK_1RB0_CH56640
Test BY :Rock

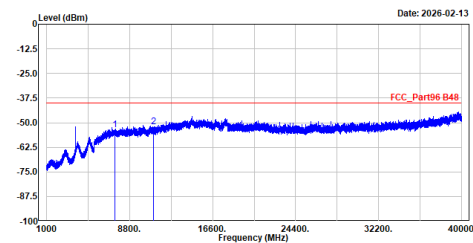


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	7380.000	-53.47	-40.00	-13.47	-56.21	2.74	Peak
2	11070.000	-52.16	-40.00	-12.16	-58.93	6.77	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B40_20M_QPSK_1RB0_CH56640
Test BY :Rock

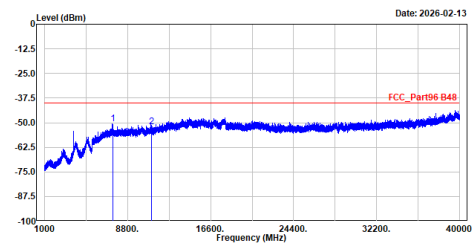


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	7380.000	-50.49	-40.00	-10.49	-53.23	2.74	Peak
2	11070.000	-51.92	-40.00	-11.92	-58.69	6.77	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :WCDMA_B5_CH4233
Test BY :Rock

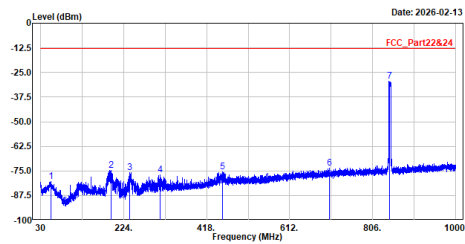


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	54.056	-80.38	-13.00	-67.38	-66.46	-13.92	Peak
2	194.124	-74.55	-13.00	-61.55	-57.50	-17.05	Peak
3	238.259	-75.74	-13.00	-62.74	-60.18	-15.56	Peak
4	389.263	-76.86	-13.00	-63.86	-63.65	-13.21	Peak
5	455.636	-75.29	-13.00	-62.29	-66.02	-9.27	Peak
6	795.508	-73.71	-13.00	-60.71	-69.28	-4.43	Peak
7	846.600	-29.43	-----	-----	-26.91	-2.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :WCDMA_B5_CH4233
Test BY :Rock

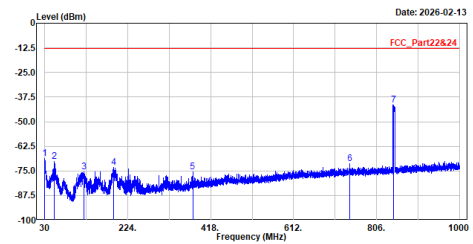


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	30.097	-68.72	-13.00	-55.72	-53.53	-15.19	Peak
2	52.989	-70.35	-13.00	-57.35	-56.53	-13.82	Peak
3	121.083	-75.32	-13.00	-62.32	-58.81	-16.51	Peak
4	191.311	-73.35	-13.00	-60.35	-56.48	-16.87	Peak
5	376.896	-75.46	-13.00	-62.46	-64.15	-11.31	Peak
6	742.562	-71.36	-13.00	-58.36	-67.88	-3.48	Peak
7	846.600	-41.42	-----	-----	-38.88	-2.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :WCDMA_B5_CH4233
Test BY :Ashton

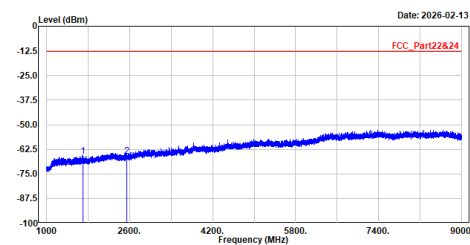


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1693.200	-66.02	-13.00	-53.02	-50.10	-15.92	Peak
2	2539.800	-66.11	-13.00	-53.11	-52.04	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :WCDMA_B5_CH4233
Test BY :Ashton

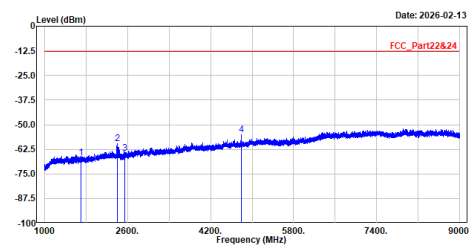

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1693.200	-66.66	-13.00	-53.66	-50.74	-15.92	Peak
2	2395.600	-59.45	-13.00	-46.45	-45.34	-14.11	Peak
3	2539.800	-64.62	-13.00	-51.62	-50.55	-14.07	Peak
4	4796.400	-55.14	-13.00	-42.14	-49.80	-5.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.