

Test Report

Report No. : CQASZ20190500014EX-02
Applicant: Speedata Group Ltd
Address of Applicant: Room 2-308, building No. 25, No. 9 Anningzhuang Road West, Haidian district, Beijing, China
Manufacturer: Speedata Group Ltd
Address of Manufacturer: Room 2-308, building No. 25, No. 9 Anningzhuang Road West, Haidian district, Beijing, China
Equipment Under Test (EUT):
Product: PDA
All Model No.: SD60, SD35, T35, PG35, SD55, T55, SD55LG, SD55MD, SD55UHF, SD55PTT, T55UHF, T55PPT, PG55, T60, SD60LG, SD60RT, SD60PRT, T60RT, Bio60, SD50, SN50, SD50RT, T50, PG50
Test Model No.: SD60
Brand Name: N/A
FCC ID: 2AJO5SD60
Standards: 47 CFR Part 15, Subpart C
Date of Test: 2019-03-26 to 2019-06-13
Date of Issue: 2019-06-13
Test Result : PASS*

Tested By:

Daisy Qin

Reviewed By:

(Daisy Qin)
Aaron Ma

Approved By:

(Aaron Ma)
Jack Ai

(Jack Ai)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20190500014EX-02	Rev.01	Initial report	2019-06-13

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

3 Contents

	Page
COVER PAGE	1
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT	7
4.4 DESCRIPTION OF SUPPORT UNITS	7
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
4.6 TEST LOCATION	9
4.7 TEST FACILITY	9
4.8 ABNORMALITIES FROM STANDARD CONDITIONS	9
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
4.10 EQUIPMENT LIST	10
5 TEST RESULTS AND MEASUREMENT DATA	11
5.1 ANTENNA REQUIREMENT	11
5.2 CONDUCTED EMISSIONS	12
5.3 CONDUCTED PEAK OUTPUT POWER	16
5.4 20dB OCCUPY BANDWIDTH	21
5.5 FREQUENCIES SEPARATION	25
5.6 HOPPING CHANNEL NUMBER	27
5.7 DWELL TIME	29
5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS	33
5.9 SPURIOUS RF CONDUCTED EMISSIONS	39
5.10 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	50
5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	52
5.11.1 Radiated Emission below 1GHz	55
5.11.2 Transmitter Emission above 1GHz	57
6 PHOTOGRAPHS - EUT TEST SETUP	60
6.1 RADIATED EMISSION	60
6.2 CONDUCTED EMISSION	61
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	62

4 General Information

4.1 Client Information

Applicant:	Speedata Group Ltd
Address of Applicant:	Room 2-308, building No. 25, No. 9 Anningzhuang Road West, Haidian district, Beijing, China
Manufacturer:	Speedata Group Ltd
Address of Manufacturer:	Room 2-308, building No. 25, No. 9 Anningzhuang Road West, Haidian district, Beijing, China

4.2 General Description of EUT

Product Name:	PDA
All Model No.:	SD60, SD35, T35, PG35, SD55, T55, SD55LG, SD55MD, SD55UHF, SD55PTT, T55UHF, T55PPT, PG55, T60, SD60LG, SD60RT, SD60PRT, T60RT, Bio60, SD50, SN50, SD50RT, T50, PG50
Test Model No.:	SD60
Trade Mark:	N/A
Hardware Version:	8.1.0
Software Version:	V.SD60.2.1.20.2019041909
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.2/ Bluetooth Classic
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Transfer Rate:	1Mbps/2Mbps/3Mbps
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Product Type:	☐ Mobile ☒ Portable ☐ Fix Location
Antenna Type:	IFIA Antenna
Antenna Gain:	-3.5dBi
EUT Power Supply:	DC 3.8V from Battery
Adapter Information:	Model: A138A-120150U-US2 Input: 100-240V-50/60Hz, 0.5A Output: 5V 2.5A/ 9V 2A/ 12V 1.5A

Note: 1. This report is only for Bluetooth Classic

- For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- There are many products, Only the model SD60 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance and model name.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

4.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	1001mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
Adapter	AOHAI	A138A-120150U-US2	Provide by Client	SDOC

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.6 Test Location

Shenzhen Huaxia Testing Technology Co., Ltd,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.

4.10 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/26	2019/9/25
Spectrum analyzer	R&S	FSU26	CQA-038	2018/10/28	2019/10/27
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2018/9/26	2019/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/11/2	2019/11/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2018/10/28	2020/10/27
Bilog Antenna	R&S	HL562	CQA-011	2018/9/26	2020/9/25
Horn Antenna	R&S	HF906	CQA-012	2018/9/26	2020/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2018/9/26	2020/9/25
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2018/9/26	2019/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2018/9/26	2019/9/25
Spectrum analyzer	Agilent	E4440A	CQA-103	2018/10/28	2019/10/27
Antenna Connector	CQA	RFC-01	CQA-080	2018/9/26	2019/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2018/9/26	2019/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2018/9/26	2019/9/25
EMI Test Receiver	R&S	ESPI3	CQA-013	2018/9/26	2019/9/25
LISN	R&S	ENV216	CQA-003	2018/11/5	2019/11/4
Coaxial cable	CQA	N/A	CQA-C009	2018/9/26	2019/9/25

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	IFIA Antenna 
The antenna is IFIA Antenna. The best case gain of the antenna is -3.5dBi.	

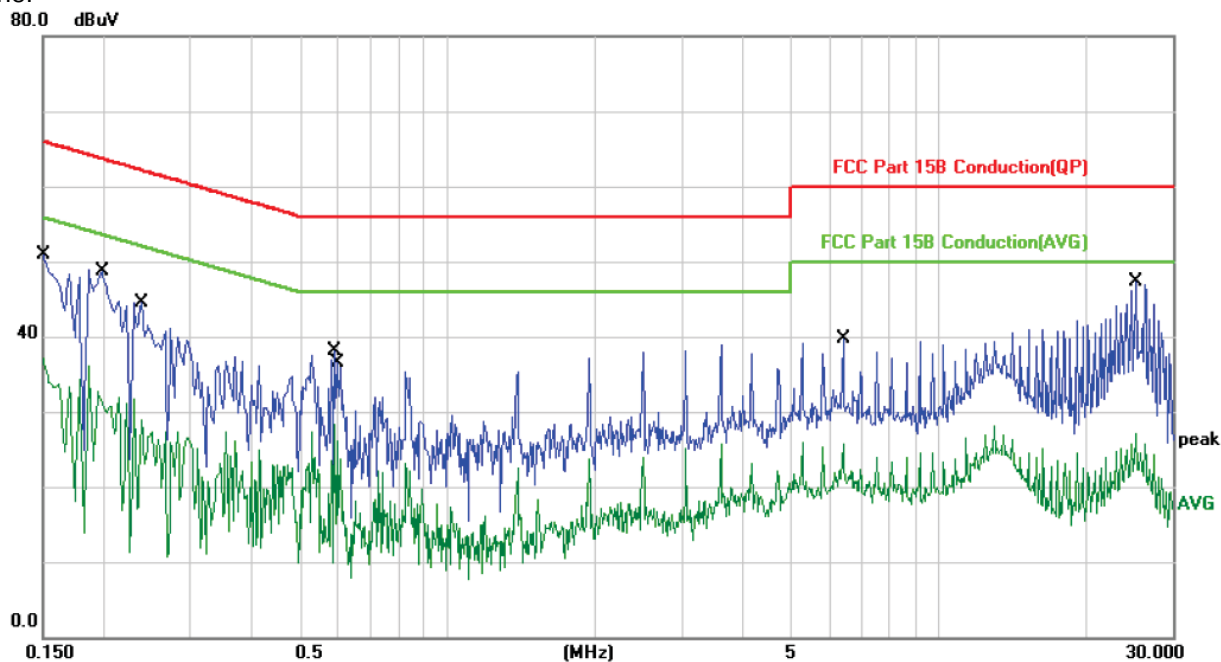
5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:	Shielding Room AC Mains LISN1 80cm EUT AE 80cm LISN2 AC Mains Test Receiver Ground Reference Plane		

Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation at the highest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC 120V/60Hz
Test Results:	Pass

Measurement Data

L line:

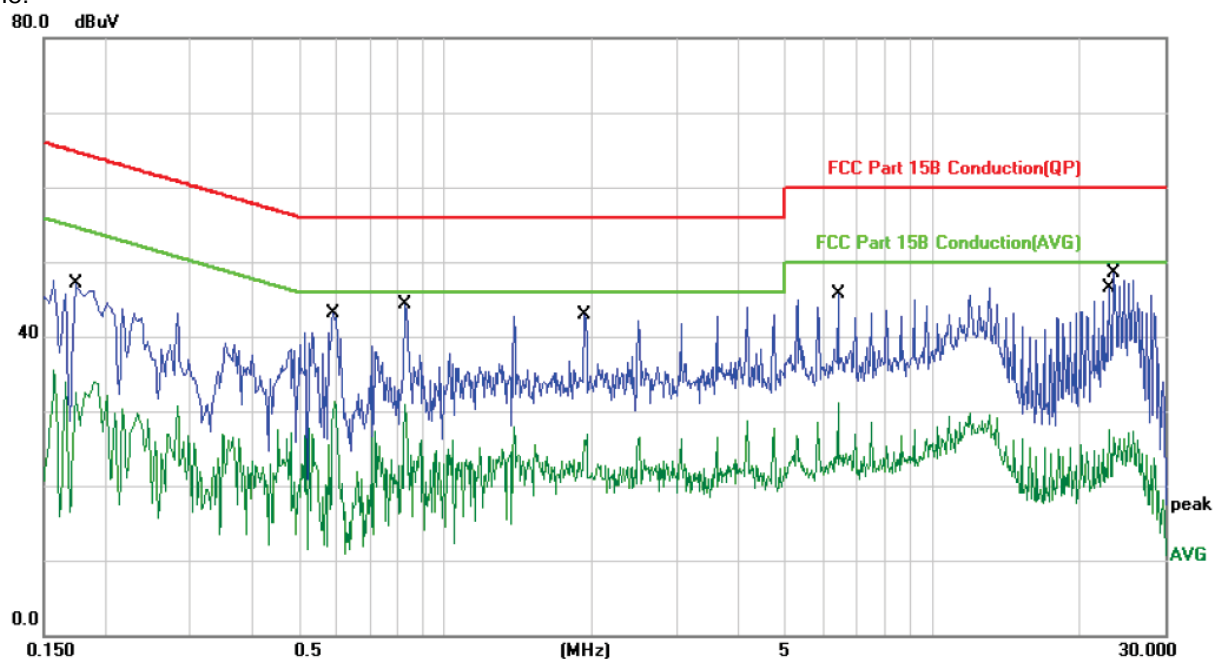


No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector	Comment
1		0.1500	51.10	-0.13	50.97	65.99	-15.02	QP	
2		0.1500	37.33	-0.13	37.20	55.99	-18.79	AVG	
3		0.1955	32.20	-0.13	32.07	53.80	-21.73	AVG	
4		0.1980	48.80	-0.13	48.67	63.69	-15.02	QP	
5		0.2380	44.53	-0.11	44.42	62.16	-17.74	QP	
6		0.2380	29.09	-0.11	28.98	52.16	-23.18	AVG	
7		0.5899	38.17	-0.04	38.13	56.00	-17.87	QP	
8		0.5980	26.12	-0.04	26.08	46.00	-19.92	AVG	
9		6.3900	40.04	-0.26	39.78	60.00	-20.22	QP	
10		6.4460	22.47	-0.26	22.21	50.00	-27.79	AVG	
11	*	25.2420	47.65	-0.44	47.21	60.00	-12.79	QP	
12		25.2420	27.62	-0.44	27.18	50.00	-22.82	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

N line:

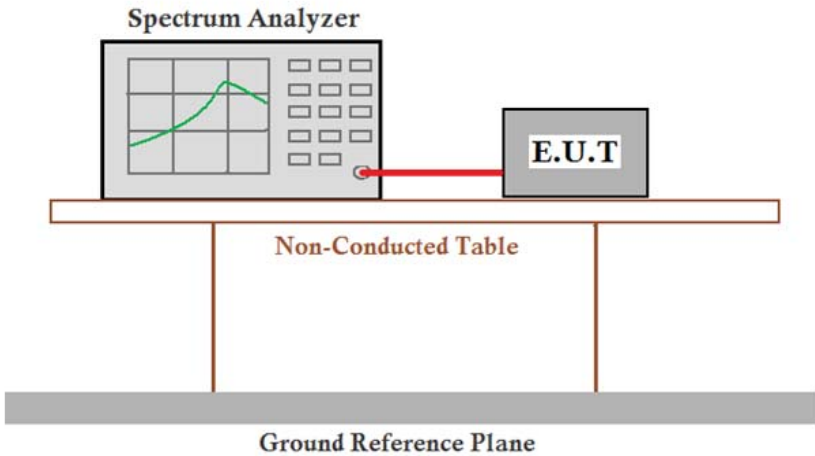


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1740	47.17	-0.13	47.04	64.76	-17.72	QP	
2		0.1740	32.65	-0.13	32.52	54.76	-22.24	AVG	
3		0.5899	43.19	-0.04	43.15	56.00	-12.85	QP	
4		0.5940	31.35	-0.04	31.31	46.00	-14.69	AVG	
5		0.8300	44.38	-0.08	44.30	56.00	-11.70	QP	
6		0.8300	31.06	-0.08	30.98	46.00	-15.02	AVG	
7		1.9380	43.08	-0.23	42.85	56.00	-13.15	QP	
8		1.9540	27.11	-0.23	26.88	46.00	-19.12	AVG	
9		6.3859	45.92	-0.26	45.66	60.00	-14.34	QP	
10		6.3859	31.43	-0.26	31.17	50.00	-18.83	AVG	
11		23.0500	27.94	-0.41	27.53	50.00	-22.47	AVG	
12	*	23.5980	48.97	-0.42	48.55	60.00	-11.45	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

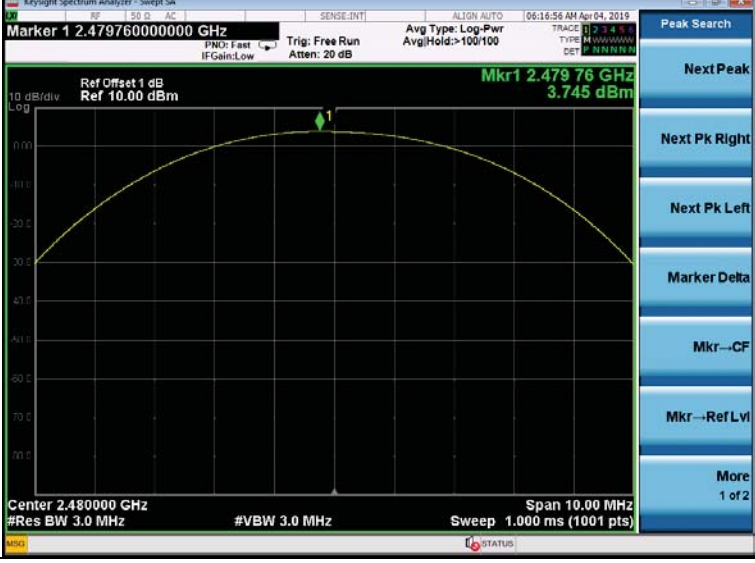
5.3 Conducted Peak Output Power

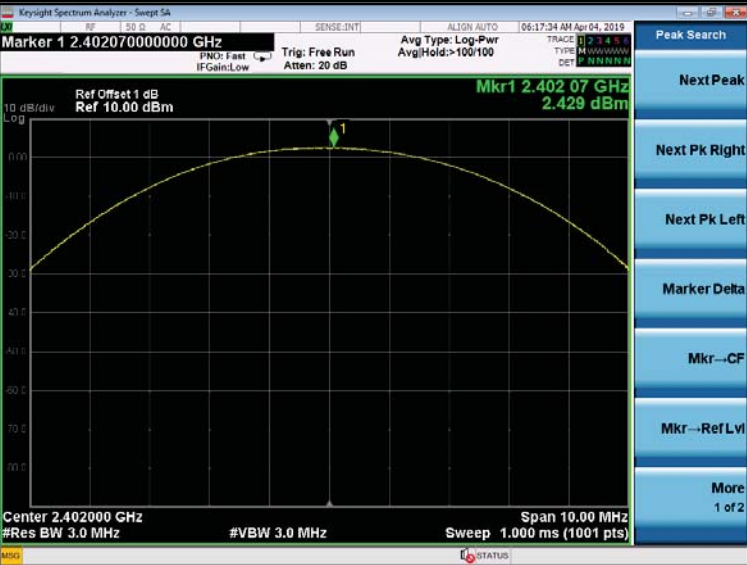
Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	21dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

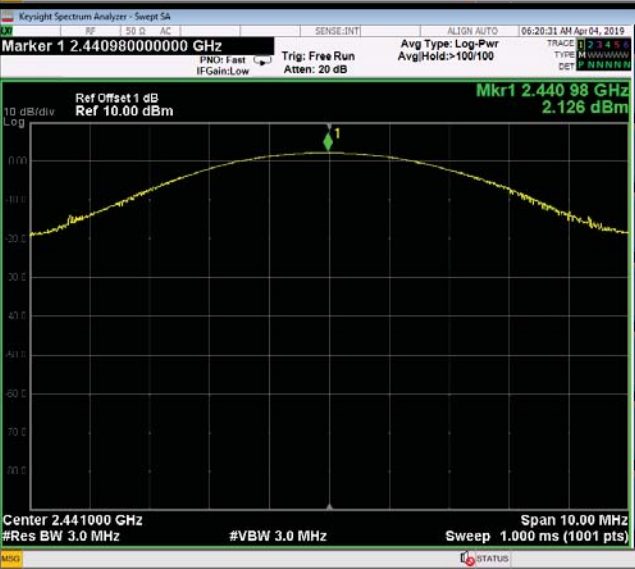
Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	3.023	21.00	Pass
Middle	2.508	21.00	Pass
Highest	3.745	21.00	Pass
$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.429	21.00	Pass
Middle	2.046	21.00	Pass
Highest	3.086	21.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.497	21.00	Pass
Middle	2.126	21.00	Pass
Highest	3.117	21.00	Pass

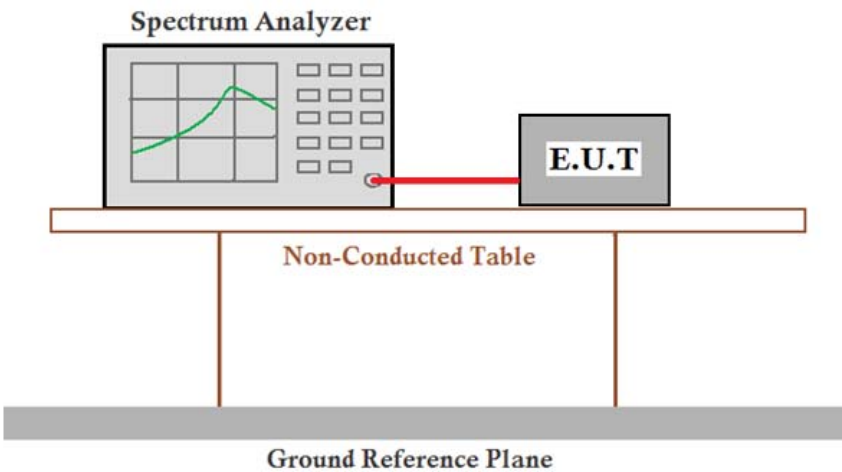
Test plot as follows:

Graphs	
GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

8DPSK/LCH	 KeySight Spectrum Analyzer - Swept SA Marker 1 2.401970000000 GHz Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.401 97 GHz 2.497 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 3.0 MHz Sweep 1.000 ms (1001 pts)
8DPSK/MCH	 KeySight Spectrum Analyzer - Swept SA Marker 1 2.440980000000 GHz Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.440 98 GHz 2.126 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 3.0 MHz Sweep 1.000 ms (1001 pts)
8DPSK/HCH	 KeySight Spectrum Analyzer - Swept SA Marker 1 2.479930000000 GHz Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.479 93 GHz 3.117 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 3.0 MHz Sweep 1.000 ms (1001 pts)

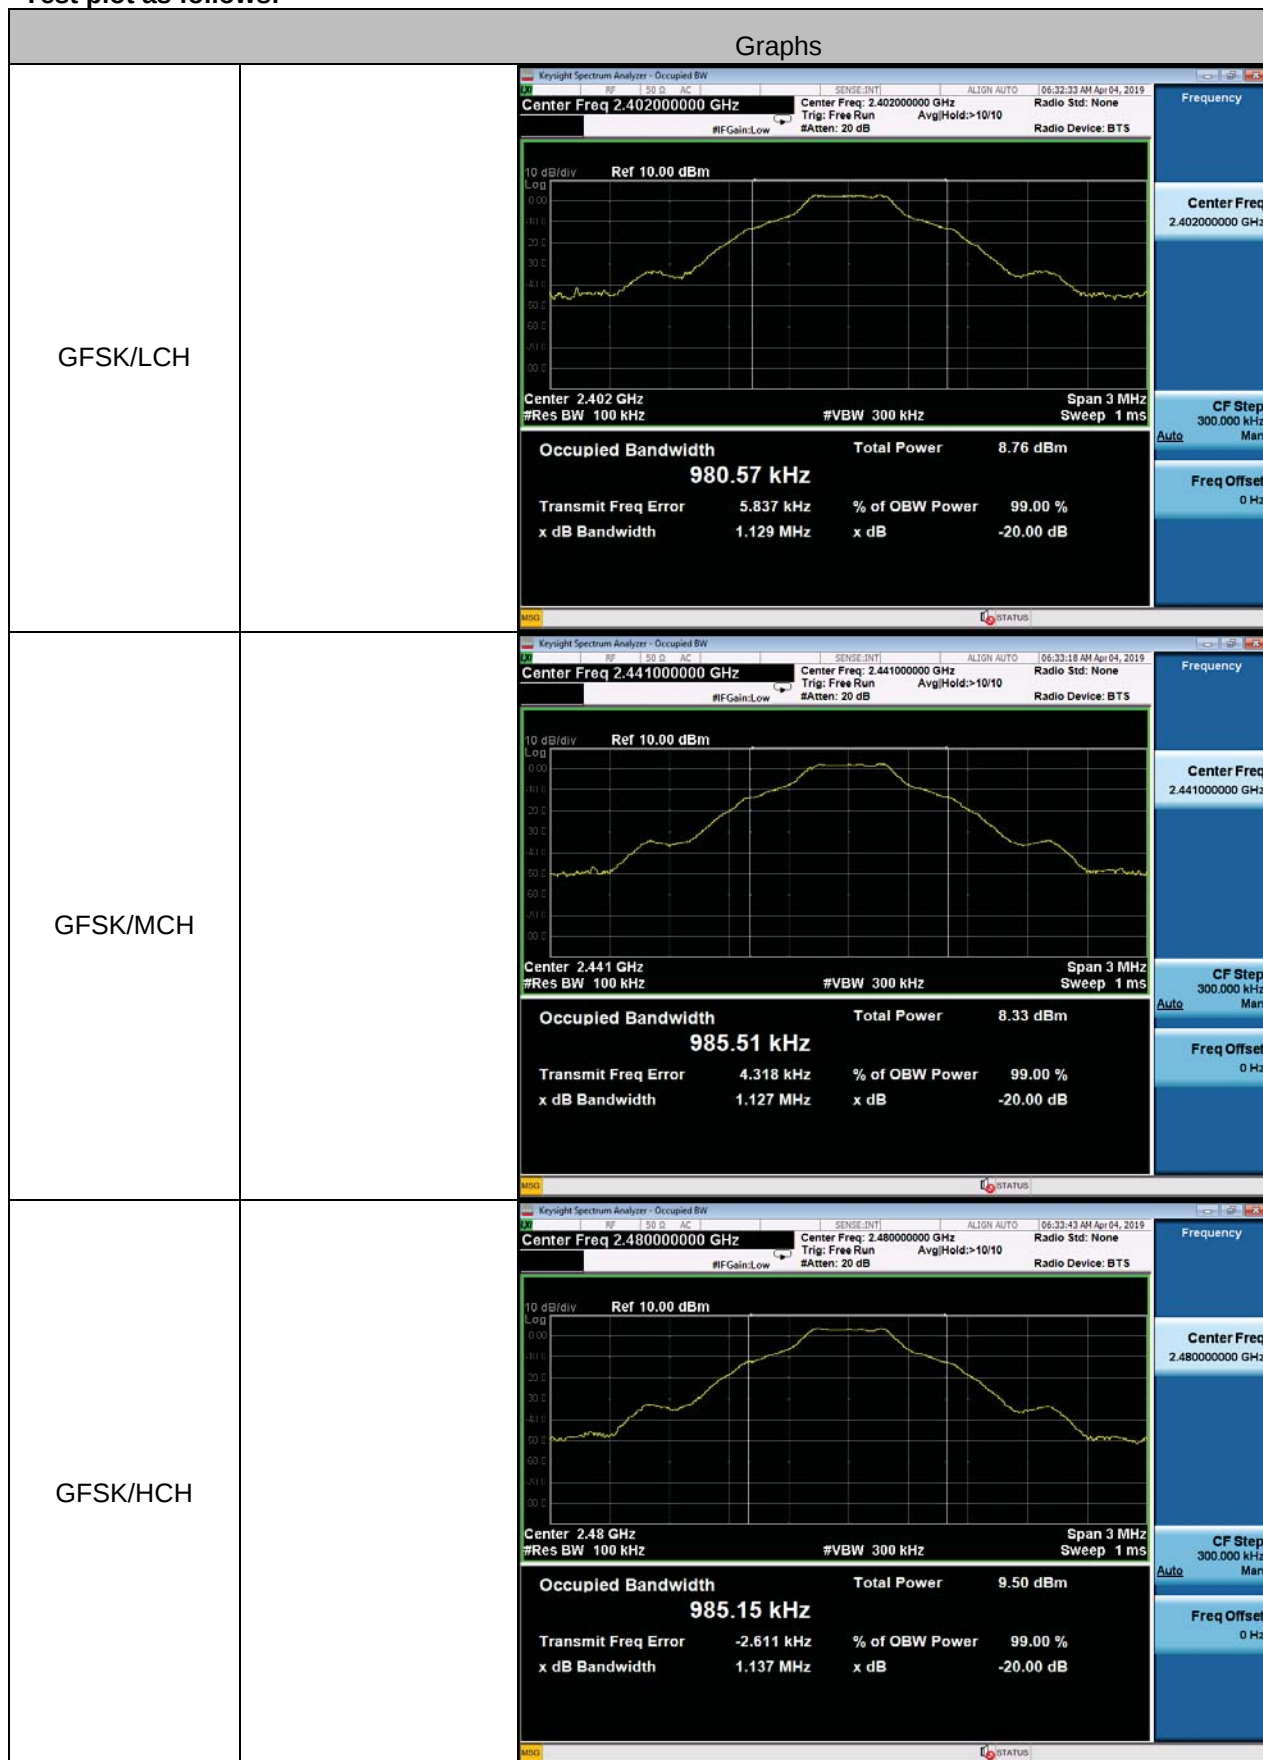
5.4 20dB Occupy Bandwidth

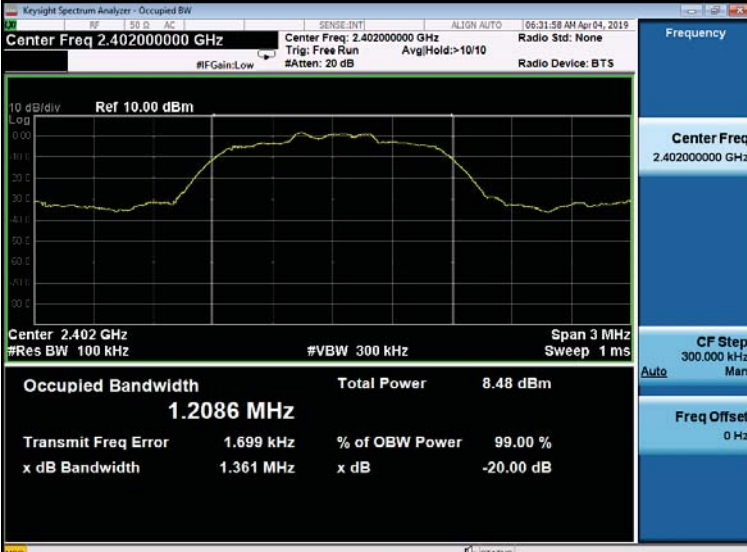
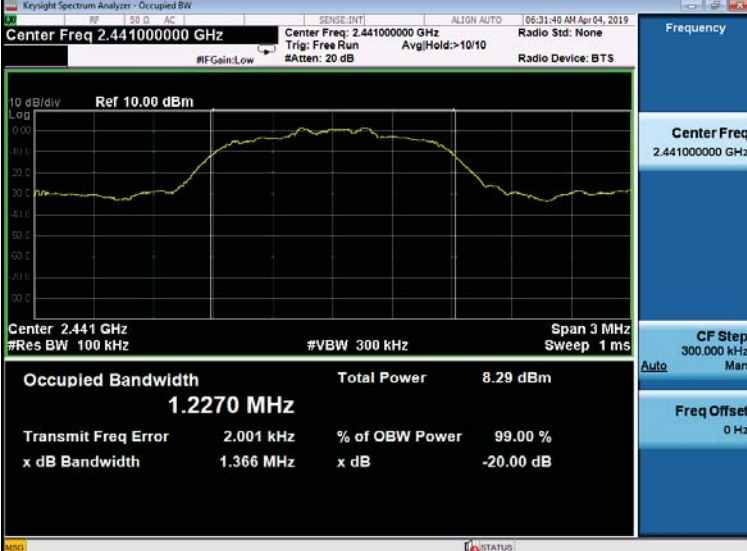
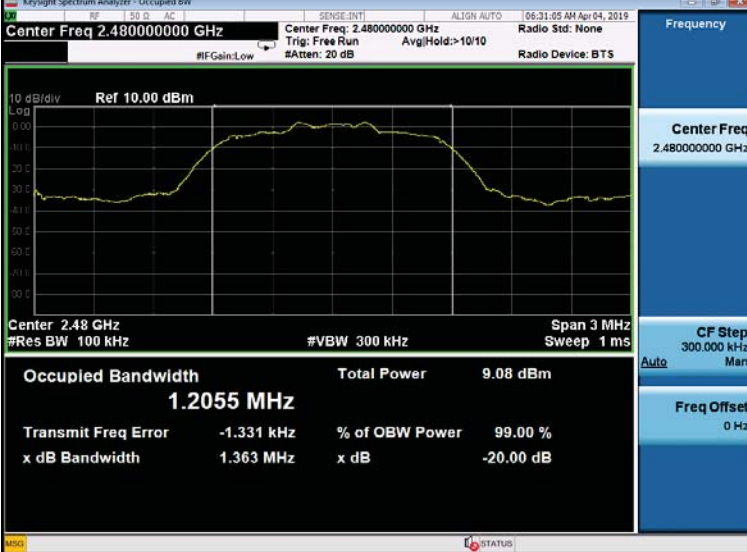
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

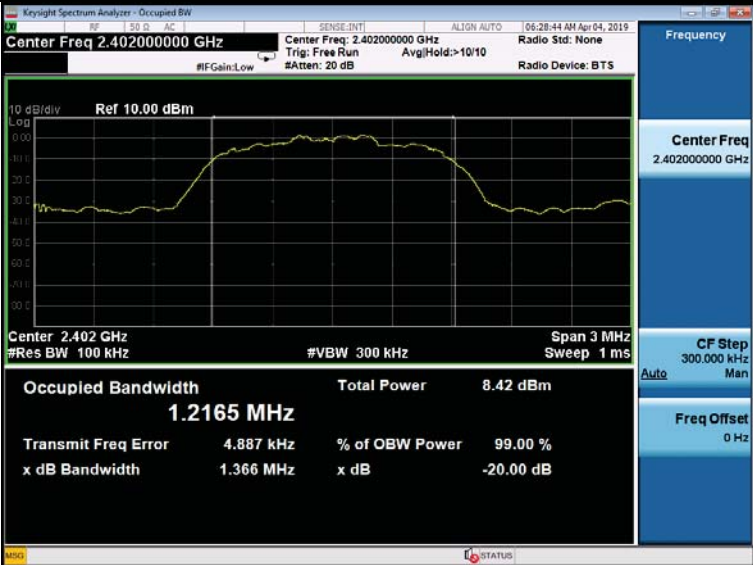
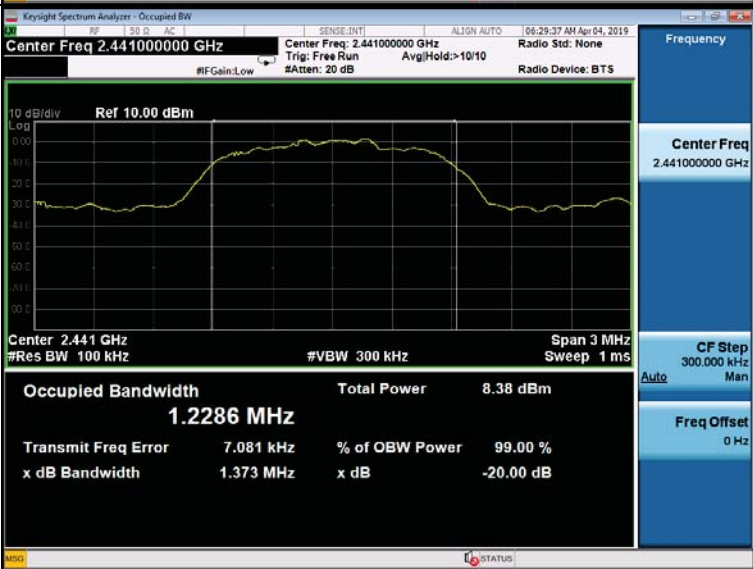
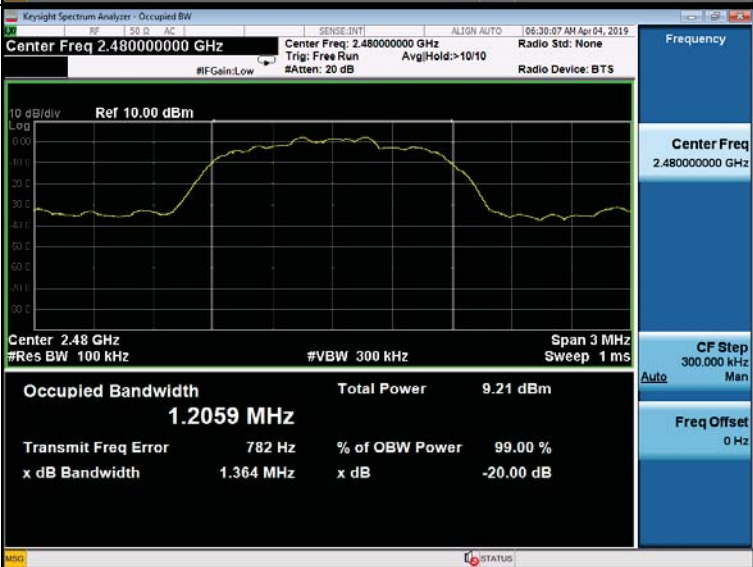
Measurement Data

Test channel	20dB Occupy Bandwidth (MHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	1.129	1.361	1.366
Middle	1.127	1.366	1.373
Highest	1.137	1.363	1.364

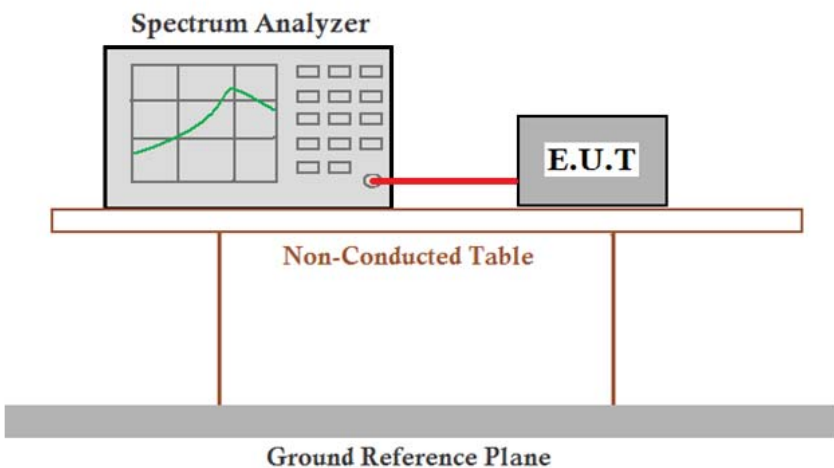
Test plot as follows:



$\pi/4$DQPSK/LCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #FGain: Low #Atten: 20 dB 10 dB/div Ref 10.00 dBm Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms Occupied Bandwidth 1.2086 MHz Total Power 8.48 dBm Transmit Freq Error 1.699 kHz % of OBW Power 99.00 % x dB Bandwidth 1.361 MHz x dB -20.00 dB Frequency Center Freq 2.40200000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz
$\pi/4$DQPSK/MCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #FGain: Low #Atten: 20 dB 10 dB/div Ref 10.00 dBm Center 2.441 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms Occupied Bandwidth 1.2270 MHz Total Power 8.29 dBm Transmit Freq Error 2.001 kHz % of OBW Power 99.00 % x dB Bandwidth 1.366 MHz x dB -20.00 dB Frequency Center Freq 2.44100000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz
$\pi/4$DQPSK/HCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #FGain: Low #Atten: 20 dB 10 dB/div Ref 10.00 dBm Center 2.48 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms Occupied Bandwidth 1.2055 MHz Total Power 9.08 dBm Transmit Freq Error -1.331 kHz % of OBW Power 99.00 % x dB Bandwidth 1.363 MHz x dB -20.00 dB Frequency Center Freq 2.48000000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz

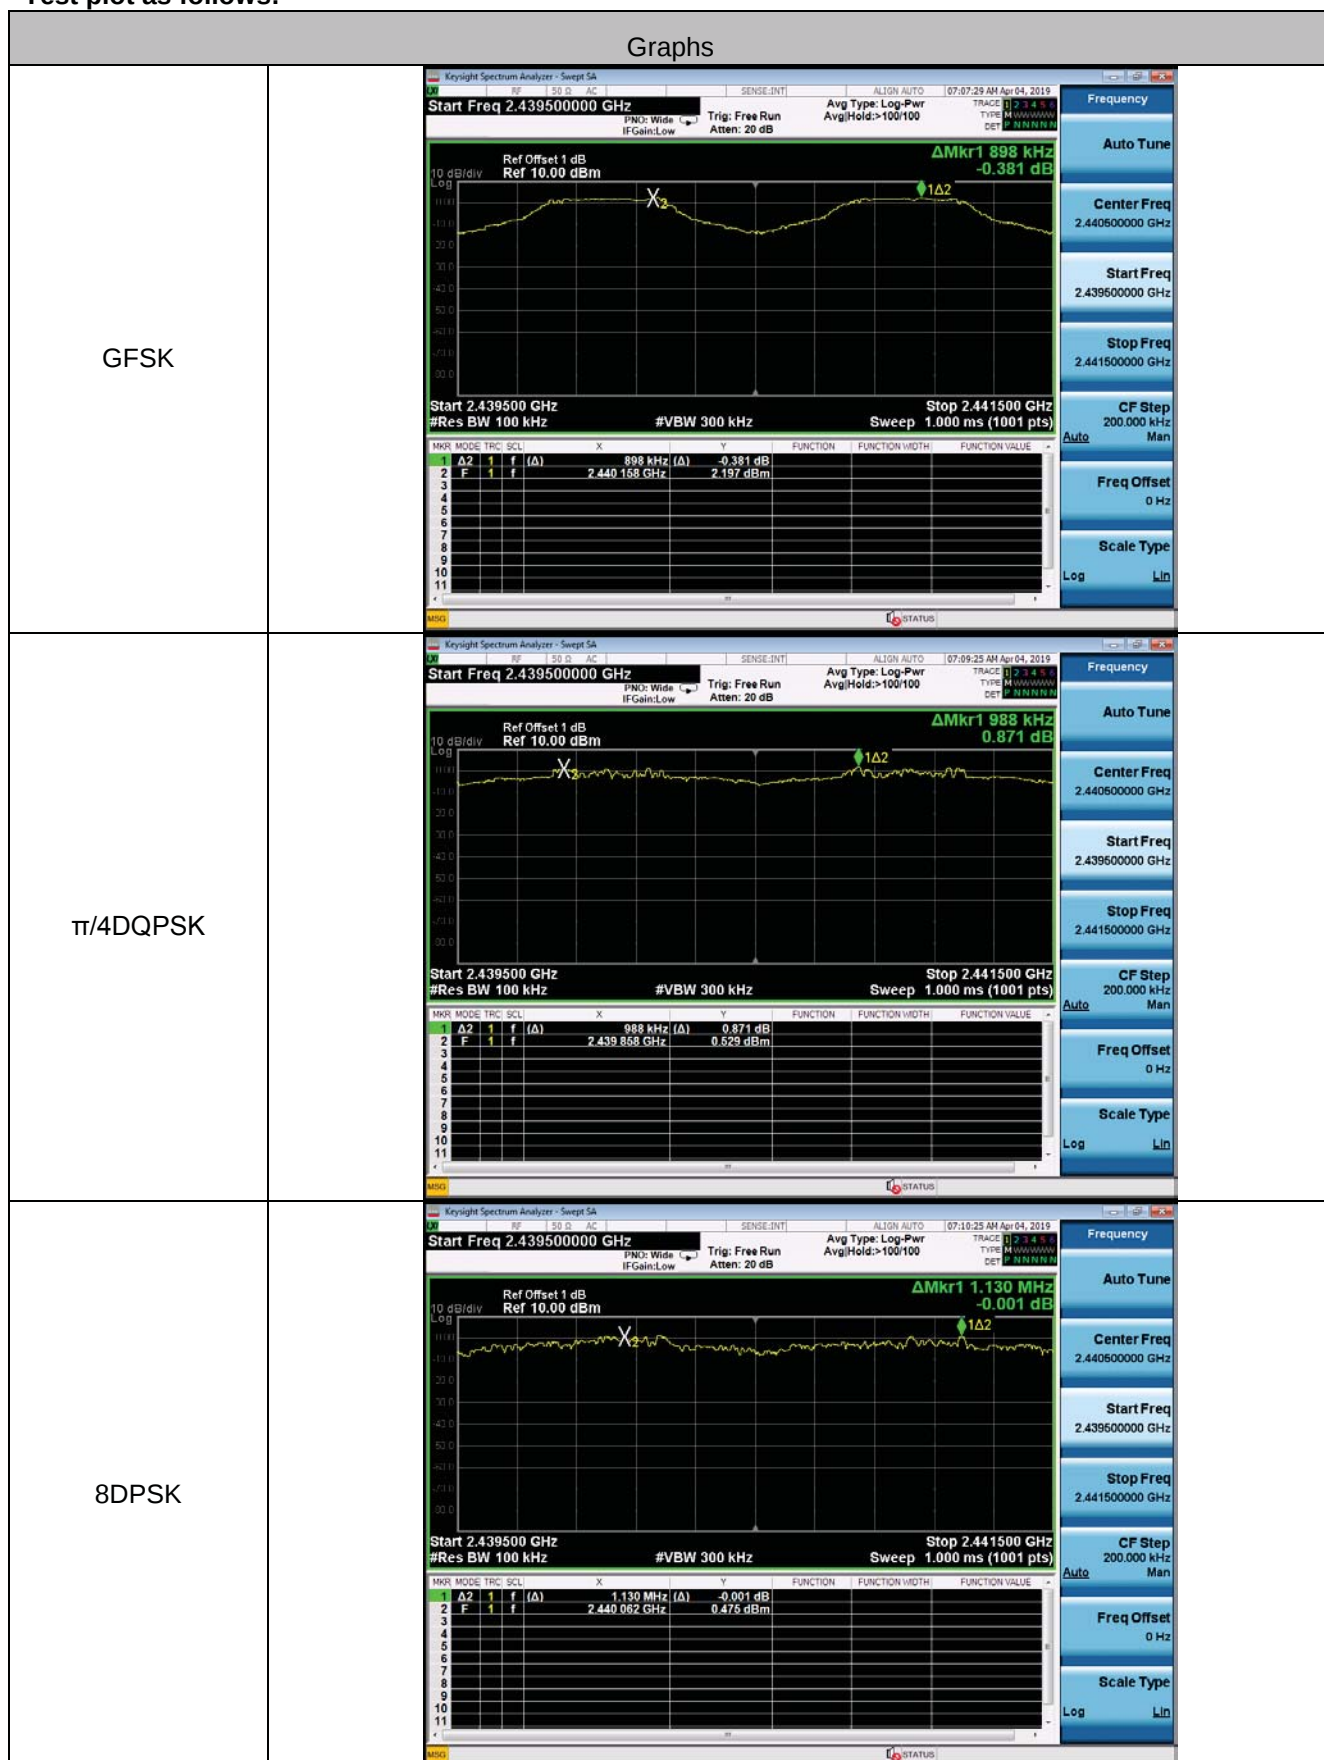
8DPSK/LCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #FGain: Low #Atten: 20 dB Ref 10.00 dBm Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms Occupied Bandwidth 1.2165 MHz Total Power 8.42 dBm Transmit Freq Error 4.887 kHz % of OBW Power 99.00 % x dB Bandwidth 1.366 MHz x dB -20.00 dB Frequency Center Freq 2.40200000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz
8DPSK/MCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #FGain: Low #Atten: 20 dB Ref 10.00 dBm Center 2.441 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms Occupied Bandwidth 1.2286 MHz Total Power 8.38 dBm Transmit Freq Error 7.081 kHz % of OBW Power 99.00 % x dB Bandwidth 1.373 MHz x dB -20.00 dB Frequency Center Freq 2.44100000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz
8DPSK/HCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #FGain: Low #Atten: 20 dB Ref 10.00 dBm Center 2.48 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms Occupied Bandwidth 1.2059 MHz Total Power 9.21 dBm Transmit Freq Error 782 Hz % of OBW Power 99.00 % x dB Bandwidth 1.364 MHz x dB -20.00 dB Frequency Center Freq 2.48000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz

5.5 Frequencies Separation

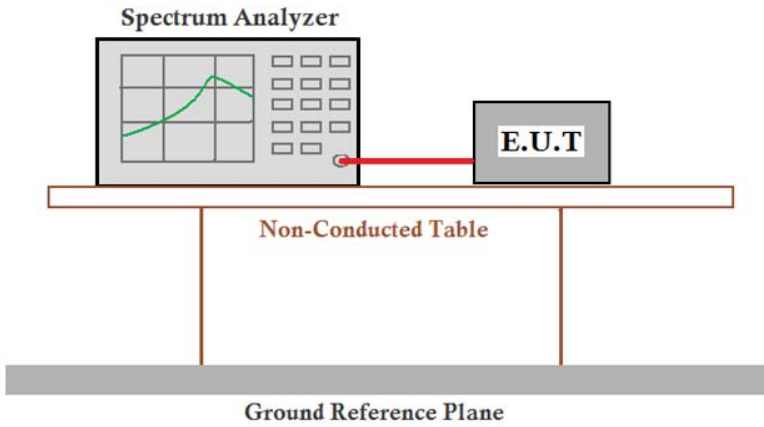
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	2/3 of the 20dB bandwidth
	Remark: the transmission power is less than 0.125W.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH39	0.898	2/3*20dB bandwidth	Pass
	CH40			
$\pi/4$ DQPSK	CH39	0.988	2/3*20dB bandwidth	Pass
	CH40			
8DPSK	CH39	1.130	2/3*20dB bandwidth	Pass
	CH40			

Test plot as follows:



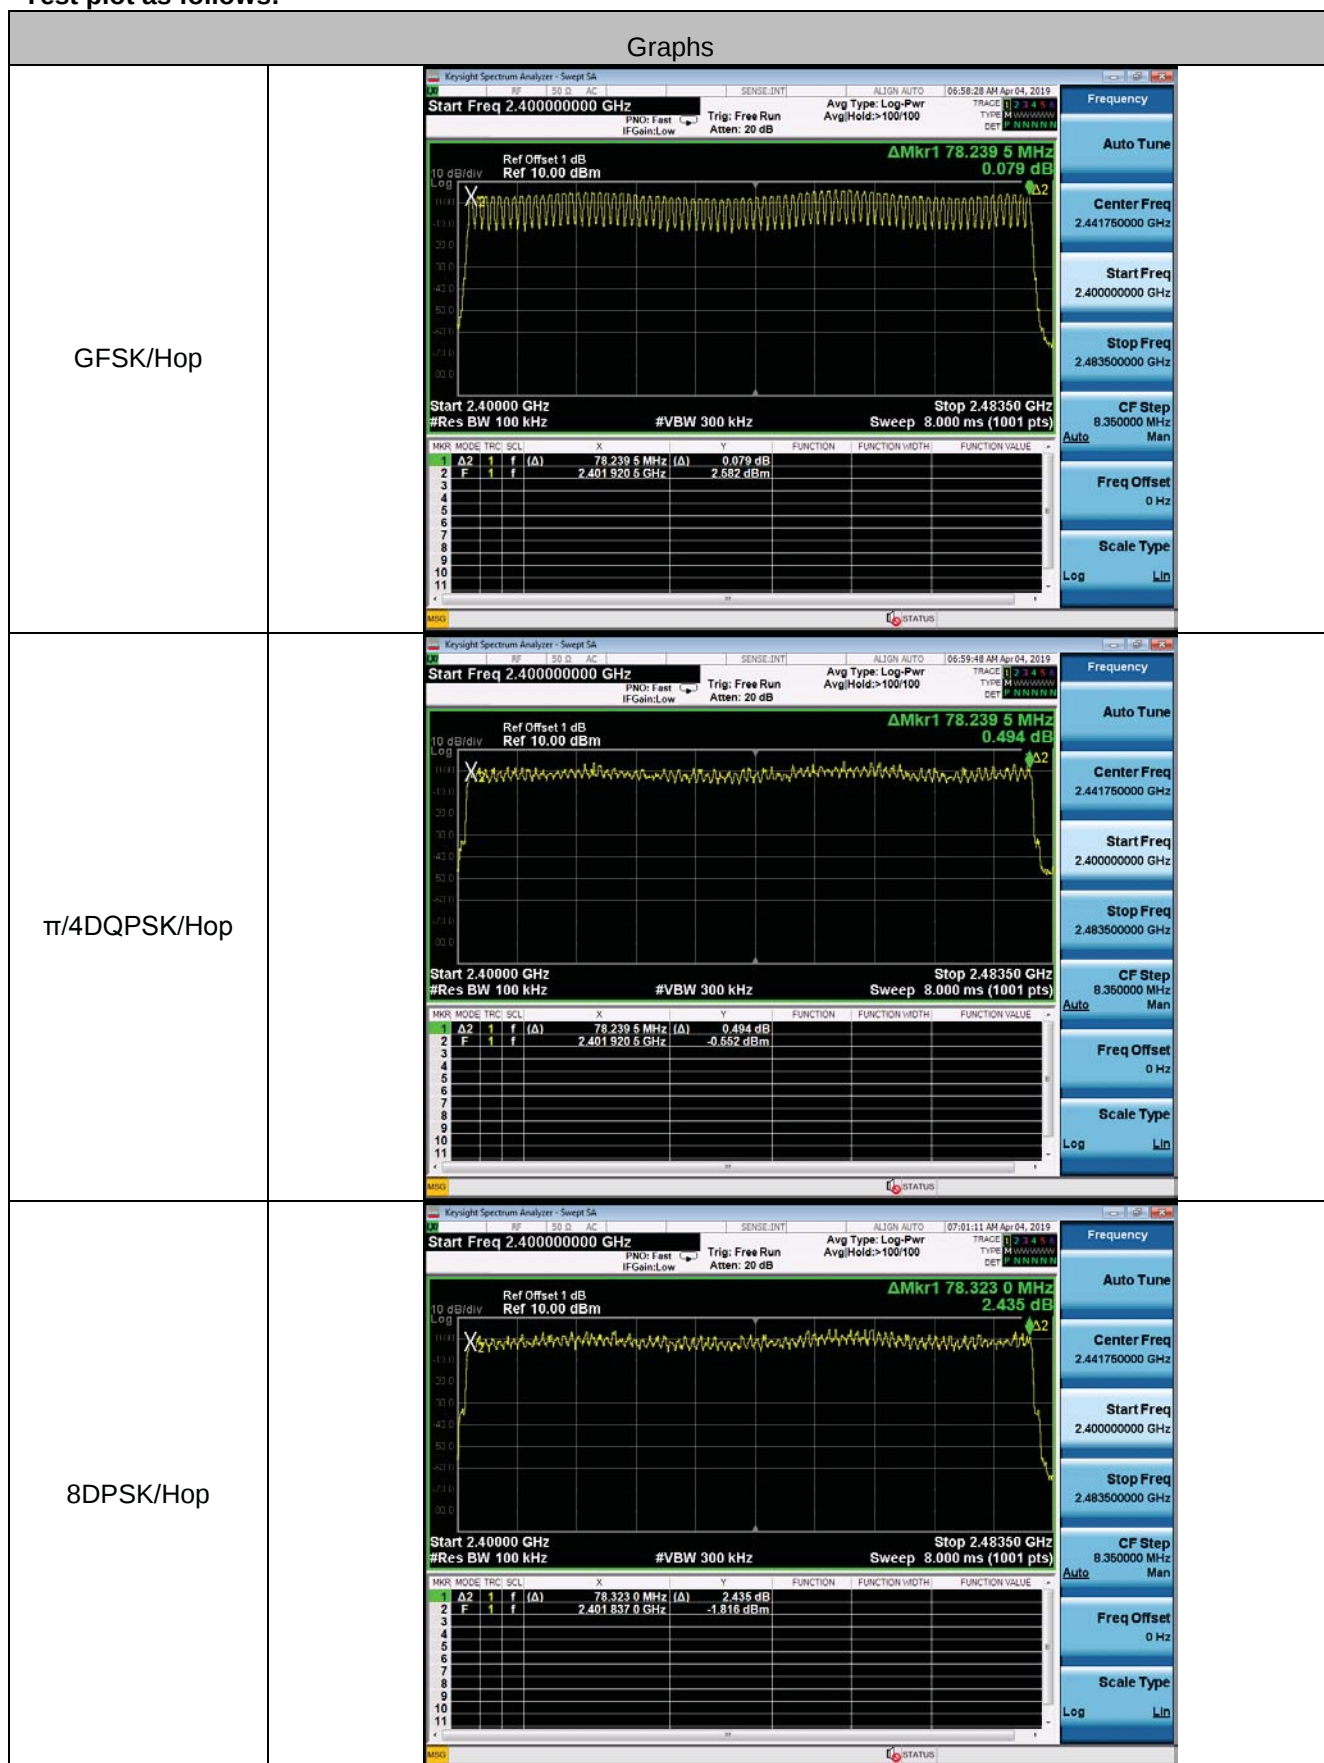
5.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	At least 15 channels
Exploratory Test Mode:	hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

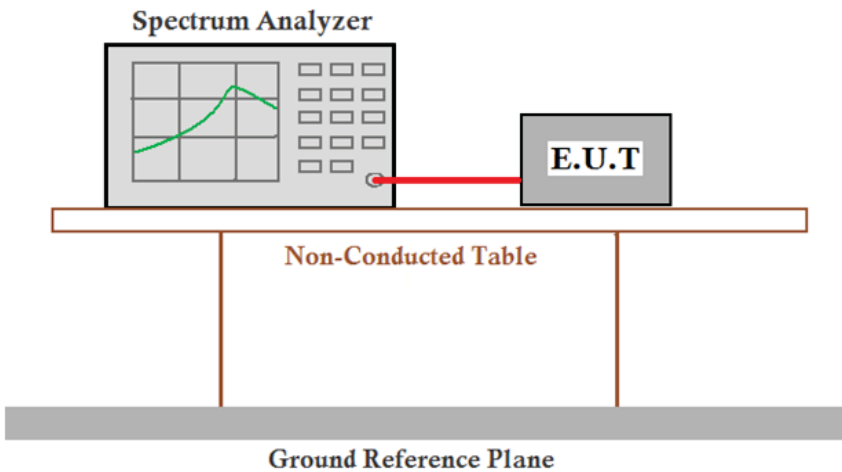
Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥ 15
$\pi/4$ DQPSK	79	≥ 15
8DPSK	79	≥ 15

Test plot as follows:



5.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass

Measurement Data

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time[s]	Limit (second)
GFSK	DH1	MCH	0.369	0.118	≤0.4
GFSK	DH3	MCH	1.633	0.261	≤0.4
GFSK	DH5	MCH	2.874	0.307	≤0.4
π/4DQPSK	2DH1	MCH	0.380	0.122	≤0.4
π/4DQPSK	2DH3	MCH	1.632	0.261	≤0.4
π/4DQPSK	2DH5	MCH	2.880	0.307	≤0.4
8DPSK	3DH1	MCH	0.382	0.122	≤0.4
8DPSK	3DH3	MCH	1.635	0.262	≤0.4
8DPSK	3DH5	MCH	2.886	0.308	≤0.4

Remark:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

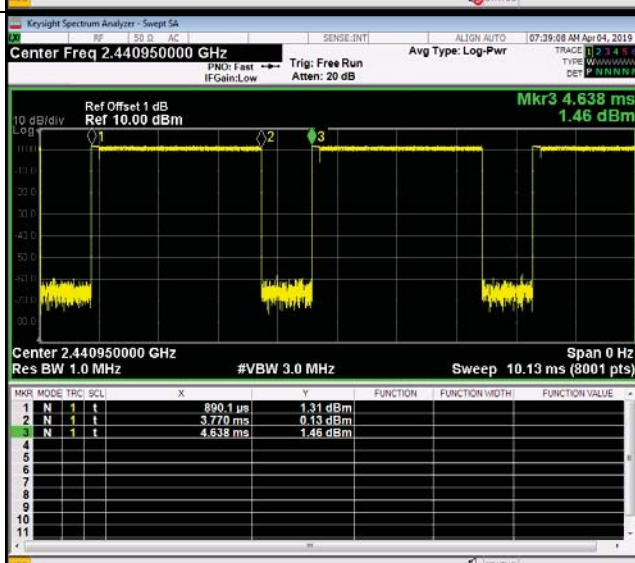
DH1/2DH1/3DH1 Dwell time = Burst Width(ms)*(1600/ (2*79))*31.6

DH3/2DH3/3DH3 Dwell time = Burst Width (ms)*(1600/ (4*79))*31.6

DH5/2DH5/3DH5 Dwell time = Burst Width (ms)*(1600/ (6*79))*31.6

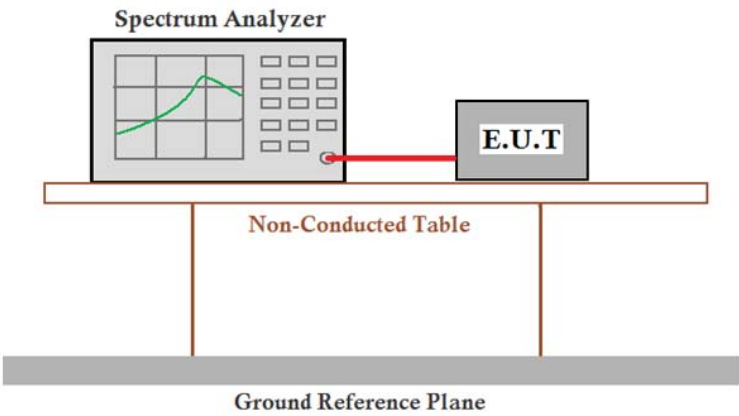
Test plot as follows:



$\pi/4$ DQPSK _2DH1/MCH	 <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>580.0 us</td><td>0.08 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>960.0 us</td><td>-1.13 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>1.831 ms</td><td>0.08 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	580.0 us	0.08 dBm				2	N	1	t	960.0 us	-1.13 dBm				3	N	1	t	1.831 ms	0.08 dBm				Frequency Auto Tune Center Freq 2.440950000 GHz Start Freq 2.440950000 GHz Stop Freq 2.440950000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																														
1	N	1	t	580.0 us	0.08 dBm																																	
2	N	1	t	960.0 us	-1.13 dBm																																	
3	N	1	t	1.831 ms	0.08 dBm																																	
$\pi/4$ DQPSK _2DH3/MCH	 <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>444.1 us</td><td>1.40 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>2.076 ms</td><td>0.16 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>2.942 ms</td><td>1.02 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	444.1 us	1.40 dBm				2	N	1	t	2.076 ms	0.16 dBm				3	N	1	t	2.942 ms	1.02 dBm				Frequency Auto Tune Center Freq 2.440950000 GHz Start Freq 2.440950000 GHz Stop Freq 2.440950000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																														
1	N	1	t	444.1 us	1.40 dBm																																	
2	N	1	t	2.076 ms	0.16 dBm																																	
3	N	1	t	2.942 ms	1.02 dBm																																	
$\pi/4$ DQPSK _2DH5/MCH	 <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>890.1 us</td><td>1.31 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>3.779 ms</td><td>0.13 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>4.638 ms</td><td>1.46 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	890.1 us	1.31 dBm				2	N	1	t	3.779 ms	0.13 dBm				3	N	1	t	4.638 ms	1.46 dBm				Frequency Auto Tune Center Freq 2.440950000 GHz Start Freq 2.440950000 GHz Stop Freq 2.440950000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																														
1	N	1	t	890.1 us	1.31 dBm																																	
2	N	1	t	3.779 ms	0.13 dBm																																	
3	N	1	t	4.638 ms	1.46 dBm																																	

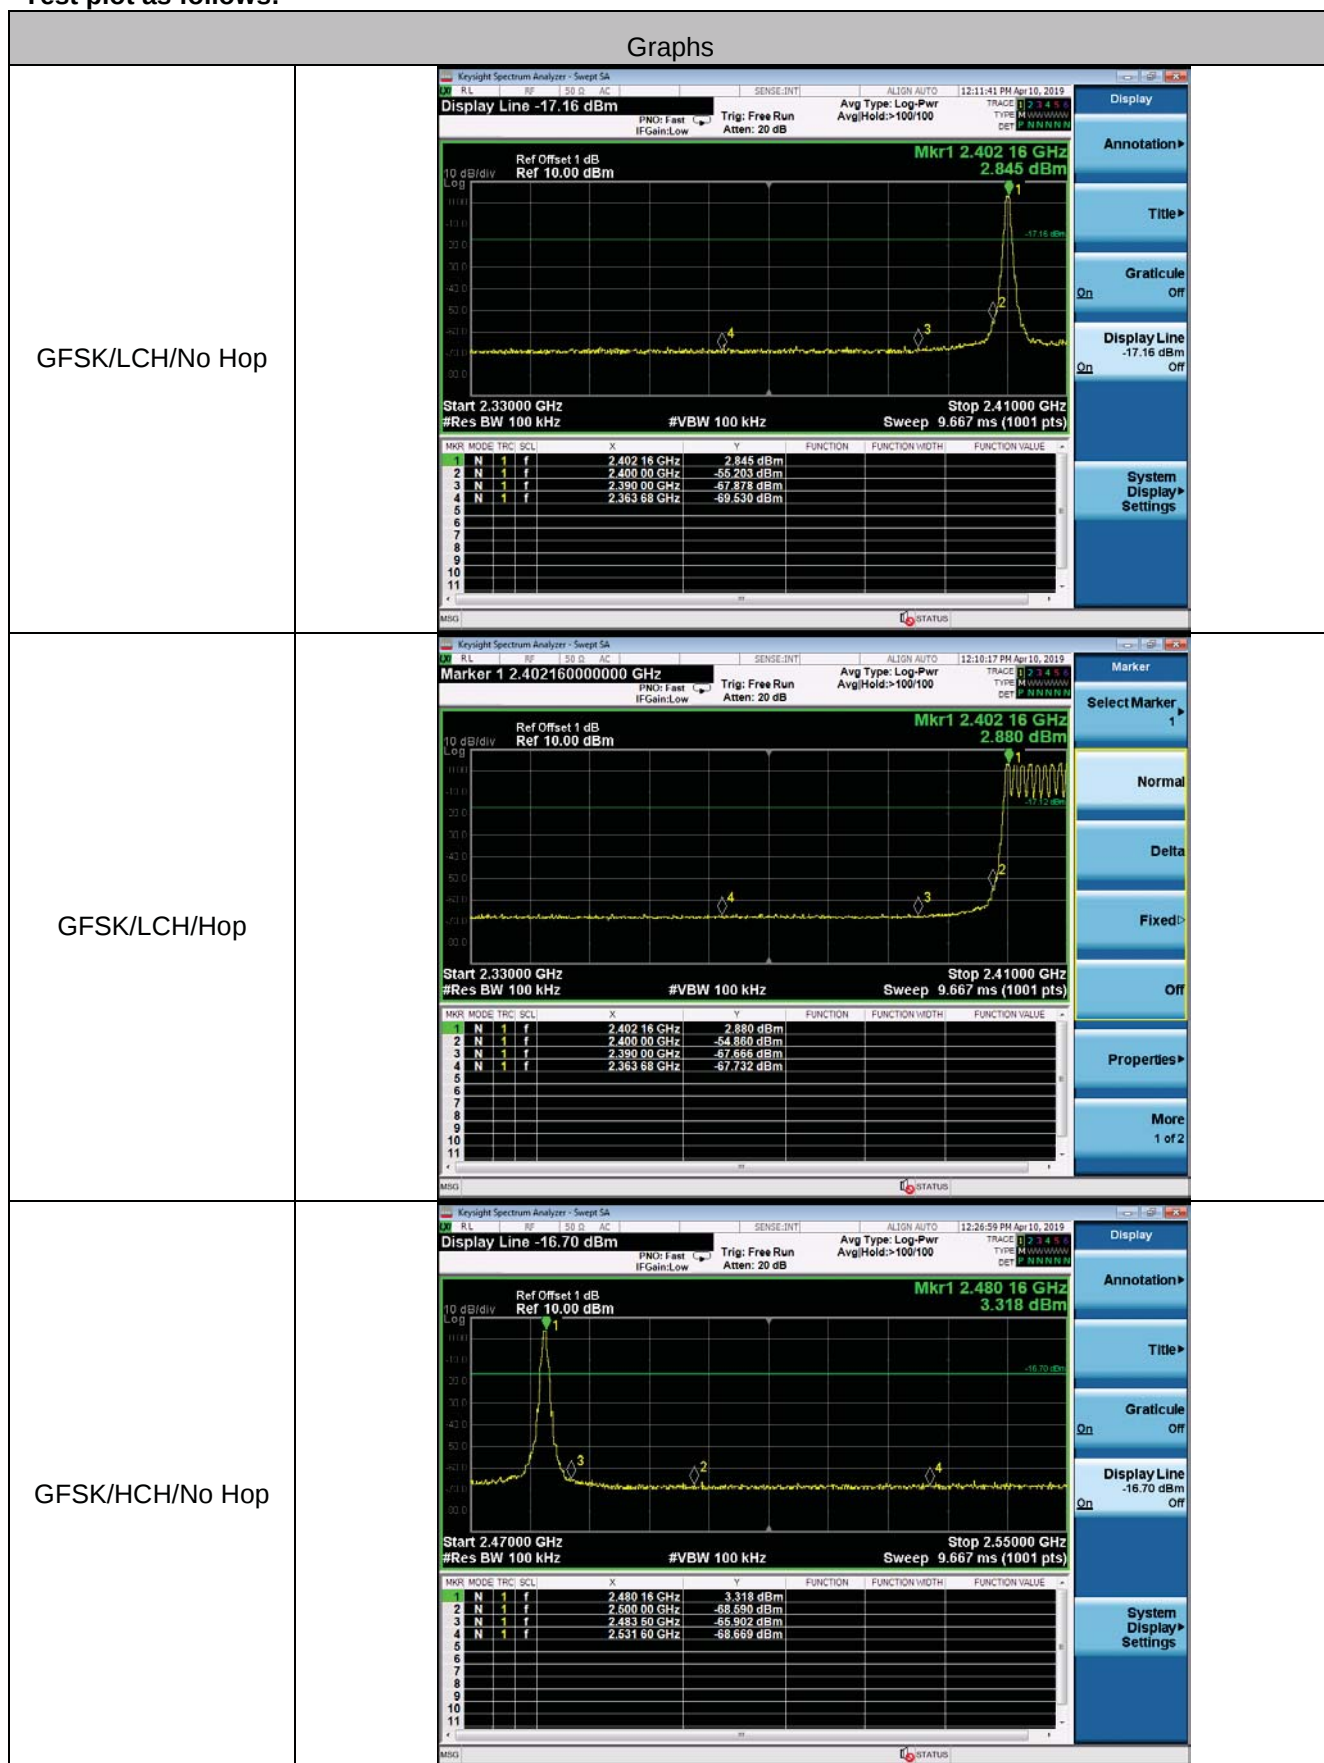
8DPSK_3DH1/MCH	KeySight Spectrum Analyzer - Swept SA Center Freq 2.440950000 GHz Ref Offset 1 dB Ref 10.00 dBm Mkr3 1.613 ms 1.03 dBm Center 2.440950000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 4.000 ms (8001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>364.6 us</td><td>1.30 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>746.3 us</td><td>0.33 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>1.613 ms</td><td>1.03 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.440950000 GHz Start Freq 2.440950000 GHz Stop Freq 2.440950000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz Scale Type Log Lin	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	364.6 us	1.30 dBm				2	N	1	t	746.3 us	0.33 dBm				3	N	1	t	1.613 ms	1.03 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	364.6 us	1.30 dBm																																
2	N	1	t	746.3 us	0.33 dBm																																
3	N	1	t	1.613 ms	1.03 dBm																																
8DPSK_3DH3/MCH	KeySight Spectrum Analyzer - Swept SA Center Freq 2.440950000 GHz Ref Offset 1 dB Ref 10.00 dBm Mkr3 3.095 ms 1.25 dBm Center 2.440950000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 8.000 ms (8001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>592.6 us</td><td>1.31 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>2.228 ms</td><td>-3.14 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>3.095 ms</td><td>1.25 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.440950000 GHz Start Freq 2.440950000 GHz Stop Freq 2.440950000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz Scale Type Log Lin	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	592.6 us	1.31 dBm				2	N	1	t	2.228 ms	-3.14 dBm				3	N	1	t	3.095 ms	1.25 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	592.6 us	1.31 dBm																																
2	N	1	t	2.228 ms	-3.14 dBm																																
3	N	1	t	3.095 ms	1.25 dBm																																
8DPSK_3DH5/MCH	KeySight Spectrum Analyzer - Swept SA Center Freq 2.440950000 GHz Ref Offset 1 dB Ref 10.00 dBm Mkr3 4.434 ms 1.36 dBm Center 2.440950000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>582.5 us</td><td>0.34 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>3.688 ms</td><td>0.38 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>4.434 ms</td><td>1.36 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.440950000 GHz Start Freq 2.440950000 GHz Stop Freq 2.440950000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz Scale Type Log Lin	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	582.5 us	0.34 dBm				2	N	1	t	3.688 ms	0.38 dBm				3	N	1	t	4.434 ms	1.36 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	582.5 us	0.34 dBm																																
2	N	1	t	3.688 ms	0.38 dBm																																
3	N	1	t	4.434 ms	1.36 dBm																																

5.8 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: $Offset = cable\ loss + attenuation\ factor$.
Limit:	In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Mode	Test Channel	Frequency [MHz]	Frequency Hopping	Emission Level [dBm]	Limit [dBm]	Result
GFSK	LCH	2400	Off	-55.203	-17.16	PASS
			On	-54.860	-17.12	PASS
GFSK	HCH	2483.5	Off	-65.902	-16.70	PASS
			On	-66.660	-16.74	PASS
$\pi/4$ DQPSK	LCH	2400	Off	-54.088	-18.41	PASS
			On	-55.899	-18.40	PASS
$\pi/4$ DQPSK	HCH	2483.5	Off	-45.750	-18.13	PASS
			On	-65.580	-17.56	PASS
8DPSK	LCH	2400	Off	-54.321	-18.39	PASS
			On	-55.183	-18.47	PASS
8DPSK	HCH	2483.5	Off	-61.995	-18.06	PASS
			On	-64.731	-17.68	PASS

Test plot as follows:

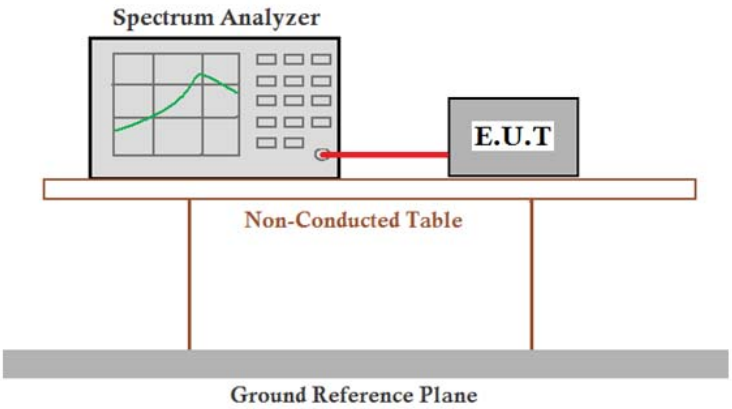


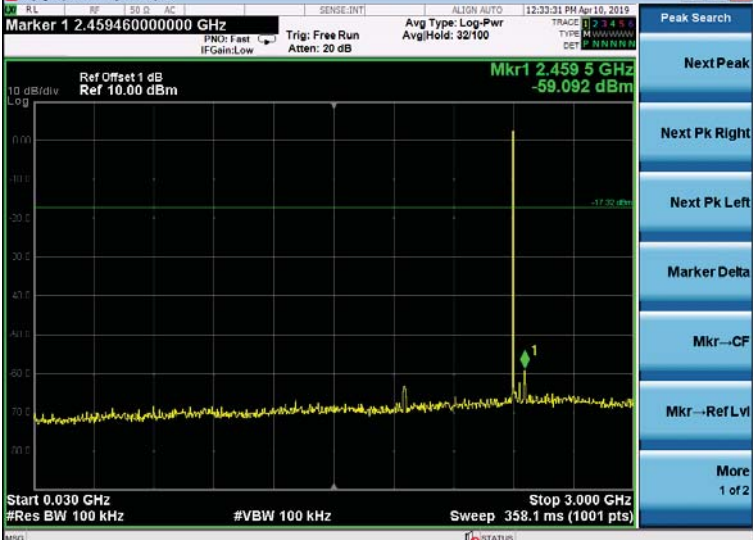
GFSK/HCH/Hop	KeySight Spectrum Analyzer - Sweep SA RL RF 50 dB AC SENSE:INT ALIGN: AUTO 12:25:46 PM Apr 10, 2019 Display Line -16.74 dBm PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 TYPE M N W W W W W W DET P N N N N N N Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.475 92 GHz 3.259 dBm 10 dB/div Log -10.0 -20.0 -30.0 -40.0 -50.0 -60.0 -70.0 -80.0 -16.74 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.475 92 GHz</td><td>3.259 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-58.019 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-58.650 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.528 16 GHz</td><td>-58.111 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Display Annotation Title Graticule Qn Off Display Line Qn Off -16.74 dBm System Display Settings	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.475 92 GHz	3.259 dBm				2	N	1	f	2.500 00 GHz	-58.019 dBm				3	N	1	f	2.483 50 GHz	-58.650 dBm				4	N	1	f	2.528 16 GHz	-58.111 dBm				5									6									7									8									9									10									11								
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.475 92 GHz	3.259 dBm																																																																																																								
2	N	1	f	2.500 00 GHz	-58.019 dBm																																																																																																								
3	N	1	f	2.483 50 GHz	-58.650 dBm																																																																																																								
4	N	1	f	2.528 16 GHz	-58.111 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
$\pi/4$ DQPSK/LCH/No Hop	KeySight Spectrum Analyzer - Sweep SA RL RF 50 dB AC SENSE:INT ALIGN: AUTO 12:14:24 PM Apr 10, 2019 Display Line -18.41 dBm PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 TYPE M N W W W W W W DET P N N N N N N Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.401 84 GHz 1.591 dBm 10 dB/div Log -10.0 -20.0 -30.0 -40.0 -50.0 -60.0 -70.0 -80.0 -18.41 dBm Start 2.33000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.41000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 84 GHz</td><td>1.591 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-54.088 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-58.468 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.368 48 GHz</td><td>-58.267 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Display Annotation Title Graticule Qn Off Display Line Qn Off -18.41 dBm System Display Settings	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 84 GHz	1.591 dBm				2	N	1	f	2.400 00 GHz	-54.088 dBm				3	N	1	f	2.390 00 GHz	-58.468 dBm				4	N	1	f	2.368 48 GHz	-58.267 dBm				5									6									7									8									9									10									11								
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.401 84 GHz	1.591 dBm																																																																																																								
2	N	1	f	2.400 00 GHz	-54.088 dBm																																																																																																								
3	N	1	f	2.390 00 GHz	-58.468 dBm																																																																																																								
4	N	1	f	2.368 48 GHz	-58.267 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
$\pi/4$ DQPSK/LCH/Hop	KeySight Spectrum Analyzer - Sweep SA RL RF 50 dB AC SENSE:INT ALIGN: AUTO 12:15:37 PM Apr 10, 2019 Display Line -18.40 dBm PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 TYPE M N W W W W W W DET P N N N N N N Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.407 84 GHz 1.605 dBm 10 dB/div Log -10.0 -20.0 -30.0 -40.0 -50.0 -60.0 -70.0 -80.0 -18.40 dBm Start 2.33000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.41000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.407 84 GHz</td><td>1.605 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-55.899 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-59.383 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.367 68 GHz</td><td>-57.400 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Display Annotation Title Graticule Qn Off Display Line Qn Off -18.40 dBm System Display Settings	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.407 84 GHz	1.605 dBm				2	N	1	f	2.400 00 GHz	-55.899 dBm				3	N	1	f	2.390 00 GHz	-59.383 dBm				4	N	1	f	2.367 68 GHz	-57.400 dBm				5									6									7									8									9									10									11								
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.407 84 GHz	1.605 dBm																																																																																																								
2	N	1	f	2.400 00 GHz	-55.899 dBm																																																																																																								
3	N	1	f	2.390 00 GHz	-59.383 dBm																																																																																																								
4	N	1	f	2.367 68 GHz	-57.400 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

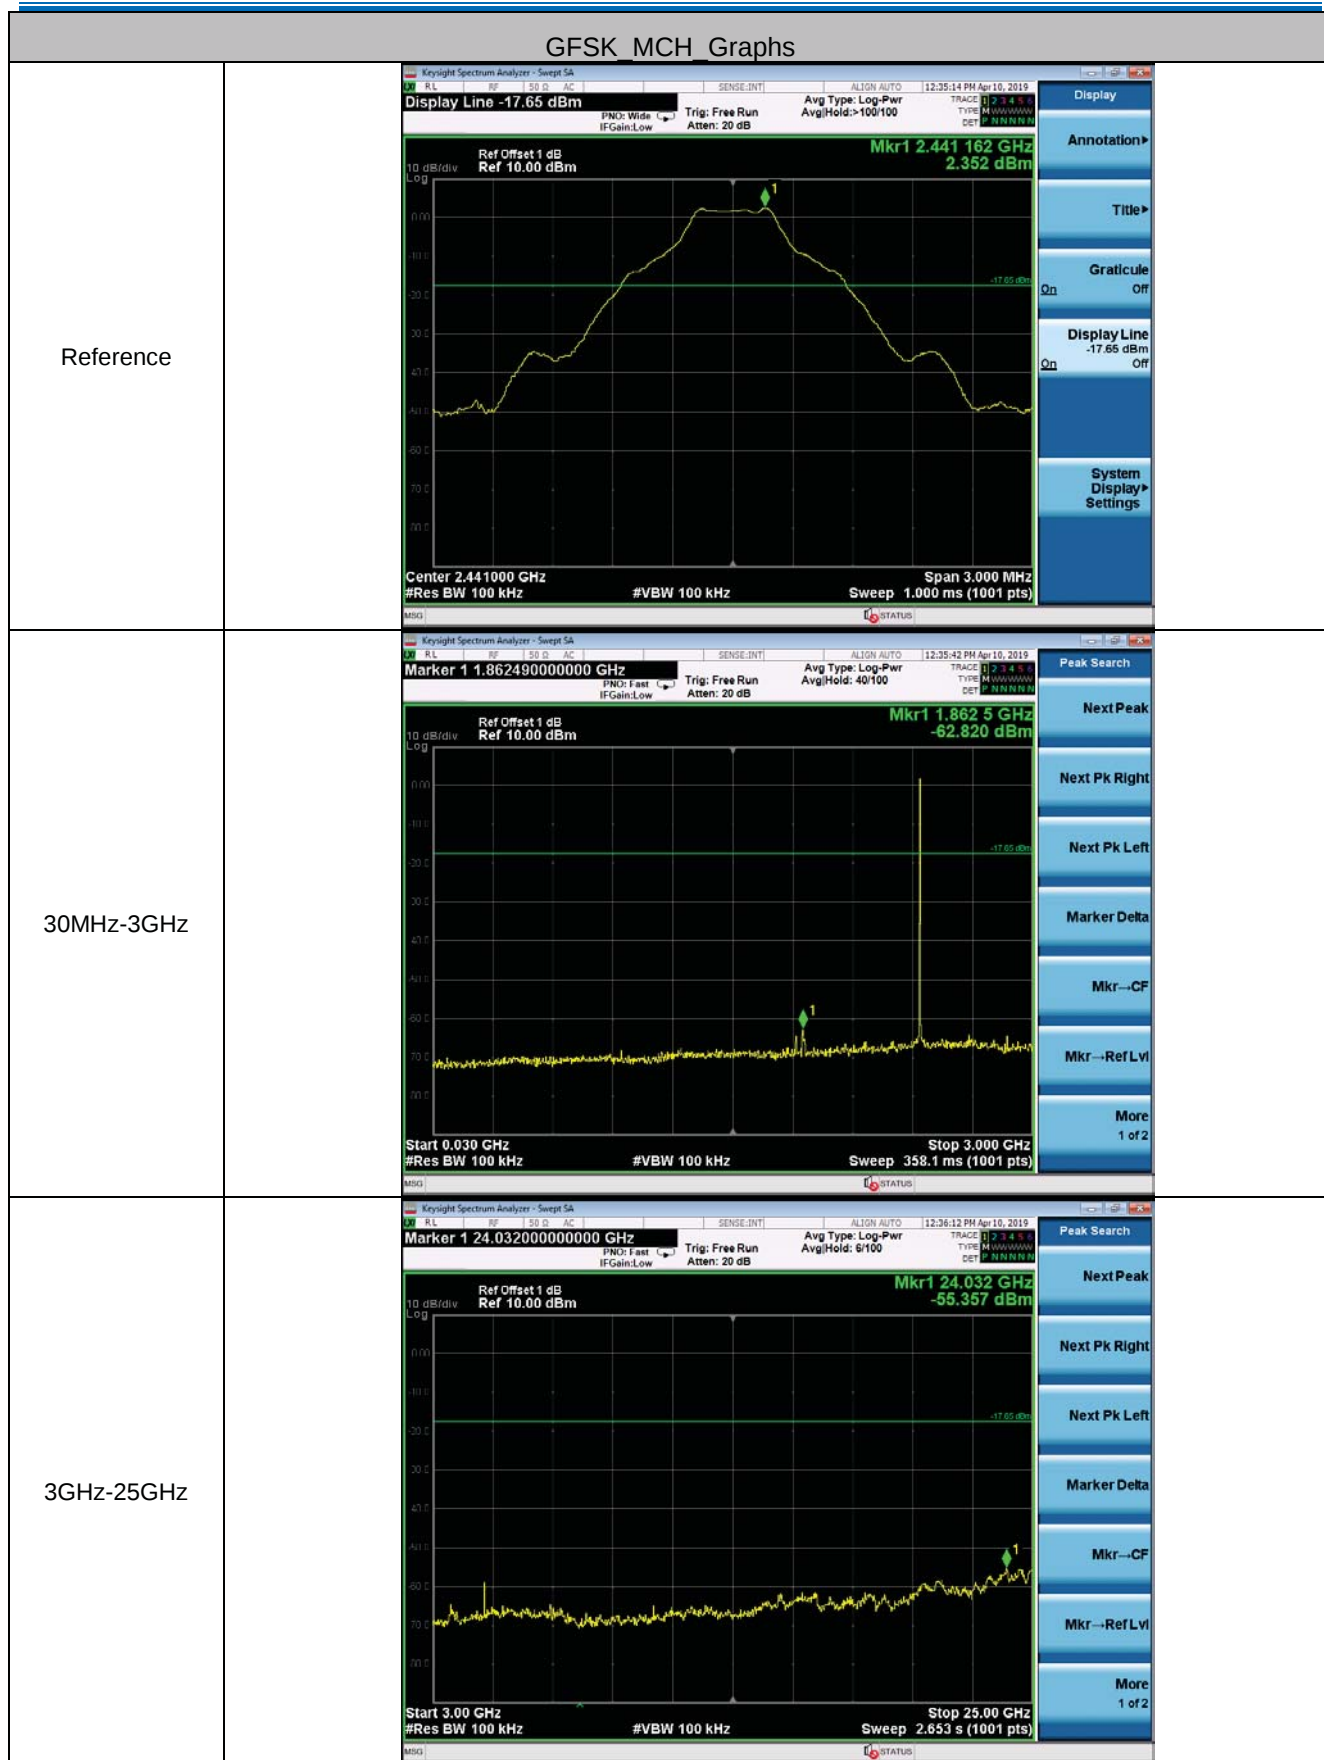
$\pi/4$ DQPSK/HCH/No Hop	Keylight Spectrum Analyzer - Sweep SA Display Line -18.13 dBm Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.480 16 GHz 1.874 dBm Start 2.47000 GHz #Res BW 100 kHz Stop 2.55000 GHz #VBW 100 kHz Sweep 9.667 ms (1001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 16 GHz</td><td>1.874 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-68.841 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-65.750 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.523 60 GHz</td><td>-68.455 dBm</td><td></td><td></td><td></td></tr></tbody></table> Display Annotation▶ Title▶ Graticule On Off Display Line -18.13 dBm On Off System Display Settings	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 16 GHz	1.874 dBm				2	N	1	f	2.500 00 GHz	-68.841 dBm				3	N	1	f	2.483 50 GHz	-65.750 dBm				4	N	1	f	2.523 60 GHz	-68.455 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 16 GHz	1.874 dBm																																									
2	N	1	f	2.500 00 GHz	-68.841 dBm																																									
3	N	1	f	2.483 50 GHz	-65.750 dBm																																									
4	N	1	f	2.523 60 GHz	-68.455 dBm																																									
$\pi/4$ DQPSK/HCH/Hop	Keylight Spectrum Analyzer - Sweep SA Display Line -17.56 dBm Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.478 16 GHz 2.444 dBm Start 2.47000 GHz #Res BW 100 kHz Stop 2.55000 GHz #VBW 100 kHz Sweep 9.667 ms (1001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.478 16 GHz</td><td>2.444 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-68.803 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-65.680 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.531 84 GHz</td><td>-66.438 dBm</td><td></td><td></td><td></td></tr></tbody></table> Display Annotation▶ Title▶ Graticule On Off Display Line -17.56 dBm On Off System Display Settings	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.478 16 GHz	2.444 dBm				2	N	1	f	2.500 00 GHz	-68.803 dBm				3	N	1	f	2.483 50 GHz	-65.680 dBm				4	N	1	f	2.531 84 GHz	-66.438 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.478 16 GHz	2.444 dBm																																									
2	N	1	f	2.500 00 GHz	-68.803 dBm																																									
3	N	1	f	2.483 50 GHz	-65.680 dBm																																									
4	N	1	f	2.531 84 GHz	-66.438 dBm																																									
8DPSK/LCH/No Hop	Keylight Spectrum Analyzer - Sweep SA Display Line -18.39 dBm Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.402 16 GHz 1.614 dBm Start 2.33000 GHz #Res BW 100 kHz Stop 2.41000 GHz #VBW 100 kHz Sweep 9.667 ms (1001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 16 GHz</td><td>1.614 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-64.321 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-68.827 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.368 72 GHz</td><td>-67.412 dBm</td><td></td><td></td><td></td></tr></tbody></table> Display Annotation▶ Title▶ Graticule On Off Display Line -18.39 dBm On Off System Display Settings	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 16 GHz	1.614 dBm				2	N	1	f	2.400 00 GHz	-64.321 dBm				3	N	1	f	2.390 00 GHz	-68.827 dBm				4	N	1	f	2.368 72 GHz	-67.412 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 16 GHz	1.614 dBm																																									
2	N	1	f	2.400 00 GHz	-64.321 dBm																																									
3	N	1	f	2.390 00 GHz	-68.827 dBm																																									
4	N	1	f	2.368 72 GHz	-67.412 dBm																																									

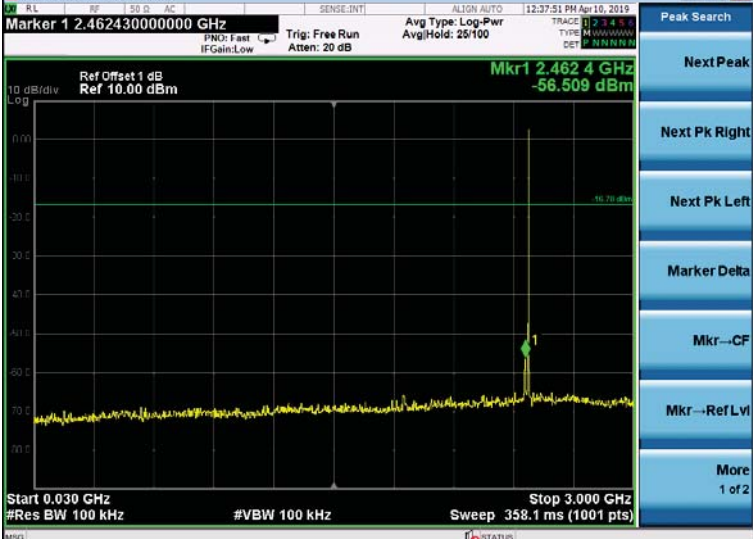
8DPSK/LCH/Hop	KeySight Spectrum Analyzer - Swept SA RL RF 50 dB AC SENSE:INT ALIGN: AUTO 12:18:02 PM Apr 10, 2019 Display Line -18.47 dBm PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 TYPE M N W W W W W W DET P N N N N N N Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.40216 GHz 1.527 dBm 10 dB/div Log (11) (10) (9) (8) (7) (6) (5) (4) (3) (2) (1) (0) (-1) (-2) (-3) (-4) (-5) (-6) (-7) (-8) (-9) (-10) (-11) (-12) (-13) (-14) (-15) (-16) (-17) (-18) (-19) (-20) (-21) (-22) (-23) (-24) (-25) (-26) (-27) (-28) (-29) (-30) (-31) (-32) (-33) (-34) (-35) (-36) (-37) (-38) (-39) (-40) (-41) (-42) (-43) (-44) (-45) (-46) (-47) (-48) (-49) (-50) (-51) (-52) (-53) (-54) (-55) (-56) (-57) (-58) (-59) (-60) (-61) (-62) (-63) (-64) (-65) (-66) (-67) (-68) (-69) (-70) (-71) (-72) (-73) (-74) (-75) (-76) (-77) (-78) (-79) (-80) (-81) (-82) (-83) (-84) (-85) (-86) (-87) (-88) (-89) (-90) (-91) (-92) (-93) (-94) (-95) (-96) (-97) (-98) (-99) (-100) Start 2.33000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.41000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Trig</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.40216 GHz</td><td>1.527 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.40000 GHz</td><td>-58.183 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.39000 GHz</td><td>-67.858 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.34952 GHz</td><td>-67.089 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO Display Annotation Title Graticule Display Line System Display Settings	Mkr	Mode	Trig	SCL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.40216 GHz	1.527 dBm				2	N	1	f	2.40000 GHz	-58.183 dBm				3	N	1	f	2.39000 GHz	-67.858 dBm				4	N	1	f	2.34952 GHz	-67.089 dBm				5									6									7									8									9									10									11								
Mkr	Mode	Trig	SCL	X	Y	Function	Function Width	Function Value																																																																																																					
1	N	1	f	2.40216 GHz	1.527 dBm																																																																																																								
2	N	1	f	2.40000 GHz	-58.183 dBm																																																																																																								
3	N	1	f	2.39000 GHz	-67.858 dBm																																																																																																								
4	N	1	f	2.34952 GHz	-67.089 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
8DPSK/HCH/No Hop	KeySight Spectrum Analyzer - Swept SA RL RF 50 dB AC SENSE:INT ALIGN: AUTO 12:21:18 PM Apr 10, 2019 Display Line -18.06 dBm PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 TYPE M N W W W W W W DET P N N N N N N Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.48000 GHz 1.942 dBm 10 dB/div Log (11) (10) (9) (8) (7) (6) (5) (4) (3) (2) (1) (0) (-1) (-2) (-3) (-4) (-5) (-6) (-7) (-8) (-9) (-10) (-11) (-12) (-13) (-14) (-15) (-16) (-17) (-18) (-19) (-20) (-21) (-22) (-23) (-24) (-25) (-26) (-27) (-28) (-29) (-30) (-31) (-32) (-33) (-34) (-35) (-36) (-37) (-38) (-39) (-40) (-41) (-42) (-43) (-44) (-45) (-46) (-47) (-48) (-49) (-50) (-51) (-52) (-53) (-54) (-55) (-56) (-57) (-58) (-59) (-60) (-61) (-62) (-63) (-64) (-65) (-66) (-67) (-68) (-69) (-70) (-71) (-72) (-73) (-74) (-75) (-76) (-77) (-78) (-79) (-80) (-81) (-82) (-83) (-84) (-85) (-86) (-87) (-88) (-89) (-90) (-91) (-92) (-93) (-94) (-95) (-96) (-97) (-98) (-99) (-100) Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Trig</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.48000 GHz</td><td>1.942 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.50000 GHz</td><td>-67.982 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.48350 GHz</td><td>-61.995 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.51952 GHz</td><td>-68.578 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO Display Annotation Title Graticule Display Line System Display Settings	Mkr	Mode	Trig	SCL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.48000 GHz	1.942 dBm				2	N	1	f	2.50000 GHz	-67.982 dBm				3	N	1	f	2.48350 GHz	-61.995 dBm				4	N	1	f	2.51952 GHz	-68.578 dBm				5									6									7									8									9									10									11								
Mkr	Mode	Trig	SCL	X	Y	Function	Function Width	Function Value																																																																																																					
1	N	1	f	2.48000 GHz	1.942 dBm																																																																																																								
2	N	1	f	2.50000 GHz	-67.982 dBm																																																																																																								
3	N	1	f	2.48350 GHz	-61.995 dBm																																																																																																								
4	N	1	f	2.51952 GHz	-68.578 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
8DPSK/HCH/Hop	KeySight Spectrum Analyzer - Swept SA RL RF 50 dB AC SENSE:INT ALIGN: AUTO 12:20:16 PM Apr 10, 2019 Display Line -17.68 dBm PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 TYPE M N W W W W W W DET P N N N N N N Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.47712 GHz 2.321 dBm 10 dB/div Log (11) (10) (9) (8) (7) (6) (5) (4) (3) (2) (1) (0) (-1) (-2) (-3) (-4) (-5) (-6) (-7) (-8) (-9) (-10) (-11) (-12) (-13) (-14) (-15) (-16) (-17) (-18) (-19) (-20) (-21) (-22) (-23) (-24) (-25) (-26) (-27) (-28) (-29) (-30) (-31) (-32) (-33) (-34) (-35) (-36) (-37) (-38) (-39) (-40) (-41) (-42) (-43) (-44) (-45) (-46) (-47) (-48) (-49) (-50) (-51) (-52) (-53) (-54) (-55) (-56) (-57) (-58) (-59) (-60) (-61) (-62) (-63) (-64) (-65) (-66) (-67) (-68) (-69) (-70) (-71) (-72) (-73) (-74) (-75) (-76) (-77) (-78) (-79) (-80) (-81) (-82) (-83) (-84) (-85) (-86) (-87) (-88) (-89) (-90) (-91) (-92) (-93) (-94) (-95) (-96) (-97) (-98) (-99) (-100) Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Trig</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.47712 GHz</td><td>2.321 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.50000 GHz</td><td>-68.237 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.48350 GHz</td><td>-64.731 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.51320 GHz</td><td>-67.894 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO Display Annotation Title Graticule Display Line System Display Settings	Mkr	Mode	Trig	SCL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.47712 GHz	2.321 dBm				2	N	1	f	2.50000 GHz	-68.237 dBm				3	N	1	f	2.48350 GHz	-64.731 dBm				4	N	1	f	2.51320 GHz	-67.894 dBm				5									6									7									8									9									10									11								
Mkr	Mode	Trig	SCL	X	Y	Function	Function Width	Function Value																																																																																																					
1	N	1	f	2.47712 GHz	2.321 dBm																																																																																																								
2	N	1	f	2.50000 GHz	-68.237 dBm																																																																																																								
3	N	1	f	2.48350 GHz	-64.731 dBm																																																																																																								
4	N	1	f	2.51320 GHz	-67.894 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

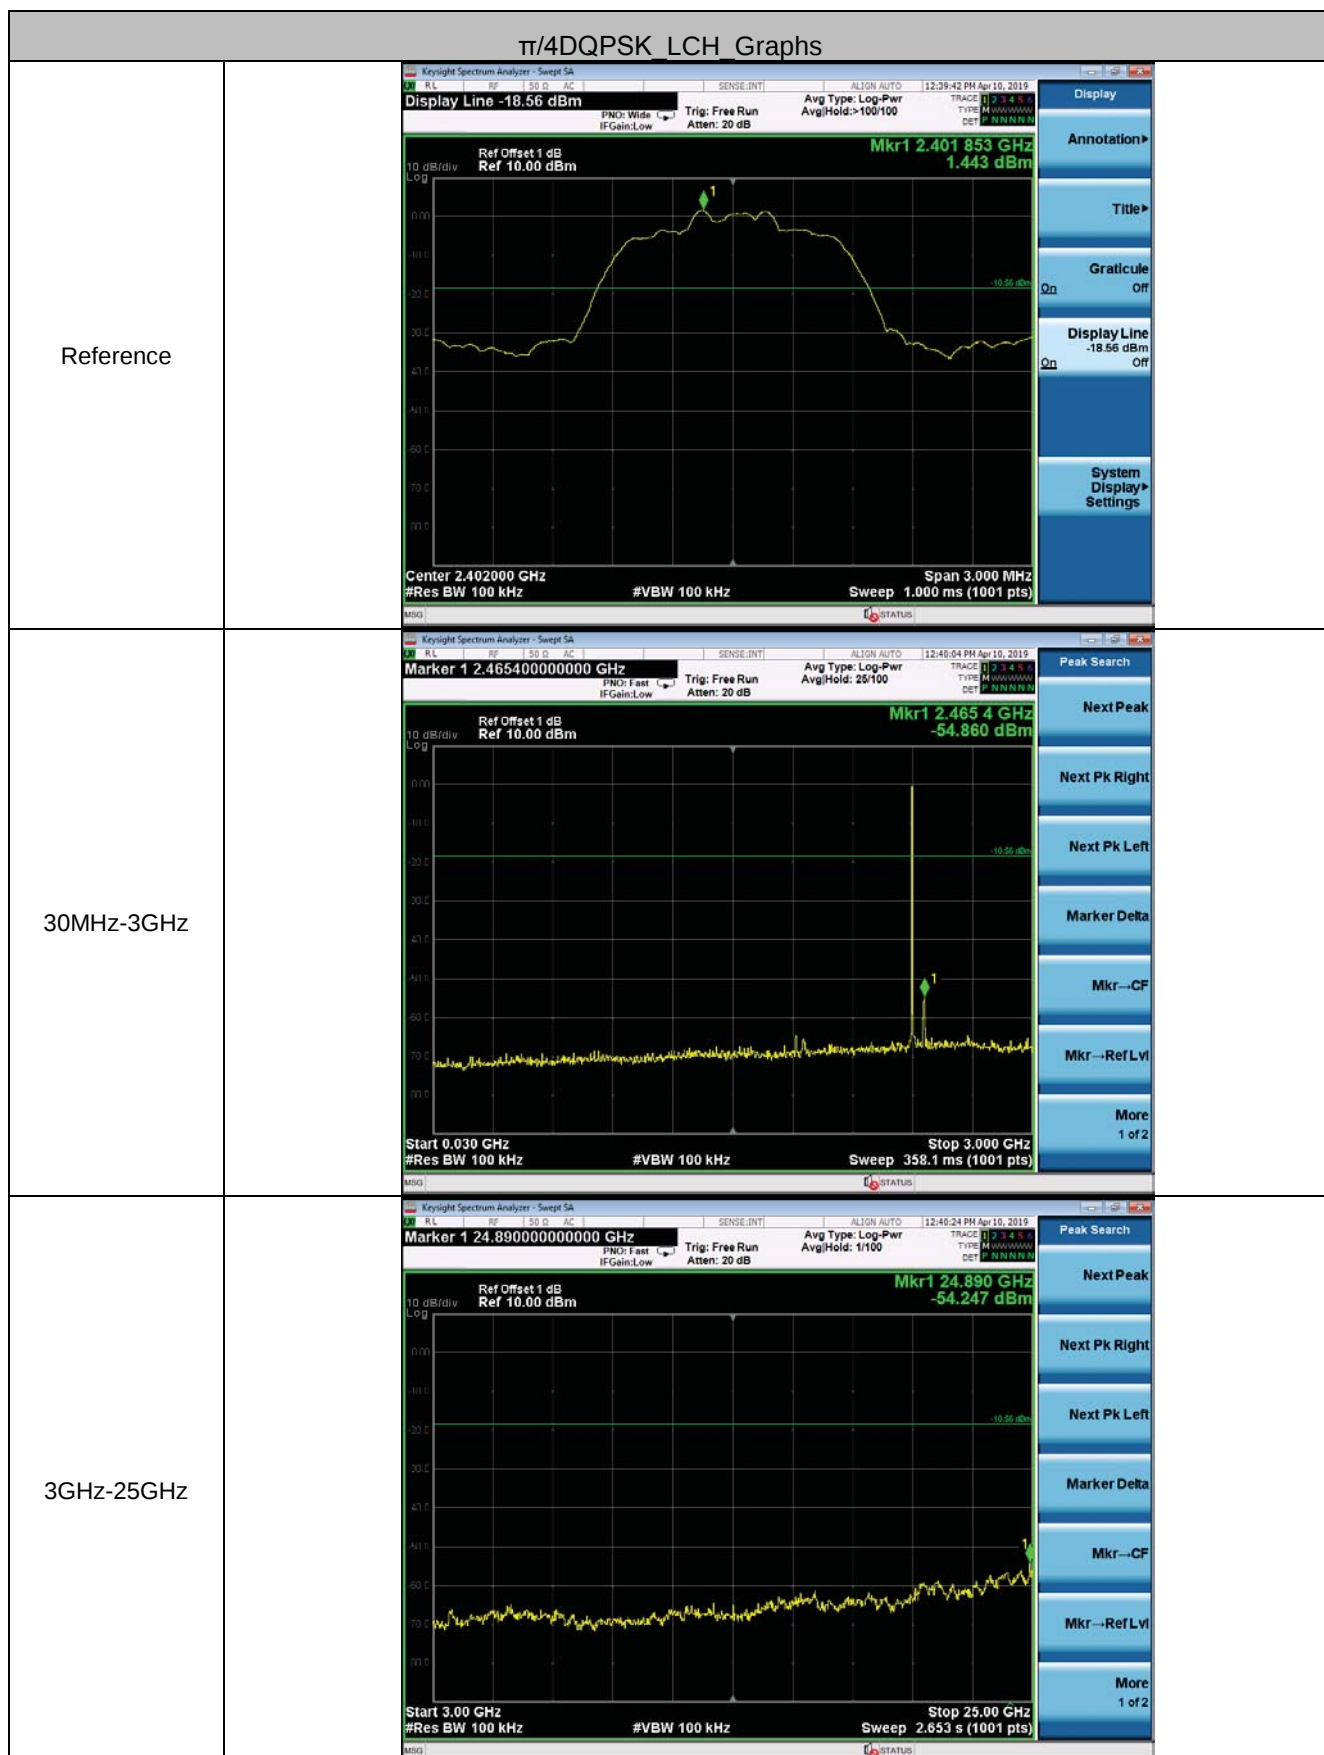
5.9 Spurious RF Conducted Emissions

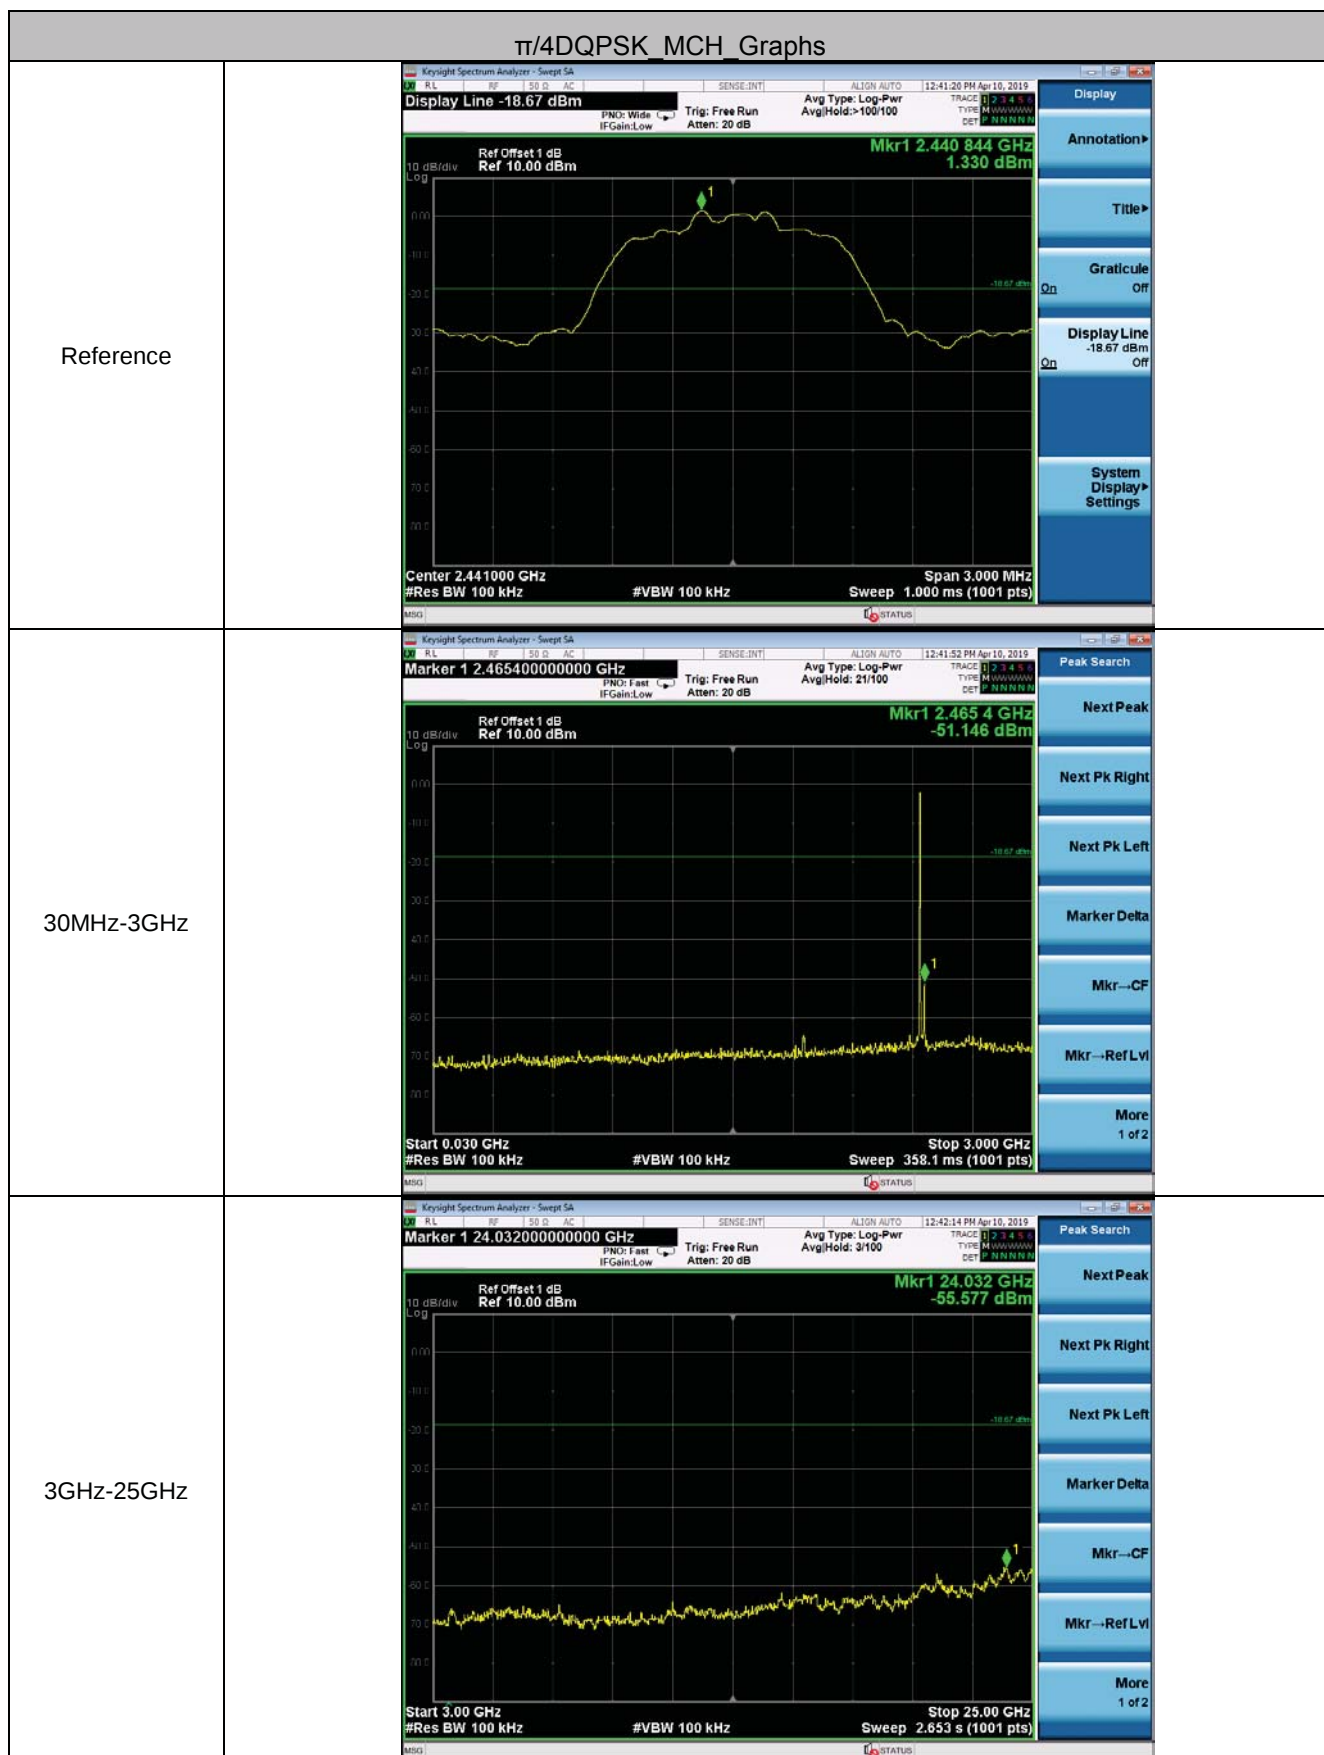
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=cable loss+ attenuation factor.
Limit:	In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Pass

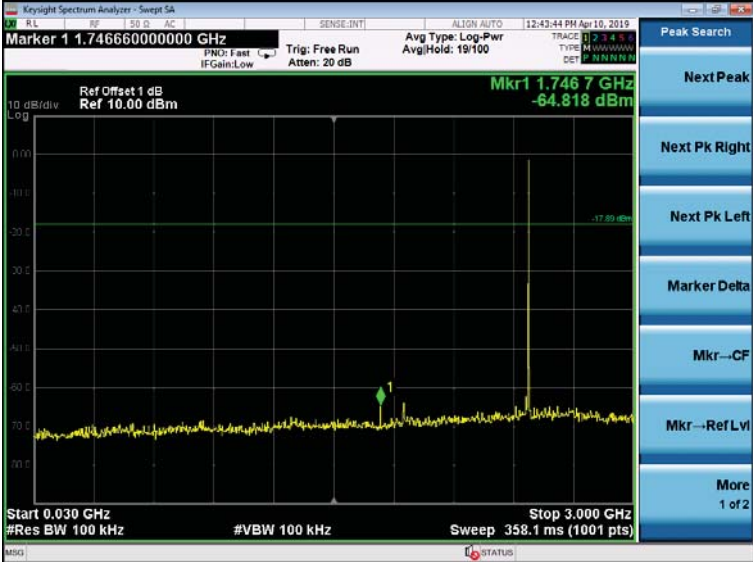
GFSK LCH Graphs		
Reference		
30MHz-3GHz		
3GHz-25GHz		

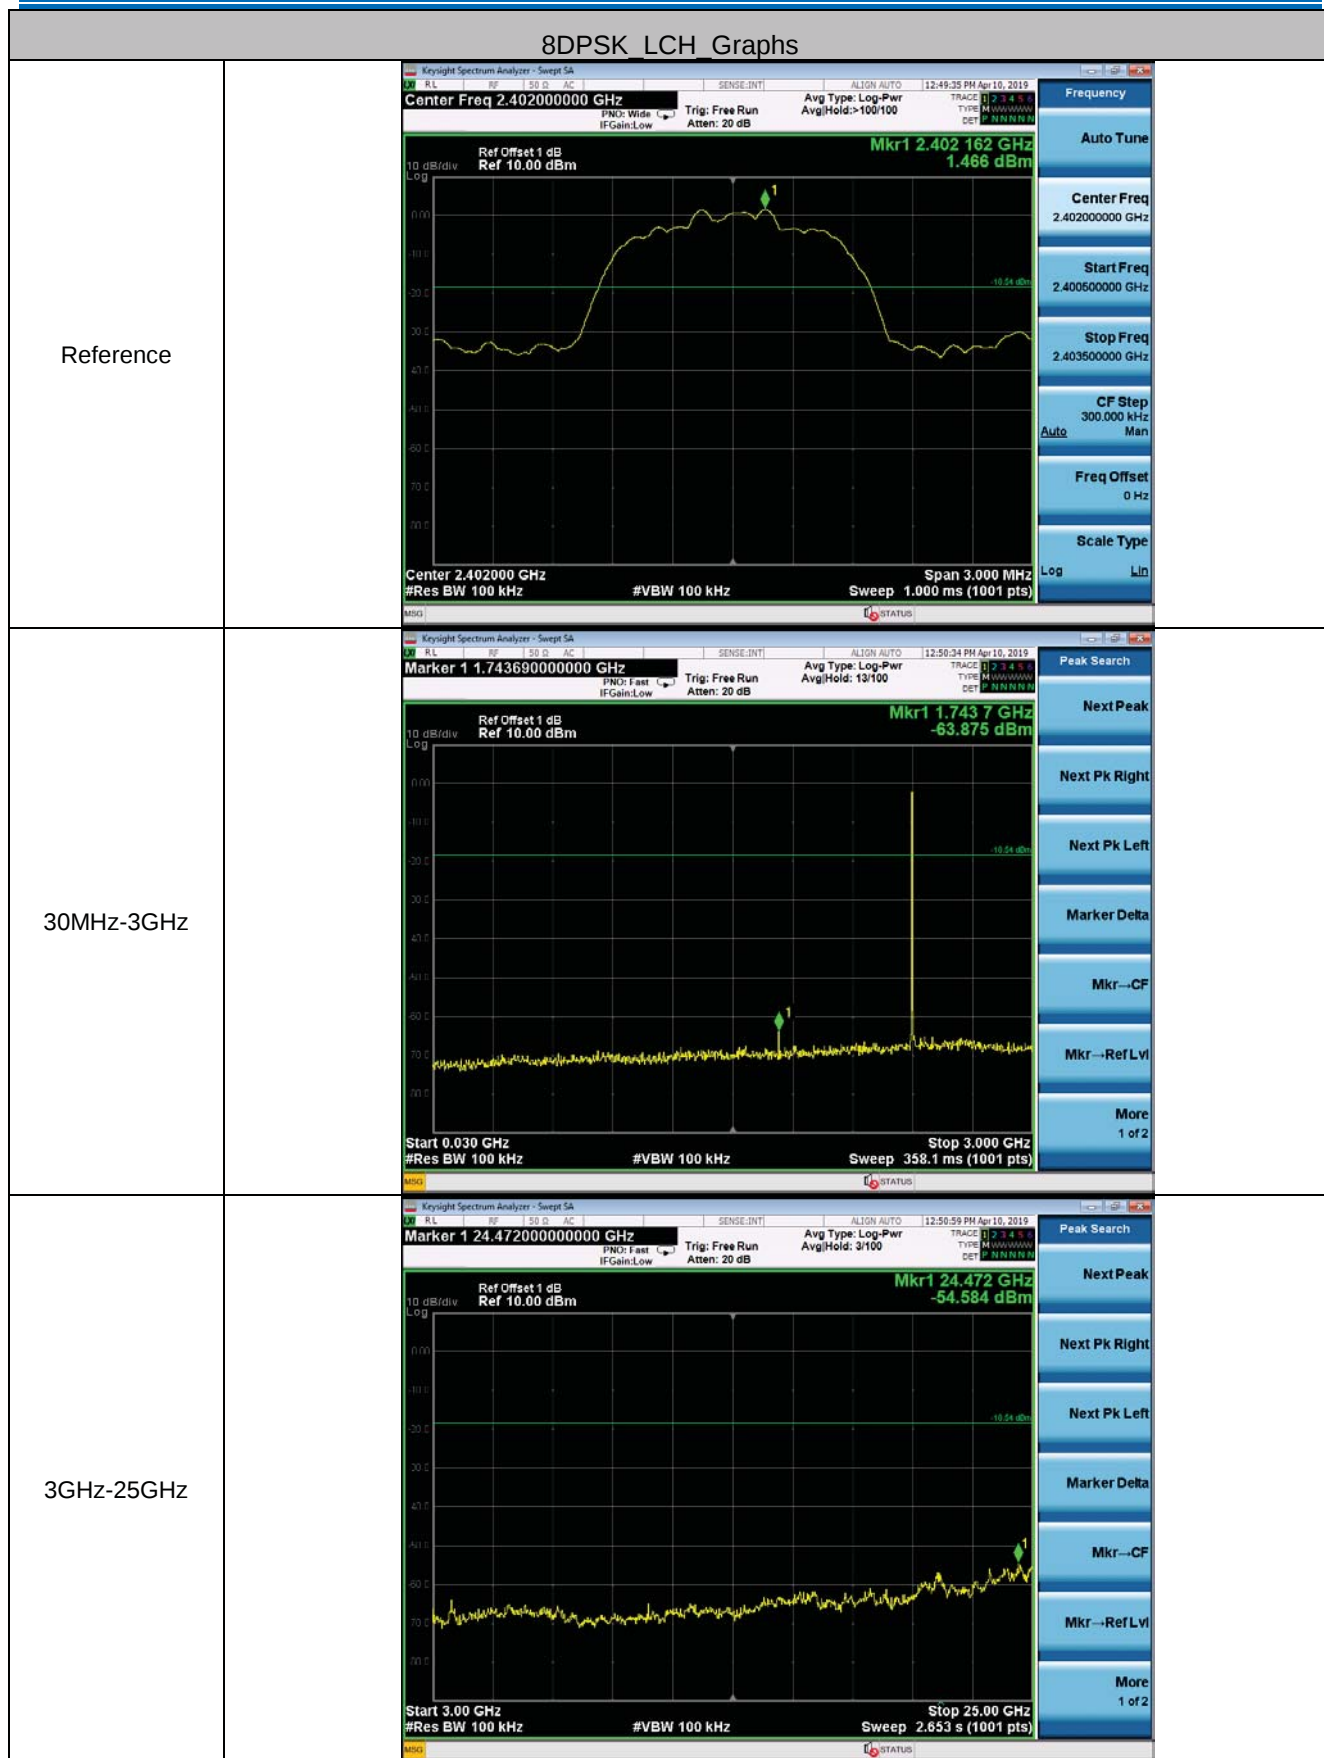


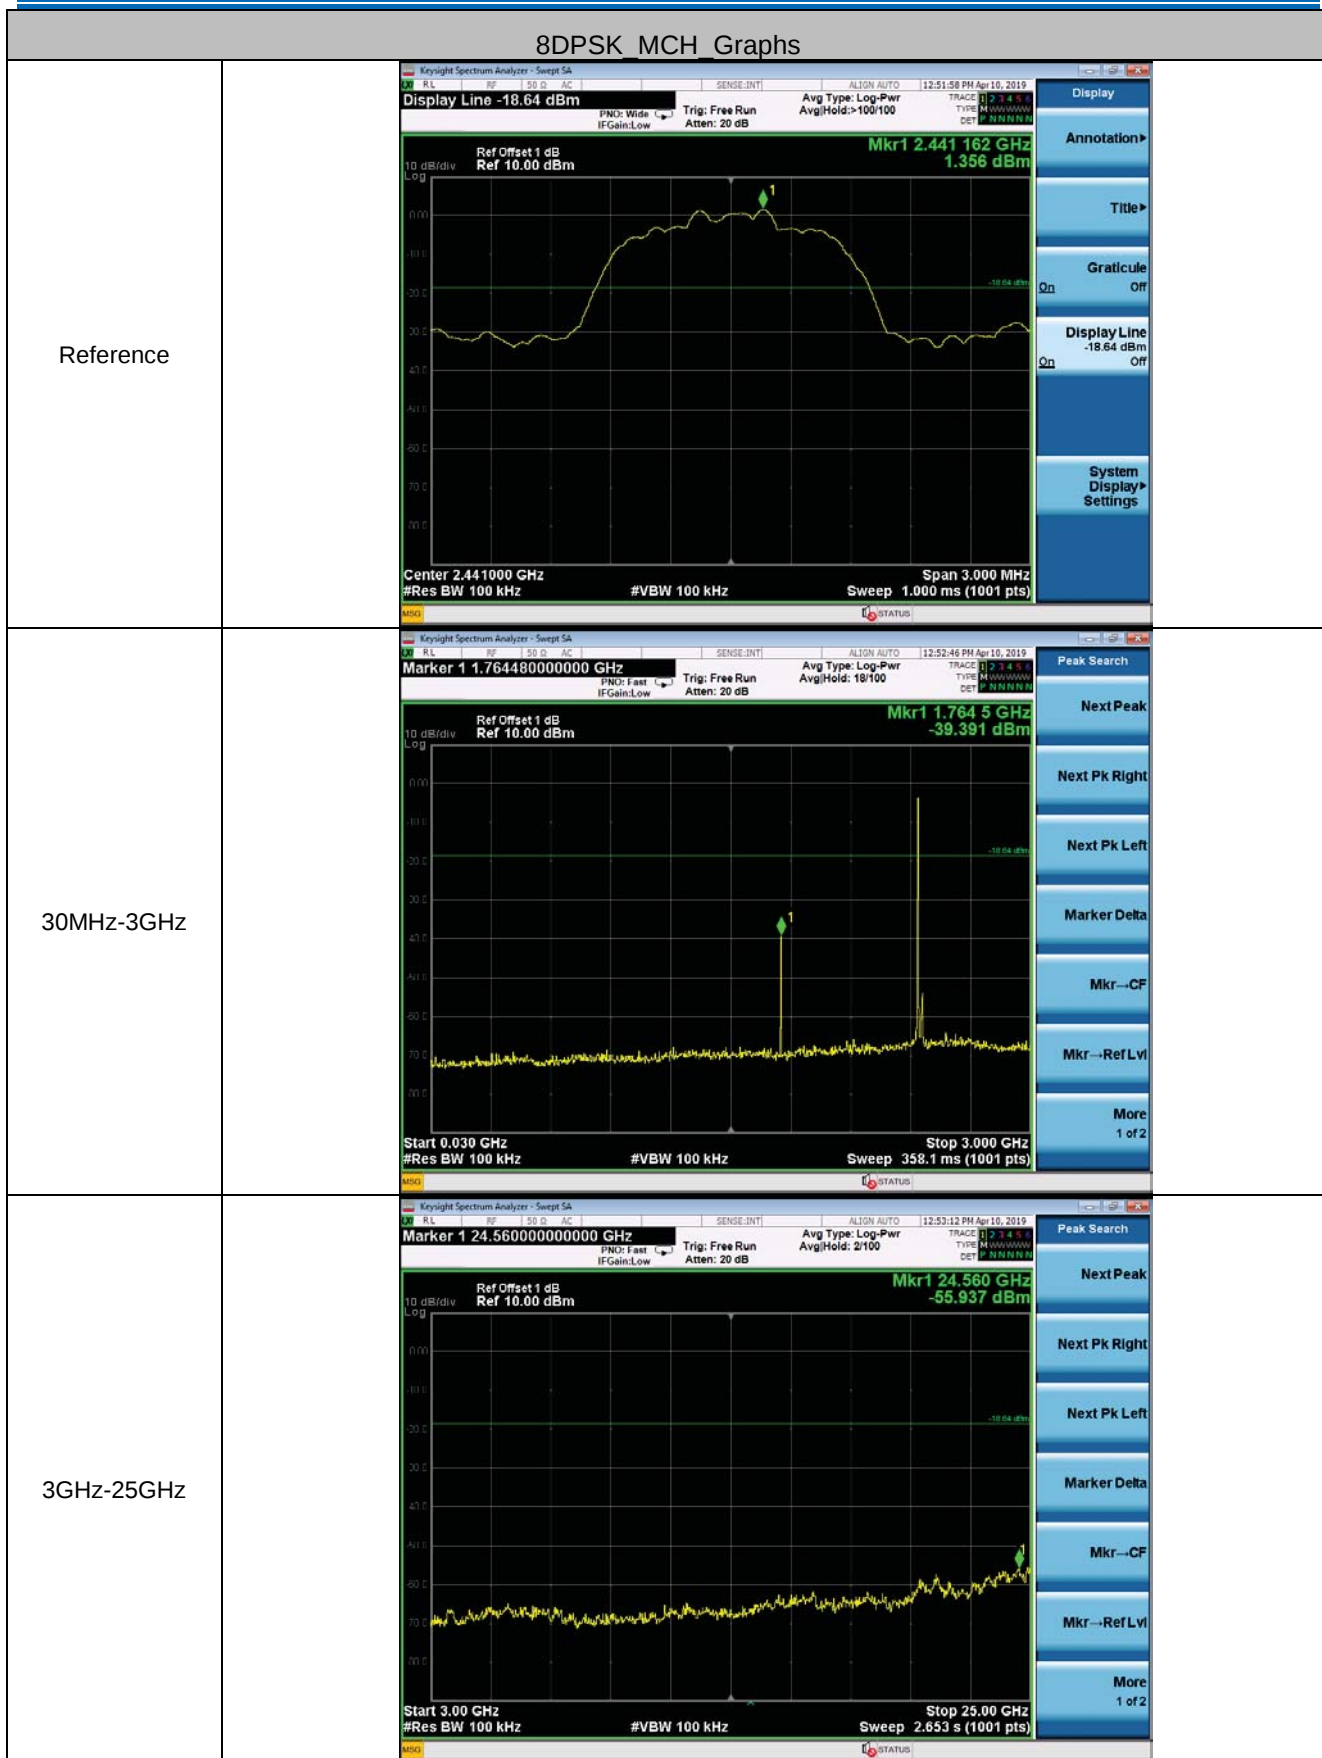
GFSK HCH Graphs		
Reference		
30MHz-3GHz		
3GHz-25GHz		

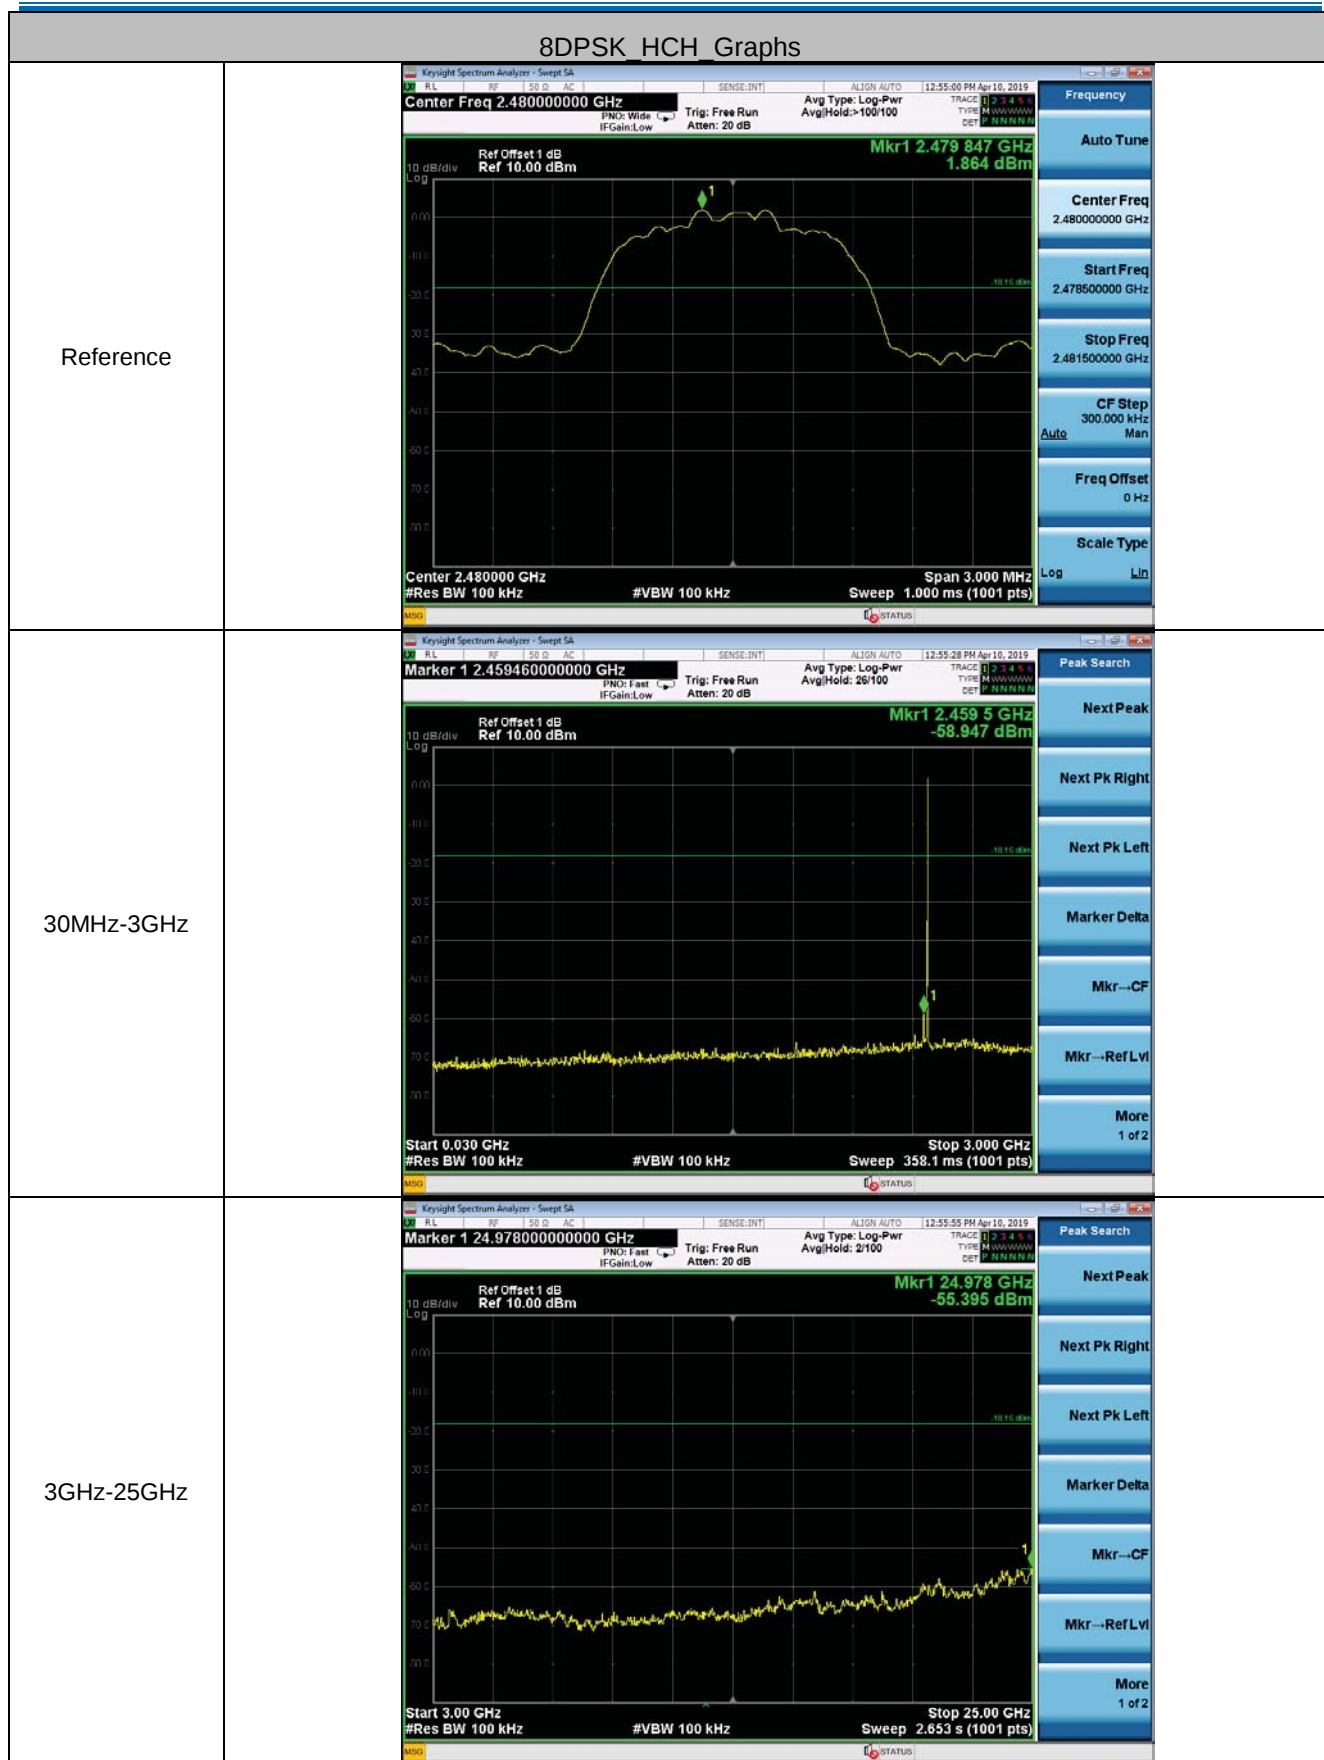




$\pi/4$ DQPSK HCH Graphs		
Reference		
30MHz-3GHz		
3GHz-25GHz		







Remark:

Pre test 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.10 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
	The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals. Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section. The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.
	Compliance for section 15.247(a)(1)
	According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.
	Compliance for section 15.247(g)
	According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

5.11 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Peak	100 kHz	300kHz	Peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

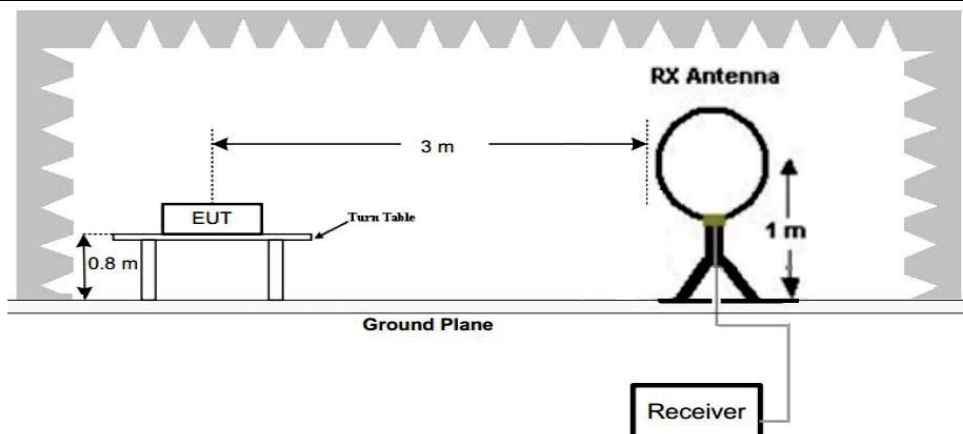


Figure 1. Below 30MHz

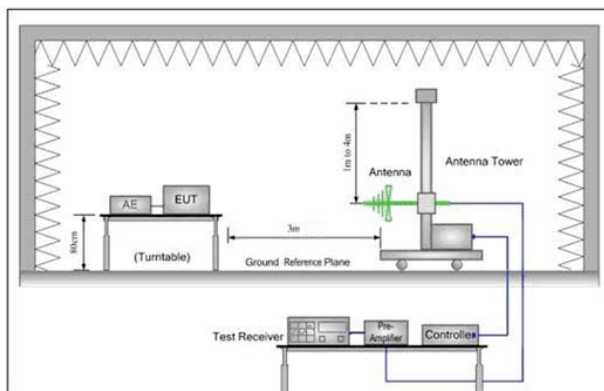


Figure 2. 30MHz to 1GHz

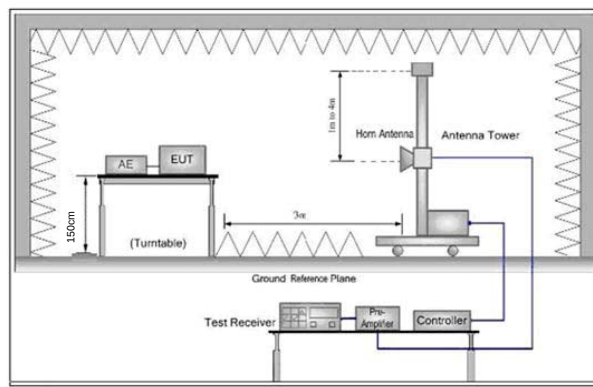


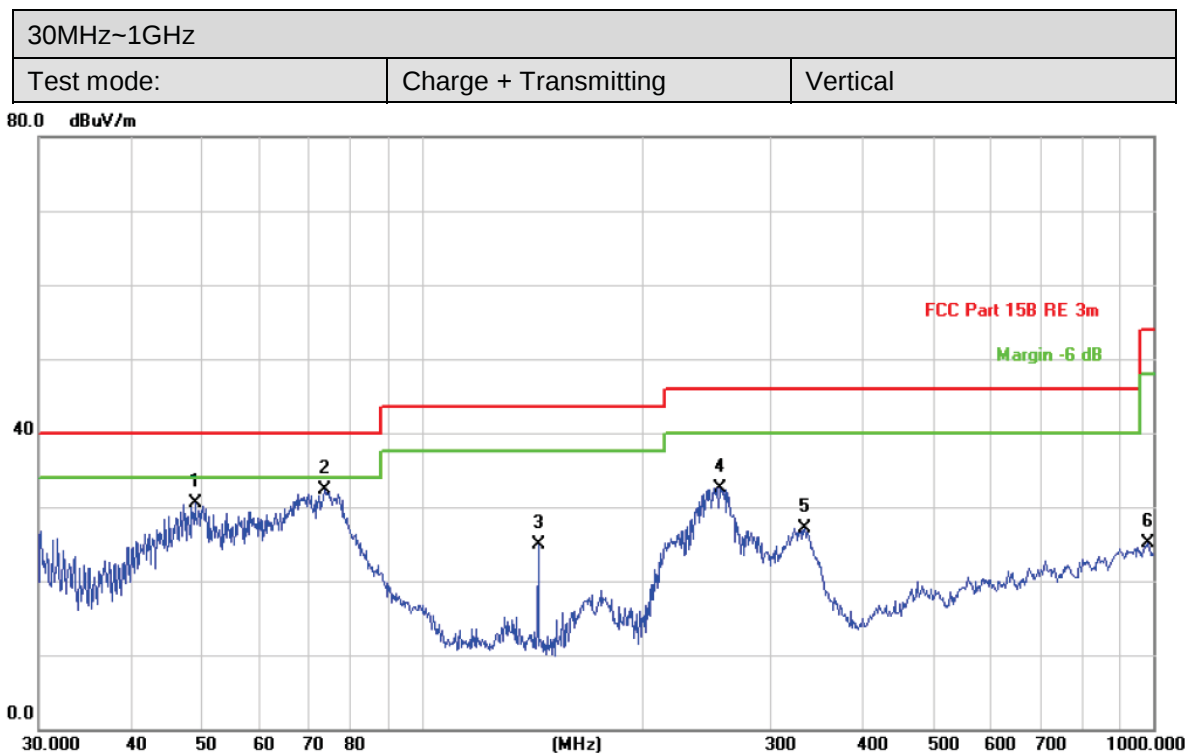
Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case For below 1GHz part, through pre-scan, the worst case is the highest channel. Only the worst case is recorded in the report.
Test Results:	Pass

5.11.1 Radiated Emission below 1GHz



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		49.0145	47.26	-16.67	30.59	40.00	-9.41	QP
2	*	73.8756	50.44	-18.20	32.24	40.00	-7.76	QP
3		144.3348	37.95	-13.10	24.85	43.50	-18.65	QP
4		255.6231	45.36	-12.79	32.57	46.00	-13.43	QP
5		333.6867	37.43	-10.25	27.18	46.00	-18.82	QP
6		982.6200	23.97	1.13	25.10	54.00	-28.90	QP

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Charge + Transmitting	Horizontal
------------	-----------------------	------------



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		33.5624	25.58	-5.97	19.61	40.00	-20.39	QP
2	*	75.1822	48.30	-17.96	30.34	40.00	-9.66	QP
3		241.6763	46.21	-13.09	33.12	46.00	-12.88	QP
4		341.9786	40.61	-9.83	30.78	46.00	-15.22	QP
5		948.7610	24.76	0.98	25.74	46.00	-20.26	QP

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.11.2 Transmitter Emission above 1GHz

mode:		GFSK(DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	53.39	-9.2	44.19	74	-29.81	Peak	H
2400	56.91	-9.39	47.52	74	-26.48	Peak	H
4804	53.70	-4.33	49.37	74	-24.63	Peak	H
7206	50.82	1.01	51.83	74	-22.17	Peak	H
2390	55.52	-9.2	46.32	74	-27.68	Peak	V
2400	56.86	-9.39	47.47	74	-26.53	Peak	V
4804	54.89	-4.33	50.56	74	-23.44	Peak	V
7206	48.30	1.01	49.31	74	-24.69	Peak	V

mode:		GFSK(DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4882	51.30	-4.11	47.19	74	-26.81	Peak	H
7323	49.20	1.51	50.71	74	-23.29	Peak	H
4882	54.12	-4.11	50.01	74	-23.99	Peak	V
7323	50.25	1.51	51.76	74	-22.24	Peak	V

mode:		GFSK(DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	55.60	-9.29	46.31	74	-27.69	Peak	H
4960	52.21	-4.04	48.17	74	-25.83	Peak	H
7440	50.02	1.57	51.59	74	-22.41	Peak	H
2483.5	53.92	-9.29	44.63	74	-29.37	Peak	V
4960	48.54	-4.04	44.50	74	-29.50	Peak	V
7440	49.40	1.57	50.97	74	-23.03	Peak	V

mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2390	54.36	-9.2	45.16	74	-28.84	Peak	H
2400	56.99	-9.39	47.60	74	-26.40	Peak	H
4804	51.35	-4.33	47.02	74	-26.98	Peak	H
7206	49.20	1.01	50.21	74	-23.79	Peak	H
2390	55.11	-9.2	45.91	74	-28.09	Peak	V
2400	55.27	-9.39	45.88	74	-28.12	Peak	V
4804	52.62	-4.33	48.29	74	-25.71	Peak	V
7206	48.70	1.01	49.71	74	-24.29	Peak	V

mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
4882	51.92	-4.11	47.81	74	-26.19	Peak	H
7323	50.18	1.51	51.69	74	-22.31	Peak	H
4882	51.62	-4.11	47.51	74	-26.49	Peak	V
7323	49.31	1.51	50.82	74	-23.18	Peak	V

mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2483.5	56.32	-9.29	47.03	74	-26.97	Peak	H
4960	52.09	-4.04	48.05	74	-25.95	Peak	H
7440	48.75	1.57	50.32	74	-23.68	Peak	H
2483.5	55.51	-9.29	46.22	74	-27.78	Peak	V
4960	49.61	-4.04	45.57	74	-28.43	Peak	V
7440	50.06	1.57	51.63	74	-22.37	Peak	V

mode:		8DPSK(3DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	53.99	-9.2	44.79	74	-29.21	Peak	H
2400	56.63	-9.39	47.24	74	-26.76	Peak	H
4804	53.35	-4.33	49.02	74	-24.98	Peak	H
7206	50.18	1.01	51.19	74	-22.81	Peak	H
2390	54.38	-9.2	45.18	74	-28.82	Peak	V
2400	56.33	-9.39	46.94	74	-27.06	Peak	V
4804	54.38	-4.33	50.05	74	-23.95	Peak	V
7206	49.53	1.01	50.54	74	-23.46	Peak	V

mode:		8DPSK(3DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4882	53.05	-4.11	48.94	74	-25.06	Peak	H
7323	48.73	1.51	50.24	74	-23.76	Peak	H
4882	52.54	-4.11	48.43	74	-25.57	Peak	V
7323	49.37	1.51	50.88	74	-23.12	Peak	V

Worse case mode:		8DPSK(3DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	55.36	-9.29	46.07	74	-27.93	Peak	H
4960	52.07	-4.04	48.03	74	-25.97	Peak	H
7440	49.20	1.57	50.77	74	-23.23	Peak	H
2483.5	53.59	-9.29	44.30	74	-29.70	Peak	V
4960	50.26	-4.04	46.22	74	-27.78	Peak	V
7440	48.37	1.57	49.94	74	-24.06	Peak	V

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6 Photographs - EUT Test Setup

6.1 Radiated Emission



30MHz~1GHz



Above 1GHz

6.2 Conducted Emission



7 Photographs - EUT Constructional Details

Please refer to the report No: CQASZ20190500014EX-01

The End