

FCC PART 22H, PART 27 TEST REPORT

For

Shanghai Rising Digital Co.,Ltd.

No 318 ,Chuanda Road , Pudong New District Shanghai China

FCC ID: 2AJONSEID3I0A


Report Type: Original Report	Product Type: Sany Encourage Integrated Display
Project Engineer:	Stone Zhang 
Report Number:	RSHA200422001-00A
Report Date:	2021-06-17
Reviewed By:	Oscar Ye EMC Manager 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
CHANNEL LIST	5
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
CALCULATED FORMULARY:.....	12
CALCULATED DATA:.....	12
FCC §2.1047 - MODULATION CHARACTERISTIC	13
FCC §2.1046; § 22.913 (A); §27.50 (H) - RF OUTPUT POWER	14
APPLICABLE STANDARDS.....	14
TEST PROCEDURE	14
TEST DATA	15
FCC §2.1049, §22.917, §22.905, §27.53 - OCCUPIED BANDWIDTH	27
APPLICABLE STANDARDS.....	27
TEST PROCEDURE	27
TEST DATA	27
FCC § 2.1051 & § 22.917 (A); §27.53 (M) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	54
APPLICABLE STANDARDS.....	54
TEST PROCEDURE	54
TEST DATA	54
FCC § 2.1053; § 22.917 (A) & §27.53 (M) - SPURIOUS RADIATED EMISSIONS	103
APPLICABLE STANDARDS.....	103
TEST PROCEDURE	103
TEST DATA	104
FCC § 22.917 (A); FCC§27.53 (M)- BAND EDGES.....	108
APPLICABLE STANDARDS.....	108
TEST PROCEDURE	108
TEST DATA	108
FCC § 2.1055; § 22.355; FCC §27.54- FREQUENCY STABILITY	125
APPLICABLE STANDARDS.....	125
TEST PROCEDURE	125
TEST DATA	126

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Shanghai Rising Digital Co.,Ltd.
Tested Model:	SEID-3I0A(G)
Product Type:	Sany Encourage Integrated Display
Power Supply:	DC 9~16V (Typical :DC 12V)
RF Function:	LTE
Maximum conducted Output Power:	LTE Band 5: 22.40dBm, LTE Band 41: 22.23 dBm
Operating Band/Frequency:	LTE Band 5: 824-849 MHz(TX), 869-894 MHz(RX) LTE Band 41: 2555-2655 MHz(TX), 2555-2655MHz(RX)
Modulation Type:	LTE: QPSK,16QAM
Antenna Type:	MONOPOLE Antenna
*Maximum Antenna Gain:	LTE Band 5: 4 dBi LTE Band 41: 4 dBi

Note: The Maximum Antenna Gain was declared by the manufacturer.

**All measurement and test data in this report was gathered from production sample serial number:
RSHA200422001-1(Assigned by the BACL. The EUT supplied by the applicant was received on 2020-04-22)*

Objective

This type approval report is prepared on behalf of *Shanghai Rising Digital Co.,Ltd.* in accordance with Part 2, Part 22-Subpart H and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s)

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 27 – Miscellaneous wireless communications services

Applicable Standards: ANSI C63.26-2015.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	5.91dB
	1GHz~6GHz	4.68dB
	6GHz~18GHz	4.92dB
	18GHz~40GHz	5.21dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to ANSI C63.26-2015.

The final qualification test was performed with the EUT operating at normal mode.

Channel List

Mode		Channel		Frequency (MHz)
LTE Band 5	1.4M	Low	20407	824.7
		Middle	20525	836.5
		High	20643	848.3
	3M	Low	20415	825.5
		Middle	20525	836.5
		High	20635	847.5
	5M	Low	20425	826.5
		Middle	20525	836.5
		High	20625	846.5
	10M	Low	20450	829.0
		Middle	20525	836.5
		High	20600	844.0
LTE Band 41	5M	Low	40265	2557.5
		Middle	40740	2605.0
		High	41215	2652.5
	10M	Low	40290	2560.0
		Middle	40740	2605.0
		High	41190	2650.0
	15M	Low	40315	2562.5
		Middle	40740	2605.0
		High	41165	2647.5
	20M	Low	40340	2565.0
		Middle	40740	2605.0
		High	41140	2645.0

Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	104478
Aihuaxin technology	Antenna	/	/
Waylens Inc.	Antenna	/	/
ZHAOXIN	DC Power Supply	RXN-605D	DC002

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable	1.0	EUT	DC Source
Power Cable	1.0	DC Source	AC Source

Block Diagram of Test Setup

For Radiated Emissions(Below 1GHz)

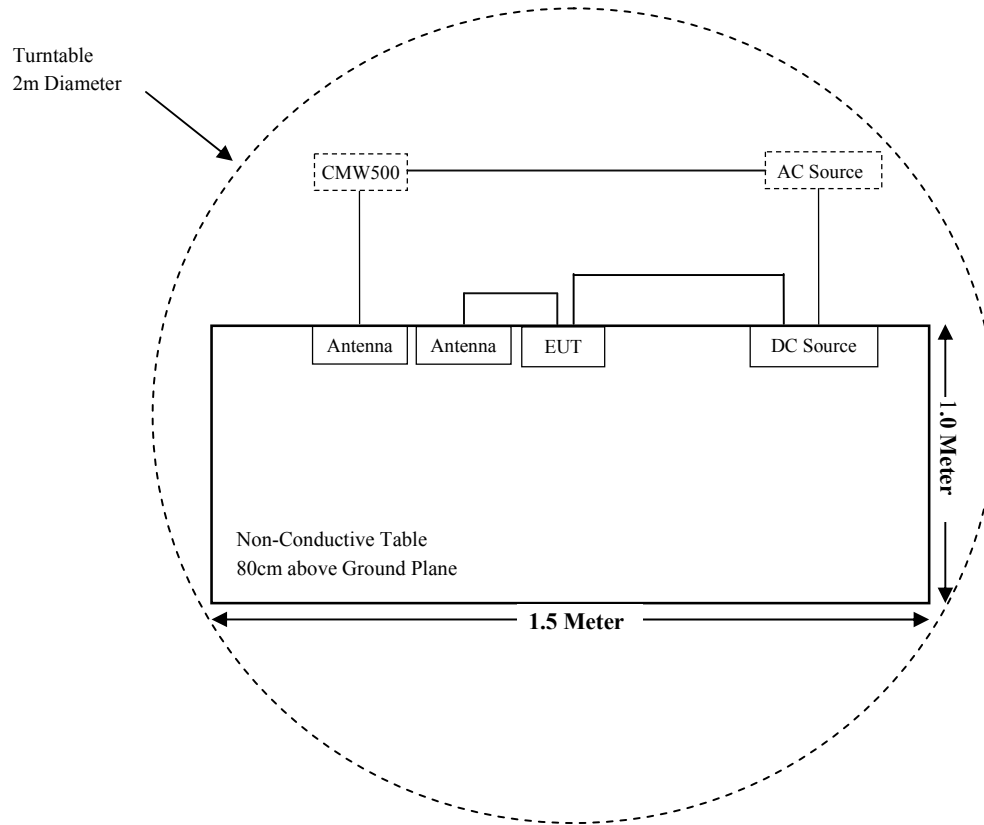

For Radiated Emissions(Above 1GHz)

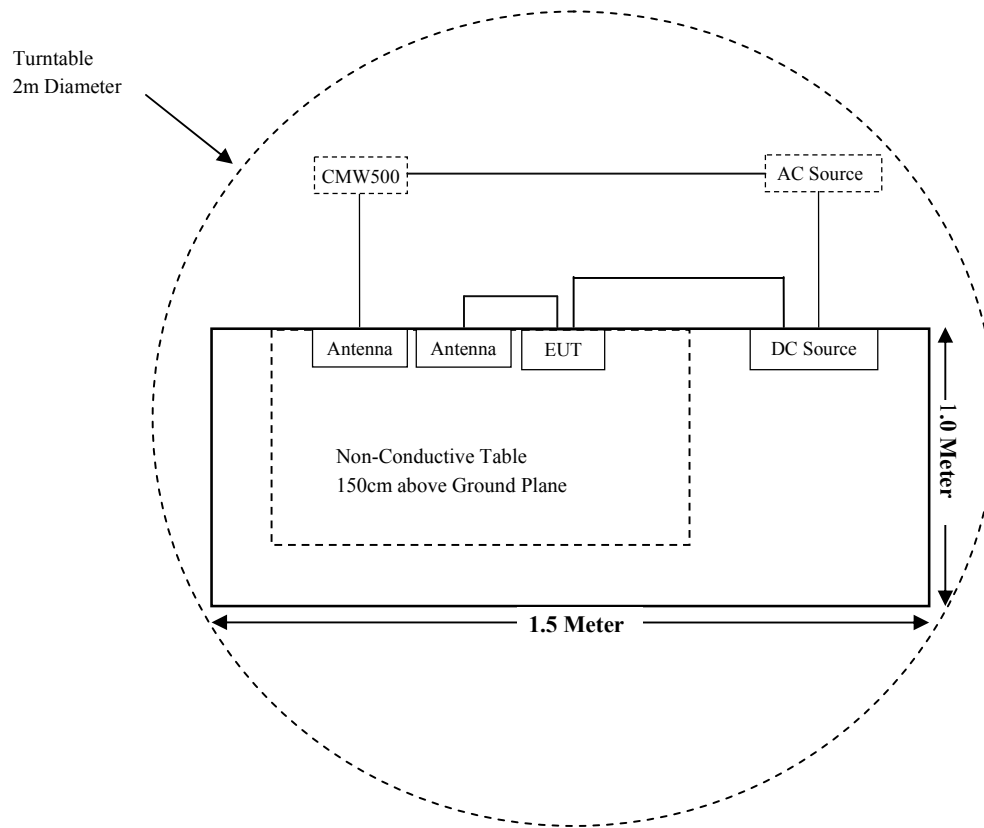

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure(MPE)	Compliant
§2.1046; § 22.913 (a);§ 27.50 (h);	RF Output Power	Compliant
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917;§27.53;	Occupied Bandwidth	Compliant
§ 2.1051; § 22.917 (a); §27.53 (m)	Spurious Emissions at Antenna Terminal	Compliant
§ 2.1053; § 22.917 (a);§27.53 (m)	Spurious Radiated Emissions	Compliant
§ 22.917 (a);§27.53 (m)	Band Edge	Compliant
§ 2.1055; § 22.355;§27.54;	Frequency Stability	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2020-11-27	2021-11-26
HP	Signal Generator	HP 8341B	2624A00116	2020-11-30	2021-11-29
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2020-08-05	2023-08-04
Sunol Sciences	Bilog antenna	JB3	A060217	2020-11-28	2021-11-27
Sonoma Instrunent	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
R & S	Wideband Radio Communication Tester	CMW500	104478	2020-08-05	2021-08-04
MICRO-COAX	Coaxial Cable	Cable-6	006	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
Radiated Emission Test (Chamber 2#)					
R & S	Wideband Radio Communication Tester	CMW500	104478	2020-08-05	2021-08-04
HP	Signal Generator	HP 8341B	2624A00116	2020-11-30	2021-11-29
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2021-03-16	2022-03-15
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3115	6229	2020-01-10	2023-01-09
ETS-LINDGREN	Horn Antenna	3116	00084159	2019-12-12	2022-12-11
ETS-LINDGREN	Horn Antenna	3116	2516	2020-01-17	2023-01-16
A.H.Systems,inc	Amplifier	PAM-0118P	512	2021-02-20	2022-02-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2020-03-22	2021-03-21
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-16	016	2020-08-15	2021-08-14

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Mini-Circuits	Power splitter	ZFRSC-14-S+	SF019411452	2020-11-10	2021-11-09
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2020-08-05	2021-08-04
R & S	Wideband Radio Communication Tester	CMW500	104478	2020-08-05	2021-08-04
BACL	Temperature & Humidity Chamber	BTH-150	30023	2020-11-25	2021-11-24
EAST	Regulated DC Power Supply	MCH-303D-II	14070562	2020-10-10	2021-10-09
Shanghai Rising	RF Cable	Shanghai Rising C01	C01	Each Time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart subpart 1.1310 and 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/		f/1500	30
1500-100,000	/		1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

LTE:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
		(dBi)	(numeric)	(dBm)	(mW)			
LTE Band 5	824-849	4.00	2.51	22.50	177.83	20	0.0888	0.55
LTE Band 41	2555-2655	4.00	2.51	22.50	177.83	20	0.0888	1.00

Note:

For the above tune up power were declared by the manufacturer.

Conclusion: The device meets MPE at distance 20cm.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC §2.1046; § 22.913 (a); §27.50 (h) - RF OUTPUT POWER**Applicable Standards**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts (38.45dBm).


According to §27.50(a) (3), Mobile and portable stations.(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

According to §27.50(h) (2), Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure***Conducted method:***

The RF output of the transmitter was connected to the CMW500 through sufficient attenuation.



Radiated Output Power:

The measurements procedures specified in ANSI C63.26-2015 were applied.

a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.

b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).

c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.

d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$

e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:

$$ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$$

f) The maximum ERP is the maximum value determined in the preceding step.

(Note: Effective Isotropic Radiated Power (EIRP) can be computed using the following:

$$EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB)}$$

Test Data**Environmental Conditions**

Temperature:	24.9 °C
Relative Humidity:	49 %
ATM Pressure:	101.3 kPa

The testing was performed by Stone Zhang on 2021-04-10.

Conducted Power:**Maximum Output Power:****LTE Band 5**

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	21.68	21.98	21.85
		1#3	21.62	21.97	21.82
		1#5	21.64	21.91	21.89
		3#0	21.55	21.91	21.95
		3#1	21.56	21.95	21.89
		3#3	21.51	21.92	21.91
		6#0	21.63	21.96	21.97
	16-QAM	1#0	21.68	21.94	22.00
		1#3	21.62	21.95	21.98
		1#5	21.68	21.93	22.01
		3#0	21.64	21.88	21.98
		3#1	21.69	21.87	21.97
		3#3	21.68	21.85	22.04
		6#0	21.65	21.93	21.97
3M	QPSK	1#0	21.68	21.97	22.04
		1#7	21.81	22.05	22.11
		1#14	21.76	22.17	22.16
		8#0	21.73	22.18	22.07
		8#4	21.71	22.20	22.17
		8#7	21.74	22.22	22.23
		15#0	21.64	22.29	22.23
	16-QAM	1#0	21.72	22.40	22.24
		1#7	21.85	22.34	22.30
		1#14	21.78	22.22	22.38
		8#0	21.78	22.17	22.30
		8#4	21.82	22.11	22.30
		8#7	21.83	22.22	22.31
		15#0	21.84	22.18	22.31

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.79	22.07	22.22
		1#12	21.83	22.10	22.29
		1#24	21.73	22.10	22.16
		12#0	21.73	22.05	22.23
		12#6	21.82	22.06	22.17
		12#11	21.79	22.04	22.18
		25#0	21.85	21.94	22.21
	16-QAM	1#0	21.79	21.85	22.30
		1#12	21.83	21.80	22.20
		1#24	21.83	21.72	22.07
		12#0	21.76	21.67	22.04
		12#6	21.84	21.71	22.01
		12#11	21.88	21.70	22.06
		25#0	21.88	21.73	21.99
10M	QPSK	1#0	22.00	21.73	22.00
		1#24	22.06	21.77	22.02
		1#49	22.13	21.77	22.00
		25#0	22.07	21.72	22.01
		25#12	22.08	21.74	22.08
		25#24	22.01	21.75	22.05
		50#0	22.01	21.75	22.10
	16-QAM	1#0	21.92	21.75	22.21
		1#24	21.86	21.84	22.22
		1#49	21.77	21.89	22.21
		25#0	21.65	21.84	22.12
		25#12	21.70	21.90	22.04
		25#24	21.77	21.89	22.01
		50#0	21.85	21.84	22.06

LTE Band 41

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	22.00	21.41	21.69
		1#12	22.23	21.79	21.94
		1#24	21.42	21.57	21.23
		12#0	21.97	21.96	21.98
		12#6	21.42	21.62	21.12
		12#11	21.52	21.93	21.09
		25#0	21.48	21.72	21.87
	16-QAM	1#0	21.81	21.51	21.82
		1#12	21.95	21.50	21.66
		1#24	22.14	21.16	21.29
		12#0	21.83	21.84	21.56
		12#6	22.10	21.64	21.72
		12#11	21.31	21.83	21.92
		25#0	22.03	21.92	21.55
10M	QPSK	1#0	21.11	21.26	22.12
		1#24	21.99	21.31	21.84
		1#49	21.04	21.93	21.52
		25#0	21.51	21.44	22.08
		25#12	21.41	21.68	22.06
		25#24	21.27	21.54	21.42
		50#0	21.86	21.78	21.53
	16-QAM	1#0	22.02	21.45	22.20
		1#24	21.85	21.18	21.72
		1#49	21.35	21.16	22.05
		25#0	21.04	21.65	21.73
		25#12	21.90	21.56	21.87
		25#24	21.50	21.67	21.92
		50#0	21.83	21.85	21.69

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	20.88	21.87	21.16
		1#37	21.52	21.18	21.68
		1#74	20.86	22.06	22.13
		36#0	21.37	21.49	21.88
		36#17	21.61	21.52	21.61
		36#35	20.96	21.95	21.73
		75#0	21.20	21.94	21.74
	16-QAM	1#0	20.94	21.65	21.20
		1#37	21.02	21.21	21.89
		1#74	20.93	21.62	21.18
		36#0	21.49	22.01	21.41
		36#17	21.18	21.78	21.87
		36#35	21.33	21.31	21.54
		75#0	21.66	21.41	21.94
20M	QPSK	1#0	21.71	21.91	21.39
		1#49	21.06	21.20	21.34
		1#99	21.27	21.20	21.30
		50#0	21.83	21.79	21.47
		50#24	21.14	21.05	21.10
		50#49	21.85	21.32	21.25
		100#0	20.92	21.15	21.00
	16-QAM	1#0	21.69	21.27	21.24
		1#49	20.92	21.35	21.54
		1#99	21.44	21.60	21.39
		50#0	21.68	21.74	21.39
		50#24	21.04	21.70	21.26
		50#49	21.73	21.11	21.12
		100#0	21.12	21.78	21.01

Peak-to-average ratio (PAR):**LTE Band 5**

Test Modulation		Test Bandwidth	Low Channel (dB)	Middle Channel (dB)	High Channel (dB)	Limit(dB)
QPSK	1 RB	10M	3.08	3.11	3.18	13
	50 RB		5.16	5.10	5.20	13
16-QAM	1 RB	10M	4.07	4.18	4.14	13
	50 RB		6.16	6.10	6.02	13

LTE Band 41

Test Modulation		Test Bandwidth	Low Channel (dB)	Middle Channel (dB)	High Channel (dB)	Limit(dB)
QPSK	1 RB	20M	3.16	3.07	3.13	13
	100RB		5.17	5.09	5.10	13
16-QAM	1 RB	20M	4.04	4.16	4.14	13
	100RB		6.20	6.02	6.08	13

Radiated Power:**ERP:****LTE Band 5**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 1.4M BW Low Channel								
824.70	H	87.03	23.16	0.62	-1.18	21.36	38.45	17.09
824.70	V	86.04	22.17	0.62	-1.18	20.37	38.45	18.08
16-QAM 1.4M BW Low Channel								
824.70	H	87.16	23.29	0.62	-1.18	21.49	38.45	16.96
824.70	V	86.12	22.25	0.62	-1.18	20.45	38.45	18.00
QPSK 3M BW Low Channel								
825.50	H	87.17	23.30	0.62	-1.18	21.50	38.45	16.95
825.50	V	86.17	22.30	0.62	-1.18	20.50	38.45	17.95
16-QAM 3M BW Low Channel								
825.50	H	87.12	23.25	0.62	-1.18	21.45	38.45	17.00
825.50	V	86.01	22.14	0.62	-1.18	20.34	38.45	18.11
QPSK 5M BW Low Channel								
826.50	H	87.19	23.32	0.62	-1.18	21.52	38.45	16.93
826.50	V	86.15	22.28	0.62	-1.18	20.48	38.45	17.97
16-QAM 5M BW Low Channel								
826.50	H	87.13	23.26	0.62	-1.18	21.46	38.45	16.99
826.50	V	86.12	22.25	0.62	-1.18	20.45	38.45	18.00
QPSK 10M BW Low Channel								
829.00	H	87.02	23.15	0.62	-1.18	21.35	38.45	17.10
829.00	V	86.17	22.30	0.62	-1.18	20.50	38.45	17.95
16-QAM 10M BW Low Channel								
829.00	H	87.15	23.28	0.62	-1.18	21.48	38.45	16.97
829.00	V	86.1	22.23	0.62	-1.18	20.43	38.45	18.02

LTE Band 5

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 1.4M BW Middle Channel								
836.50	H	87.17	23.30	0.63	-1.14	21.53	38.45	16.92
836.50	V	86.16	22.29	0.63	-1.14	20.52	38.45	17.93
16-QAM 1.4M BW Middle Channel								
836.50	H	87.06	23.19	0.63	-1.14	21.42	38.45	17.03
836.50	V	86.06	22.19	0.63	-1.14	20.42	38.45	18.03
QPSK 3M BW Middle Channel								
836.50	H	87.04	23.17	0.63	-1.14	21.40	38.45	17.05
836.50	V	86.03	22.16	0.63	-1.14	20.39	38.45	18.06
16-QAM 3M BW Middle Channel								
836.50	H	87.08	23.21	0.63	-1.14	21.44	38.45	17.01
836.50	V	86.17	22.30	0.63	-1.14	20.53	38.45	17.92
QPSK 5M BW Middle Channel								
836.50	H	87.04	23.17	0.63	-1.14	21.40	38.45	17.05
836.50	V	86.09	22.22	0.63	-1.14	20.45	38.45	18.00
16-QAM 5M BW Middle Channel								
836.50	H	87.1	23.23	0.63	-1.14	21.46	38.45	16.99
836.50	V	86.18	22.31	0.63	-1.14	20.54	38.45	17.91
QPSK 10M BW Middle Channel								
836.50	H	87.19	23.32	0.63	-1.14	21.55	38.45	16.90
836.50	V	86.03	22.16	0.63	-1.14	20.39	38.45	18.06
16-QAM 10M BW Middle Channel								
836.50	H	87.07	23.20	0.63	-1.14	21.43	38.45	17.02
836.50	V	86.11	22.24	0.63	-1.14	20.47	38.45	17.98

LTE Band 5

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 1.4M BW High Channel								
848.30	H	87.04	23.17	0.63	-1.11	21.43	38.45	17.02
848.30	V	86	22.13	0.63	-1.11	20.39	38.45	18.06
16-QAM 1.4M BW High Channel								
848.30	H	87.01	23.14	0.63	-1.11	21.40	38.45	17.05
848.30	V	86.05	22.18	0.63	-1.11	20.44	38.45	18.01
QPSK 3M BW High Channel								
847.50	H	87	23.13	0.63	-1.11	21.39	38.45	17.06
847.50	V	86.04	22.17	0.63	-1.11	20.43	38.45	18.02
16-QAM 3M BW High Channel								
847.50	H	87.11	23.24	0.63	-1.11	21.50	38.45	16.95
847.50	V	86.11	22.24	0.63	-1.11	20.50	38.45	17.95
QPSK 5M BW High Channel								
846.50	H	87.02	23.15	0.63	-1.11	21.41	38.45	17.04
846.50	V	86.14	22.27	0.63	-1.11	20.53	38.45	17.92
16-QAM 5M BW High Channel								
846.50	H	87.18	23.31	0.63	-1.11	21.57	38.45	16.88
846.50	V	86.16	22.29	0.63	-1.11	20.55	38.45	17.90
QPSK 10M BW High Channel								
844.00	H	87.1	23.23	0.63	-1.11	21.49	38.45	16.96
844.00	V	86.01	22.14	0.63	-1.11	20.40	38.45	18.05
16-QAM 10M BW High Channel								
844.00	H	87.04	23.17	0.63	-1.11	21.43	38.45	17.02
844.00	V	86.09	22.22	0.63	-1.11	20.48	38.45	17.97

EIRP:**LTE Band 41**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 5M BW Low Channel								
2557.5	H	85.79	12.80	0.89	10.02	21.93	33	11.07
2557.5	V	84.94	11.95	0.89	10.02	21.08	33	11.92
16-QAM 5M BW Low Channel								
2557.5	H	85.68	12.69	0.89	10.02	21.82	33	11.18
2557.5	V	84.42	11.43	0.89	10.02	20.56	33	12.44
QPSK 10M BW Low Channel								
2560	H	85.51	12.52	0.89	10.02	21.65	33	11.35
2560	V	84.85	11.86	0.89	10.02	20.99	33	12.01
16-QAM 10M BW Low Channel								
2560	H	85.67	12.68	0.89	10.02	21.81	33	11.19
2560	V	84.45	11.46	0.89	10.02	20.59	33	12.41
QPSK 15M BW Low Channel								
2562.5	H	85.99	13.00	0.89	10.01	22.12	33	10.88
2562.5	V	84.48	11.49	0.89	10.01	20.61	33	12.39
16-QAM 15M BW Low Channel								
2562.5	H	85.12	12.13	0.89	10.01	21.25	33	11.75
2562.5	V	84.31	11.32	0.89	10.01	20.44	33	12.56
QPSK 20M BW Low Channel								
2565	H	85.77	12.78	0.89	10.01	21.90	33	11.10
2565	V	84.19	11.20	0.89	10.01	20.32	33	12.68
16-QAM 20M BW Low Channel								
2565	H	85.12	12.13	0.89	10.01	21.25	33	11.75
2565	V	84.38	11.39	0.89	10.01	20.51	33	12.49

LTE Band 41

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 5M BW Middle Channel								
2605	H	85.81	12.82	0.9	9.95	21.87	33	11.13
2605	V	84.08	11.09	0.9	9.95	20.14	33	12.86
16-QAM 5M BW Middle Channel								
2605	H	85.31	12.32	0.9	9.95	21.37	33	11.63
2605	V	84.8	11.81	0.9	9.95	20.86	33	12.14
QPSK 10M BW Middle Channel								
2605	H	85.49	12.50	0.9	9.95	21.55	33	11.45
2605	V	84.94	11.95	0.9	9.95	21.00	33	12.00
16-QAM 10M BW Middle Channel								
2605	H	85.77	12.78	0.9	9.95	21.83	33	11.17
2605	V	84.83	11.84	0.9	9.95	20.89	33	12.11
QPSK 15M BW Middle Channel								
2605	H	85.6	12.61	0.9	9.95	21.66	33	11.34
2605	V	84.65	11.66	0.9	9.95	20.71	33	12.29
16-QAM 15M BW Middle Channel								
2605	H	85.79	12.80	0.9	9.95	21.85	33	11.15
2605	V	84.46	11.47	0.9	9.95	20.52	33	12.48
QPSK 20M BW Middle Channel								
2605	H	85.12	12.13	0.9	9.95	21.18	33	11.82
2605	V	84.21	11.22	0.9	9.95	20.27	33	12.73
16-QAM 20M BW Middle Channel								
2605	H	85.18	12.19	0.9	9.95	21.24	33	11.76
2605	V	84.89	11.90	0.9	9.95	20.95	33	12.05

LTE Band 41

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 5M BW High Channel								
2652.5	H	85.29	12.30	0.9	9.89	21.29	33	11.71
2652.5	V	84.46	11.47	0.9	9.89	20.46	33	12.54
16-QAM 5M BW High Channel								
2652.5	H	85	12.01	0.9	9.89	21.00	33	12.00
2652.5	V	84.3	11.31	0.9	9.89	20.30	33	12.70
QPSK 10M BW High Channel								
2650	H	85.58	12.59	0.9	9.89	21.58	33	11.42
2650	V	84.94	11.95	0.9	9.89	20.94	33	12.06
16-QAM 10M BW High Channel								
2650	H	85.02	12.03	0.9	9.89	21.02	33	11.98
2650	V	84.64	11.65	0.9	9.89	20.64	33	12.36
QPSK 15M BW High Channel								
2647.5	H	85.6	12.61	0.9	9.89	21.60	33	11.40
2647.5	V	84.43	11.44	0.9	9.89	20.43	33	12.57
16-QAM 15M BW High Channel								
2647.5	H	85.25	12.26	0.9	9.89	21.25	33	11.75
2647.5	V	84.59	11.60	0.9	9.89	20.59	33	12.41
QPSK 20M BW High Channel								
2645	H	85.28	12.29	0.9	9.9	21.29	33	11.71
2645	V	84.61	11.62	0.9	9.9	20.62	33	12.38
16-QAM 20M BW High Channel								
2645	H	85.41	12.42	0.9	9.9	21.42	33	11.58
2645	V	84.37	11.38	0.9	9.9	20.38	33	12.62

Note:

All above data were tested without amplifier.

Absolute Level (dBm) = Submitted Level (dBm) - Cable loss (dB) + Antenna Gain (dBd/dBi)

Margin (dB) = Limit (dBm) - Absolute Level (dBm)


FCC §2.1049, §22.917, §22.905, §27.53 - OCCUPIED BANDWIDTH**Applicable Standards**

FCC 47 §2.1049, §22.917, §22.905, §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 30 kHz/ 100 kHz/300 kHz (LTE), and the 26 dB & 99% bandwidth was recorded.

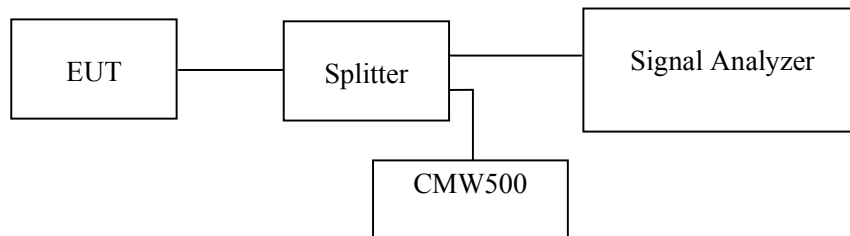**Test Data****Environmental Conditions**

Temperature:	225.3 °C
Relative Humidity:	50 %
ATM Pressure:	100.7 kPa



The testing was performed by Stone Zhang on 2021-03-26.



EUT operation mode: Transmitting



Test Result: Compliant.

LTE Band 5:

Test Modulation	Test Bandwidth	Test Channel	26 dB Bandwidth	99% Occupied Bandwidth
			MHz	MHz
QPSK	1.4M	Low	1.311	1.112
	3M		2.946	2.693
	5M		5.010	4.529
	10M		9.739	9.018
	1.4M	Middle	1.293	1.106
	3M		2.946	2.705
	5M		5.030	4.529
	10M		9.539	8.938
	1.4M	High	1.293	1.100
	3M		2.946	2.693
	5M		4.990	4.529
	10M		9.699	8.978
16-QAM	1.4M	Low	1.287	1.094
	3M		2.922	2.693
	5M		5.030	4.529
	10M		9.780	9.018
	1.4M	Middle	1.305	1.100
	3M		2.922	2.681
	5M		4.970	4.529
	10M		9.659	8.937
	1.4M	High	1.323	1.106
	3M		2.922	2.693
	5M		5.010	4.549
	10M		9.699	8.978

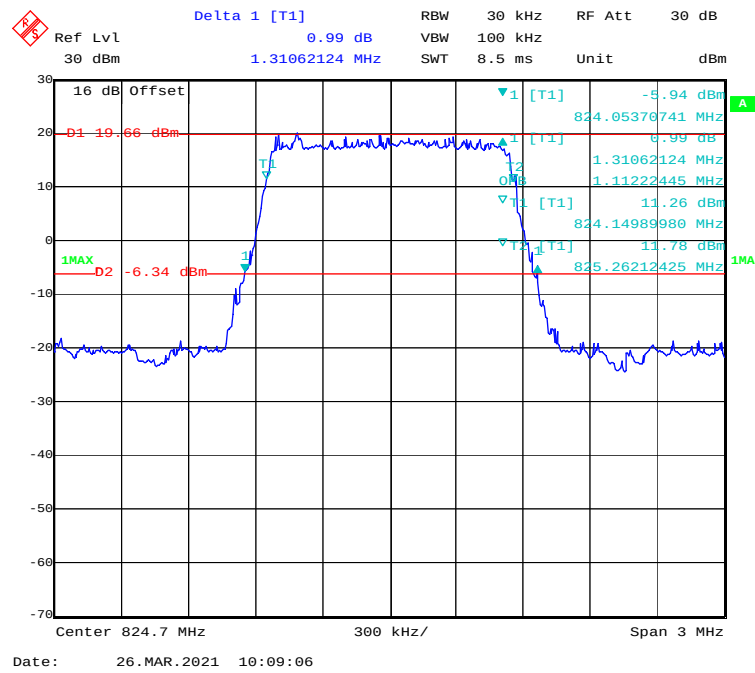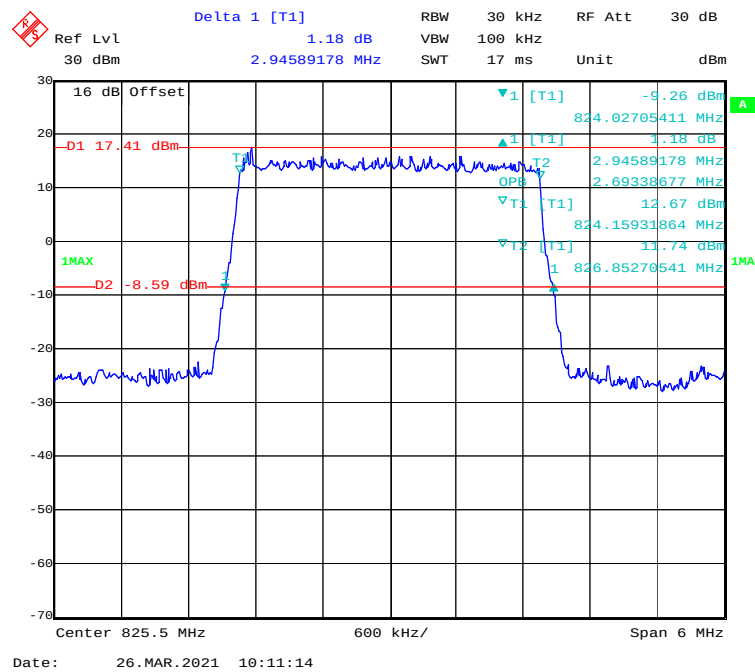QPSK (1.4 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Low channel**QPSK (3.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Low channel**

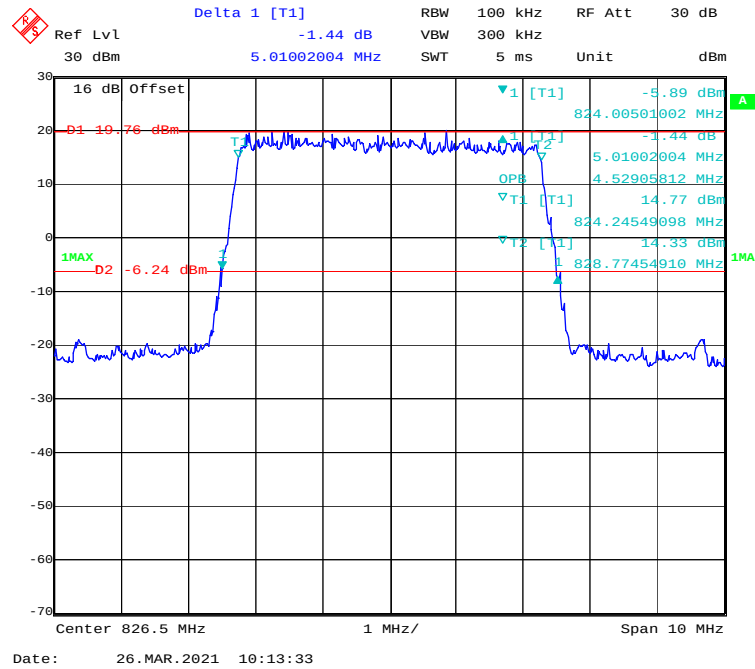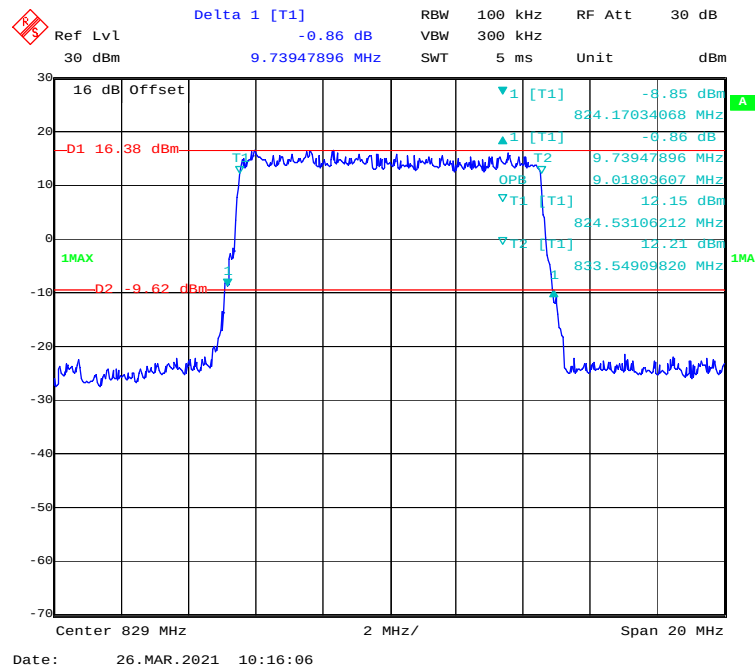QPSK (5.0MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Low channel**QPSK (10.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Low channel**

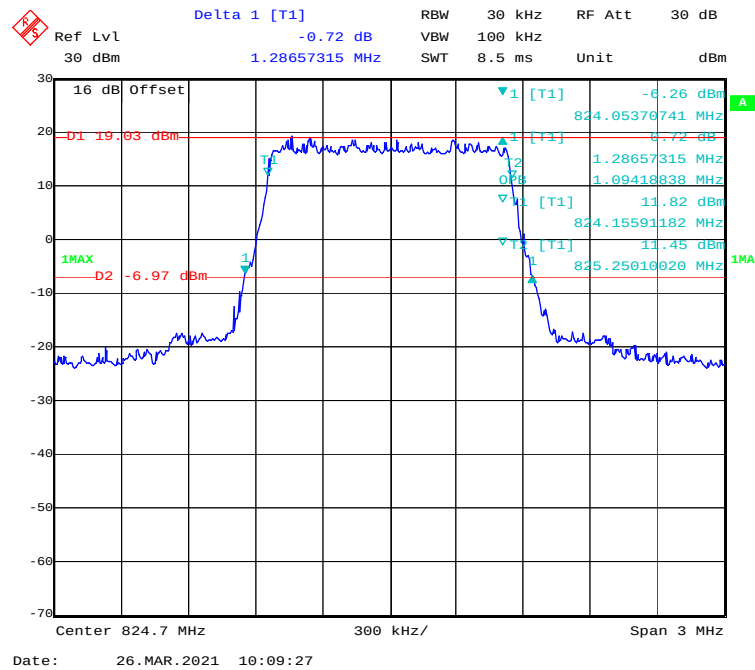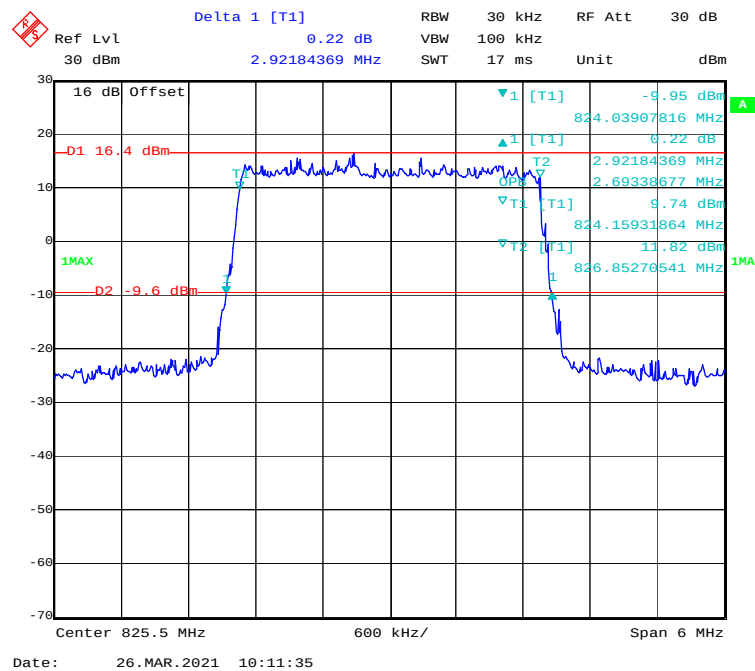16-QAM (1.4 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Low channel**16-QAM (3.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Low channel**

Delta 1 [T1]

Ref Lvl -0.08 dB

30 dBm 5.03006012 MHz

RBW 100 kHz RF Att 30 dB

SWT 5 ms Unit dBm

16 dB Offset

D1 19.17 dBm

1MAX -6.83 dBm

1 [T1] 823.98496994 MHz -7.75 dBm

1 [T1] 823.98496994 MHz -0.08 dB

OPB 4.52905812 MHz

1 [T1] 824.24549098 MHz 11.91 dBm



1 [T1] 824.24549098 MHz 13.17 dBm



1 [T1] 828.77454910 MHz 1.828 dBm

Center 826.5 MHz 1 MHz/ Span 10 MHz


Date: 26.MAR.2021 10:14:03

[illegible]

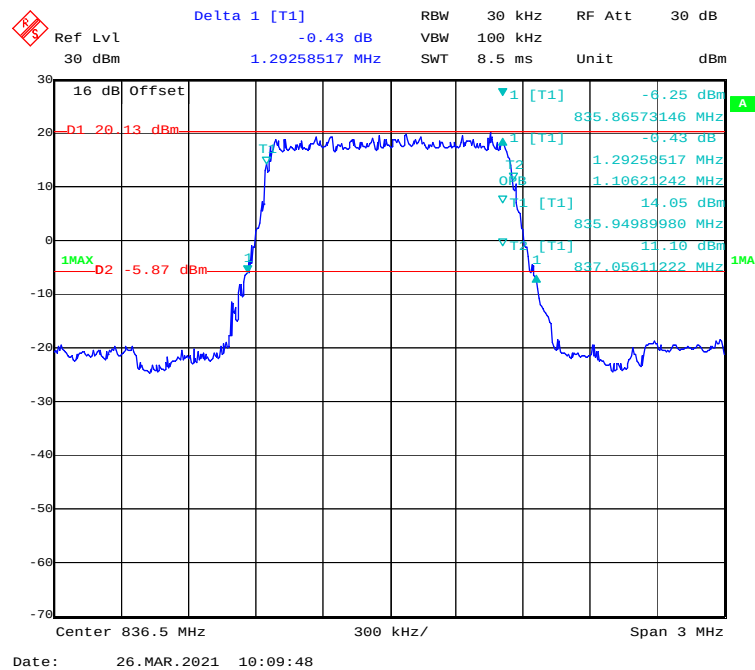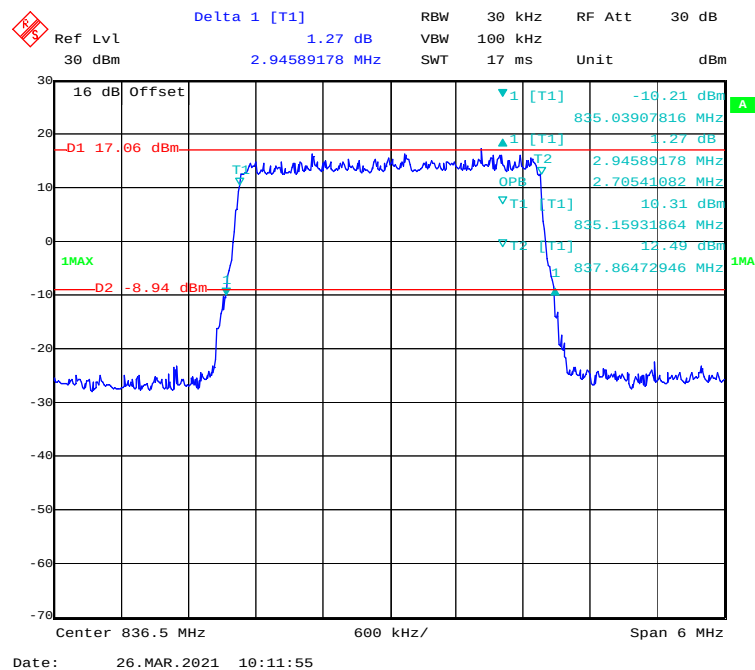
QPSK (1.4 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel**QPSK (3.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel**

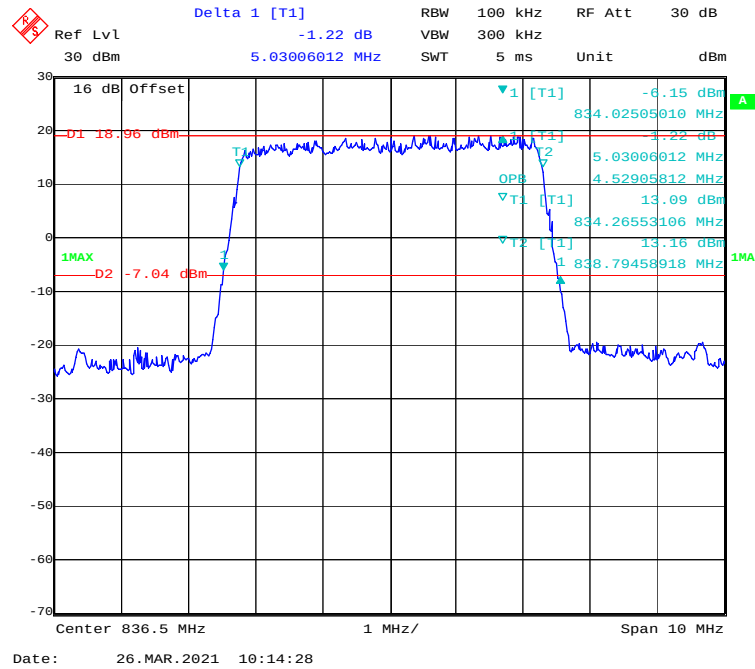
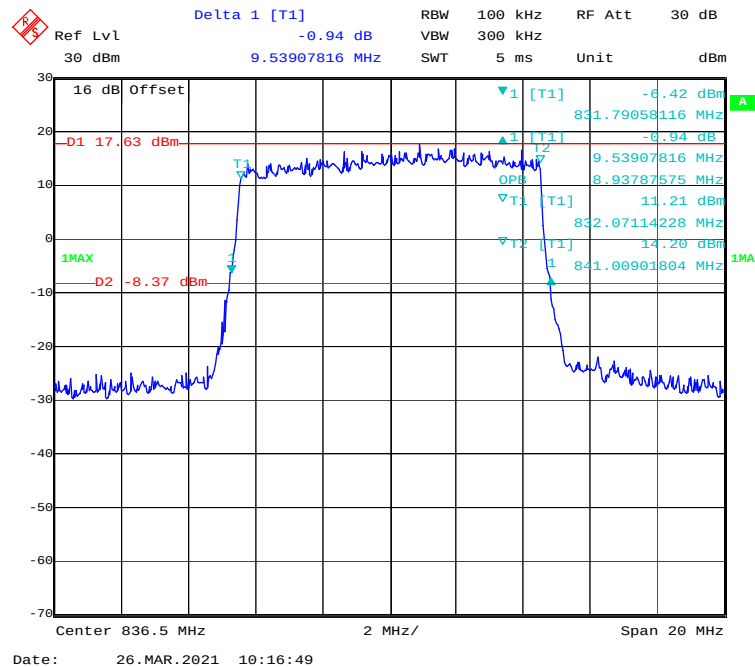
QPSK (5.0MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel**QPSK (10.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel**

16-QAM (1.4 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel

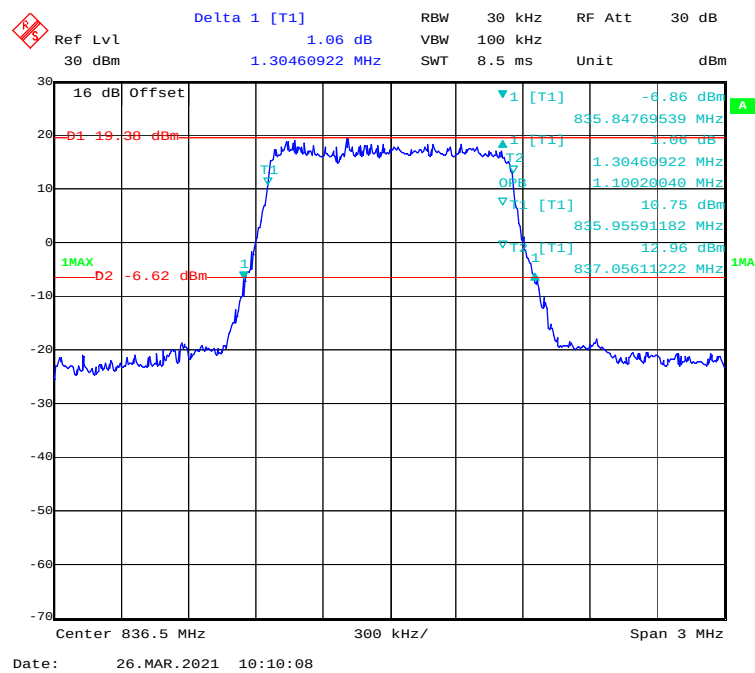


16-QAM (3.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel

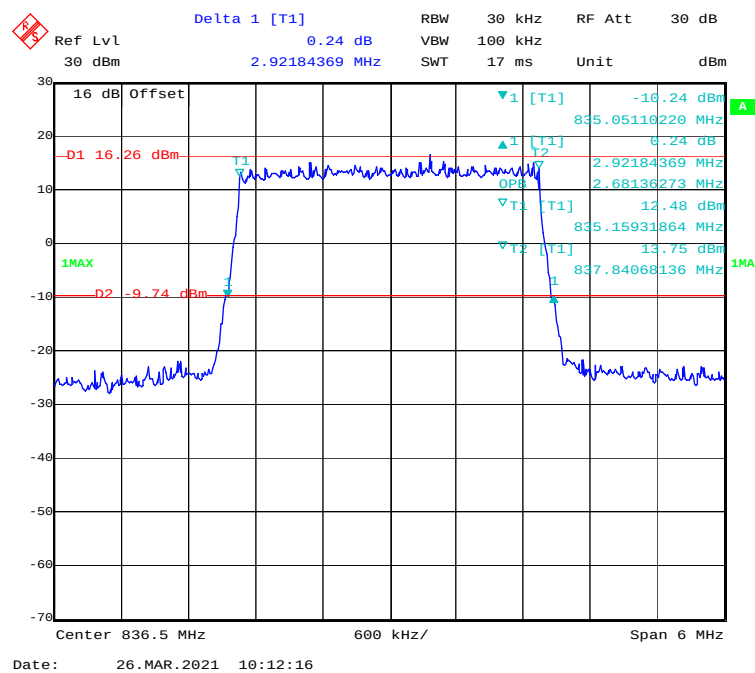


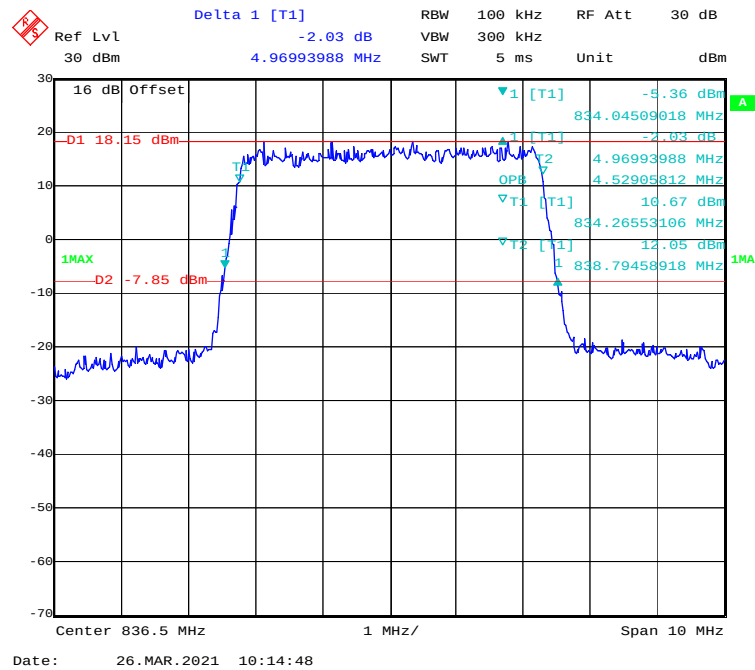
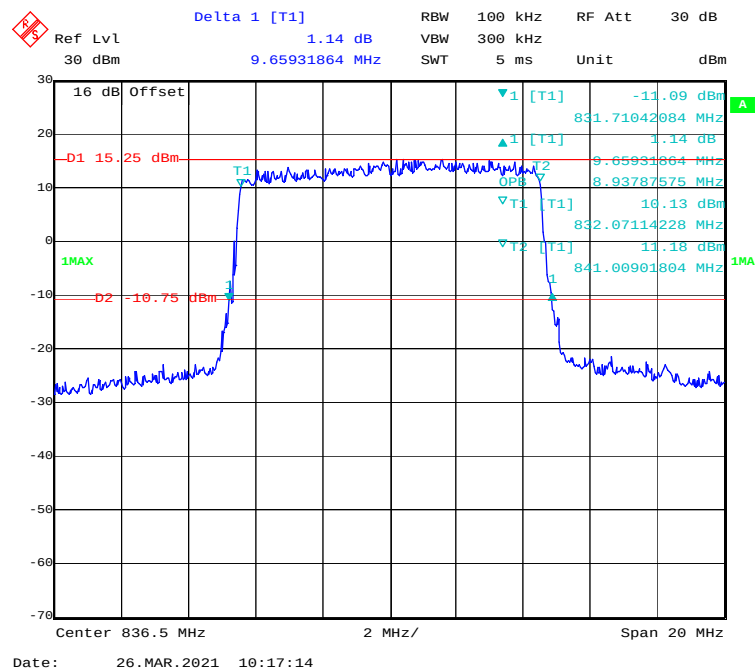
16-QAM (5.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel**16-QAM (10.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel**



QPSK (1.4 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel


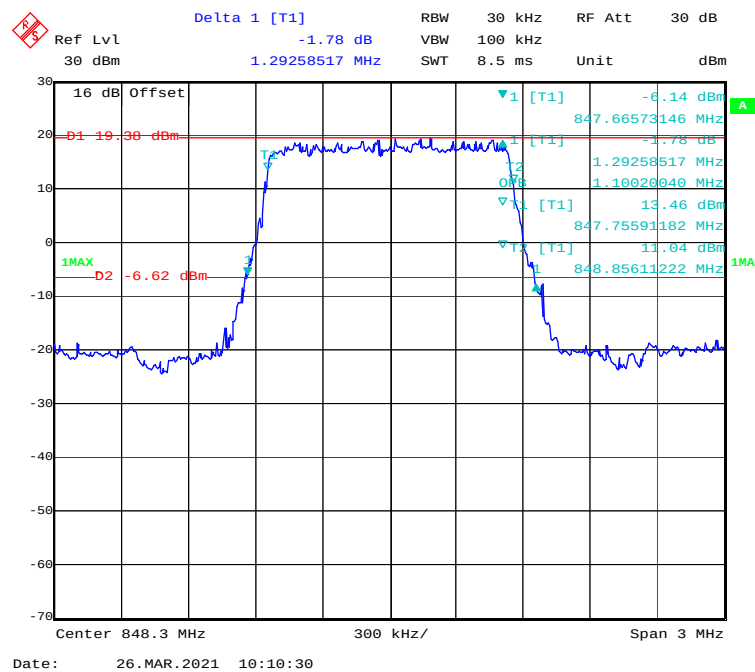


QPSK (3.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel

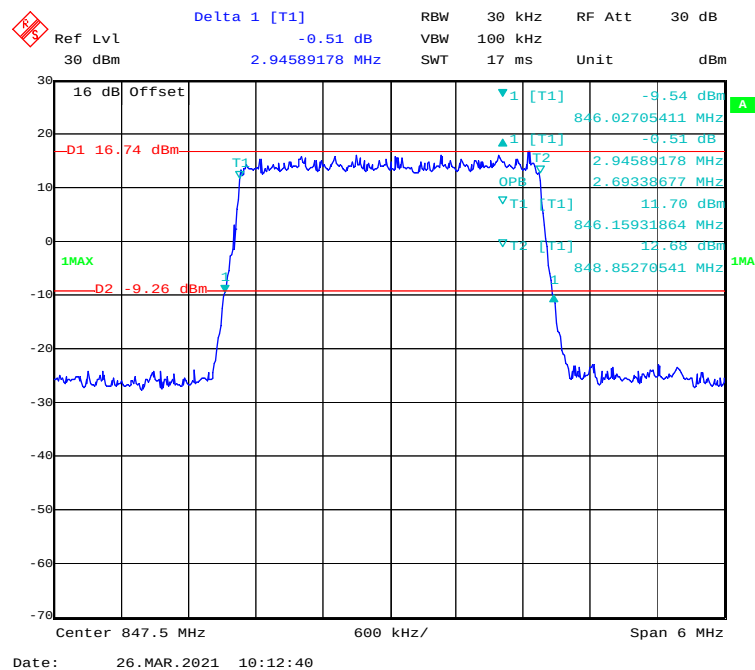

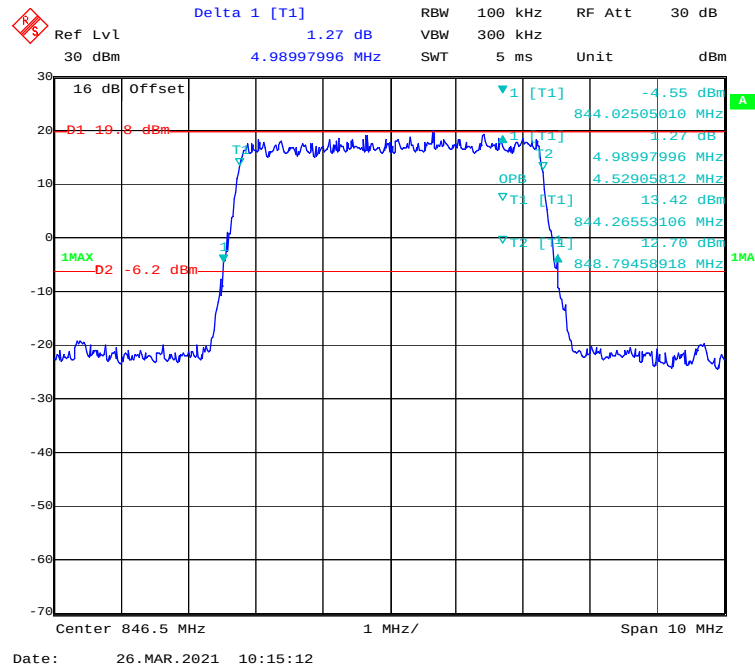
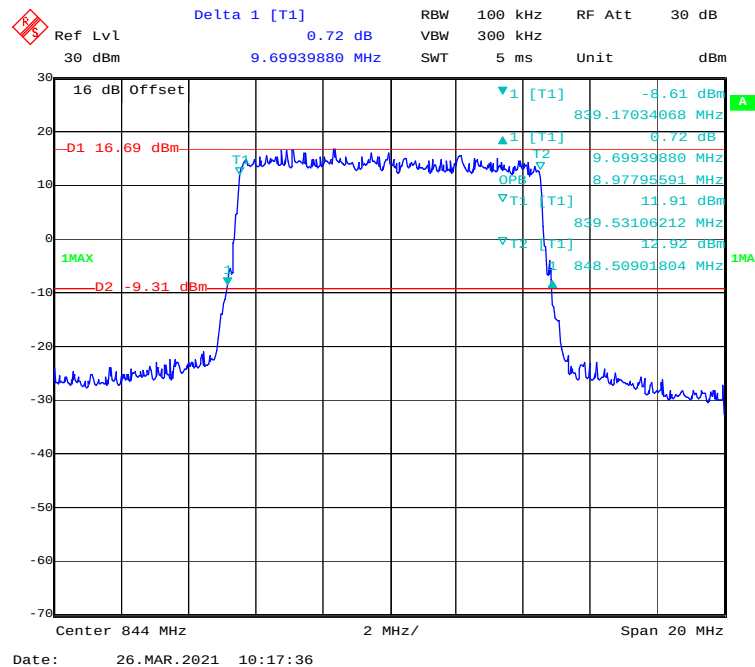
QPSK (5.0MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**QPSK (10.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**

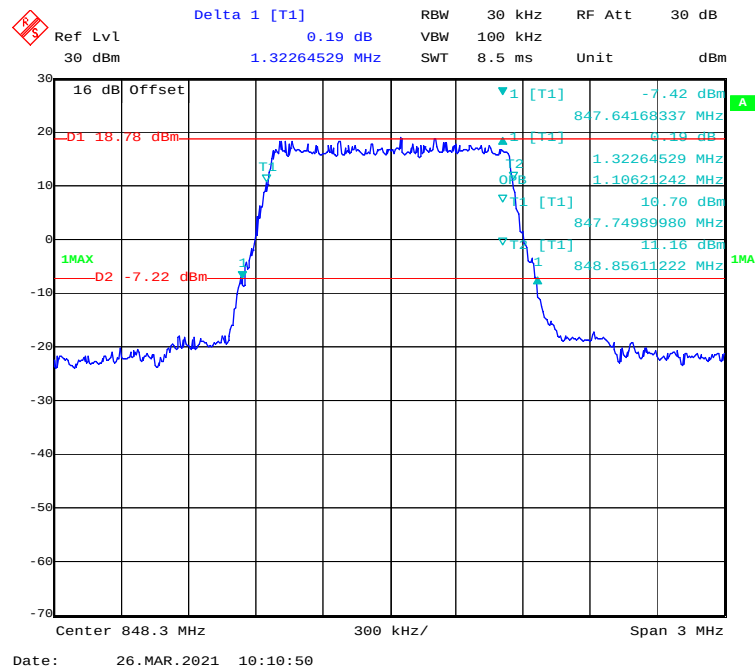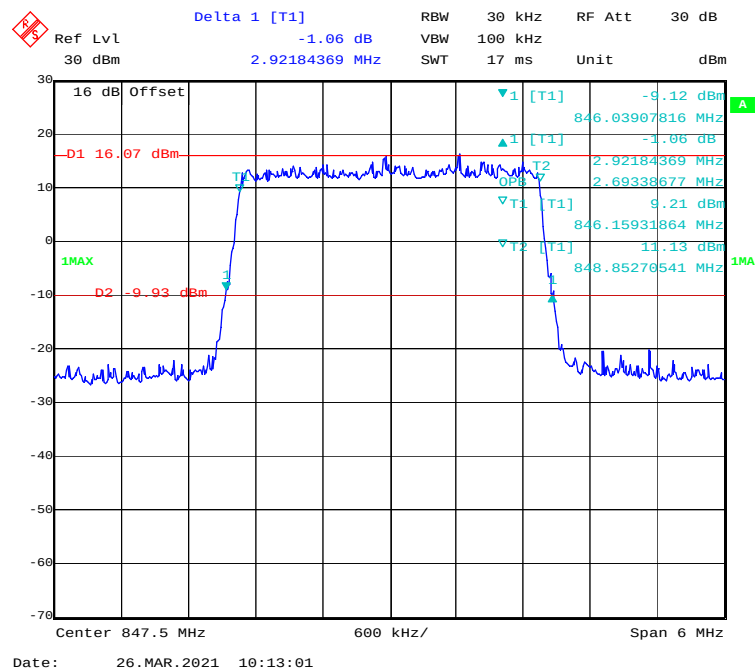16-QAM (1.4 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**16-QAM (3.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**

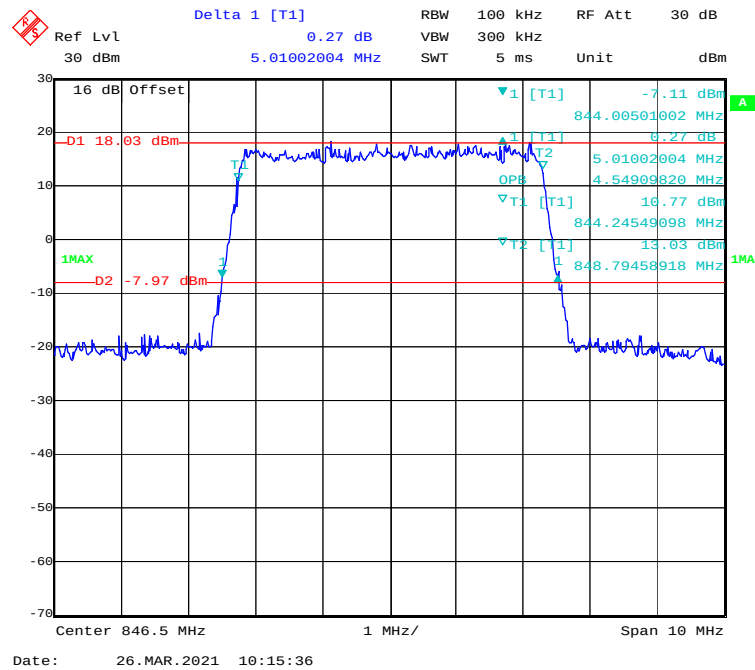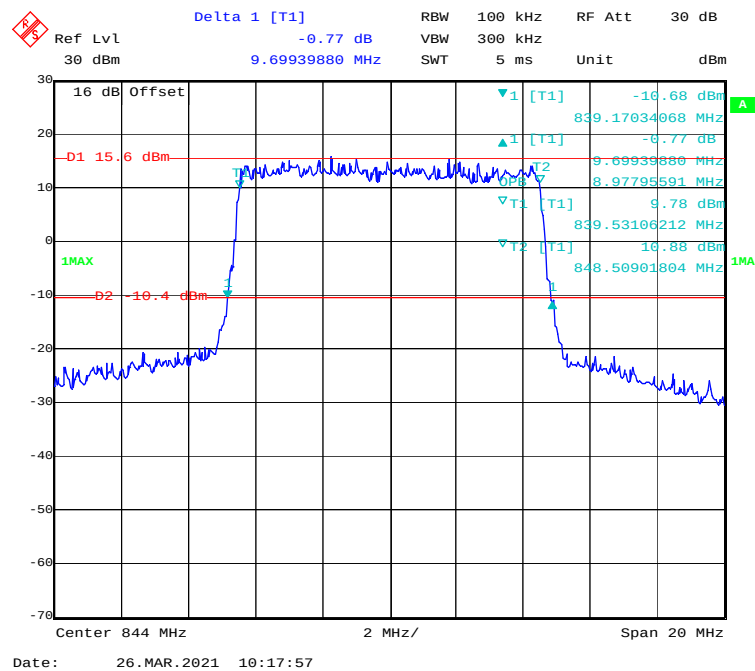16-QAM (5.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**16-QAM (10.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**

LTE Band 41:

Test Modulation	Test Bandwidth	Test Channel	26 dB Bandwidth	99% Occupied Bandwidth
			MHz	MHz
QPSK	5M	Low	4.930	4.509
	10M		9.699	8.938
	15M		15.391	13.527
	20M		19.399	17.876
	5M	Middle	5.010	4.509
	10M		9.619	8.938
	15M		14.790	13.467
	20M		19.319	17.876
	5M	High	4.990	4.549
	10M		9.490	8.978
	15M		15.090	13.407
	20M		19.559	17.876
16-QAM	5M	Low	5.030	4.509
	10M		9.619	8.938
	15M		15.631	13.467
	20M		19.319	17.956
	5M	Middle	4.990	4.509
	10M		9.579	8.978
	15M		14.910	13.467
	20M		21.323	17.956
	5M	High	5.030	4.529
	10M		9.659	8.978
	15M		14.790	13.527
	20M		19.238	17.876

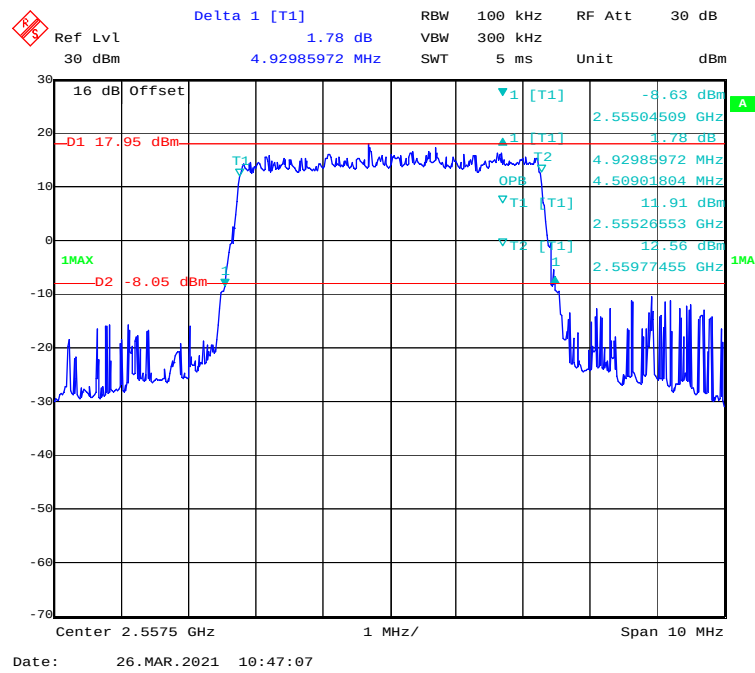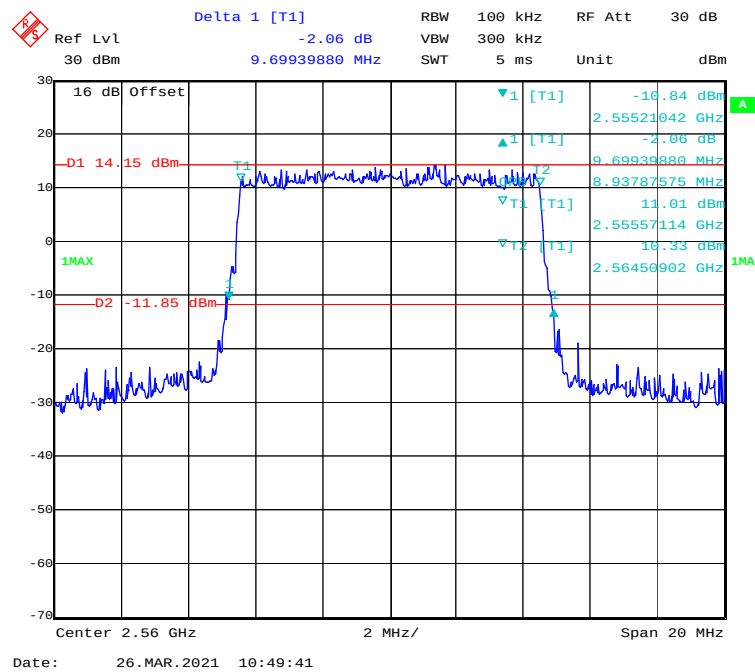QPSK (5.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Low channel**QPSK (10.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Low channel**

Delta 1 [T1] 1.01 dB

Ref Lvl 30 dBm

RBW 300 kHz

RF Att 30 dB

SWT 1 MHz

Unit dBm

16 dB Offset

D1 17.14 dBm

D2 -8.86 dBm

1MAX

1 [T1] -8.89 dBm

2.55597515 GHz

1.01 dB

15.39078156 MHz

35.39078156 MHz

33.52705411 MHz

16.38 dBm

2.55579659 GHz

9.53 dBm

2.56932365 GHz

1MAX

Center 2.5625 GHz

3 MHz/

Span 30 MHz

Date: 26. MAR. 2021 10:52:24

Delta 1 [T1] -3.59 dB

Ref Lvl 30 dBm

19.39879760 MHz

RBW 300 kHz

SWT 5 ms

RF Att 30 dB

Unit dBm

16 dB Offset

D1 16.06 dBm

D2 9.94 dBm

1MAX

1MA

▼1 [T1] -7.32 dBm

▲1 [T1] -3.59 dBm

OPB V

▼T2 19.39879760 MHz

▲T2 17.87575150 MHz

▼T1 [T1] 11.61 dBm

▲T1 [T1] 2.55614228 GHz

▼T2 [T1] 16.68 dBm

▲T2 [T1] 2.57401804 GHz

Center 2.565 GHz

4 MHz/

Span 40 MHz

Date: 26.MAR.2021 10:55:47

Delta 1 [T1] 1.47 dB

Ref Lvl 30 dBm

RBW 100 kHz

RF Att 30 dB

30 dBm

5 ms

Unit dBm

16 dB Offset

D1 15.82 dBm

1MAX

D2 10.18 dBm

1

▼1 [T1] -11.22 dBm

▲1 [T1] 1.47 dB

▼T2 [T1] 5.03006012 MHz

OPB 4.50901804 MHz

▼T1 [T1] 16.10 dBm

▼T2 [T1] 2.55526553 GHz

▼T2 [T1] 2.55977455 GHz

Center 2.5575 GHz



1 MHz/



Span 10 MHz

Date: 26. MAR. 2021 10:47:31


Ref Lvl 30 dBm
 Delta 1 [T1] 0.50 dB
 9.61923848 MHz
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 RF Att 30 dB
 Unit dBm

16 dB Offset
 1MAX
 D1 13.64 dBm
 D2 -12.36 dBm
 T1
 T2
 T3
 T4
 T5
 T6
 T7
 T8
 T9
 T10
 T11
 T12
 T13
 T14
 T15
 T16
 T17
 T18
 T19
 T20
 T21
 T22
 T23
 T24
 T25
 T26
 T27
 T28
 T29
 T30
 T31
 T32
 T33
 T34
 T35
 T36
 T37
 T38
 T39
 T40
 T41
 T42
 T43
 T44
 T45
 T46
 T47
 T48
 T49
 T50
 T51
 T52
 T53
 T54
 T55
 T56
 T57
 T58
 T59
 T60
 T61
 T62
 T63
 T64
 T65
 T66
 T67
 T68
 T69
 T70
 T71
 T72
 T73
 T74
 T75
 T76
 T77
 T78
 T79
 T80
 T81
 T82
 T83
 T84
 T85
 T86
 T87
 T88
 T89
 T90
 T91
 T92
 T93
 T94
 T95
 T96
 T97
 T98
 T99
 T100
 T101
 T102
 T103
 T104
 T105
 T106
 T107
 T108
 T109
 T110
 T111
 T112
 T113
 T114
 T115
 T116
 T117
 T118
 T119
 T120
 T121
 T122
 T123
 T124
 T125
 T126
 T127
 T128
 T129
 T130
 T131
 T132
 T133
 T134
 T135
 T136
 T137
 T138
 T139
 T140
 T141
 T142
 T143
 T144
 T145
 T146
 T147
 T148
 T149
 T150
 T151
 T152
 T153
 T154
 T155
 T156
 T157
 T158
 T159
 T160
 T161
 T162
 T163
 T164
 T165
 T166
 T167
 T168
 T169
 T170
 T171
 T172
 T173
 T174
 T175
 T176
 T177
 T178
 T179
 T180
 T181
 T182
 T183
 T184
 T185
 T186
 T187
 T188
 T189
 T190
 T191
 T192
 T193
 T194
 T195
 T196
 T197
 T198
 T199
 T200
 T201
 T202
 T203
 T204
 T205
 T206
 T207
 T208
 T209
 T210
 T211
 T212
 T213
 T214
 T215
 T216
 T217
 T218
 T219
 T220
 T221
 T222
 T223
 T224
 T225
 T226
 T227
 T228
 T229
 T230
 T231
 T232
 T233
 T234
 T235
 T236
 T237
 T238
 T239
 T240
 T241
 T242
 T243
 T244
 T245
 T246
 T247
 T248
 T249
 T250
 T251
 T252
 T253
 T254
 T255
 T256
 T257
 T258
 T259
 T260
 T261
 T262
 T263
 T264
 T265
 T266
 T267
 T268
 T269
 T270
 T271
 T272
 T273
 T274
 T275
 T276
 T277
 T278
 T279
 T280
 T281
 T282
 T283
 T284
 T285
 T286
 T287
 T288
 T289
 T290
 T291
 T292
 T293
 T294
 T295
 T296
 T297
 T298
 T299
 T300
 T301
 T302
 T303
 T304
 T305
 T306
 T307
 T308
 T309
 T310
 T311
 T312
 T313
 T314
 T315
 T316
 T317
 T318
 T319
 T320
 T321
 T322
 T323
 T324
 T325
 T326
 T327
 T328
 T329
 T330
 T331
 T332
 T333
 T334
 T335
 T336
 T337
 T338
 T339
 T340
 T341
 T342
 T343
 T344
 T345
 T346
 T347
 T348
 T349
 T350
 T351
 T352
 T353
 T354
 T355
 T356
 T357
 T358
 T359
 T360
 T361
 T362
 T363
 T364
 T365
 T366
 T367
 T368
 T369
 T370
 T371
 T372
 T373
 T374
 T375
 T376
 T377
 T378
 T379
 T380
 T381
 T382
 T383
 T384
 T385
 T386
 T387
 T388
 T389
 T390
 T391
 T392
 T393
 T394
 T395
 T396
 T397
 T398
 T399
 T400
 T401
 T402
 T403
 T404
 T405
 T406
 T407
 T408
 T409
 T410
 T411
 T412
 T413
 T414
 T415
 T416
 T417
 T418
 T419
 T420
 T421
 T422
 T423
 T424
 T425
 T426
 T427
 T428
 T429
 T430
 T431
 T432
 T433
 T434
 T435
 T436
 T437
 T438
 T439
 T440
 T441
 T442
 T443
 T444
 T445
 T446
 T447
 T448
 T449
 T450
 T451
 T452
 T453
 T454
 T455
 T456
 T457
 T458
 T459
 T460
 T461
 T462
 T463
 T464
 T465
 T466
 T467
 T468
 T469
 T470
 T471
 T472
 T473
 T474
 T475
 T476
 T477
 T478
 T479
 T480
 T481
 T482
 T483
 T484
 T485
 T486
 T487
 T488
 T489
 T490
 T491
 T492
 T493
 T494
 T495
 T496

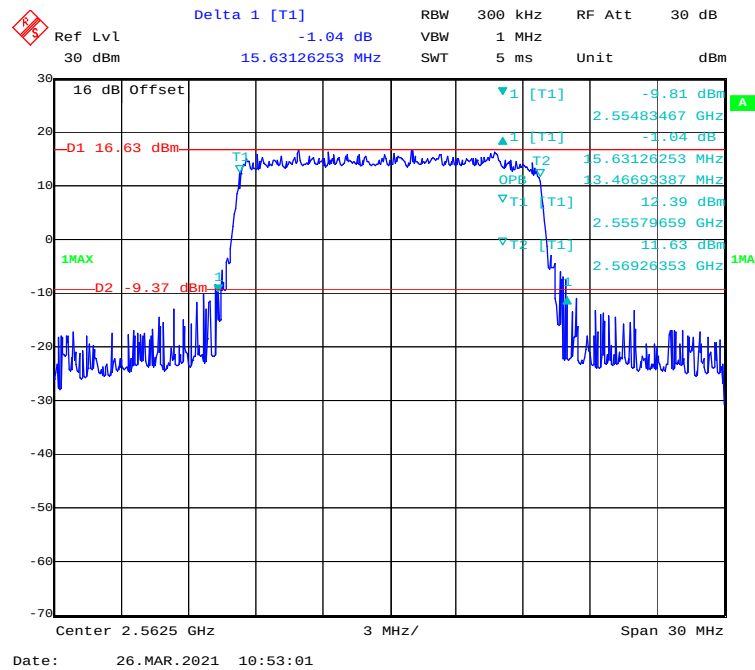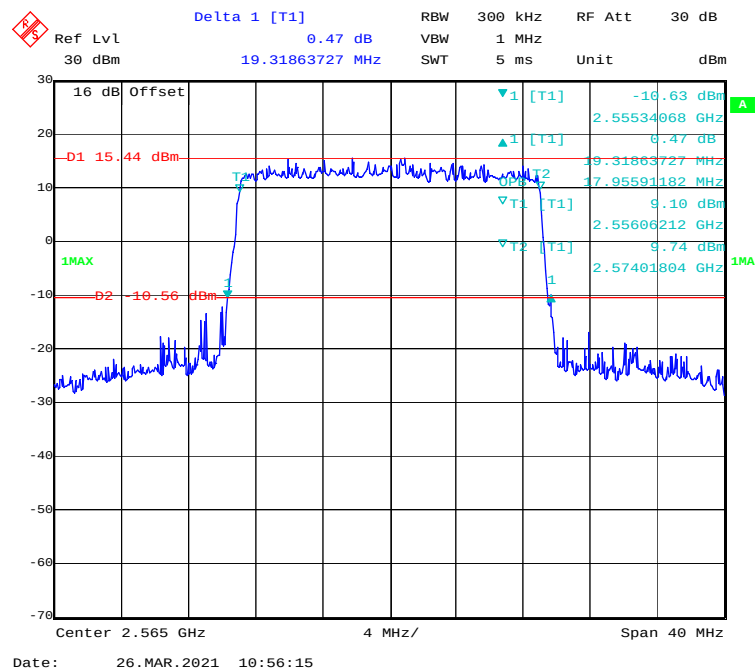
16-QAM (15.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Low channel**16-QAM (20.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Low channel**

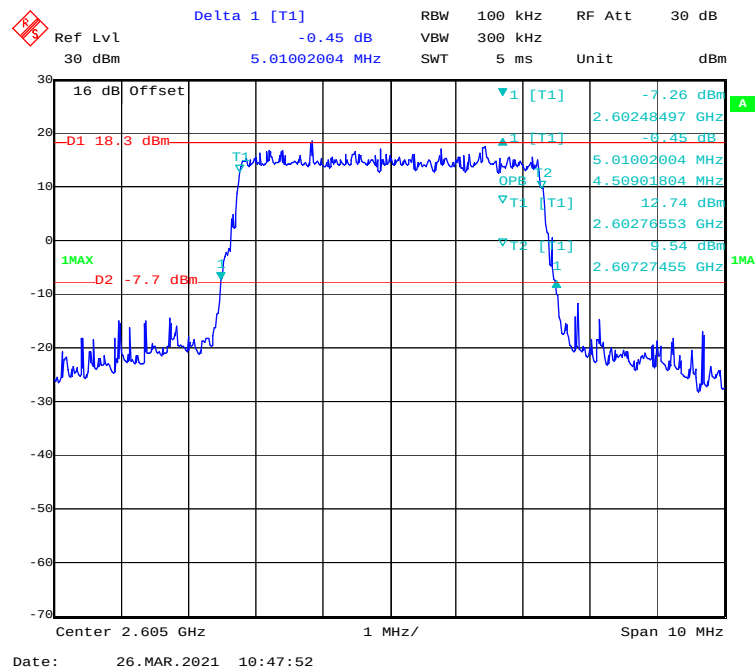
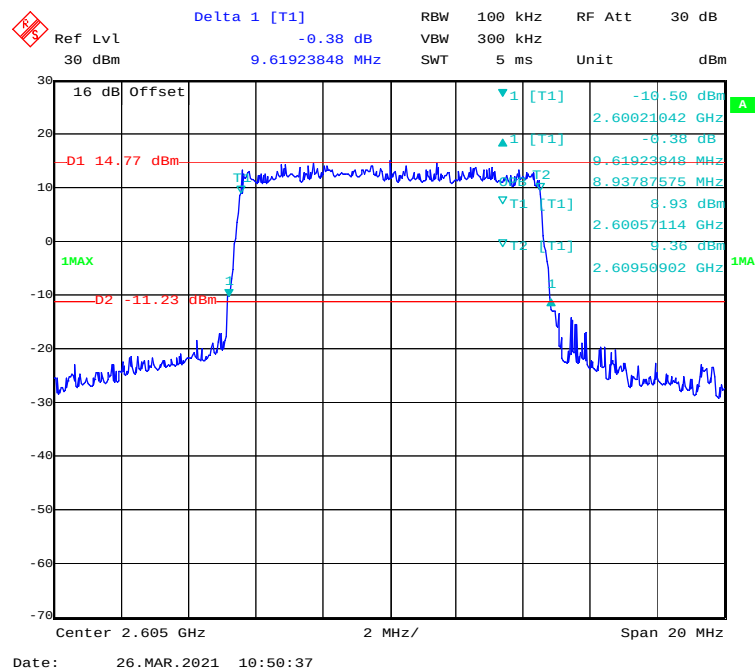
QPSK (5.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel**QPSK (10.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel**



QPSK (15.0MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel


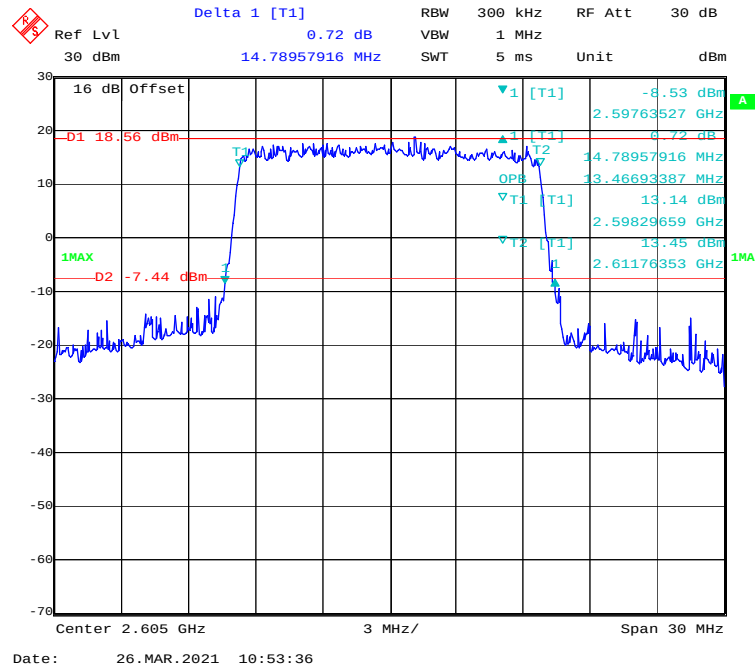




QPSK (20.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel


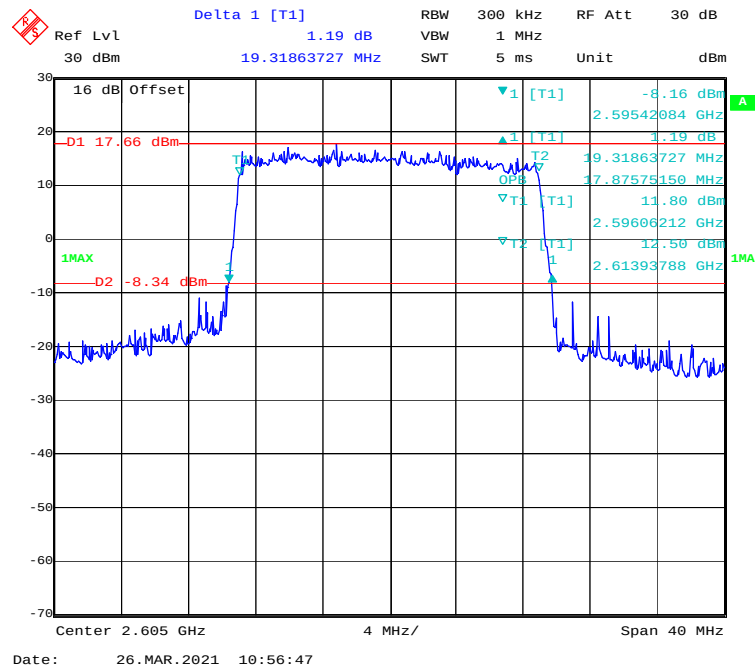


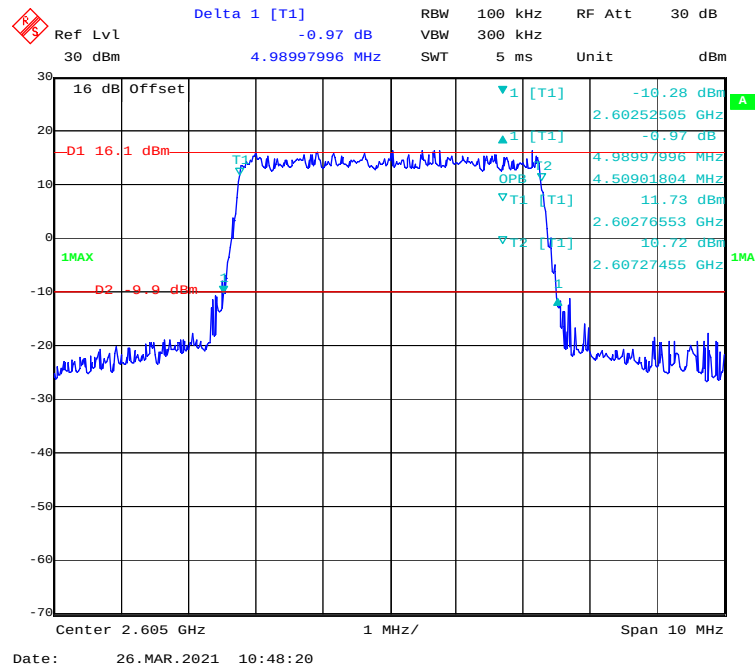
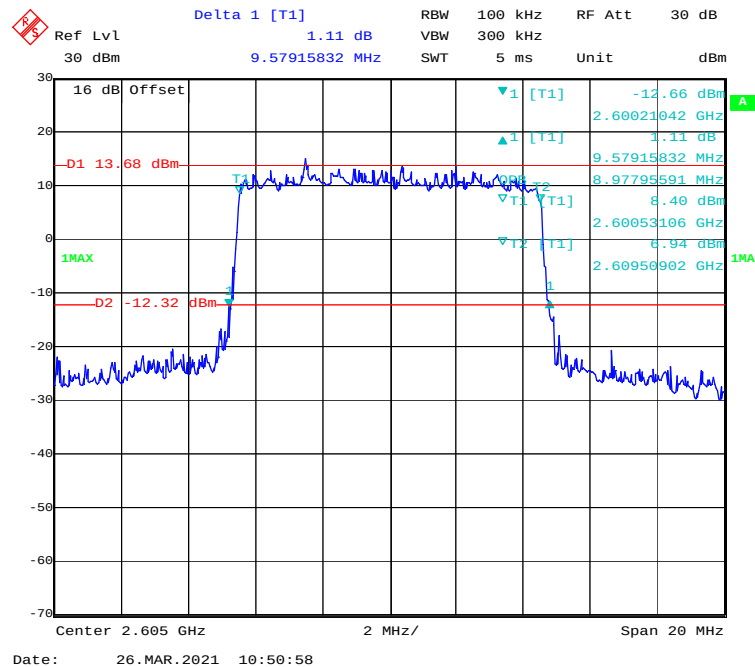
16-QAM (5.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel**16-QAM (10.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel**

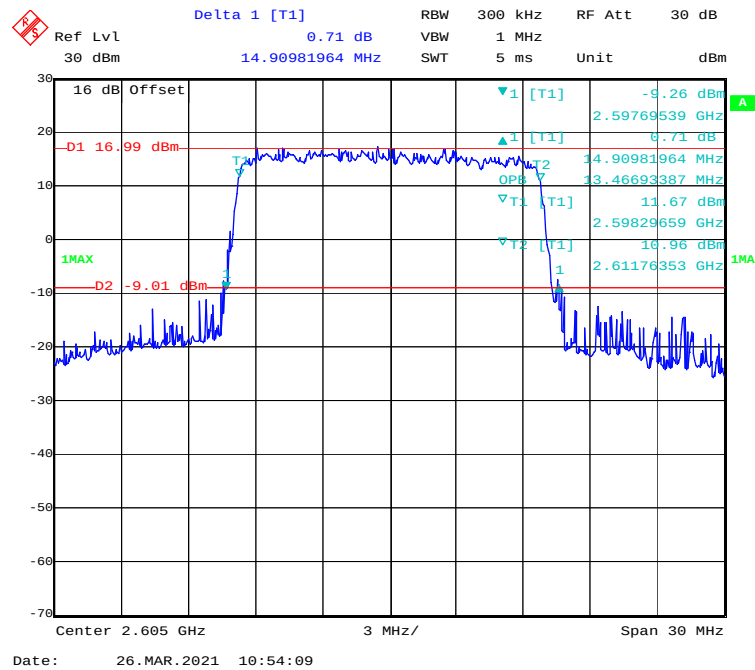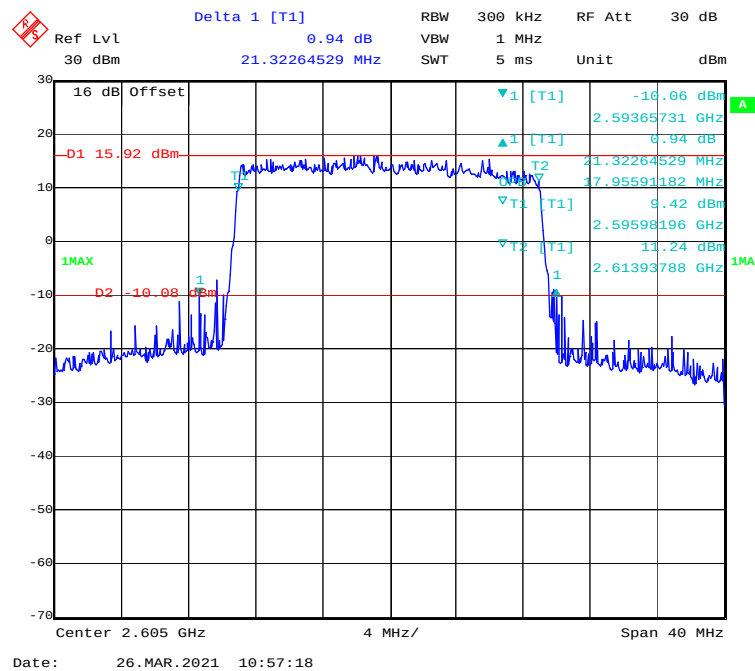16-QAM (15.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel**16-QAM (20.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, Middle channel**

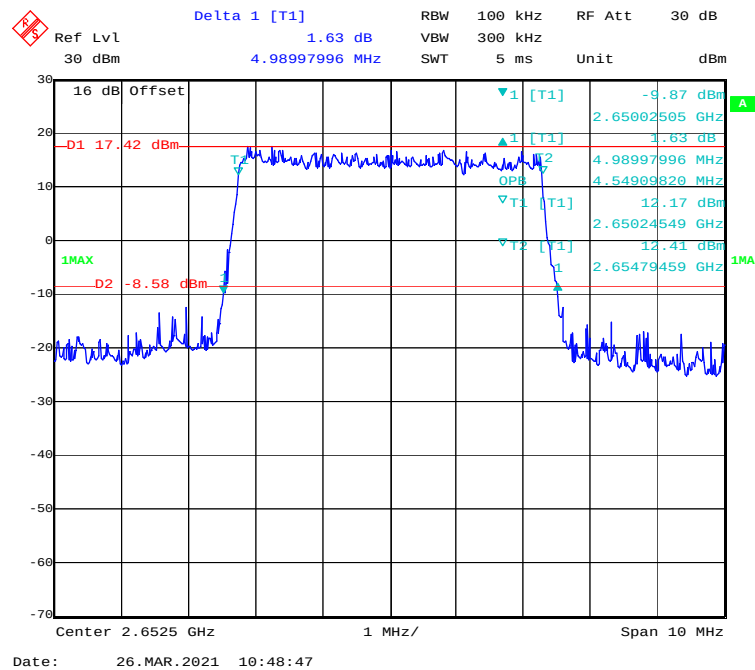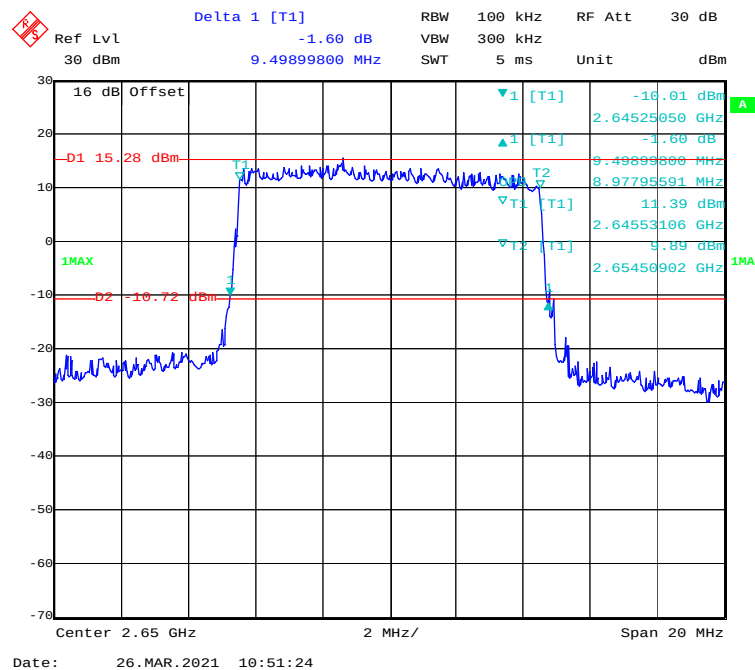QPSK (5.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**QPSK (10.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**

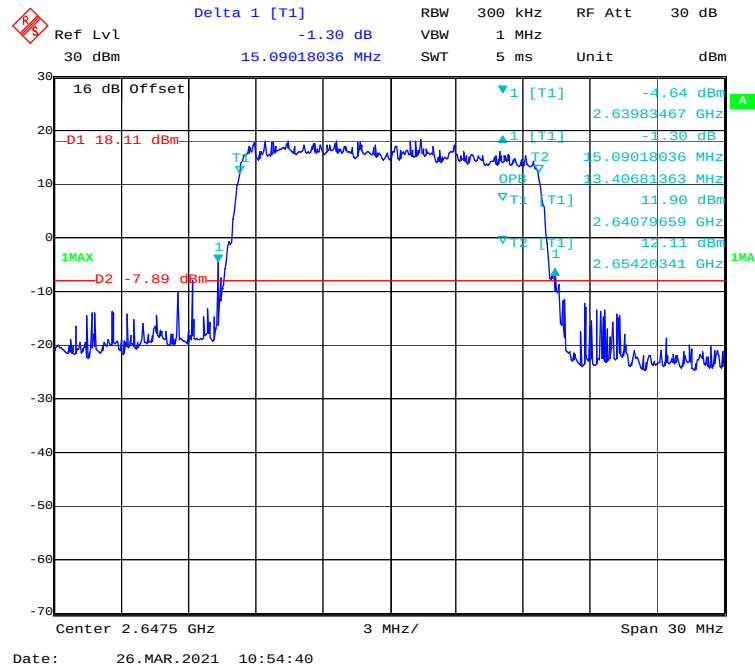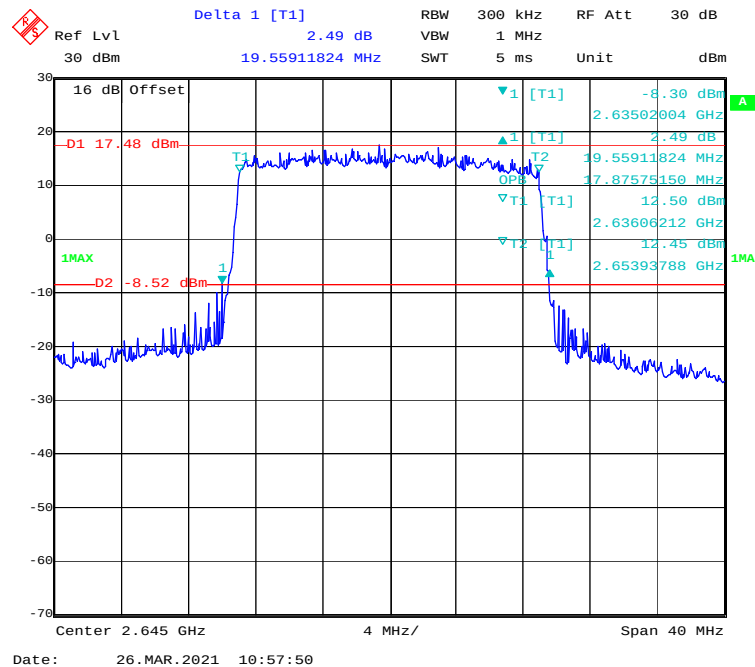QPSK (15.0MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**QPSK (20.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**

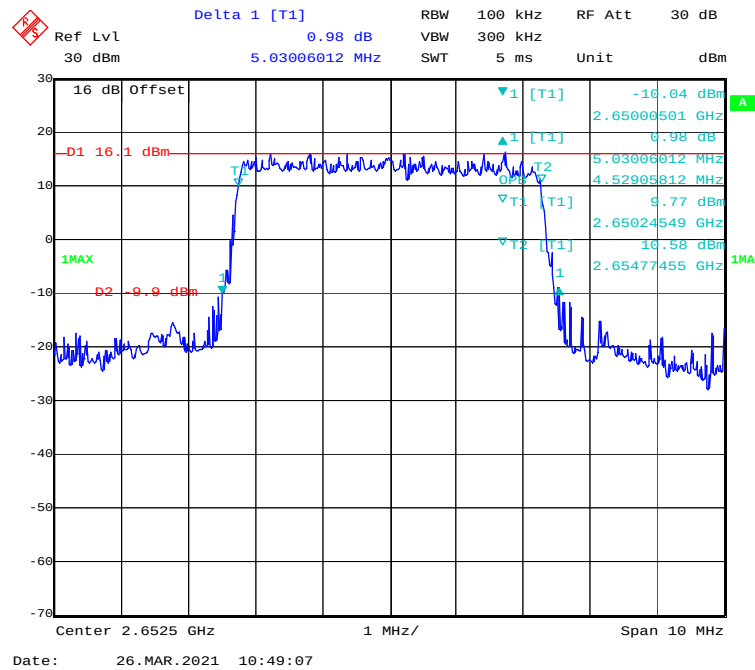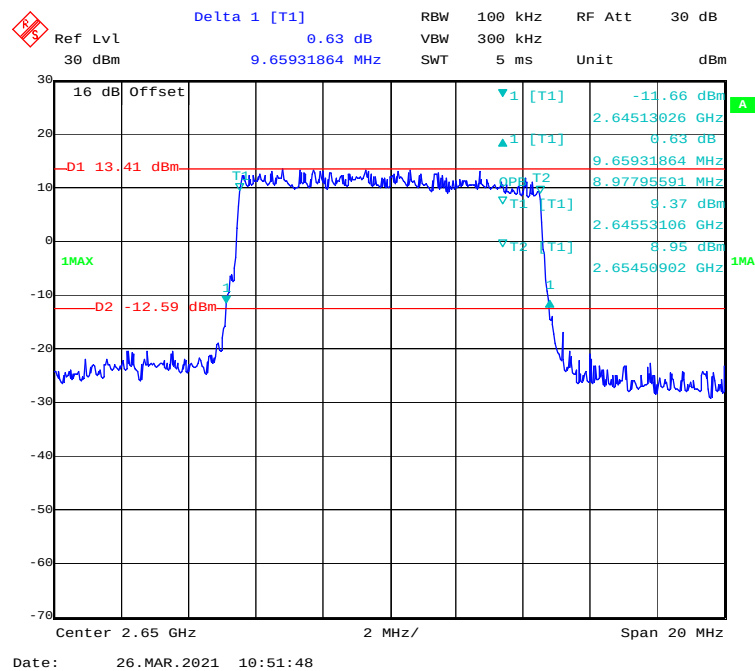16-QAM (5.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**16-QAM (10.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**

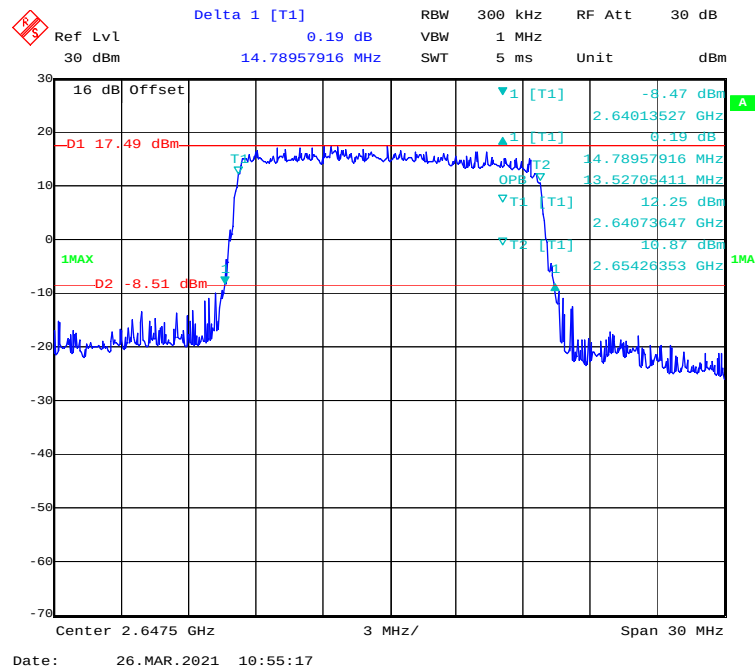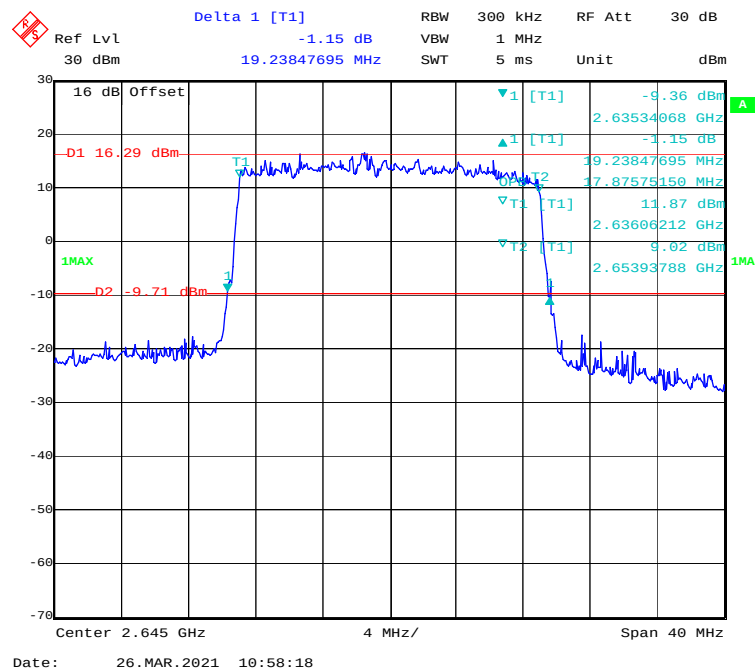16-QAM (15.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**16-QAM (20.0 MHz) - 99% Occupied & 26 dB Emissions Bandwidth, High channel**

FCC § 2.1051 & § 22.917 (a); §27.53 (m) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standards


FCC §2.1051, §22.917(a) and §27.53 (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

According to §27.53(a) (h) (m), for mobile digital stations, any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $55 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz & 1MHz for above 1GHz. sufficient scans were taken to show any out of band emissions up to 10th harmonic.

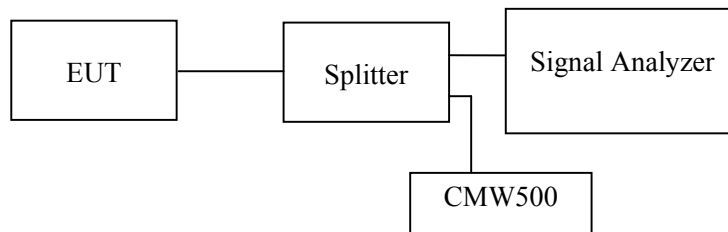

Test Data

Environmental Conditions

Temperature:	24.9 °C
Relative Humidity:	52 %
ATM Pressure:	100.7 kPa


The testing was performed by Stone Zhang on 2021-03-26.

EUT operation mode: Transmitting


Test Result: Compliance.

LTE Band 5:


30 MHz – 1 GHz (QPSK, 1.4 MHz, Low Channel)

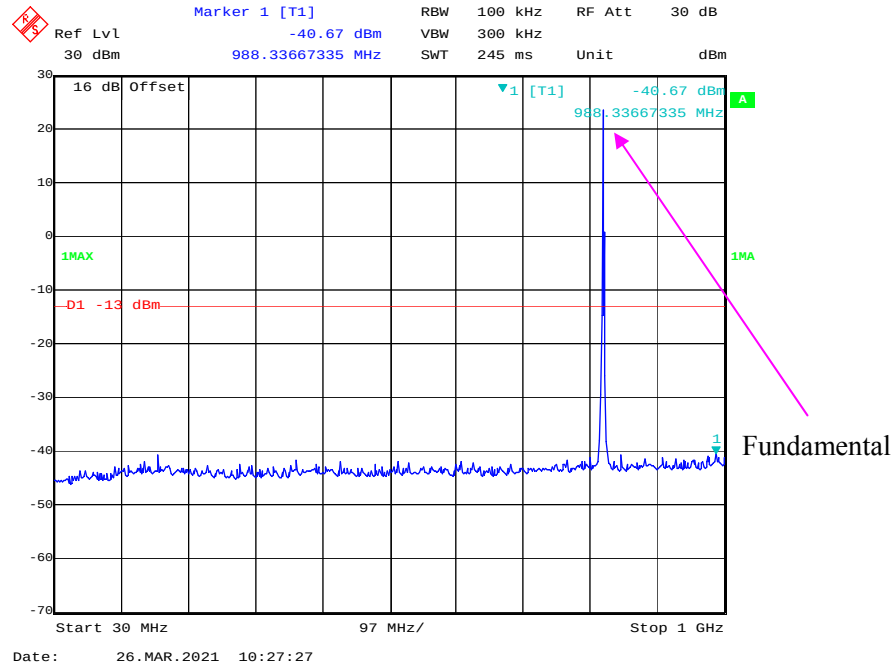


1 GHz – 10 GHz (QPSK, 1.4 MHz, Low Channel)

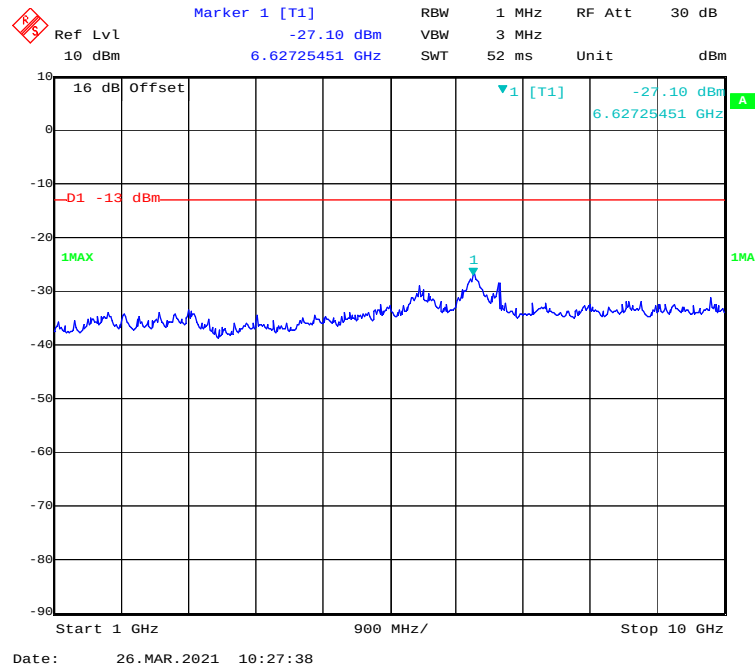


30 MHz – 1 GHz (QPSK, 3.0 MHz, Low Channel)

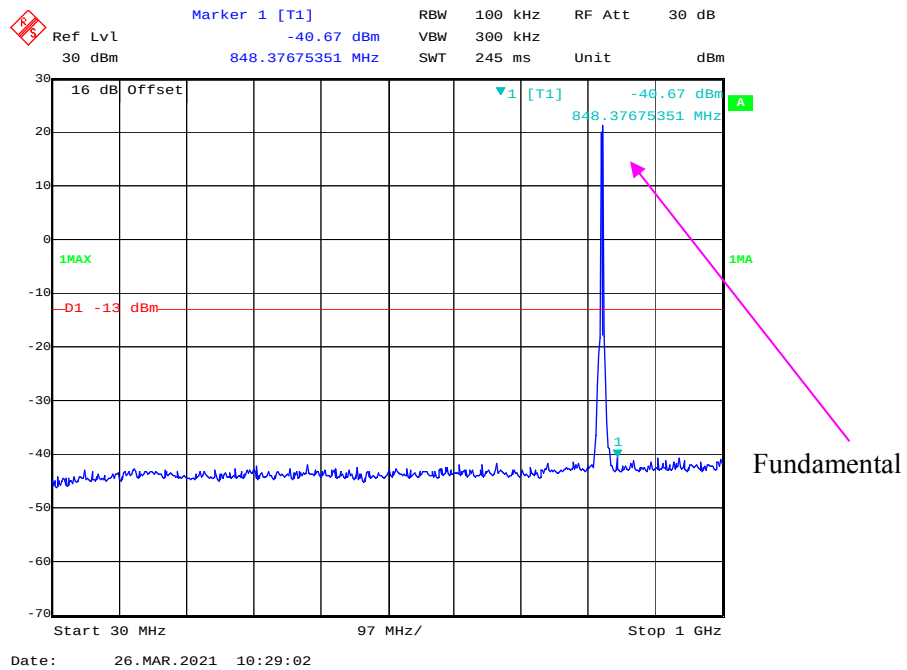


1 GHz – 10 GHz (QPSK, 3.0 MHz, Low Channel)

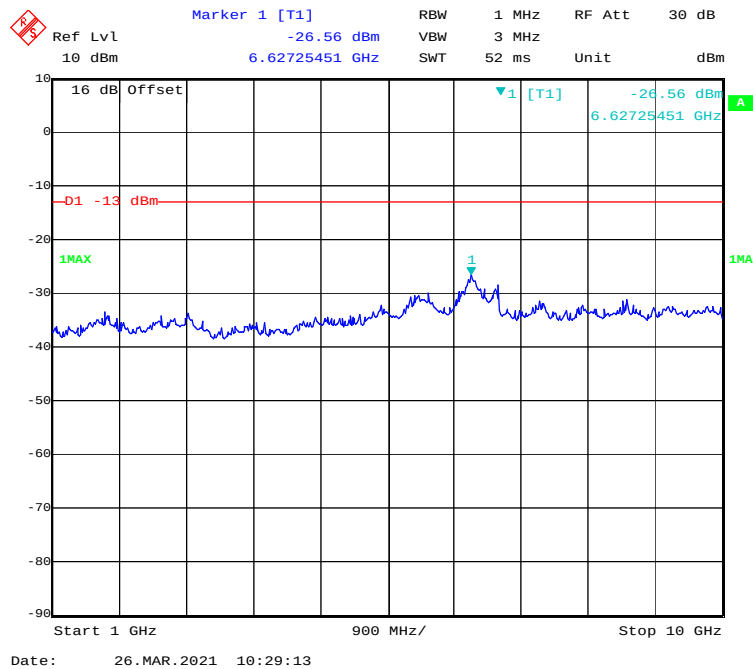


30 MHz – 1 GHz (QPSK, 5.0 MHz, Low Channel)

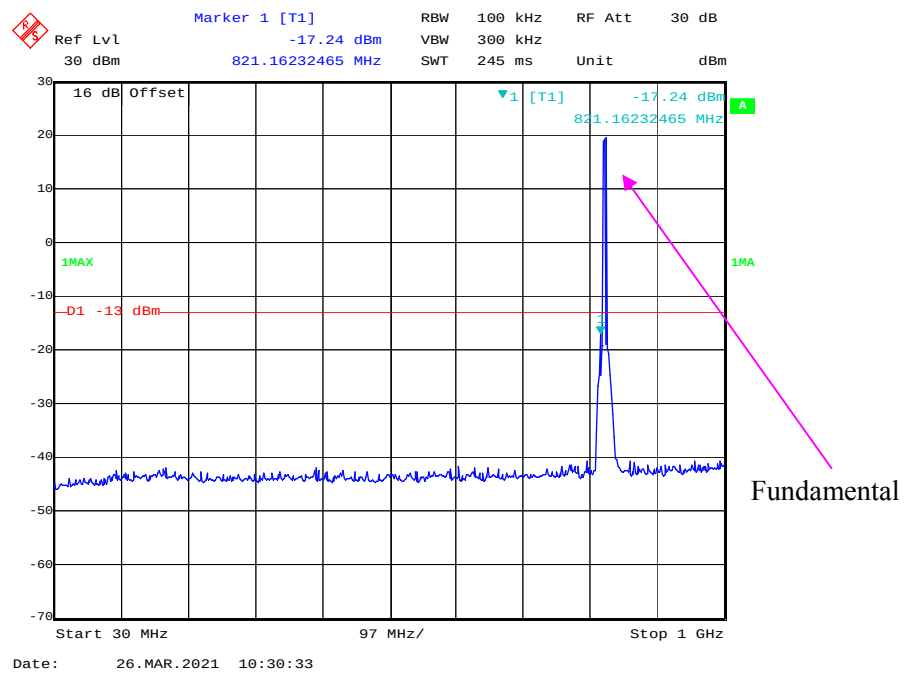


1 GHz – 10 GHz (QPSK, 5.0MHz, Low Channel)


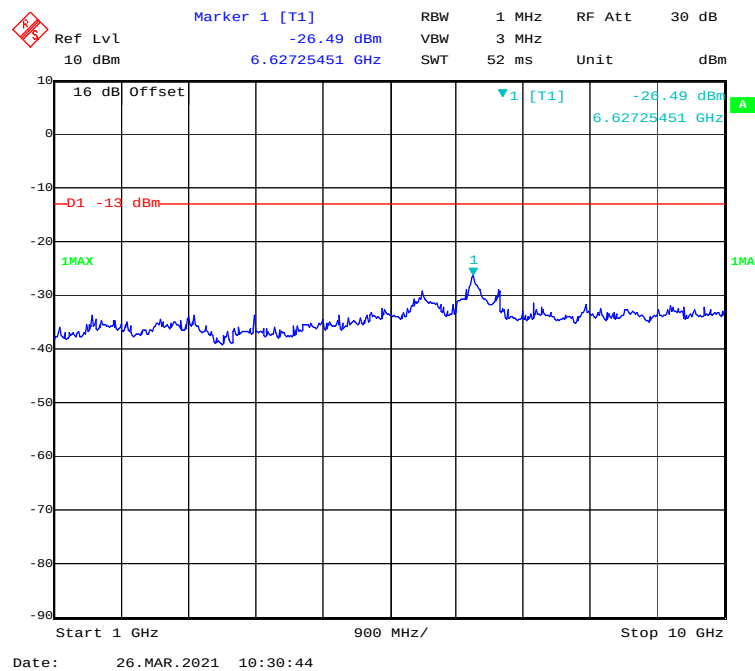


30 MHz – 1 GHz (QPSK, 10.0 MHz, Low Channel)

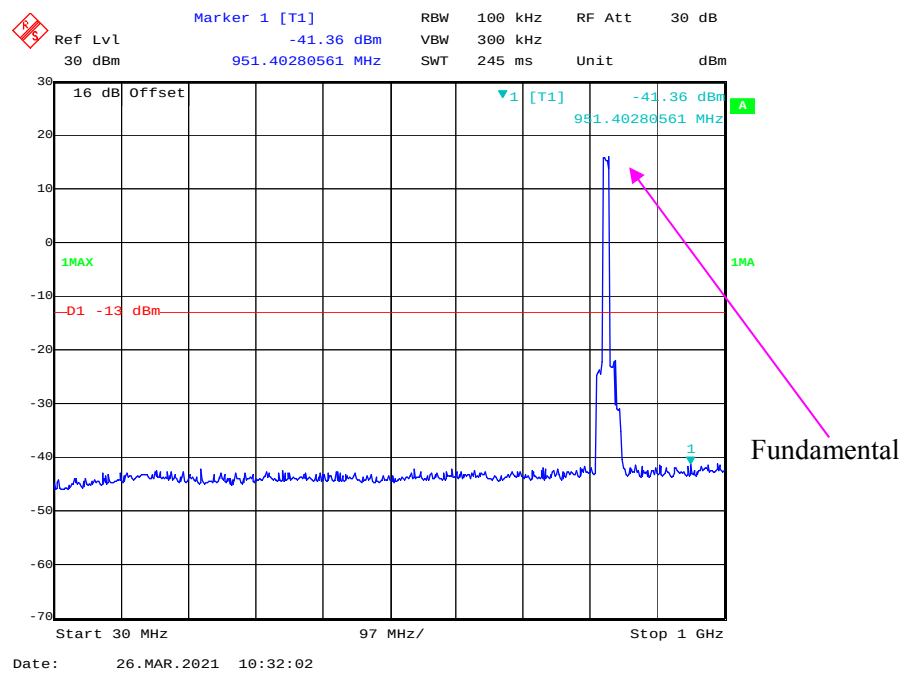


1 GHz – 10 GHz (QPSK, 10.0 MHz, Low Channel)

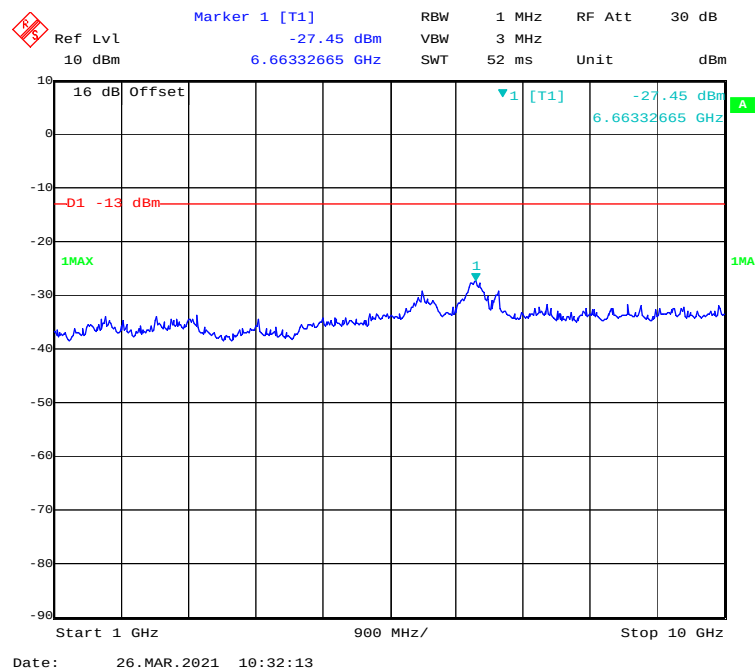


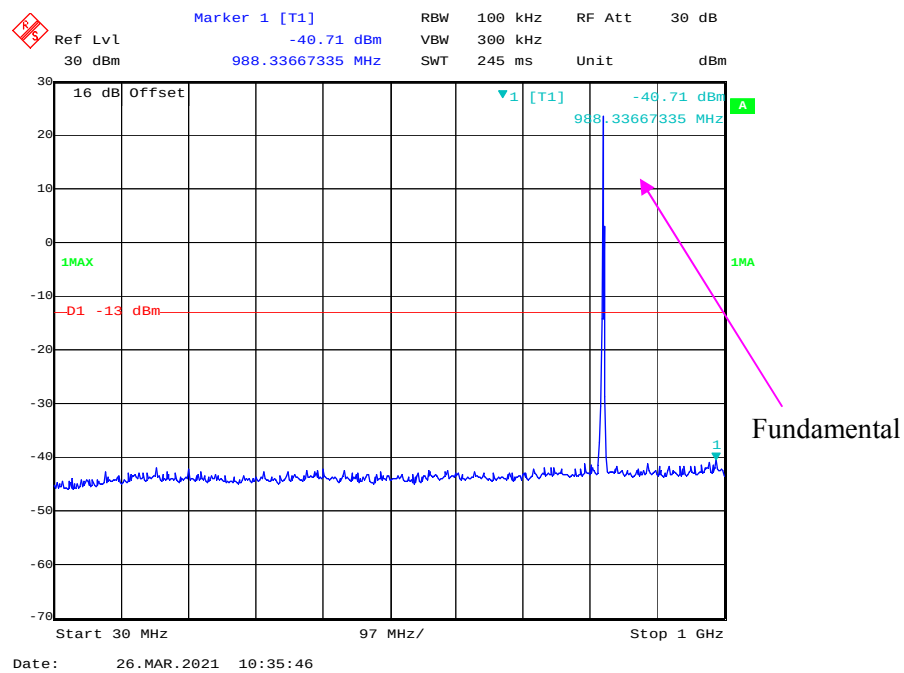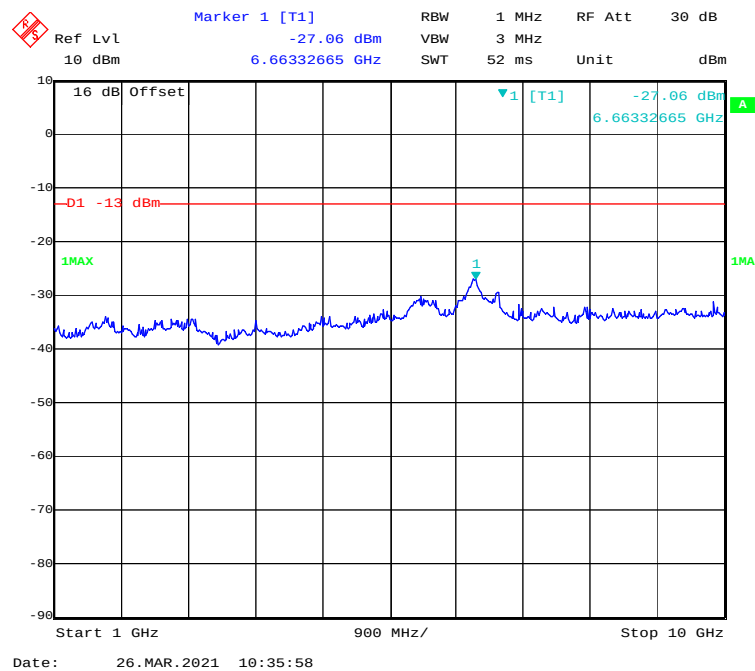30 MHz – 1 GHz (16QAM, 1.4 MHz, Low Channel)**1 GHz – 10 GHz (16QAM, 1.4 MHz, Low Channel)**


30 MHz – 1 GHz (16QAM, 3.0 MHz, Low Channel)

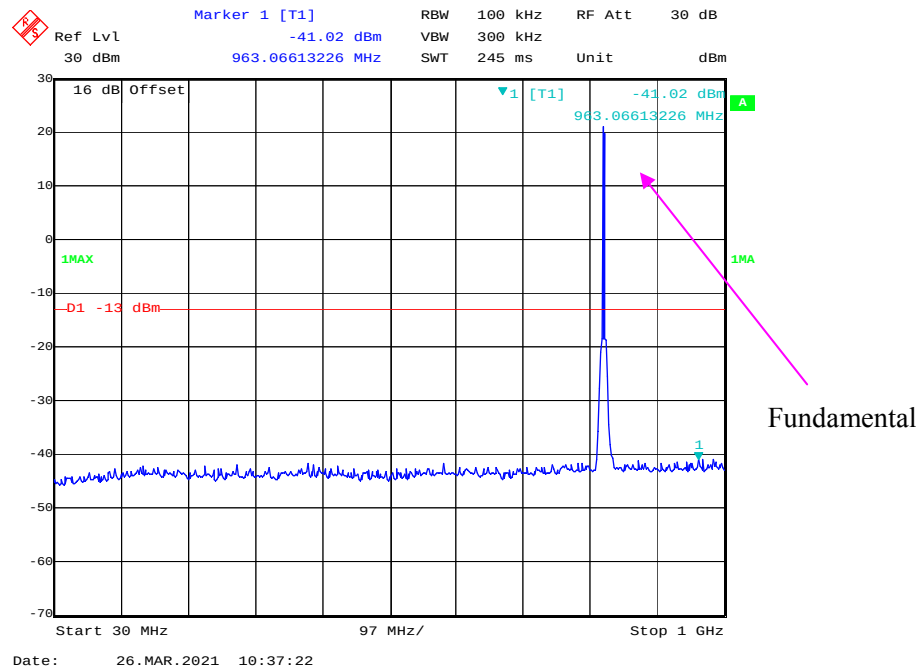


1 GHz – 10 GHz (16QAM, 3.0 MHz, Low Channel)

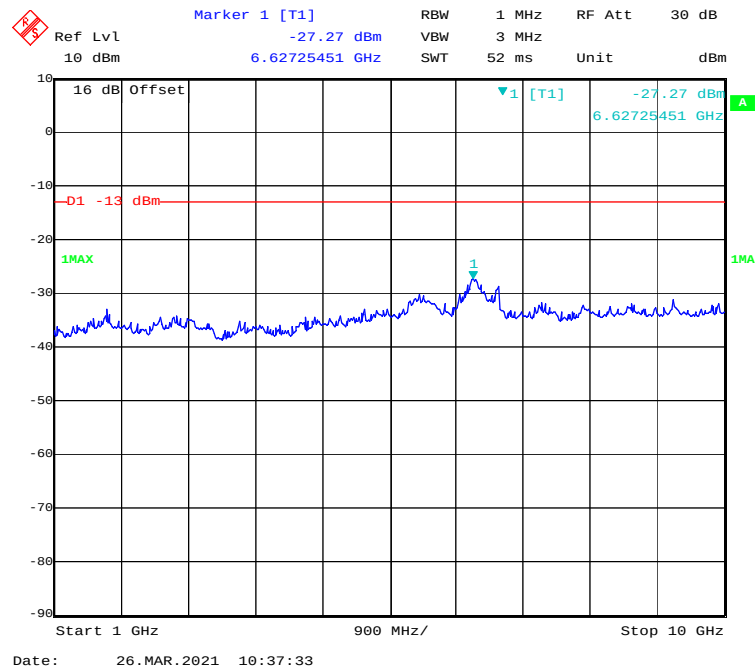


30 MHz – 1 GHz (16QAM, 5.0 MHz, Low Channel)

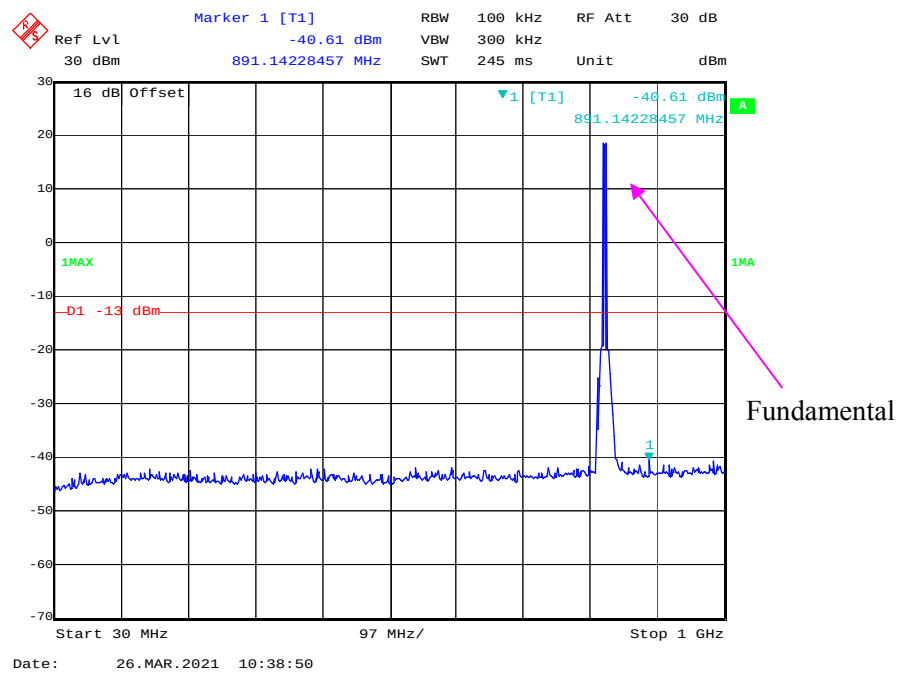


1 GHz – 10 GHz (16QAM, 5.0MHz, Low Channel)

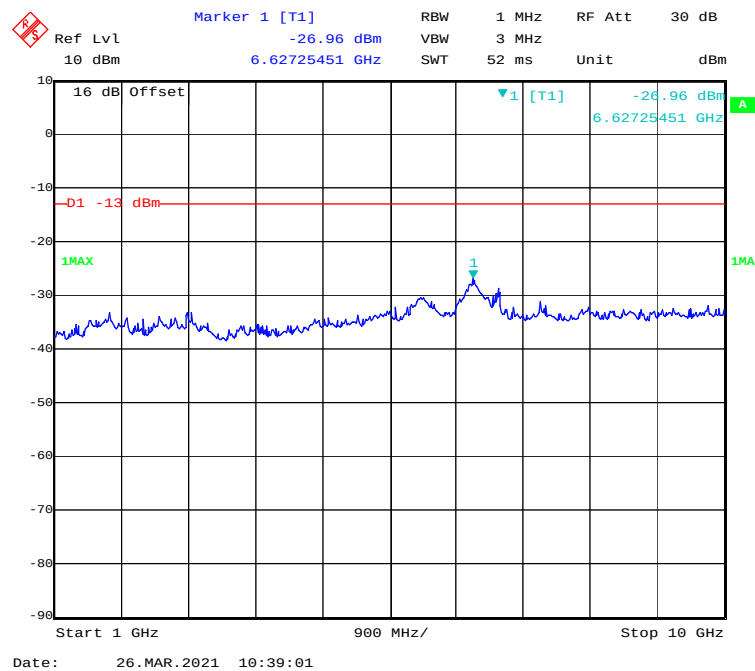


30 MHz – 1 GHz (16QAM, 10.0 MHz, Low Channel)

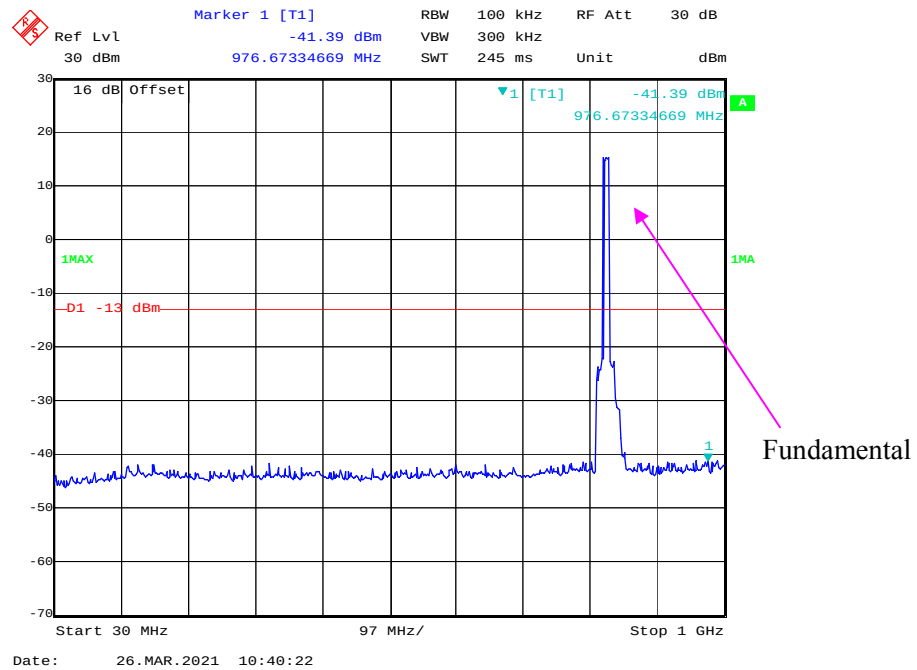


1 GHz – 10 GHz (16QAM, 10.0 MHz, Low Channel)

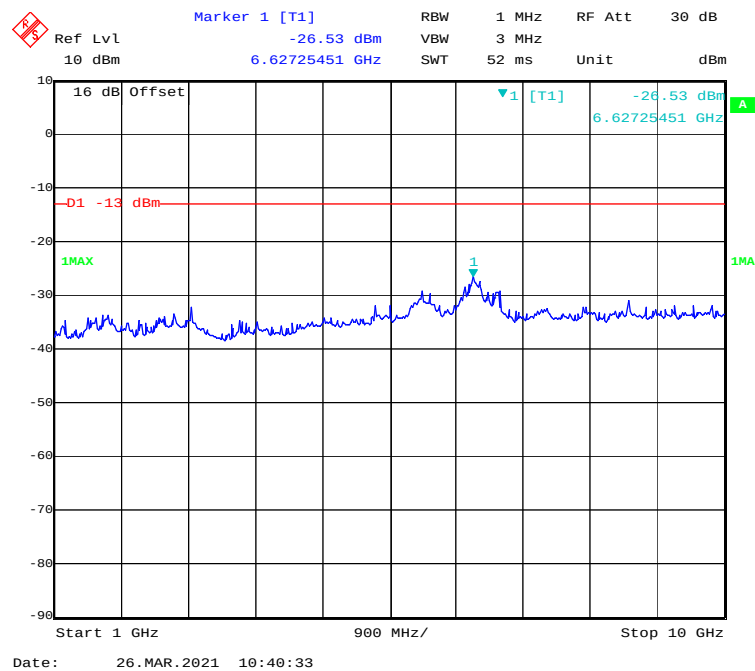


30 MHz – 1 GHz (QPSK, 1.4 MHz, Middle Channel)

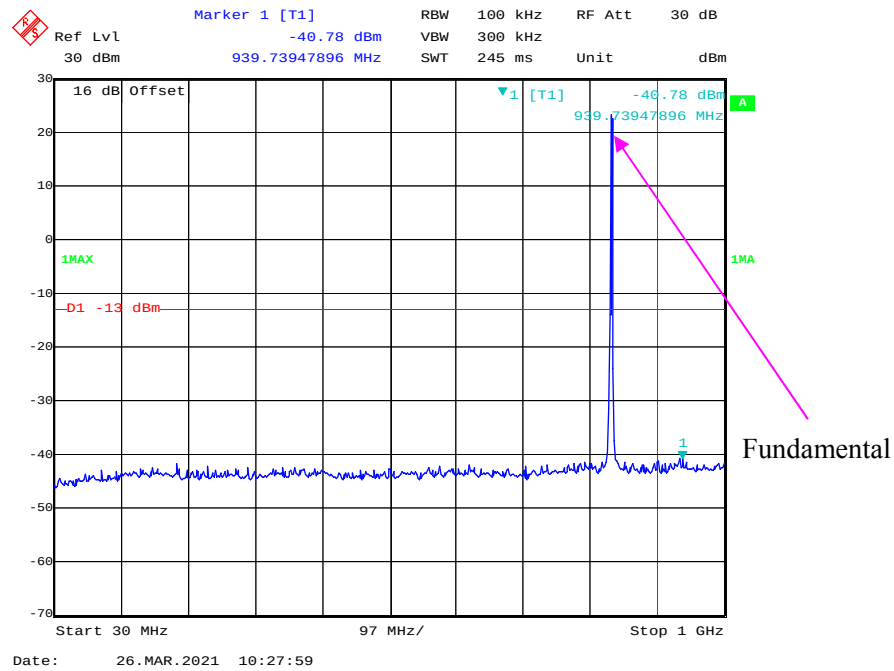


1 GHz – 10 GHz (QPSK, 1.4 MHz, Middle Channel)

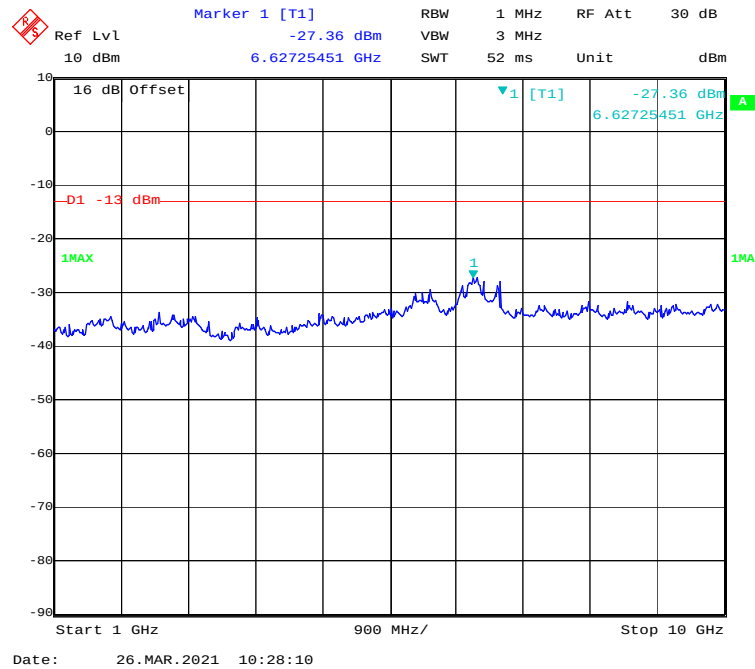

30 MHz – 1 GHz (QPSK, 3.0 MHz, Middle Channel)

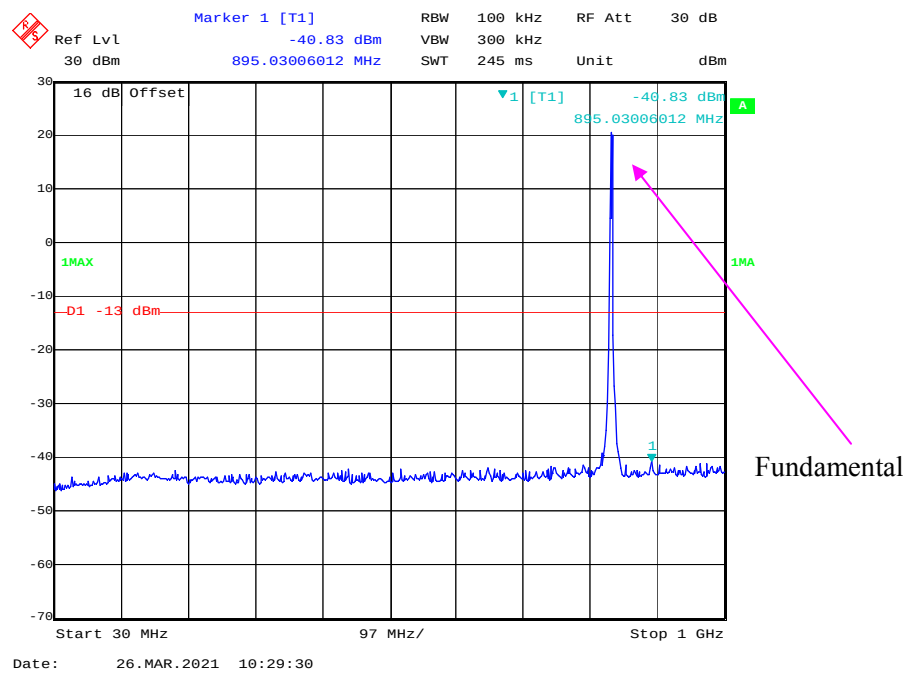

1 GHz – 10 GHz (QPSK, 3.0 MHz, Middle Channel)

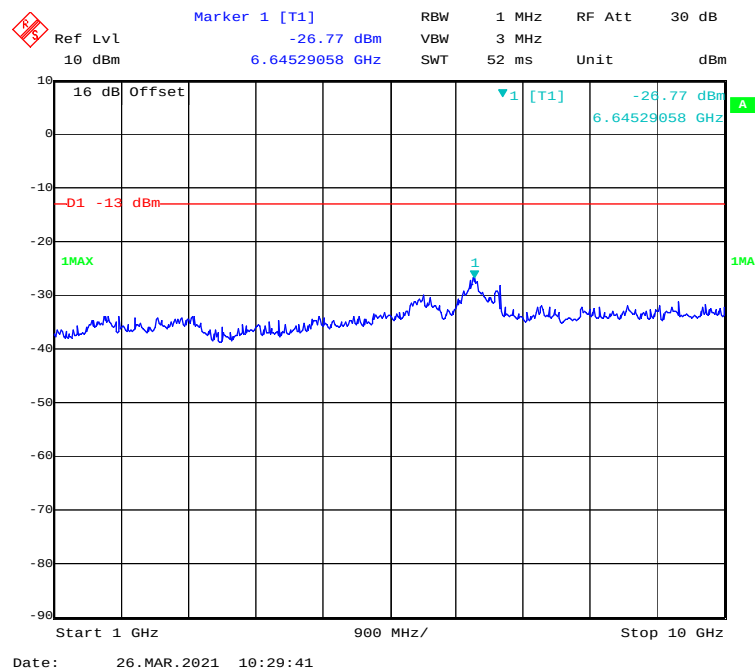



Marker 1 [T1]
 Ref Lvl -41.42 dBm
 RBW 100 kHz
 VBW 300 kHz
 RF Att 30 dB
 30 dBm
 797.83567134 MHz
 SWT 245 ms
 Unit dBm

16 dB Offset
 1MAX
 -D1 -13 dBm
 1
 -41.42 dBm
 797.83567134 MHz
 1MA
 Fundamental


Start 30 MHz
 97 MHz/
 Stop 1 GHz

Date: 26.MAR.2021 10:31:01


A 3
 Ref Lvl 10 dBm
 Marker 1 [T1] -26.87 dBm
 RBW 1 MHz
 VBW 3 MHz
 SWT 52 ms
 RF Att 30 dB
 Unit dBm
 16 dB Offset
 -D1 -13 dBm
 1MAX
 1
 -26.87 dBm
 6.62725451 GHz
 Start 1 GHz 900 MHz/ Stop 10 GHz
 Date: 26.MAR.2021 10:31:12

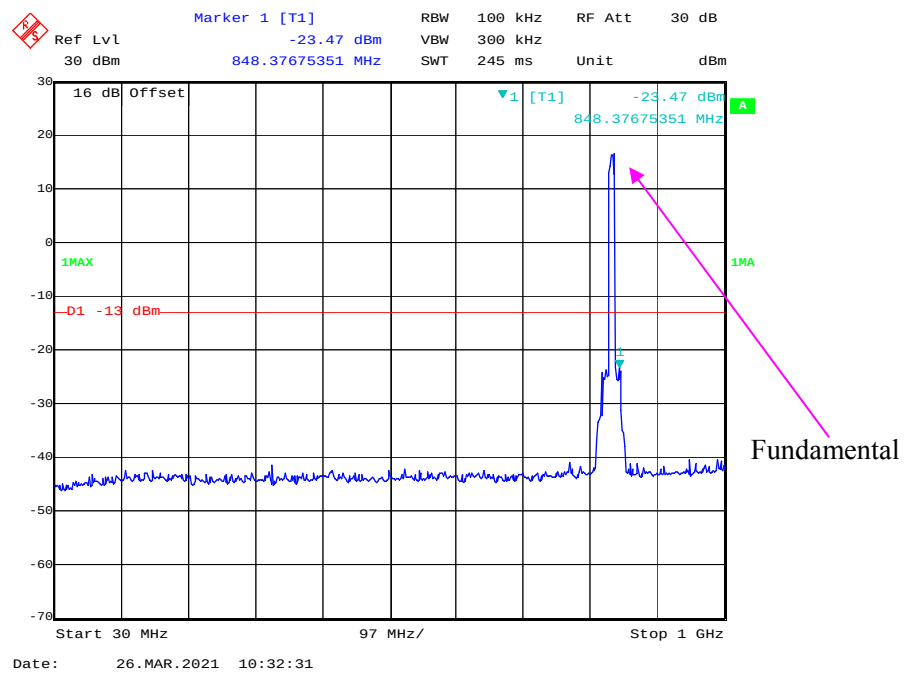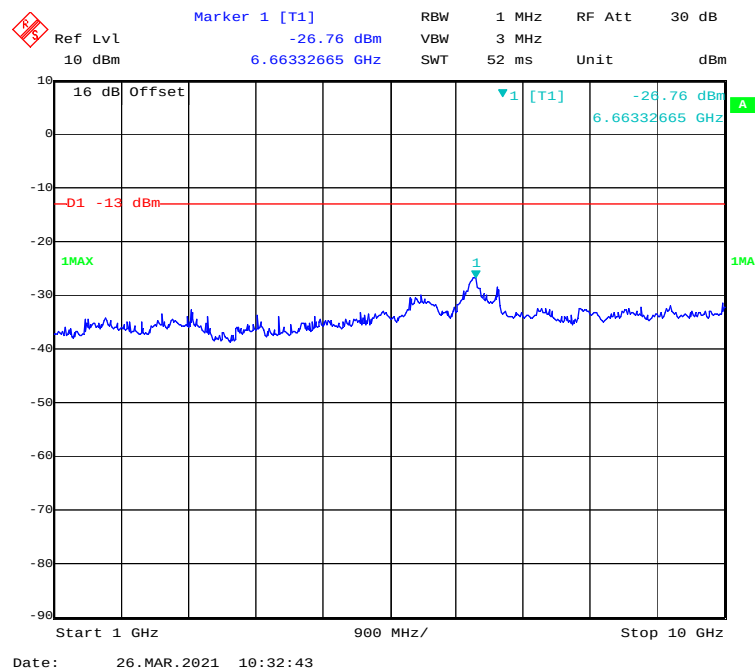30 MHz – 1 GHz (QPSK, 10.0 MHz, Middle Channel)**1 GHz – 10 GHz (QPSK, 10.0 MHz, Middle Channel)**


30 MHz – 1 GHz (16QAM, 1.4 MHz, Middle Channel)

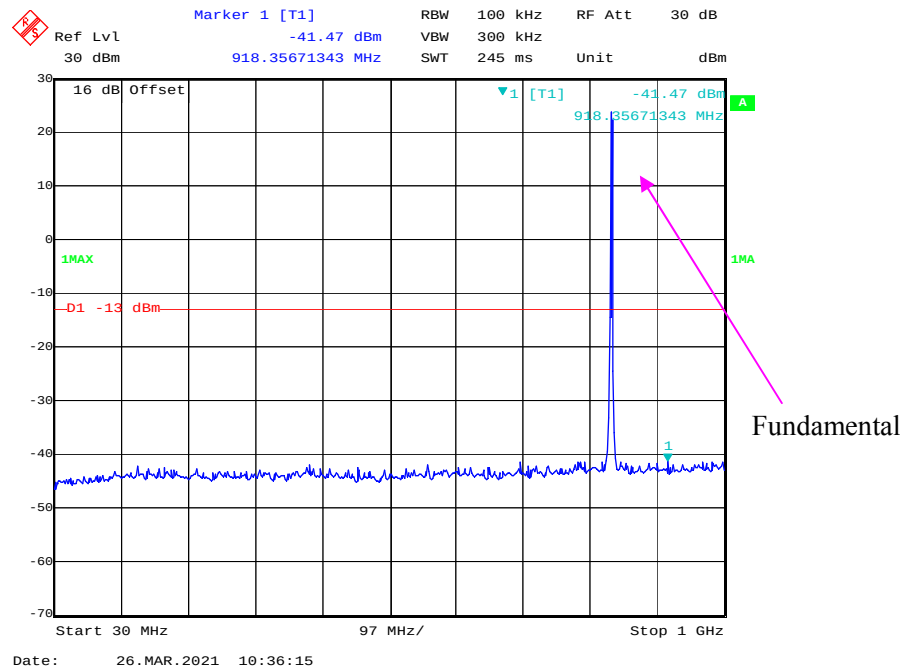


1 GHz – 10 GHz (16QAM, 1.4 MHz, Middle Channel)

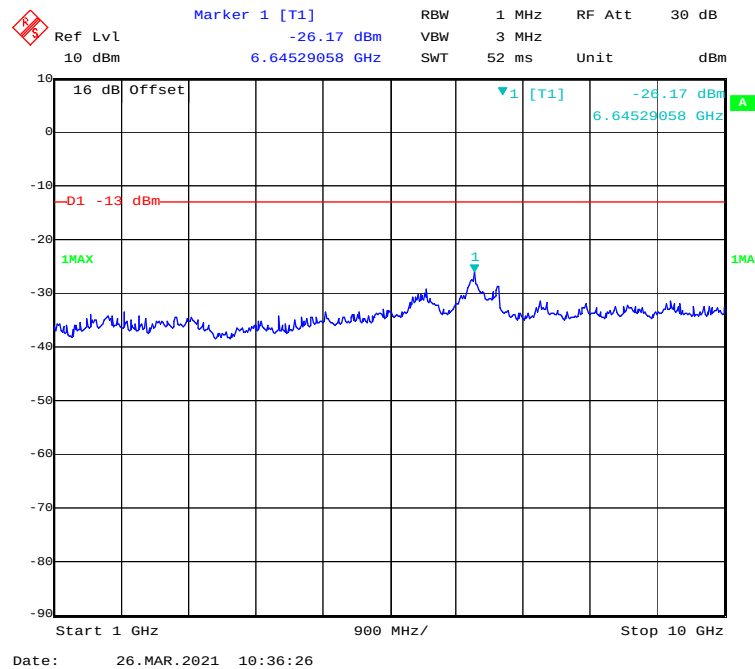


30 MHz – 1 GHz (16QAM, 3.0 MHz, Middle Channel)

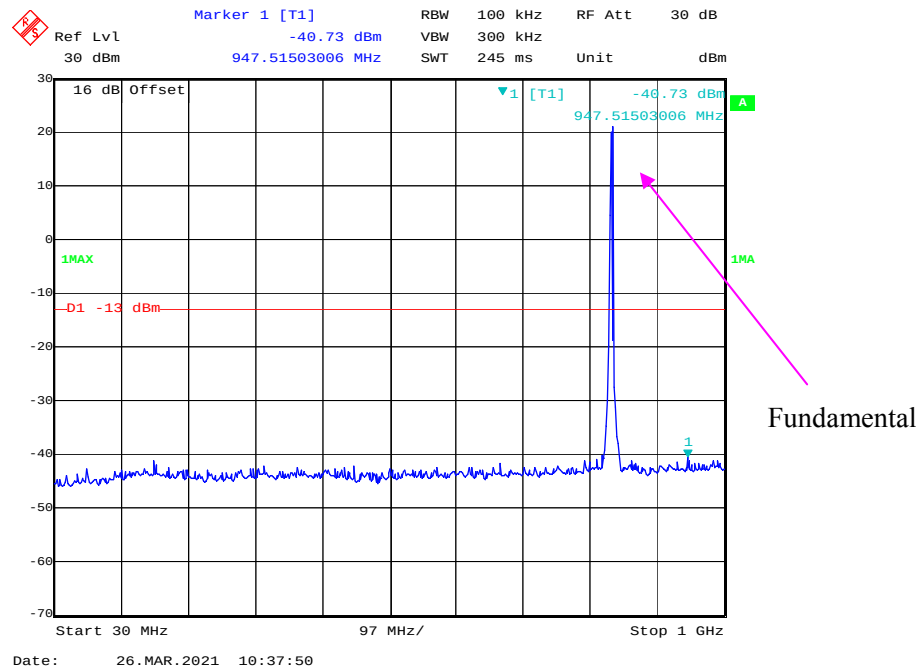


1 GHz – 10 GHz (16QAM, 3.0 MHz, Middle Channel)

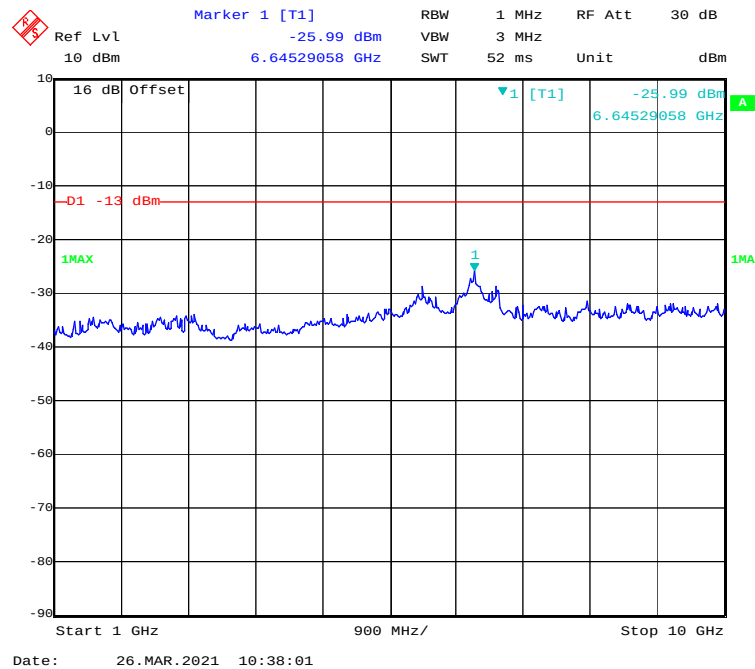


30 MHz – 1 GHz (16QAM, 5.0 MHz, Middle Channel)

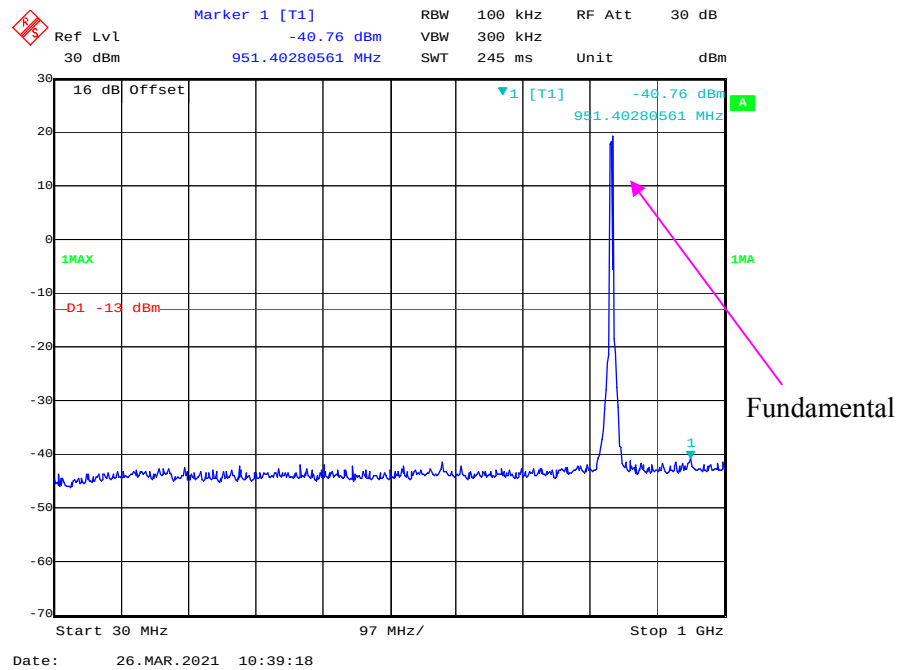


1 GHz – 10 GHz (16QAM, 5.0MHz, Middle Channel)

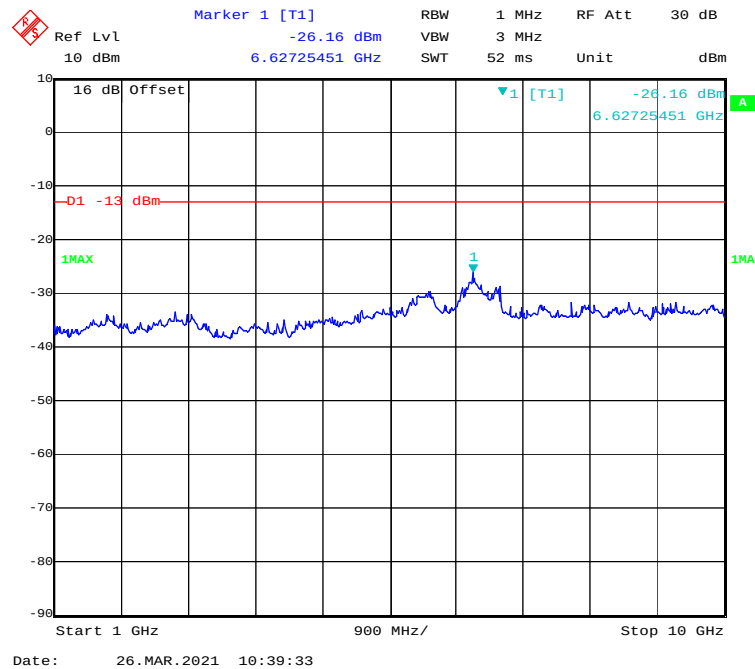


30 MHz – 1 GHz (16QAM, 10.0 MHz, Middle Channel)

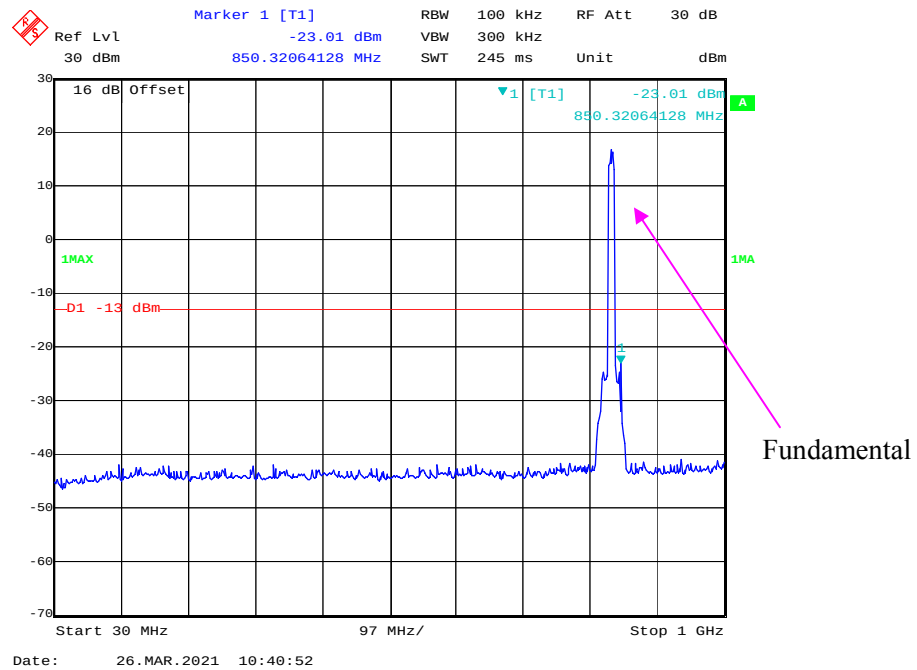


1 GHz – 10 GHz (16QAM, 10.0 MHz, Middle Channel)


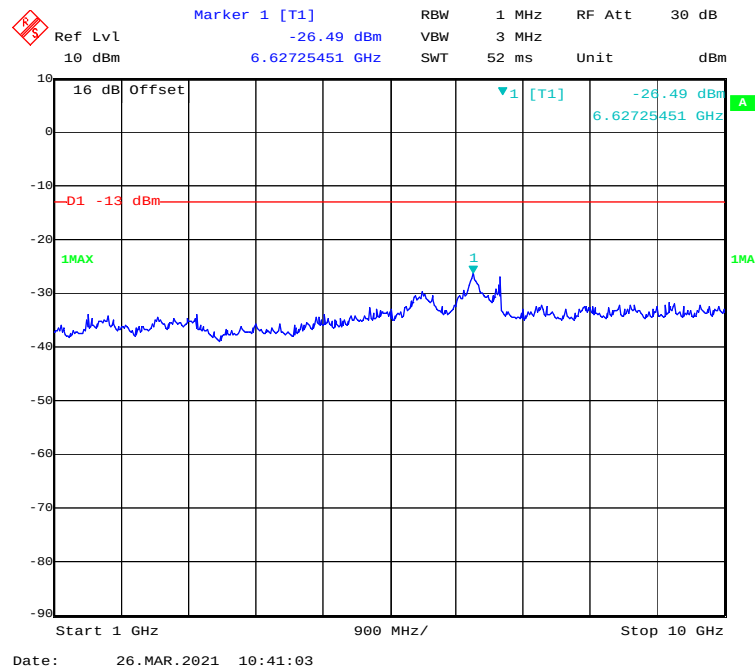


30 MHz – 1 GHz (QPSK, 1.4 MHz, High Channel)

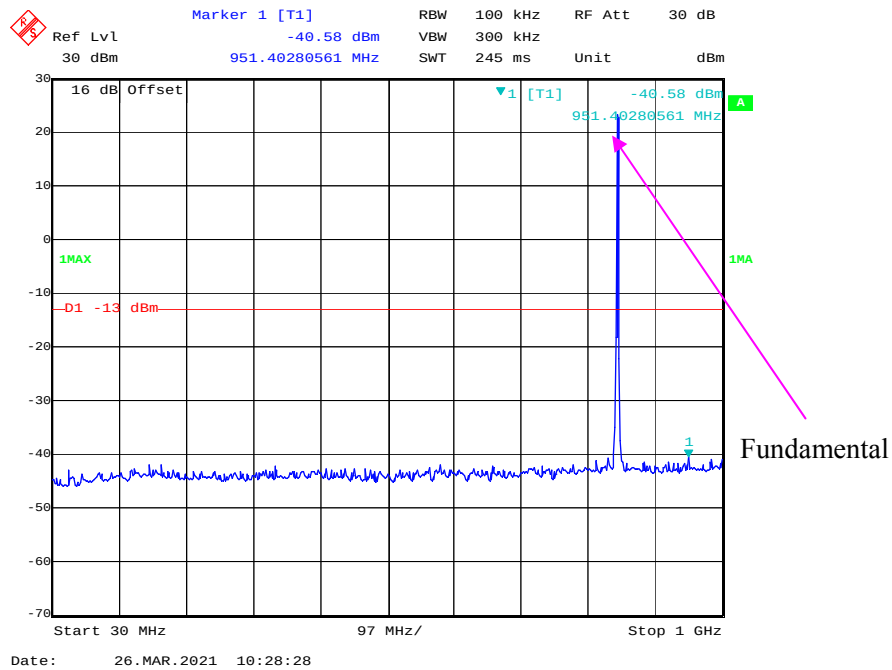


1 GHz – 10 GHz (QPSK, 1.4 MHz, High Channel)

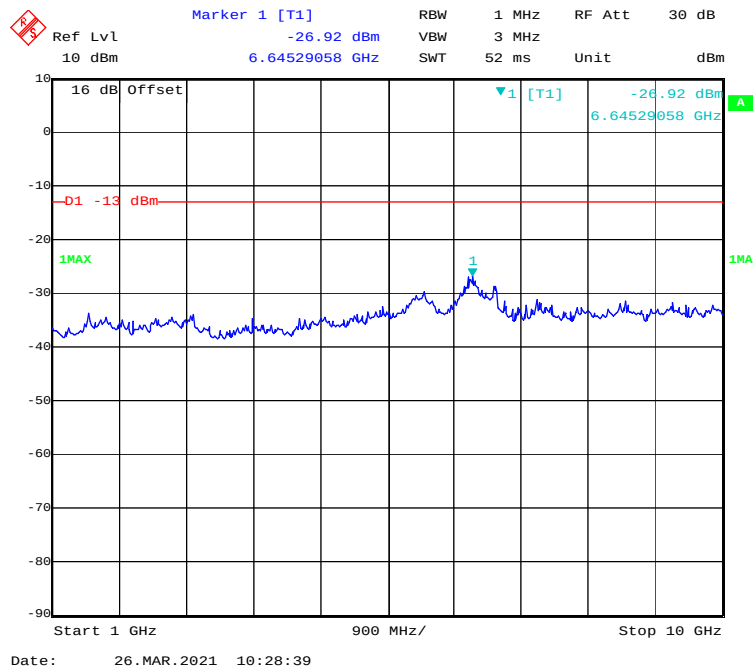


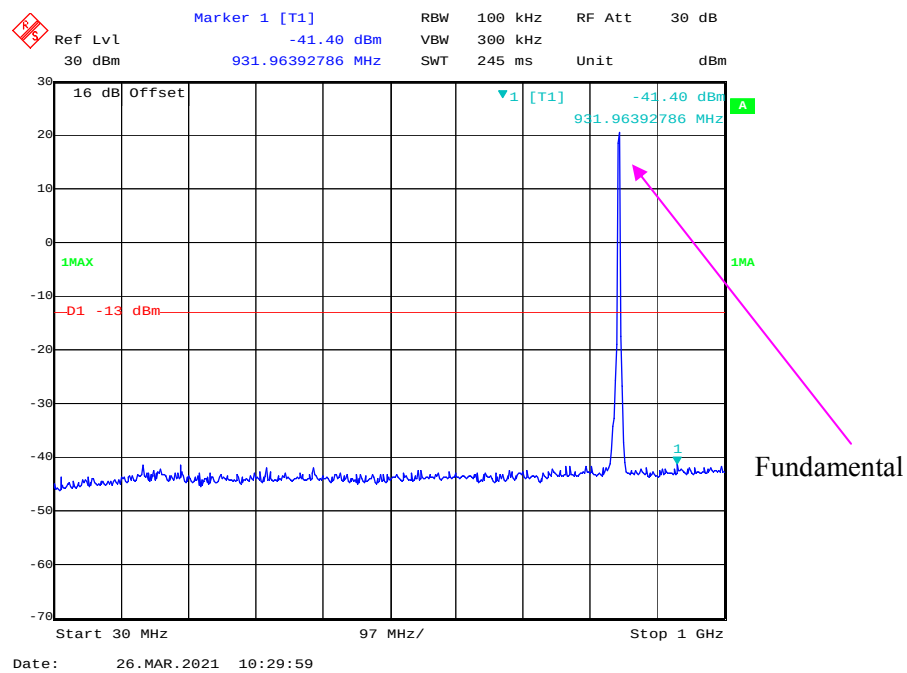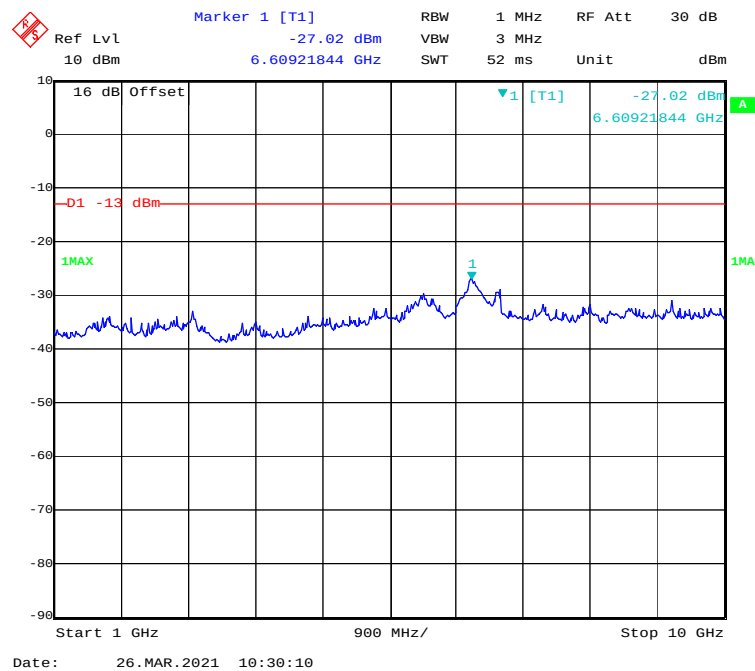30 MHz – 1 GHz (QPSK, 3.0 MHz, High Channel)**1 GHz – 10 GHz (QPSK, 3.0 MHz, High Channel)**


30 MHz – 1 GHz (QPSK, 5.0 MHz, High Channel)

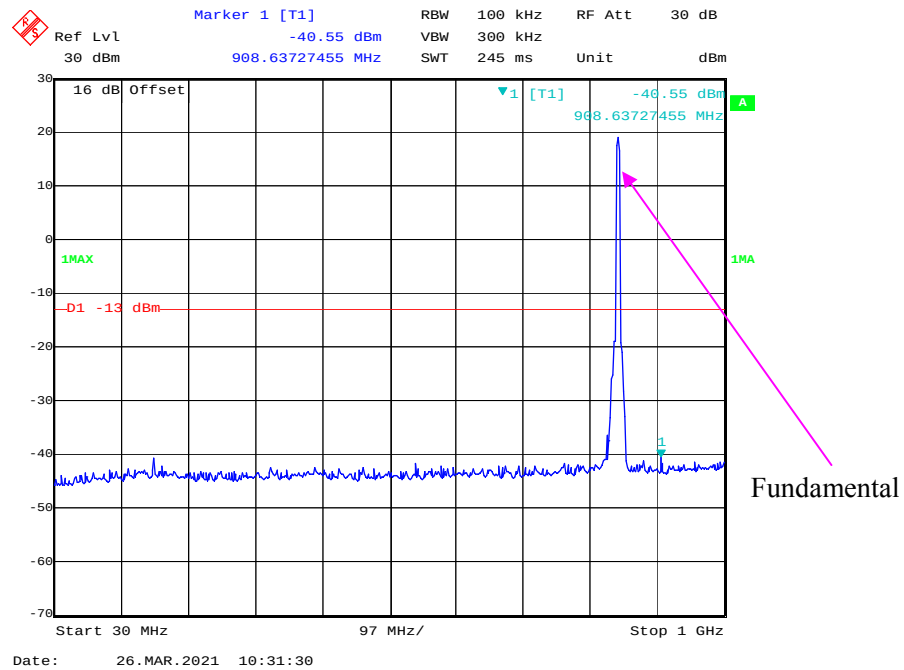


1 GHz – 10 GHz (QPSK, 5.0MHz, High Channel)


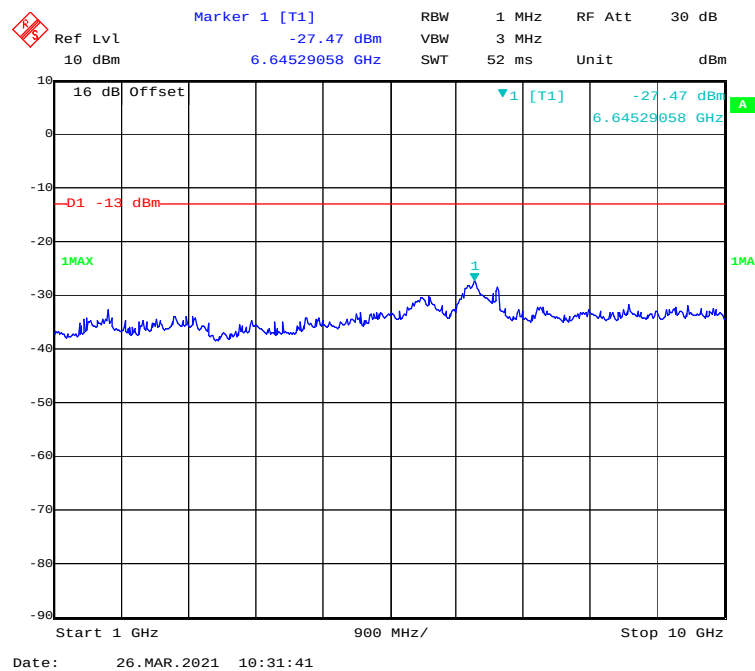




30 MHz – 1 GHz (QPSK, 10.0 MHz, High Channel)


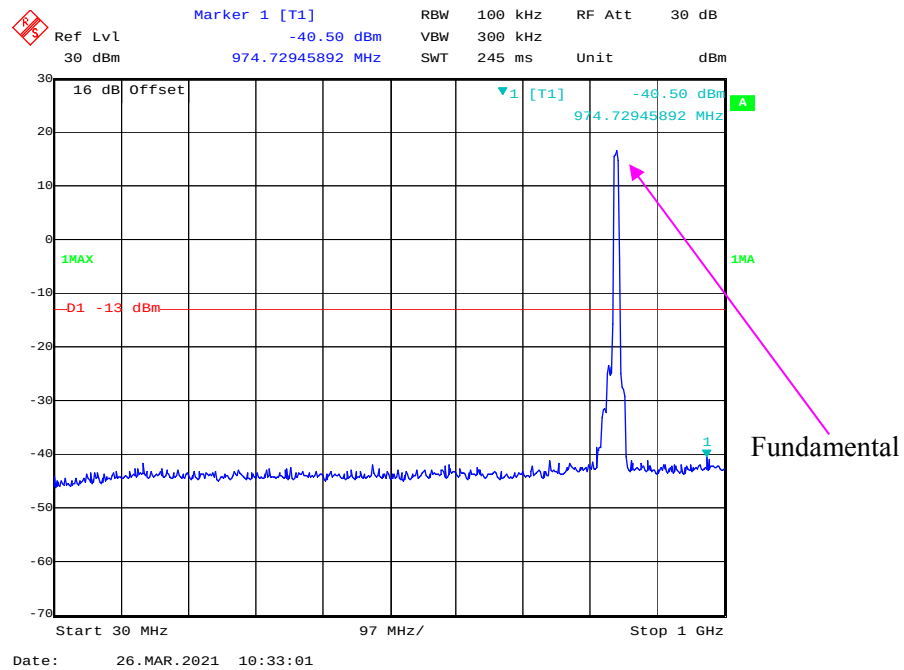


1 GHz – 10 GHz (QPSK, 10.0 MHz, High Channel)

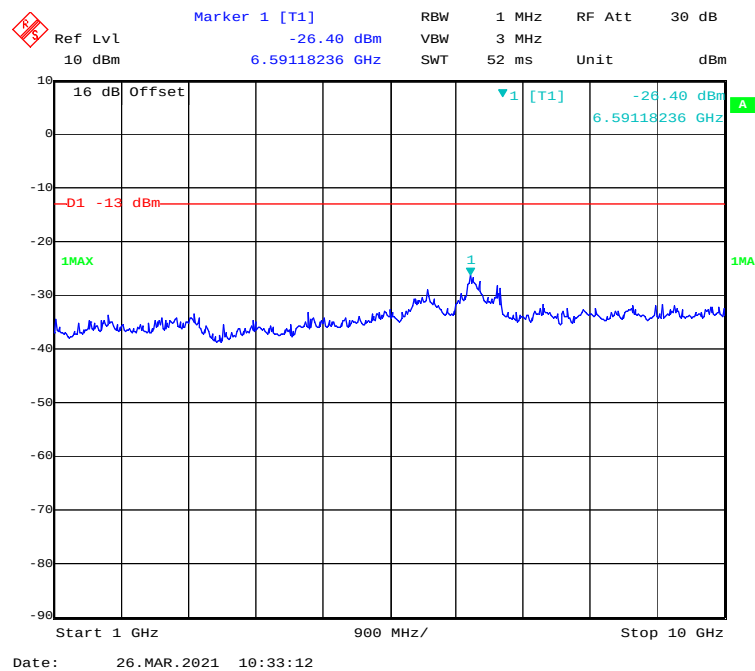


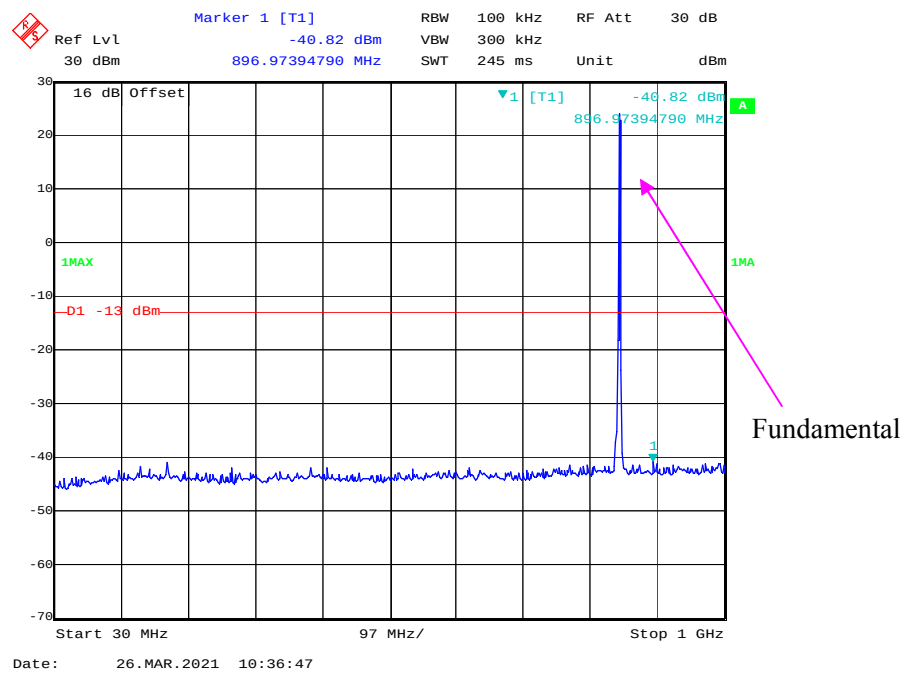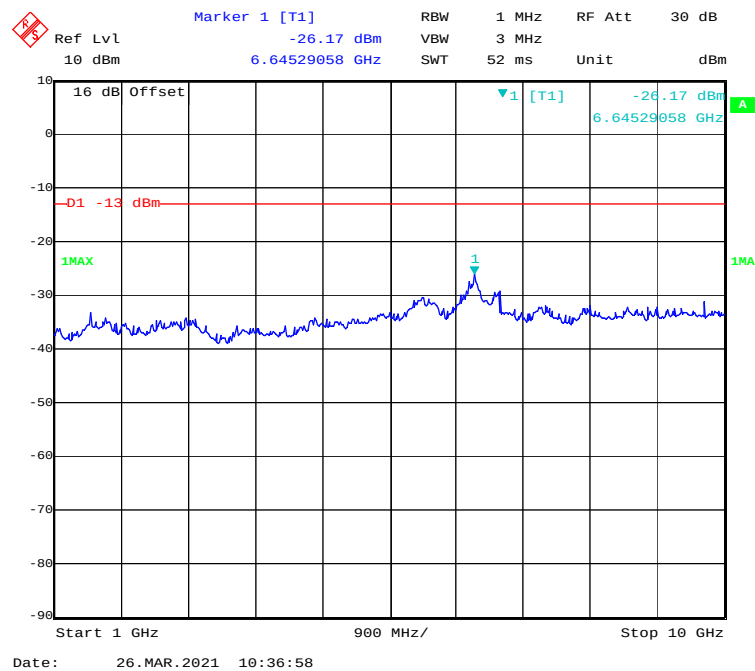30 MHz – 1 GHz (16QAM, 1.4 MHz, High Channel)**1 GHz – 10 GHz (16QAM, 1.4 MHz, High Channel)**

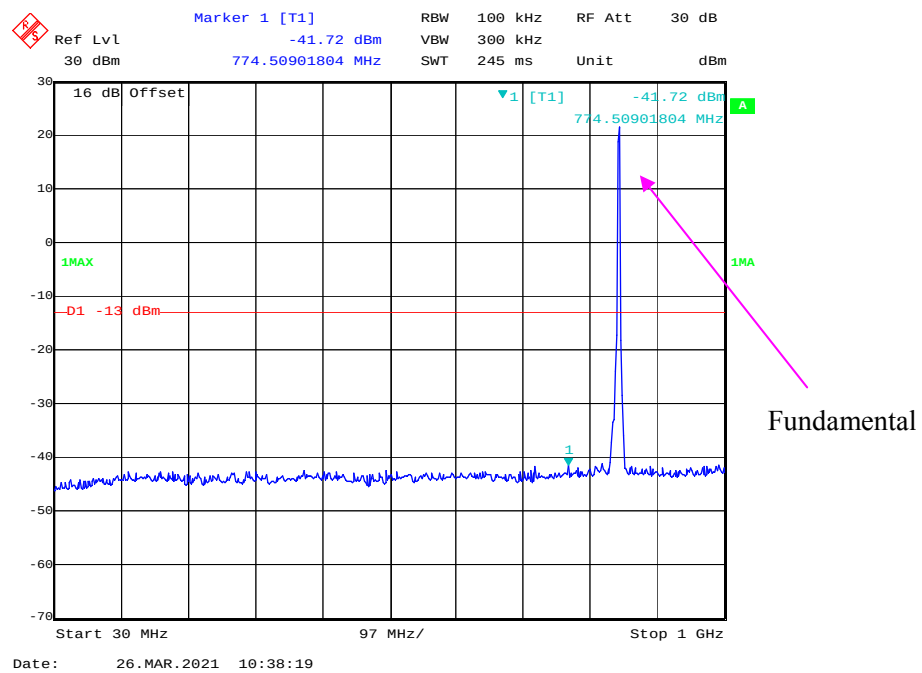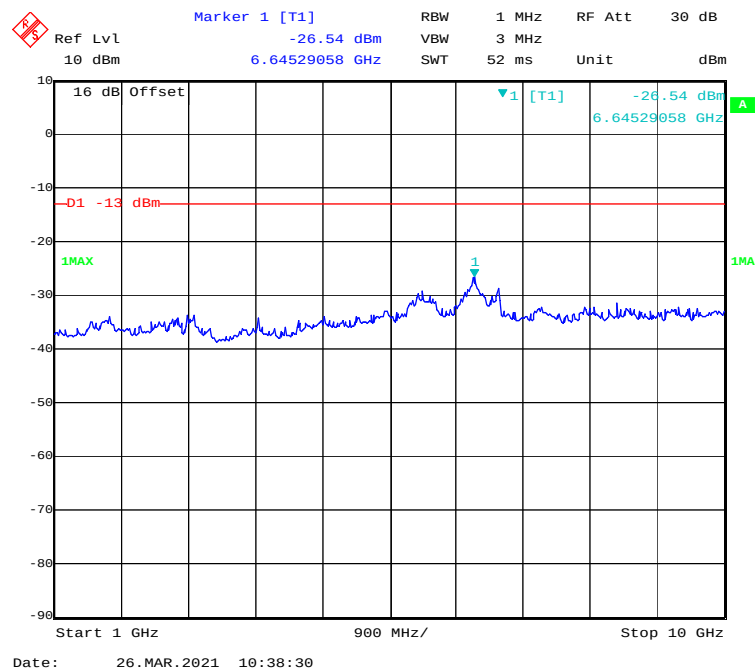
30 MHz – 1 GHz (16QAM, 3.0 MHz, High Channel)**1 GHz – 10 GHz (16QAM, 3.0 MHz, High Channel)**

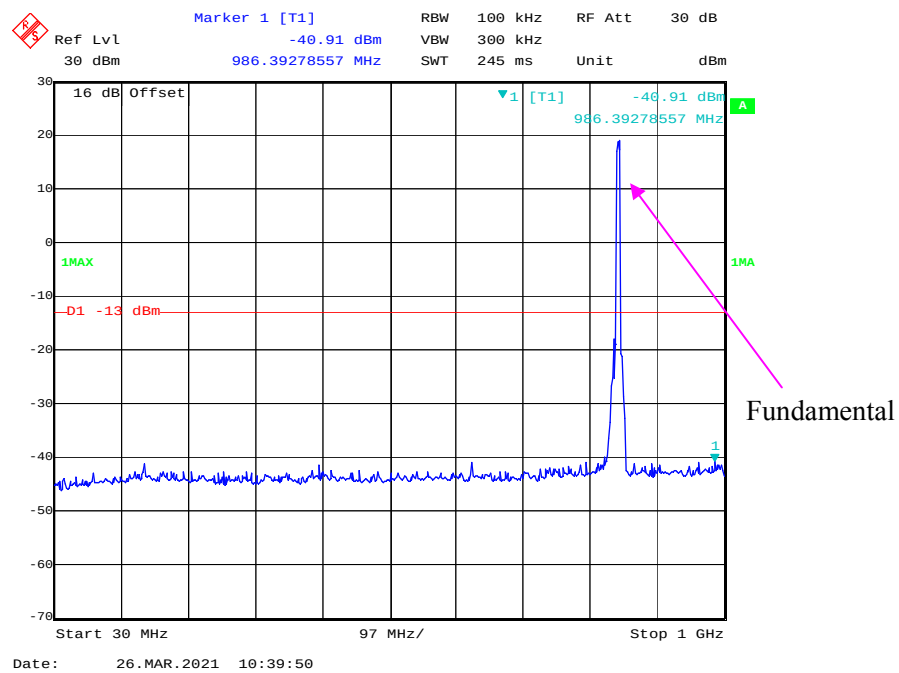
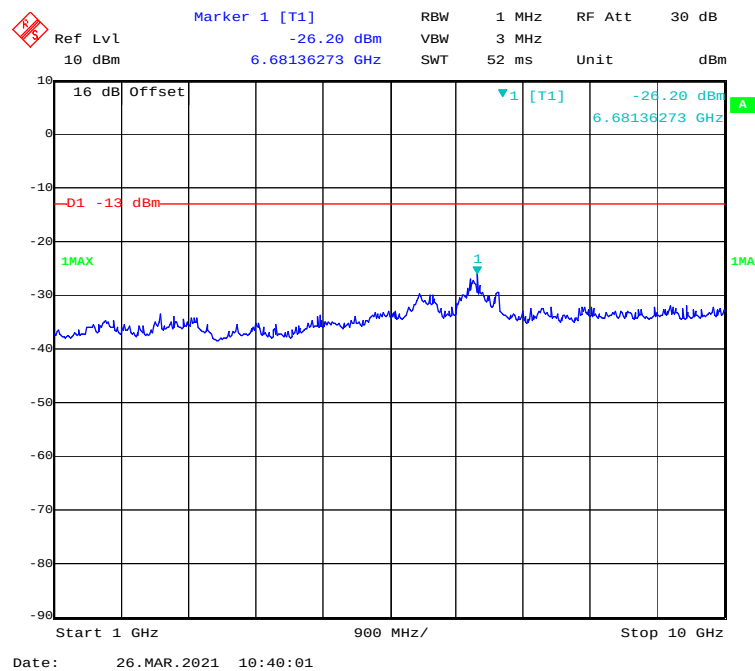
30 MHz – 1 GHz (16QAM, 5.0 MHz, High Channel)**1 GHz – 10 GHz (16QAM, 5.0MHz, High Channel)**

30 MHz – 1 GHz (16QAM, 10.0 MHz, High Channel)

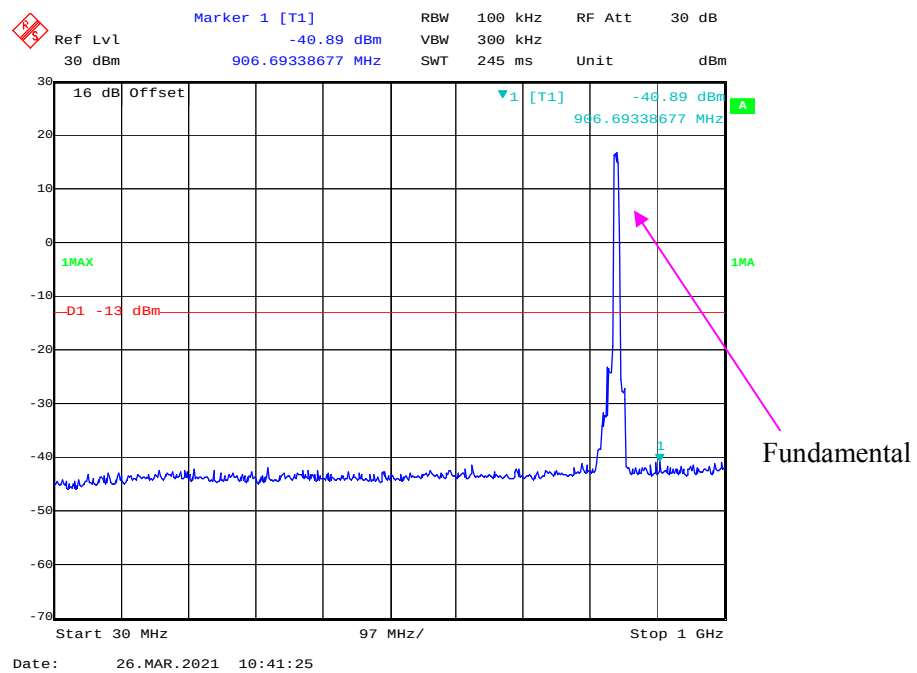


1 GHz – 10 GHz (16QAM, 10.0 MHz, High Channel)

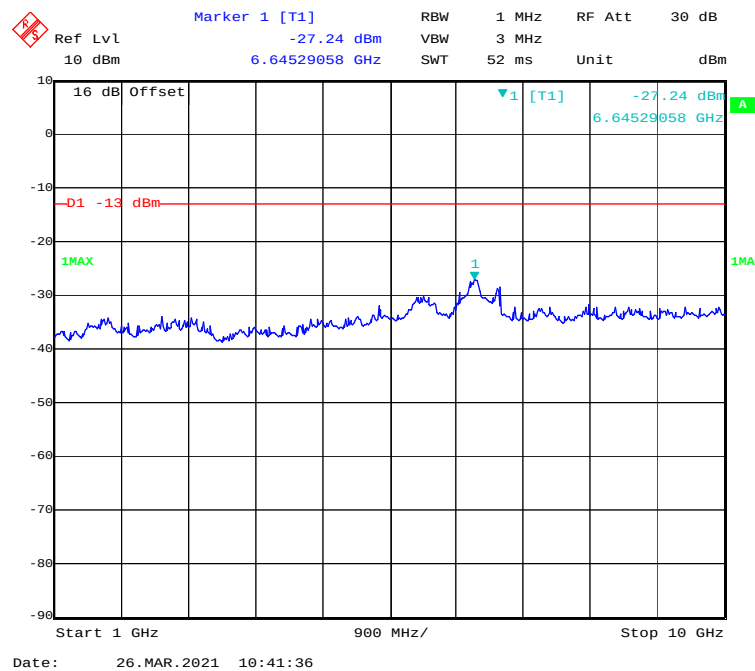


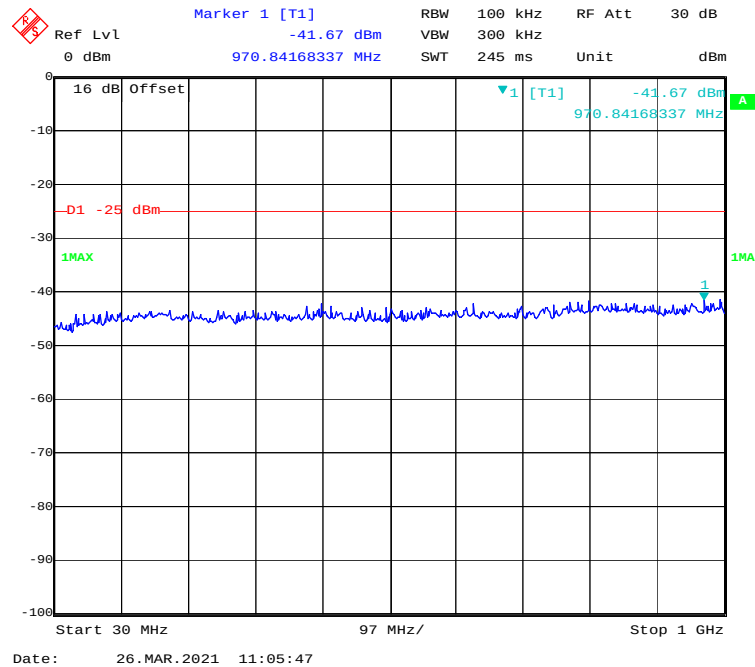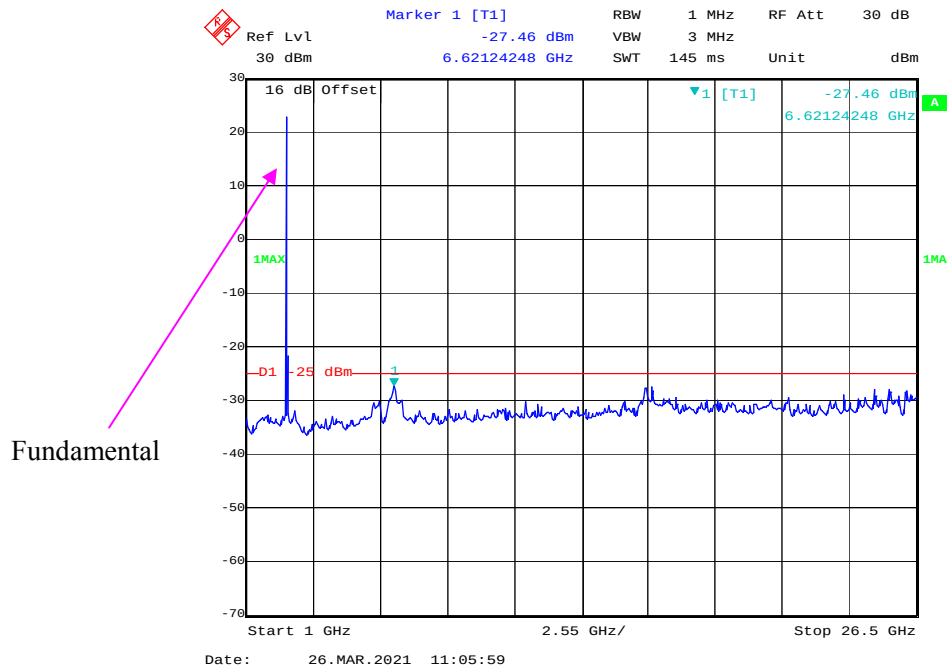LTE Band 41**30 MHz - 1 GHz (QPSK, 5.0 MHz, Low Channel)****1 GHz – 26.5 GHz (QPSK, 5.0 MHz, Low Channel)**


30 MHz - 1 GHz (QPSK, 10.0 MHz, Low Channel)

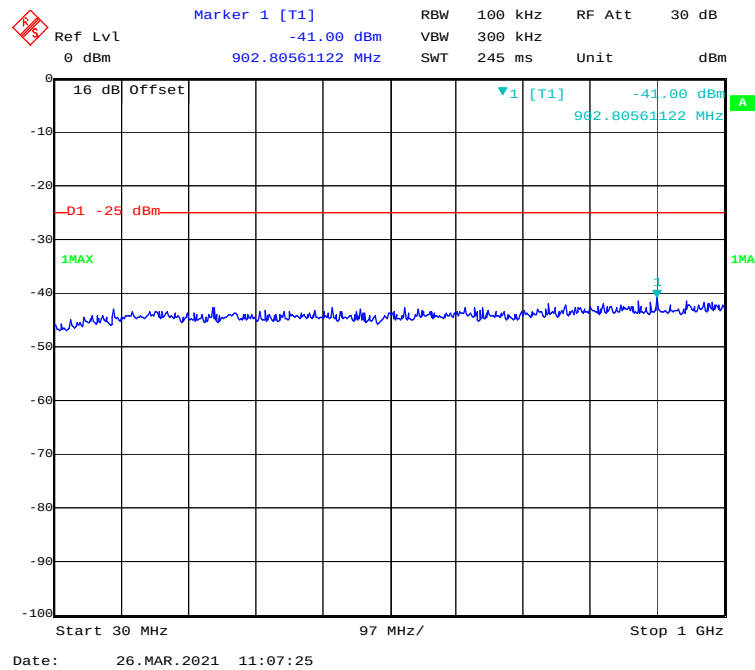


1 GHz – 26.5 GHz (QPSK, 10.0 MHz, Low Channel)

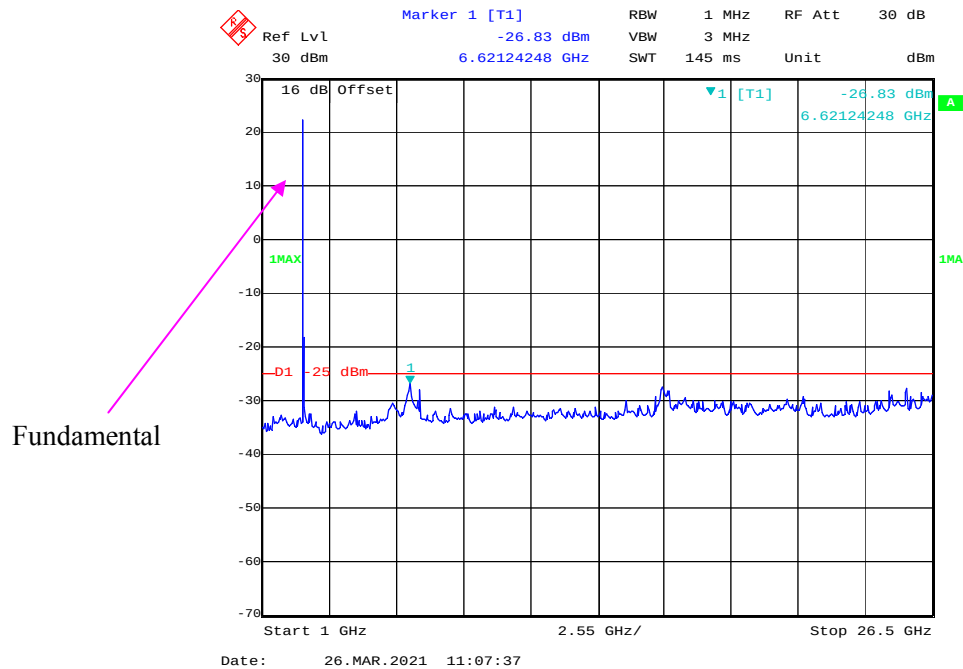


30 MHz - 1 GHz (QPSK, 15.0 MHz, Low Channel)

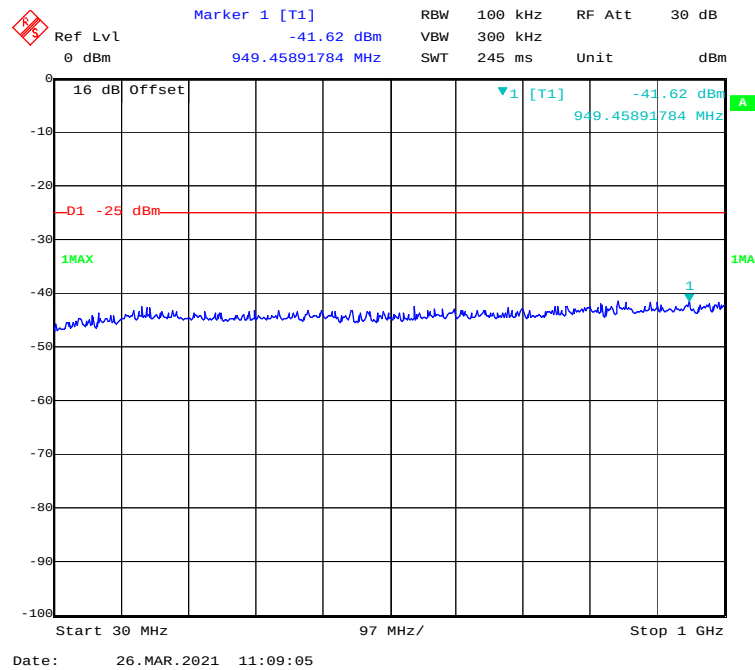


1 GHz – 26.5 GHz (QPSK, 15.0MHz, Low Channel)

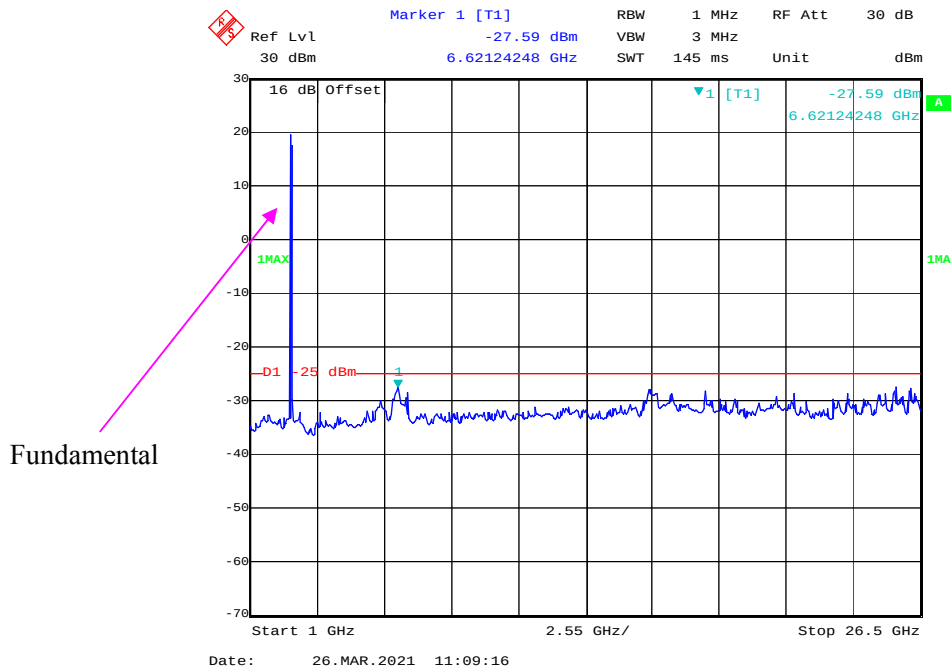


30 MHz - 1 GHz (QPSK, 20.0 MHz, Low Channel)

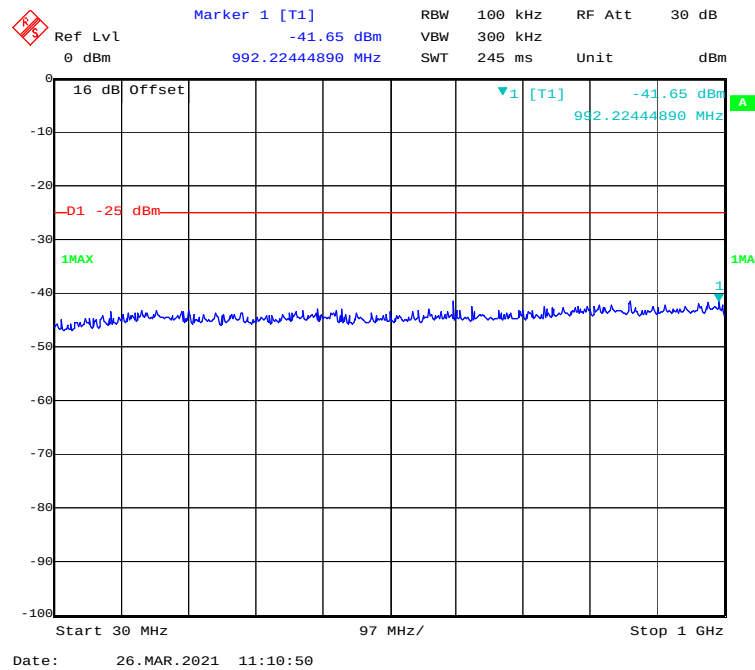


1 GHz – 26.5 GHz (QPSK, 20.0 MHz, Low Channel)

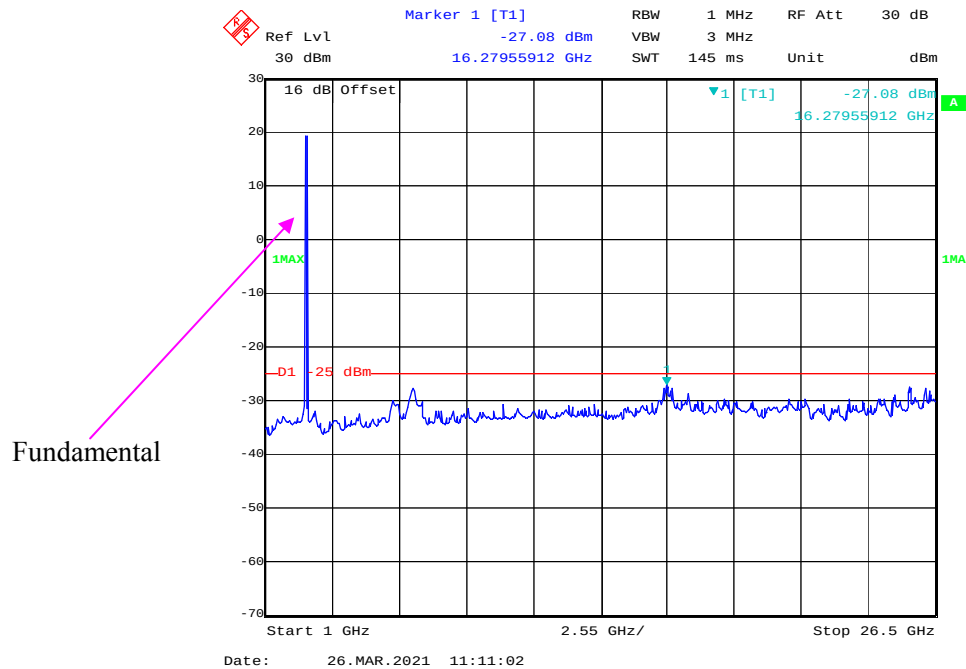


30 MHz - 1 GHz (16QAM, 5.0 MHz, Low Channel)

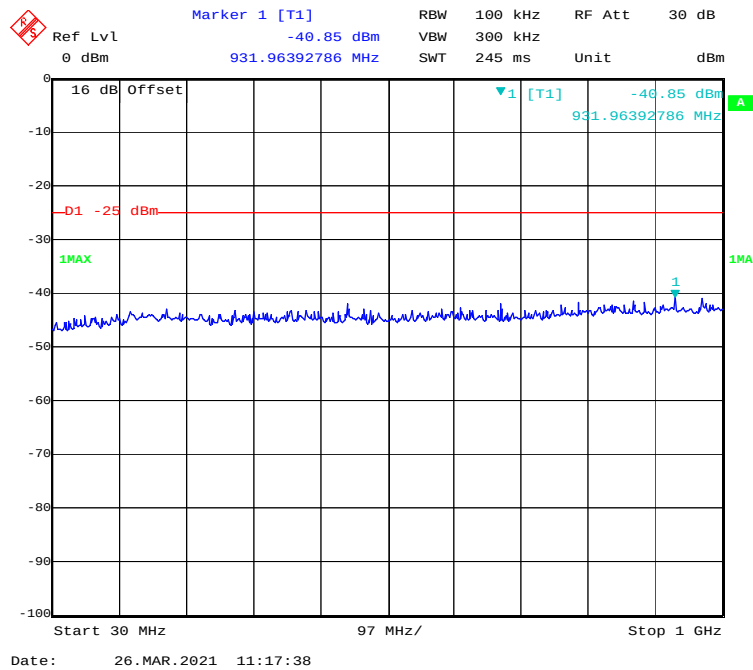


1 GHz - 26.5 GHz (16QAM, 5.0 MHz, Low Channel)

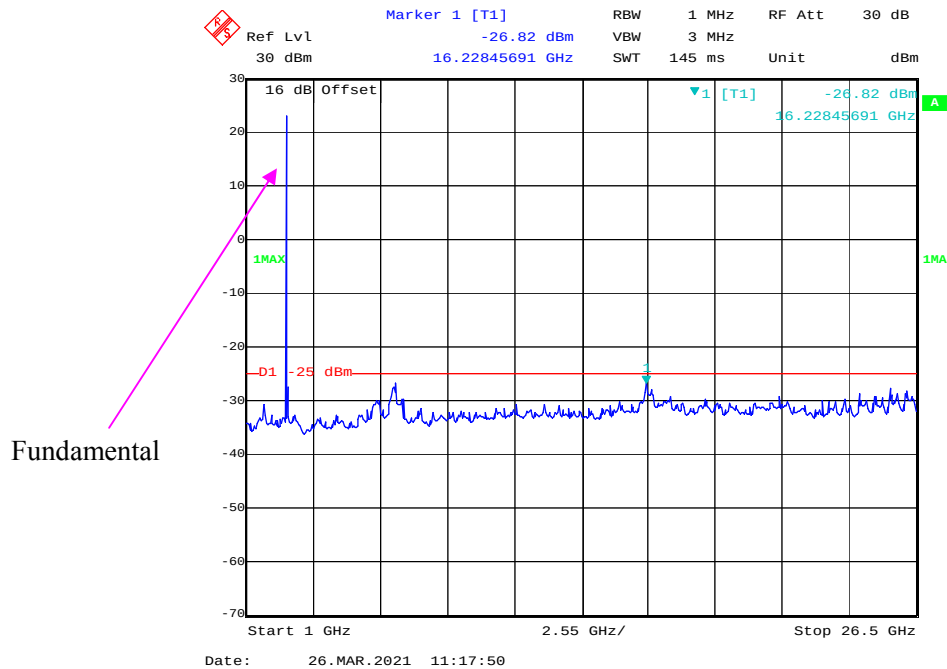


30 MHz - 1 GHz (16QAM, 10.0 MHz, Low Channel)

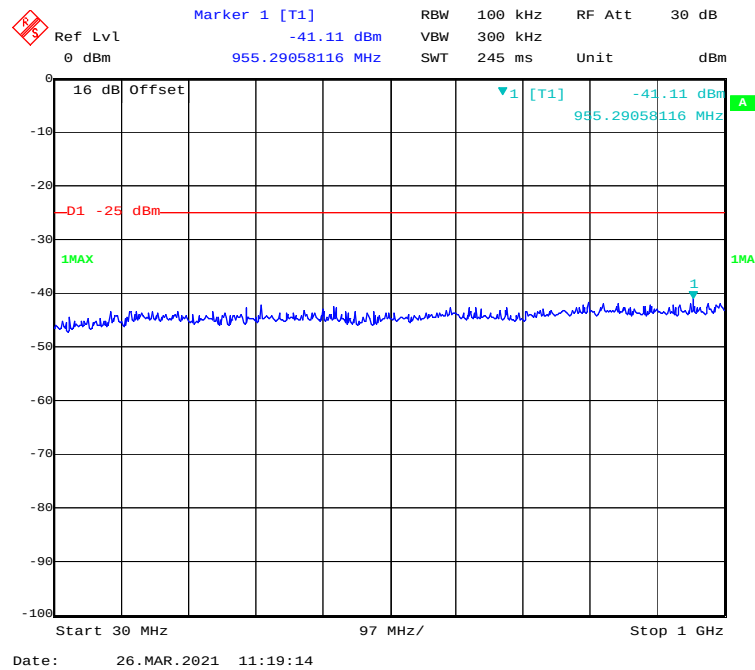


1 GHz – 26.5 GHz (16QAM, 10.0 MHz, Low Channel)

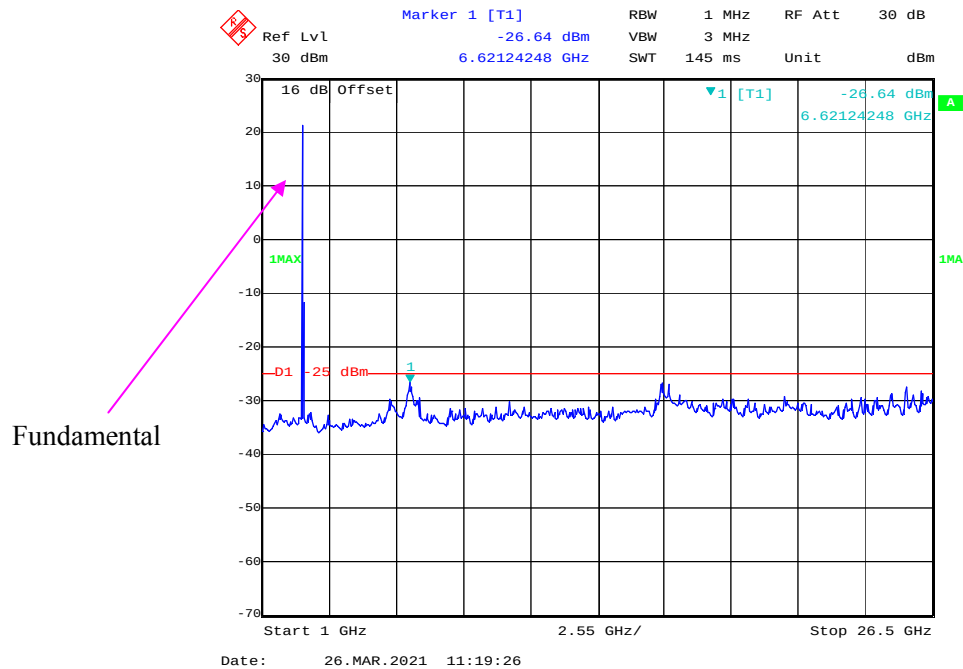


30 MHz - 1 GHz (16QAM, 15.0 MHz, Low Channel)

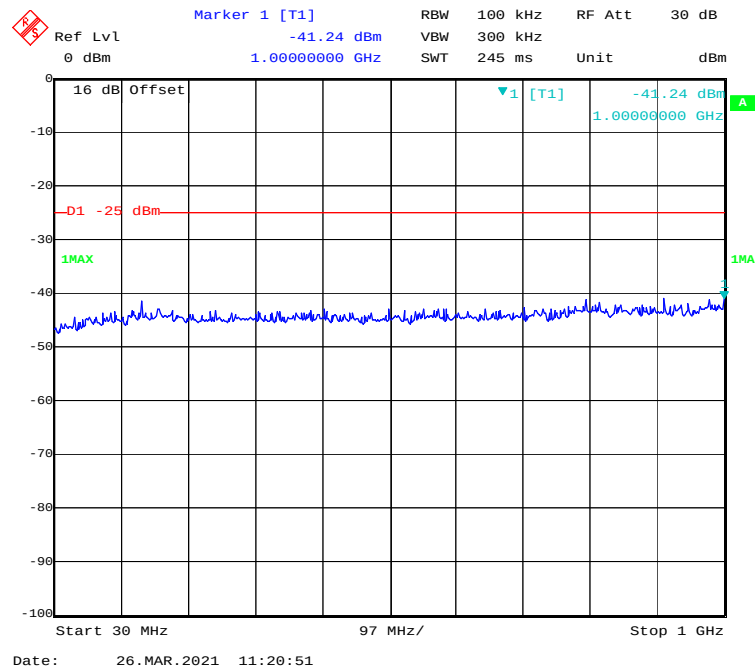


1 GHz – 26.5 GHz (16QAM, 15.0MHz, Low Channel)

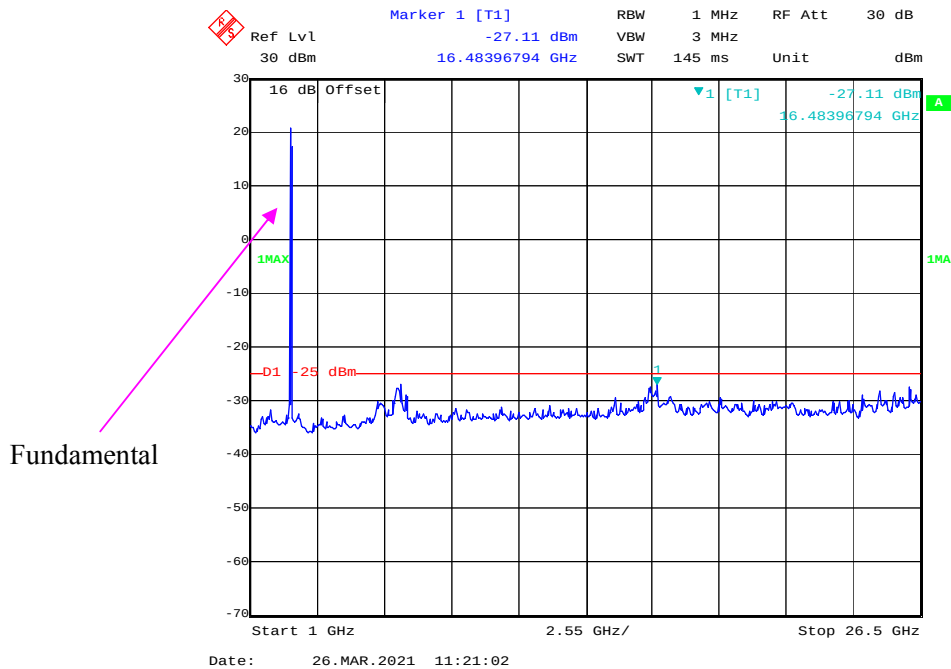


30 MHz - 1 GHz (16QAM, 20.0 MHz, Low Channel)

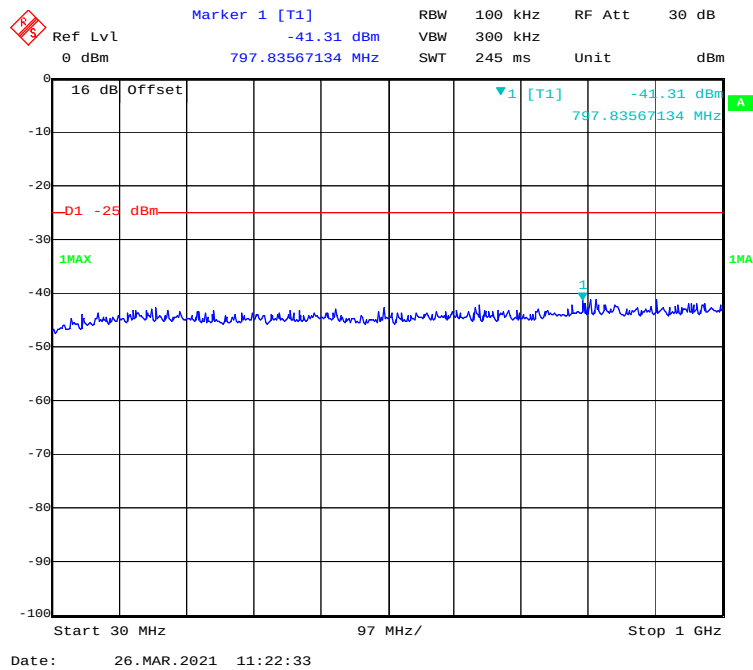


1 GHz – 26.5 GHz (16QAM, 20.0 MHz, Low Channel)

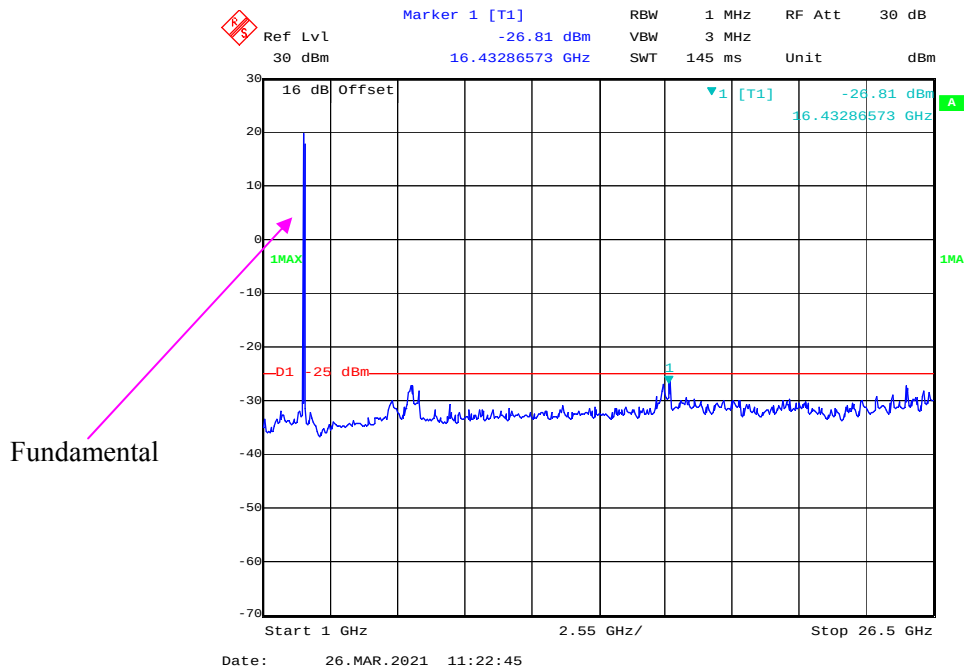


30 MHz - 1 GHz (QPSK, 5.0 MHz, Middle Channel)

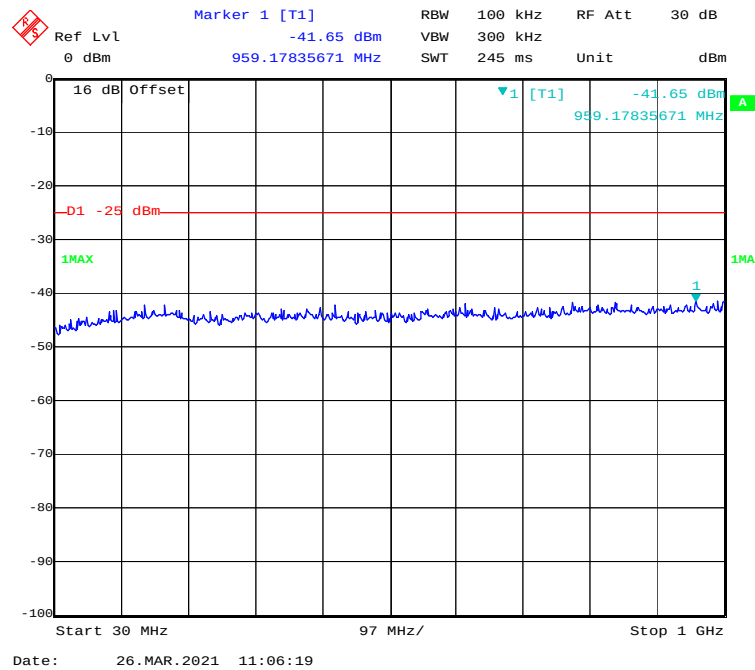


1 GHz – 26.5 GHz (QPSK, 5.0 MHz, Middle Channel)

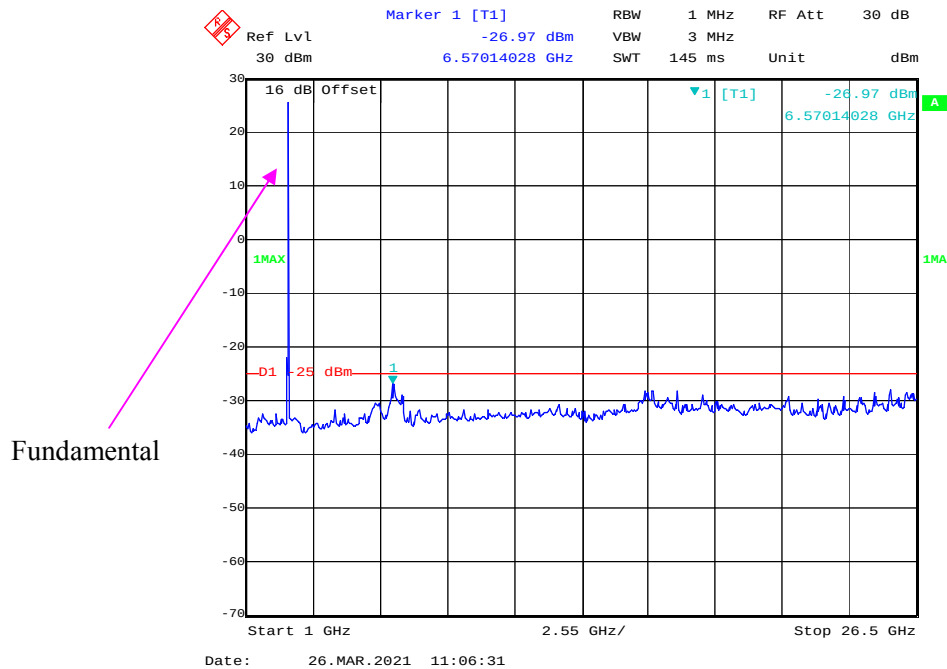


30 MHz - 1 GHz (QPSK, 10.0 MHz, Middle Channel)

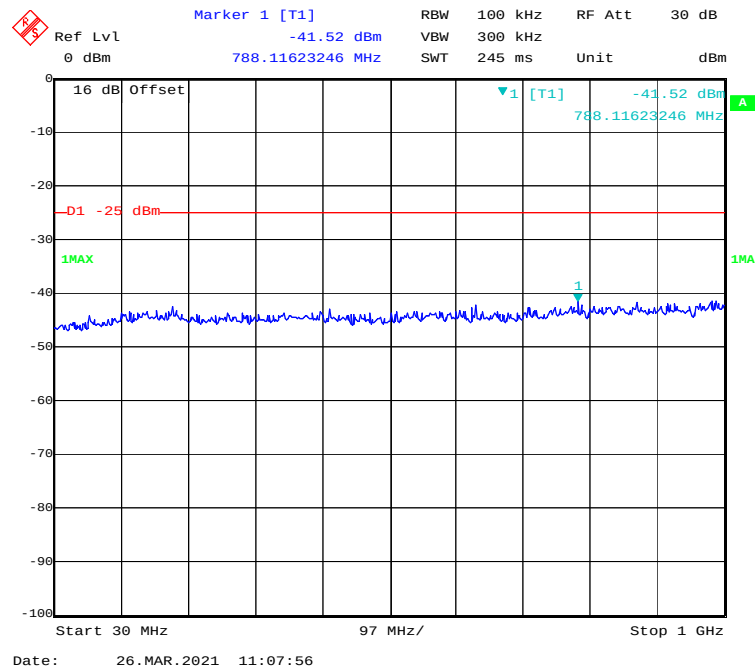


1 GHz – 26.5 GHz (QPSK, 10.0 MHz, Middle Channel)

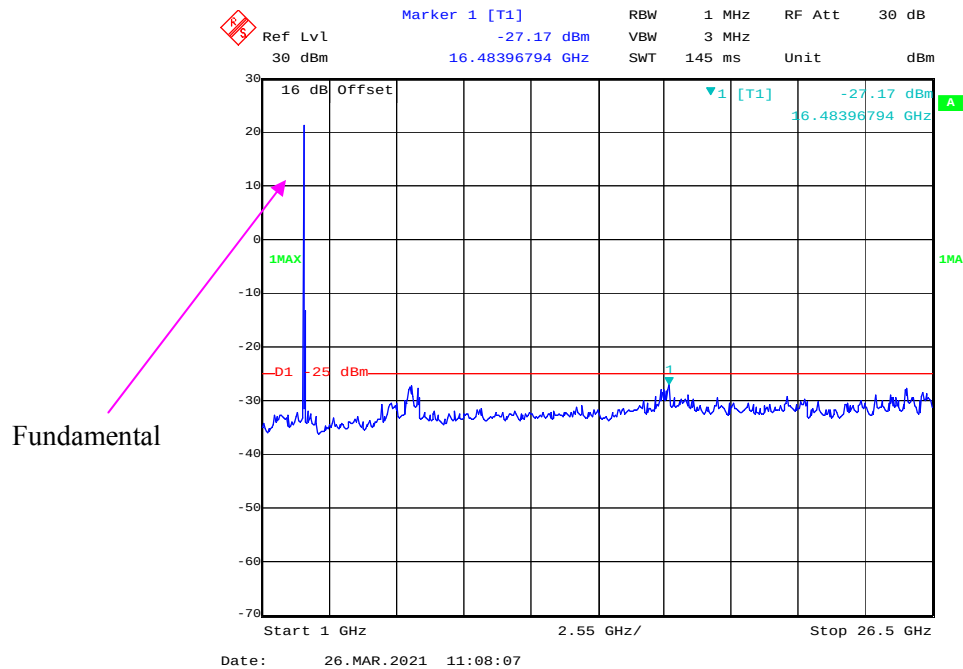


30 MHz - 1 GHz (QPSK, 15.0 MHz, Middle Channel)

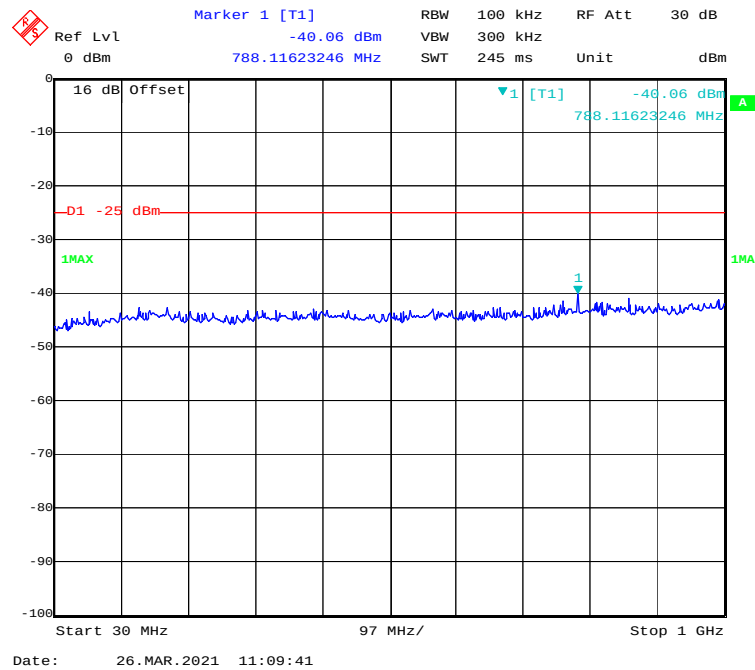


1 GHz – 26.5 GHz (QPSK, 15.0MHz, Middle Channel)

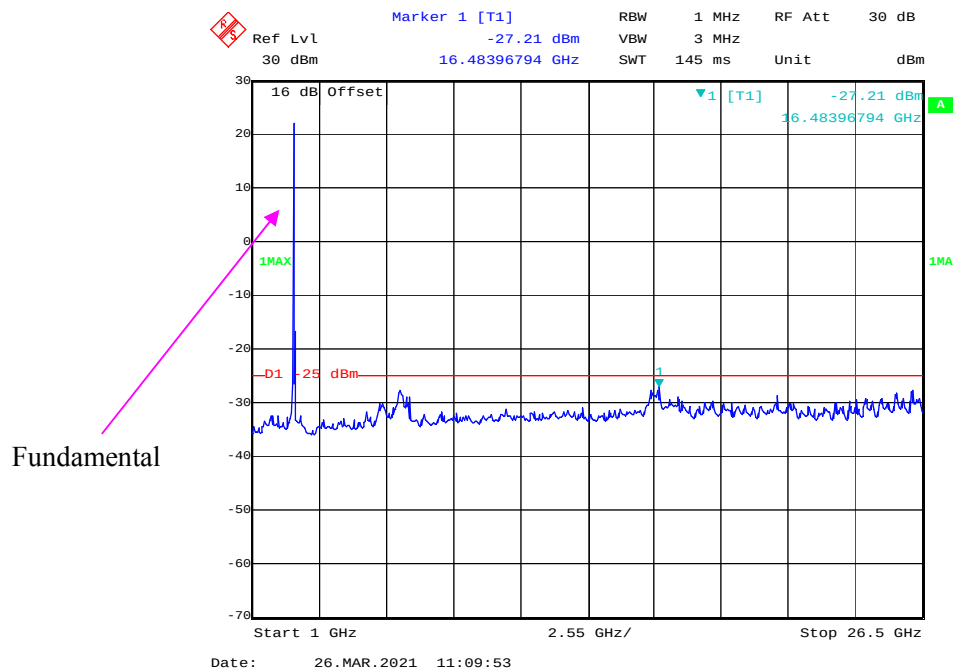


30 MHz - 1 GHz (QPSK, 20.0 MHz, Middle Channel)

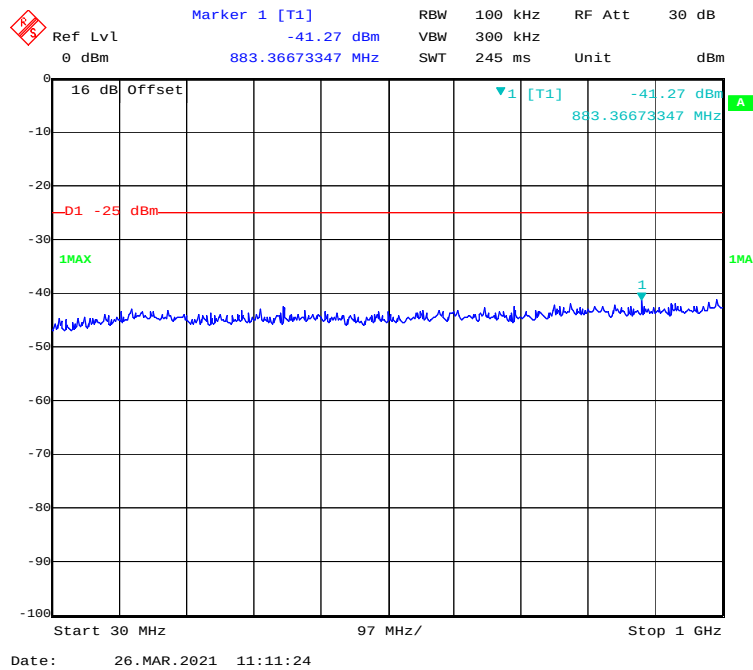


1 GHz – 26.5 GHz (QPSK, 20.0 MHz, Middle Channel)

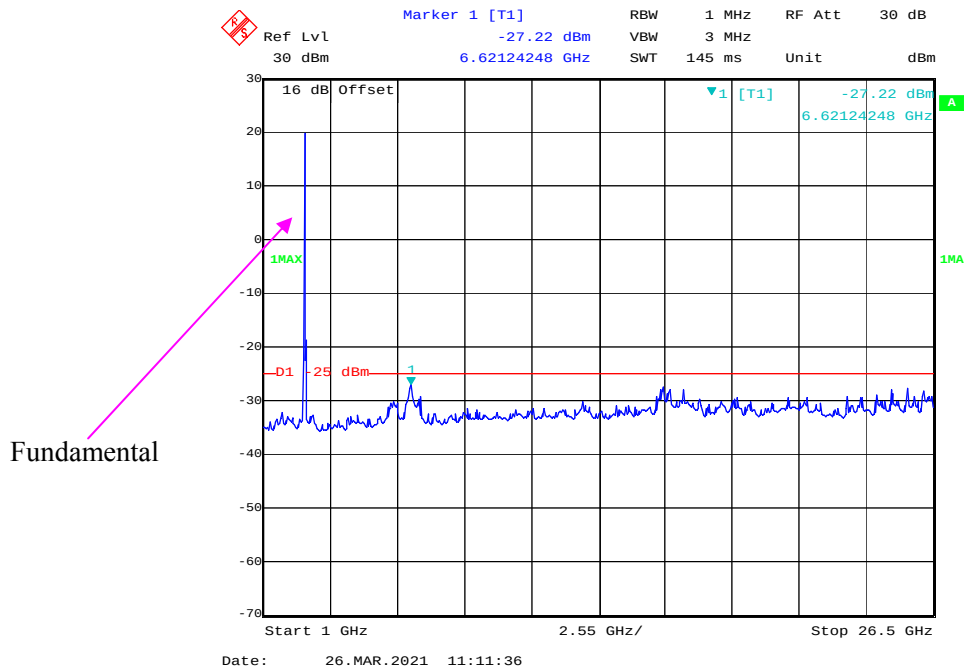


30 MHz - 1 GHz (16QAM, 5.0 MHz, Middle Channel)

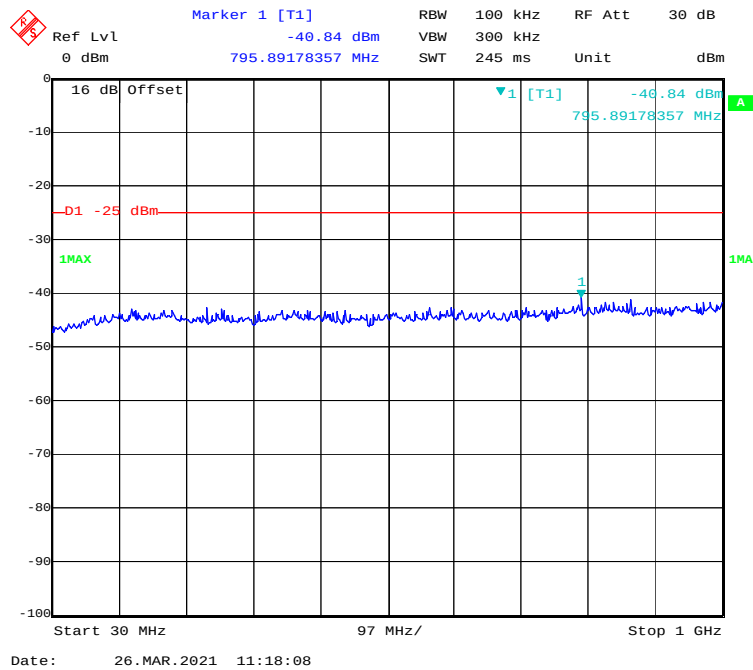


1 GHz – 26.5 GHz (16QAM, 5.0 MHz, Middle Channel)

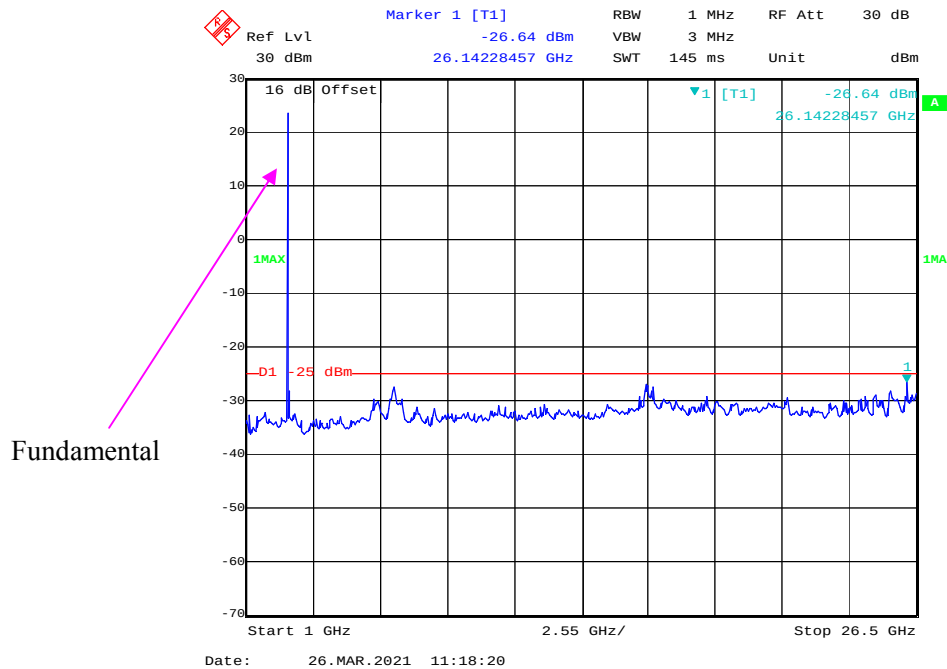


30 MHz - 1 GHz (16QAM, 10.0 MHz, Middle Channel)

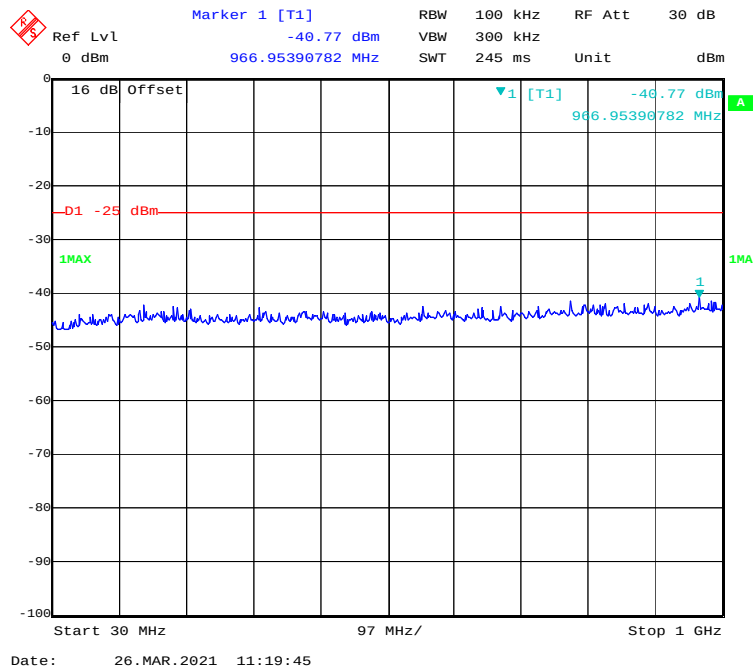


1 GHz – 26.5 GHz (16QAM, 10.0 MHz, Middle Channel)

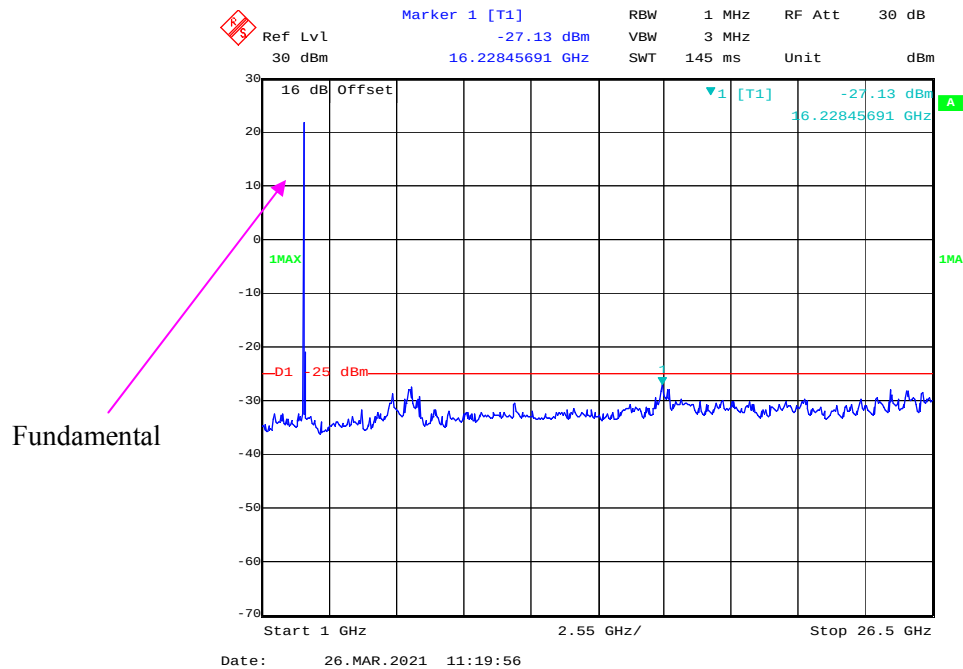


30 MHz - 1 GHz (16QAM, 15.0 MHz, Middle Channel)

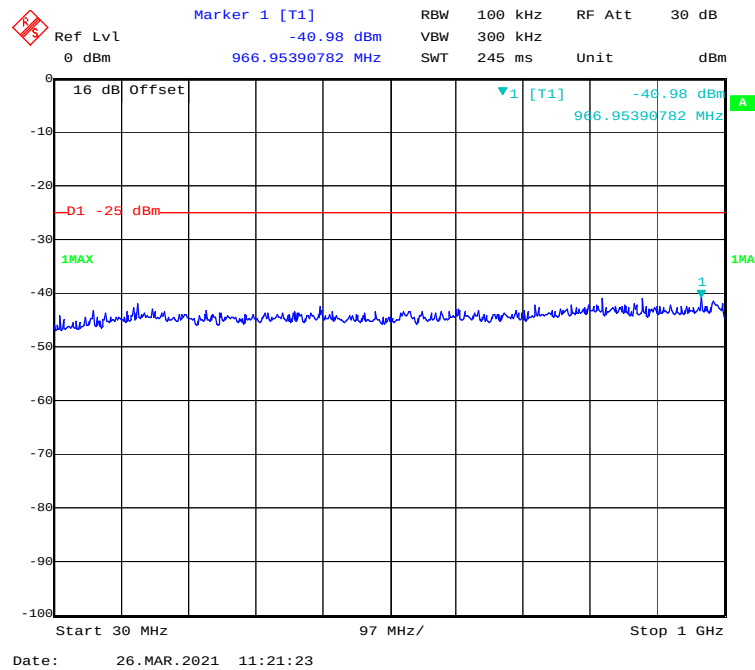


1 GHz – 26.5 GHz (16QAM, 15.0MHz, Middle Channel)

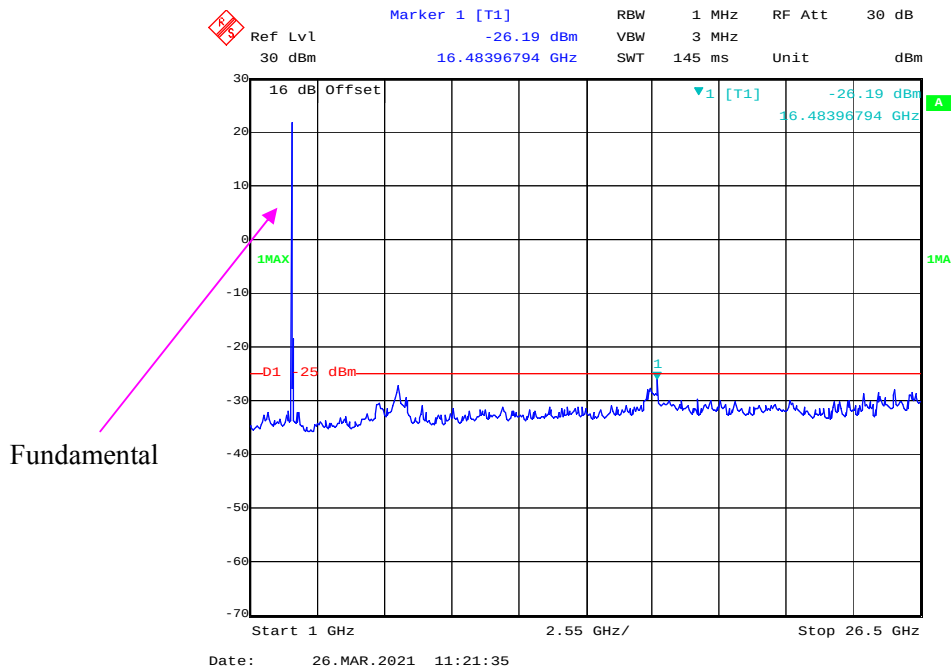


30 MHz - 1 GHz (16QAM, 20.0 MHz, Middle Channel)

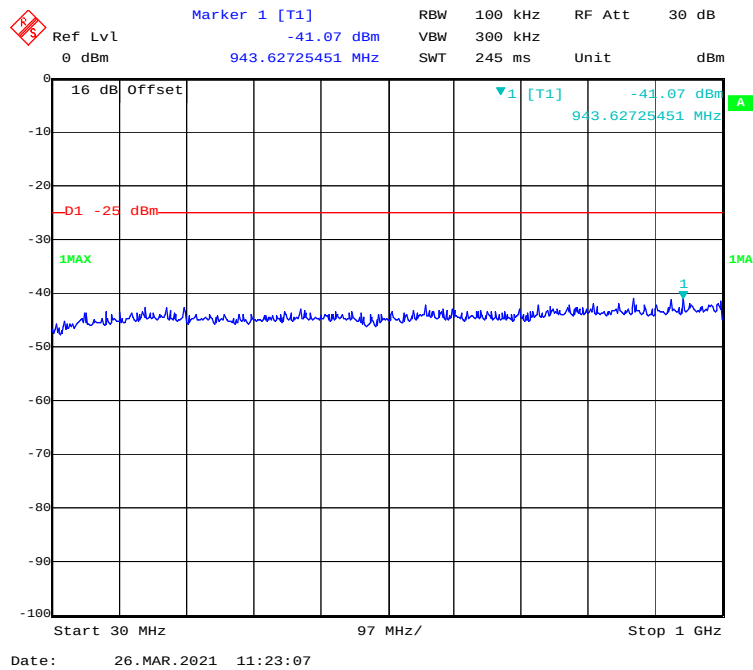


1 GHz – 26.5 GHz (16QAM, 20.0 MHz, Middle Channel)

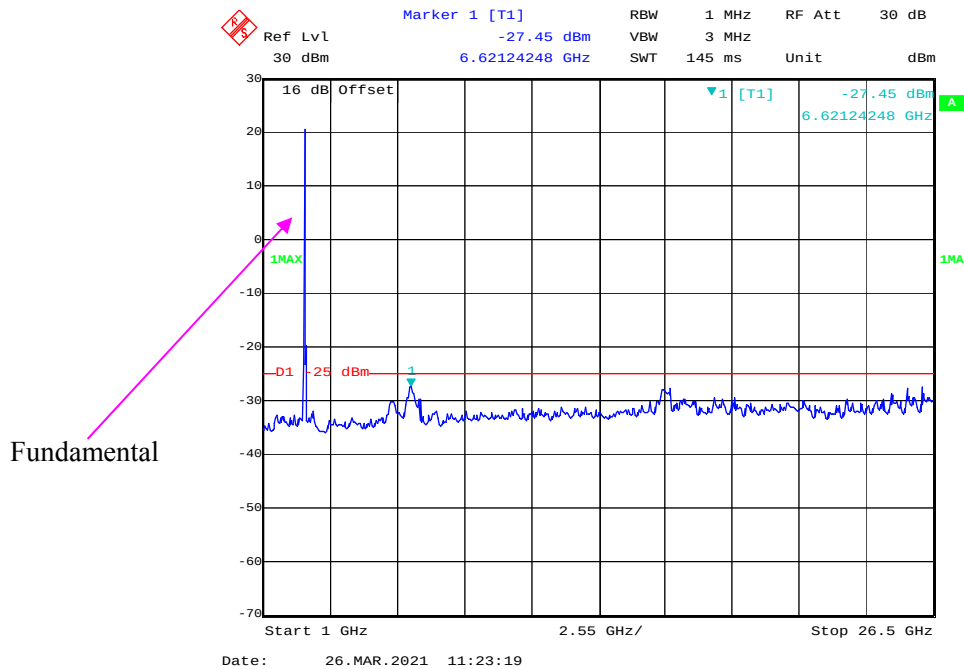


30 MHz - 1 GHz (QPSK, 5.0 MHz, High Channel)

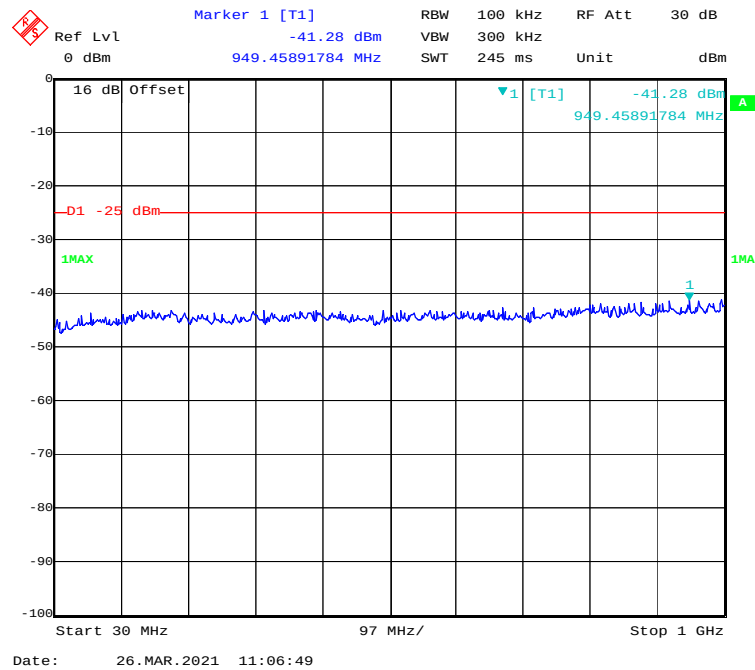


1 GHz – 26.5 GHz (QPSK, 5.0 MHz, High Channel)

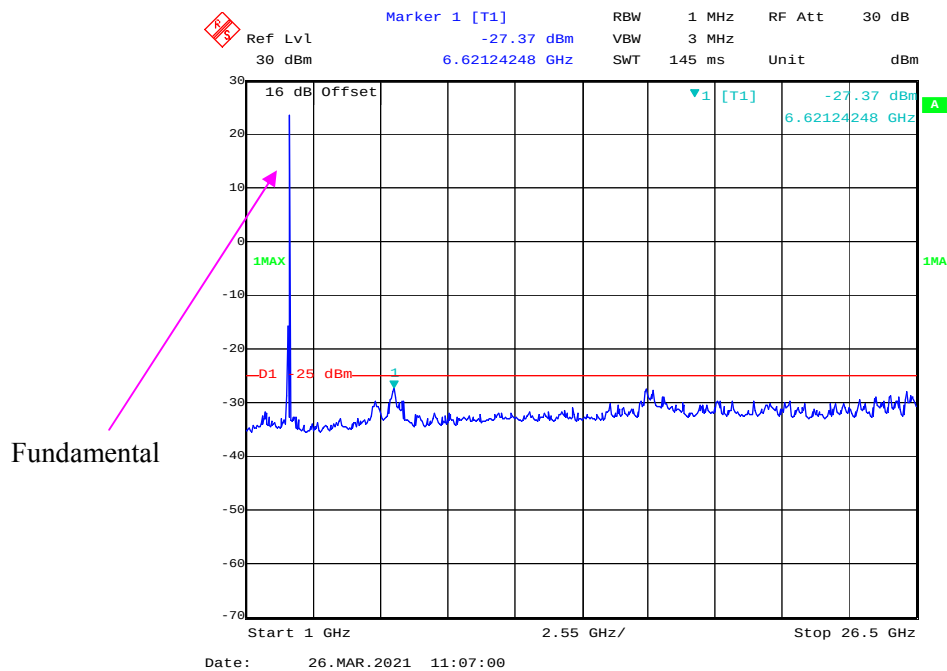


30 MHz - 1 GHz (QPSK, 10.0 MHz, High Channel)

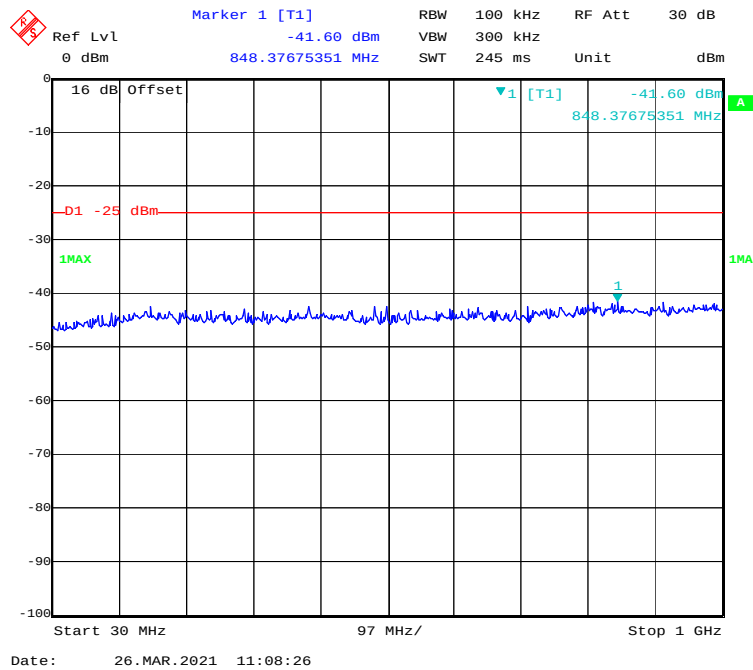


1 GHz – 26.5 GHz (QPSK, 10.0 MHz, High Channel)

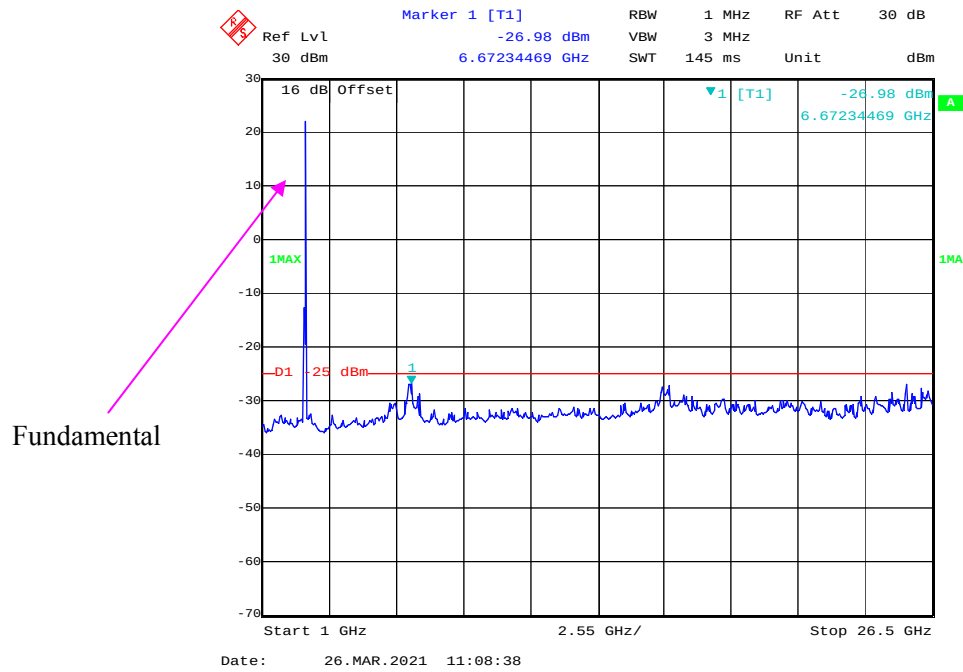


30 MHz - 1 GHz (QPSK, 15.0 MHz, High Channel)

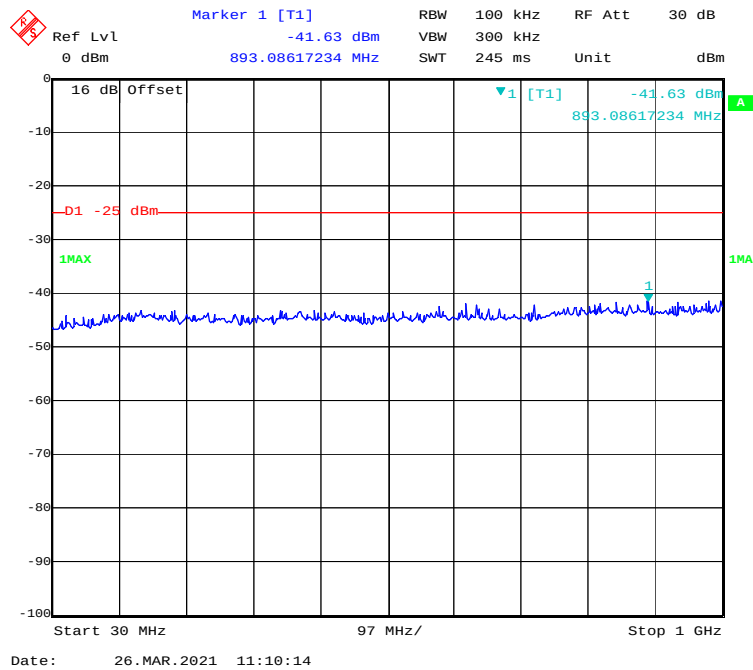


1 GHz – 26.5 GHz (QPSK, 15.0MHz, High Channel)

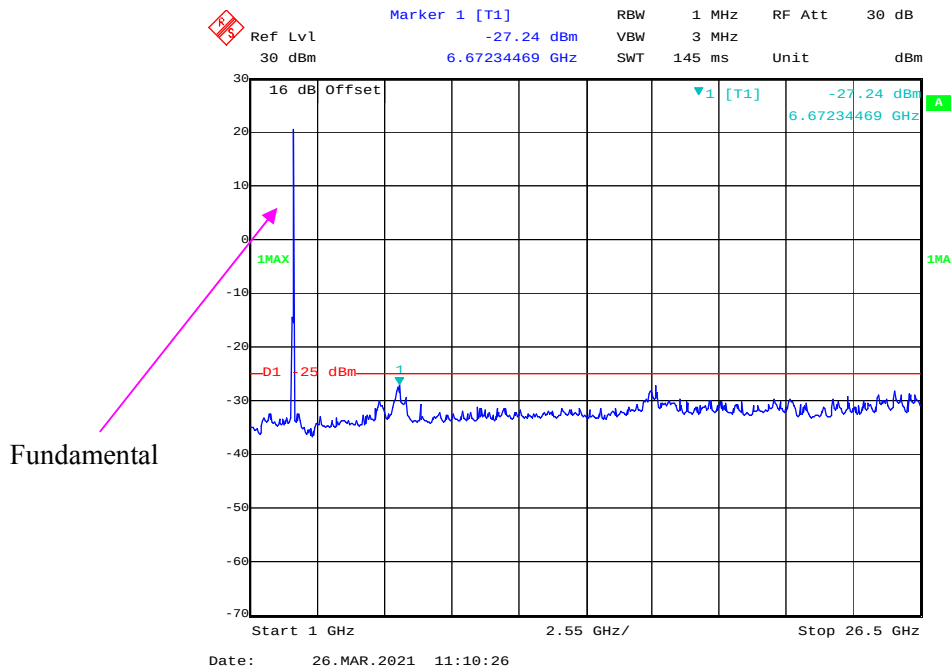


30 MHz - 1 GHz (QPSK, 20.0 MHz, High Channel)

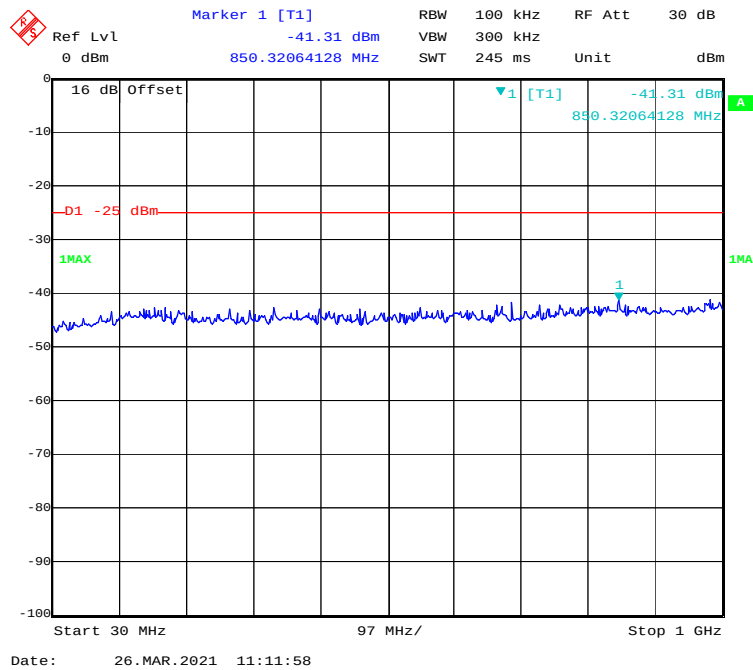


1 GHz – 26.5 GHz (QPSK, 20.0 MHz, High Channel)

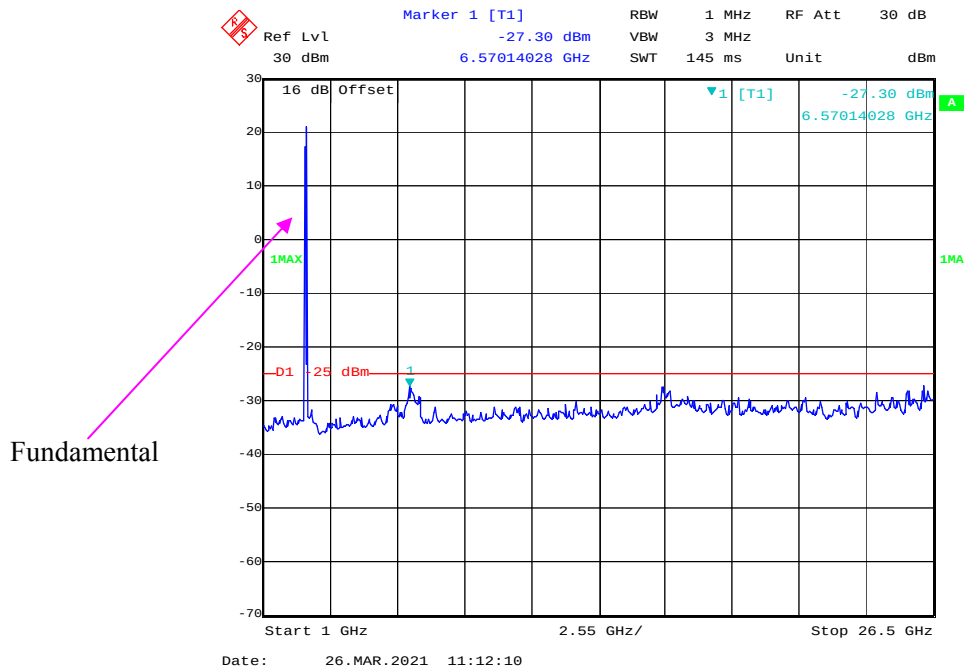


30 MHz - 1 GHz (16QAM, 5.0 MHz, High Channel)

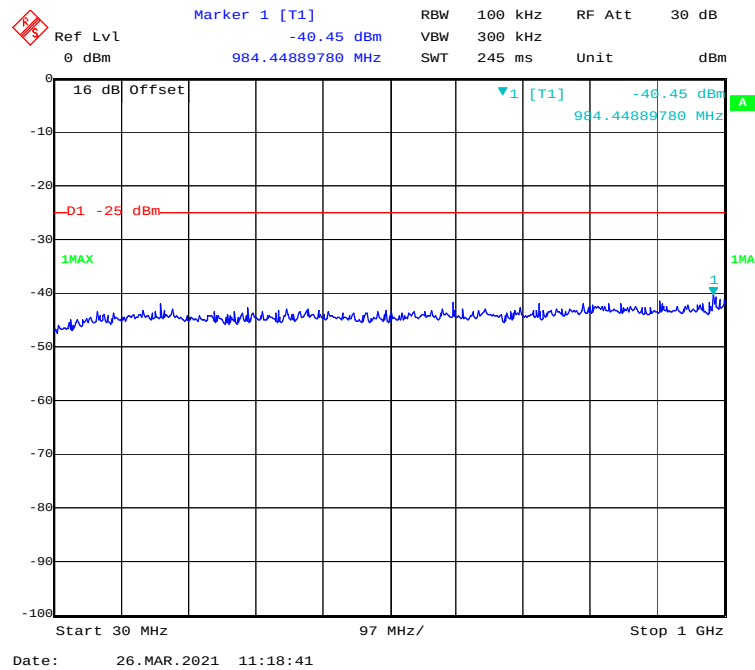


1 GHz – 26.5 GHz (16QAM, 5.0 MHz, High Channel)

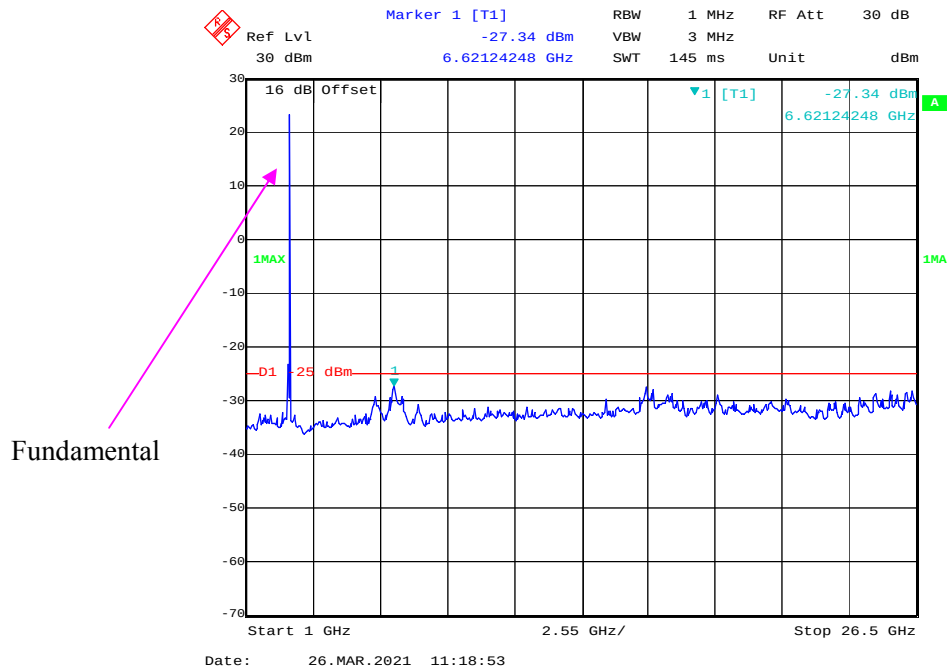


30 MHz - 1 GHz (16QAM, 10.0 MHz, High Channel)

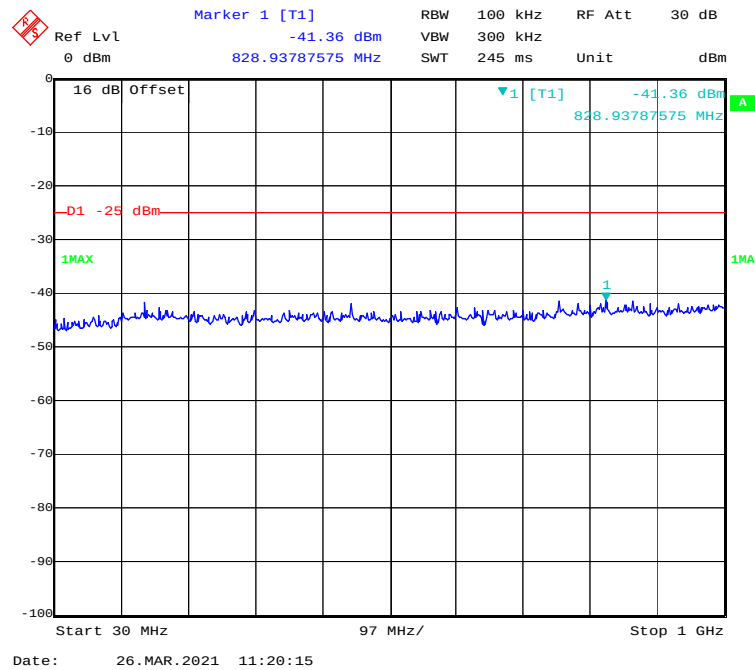


1 GHz – 26.5 GHz (16QAM, 10.0 MHz, High Channel)

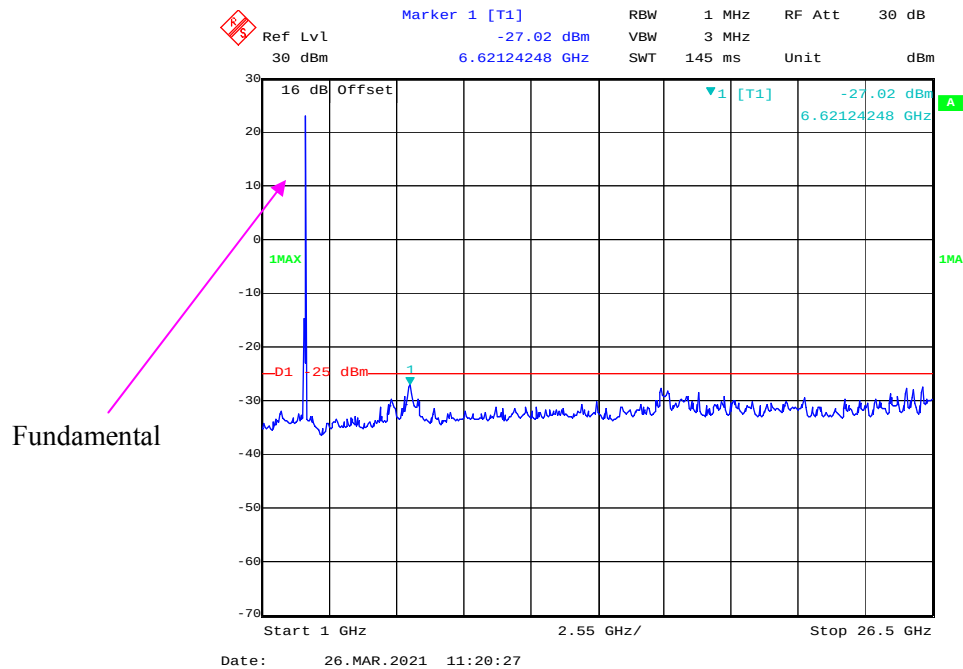


30 MHz - 1 GHz (16QAM, 15.0 MHz, High Channel)

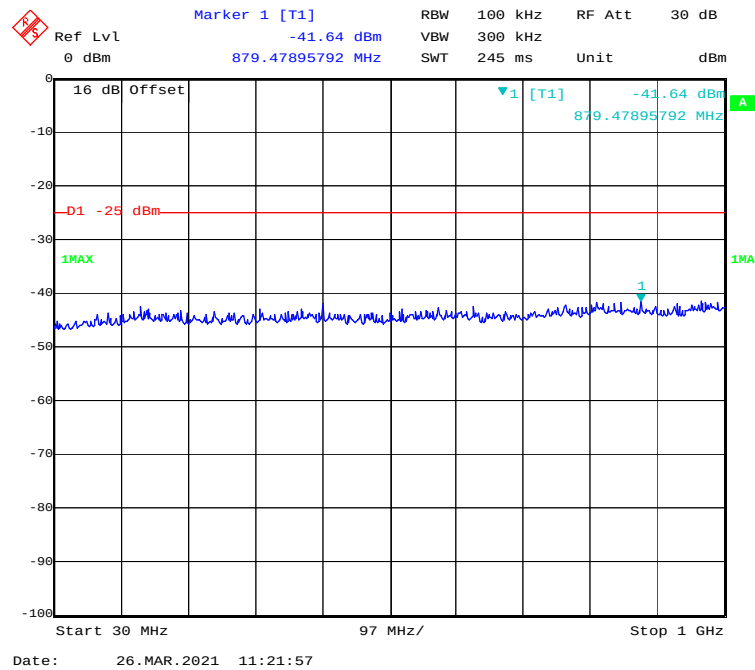


1 GHz – 26.5 GHz (16QAM, 15.0MHz, High Channel)

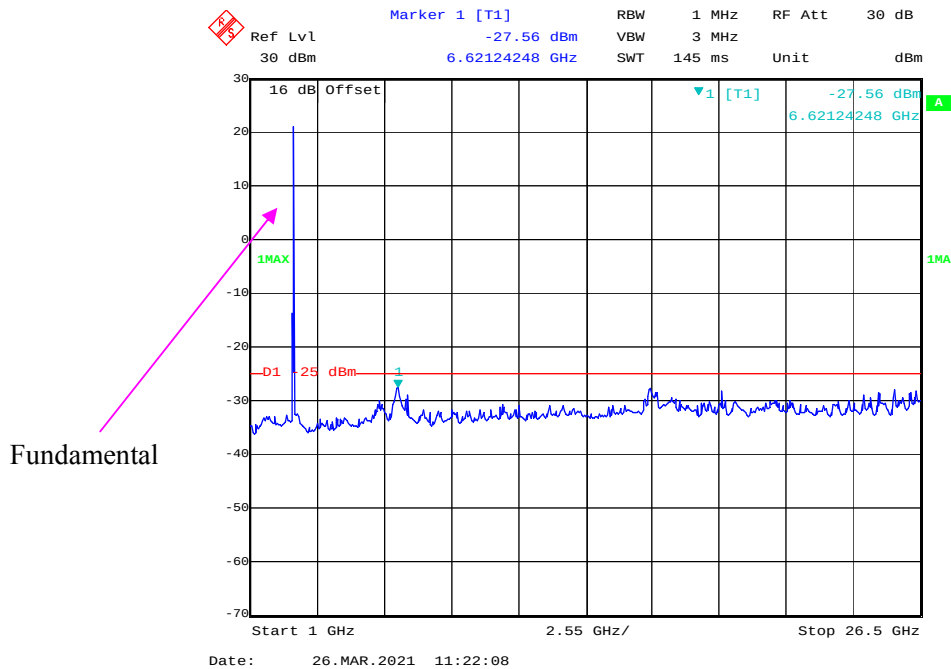

30 MHz - 1 GHz (16QAM, 20.0 MHz, High Channel)

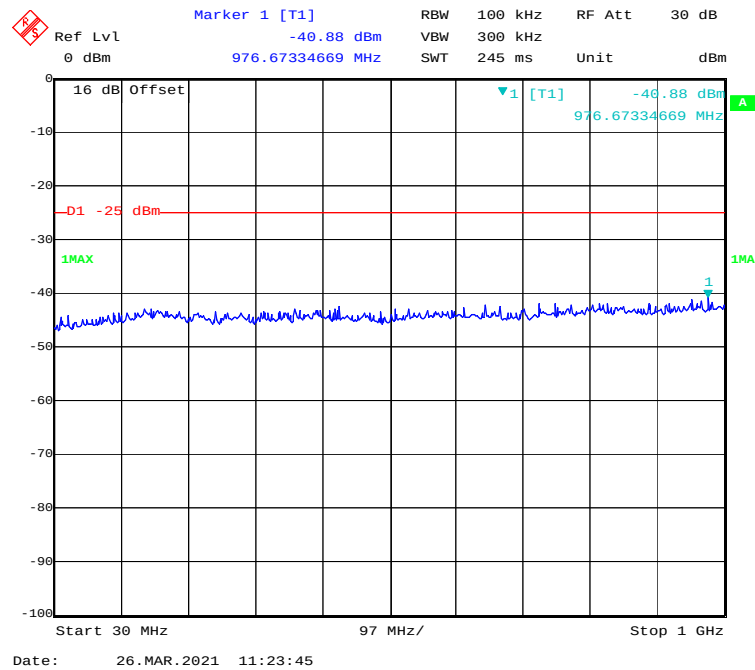

1 GHz – 26.5 GHz (16QAM, 20.0 MHz, High Channel)

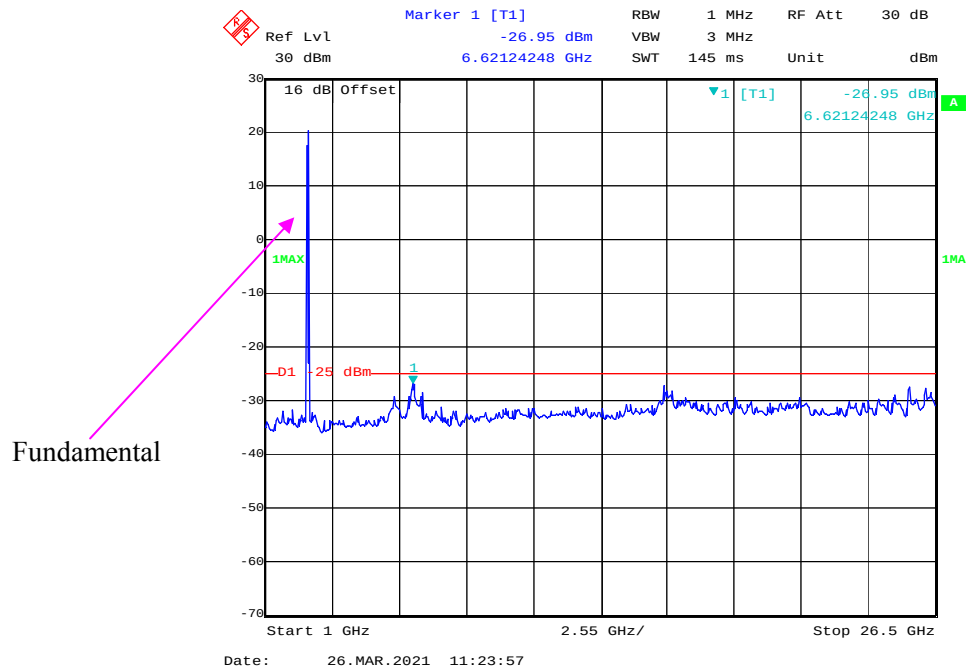

FCC § 2.1053; § 22.917 (a) & §27.53 (m) - SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, §22.917(a) and § 27.53 (m)

22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

27.53 (m), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Data**Environmental Conditions**

Temperature:	23.5 °C
Relative Humidity:	50 %
ATM Pressure:	101.9 kPa

The testing was performed by Stone Zhang on 2021-04-10.

Test mode: Transmitting (Pre-scan with all the bandwidth, and worse case as below)

30 MHz ~ 10 GHz:

LTE Band 5:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 1.4MHz Bandwidth Low Channel										
459.84	49.98	150	100	H	-49.34	0.55	-1.71	-51.60	-13	38.60
459.84	52.67	229	200	V	-46.65	0.55	-1.71	-48.91	-13	35.91
1649.40	53.25	74	150	H	-60.09	0.84	8.44	-52.49	-13	39.49
1649.40	51.37	230	100	V	-61.97	0.84	8.44	-54.37	-13	41.37
16-QAM 1.4MHz Bandwidth Low Channel										
459.74	51.35	121	150	H	-47.97	0.55	-1.71	-50.23	-13	37.23
459.74	53.37	121	150	V	-45.95	0.55	-1.71	-48.21	-13	35.21
1649.40	53.28	81	200	H	-60.06	0.84	8.44	-52.46	-13	39.46
1649.40	49.87	202	200	V	-63.47	0.84	8.44	-55.87	-13	42.87

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 1.4MHz Bandwidth Middle Channel										
459.86	51.26	287	100	H	-48.06	0.55	-1.71	-50.32	-13	37.32
459.86	54.38	237	200	V	-44.94	0.55	-1.71	-47.20	-13	34.20
1673	45.96	193	150	H	-57.43	0.84	8.48	-49.79	-13	36.79
1673	43.59	250	100	V	-59.8	0.84	8.48	-52.16	-13	39.16
16-QAM 1.4MHz Bandwidth Middle Channel										
459.92	50.67	152	150	H	-48.65	0.55	-1.71	-50.91	-13	37.91
459.92	52.34	82	150	V	-46.98	0.55	-1.71	-49.24	-13	36.24
1673	45.77	65	200	H	-57.62	0.84	8.48	-49.98	-13	36.98
1673	43.43	193	200	V	-59.96	0.84	8.48	-52.32	-13	39.32

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 1.4MHz Bandwidth High Channel										
459.69	49.98	159	100	H	-49.34	0.55	-1.71	-51.60	-13	38.60
459.69	52.32	232	200	V	-47	0.55	-1.71	-49.26	-13	36.26
1696.60	50.66	220	150	H	-62.35	0.84	8.51	-54.68	-13	41.68
1696.60	48.28	163	100	V	-64.73	0.84	8.51	-57.06	-13	44.06
16-QAM 1.4MHz Bandwidth High Channel										
459.68	51.72	338	150	H	-47.6	0.55	-1.71	-49.86	-13	36.86
459.68	51.46	176	150	V	-47.86	0.55	-1.71	-50.12	-13	37.12
1696.60	50.65	35	200	H	-62.36	0.84	8.51	-54.69	-13	41.69
1696.60	48.11	56	200	V	-64.9	0.84	8.51	-57.23	-13	44.23

LTE Band 41:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 5MHz Bandwidth Low Channel										
459.85	49.87	256	150	H	-49.48	0.55	-1.71	-51.74	-25	26.74
459.85	52.98	229	200	V	-46.37	0.55	-1.71	-48.63	-25	23.63
5115	43.01	189	100	H	-62.37	1.09	10.3	-53.16	-25	28.16
5115	39.69	190	100	V	-65.69	1.09	10.3	-56.48	-25	31.48
16-QAM 5MHz Bandwidth Low Channel										
459.64	49.88	180	200	H	-49.47	0.55	-1.71	-51.73	-25	26.73
459.64	52.78	82	150	V	-46.57	0.55	-1.71	-48.83	-25	23.83
5115	42.15	45	150	H	-63.23	1.09	10.3	-54.02	-25	29.02
5115	40.12	124	100	V	-65.26	1.09	10.3	-56.05	-25	31.05

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 5MHz Bandwidth Middle Channel										
459.67	48.86	150	150	H	-50.49	0.55	-1.71	-52.75	-25	27.75
459.67	51.64	86	200	V	-47.71	0.55	-1.71	-49.97	-25	24.97
5210	31.15	210	100	H	-63.68	1.11	10.3	-54.49	-25	29.49
5210	28.95	314	100	V	-65.88	1.11	10.3	-56.69	-25	31.69
16-QAM 5MHz Bandwidth Middle Channel										
459.63	48.56	196	200	H	-50.79	0.55	-1.71	-53.05	-25	28.05
459.63	51.04	93	150	V	-48.31	0.55	-1.71	-50.57	-25	25.57
5210	31.27	113	150	H	-63.56	1.11	10.3	-54.37	-25	29.37
5210	29.38	295	100	V	-65.45	1.11	10.3	-56.26	-25	31.26

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 5MHz Bandwidth High Channel										
459.84	49.85	301	150	H	-49.5	0.55	-1.71	-51.76	-25	26.76
459.84	51.89	288	200	V	-47.46	0.55	-1.71	-49.72	-25	24.72
5305	42.66	87	100	H	-61.66	1.12	10.3	-52.48	-25	27.48
5305	40.51	52	100	V	-63.81	1.12	10.3	-54.63	-25	29.63
16-QAM 5MHz Bandwidth High Channel										
459.64	48.65	134	200	H	-50.7	0.55	-1.71	-52.96	-25	27.96
459.64	51.48	15	150	V	-47.87	0.55	-1.71	-50.13	-25	25.13
5305	40.78	80	150	H	-63.54	1.12	10.3	-54.36	-25	29.36
5305	39.07	21	100	V	-65.25	1.12	10.3	-56.07	-25	31.07

Note:

1) Absolute Level (dBm) = Submitted Level (dBm) - Cable loss (dB) + Antenna Gain (dBd/dBi)

2) Margin (dB) = Limit (dBm) - Absolute Level (dBm)

FCC § 22.917 (a); FCC§27.53 (m)- BAND EDGES**Applicable Standards**


According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC §27.53 (m), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.


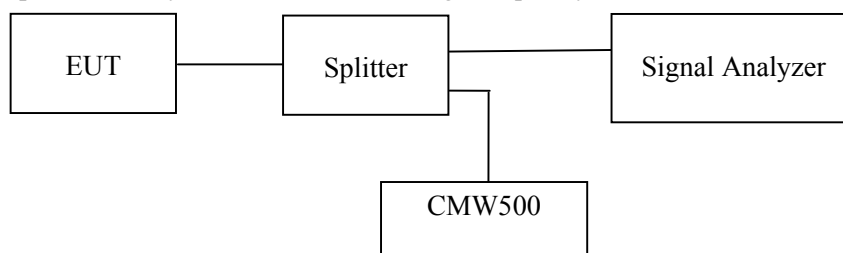
**Test Data****Environmental Conditions**

Temperature:	23-25.3 °C
Relative Humidity:	47-50 %
ATM Pressure:	100.7-101.3kPa


The testing was performed by Stone Zhang from 2021-03-26 to 2021-05-31.

EUT operation mode: Transmitting


Test Result: Compliant.

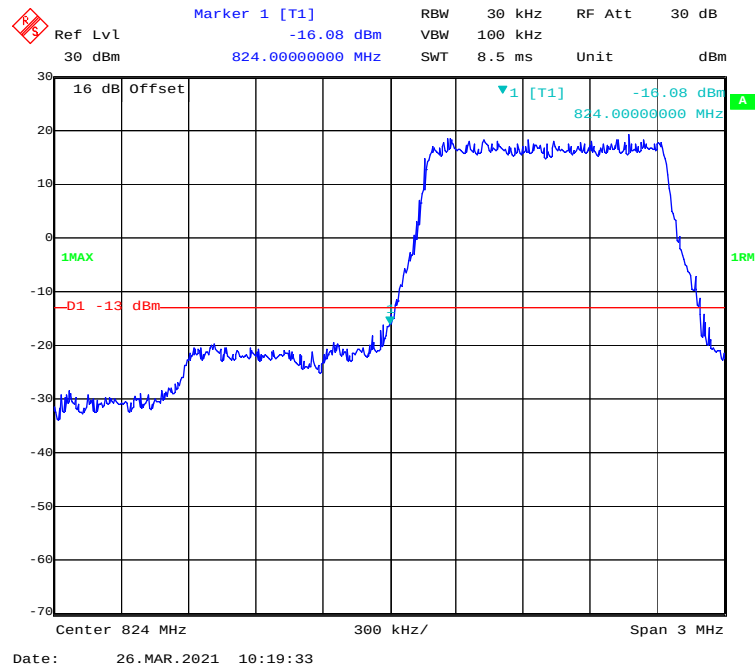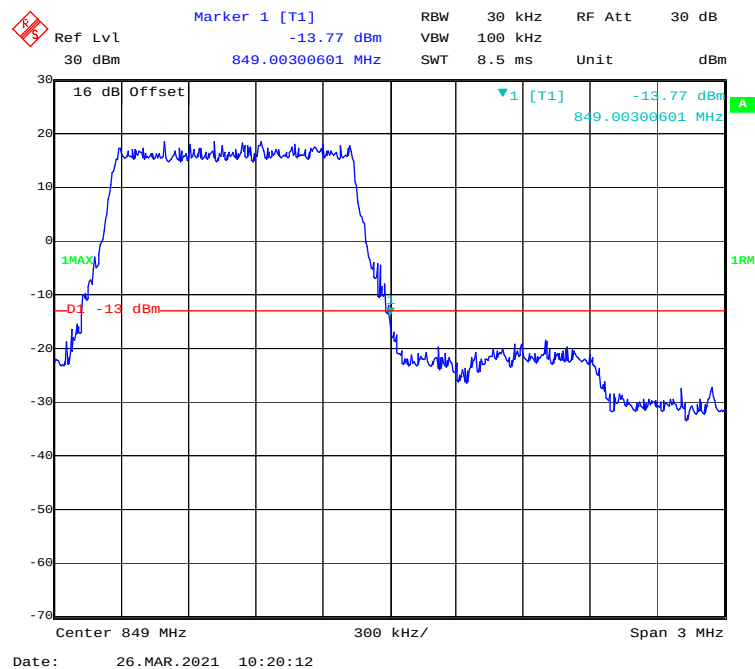LTE Band 5:**QPSK (1.4 MHz, FULL RB) - Left Band Edge****QPSK (1.4 MHz, FULL RB) - Right Band Edge**


QPSK (3.0 MHz, FULL RB) - Left Band Edge

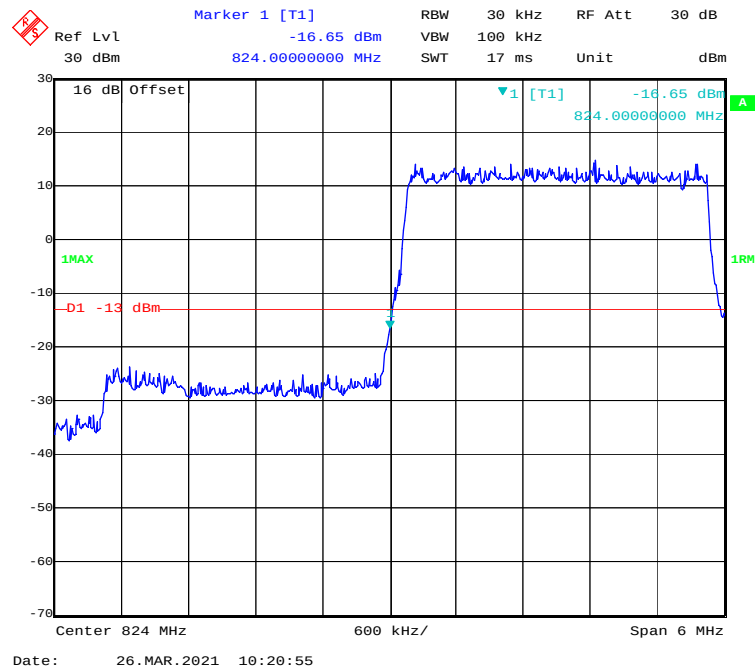


QPSK (3.0 MHz, FULL RB) - Right Band Edge

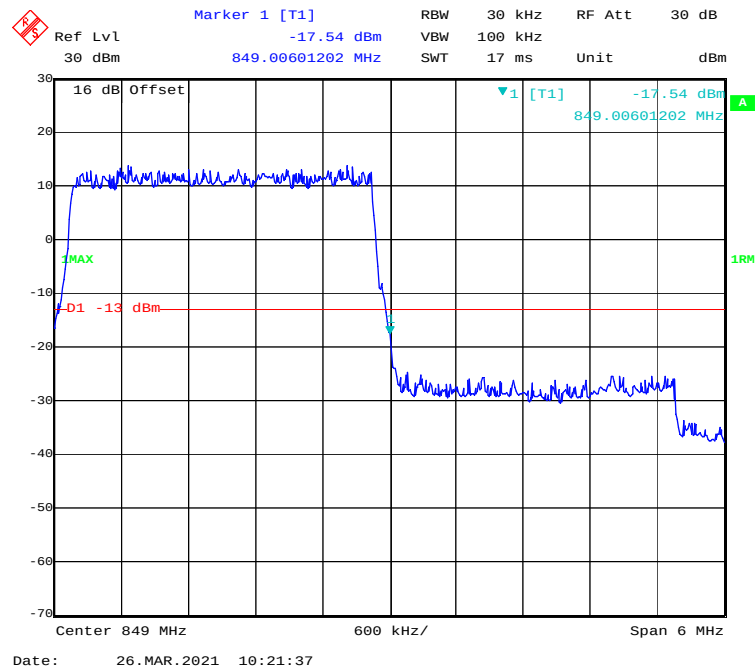


QPSK (5.0 MHz, FULL RB) - Left Band Edge

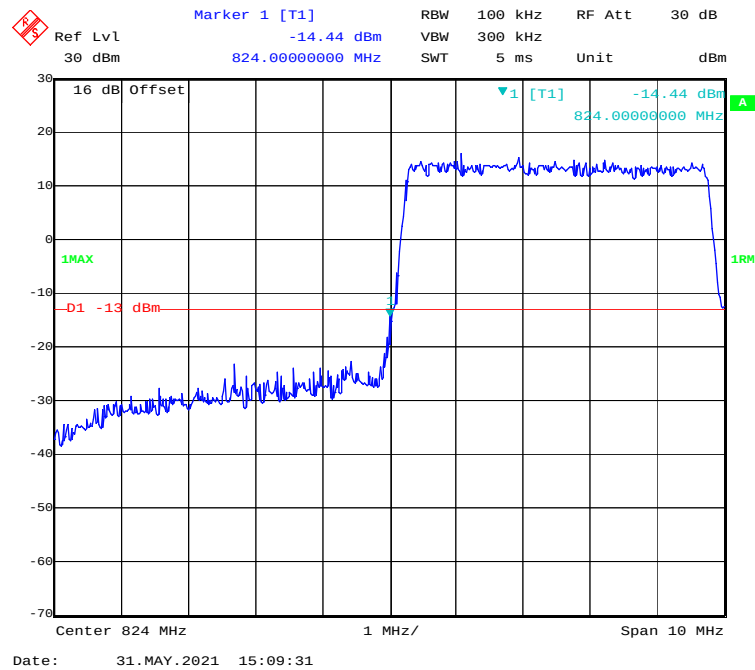


QPSK (5.0 MHz, FULL RB) - Right Band Edge

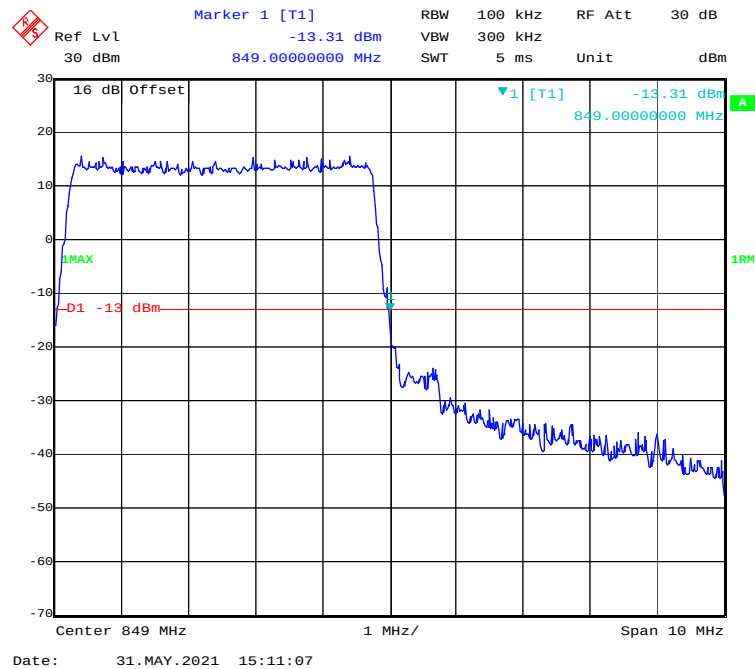


QPSK (10.0 MHz, FULL RB) - Left Band Edge

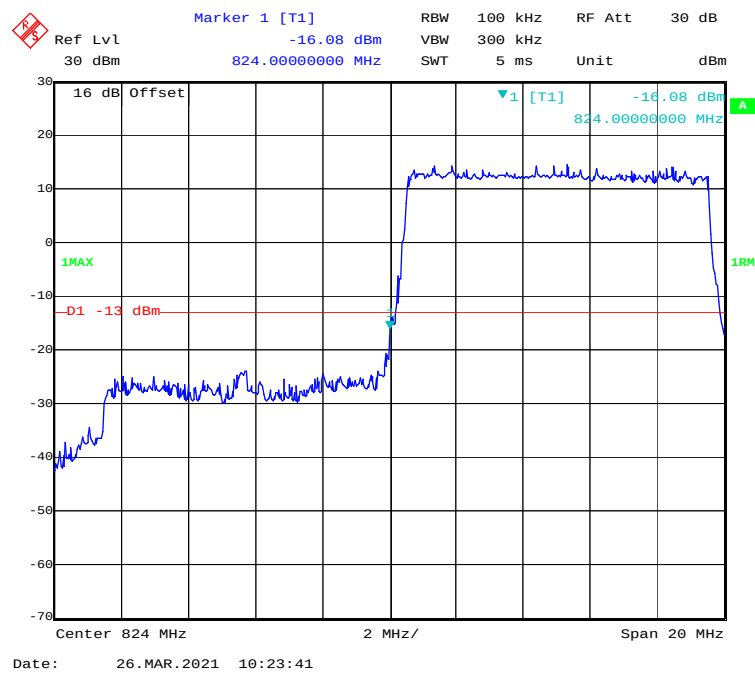


QPSK (10.0 MHz, FULL RB) - Right Band Edge

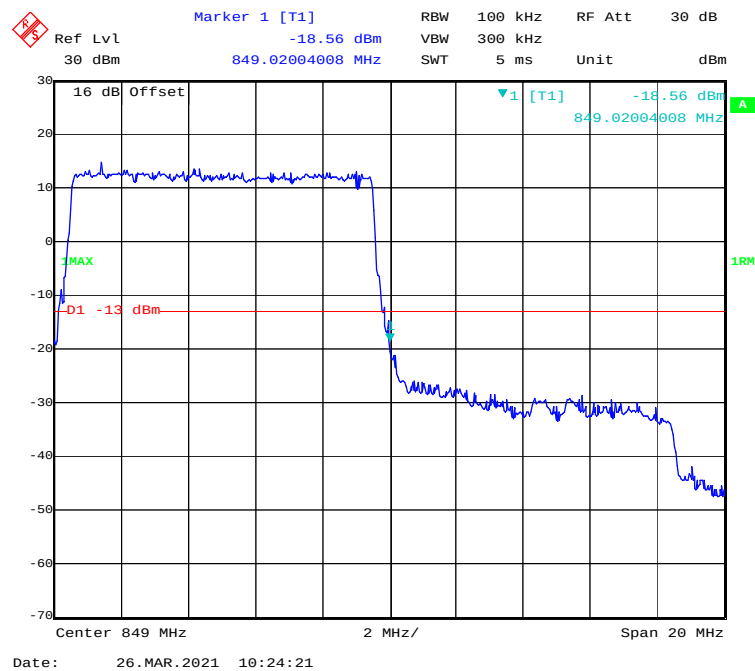


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

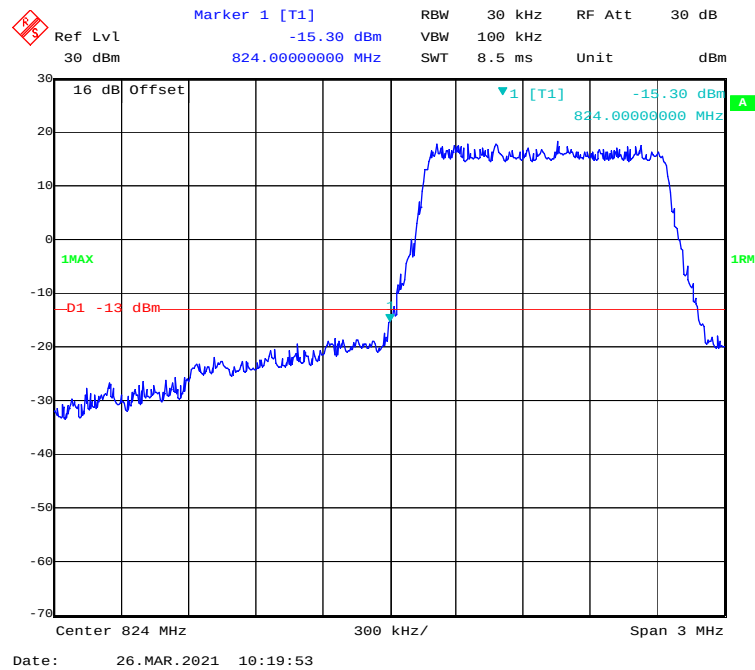


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

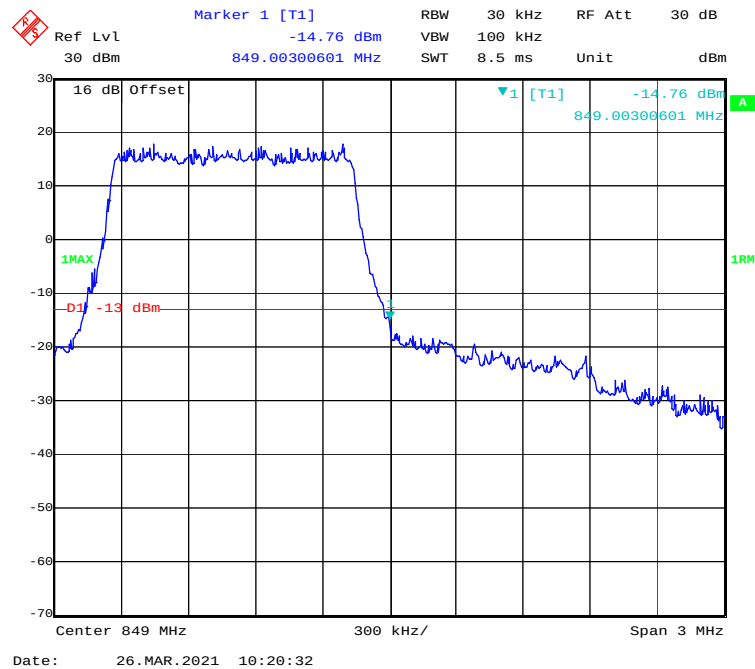

16-QAM (3.0 MHz, FULL RB) - Left Band Edge

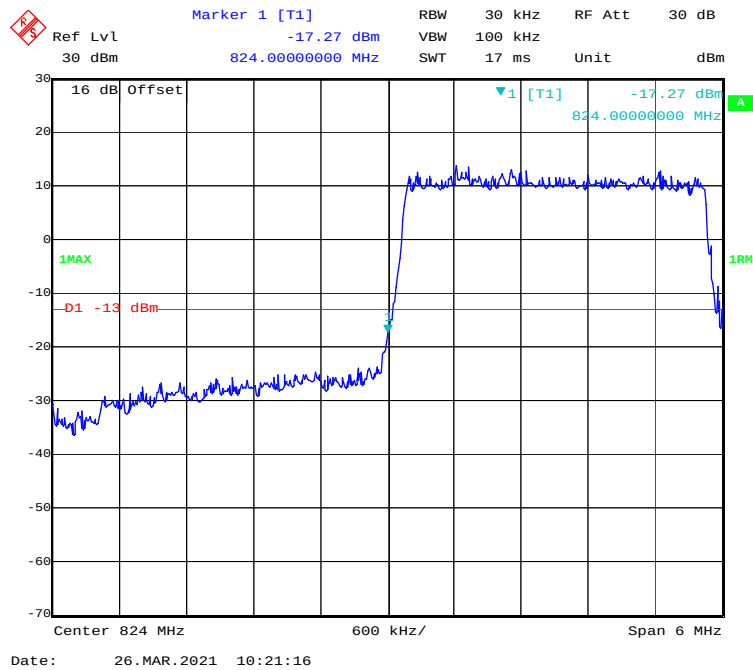

16-QAM (3.0 MHz, FULL RB) - Right Band Edge

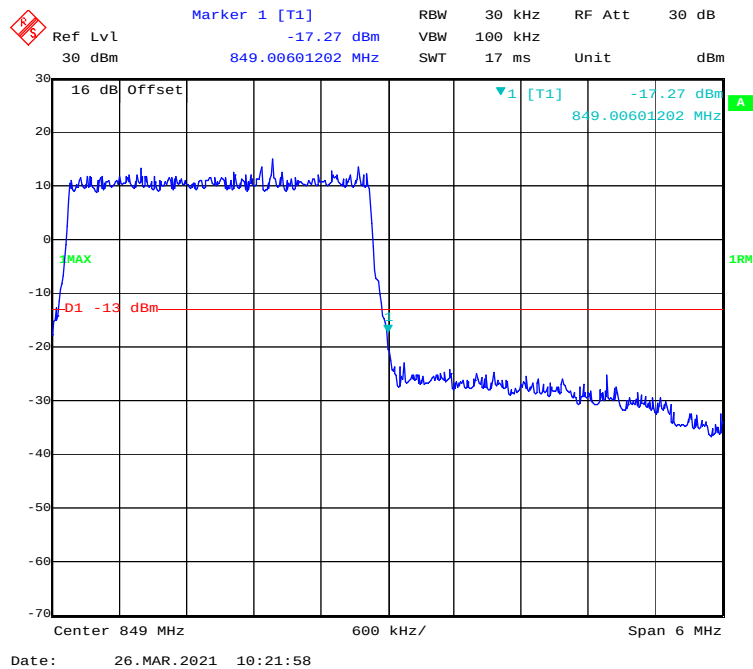

[illegible]

Ref Lvl 30 dBm
 Marker 1 [T1] -14.02 dBm
 RBW 100 kHz
 RF Att 30 dB
 30 dBm
 849.00000000 MHz
 SWT 5 ms
 Unit dBm

16 dB Offset
 1MAX
 -14.02 dBm
 849.00000000 MHz
 -13 dBm
 10 MHz

Center 849 MHz
 1 MHz/
 Span 10 MHz

Date: 31.MAY.2021 15:11:35

Marker 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl 30 dBm Unit dBm
 -19.46 dBm
 824.00000000 MHz
 5 ms
 16 dB Offset
 1MAX
 -D1 -13 dBm
 -19.46 dBm
 824.00000000 MHz
 Center 824 MHz 2 MHz/ Span 20 MHz
 Date: 26.MAR.2021 10:23:59



Marker 1 [T1]
 -19.59 dBm
 849.02004008 MHz

Ref Lvl 30 dBm
 RBW 100 kHz
 RF Att 30 dB
 SWT 5 ms
 Unit dBm


16 dB Offset
 1MAX
 -13 dBm
 -19.59 dBm
 849.02004008 MHz
 1RM

Center 849 MHz
 2 MHz/
 Span 20 MHz


Date: 26.MAR.2021 10:24:43

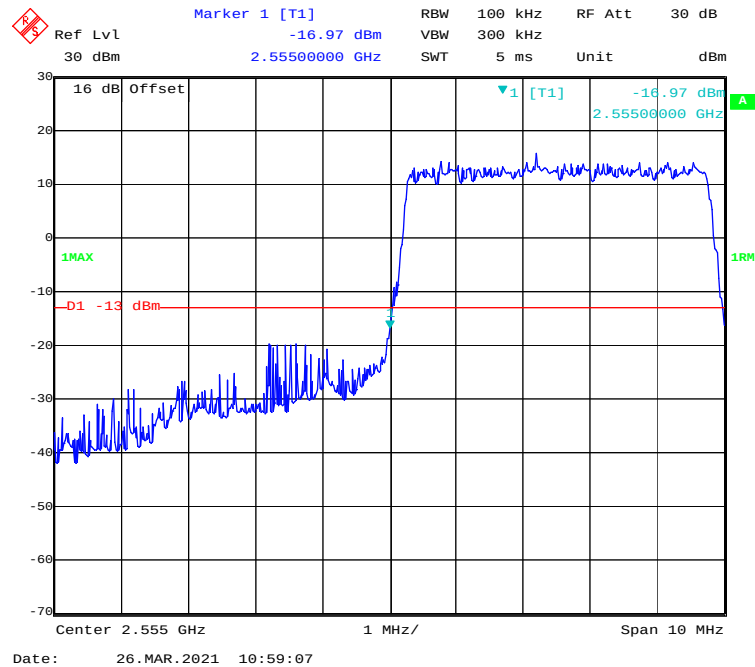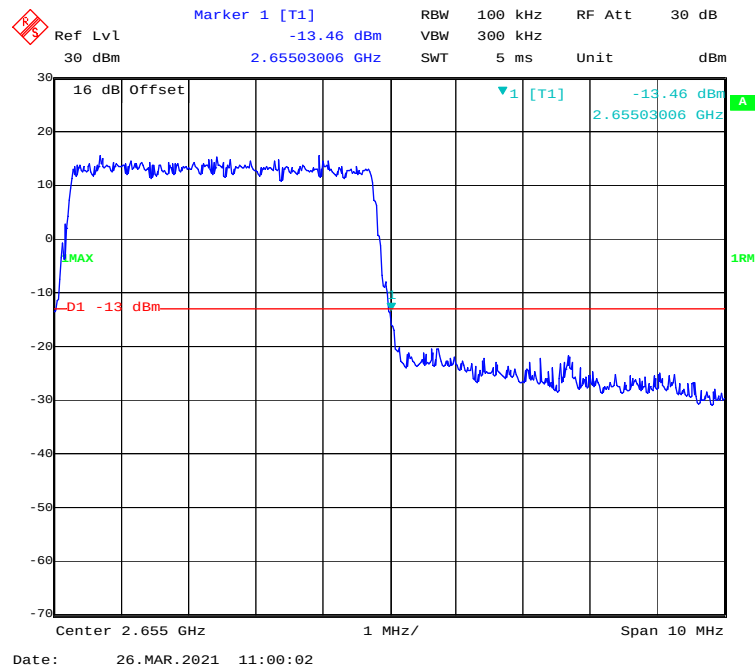LTE Band 41:**QPSK (5.0 MHz, FULL RB) - Left Band Edge****QPSK (5.0 MHz, FULL RB) - Right Band Edge**


QPSK (10.0 MHz, FULL RB) - Left Band Edge

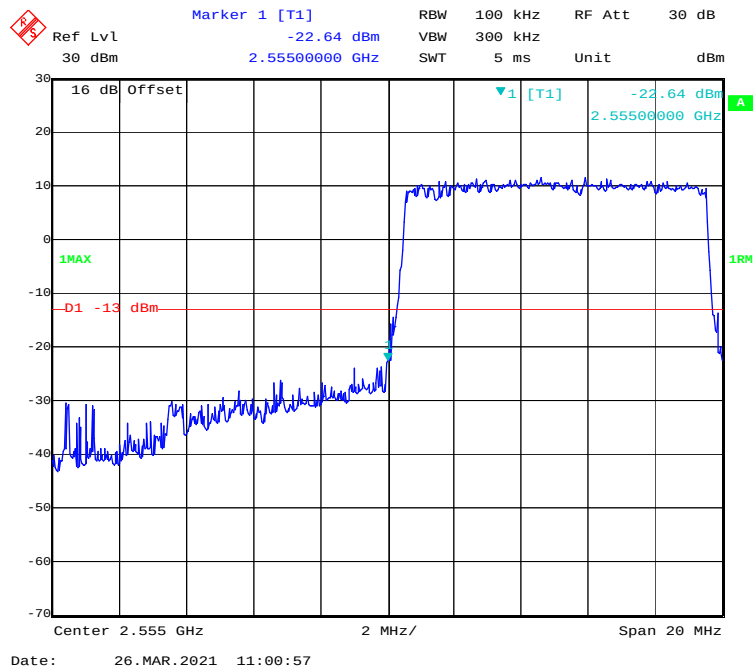


QPSK (10.0 MHz, FULL RB) - Right Band Edge

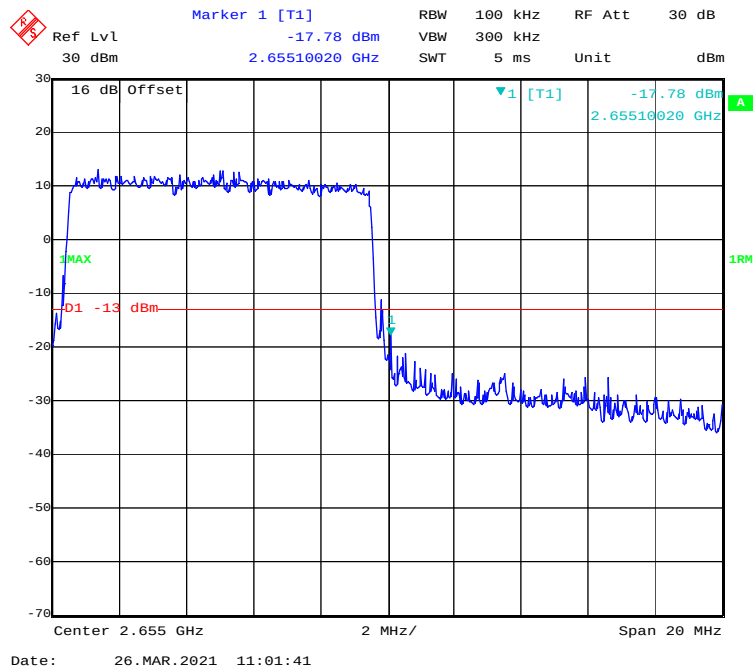


QPSK (15.0 MHz, FULL RB) - Left Band Edge

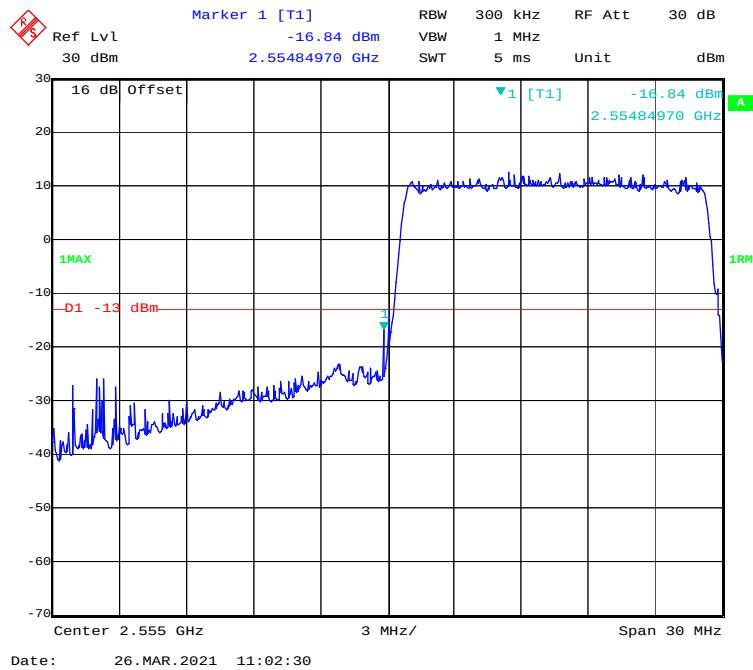


QPSK (15.0 MHz, FULL RB) - Right Band Edge


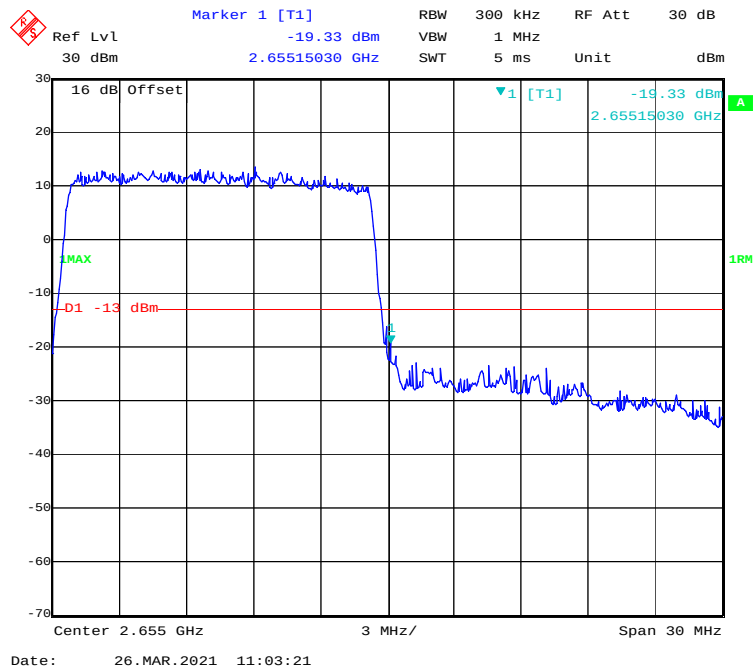


QPSK (20.0 MHz, FULL RB) - Left Band Edge

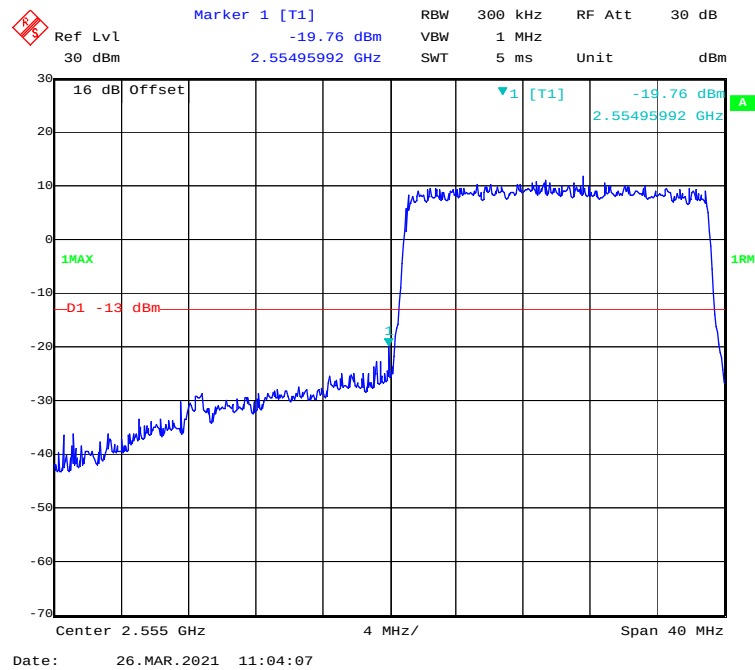


QPSK (20.0 MHz, FULL RB) - Right Band Edge

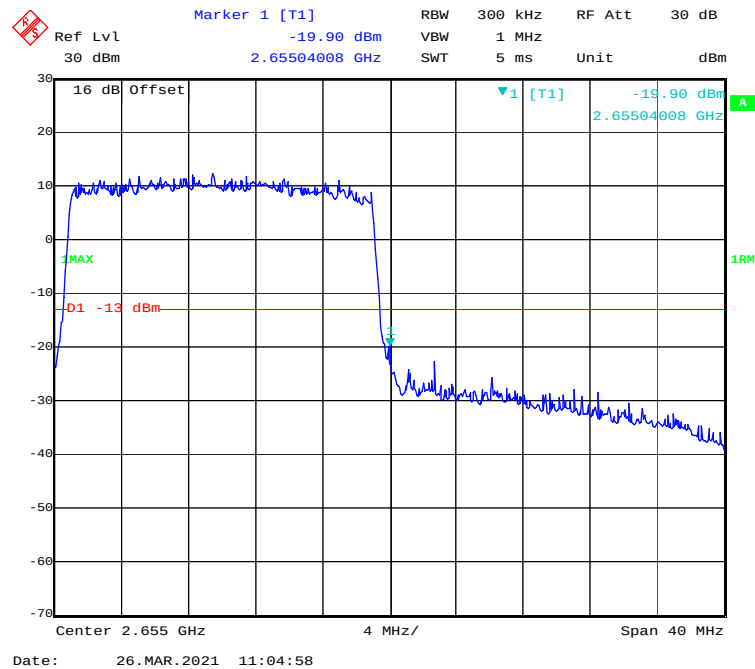


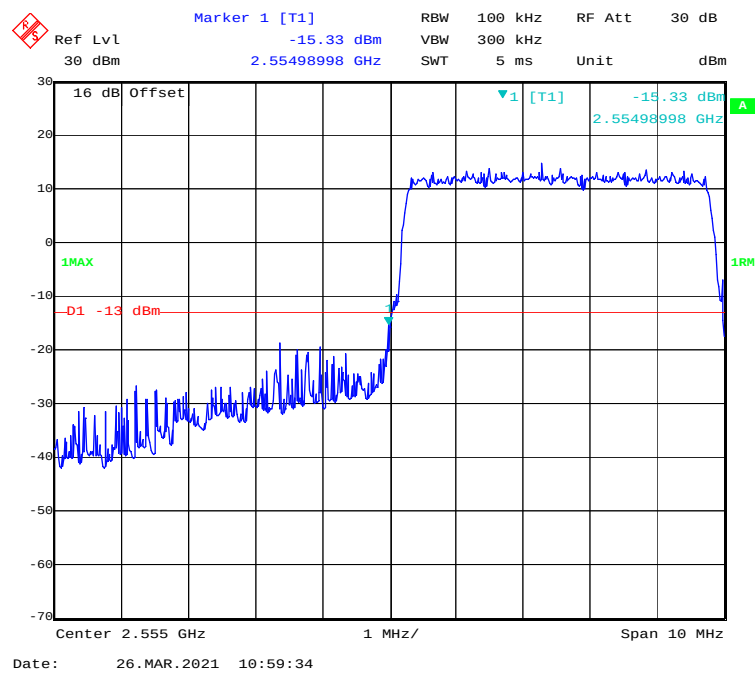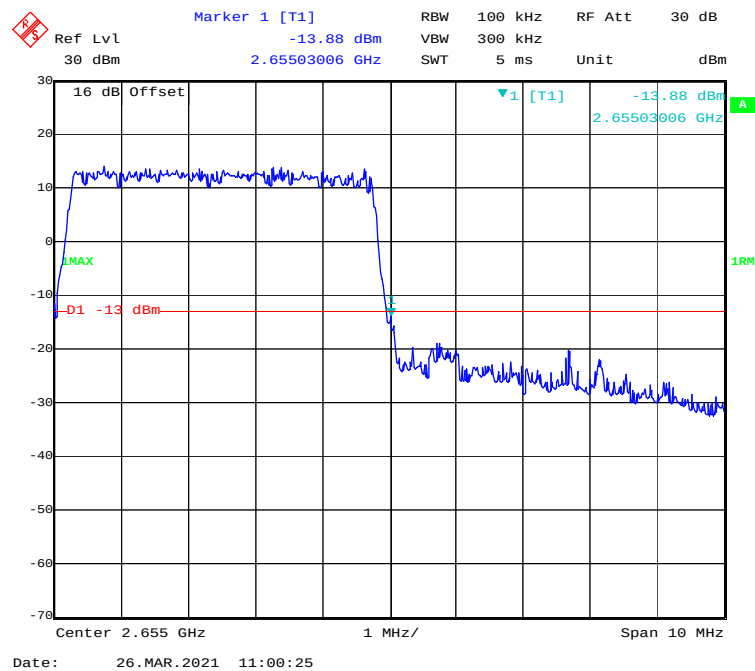16-QAM (5.0 MHz, FULL RB) - Left Band Edge**16-QAM (5.0 MHz, FULL RB) - Right Band Edge**


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

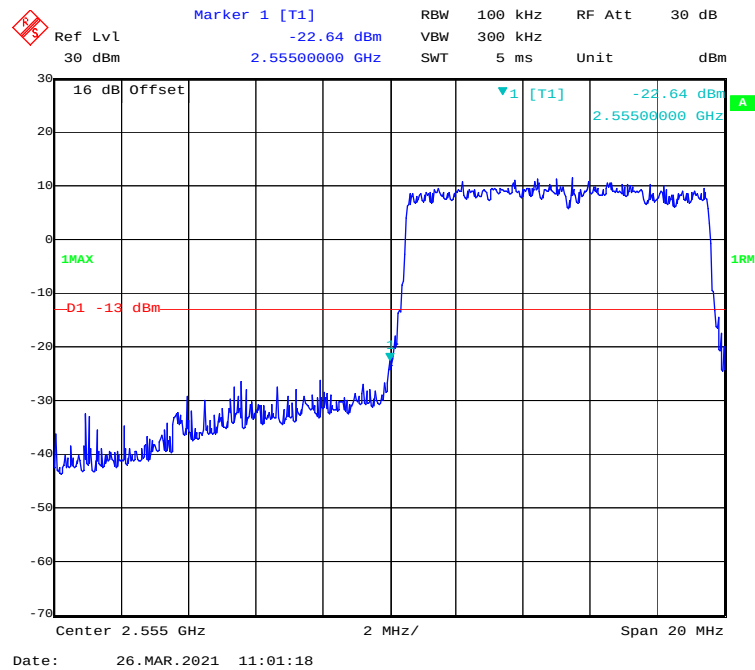


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

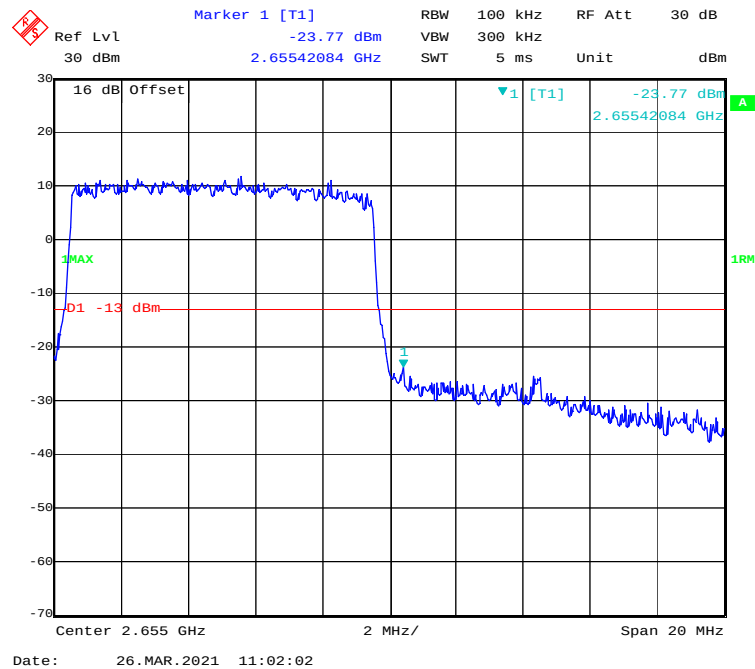


16-QAM (15.0 MHz, FULL RB) - Left Band Edge

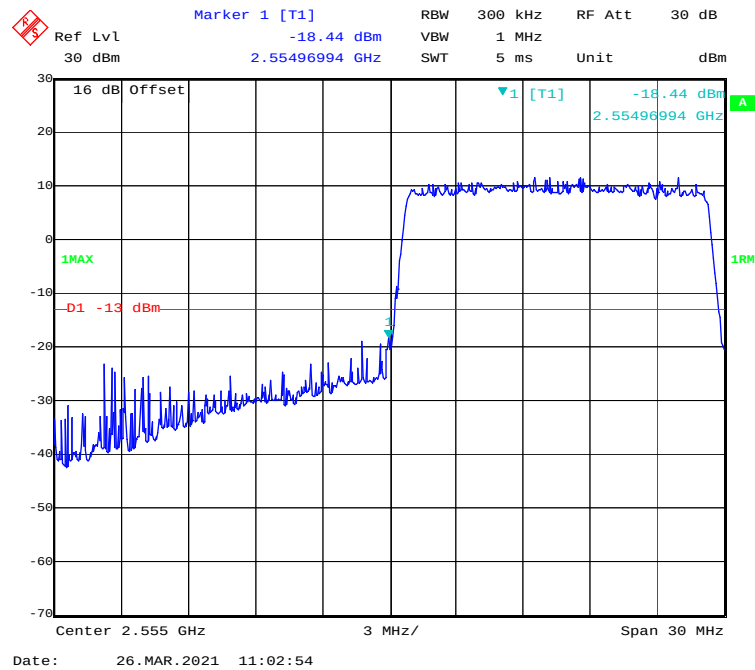


16-QAM (15.0 MHz, FULL RB) - Right Band Edge

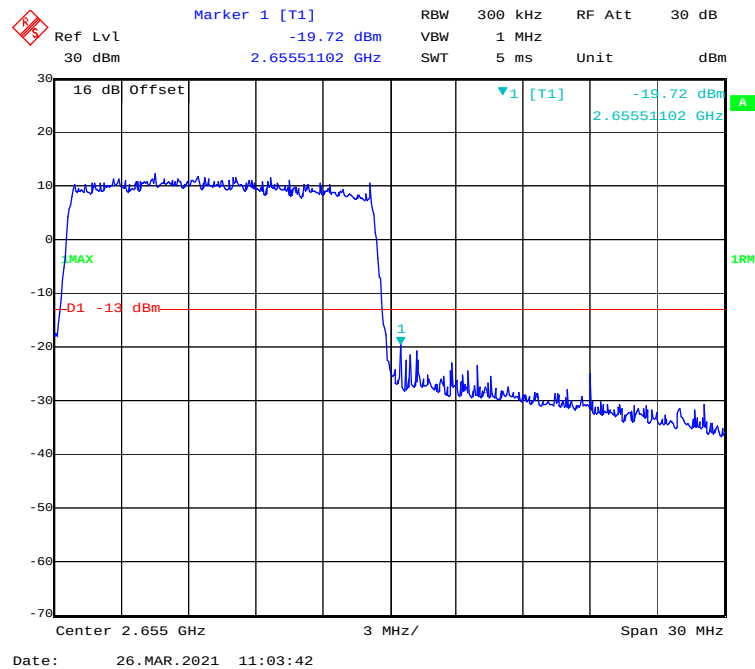

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

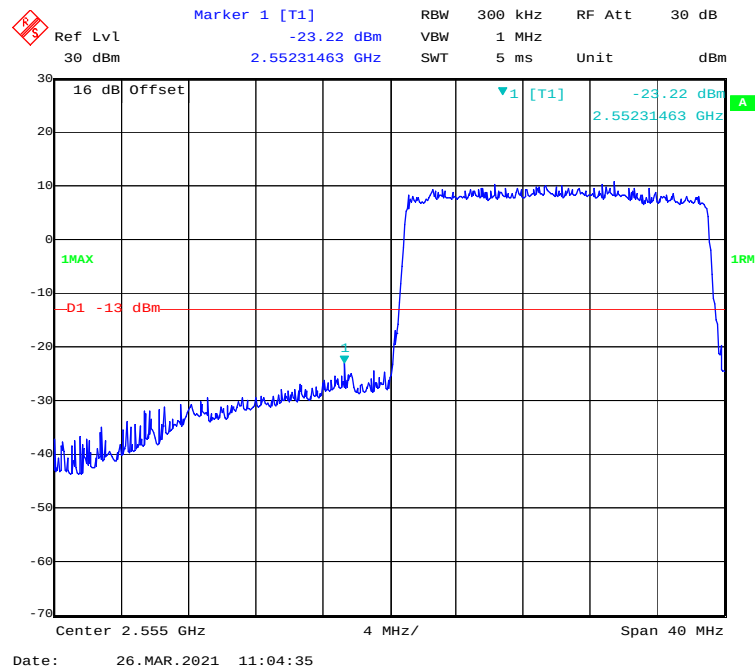

16-QAM (20.0 MHz, FULL RB) - Right Band Edge

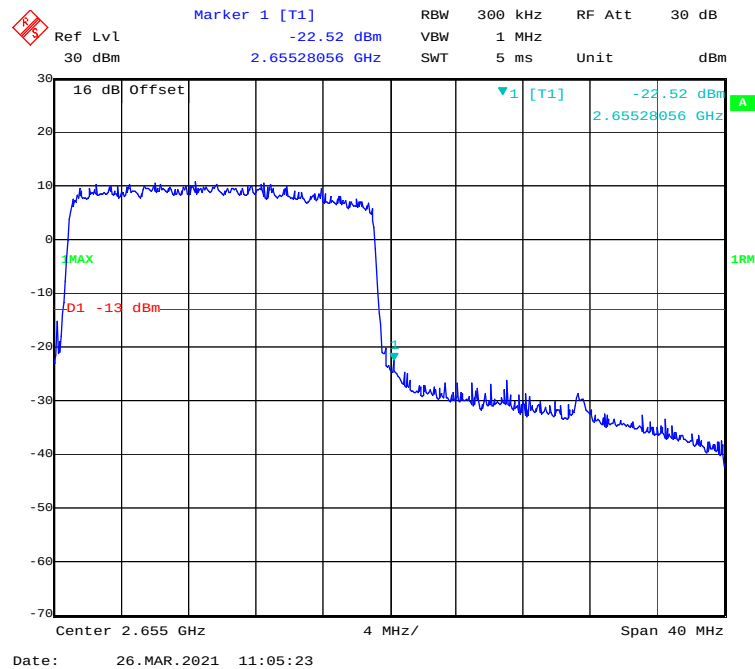

FCC § 2.1055; § 22.355; FCC §27.54- FREQUENCY STABILITY**Applicable Standards**

FCC § 2.1055, §22.355 and §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §27.54, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

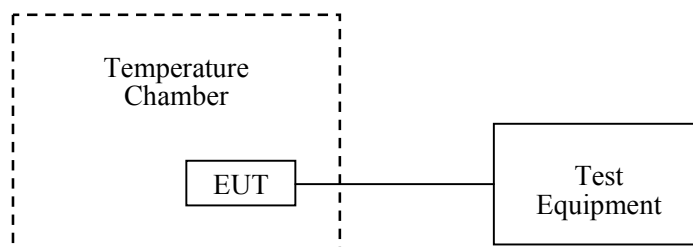

Test Data**Environmental Conditions**

Temperature:	24.9 °C
Relative Humidity:	52 %
ATM Pressure:	101.9 kPa

The testing was performed by Stone Zhang on 2021-04-10.

EUT operation mode: Transmitting

Test Result: Compliant.

LTE Band 5:

Middle Channel, $f_0 = 836.5$ MHz (QPSK) /Channel Bandwidth:10MHz				
Temperature	Power Supplied	Frequency Error	Frequency Error	Limit
(°C)	(V _{DC})	(Hz)	(ppm)	(ppm)
-30	12	17	0.0203	2.5
-20		14	0.0167	2.5
-10		11	0.0132	2.5
0		9	0.0108	2.5
10		13	0.0155	2.5
20		16	0.0191	2.5
30		8	0.0096	2.5
40		12	0.0143	2.5
50		16	0.0179	2.5
20	V min.=9	12	0.0143	2.5
20	V max.= 16	15	0.0179	2.5

Middle Channel, $f_0 = 836.5$ MHz (16-QAM) /Channel Bandwidth:10MHz				
Temperature	Power Supplied	Frequency Error	Frequency Error	Limit
(°C)	(V _{DC})	(Hz)	(ppm)	(ppm)
-30	12	18	0.0215	2.5
-20		15	0.0179	2.5
-10		16	0.0191	2.5
0		13	0.0155	2.5
10		14	0.0167	2.5
20		9	0.0108	2.5
30		15	0.0179	2.5
40		14	0.0167	2.5
50		13	0.0132	2.5
20	V min.=9	14	0.0167	2.5
20	V max.= 16	11	0.0132	2.5

LTE Band 41:

Low Channel & High Channel (QPSK) /Channel Bandwidth:20MHz					
Temperature	Power Supplied	F _L	F _H	F _L Limit	F _H Limit
(°C)	(V _{DC})	(MHz)	(MHz)	(MHz)	(MHz)
-30	12	2555.0587	2654.9593	2555	2655
-20		2555.0579	2654.9537	2555	2655
-10		2555.0544	2654.9516	2555	2655
0		2555.0568	2654.9525	2555	2655
10		2555.0544	2654.9559	2555	2655
20		2555.0506	2654.9589	2555	2655
30		2555.0567	2654.9505	2555	2655
40		2555.0557	2654.9523	2555	2655
50		2555.056	2654.9514	2555	2655
20	V min.= 9	2555.0555	2654.9583	2555	2655
20	V max.= 16	2555.052	2654.9545	2555	2655

Low Channel & High Channel (16-QAM) /Channel Bandwidth:20MHz					
Temperature	Power Supplied	F _L	F _H	F _L Limit	F _H Limit
(°C)	(V _{DC})	(MHz)	(MHz)	(MHz)	(MHz)
-30	12	2555.0593	2654.9518	2555	2655
-20		2555.0587	2654.9552	2555	2655
-10		2555.0557	2654.9589	2555	2655
0		2555.0568	2654.9536	2555	2655
10		2555.0584	2654.9592	2555	2655
20		2555.0504	2654.9548	2555	2655
30		2555.0518	2654.9502	2555	2655
40		2555.0595	2654.9545	2555	2655
50		2555.0523	2654.9518	2555	2655
20	V min.= 9	2555.0528	2654.951	2555	2655
20	V max.= 16	2555.0514	2654.952	2555	2655

Declarations

- 1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.
- 2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
- 3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
- 4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
- 5: This report cannot be reproduced except in full, without prior written approval of the Company.
- 6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******