



**BUREAU
VERITAS**

Test Report No.: W7L-P24010017RF03


802.11n (40MHz)

Worst case harmonic:

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	10620.000	52.95	44.74	74.00	-21.05	8.21	Peak	Horizontal
2	10620.000	44.78	36.57	54.00	-9.22	8.21	Average	Horizontal
3	PK15930.000	56.29	39.97	74.00	-17.71	16.32	Peak	Horizontal
4	PP15930.000	49.28	32.96	54.00	-4.72	16.32	Average	Horizontal

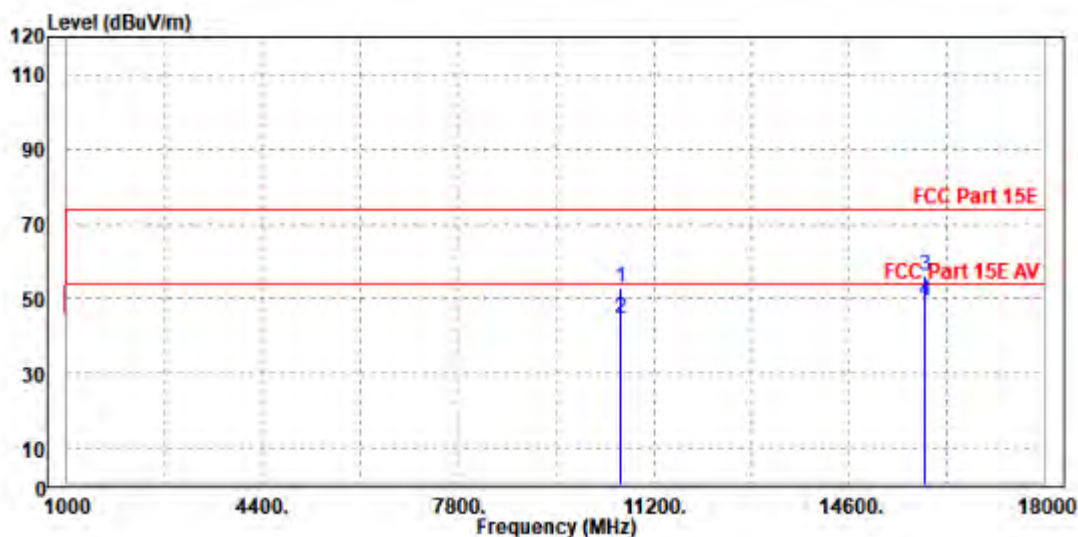



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	10620.000	53.78	45.37	74.00	-20.22	8.41	Peak	Vertical
2	10620.000	45.35	36.94	54.00	-8.65	8.41	Average	Vertical
3	PK15930.000	58.03	41.18	74.00	-15.97	16.85	Peak	Vertical
4	PP15930.000	49.91	33.06	54.00	-4.09	16.85	Average	Vertical

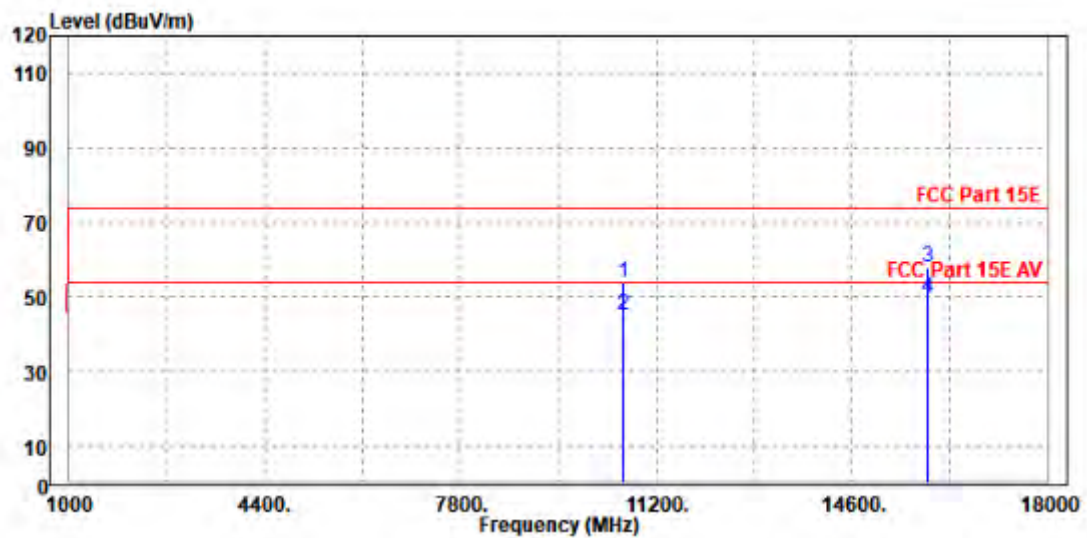

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5310MHz: Fundamental frequency.



Band 3

802.11a

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	55.03	55.96	74	-18.97	34.77	9.81	45.51	200	285	Peak
5460	48.07	49	54	-5.93	34.77	9.81	45.51	200	285	Average
5470	58.29	59.21	68.2	-9.91	34.78	9.81	45.51	200	285	Peak
5500	104.1	105	/	/	34.8	9.8	45.5	200	285	Peak
5500	97.57	98.47	/	/	34.8	9.8	45.5	200	285	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.41	55.51	74	-19.59	34.6	9.81	45.51	100	145	Peak
5460	47.55	48.65	54	-6.45	34.6	9.81	45.51	100	145	Average
5470	52.36	53.46	68.2	-15.84	34.6	9.81	45.51	100	145	Peak
5500	94.24	95.34	/	/	34.6	9.8	45.5	100	145	Peak
5500	86.78	87.88	/	/	34.6	9.8	45.5	100	145	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.98	54.91	74	-20.02	34.77	9.81	45.51	200	285	Peak
5460	47.53	48.46	54	-6.47	34.77	9.81	45.51	200	285	Average
5470	52.38	53.3	68.2	-15.82	34.78	9.81	45.51	200	285	Peak
5580	103.98	104.75	/	/	34.9	9.83	45.5	200	285	Peak
5580	96.56	97.33	/	/	34.9	9.83	45.5	200	285	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.21	54.31	74	-20.79	34.6	9.81	45.51	100	145	Peak
5460	47.2	48.3	54	-6.8	34.6	9.81	45.51	100	145	Average
5470	54.77	55.87	68.2	-13.43	34.6	9.81	45.51	100	145	Peak
5580	94.61	95.58	/	/	34.7	9.83	45.5	100	145	Peak
5580	87.71	88.68	/	/	34.7	9.83	45.5	100	145	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	104.91	105.5	/	/	35.04	9.87	45.5	105	285	Peak
5700	97.85	98.44	/	/	35.04	9.87	45.5	105	285	Average
5725	62.33	62.88	68.2	-5.87	35.07	9.88	45.5	105	285	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	95.71	96.5	/	/	34.84	9.87	45.5	100	145	Peak
5700	88.86	89.65	/	/	34.84	9.87	45.5	100	145	Average
5725	58.5	59.25	68.2	-9.7	34.87	9.88	45.5	100	145	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	54.76	55.68	68.2	-13.44	34.78	9.81	45.51	100	285	Peak
5720	103.78	104.35	/	/	35.06	9.87	45.5	100	285	Peak
5720	96.72	97.29	/	/	35.06	9.87	45.5	100	285	Average
5850	54.22	54.58	68.2	-13.98	35.22	9.92	45.5	100	285	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	55.13	56.23	68.2	-13.07	34.6	9.81	45.51	100	142	Peak
5720	97.56	98.33	/	/	34.86	9.87	45.5	100	142	Peak
5720	89.84	90.61	/	/	34.86	9.87	45.5	100	142	Average
5850	54.89	55.45	68.2	-13.31	35.02	9.92	45.5	100	142	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5720MHz: Fundamental frequency.
3. #: Out of restricted band.



802.11n (20MHz)

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	55.28	56.21	74	-18.72	34.77	9.81	45.51	105	285	Peak
5460	48.32	49.25	54	-5.68	34.77	9.81	45.51	105	285	Average
5470	60.77	61.69	68.2	-7.43	34.78	9.81	45.51	105	285	Peak
5500	103.19	104.09	/	/	34.8	9.8	45.5	105	285	Peak
5500	95.43	96.33	/	/	34.8	9.8	45.5	105	285	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.45	54.55	74	-20.55	34.6	9.81	45.51	100	145	Peak
5460	47.76	48.86	54	-6.24	34.6	9.81	45.51	100	145	Average
5470	53.25	54.35	68.2	-14.95	34.6	9.81	45.51	100	145	Peak
5500	94.6	95.7	/	/	34.6	9.8	45.5	100	145	Peak
5500	86.68	87.78	/	/	34.6	9.8	45.5	100	145	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.42	54.35	74	-20.58	34.77	9.81	45.51	190	285	Peak
5460	47.29	48.22	54	-6.71	34.77	9.81	45.51	190	285	Average
5470	55.02	55.94	68.2	-13.18	34.78	9.81	45.51	190	285	Peak
5580	104.68	105.45	/	/	34.9	9.83	45.5	190	285	Peak
5580	96.35	97.12	/	/	34.9	9.83	45.5	190	285	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.27	55.37	74	-19.73	34.6	9.81	45.51	100	145	Peak
5460	47.73	48.83	54	-6.27	34.6	9.81	45.51	100	145	Average
5470	54.26	55.36	68.2	-13.94	34.6	9.81	45.51	100	145	Peak
5580	96.88	97.85	/	/	34.7	9.83	45.5	100	145	Peak
5580	88.76	89.73	/	/	34.7	9.83	45.5	100	145	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	105.1	105.69	/	/	35.04	9.87	45.5	190	285	Peak
5700	97.54	98.13	/	/	35.04	9.87	45.5	190	285	Average
5725	62.87	63.42	68.2	-5.33	35.07	9.88	45.5	190	285	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	97.48	98.27	/	/	34.84	9.87	45.5	100	145	Peak
5700	87.71	88.5	/	/	34.84	9.87	45.5	100	145	Average
5725	58.16	58.91	68.2	-10.04	34.87	9.88	45.5	100	145	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	53.34	54.26	68.2	-14.86	34.78	9.81	45.51	100	285	Peak
5720	103.5	104.07	/	/	35.06	9.87	45.5	100	285	Peak
5720	96.83	97.4	/	/	35.06	9.87	45.5	100	285	Average
5850	54.92	55.28	68.2	-13.28	35.22	9.92	45.5	100	285	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	54.54	55.64	68.2	-13.66	34.6	9.81	45.51	100	142	Peak
5720	97.06	97.83	/	/	34.86	9.87	45.5	100	142	Peak
5720	89.85	90.62	/	/	34.86	9.87	45.5	100	142	Average
5850	53.93	54.49	68.2	-14.27	35.02	9.92	45.5	100	142	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5720MHz: Fundamental frequency.
3. #: Out of restricted band.

802.11n (40MHz)

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.03	54.96	74	-19.97	34.77	9.81	45.51	200	280	Peak
5460	49.53	50.46	54	-4.47	34.77	9.81	45.51	200	280	Average
5470	59.43	60.35	68.2	-8.77	34.78	9.81	45.51	200	280	Peak
5510	99.33	100.22	/	/	34.81	9.8	45.5	200	280	Peak
5510	93.46	94.35	/	/	34.81	9.8	45.5	200	280	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.89	53.99	74	-21.11	34.6	9.81	45.51	100	145	Peak
5460	48.31	49.41	54	-5.69	34.6	9.81	45.51	100	145	Average
5470	52.55	53.65	68.2	-15.65	34.6	9.81	45.51	100	145	Peak
5510	90.46	91.55	/	/	34.61	9.8	45.5	100	145	Peak
5510	84.44	85.53	/	/	34.61	9.8	45.5	100	145	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5510MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.67	53.6	74	-21.33	34.77	9.81	45.51	200	280	Peak
5460	47.95	48.88	54	-6.05	34.77	9.81	45.51	200	280	Average
5470	53.14	54.06	68.2	-15.06	34.78	9.81	45.51	200	280	Peak
5550	98.47	99.29	/	/	34.86	9.82	45.5	200	280	Peak
5550	93.83	94.65	/	/	34.86	9.82	45.5	200	280	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.42	55.52	74	-19.58	34.6	9.81	45.51	100	145	Peak
5460	47.65	48.75	54	-6.35	34.6	9.81	45.51	100	145	Average
5470	52.5	53.6	68.2	-15.7	34.6	9.81	45.51	100	145	Peak
5550	91.02	92.04	/	/	34.66	9.82	45.5	100	145	Peak
5550	84.55	85.57	/	/	34.66	9.82	45.5	100	145	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	100.48	101.12	/	/	35	9.86	45.5	145	285	Peak
5670	94.66	95.3	/	/	35	9.86	45.5	145	285	Average
5725	56.1	56.65	68.2	-12.1	35.07	9.88	45.5	145	285	Peak
ANTENNA POLARITY & test distance: Vertical at 3 m										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	92.06	92.9	/	/	34.8	9.86	45.5	100	145	Peak
5670	85.56	86.4	/	/	34.8	9.86	45.5	100	145	Average
5725	54.47	55.22	68.2	-13.73	34.87	9.88	45.5	100	145	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5670MHz: Fundamental frequency.
- #: Out of restricted band.

CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	54.3	55.22	68.2	-13.9	34.78	9.81	45.51	100	285	Peak
5710	98.23	98.81	/	/	35.05	9.87	45.5	100	285	Peak
5710	93.02	93.6	/	/	35.05	9.87	45.5	100	285	Average
5850	55.66	56.02	68.2	-12.54	35.22	9.92	45.5	100	285	Peak
ANTENNA POLARITY & test distance: Vertical at 3 m										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	53.78	54.88	68.2	-14.42	34.6	9.81	45.51	100	142	Peak
5710	92.36	93.14	/	/	34.85	9.87	45.5	100	142	Peak
5710	86.48	87.26	/	/	34.85	9.87	45.5	100	142	Average
5850	54.62	55.18	68.2	-13.58	35.02	9.92	45.5	100	142	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5710MHz: Fundamental frequency.
3. #: Out of restricted band.



802.11ac (20MHz)

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.89	55.82	74	-19.11	34.77	9.81	45.51	145	285	Peak
5460	48.16	49.09	54	-5.84	34.77	9.81	45.51	145	285	Average
5470	56.37	57.29	68.2	-11.83	34.78	9.81	45.51	145	285	Peak
5500	104.29	105.19	/	/	34.8	9.8	45.5	145	285	Peak
5500	95.9	96.8	/	/	34.8	9.8	45.5	145	285	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.11	55.21	74	-19.89	34.6	9.81	45.51	100	145	Peak
5460	47.29	48.39	54	-6.71	34.6	9.81	45.51	100	145	Average
5470	54.44	55.54	68.2	-13.76	34.6	9.81	45.51	100	145	Peak
5500	94.44	95.54	/	/	34.6	9.8	45.5	100	145	Peak
5500	86.26	87.36	/	/	34.6	9.8	45.5	100	145	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.47	54.4	74	-20.53	34.77	9.81	45.51	145	285	Peak
5460	47.15	48.08	54	-6.85	34.77	9.81	45.51	145	285	Average
5470	54.04	54.96	68.2	-14.16	34.78	9.81	45.51	145	285	Peak
5580	104.32	105.09	/	/	34.9	9.83	45.5	145	285	Peak
5580	95.68	96.45	/	/	34.9	9.83	45.5	145	285	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.48	55.58	74	-19.52	34.6	9.81	45.51	100	145	Peak
5460	47.05	48.15	54	-6.95	34.6	9.81	45.51	100	145	Average
5470	53.6	54.7	68.2	-14.6	34.6	9.81	45.51	100	145	Peak
5580	96.07	97.04	/	/	34.7	9.83	45.5	100	145	Peak
5580	88.05	89.02	/	/	34.7	9.83	45.5	100	145	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	105.9	106.49	/	/	35.04	9.87	45.5	145	285	Peak
5700	97.42	98.01	/	/	35.04	9.87	45.5	145	285	Average
5725	63.49	64.04	68.2	-4.71	35.07	9.88	45.5	145	285	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	96.69	97.48	/	/	34.84	9.87	45.5	100	145	Peak
5700	88.39	89.18	/	/	34.84	9.87	45.5	100	145	Average
5725	57.79	58.54	68.2	-10.41	34.87	9.88	45.5	100	145	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5700MHz: Fundamental frequency.
- #: Out of restricted band.

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.74	53.66	68.2	-15.46	34.78	9.81	45.51	100	285	Peak
5720	103.58	104.15	/	/	35.06	9.87	45.5	100	285	Peak
5720	96.84	97.41	/	/	35.06	9.87	45.5	100	285	Average
5850	55.17	55.53	68.2	-13.03	35.22	9.92	45.5	100	285	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	54.59	55.69	68.2	-13.61	34.6	9.81	45.51	100	142	Peak
5720	96.89	97.66	/	/	34.86	9.87	45.5	100	142	Peak
5720	89.95	90.72	/	/	34.86	9.87	45.5	100	142	Average
5850	56.05	56.61	68.2	-12.15	35.02	9.92	45.5	100	142	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5720MHz: Fundamental frequency.
- #: Out of restricted band.

802.11ac (40MHz)

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.31	55.24	74	-19.69	34.77	9.81	45.51	145	285	Peak
5460	48.97	49.9	54	-5.03	34.77	9.81	45.51	145	285	Average
5470	59.25	60.17	68.2	-8.95	34.78	9.81	45.51	145	285	Peak
5510	99.07	99.96	/	/	34.81	9.8	45.5	145	285	Peak
5510	92.6	93.49	/	/	34.81	9.8	45.5	145	285	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	55.1	56.2	74	-18.9	34.6	9.81	45.51	100	145	Peak
5460	47.42	48.52	54	-6.58	34.6	9.81	45.51	100	145	Average
5470	53.35	54.45	68.2	-14.85	34.6	9.81	45.51	100	145	Peak
5510	90.08	91.17	/	/	34.61	9.8	45.5	100	145	Peak
5510	83.8	84.89	/	/	34.61	9.8	45.5	100	145	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5510MHz: Fundamental frequency.
- #: Out of restricted band.

CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.59	53.52	74	-21.41	34.77	9.81	45.51	145	285	Peak
5460	47.7	48.63	54	-6.3	34.77	9.81	45.51	145	285	Average
5470	54.07	54.99	68.2	-14.13	34.78	9.81	45.51	145	285	Peak
5550	99	99.82	/	/	34.86	9.82	45.5	145	285	Peak
5550	92.39	93.21	/	/	34.86	9.82	45.5	145	285	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.74	53.84	74	-21.26	34.6	9.81	45.51	100	145	Peak
5460	46.92	48.02	54	-7.08	34.6	9.81	45.51	100	145	Average
5470	52.99	54.09	68.2	-15.21	34.6	9.81	45.51	100	145	Peak
5550	89.86	90.88	/	/	34.66	9.82	45.5	100	145	Peak
5550	83.46	84.48	/	/	34.66	9.82	45.5	100	145	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5500MHz: Fundamental frequency.
- #: Out of restricted band.

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	100.52	101.16	/	/	35	9.86	45.5	145	285	Peak
5670	94.77	95.41	/	/	35	9.86	45.5	145	285	Average
5725	54.47	55.02	68.2	-13.73	35.07	9.88	45.5	145	285	Peak
ANTENNA POLARITY & test distance: Vertical at 3 m										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	91.73	92.57	/	/	34.8	9.86	45.5	100	145	Peak
5670	85.9	86.74	/	/	34.8	9.86	45.5	100	145	Average
5725	54.08	54.83	68.2	-14.12	34.87	9.88	45.5	100	145	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5670MHz: Fundamental frequency.
- #: Out of restricted band.



CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	53.05	53.97	68.2	-15.15	34.78	9.81	45.51	100	285	Peak
5710	98.51	99.09	/	/	35.05	9.87	45.5	100	285	Peak
5710	93.3	93.88	/	/	35.05	9.87	45.5	100	285	Average
5850	56.41	56.77	68.2	-11.79	35.22	9.92	45.5	100	285	Peak
ANTENNA POLARITY & test distance: Vertical at 3 m										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.54	53.64	68.2	-15.66	34.6	9.81	45.51	100	142	Peak
5710	90.87	91.65	/	/	34.85	9.87	45.5	100	142	Peak
5710	86.29	87.07	/	/	34.85	9.87	45.5	100	142	Average
5850	54.82	55.38	68.2	-13.38	35.02	9.92	45.5	100	142	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5710MHz: Fundamental frequency.
3. #: Out of restricted band.

802.11ac (80MHz)

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	57.09	58.02	74	-16.91	34.77	9.81	45.51	145	285	Peak
5460	50.22	51.15	54	-3.78	34.77	9.81	45.51	145	285	Average
5470	57.98	58.9	68.2	-10.22	34.78	9.81	45.51	145	285	Peak
5530	94.03	94.88	/	/	34.84	9.81	45.5	145	285	Peak
5530	87.96	88.81	/	/	34.84	9.81	45.5	145	285	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.78	54.88	74	-20.22	34.6	9.81	45.51	100	145	Peak
5460	47.28	48.38	54	-6.72	34.6	9.81	45.51	100	145	Average
5470	54.06	55.16	68.2	-14.14	34.6	9.81	45.51	100	145	Peak
5530	84.61	85.66	/	/	34.64	9.81	45.5	100	145	Peak
5530	79.03	80.08	/	/	34.64	9.81	45.5	100	145	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5530MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 122	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5610	94.56	95.29	/	/	34.93	9.84	45.5	145	285	Peak
5610	88.75	89.48	/	/	34.93	9.84	45.5	145	285	Average
5725	54.39	54.94	68.2	-13.81	35.07	9.88	45.5	145	285	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5610	86.58	87.51	/	/	34.73	9.84	45.5	100	145	Peak
5610	80.38	81.31	/	/	34.73	9.84	45.5	100	145	Average
5725	53.77	54.52	68.2	-14.43	34.87	9.88	45.5	100	145	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5610MHz: Fundamental frequency.
- #: Out of restricted band.

CHANNEL	TX Channel 138	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.69	53.61	68.2	-15.51	34.78	9.81	45.51	100	285	Peak
5690	93.06	93.67	/	/	35.03	9.86	45.5	100	285	Peak
5690	88.97	89.58	/	/	35.03	9.86	45.5	100	285	Average
5850	56.94	57.3	68.2	-11.26	35.22	9.92	45.5	100	285	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	54.1	55.2	68.2	-14.1	34.6	9.81	45.51	100	142	Peak
5690	86.82	87.63	/	/	34.83	9.86	45.5	100	142	Peak
5690	81.95	82.76	/	/	34.83	9.86	45.5	100	142	Average
5850	54.19	54.75	68.2	-14.01	35.02	9.92	45.5	100	142	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5690MHz: Fundamental frequency.
3. #: Out of restricted band.




802.11ac (80MHz)

Worst case harmonic:

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11064.000	49.26	42.11	74.00	-24.74	7.15	Peak	Horizontal
2	11064.000	42.62	35.47	54.00	-11.38	7.15	Average	Horizontal
3	PK16590.000	54.77	38.74	74.00	-19.23	16.03	Peak	Horizontal
4	PP16590.000	44.19	28.16	54.00	-9.81	16.03	Average	Horizontal

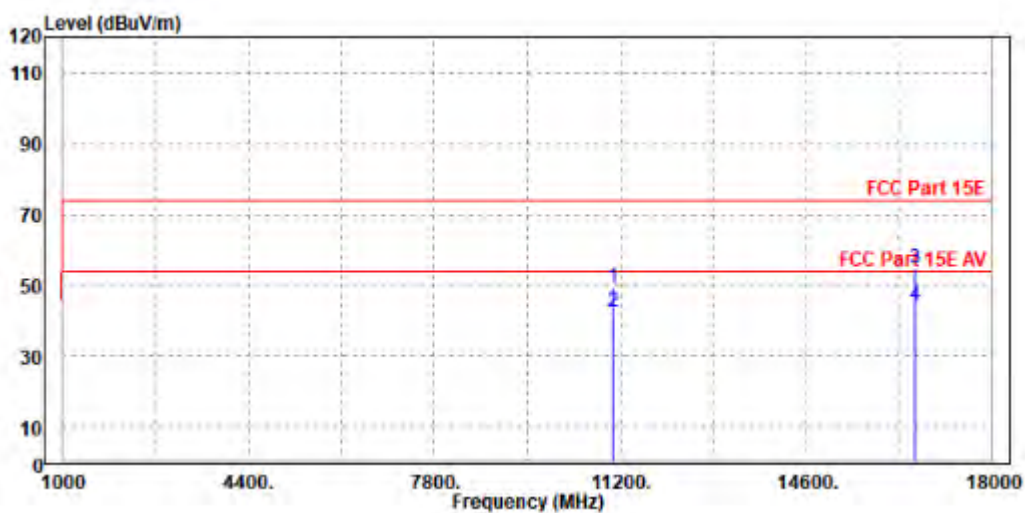

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11060.000	50.67	43.12	74.00	-23.33	7.55	Peak	Vertical
2	11060.000	42.41	34.86	54.00	-11.59	7.55	Average	Vertical
3	PK16589.000	53.18	39.04	74.00	-20.82	14.14	Peak	Vertical
4	PP16589.000	47.89	33.75	54.00	-6.11	14.14	Average	Vertical

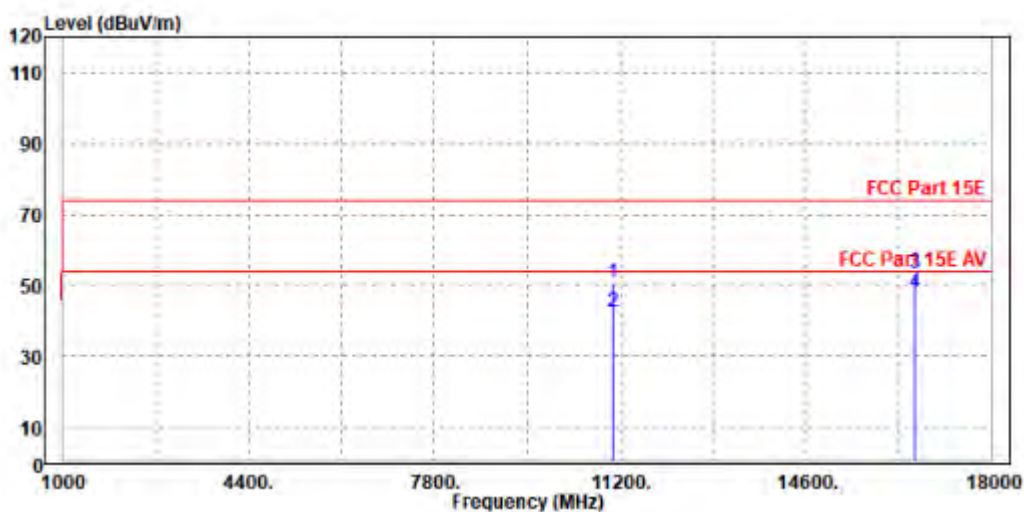

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5530MHz: Fundamental frequency.
3. #: Out of restricted band.

Band 4:

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	103.82	104.35	/	/	35.09	9.88	45.5	100	275	Peak
5745	97.18	97.71	/	/	35.09	9.88	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	97.41	98.14	/	/	34.89	9.88	45.5	100	135	Peak
5745	94.22	94.95	/	/	34.89	9.88	45.5	100	135	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5745MHz: Fundamental frequency.




Oobe Data

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5622.2	55.09	55.8	68.2	-13.11	34.95	9.84	45.5	200	0	Peak
5979.4	55.13	55.29	68.2	-13.07	35.38	9.96	45.5	200	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5598.45	55.12	56.07	68.2	-13.08	34.72	9.83	45.5	100	360	Peak
5988.425	54.94	55.28	68.2	-13.26	35.19	9.97	45.5	100	360	Peak

CH 149

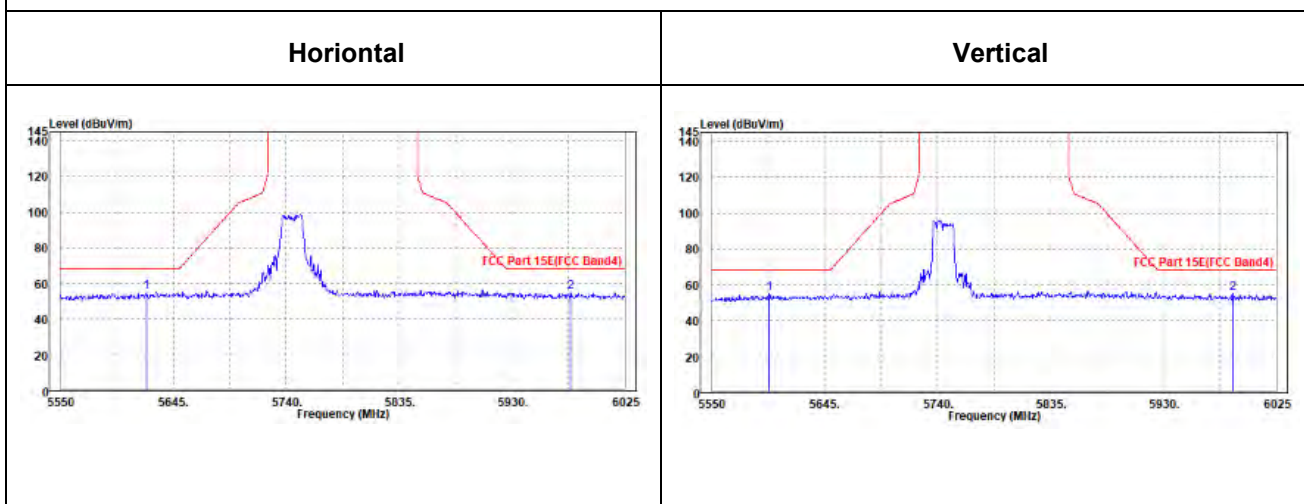



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	103.22	103.68	/	/	35.14	9.9	45.5	100	275	Peak
5785	96.49	96.95	/	/	35.14	9.9	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	98.35	99.01	/	/	34.94	9.9	45.5	100	135	Peak
5785	91.18	91.84	/	/	34.94	9.9	45.5	100	135	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5785MHz: Fundamental frequency.



**BUREAU
VERITAS**


Test Report No.: W7L-P24010017RF03

Oobe Data

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5587.05	55.64	56.41	68.2	-12.56	34.9	9.83	45.5	200	360	Peak
5971.325	54.92	55.09	68.2	-13.28	35.37	9.96	45.5	200	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5635.025	56.48	57.37	68.2	-11.72	34.76	9.85	45.5	100	0	Peak
5930.475	56.37	56.8	68.2	-11.83	35.12	9.95	45.5	100	0	Peak

CH 157

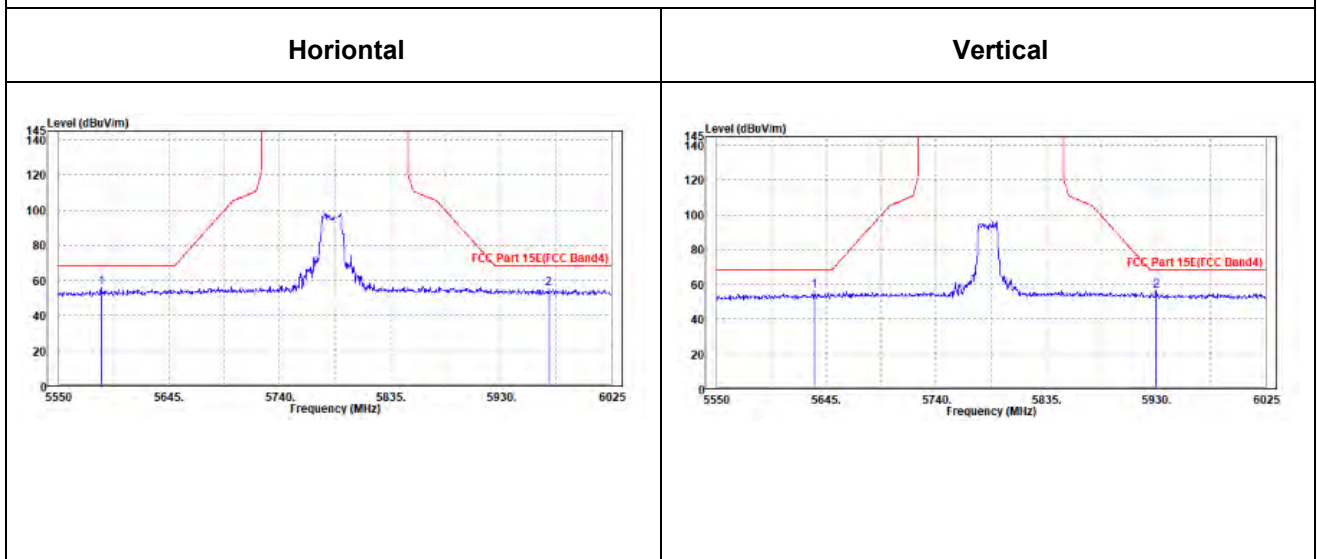



**BUREAU
VERITAS**

Test Report No.: W7L-P24010017RF03

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	103.15	103.55	/	/	35.19	9.91	45.5	100	275	Peak
5825	95.69	96.09	/	/	35.19	9.91	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	97.35	97.95	/	/	34.99	9.91	45.5	100	135	Peak
5825	90.84	91.44	/	/	34.99	9.91	45.5	100	135	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5825MHz: Fundamental frequency.




OOBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5601.3	54.1	54.85	68.2	-14.1	34.92	9.83	45.5	100	0	Peak
5969.9	54.71	54.89	68.2	-13.49	35.36	9.96	45.5	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5626.95	54.9	55.81	68.2	-13.3	34.75	9.84	45.5	100	360	Peak
5979.4	55.48	55.84	68.2	-12.72	35.18	9.96	45.5	100	360	Peak

CH 165

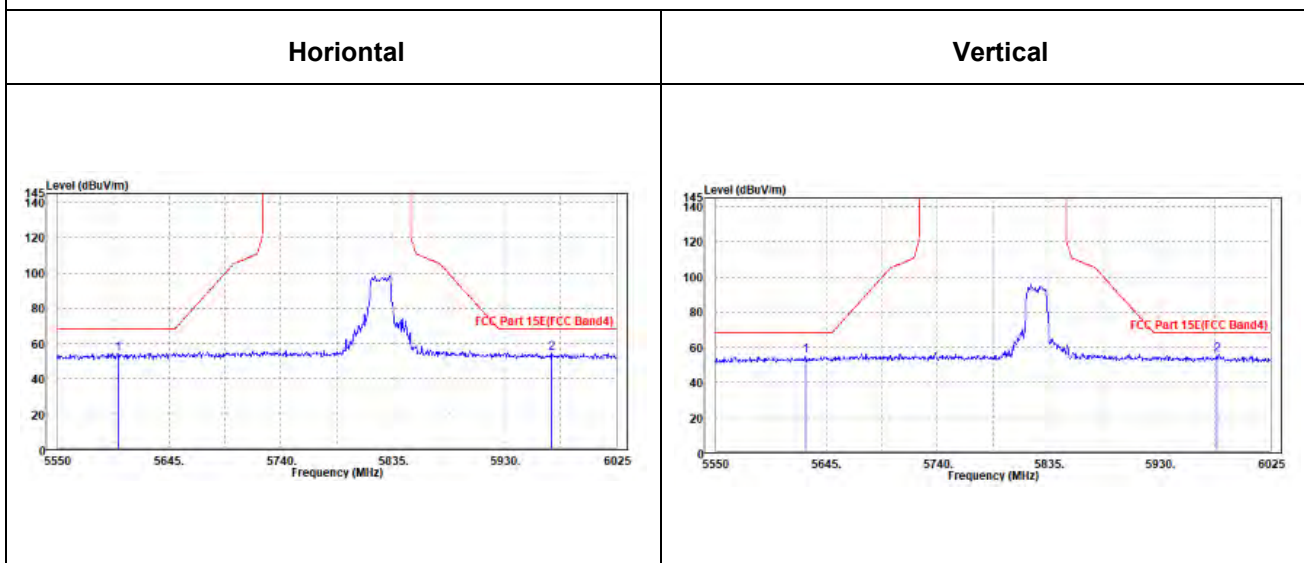



802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	103.72	104.25	/	/	35.09	9.88	45.5	100	275	Peak
5745	96.55	97.08	/	/	35.09	9.88	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	98.07	98.8	/	/	34.89	9.88	45.5	100	135	Peak
5745	90.92	91.65	/	/	34.89	9.88	45.5	100	135	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5745MHz: Fundamental frequency.




OOBE DATA

802.11n (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5620.3	54.78	55.5	68.2	-13.42	34.94	9.84	45.5	200	360	Peak
5941.4	55.05	55.27	68.2	-13.15	35.33	9.95	45.5	200	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5606.525	54.95	55.88	68.2	-13.25	34.73	9.84	45.5	100	0	Peak
5940.45	54.96	55.38	68.2	-13.24	35.13	9.95	45.5	100	0	Peak

CH 149

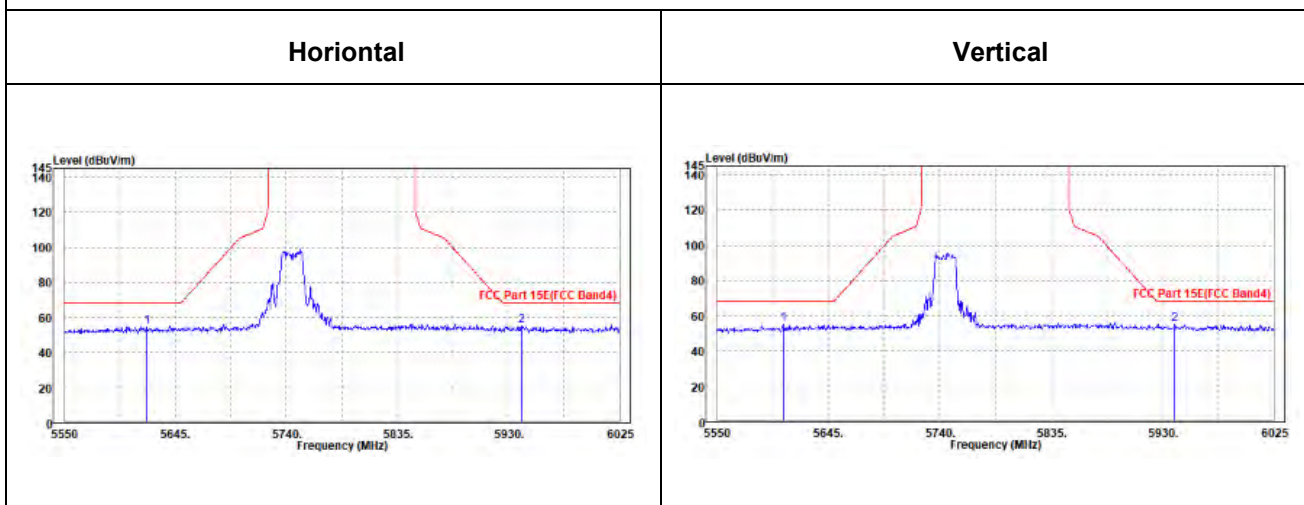



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	103.9	104.36	/	/	35.14	9.9	45.5	100	275	Peak
5785	95.87	96.33	/	/	35.14	9.9	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	98.98	99.64	/	/	34.94	9.9	45.5	100	135	Peak
5785	90.84	91.5	/	/	34.94	9.9	45.5	100	135	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5785MHz: Fundamental frequency.




OOBE DATA

802.11n (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5583.25	54.02	54.79	68.2	-14.18	34.9	9.83	45.5	100	0	Peak
5960.4	55.39	55.58	68.2	-12.81	35.35	9.96	45.5	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5637.4	54.19	55.08	68.2	-14.01	34.76	9.85	45.5	100	360	Peak
6005.525	55.03	55.35	68.2	-13.17	35.21	9.97	45.5	100	360	Peak

CH 157

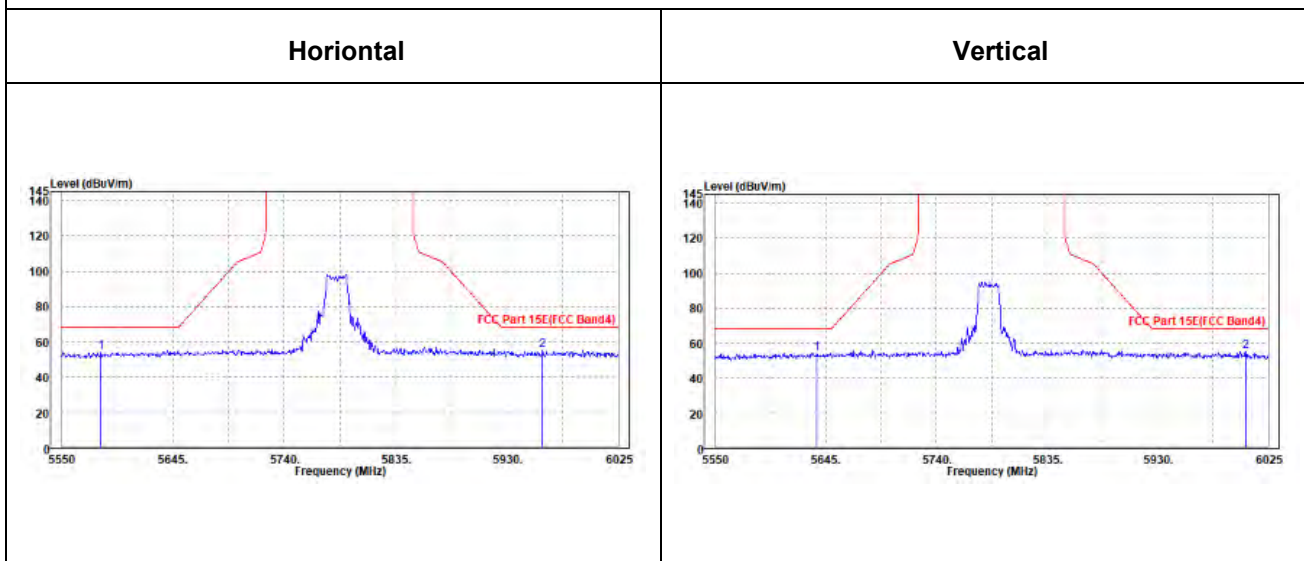



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	104.05	104.45	/	/	35.19	9.91	45.5	100	275	Peak
5825	95.57	95.97	/	/	35.19	9.91	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	97.99	98.59	/	/	34.99	9.91	45.5	100	135	Peak
5825	90.02	90.62	/	/	34.99	9.91	45.5	100	135	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5825MHz: Fundamental frequency.




OOBE DATA

802.11n (20MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5623.15	55.21	55.92	68.2	-12.99	34.95	9.84	45.5	100	360	Peak
5932.375	55.5	55.73	68.2	-12.7	35.32	9.95	45.5	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5623.625	54.61	55.52	68.2	-13.59	34.75	9.84	45.5	100	0	Peak
6000.3	54.35	54.68	68.2	-13.85	35.2	9.97	45.5	100	0	Peak

CH 165

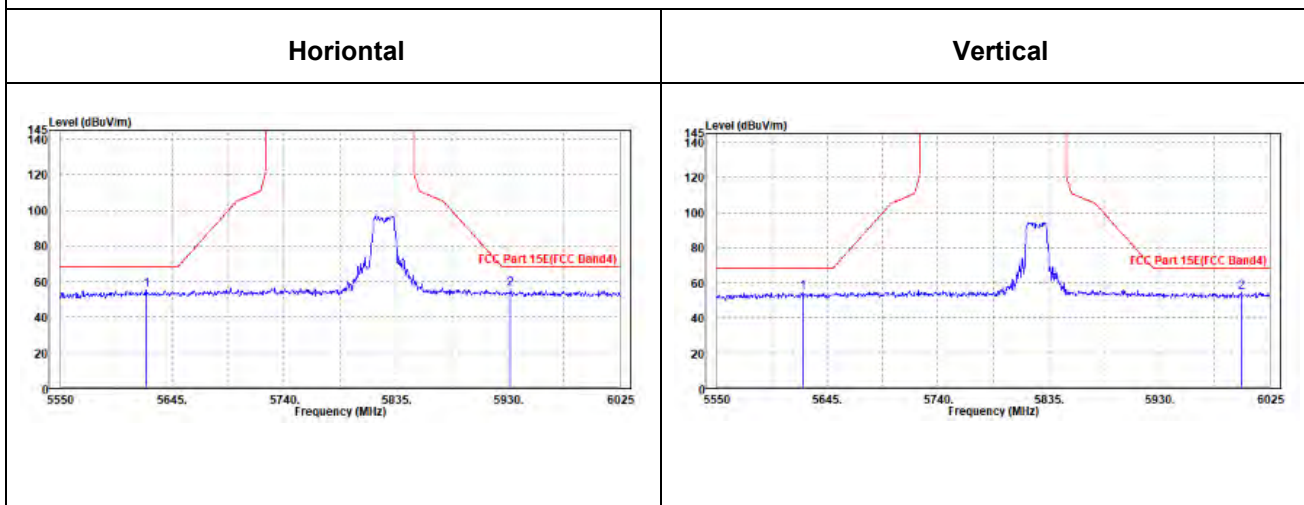



802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	98.41	98.91	/	/	35.11	9.89	45.5	100	275	Peak
5755	92.62	93.12	/	/	35.11	9.89	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	92.9	93.6	/	/	34.91	9.89	45.5	100	135	Peak
5755	87.28	87.98	/	/	34.91	9.89	45.5	100	135	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5755MHz: Fundamental frequency.




OOBE DATA

802.11n (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5564.725	53.94	54.74	68.2	-14.26	34.88	9.82	45.5	200	0	Peak
5977.5	55.13	55.3	68.2	-13.07	35.37	9.96	45.5	200	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5612.7	54.1	55.02	68.2	-14.1	34.74	9.84	45.5	100	360	Peak
5959.925	54.79	55.18	68.2	-13.41	35.15	9.96	45.5	100	360	Peak

CH 151

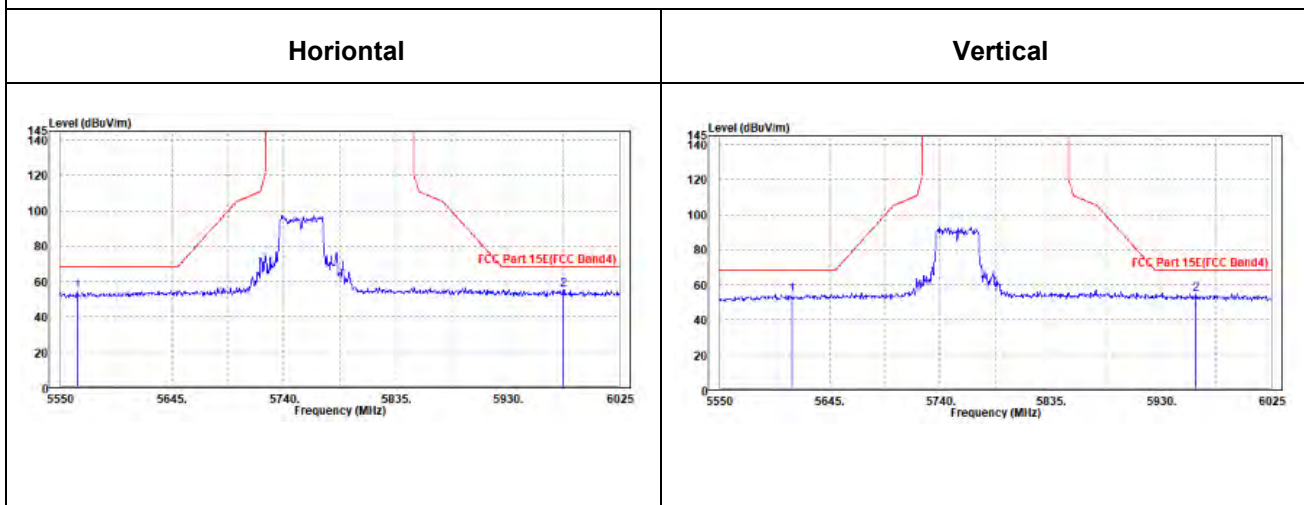



CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	99.14	99.59	/	/	35.15	9.9	45.5	100	275	Peak
5795	92.45	92.9	/	/	35.15	9.9	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	94.13	94.78	/	/	34.95	9.9	45.5	100	135	Peak
5795	87.22	87.87	/	/	34.95	9.9	45.5	100	135	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5795MHz: Fundamental frequency.




OOBE DATA

802.11n (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5636.925	55.11	55.8	68.2	-13.09	34.96	9.85	45.5	200	360	Peak
6010.75	55.91	56.03	68.2	-12.29	35.4	9.98	45.5	200	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5634.55	54.67	55.56	68.2	-13.53	34.76	9.85	45.5	100	0	Peak
5960.4	54.69	55.08	68.2	-13.51	35.15	9.96	45.5	100	0	Peak

CH 159

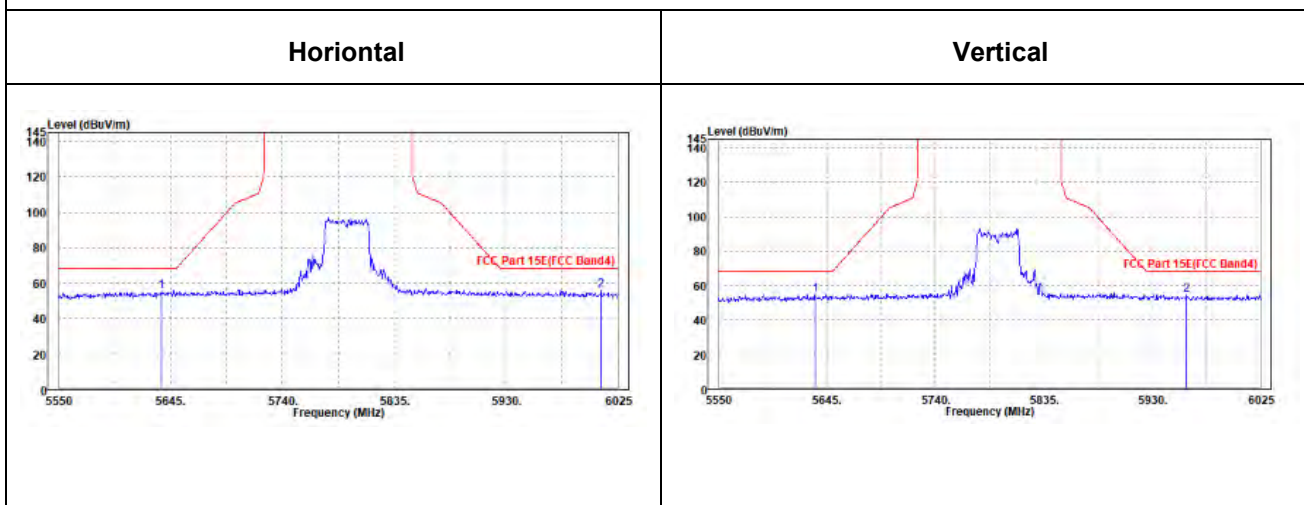



802.11ac (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	103.44	103.97	/	/	35.09	9.88	45.5	100	275	Peak
5745	96.11	96.64	/	/	35.09	9.88	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	97.83	98.56	/	/	34.89	9.88	45.5	100	135	Peak
5745	90.86	91.59	/	/	34.89	9.88	45.5	100	135	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5745MHz: Fundamental frequency.




Oobe Data

802.11ac (20MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5628.85	54.46	55.17	68.2	-13.74	34.95	9.84	45.5	100	0	Peak
5969.425	54.83	55.01	68.2	-13.37	35.36	9.96	45.5	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5616.975	54.47	55.39	68.2	-13.73	34.74	9.84	45.5	100	360	Peak
5983.2	55.02	55.38	68.2	-13.18	35.18	9.96	45.5	100	360	Peak

CH 149

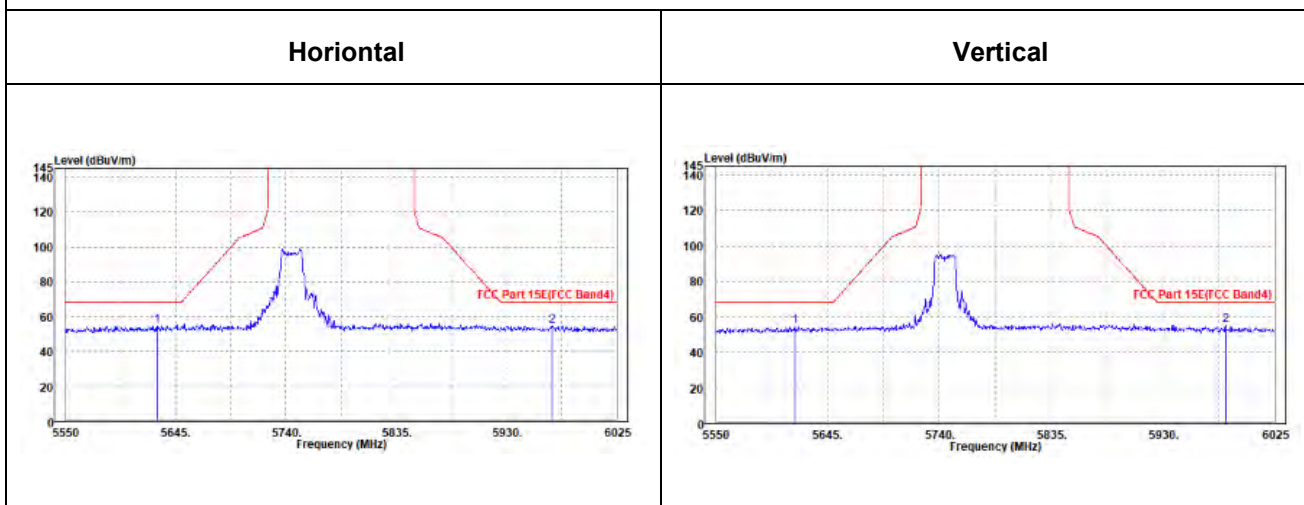



**BUREAU
VERITAS**

Test Report No.: W7L-P24010017RF03

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	104.62	105.08	/	/	35.14	9.9	45.5	100	275	Peak
5785	96.61	97.07	/	/	35.14	9.9	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	97.52	98.18	/	/	34.94	9.9	45.5	100	275	Peak
5785	89.32	89.98	/	/	34.94	9.9	45.5	100	275	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5785MHz: Fundamental frequency.




OOBE DATA

802.11ac (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5578.5	55.68	56.46	68.2	-12.52	34.89	9.83	45.5	100	360	Peak
5971.325	55.94	56.11	68.2	-12.26	35.37	9.96	45.5	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5585.15	55.39	56.36	68.2	-12.81	34.7	9.83	45.5	100	0	Peak
5961.825	54.85	55.24	68.2	-13.35	35.15	9.96	45.5	100	0	Peak

CH 157

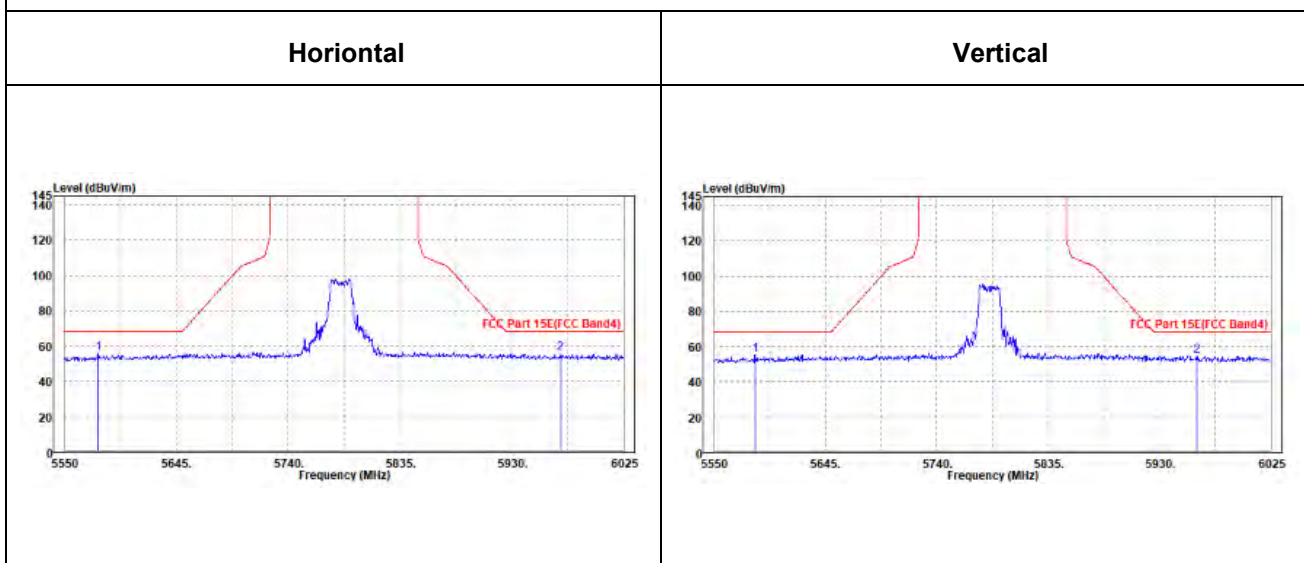



**BUREAU
VERITAS**

Test Report No.: W7L-P24010017RF03

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	103.78	104.18	/	/	35.19	9.91	45.5	100	275	Peak
5825	95.7	96.1	/	/	35.19	9.91	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	98.93	99.53	/	/	34.99	9.91	45.5	100	135	Peak
5825	88.87	89.47	/	/	34.99	9.91	45.5	100	135	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5825MHz: Fundamental frequency.




OOBE DATA

802.11ac (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5620.3	55.27	55.99	68.2	-12.93	34.94	9.84	45.5	100	0	Peak
5972.275	55.26	55.43	68.2	-12.94	35.37	9.96	45.5	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5601.775	54.82	55.77	68.2	-13.38	34.72	9.83	45.5	100	360	Peak
5974.175	54.73	55.1	68.2	-13.47	35.17	9.96	45.5	100	360	Peak

CH 165

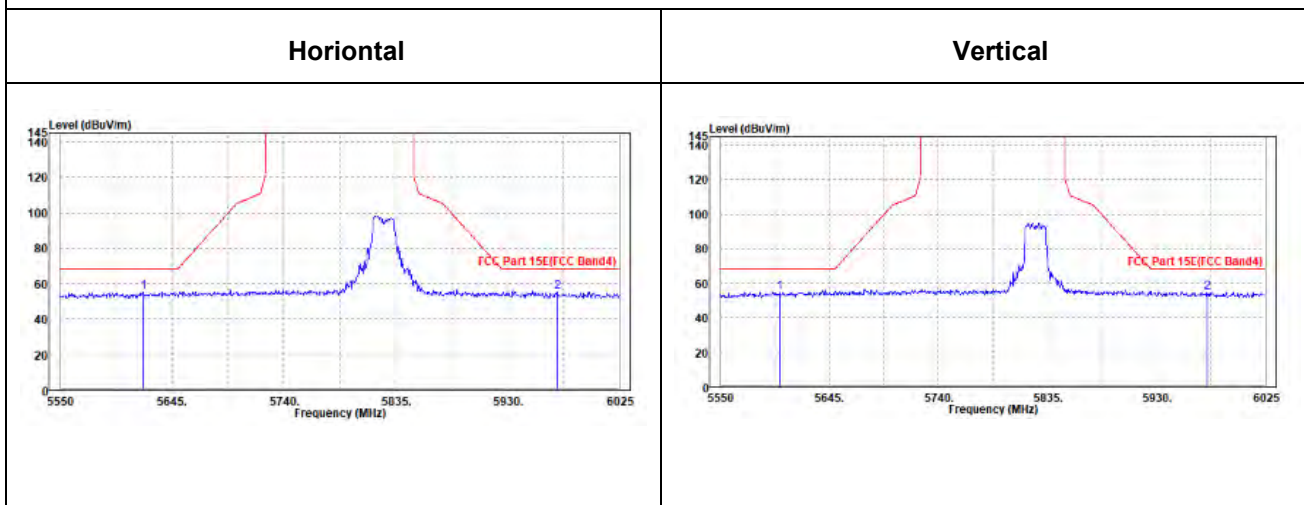



802.11ac (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	100.16	100.66	/	/	35.11	9.89	45.5	100	275	Peak
5755	92.33	92.83	/	/	35.11	9.89	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	93.73	94.43	/	/	34.91	9.89	45.5	100	135	Peak
5755	86.42	87.12	/	/	34.91	9.89	45.5	100	135	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5755MHz: Fundamental frequency.




Oobe Data

802.11ac (40MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5569.475	56.05	56.85	68.2	-12.15	34.88	9.82	45.5	100	360	Peak
5975.6	56.04	56.21	68.2	-12.16	35.37	9.96	45.5	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5611.75	55.32	56.25	68.2	-12.88	34.73	9.84	45.5	100	0	Peak
5974.175	54.43	54.8	68.2	-13.77	35.17	9.96	45.5	100	0	Peak

CH 151

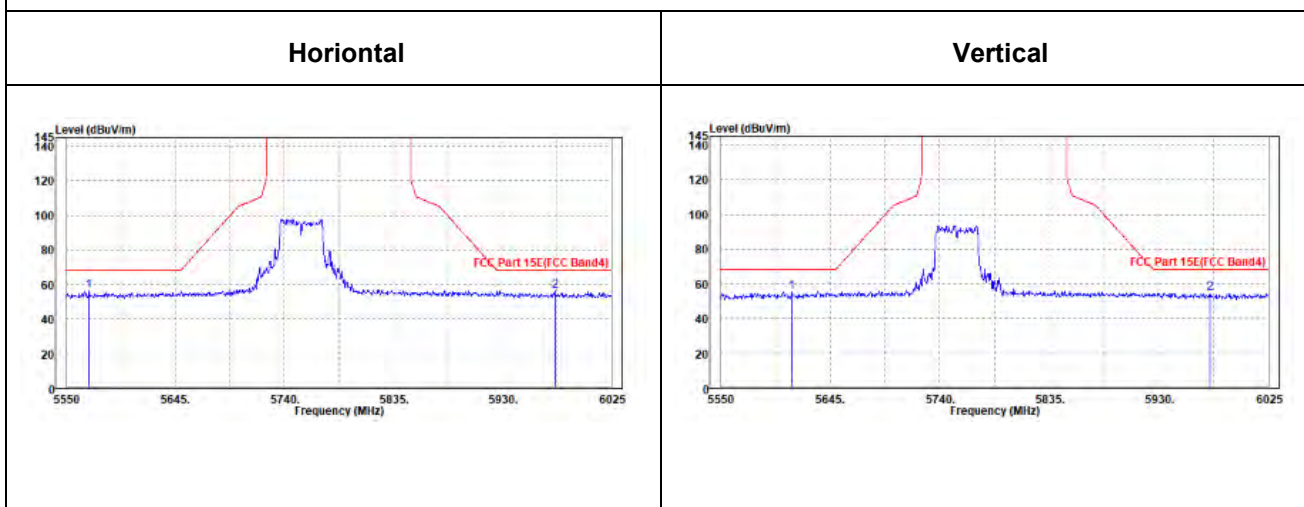



**BUREAU
VERITAS**

Test Report No.: W7L-P24010017RF03

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	98.75	99.2	/	/	35.15	9.9	45.5	100	275	Peak
5795	92.36	92.81	/	/	35.15	9.9	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	93.22	93.87	/	/	34.95	9.9	45.5	100	135	Peak
5795	86.93	87.58	/	/	34.95	9.9	45.5	100	135	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5795MHz: Fundamental frequency.




OOBE DATA

802.11ac (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5594.175	54.93	55.69	68.2	-13.27	34.91	9.83	45.5	100	0	Peak
6008.85	56.02	56.14	68.2	-12.18	35.4	9.98	45.5	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5637.4	55.33	56.22	68.2	-12.87	34.76	9.85	45.5	100	360	Peak
5979.4	55.28	55.64	68.2	-12.92	35.18	9.96	45.5	100	360	Peak

CH 159

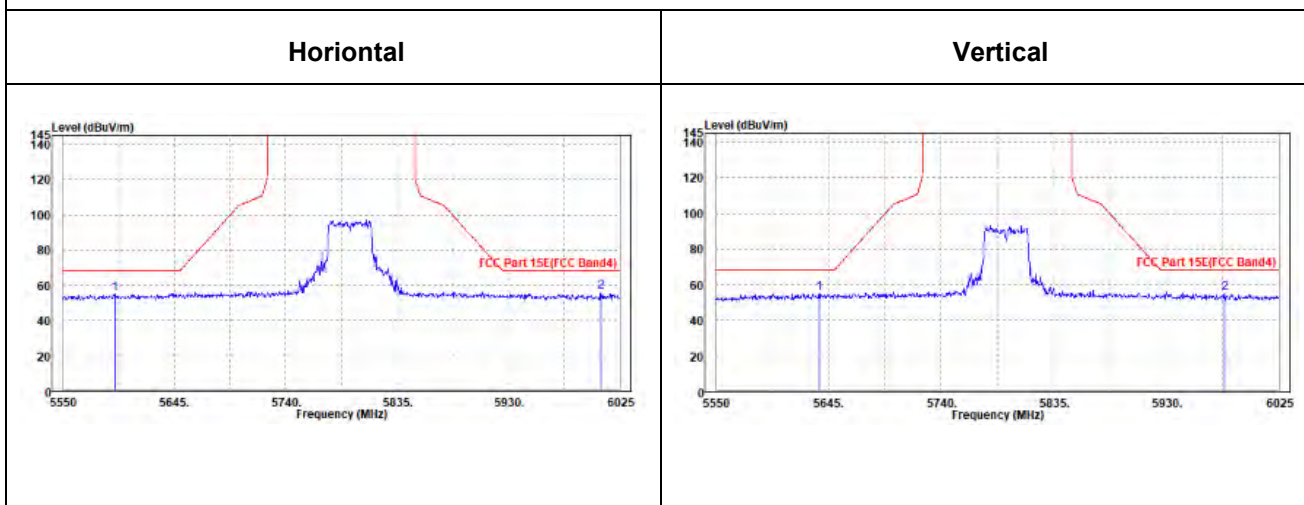



802.11ac (80MHz)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	94.7	95.18	/	/	35.13	9.89	45.5	100	275	Peak
5775	88.18	88.66	/	/	35.13	9.89	45.5	100	275	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	88.78	89.46	/	/	34.93	9.89	45.5	100	135	Peak
5775	81.85	82.53	/	/	34.93	9.89	45.5	100	135	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5775MHz: Fundamental frequency.




OOBE DATA

802.11ac (80MHZ)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5588	55.19	55.95	68.2	-13.01	34.91	9.83	45.5	100	360	Peak
5991.75	55.81	55.95	68.2	-12.39	35.39	9.97	45.5	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5626	55.43	56.34	68.2	-12.77	34.75	9.84	45.5	100	0	Peak
5975.125	54.58	54.95	68.2	-13.62	35.17	9.96	45.5	100	0	Peak

CH 155

Horizontal

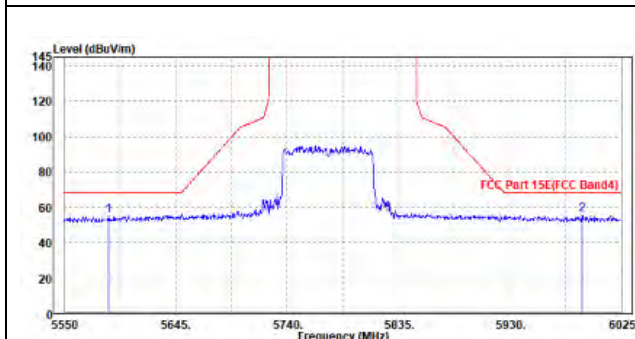

Vertical

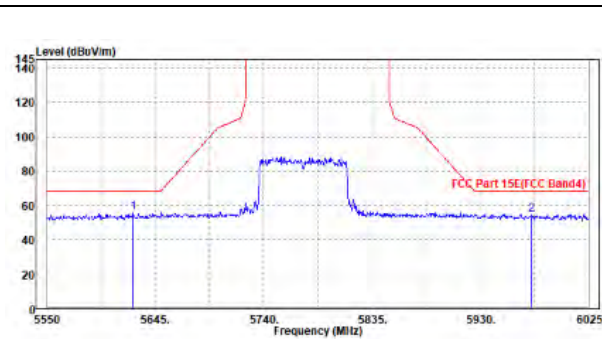




802.11a

Worst case harmonic:

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11574.000	48.89	39.60	74.00	-25.11	9.29	Peak	Horizontal
2	11574.000	43.24	33.95	54.00	-10.76	9.29	Average	Horizontal
3	PK17355.000	57.32	39.02	74.00	-16.68	18.30	Peak	Horizontal
4	PP17355.000	50.76	32.46	54.00	-3.24	18.30	Average	Horizontal

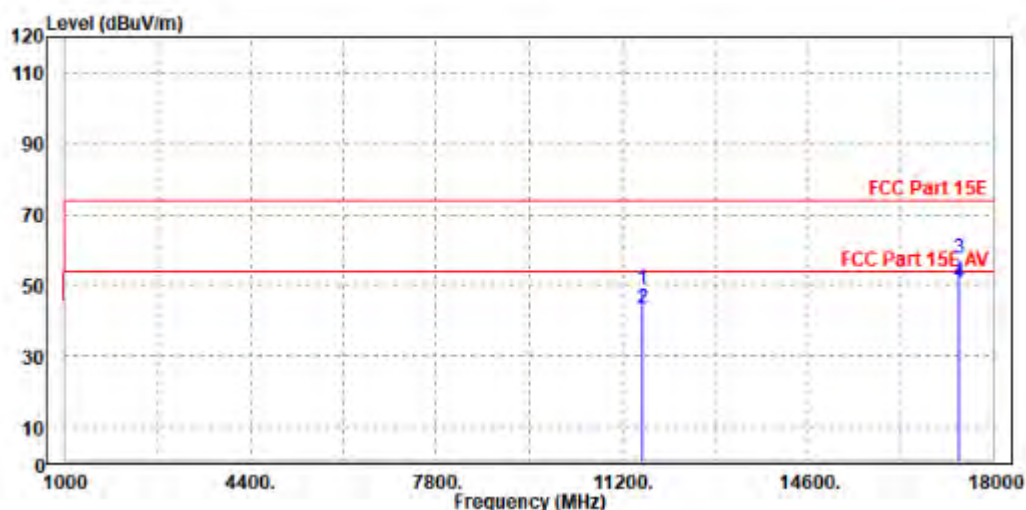

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11570.000	50.27	40.48	74.00	-23.73	9.79	Peak	Vertical
2	11570.000	43.63	33.84	54.00	-10.37	9.79	Average	Vertical
3	PK17354.000	56.22	39.15	74.00	-17.78	17.07	Peak	Vertical
4	PP17354.000	49.26	32.19	54.00	-4.74	17.07	Average	Vertical

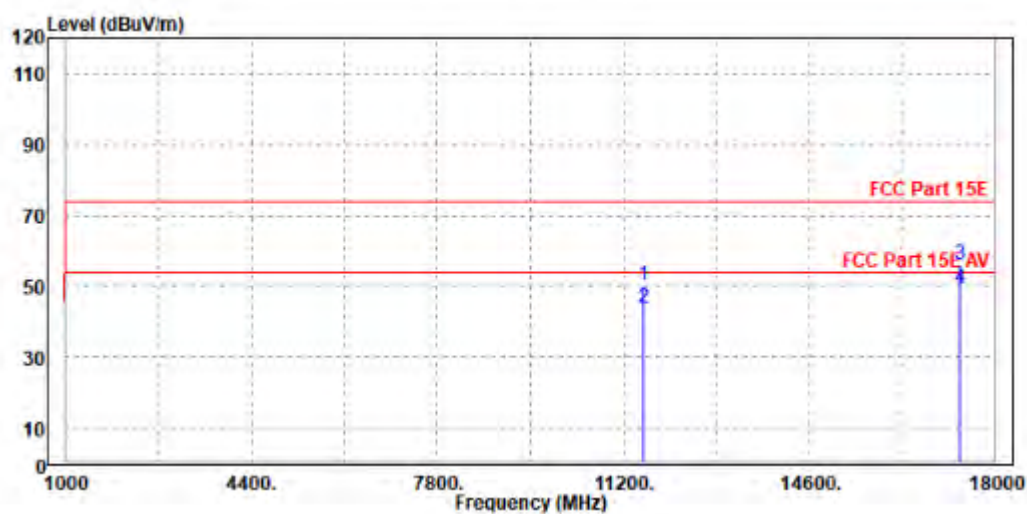

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.