




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: (20+100) MHz

MODE	TX channel 18900/633332	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,742.000	-26.68	-13.00	13.68	31.45	H	176.7	2.00
4	5,613.000	-37.24	-13.00	24.24	35.00	H	78.4	2.00
5	7,590.000	-40.97	-13.00	27.97	32.44	H	120.2	2.00
6	11,385.000	-52.42	-13.00	39.42	19.37	H	359.1	1.00

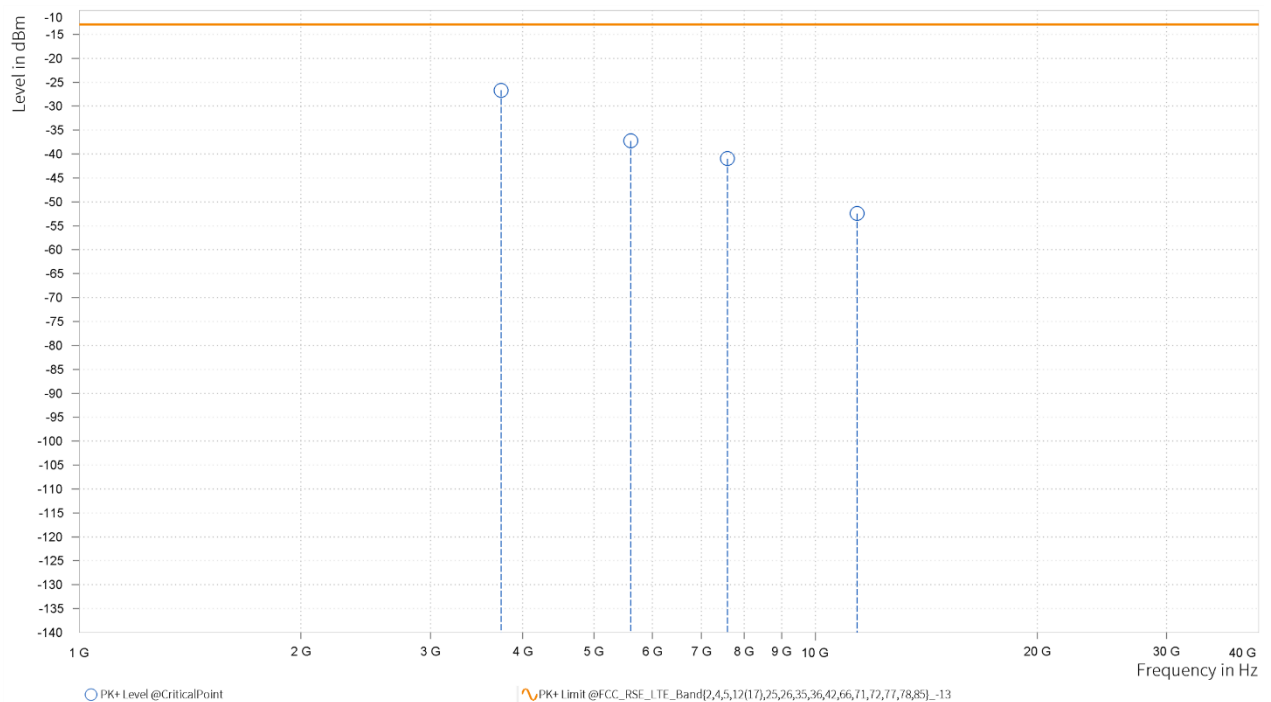




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 18900/633332	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,742.000	-38.28	-13.00	25.28	32.10	V	236.2	1.00
4	5,613.000	-36.72	-13.00	23.72	35.45	V	236.2	1.00
5	7,590.000	-41.54	-13.00	28.54	32.22	V	338.9	1.00
6	11,385.000	-53.59	-13.00	40.59	19.43	V	66.4	2.00

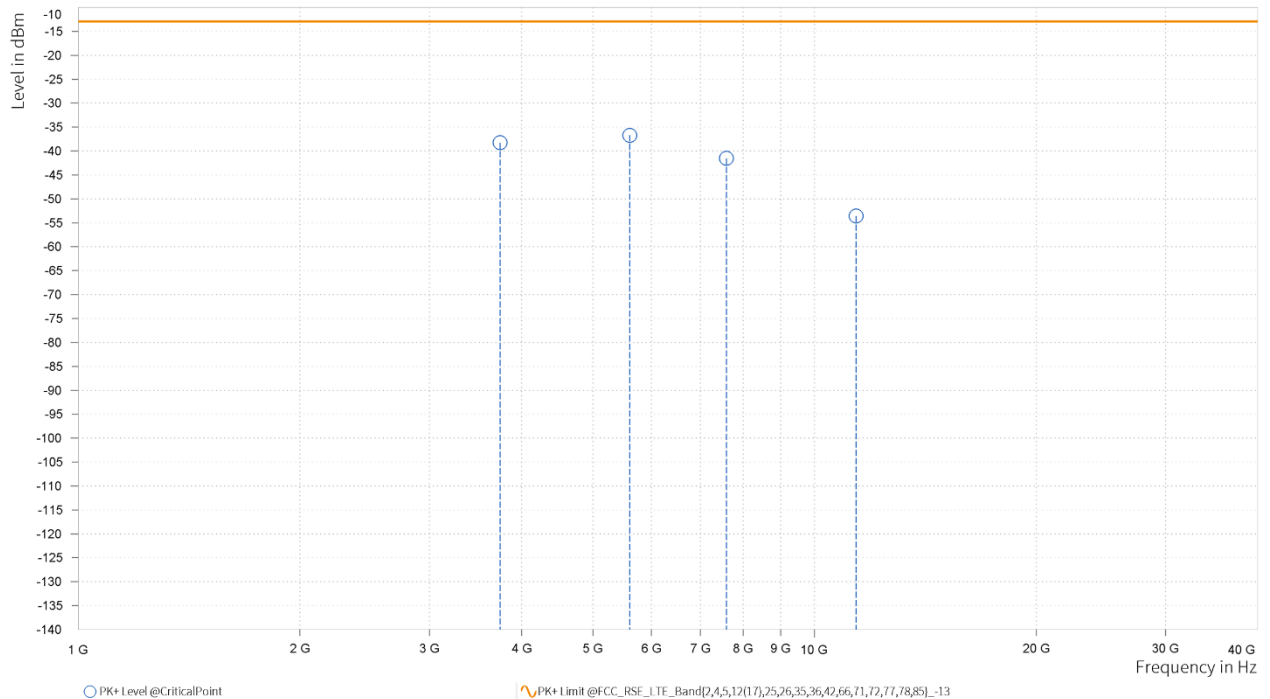




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: (20+100) MHz

MODE	TX channel 19100/633332	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,782.000	-26.83	-13.00	13.83	32.25	H	178.2	2.00
4	5,673.000	-38.58	-13.00	25.58	35.26	H	194.5	1.00
5	7,770.000	-41.02	-13.00	28.02	32.95	H	359	2.00
6	11,655.000	-51.82	-13.00	38.82	20.11	H	1	2.00

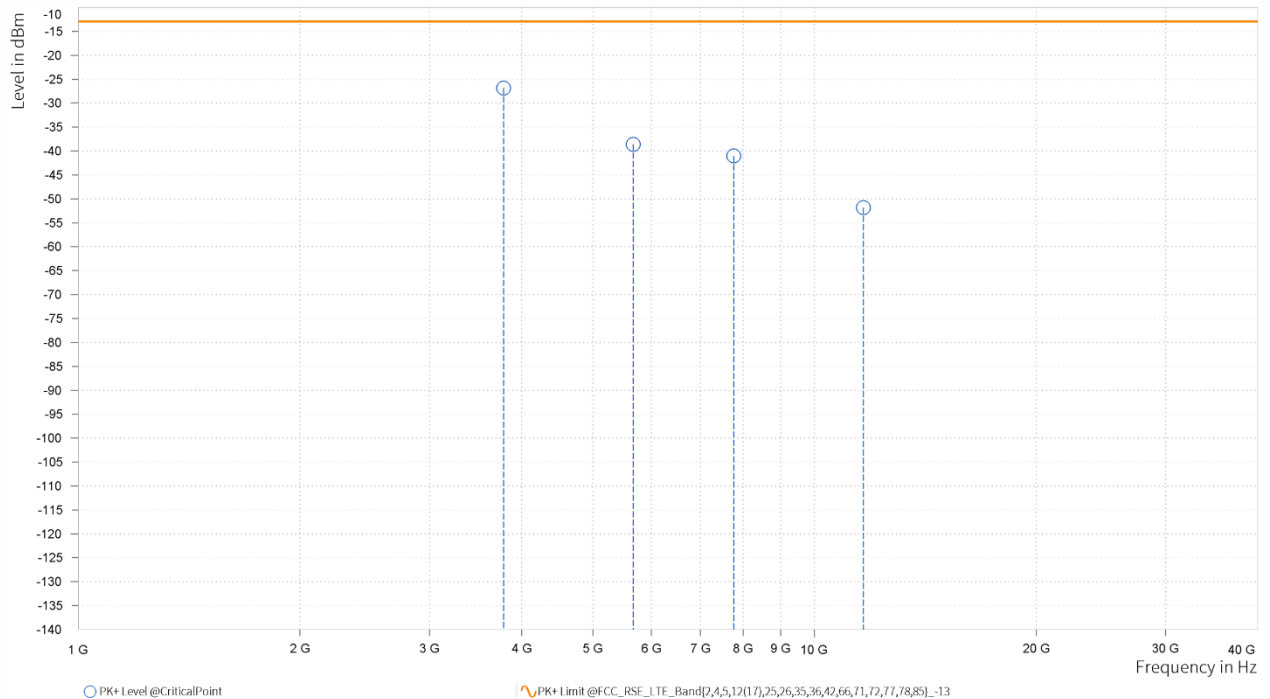




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

VERIFAC			
MODE	TX channel 19100/633332	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,782.000	-38.99	-13.00	25.99	32.46	V	125.2	2.00
4	5,673.000	-38.75	-13.00	25.75	35.65	V	149.2	1.00
5	7,770.000	-41.41	-13.00	28.41	32.72	V	67.1	2.00
6	11,655.000	-50.34	-13.00	37.34	20.42	V	351.4	1.00

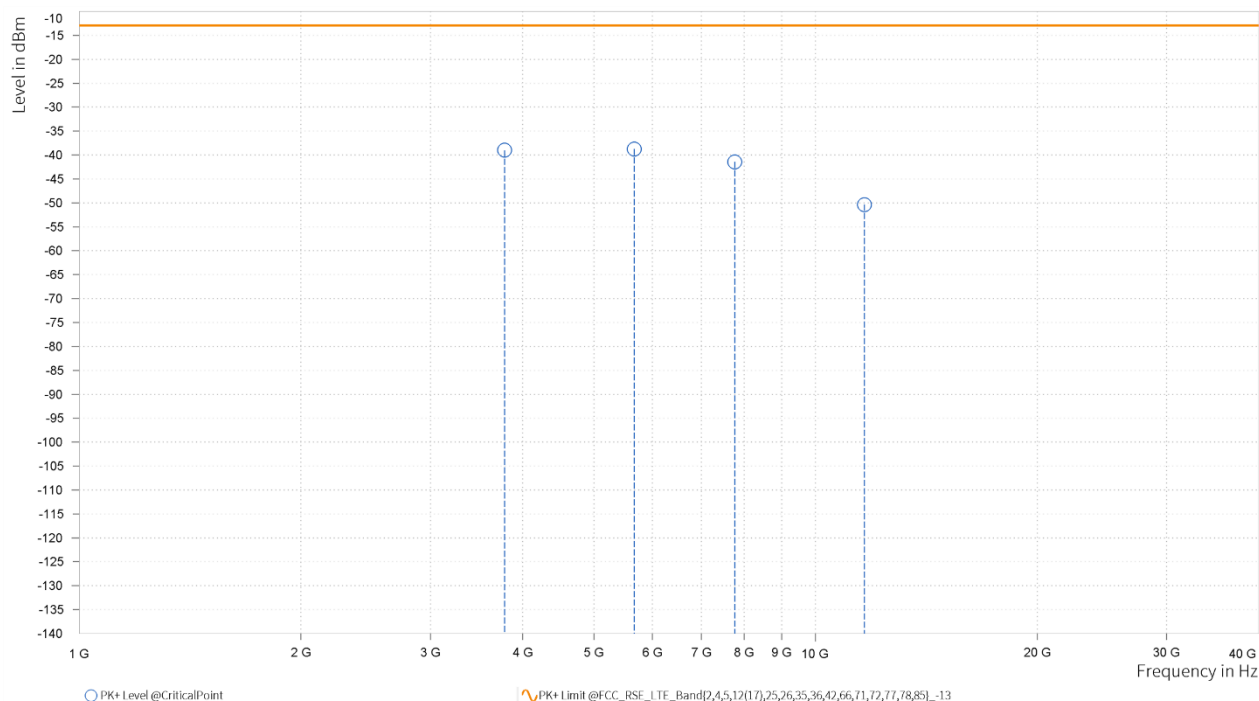




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

DC_5A_N2A

CHANNEL BANDWIDTH: (10+20) MHz

MODE	TX channel 20450/372000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,649.000	-43.86	-13.00	30.86	24.43	H	1	1.00
3	2,473.500	-49.90	-13.00	36.90	20.30	H	359	2.00
4	3,702.000	-49.90	-13.00	36.90	21.12	H	1	1.00
4	5,553.000	-49.84	-13.00	36.84	24.26	H	18.2	2.00

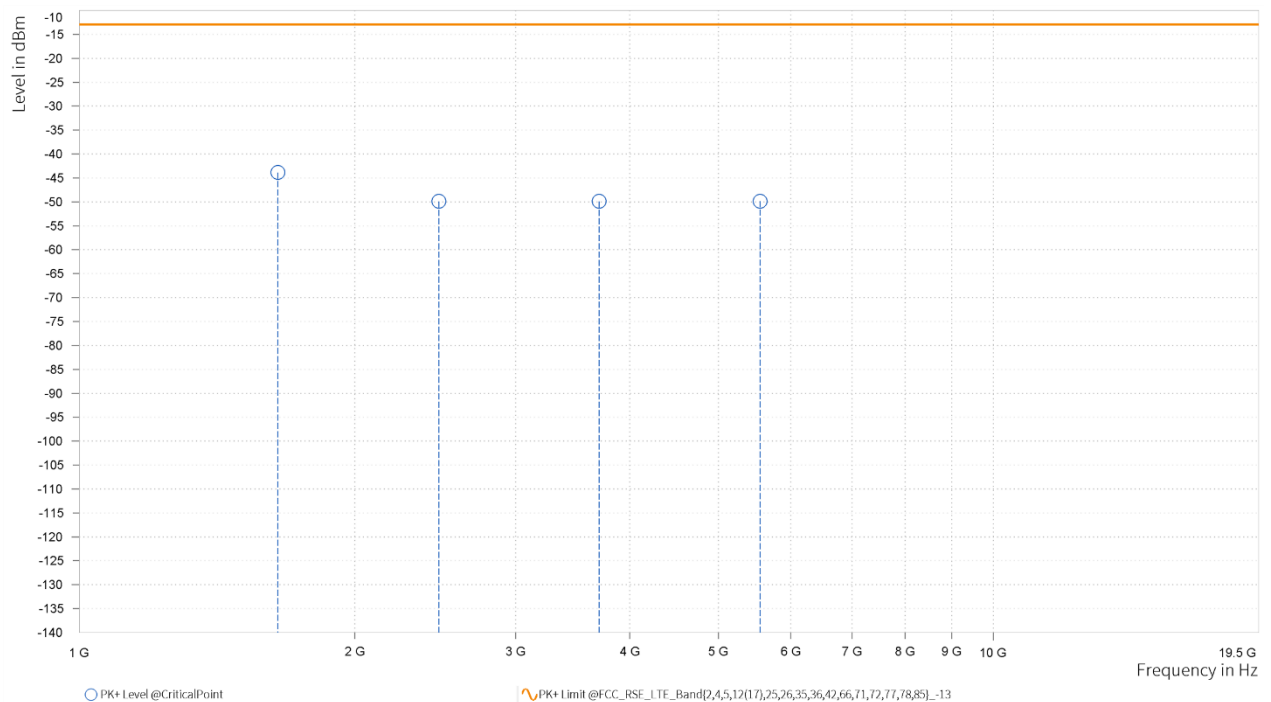

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province


Tel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 20450/372000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,649.000	-44.42	-13.00	31.42	23.98	V	359	2.00
3	2,473.500	-50.01	-13.00	37.01	20.55	V	1	2.00
4	3,702.000	-49.97	-13.00	36.97	21.72	V	353.2	1.00
4	5,553.000	-48.00	-13.00	35.00	24.96	V	303.4	1.00

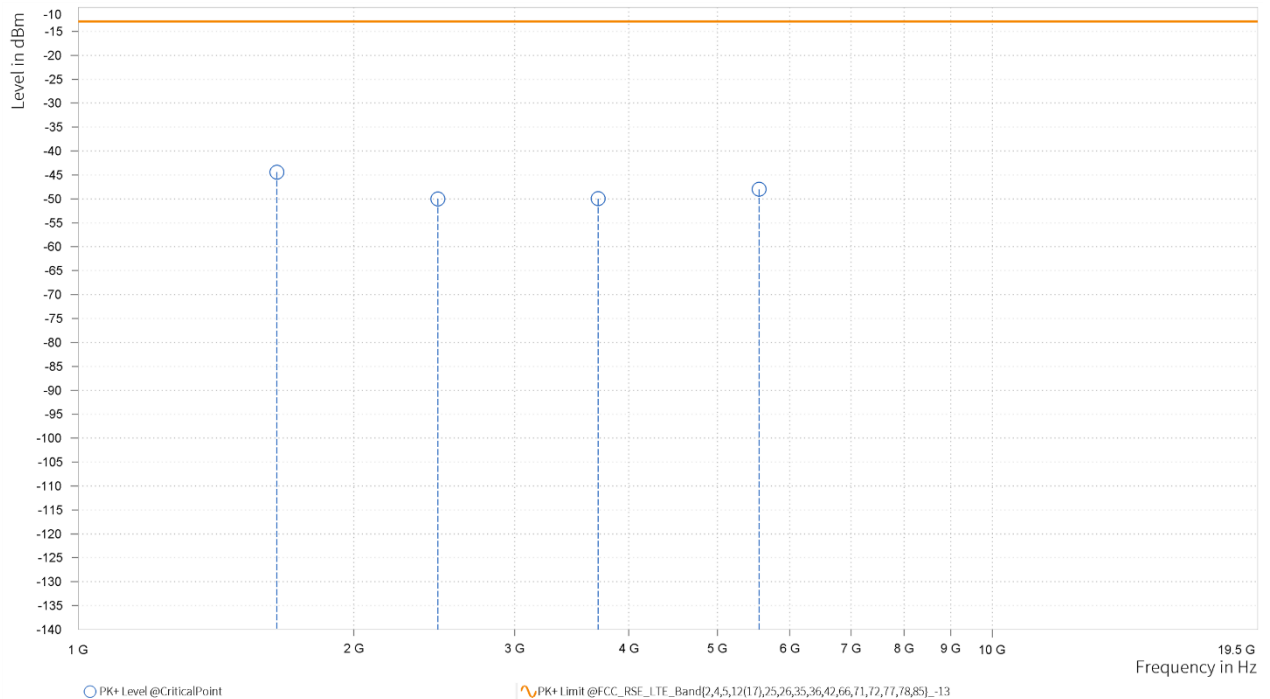




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: (10+20) MHz

MODE	TX channel 20525/376000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.500	-40.71	-13.00	27.71	25.00	H	326.9	1.00
3	2,496.000	-48.23	-13.00	35.23	20.76	H	228.5	1.00
4	3,742.000	-50.65	-13.00	37.65	21.35	H	173.9	2.00
4	5,613.000	-49.16	-13.00	36.16	24.60	H	1	2.00

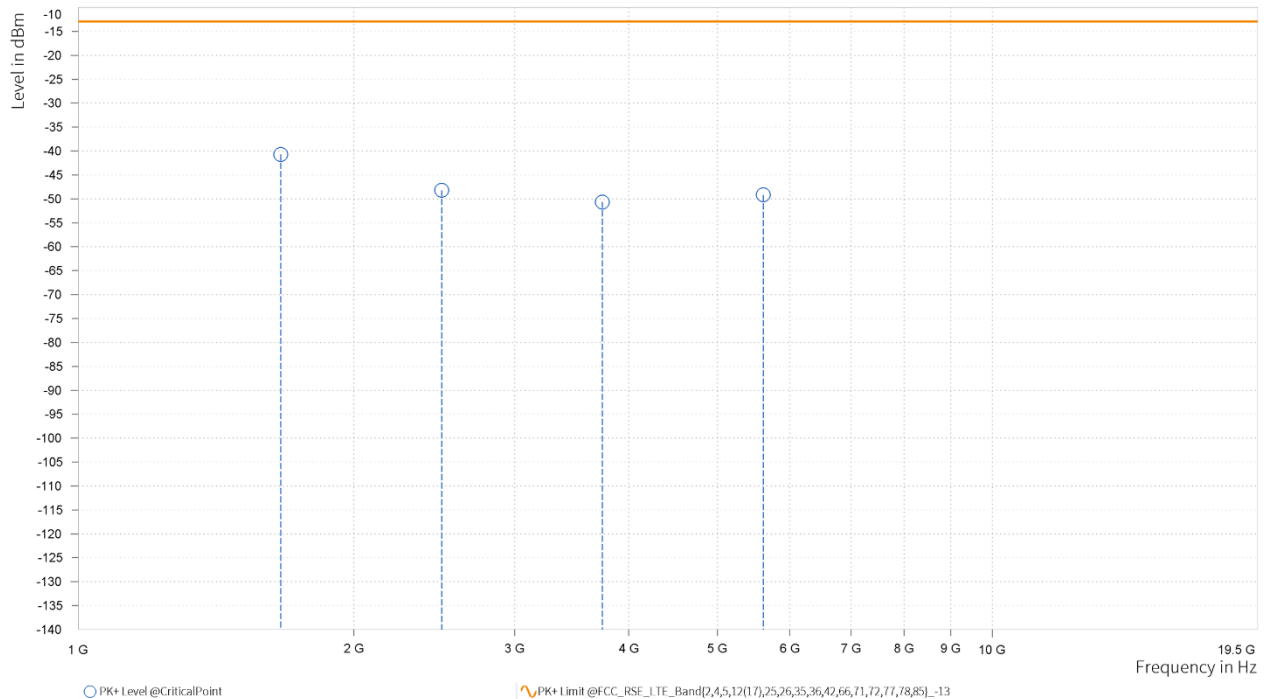




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 20525/376000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.000	-46.60	-13.00	33.60	23.87	V	189.5	2.00
3	2,496.000	-48.63	-13.00	35.63	21.03	V	1	2.00
4	3,742.000	-48.81	-13.00	35.81	22.00	V	354.4	1.00
4	5,613.000	-50.27	-13.00	37.27	25.05	V	20.3	2.00

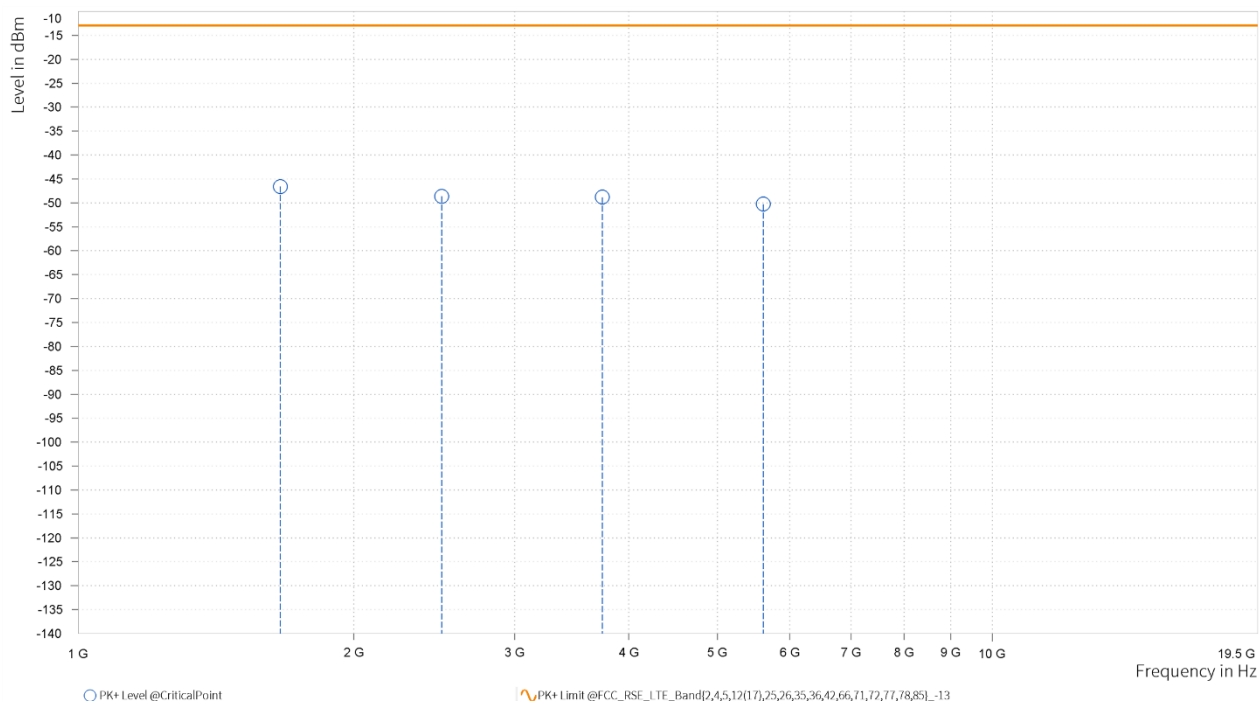




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: (10+20) MHz

MODE	TX channel 20600/380000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,679.000	-40.88	-13.00	27.88	25.29	H	1	1.00
3	2,518.500	-50.68	-13.00	37.68	20.28	H	1	1.00
4	3,782.000	-50.79	-13.00	37.79	22.07	H	358.4	1.00
4	5,673.000	-49.89	-13.00	36.89	24.94	H	16.8	2.00

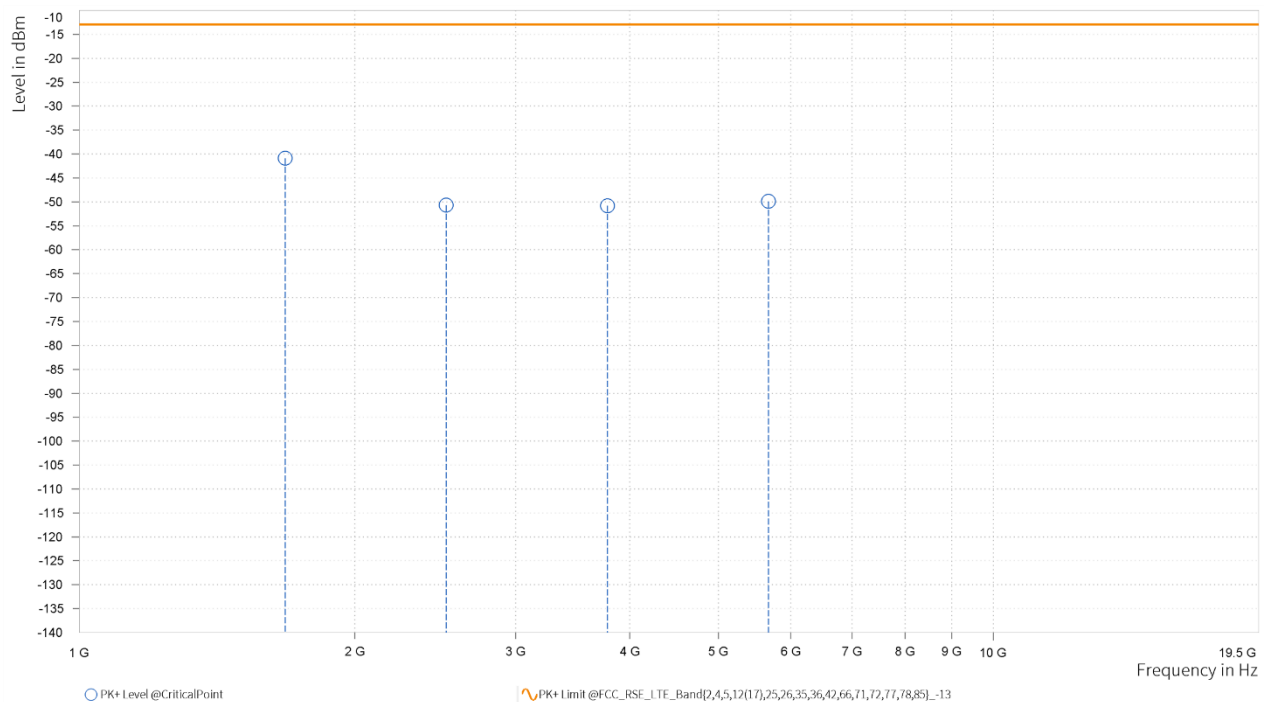



MODE	TX channel 20600/380000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,679.000	-46.21	-13.00	33.21	24.21	V	36	1.00
3	2,518.500	-49.92	-13.00	36.92	21.13	V	296.4	2.00
4	3,782.000	-49.75	-13.00	36.75	22.28	V	69.9	2.00
4	5,673.000	-48.47	-13.00	35.47	25.34	V	359	2.00

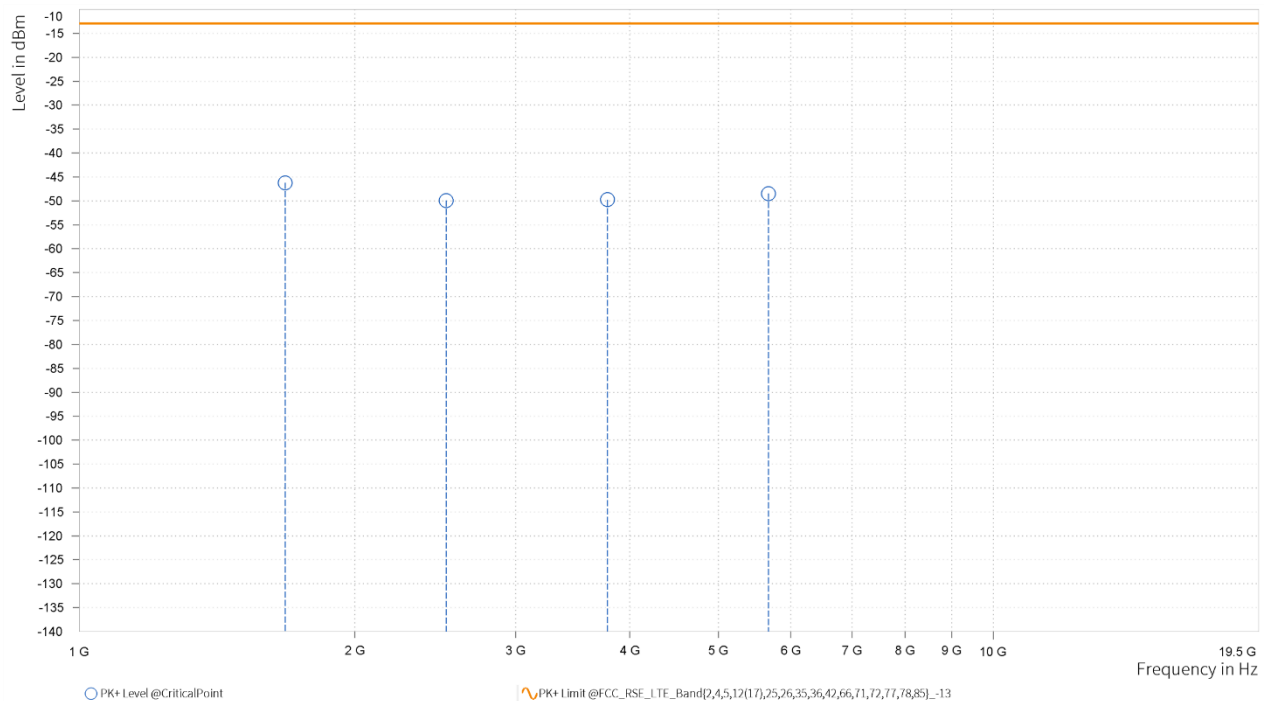




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

DC_5A_N66A

CHANNEL BANDWIDTH: (10+40) MHz

MODE	TX channel 20450/346000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,649.000	-43.65	-13.00	30.65	24.43	H	1.1	2.00
3	2,473.500	-48.95	-13.00	35.95	20.30	H	143.6	1.00
4	3,424.000	-53.05	-13.00	40.05	20.50	H	359	2.00
4	5,136.000	-50.04	-13.00	37.04	23.58	H	121.5	2.00

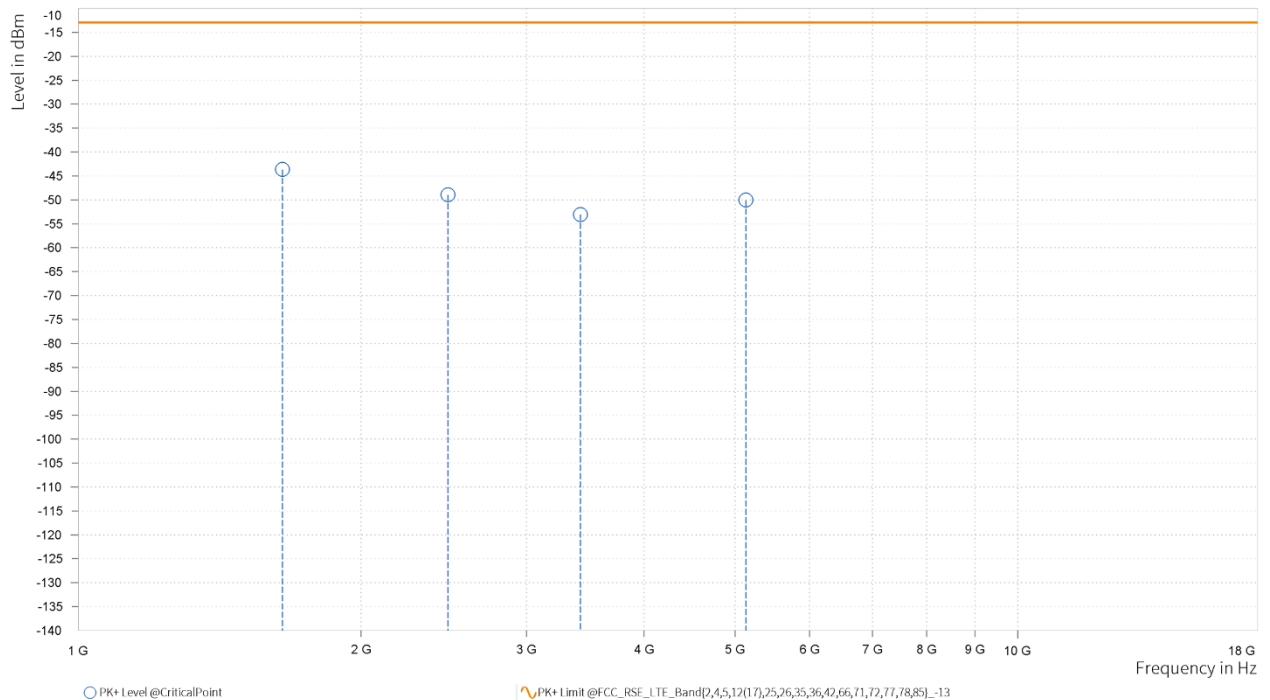




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 20450/346000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,649.000	-46.29	-13.00	33.29	23.98	V	304.9	1.00
3	2,473.500	-48.45	-13.00	35.45	20.55	V	359	2.00
4	3,424.000	-52.05	-13.00	39.05	20.88	V	320.5	1.00
4	5,136.000	-50.35	-13.00	37.35	23.87	V	121.6	2.00

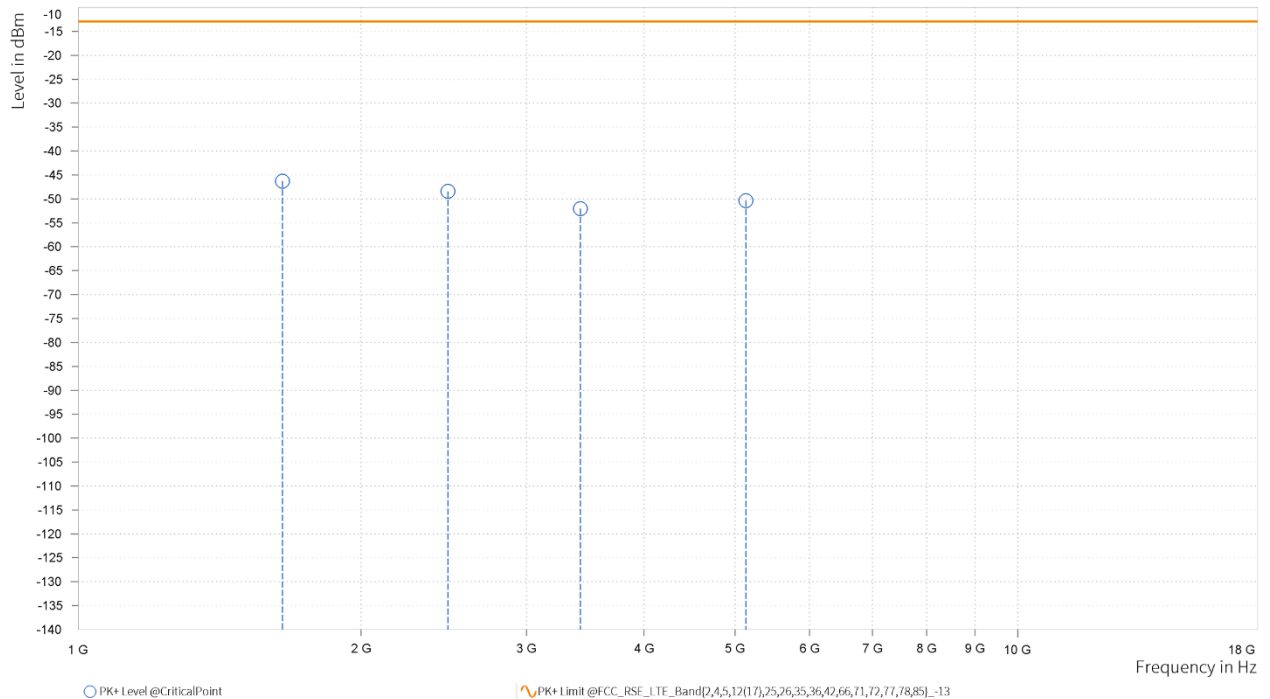




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: (10+20) MHz

CHANNEL BANDWIDTH (15-25) MHz			
MODE	TX channel 20525/349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.000	-40.67	-13.00	27.67	24.99	H	35.9	2.00
3	2,496.000	-49.63	-13.00	36.63	20.76	H	231.3	1.00
4	3,454.000	-52.91	-13.00	39.91	20.30	H	186.7	1.00
4	5,181.000	-49.13	-13.00	36.13	23.77	H	290.7	1.00

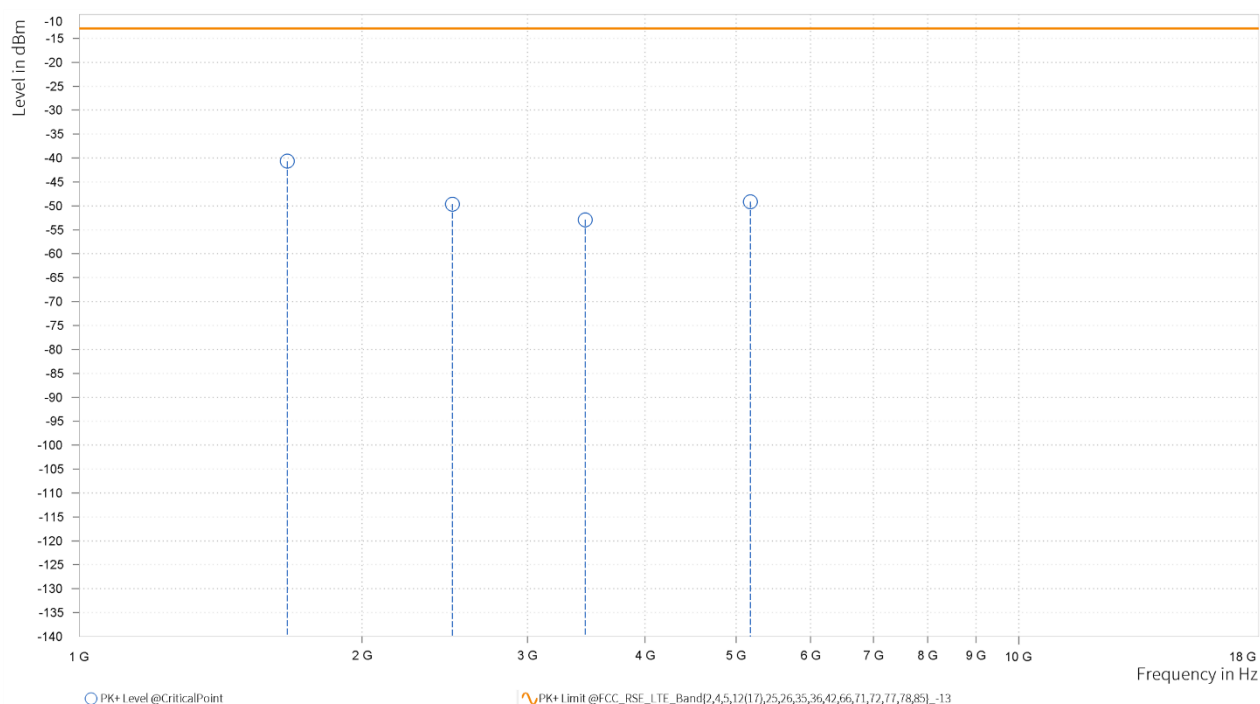




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

VERIFAC			
MODE	TX channel 20525/349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.000	-46.45	-13.00	33.45	23.87	V	1.2	2.00
3	2,496.000	-49.87	-13.00	36.87	21.03	V	359.1	1.00
4	3,454.000	-52.24	-13.00	39.24	20.92	V	359.1	1.00
4	5,181.000	-49.49	-13.00	36.49	24.23	V	1	2.00

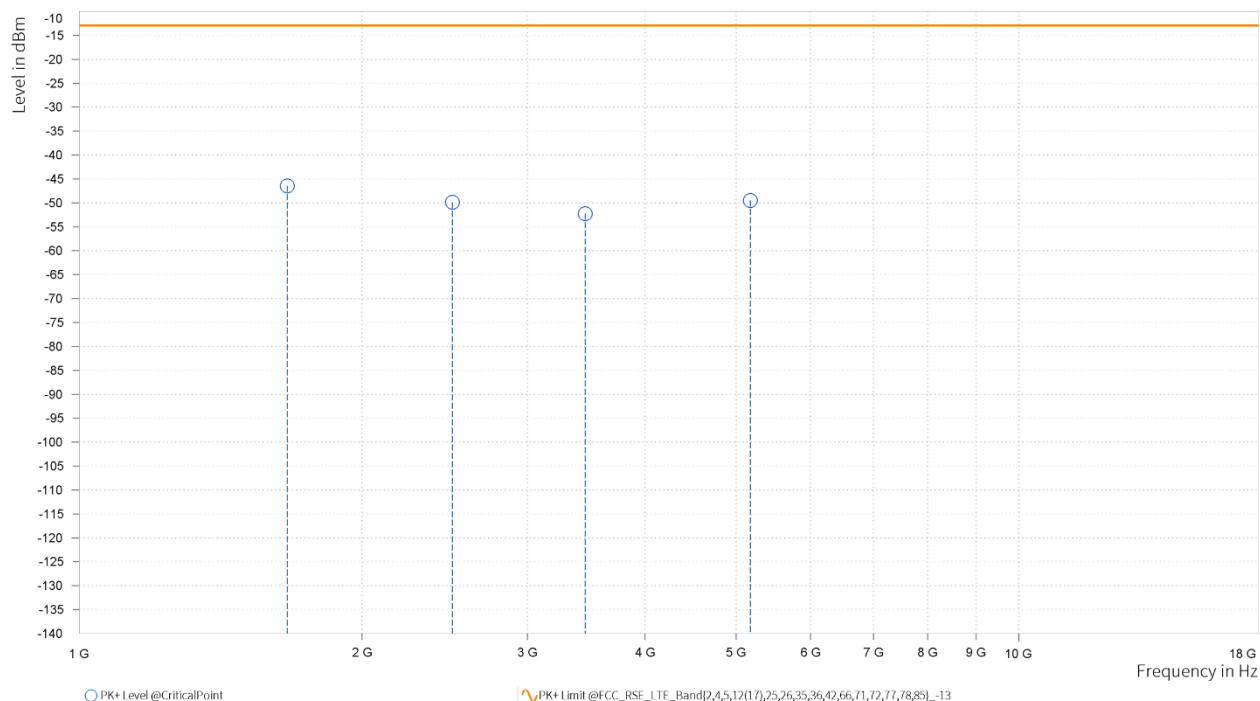




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: (10+20) MHz

MODE	TX channel 20600/352000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,679.000	-41.88	-13.00	28.88	25.29	H	335.4	1.00
3	2,518.500	-50.00	-13.00	37.00	20.28	H	181	2.00
4	3,484.000	-52.17	-13.00	39.17	20.45	H	1	1.00
4	5,226.000	-49.37	-13.00	36.37	23.99	H	1	1.00

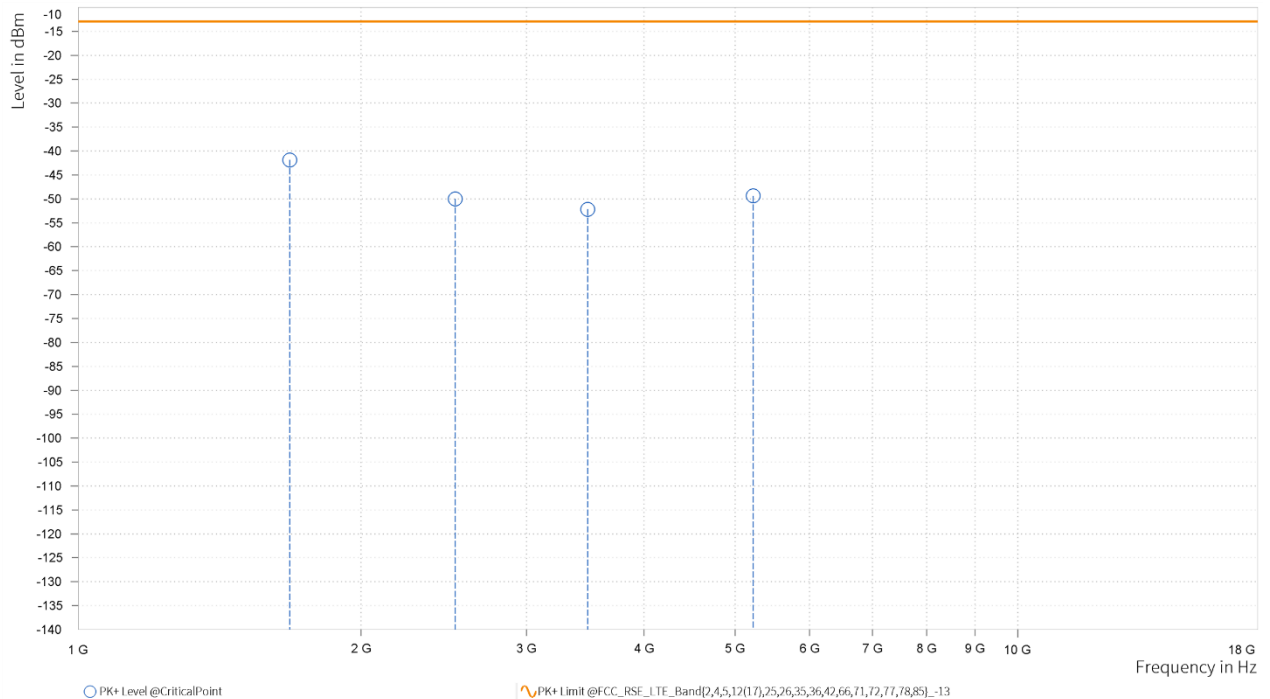



MODE	TX channel 20600/352000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,679.000	-46.22	-13.00	33.22	24.21	V	178.3	1.00
3	2,518.500	-50.90	-13.00	37.90	21.13	V	300.6	1.00
4	3,484.000	-51.85	-13.00	38.85	21.22	V	173.2	2.00
4	5,226.000	-49.91	-13.00	36.91	24.54	V	68.5	2.00

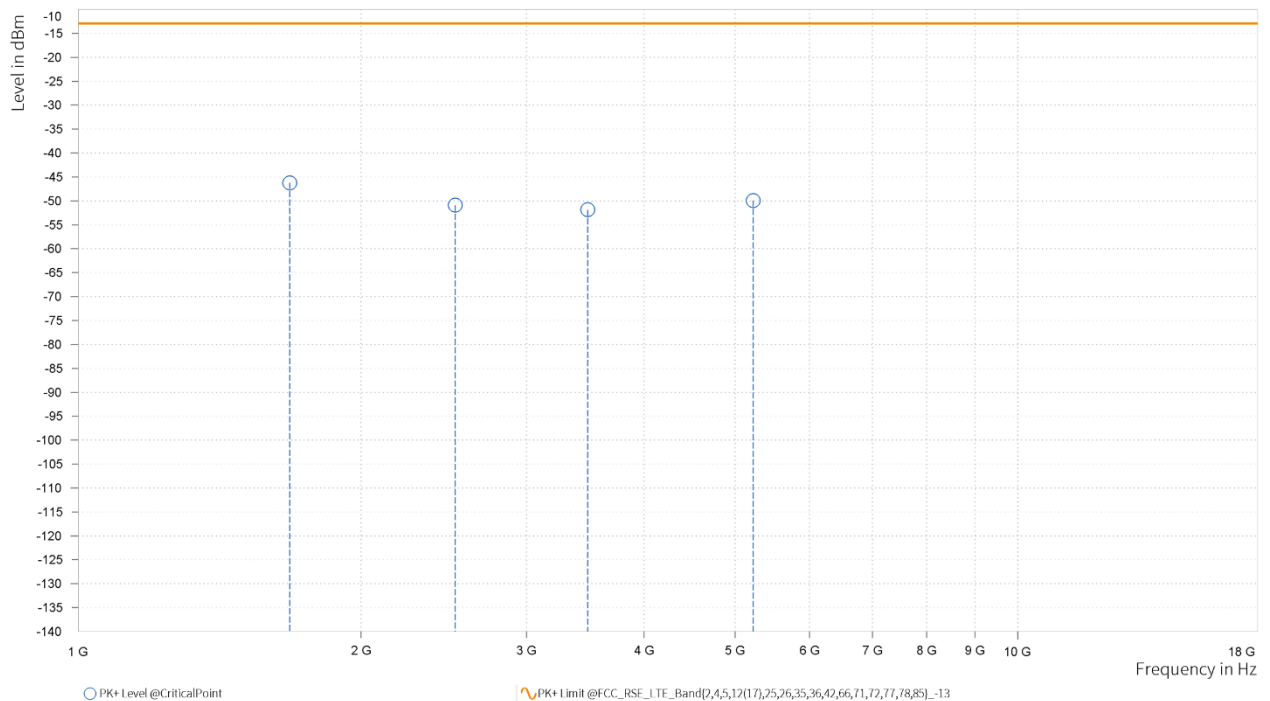




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

DC_5A_N77A

CHANNEL BANDWIDTH: (10+100) MHz

MODE	TX channel 20450/633332	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,649.000	-53.30	-13.00	40.30	14.82	H	123.8	2.00
3	2,473.500	-50.11	-13.00	37.11	20.30	H	66.4	1.00
5	7,410.000	-36.83	-13.00	23.83	32.94	H	43	2.00
6	11,115.000	-52.69	-13.00	39.69	19.05	H	270.3	1.00

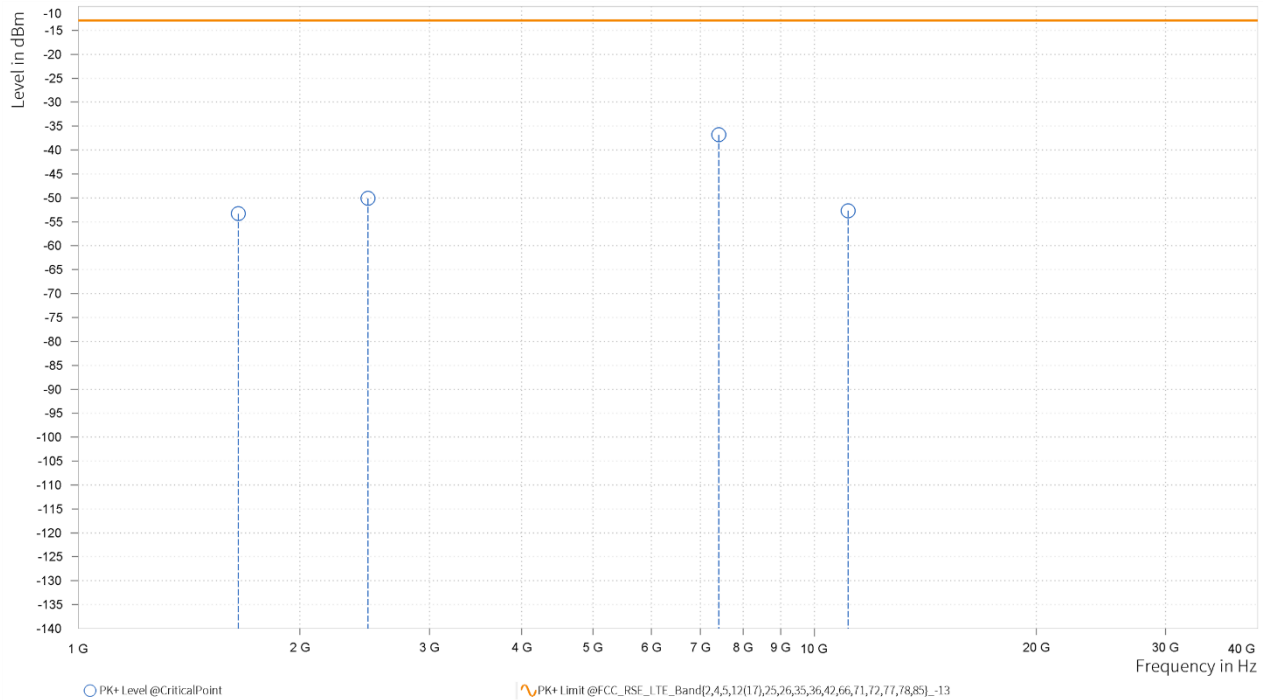



MODE	TX channel 20450/633332	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,649.000	-52.99	-13.00	39.99	14.37	V	293.6	1.00
3	2,473.500	-48.56	-13.00	35.56	20.55	V	0.9	2.00
5	7,410.000	-40.59	-13.00	27.59	32.90	V	1.2	2.00
6	11,115.000	-50.59	-13.00	37.59	19.22	V	0.9	2.00

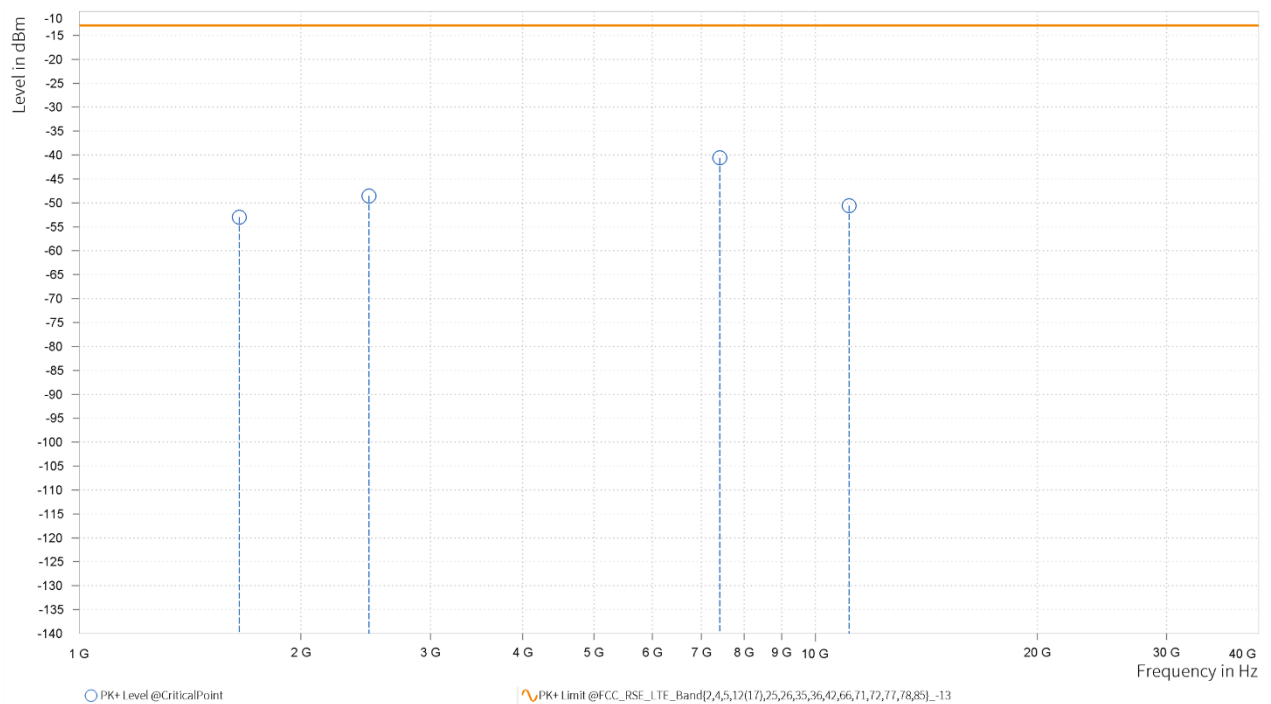




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: (10+100) MHz

MODE	TX channel 20525/633332	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.000	-54.60	-13.00	41.60	15.32	H	6.3	2.00
3	2,496.000	-49.12	-13.00	36.12	20.76	H	188.2	1.00
5	7,590.000	-41.80	-13.00	28.80	32.44	H	359	2.00
6	11,385.000	-51.45	-13.00	38.45	19.37	H	359.1	1.00

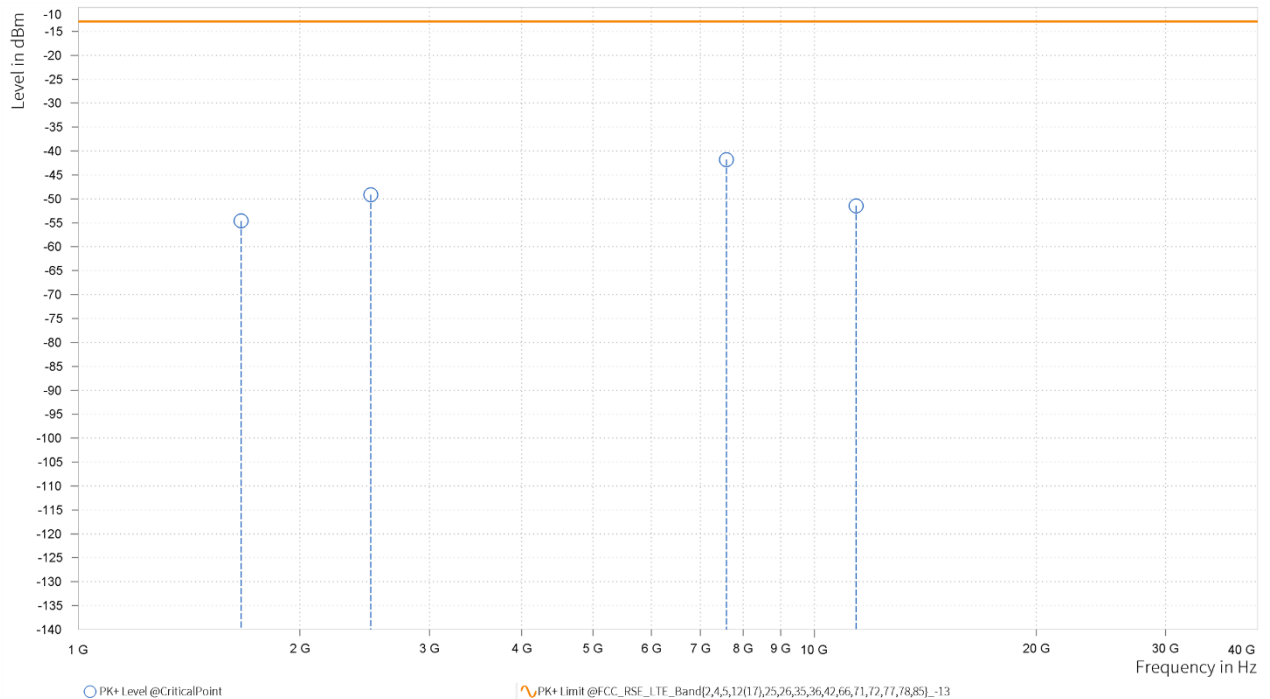




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 20525/633332	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.000	-56.08	-13.00	43.08	14.20	V	179	1.00
3	2,496.000	-48.93	-13.00	35.93	21.03	V	243.4	1.00
5	7,590.000	-41.49	-13.00	28.49	32.22	V	316.2	1.00
6	11,385.000	-52.59	-13.00	39.59	19.43	V	359	2.00

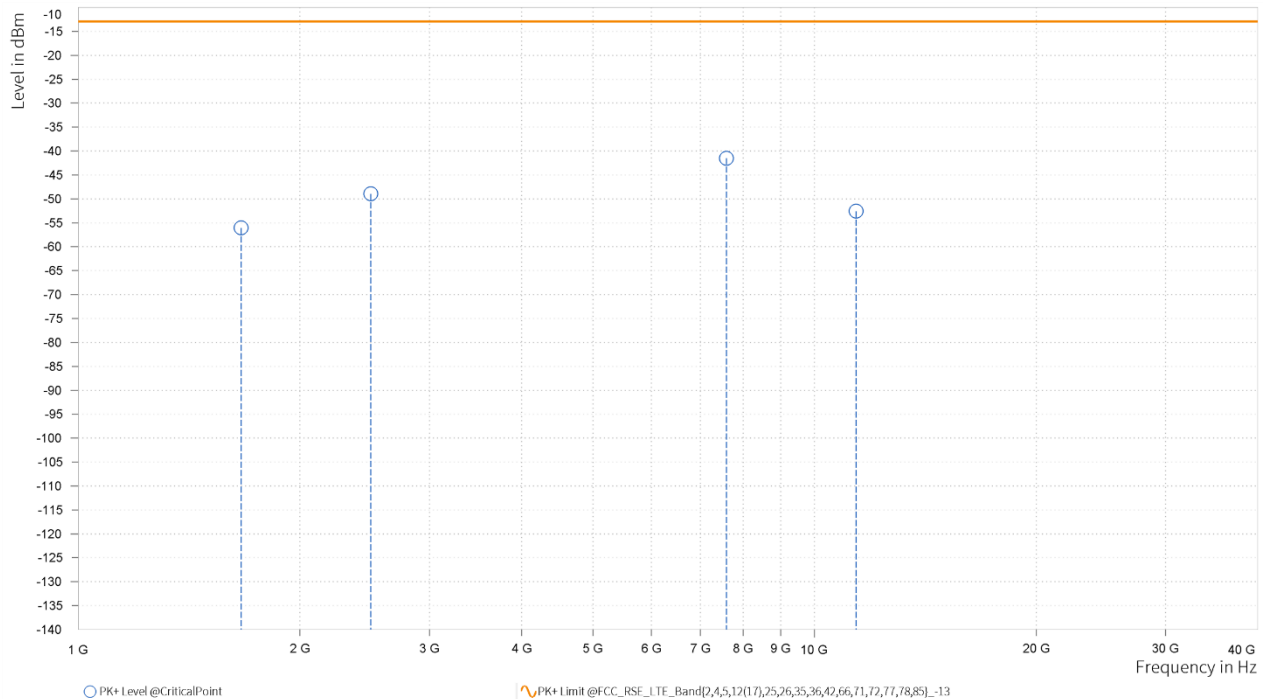




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: (10+100) MHz

MODE	TX channel 20600/633332	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,679.000	-53.61	-13.00	40.61	15.64	H	34.6	1.00
3	2,518.500	-49.81	-13.00	36.81	20.28	H	293.6	2.00
5	7,770.000	-40.99	-13.00	27.99	32.95	H	1	1.00
6	11,655.000	-52.05	-13.00	39.05	20.11	H	359	1.00

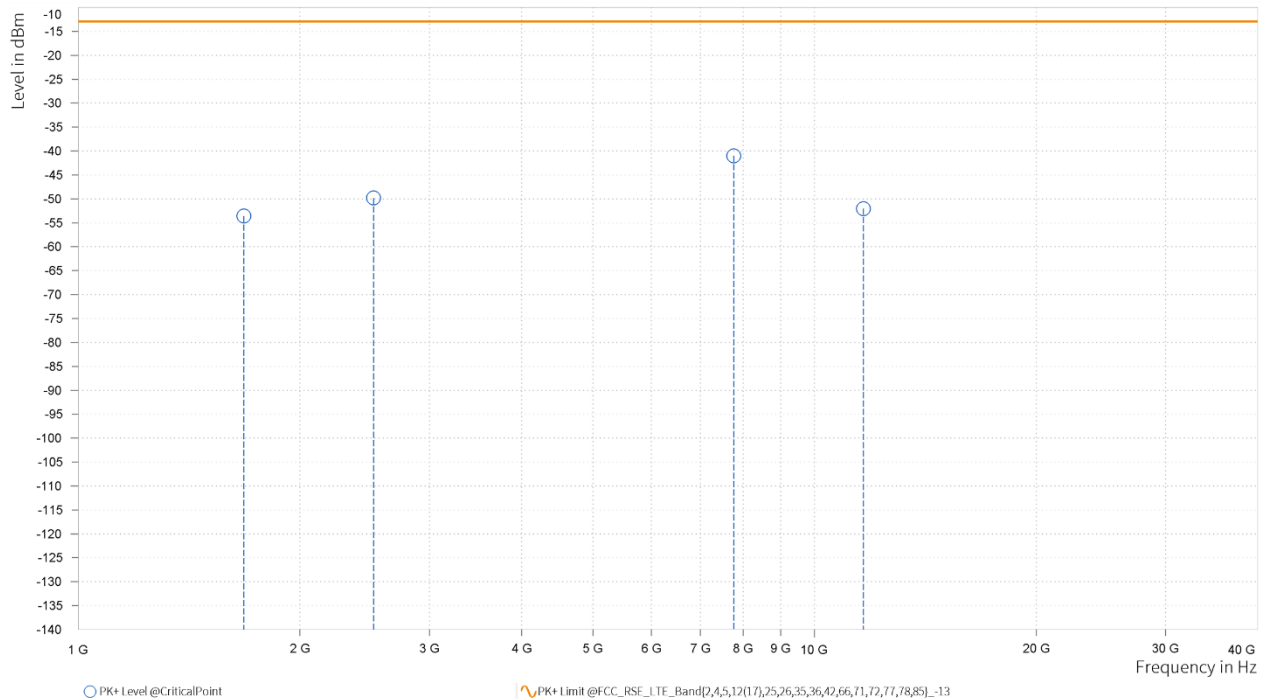



VERIFAC			
MODE	TX channel 20600/633332	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,679.000	-55.21	-13.00	42.21	14.56	V	1	2.00
3	2,518.500	-49.20	-13.00	36.20	21.13	V	293.5	2.00
5	7,770.000	-39.63	-13.00	26.63	32.72	V	38.7	2.00
6	11,655.000	-53.07	-13.00	40.07	20.42	V	30.2	2.00

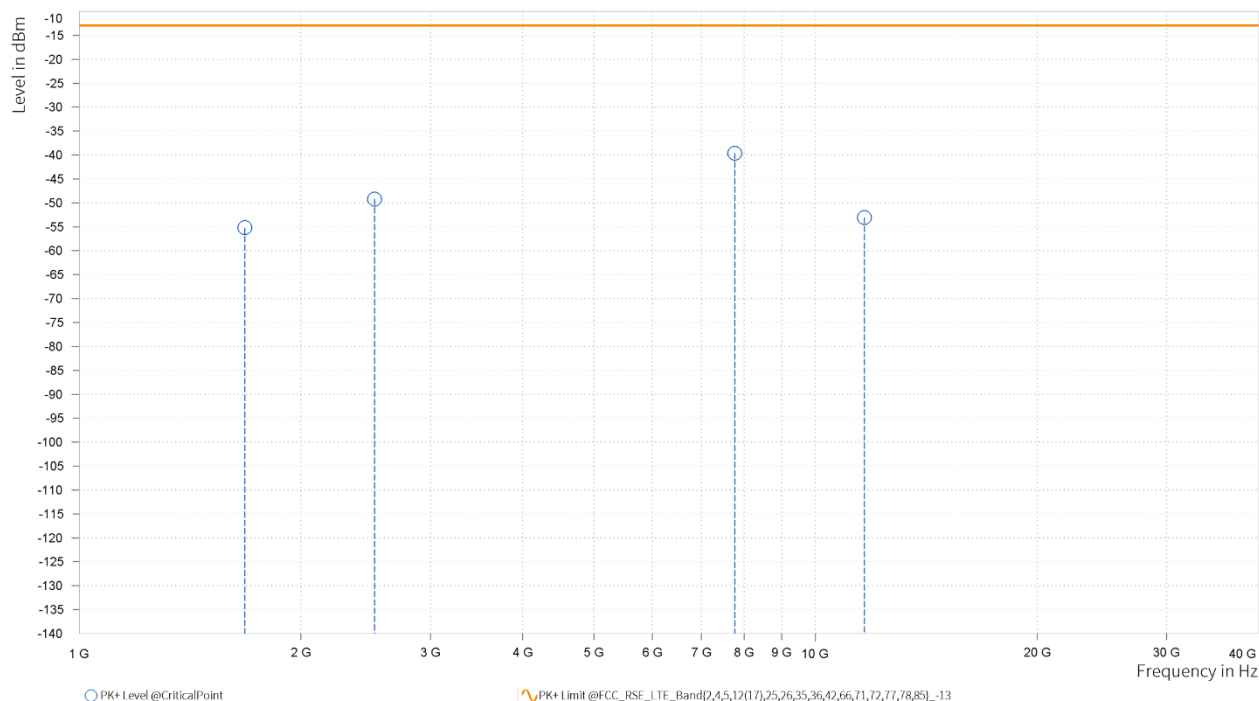




DC_13A-N2A

CHANNEL BANDWIDTH: (10+20) MHz

MODE	TX channel 23230/372000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-48.33	-13.00	35.33	22.38	H	132.2	2.00
3	2,332.500	-51.04	-13.00	38.04	19.37	H	177.4	2.00
4	3,702.000	-52.26	-13.00	39.26	21.12	H	359	2.00
4	5,553.000	-50.15	-13.00	37.15	24.26	H	63.5	2.00

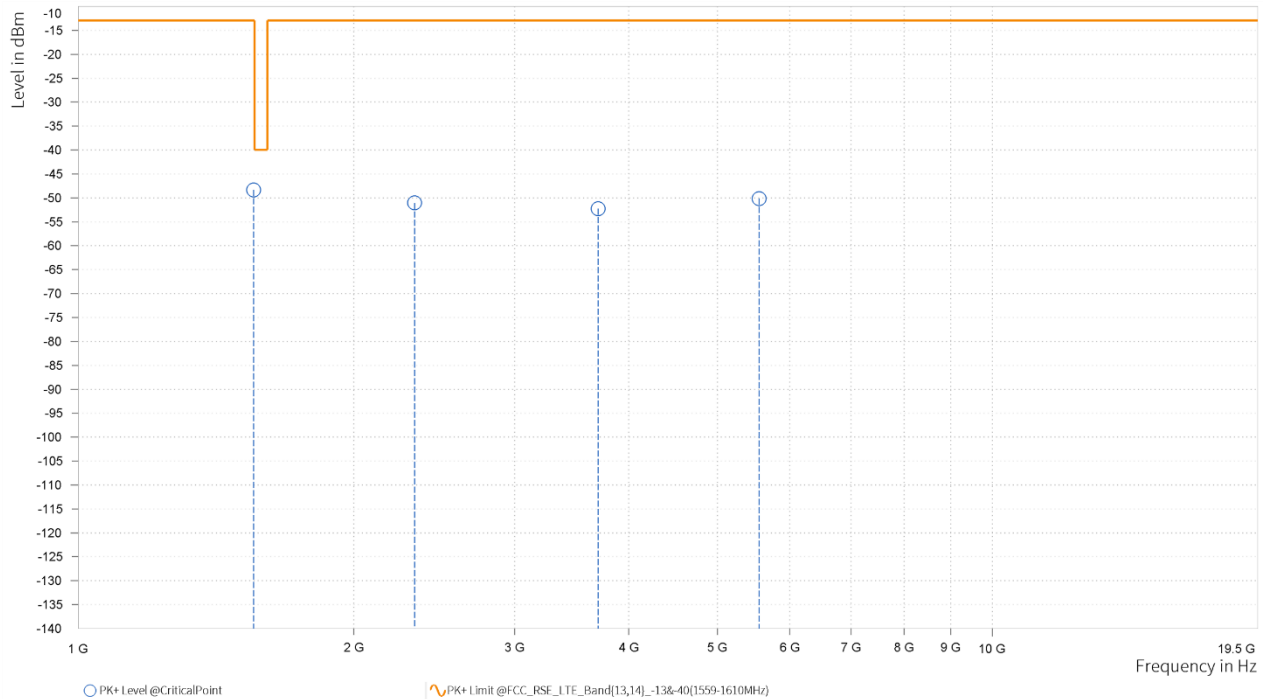




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 23230/372000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-46.44	-13.00	33.44	23.72	V	263.1	1.00
3	2,332.500	-51.40	-13.00	38.40	19.96	V	358.7	1.00
4	3,702.000	-51.06	-13.00	38.06	21.72	V	267.4	2.00
4	5,553.000	-50.18	-13.00	37.18	24.96	V	116.6	2.00

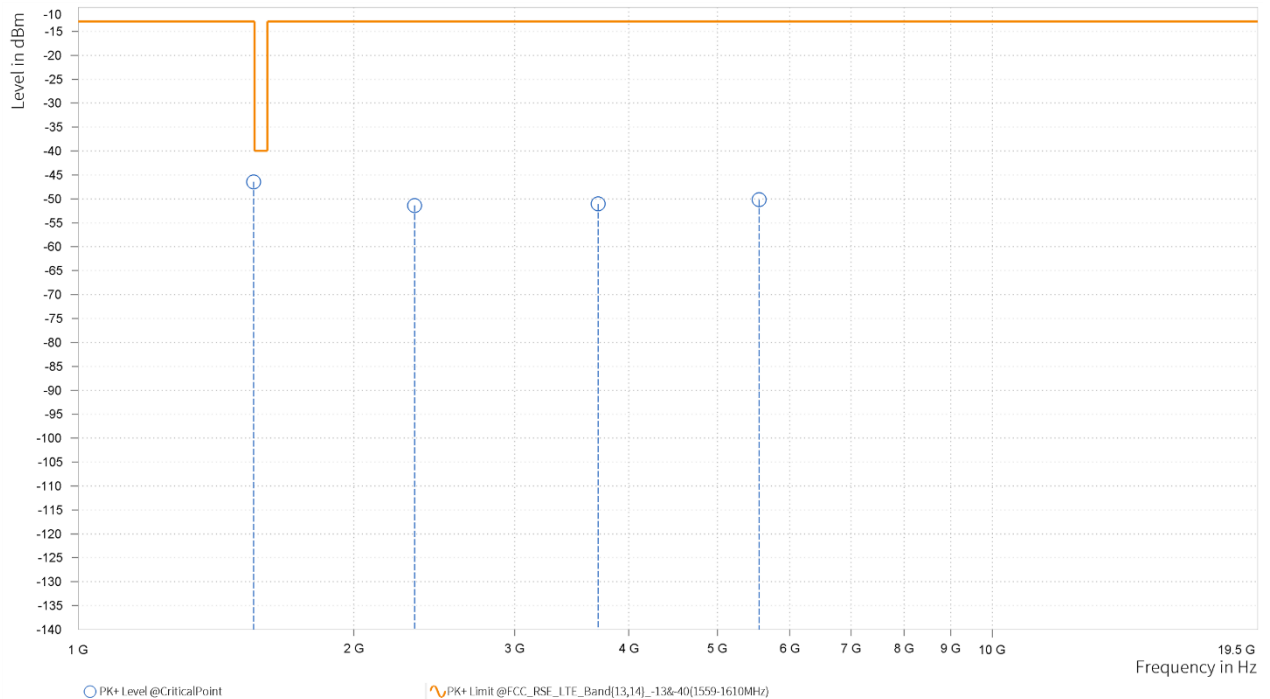




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: (10+20) MHz

MODE	TX channel 23230/376000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-47.61	-13.00	34.61	22.38	H	359	2.00
3	2,332.500	-51.26	-13.00	38.26	19.37	H	180.3	2.00
4	3,742.000	-50.85	-13.00	37.85	21.35	H	326.2	1.00
4	5,613.000	-49.45	-13.00	36.45	24.60	H	359	2.00

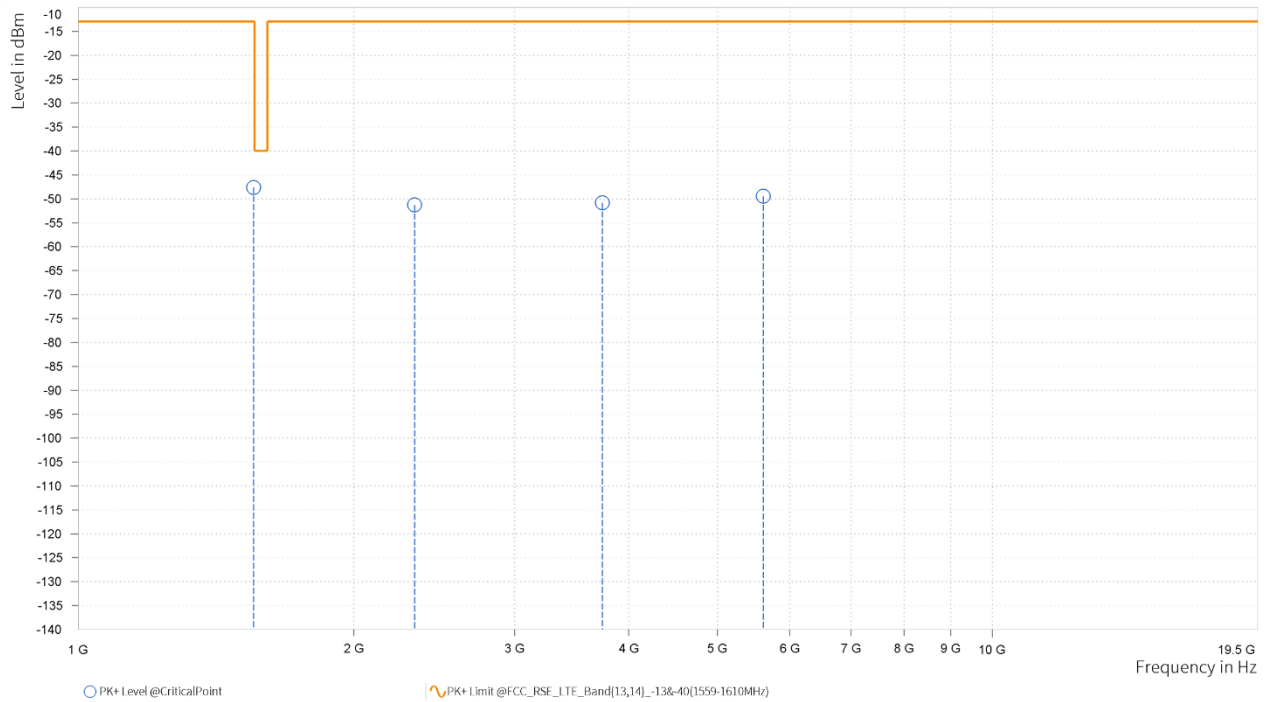




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 23230/376000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-45.76	-13.00	32.76	23.72	V	359	2.00
3	2,332.500	-49.68	-13.00	36.68	19.96	V	74.9	2.00
4	3,742.000	-51.07	-13.00	38.07	22.00	V	119.4	2.00
4	5,613.000	-49.70	-13.00	36.70	25.05	V	12.6	2.00

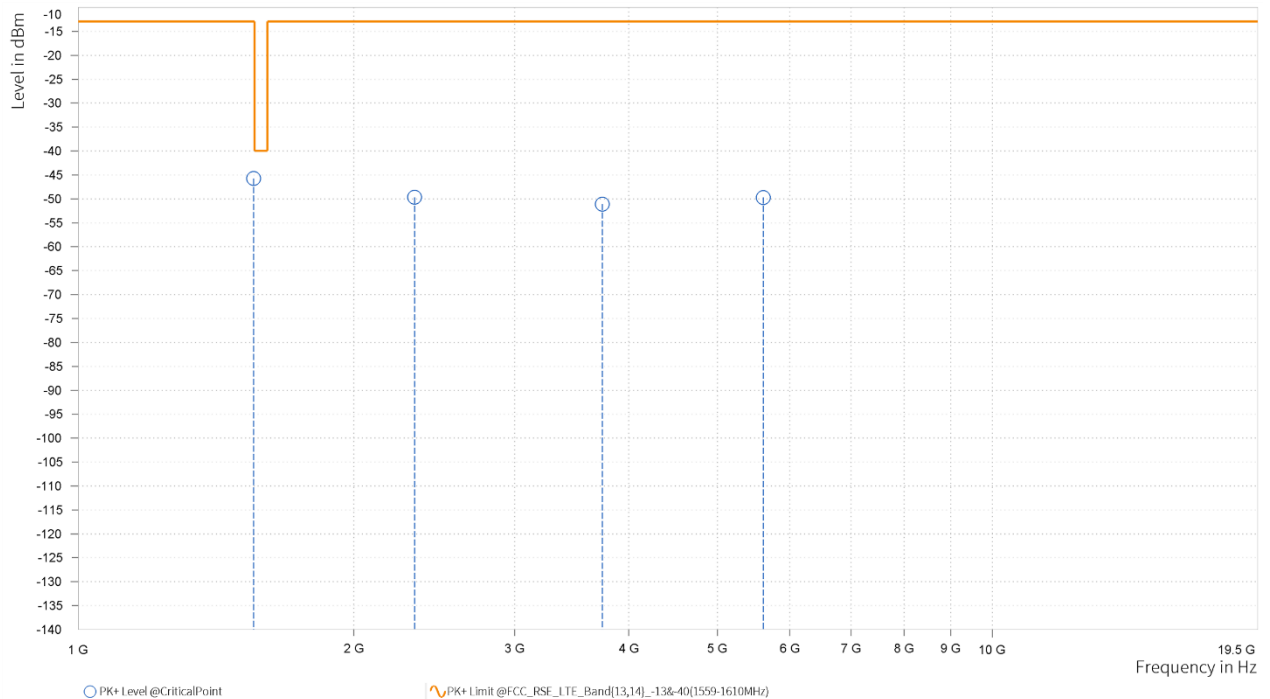




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: (10+20) MHz

MODE	TX channel 23230/380000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-47.13	-13.00	34.13	22.38	H	359	2.00
3	2,332.500	-50.37	-13.00	37.37	19.37	H	290.1	2.00
4	3,782.000	-49.62	-13.00	36.62	22.07	H	359	2.00
4	5,673.000	-48.18	-13.00	35.18	24.94	H	359.1	1.00

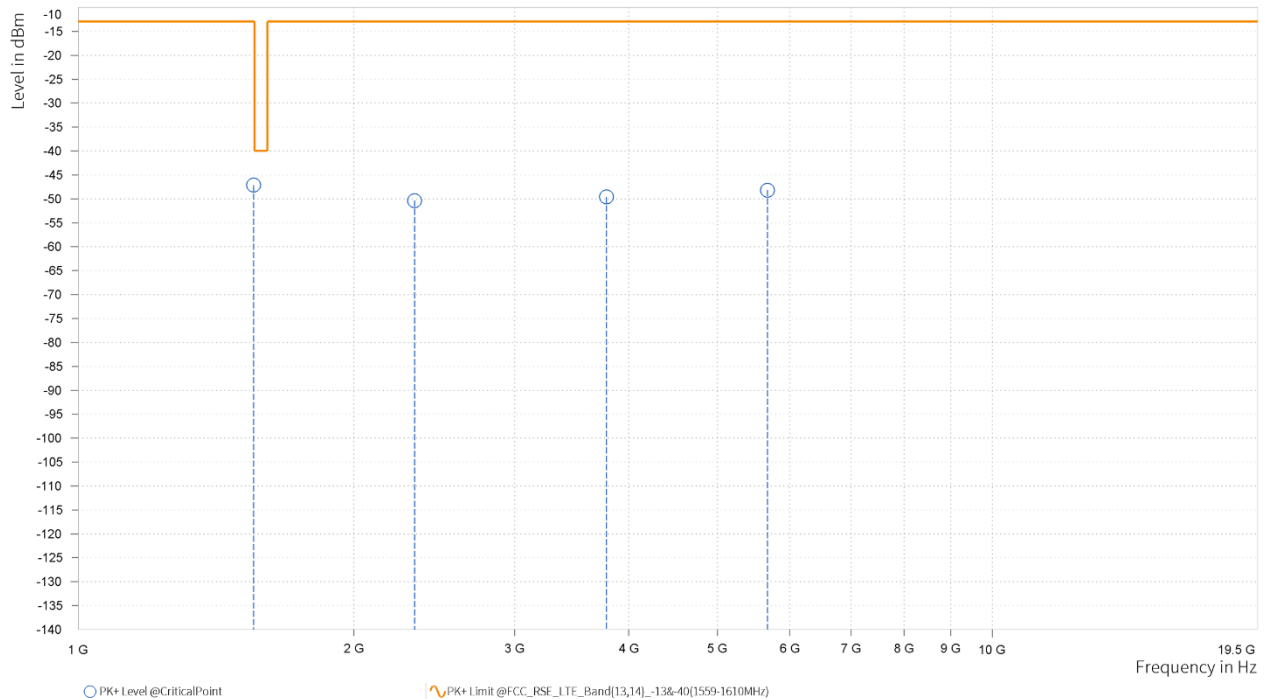




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 23230/380000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-47.18	-13.00	34.18	23.72	V	359.1	1.00
3	2,332.500	-52.27	-13.00	39.27	19.96	V	359.1	1.00
4	3,782.000	-50.12	-13.00	37.12	22.28	V	123	1.00
4	5,673.000	-47.96	-13.00	34.96	25.34	V	193.8	2.00

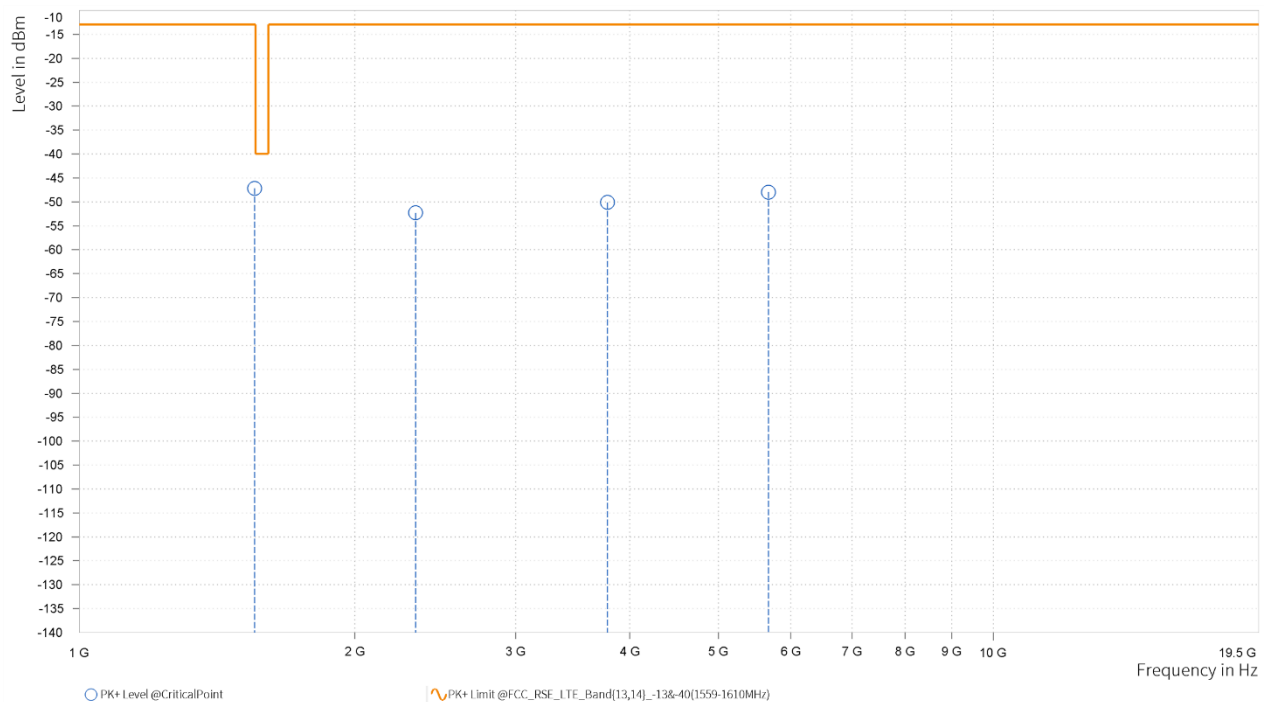




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

DC_13A-N66A

CHANNEL BANDWIDTH: (10+40) MHz

CHANNEL BANDWIDTH (10-K) MHz			
MODE	TX channel 23230/346000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-48.05	-13.00	35.05	22.38	H	1	1.00
3	2,332.500	-51.07	-13.00	38.07	19.37	H	201.7	1.00
4	3,424.000	-51.89	-13.00	38.89	20.50	H	171.1	2.00
4	5,136.000	-50.21	-13.00	37.21	23.58	H	1	1.00

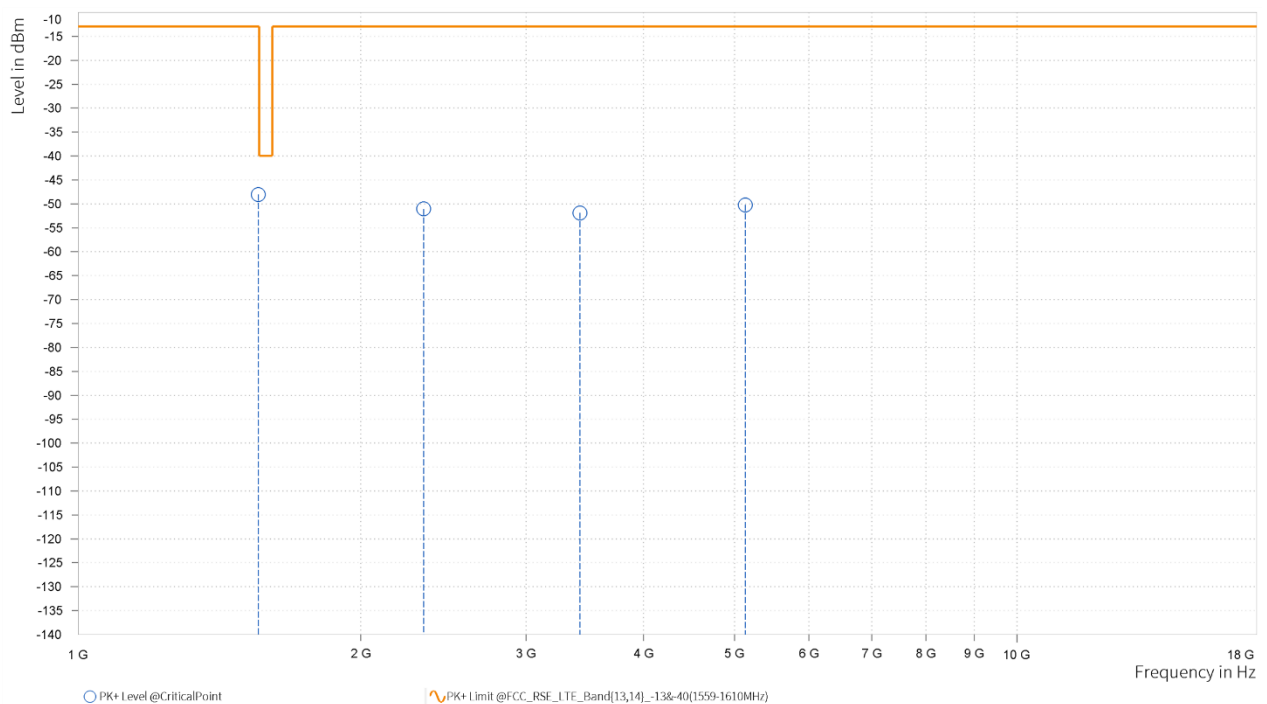




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 23230/346000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-47.10	-13.00	34.10	23.72	V	188.8	2.00
3	2,332.500	-50.25	-13.00	37.25	19.96	V	181.7	2.00
4	3,424.000	-51.96	-13.00	38.96	20.88	V	356.3	1.00
4	5,136.000	-49.30	-13.00	36.30	23.87	V	265.9	2.00

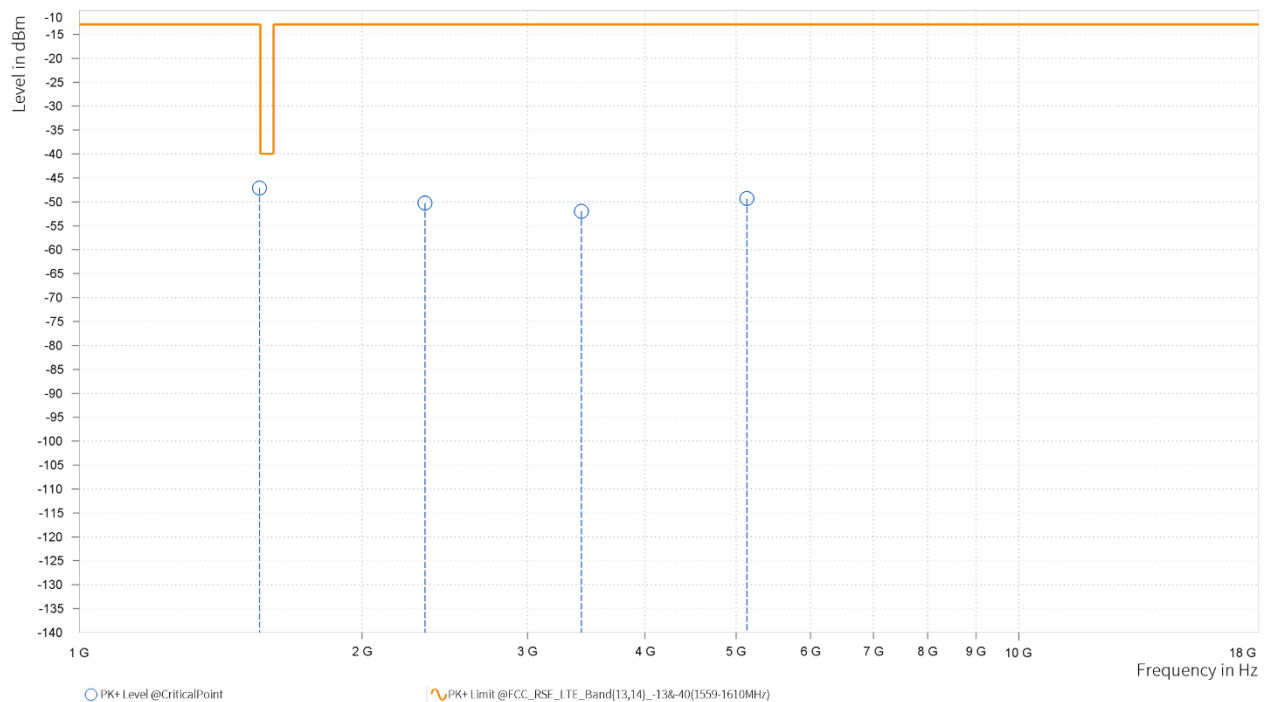




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: (10+40) MHz

MODE	TX channel 23230/349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-47.72	-13.00	34.72	22.38	H	34.6	1.00
3	2,332.500	-52.42	-13.00	39.42	19.37	H	77	2.00
4	3,454.000	-52.49	-13.00	39.49	20.30	H	359	1.00
4	5,181.000	-50.07	-13.00	37.07	23.77	H	0.9	2.00

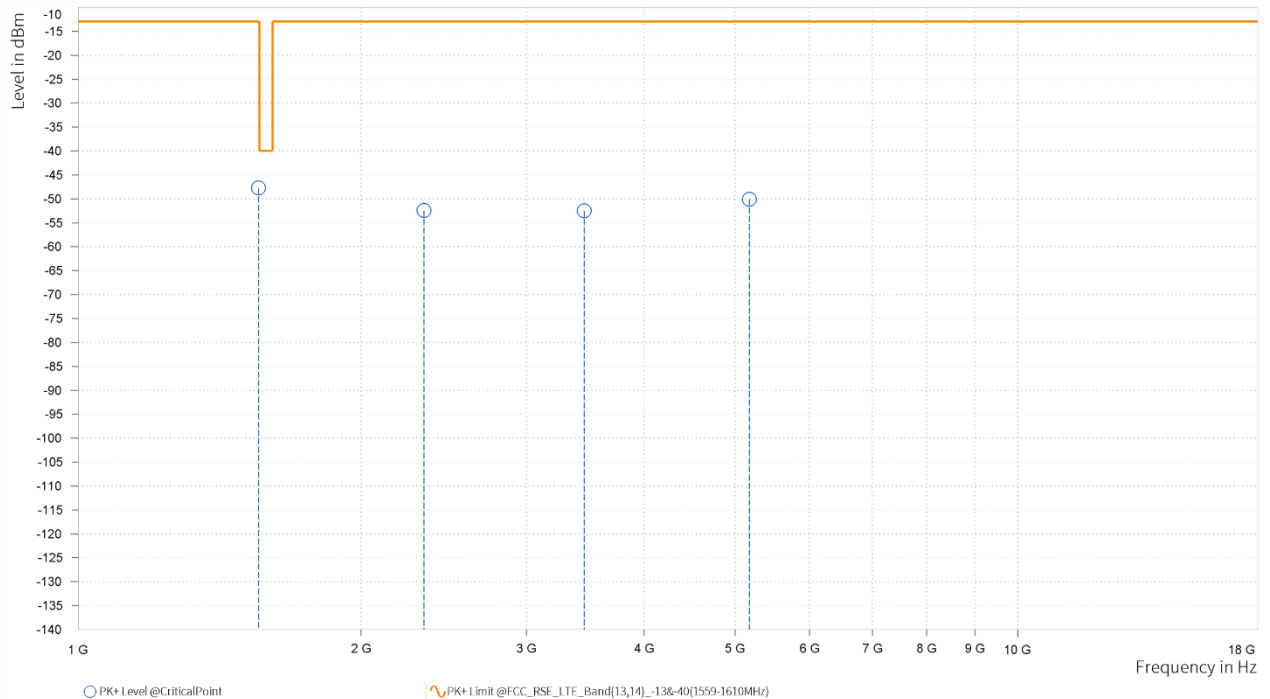




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 23230/349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-46.13	-13.00	33.13	23.72	V	359	2.00
3	2,332.500	-51.44	-13.00	38.44	19.96	V	357.8	1.00
4	3,454.000	-51.60	-13.00	38.60	20.92	V	67.8	2.00
4	5,181.000	-49.83	-13.00	36.83	24.23	V	359	1.00

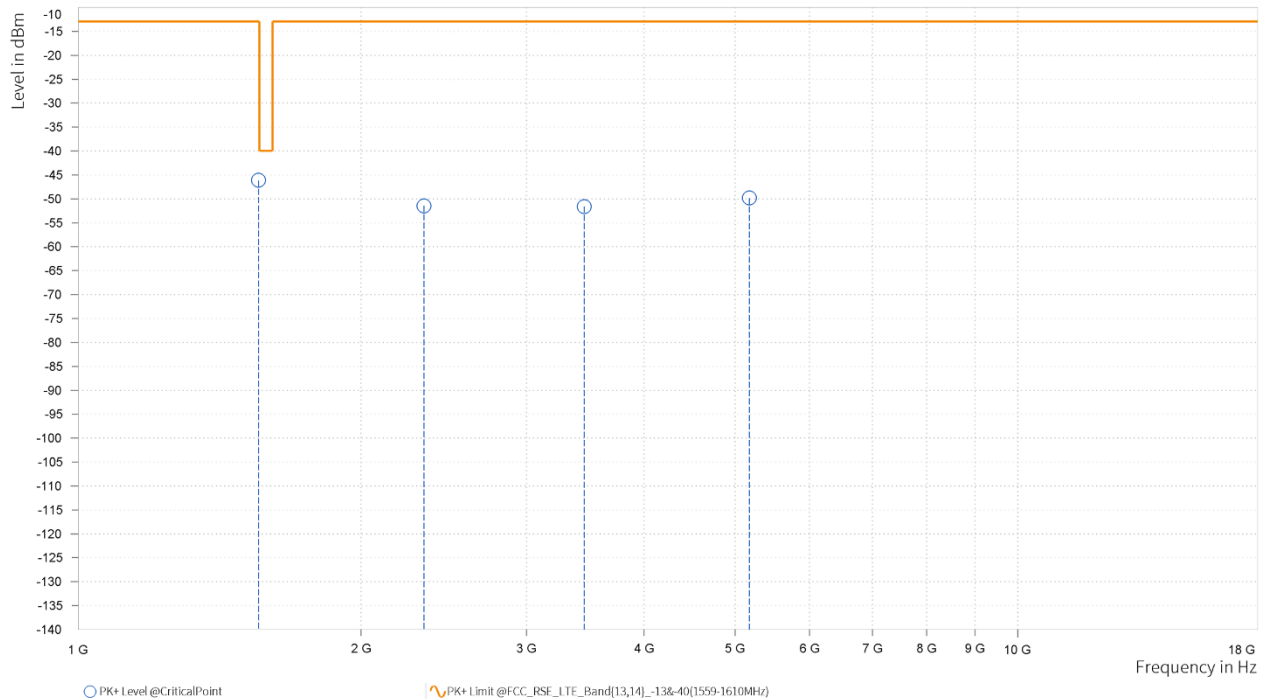



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: (10+40) MHz

MODE	TX channel 23230/352000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-48.22	-13.00	35.22	22.38	H	28.2	2.00
3	2,332.500	-52.10	-13.00	39.10	19.37	H	359	2.00
4	3,484.000	-52.92	-13.00	39.92	20.45	H	12.6	2.00
4	5,226.000	-50.34	-13.00	37.34	23.99	H	12.6	2.00

