


Bluetooth **full-color** aperture controller

TP BT001


※Support BT 4.0 onward

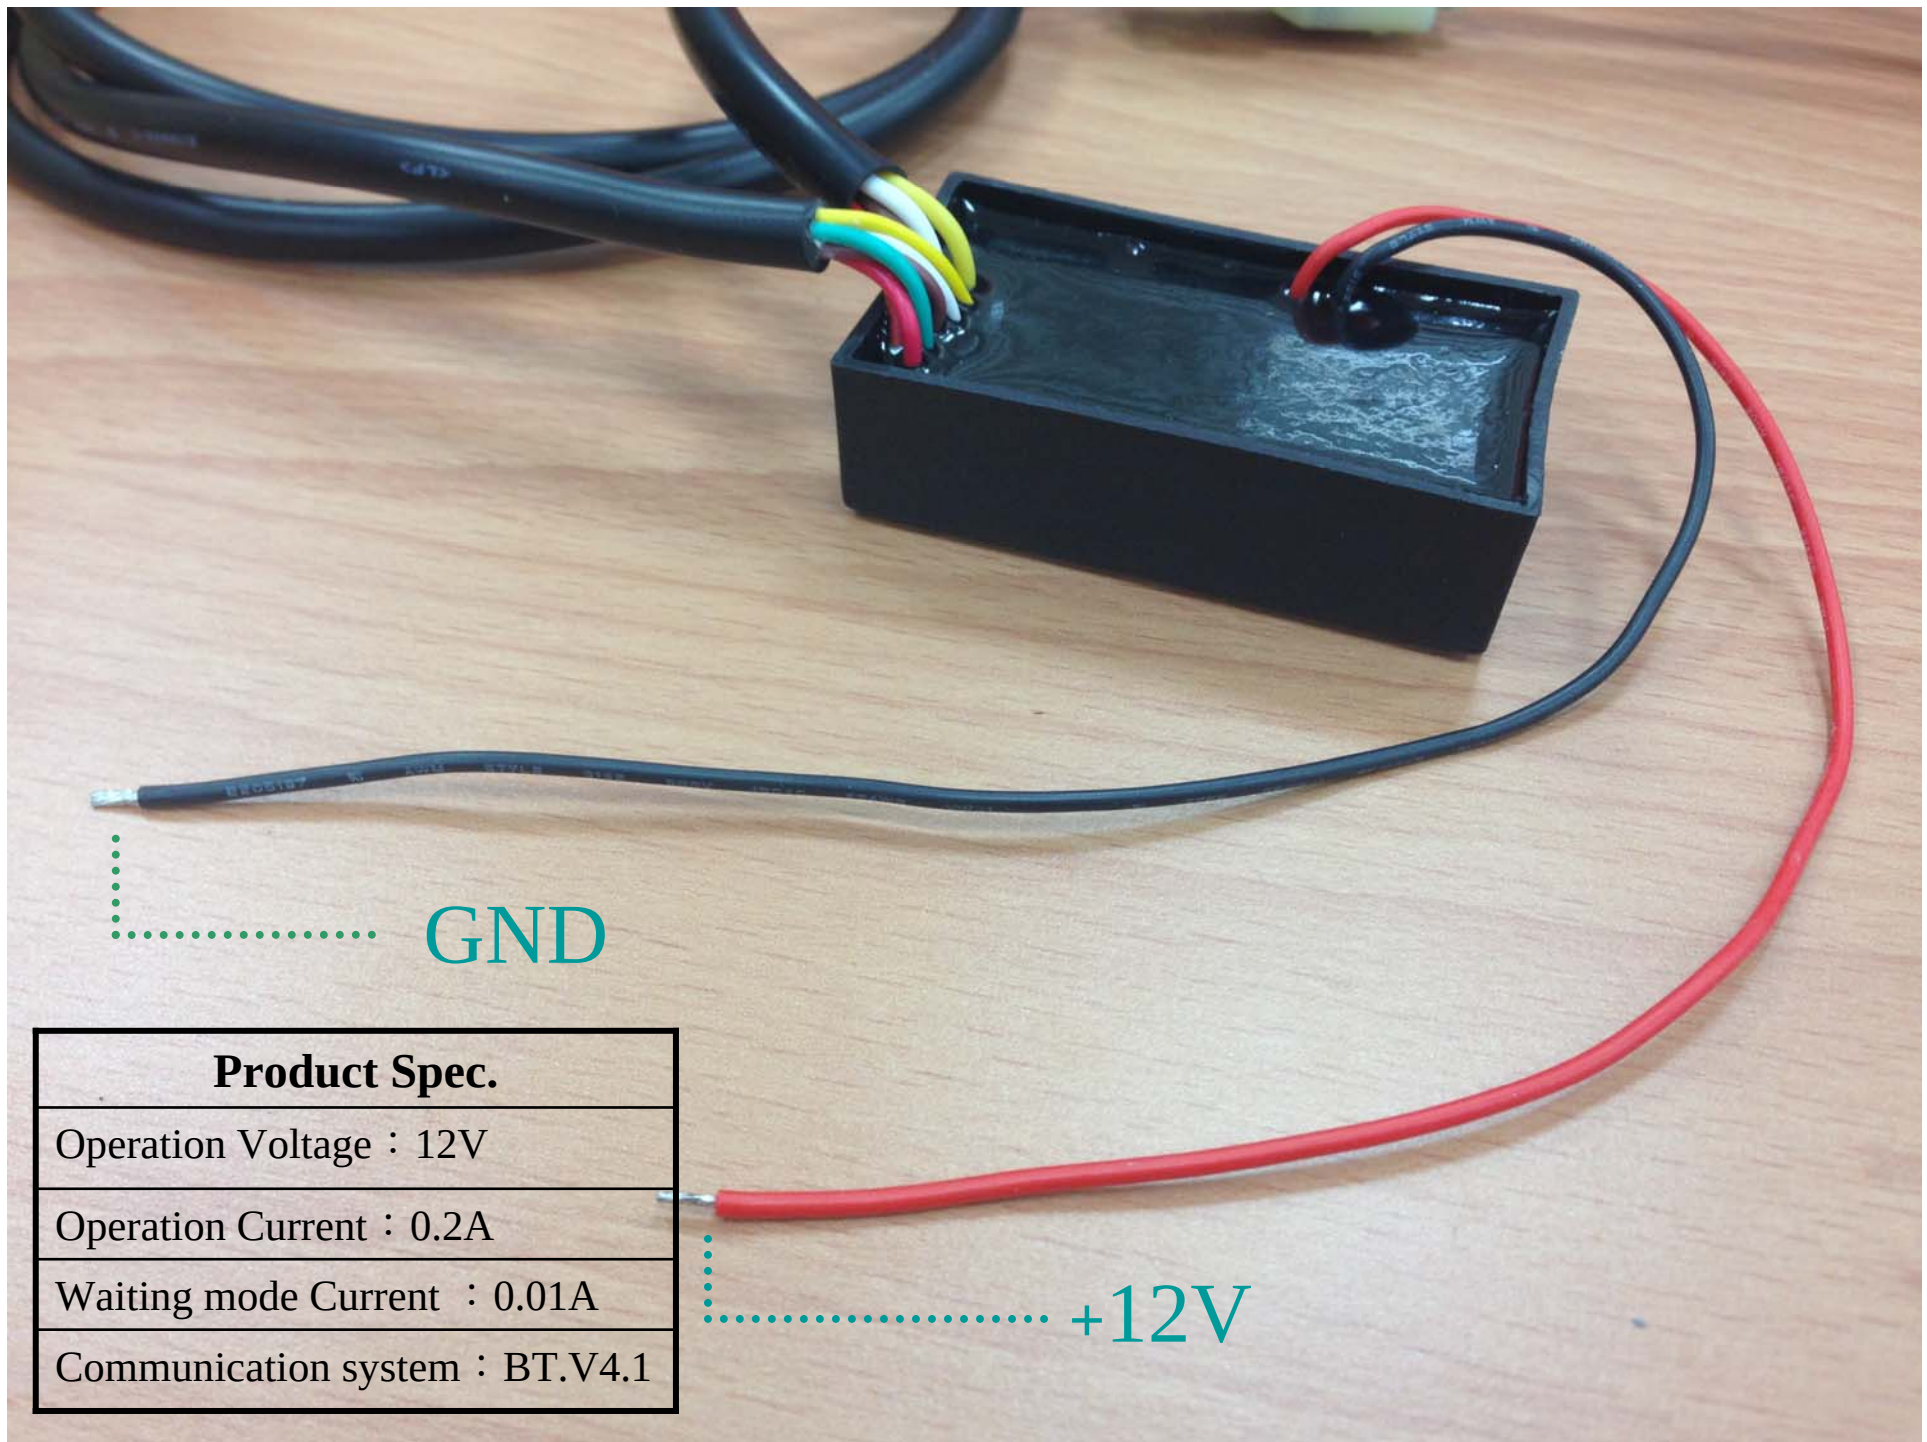

..... GND

..... +12V


Product Spec.
Operation Voltage : 12V
Operation Current : 0.2A
Waiting mode Current : 0.01A
Communication system : BT.V4.1

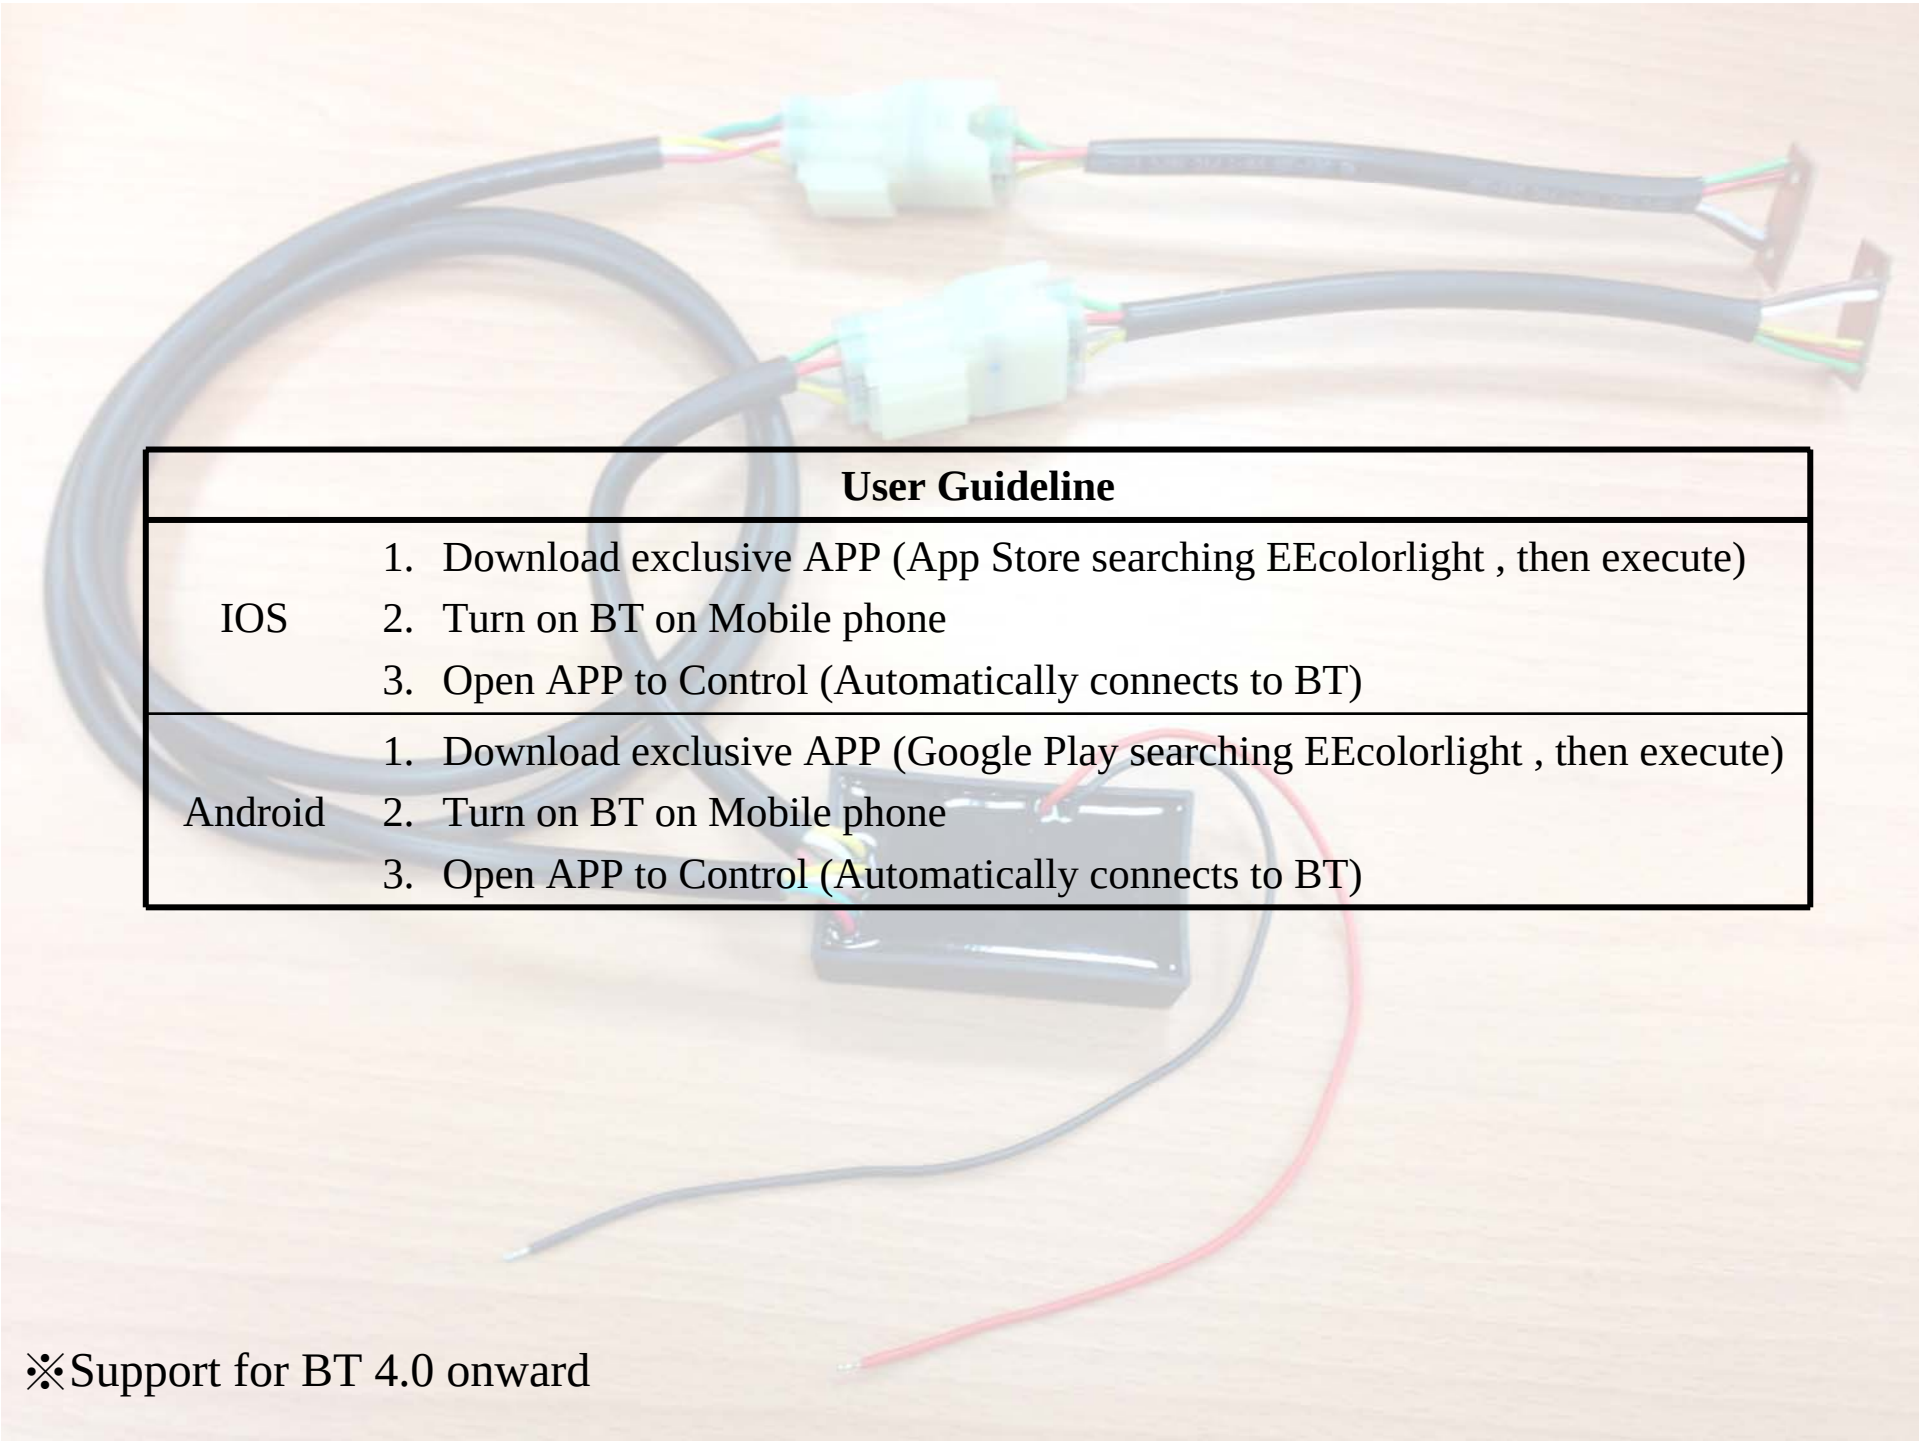

User Guideline	
IOS	1. Download exclusive APP (App Store searching EEcolorlight , then execute) 2. Turn on BT on Mobile phone 3. Open APP to Control (Automatically connects to BT)
Android	1. Download exclusive APP (Google Play searching EEcolorlight , then execute) 2. Turn on BT on Mobile phone 3. Open APP to Control (Automatically connects to BT)

※Support for BT 4.0 onward

IOS System

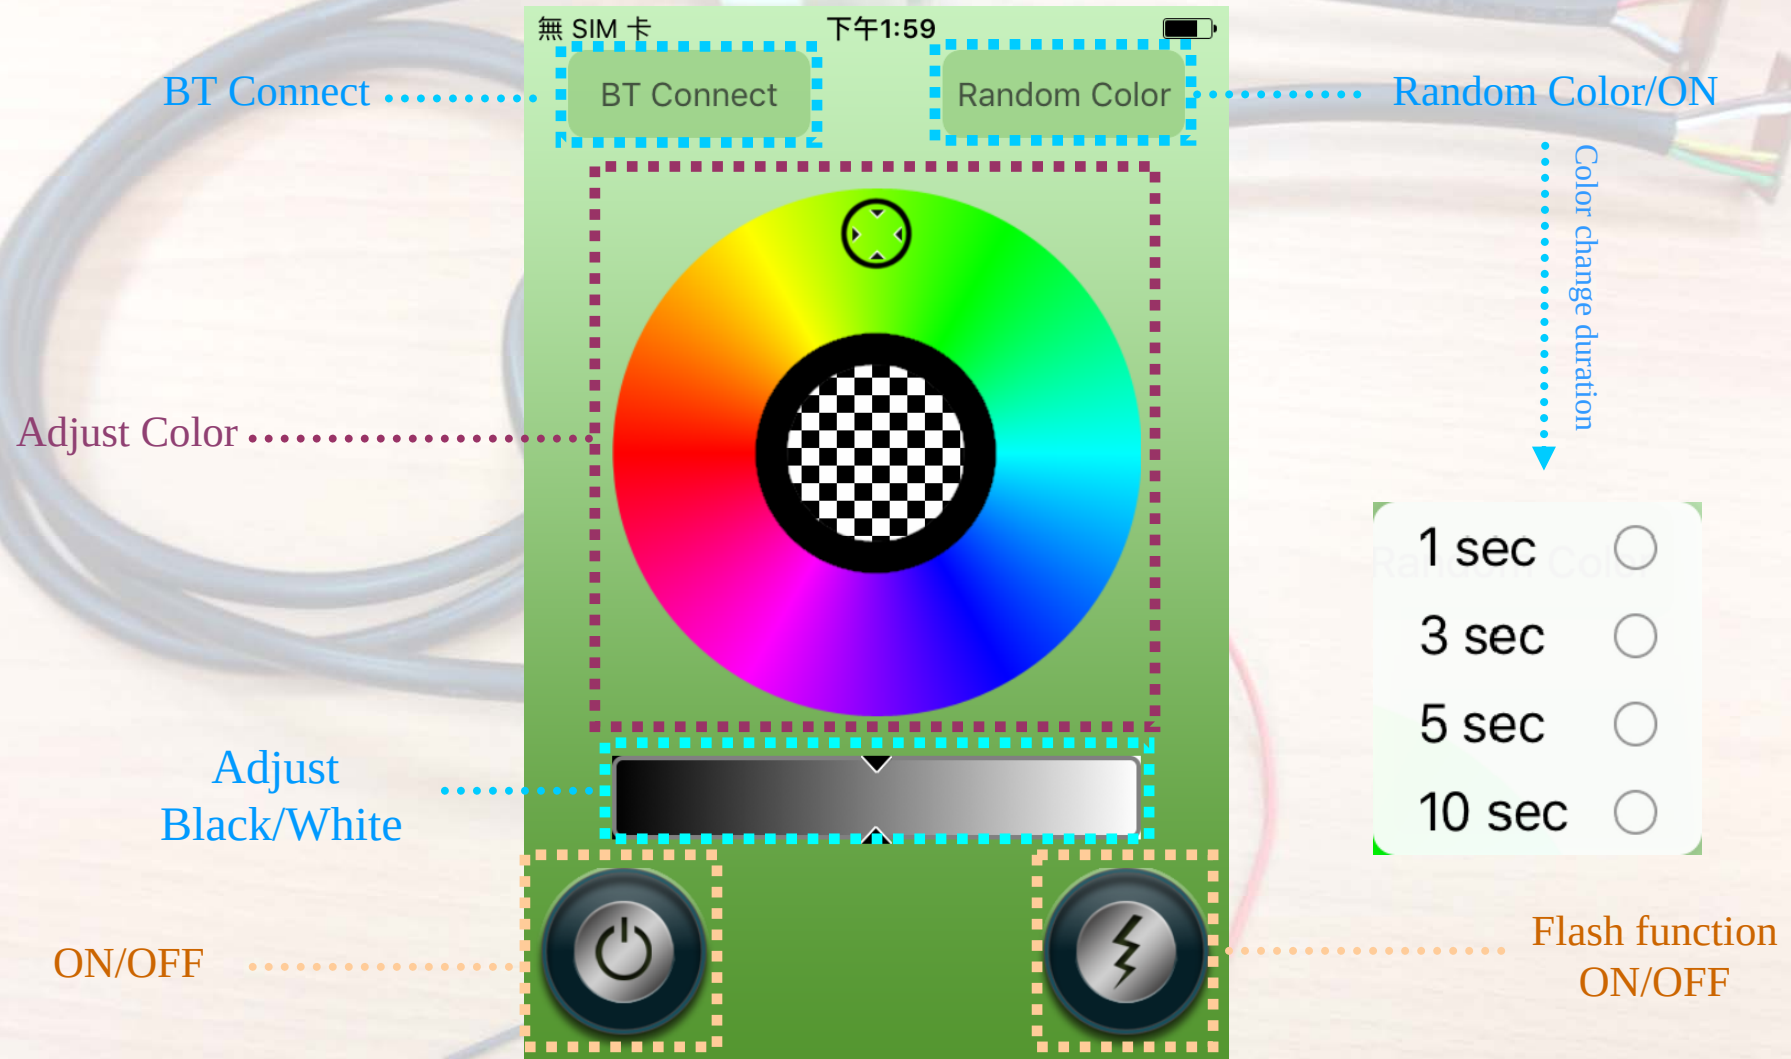



Android System

Switch color bar Random Color/ON

Color change duration

Color Bar

ON/OFF

Flash function ON/OFF

EagleEyes




SCAN

彩色 LED 白光 LED 隨機 LED

Color B/W

Random Timer Select

1 sec	☒
3 sec	☐
5 sec	☐
10 sec	☐

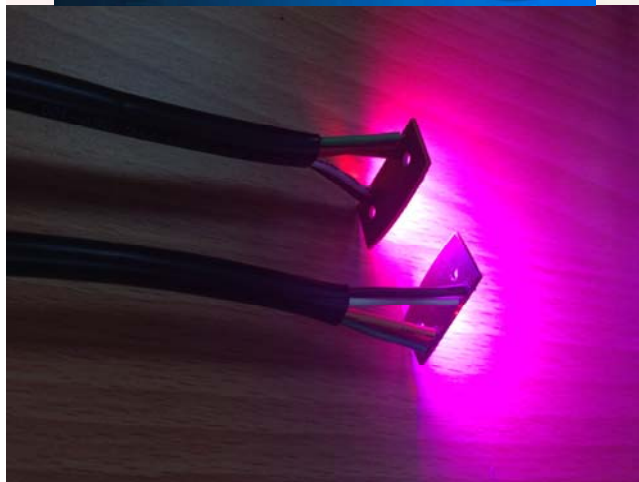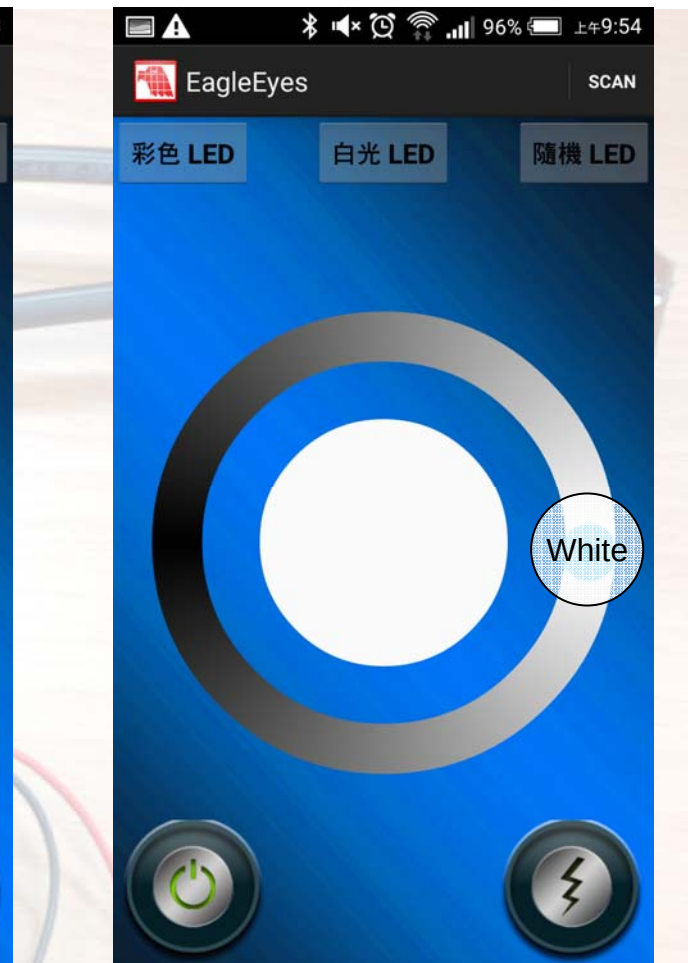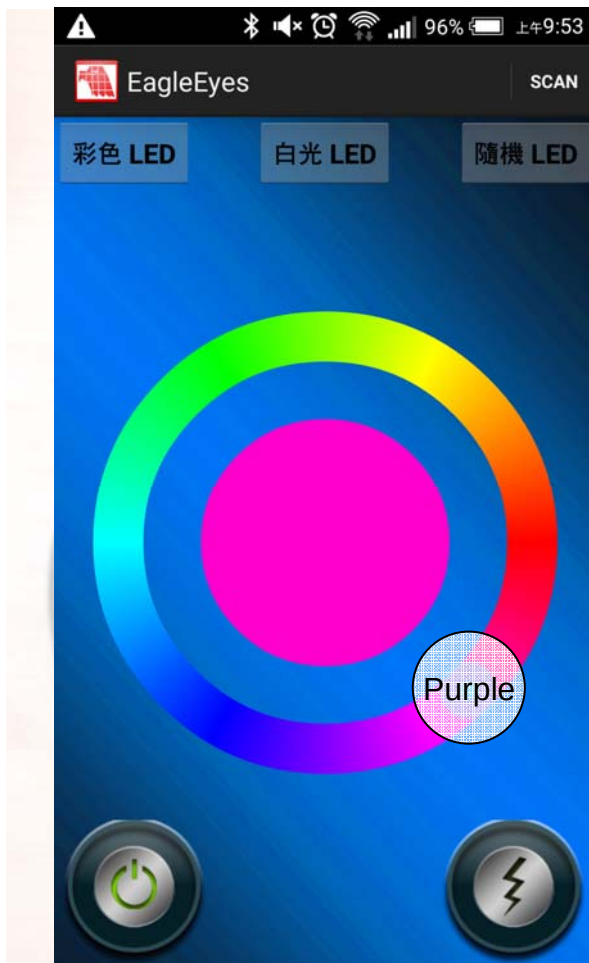

FCC/IC Caution:

1. This device complies with Part 15 of the FCC rules/ Industry Canada licence-exempt RSS standard(s).
Operation is subject to the following two conditions :
 - 1) this device may not cause harmful interference and
 - 2) this device must accept any interference received, including interference that may cause undesired operation.
2. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
3. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

IMPORTANT NOTE : (For Mobile Device Configuration)

FCC Radiation Exposure Statement:

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.