



TEST REPORT

Applicant: PRADCO Outdoor Brands

Address: 5724 Highway 280 East Birmingham, Alabama
35242, United States

Equipment Type: Cellular Trail Camera

Model Name: MCAM4(refer to section 2.3)

Brand Name: Moultrie

FCC ID: 2AJQ6MCAM4

ISED Number: 27066-MCAM4

Test Standard: 47 CFR Part 15 Subpart B
ICES-003 Issue 7
ANSI C63.4-2014

Sample Arrival Date: Feb. 26, 2026

Test Date: Feb. 26, 2026 - Feb. 27, 2026

Date of Issue: Apr. 01, 2026

ISSUED BY:

Shanghai Tejet Communications Technology Co., Ltd. Testing Center

**Prepared by:** Xiang Jibin**Reviewed by:** Huang Chengkun**Approved by:** Zhang Yanqing
(Laboratory Manager)

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Apr. 01, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION	4
1.1 Test Laboratory	4
1.2 Test Location	4
2 PRODUCT INFORMATION	5
2.1 Applicant Information	5
2.2 Manufacturer Information	5
2.3 General Description for Equipment under Test (EUT)	5
2.4 Ancillary Equipment	6
2.5 Technical Information	6
3 SUMMARY OF TEST RESULTS	7
3.1 Test Standards	7
3.2 Verdict	7
3.3 Test Uncertainty	8
3.4 Decision Rule	8
4 GENERAL TEST CONFIGURATIONS	9
4.1 Test Enclosure List	9
4.2 Test Configurations	9
4.3 Test Setups	10
5 TEST ITEMS	12
5.1 Emission Tests	12
5.1.1 Radiated emission	12
5.1.2 Conducted emission	15
ANNEX A TEST RESULTS AND TEST EQUIPMENT LIST	16
A.1 Radiated emission	16
A.2 Conducted emission	27

ANNEX B TEST SETUP PHOTOS	33
ANNEX C EUT EXTERNAL PHOTOS	33
ANNEX D EUT INTERNAL PHOTOS	33

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Address	1-2/F., Building 1, No.222, Xuanlan Road, Xuanqiao, Pudong New District, Shanghai, China

1.2 Test Location

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Location	1-2/F., Building 1, No.222, Xuanlan Road, Xuanqiao, Pudong New District, Shanghai, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1352. The laboratory is a testing organization accredited by ISED as a accredited testing laboratory. The company number is 29671 and CAB identifier number is CN0142.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	PRADCO Outdoor Brands
Address	5724 Highway 280 East Birmingham, Alabama 35242, United States

2.2 Manufacturer Information

Manufacturer	SERCOMM CORPORATION
Address	8F, 3-1, YuanQu St., NanKang, Taipei 115, Taiwan

2.3 General Description for Equipment under Test (EUT)

Equipment Type	Cellular Trail Camera
Model Name Under Test	MCAM4
Series Model Name	N/A
Description of Model Name Differentiation	N/A
Hardware Version	Cut3
Software Version	1.03.08
Dimensions (Approx.)	L: 139 mm * W: 108.53 mm * H: 88.8 mm
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment	Lithium Battery	
	Brand Name	N/A
	Model No.	PG-2284
	Serial No.	N/A
	Capacity	2600 mAh
	Rated Voltage	10.8 V
	Limit Charge Voltage	12.6 V

2.5 Technical Information

Network and wireless connectivity	4G Network FDD LTE Band2/4/5/12/13/66 Bluetooth (BLE), GPS
Classification of equipment	Class B
Highest frequency generated or used in the device or on which the device operates or tunes(MHz)	2483.5 MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ICES-003 Issue 7	Information Technology Equipment (Including Digital Apparatus)
3	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	ISED Rule	Test Verdict	Remark
1	Radiated Emission	15.109	ICES-003, 3.2.2	Pass	--
2	Conducted Emission, AC Ports	15.107	ICES-003, 3.2.1	Pass	--

Note: Customer declaration, three configures is the same, except for below. This report data focuses on the Configure1 and 2. (This information provided by the customer.)

Item	Configure1	Configure2	Configure3
Marketing SKU	MMC-14227	MMC-14269	MMC-14250
Exterior color	Brown	Brown	Camouflage pattern
Power Supply	AA battery tray	Solar panel + Recharge Battery Pack	Solar panel + Recharge Battery Pack

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions (150 kHz-30 MHz)-AMN	2.6 dB
Radiated emissions (30 MHz-1 GHz)-966#1	4.2 dB
Radiated emissions (1 GHz-6 GHz) -966#1	5.3 dB

3.4 Decision Rule

- ☐ No Need
- ☒ Use General Conformity Decision Rule (Consider uncertainty or not ☒ No ☐ Yes)
- ☐ Use Special Conformity Decision Rule (Consider uncertainty or not ☐ No ☐ Yes)

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Battery	N/A	N/A	N/A	N/A	1.5V	☒
Adapter	N/A	N/A	N/A	N/A	N/A	☒
USB cable	N/A	N/A	N/A	N/A	N/A	☒

4.2 Test Configurations


All test modes of EUT are listed in the table below.

Test Mode Configuration	Description
Mode 1	<u>The Full System Test Mode</u> EUT + Battery
Mode 2	<u>The Full System Test Mode</u> EUT + Lithium Battery + Solar Panel
Mode 3	<u>The Full System Test Mode</u> EUT + Lithium Battery + Solar Panel + Adapter + USB cable
Mode 4	<u>The Full System Test Mode</u> EUT + Battery + Adapter + USB cable


Test Case	Test Mode Configuration	Worst Mode
Radiated emission	Mode 1~Mode 4	1,2
Conducted emission	Mode 3~Mode 4	3,4

4.3 Test Setups


Test Setup 1

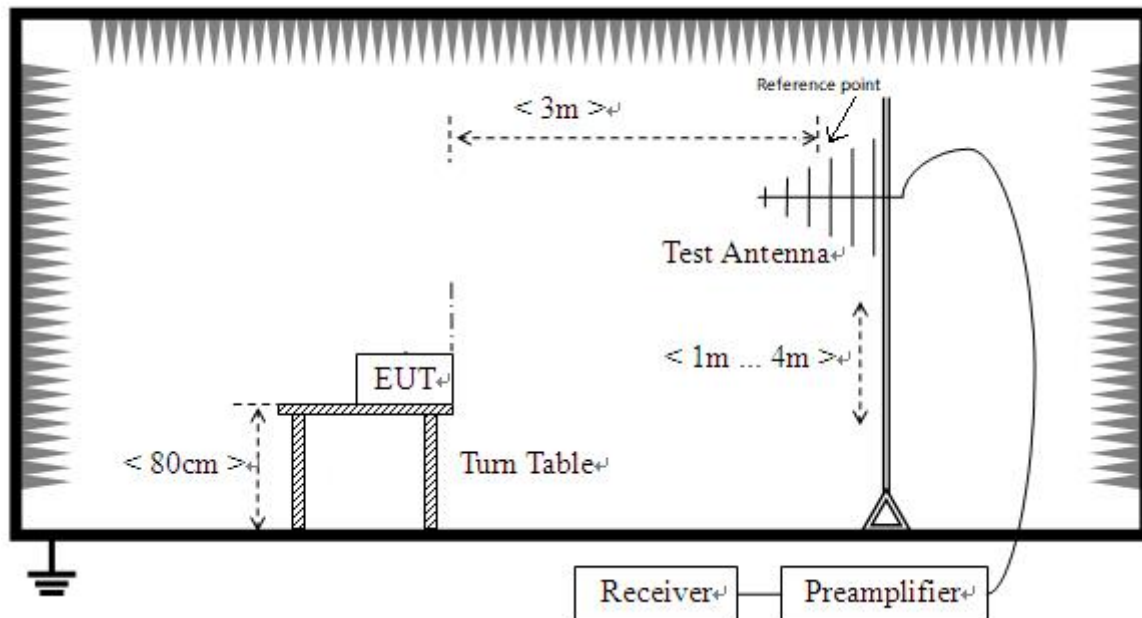

Radiated Emission (30 MHz-1 GHz)

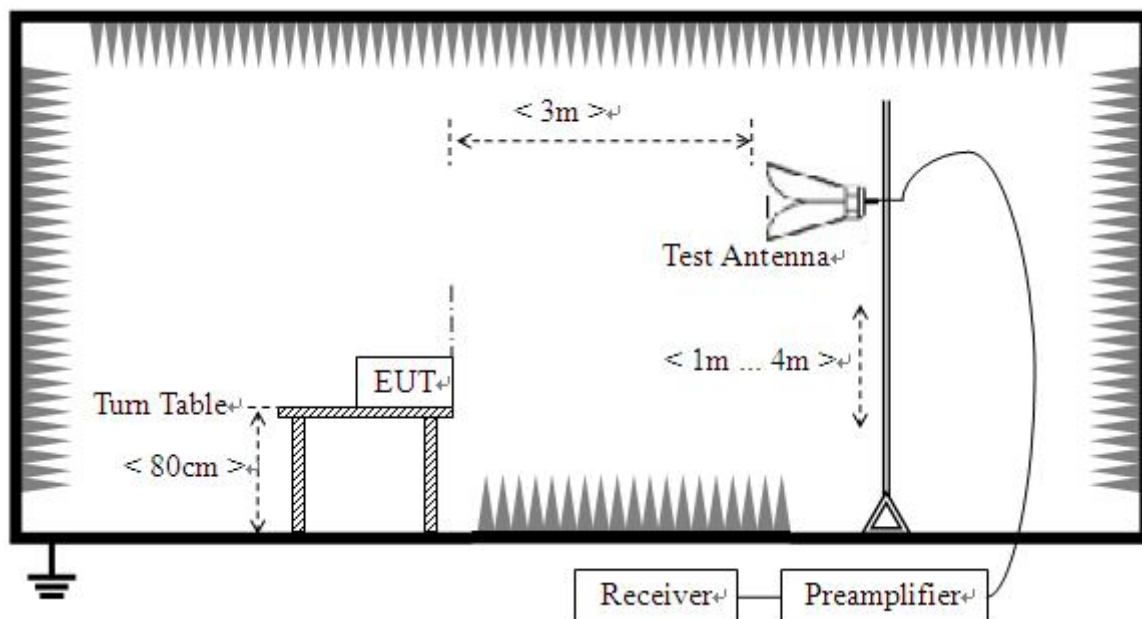

Radiated Emission (above 1 GHz)

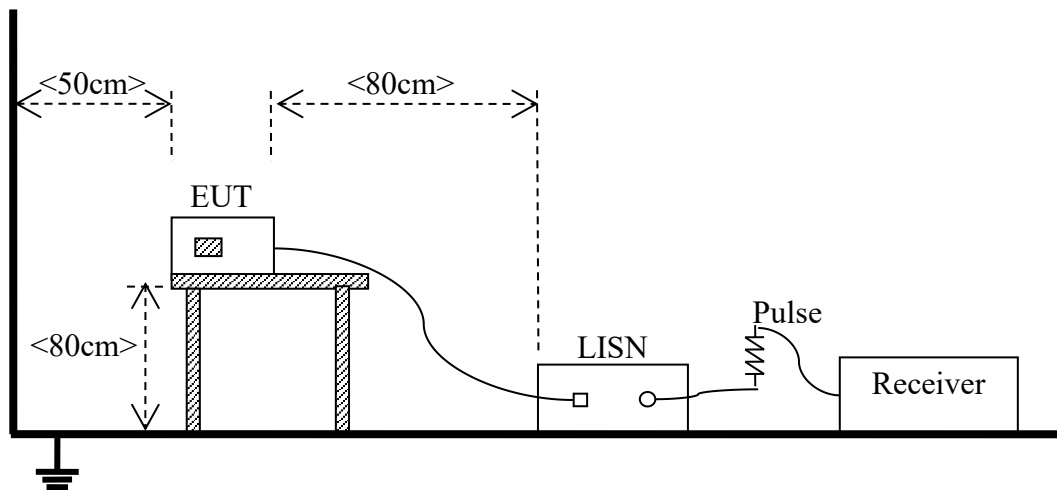Test Setup 2

Conducted emission, AC ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated emission

5.1.1.1 Limit

FCC:

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

Note:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) The limits using ANSI C63.4-2014.
- 4) For 30-1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$$

Where:

L_{3m} is Average Class A limit at 3m;

L_{10m} is Average Class A limit at 10m;

d_{10m} is Measurement distance in 10m;

d_{3m} is Measurement distance in 3m.

For this case: $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

ISED:

Frequency range (MHz)	Class A (at 3 m) Quasi-peak (dB μ V/m)	Class B (at 3 m) Quasi-peak (dB μ V/m)
30 - 88	50.0	40.0
88 - 216	54.0	43.5
216 - 230	56.9	46.0
230 - 960	57.0	47.0
960 - 1000	60.0	54.0
Note: The more stringent limit applies at transition frequencies.		

Frequency range (GHz)	Class A (3 m) Average (dB μ V/m)	Class A (3 m) Peak (dB μ V/m)	Class B (3 m) Average (dB μ V/m)	Class B (3 m) Peak (dB μ V/m)
1 - F_M	60	80	54	74
Note: 1. The highest measurement frequency, F_M , in GHz, shall be determined as next Table. 2. The measurement bandwidth shall be 1 MHz or greater. 3. These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test. 4. The test site shall have been validated at the distance used for radiated emission measurements on the ITE or digital apparatus under test				

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ up to a maximum of 40 GHz
Note: F_X is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.	

5.1.1.2 Test setup

Please refer to 4.2 section description of test setup of test setup 1. The photo of test setup please refer to ANNEX B.

5.1.1.3 Test procedure

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);
2. All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.
3. An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.
4. The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.
5. Use the following spectrum analyzer settings:
 Span = wide enough to fully capture the emission being measured
 RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$
 VBW $\geq$ RBW
 Sweep = auto
 Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$
 Trace = max hold

5.1.1.4 Test result and test equipment list

Please refer to ANNEX A.1.

Note:

1. Results (dB μ V/m) = Reading (dB μ V/m) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)
3. Margin = Limit – Results

5.1.2 Conducted emission

5.1.2.1 Limit

Frequency range (MHz)	Class A		Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66	66 to 56	56 to 46
0.50 - 5	73	60	56	46
5 - 30	73	60	60	50

Note:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.
- 3) The limit using ANSI C63.4.

5.1.2.2 Test setup

Please refer to 4.2 section description of test setup of test setup 2. The photo of test setup please refer to ANNEX B.

5.1.2.3 Test procedure

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);
2. The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.
3. Use the following spectrum analyzer settings:
 RBW = 9 kHz
 VBW $\geq$ RBW
 Sweep = 10ms
 Detector function = Peak & Average
 Trace = max hold

5.1.2.4 Test result and test equipment list

Please refer to ANNEX A.2.

Note:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit – Results

ANNEX A TEST RESULTS AND TEST EQUIPMENT LIST

A.1 Radiated emission

Note 1: Measurements shall be made with a quasi-peak measuring receiver in the frequency range 30 MHz to 1000 MHz. To reduce the testing time, a peak measuring receiver may be used instead of a quasi-peak measuring receiver. In case of dispute, measurement with a quasi-peak measuring receiver will take precedence.


Note 2: The FCC limit is stricter than the IC and only reflects FCC Radiated Emission test data.

Sample No.	CC26020167-001-A07	Temperature	21.7°C
Humidity	51%RH	Test Voltage	DC 12V
Test Engineer	She Xihao	Test Date	2026.02.26

Test Mode 1

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz (FCC)


RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

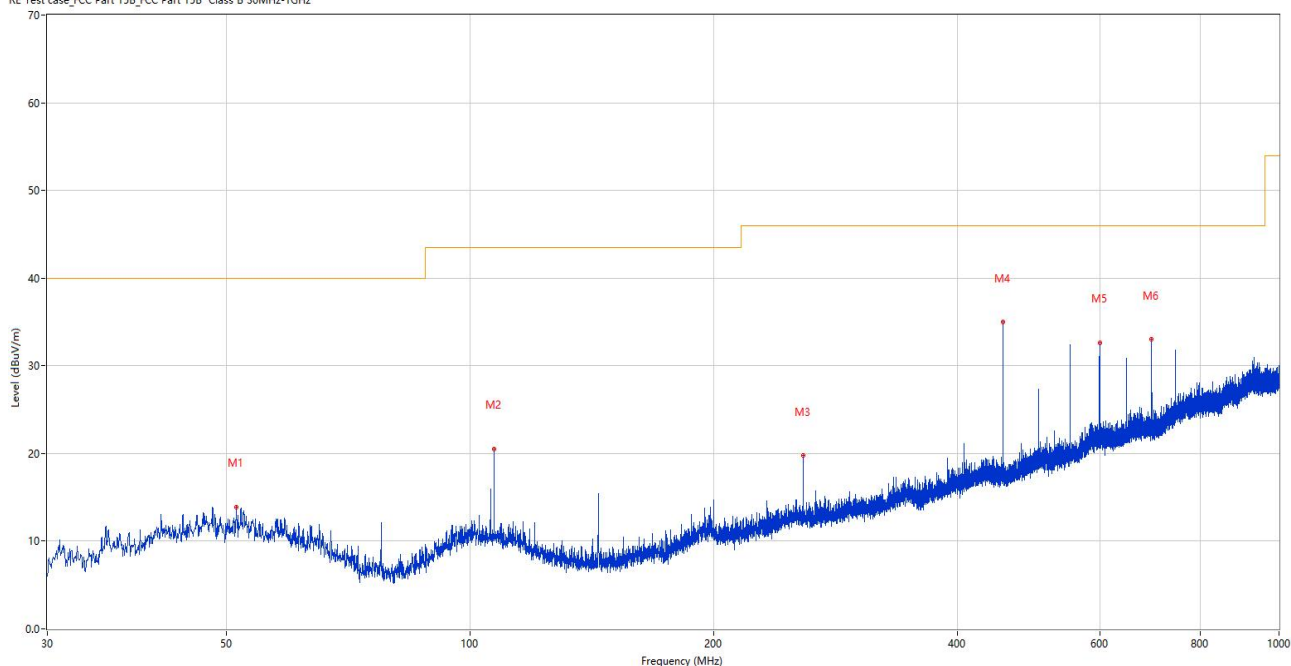

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	51.389	13.91	-25.71	40.0	26.09	Peak	153.00	200	Vertical	Pass
2	107.018	20.55	-27.04	43.5	22.95	Peak	300.00	200	Vertical	Pass
3	257.901	19.77	-24.82	46.0	26.23	Peak	235.00	100	Vertical	Pass
4	456.024	35.01	-19.99	46.0	10.99	Peak	198.00	100	Vertical	Pass
5	600.020	32.67	-15.67	46.0	13.33	Peak	24.00	200	Vertical	Pass
6	696.002	32.99	-14.49	46.0	13.01	Peak	13.00	200	Vertical	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz (FCC)

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

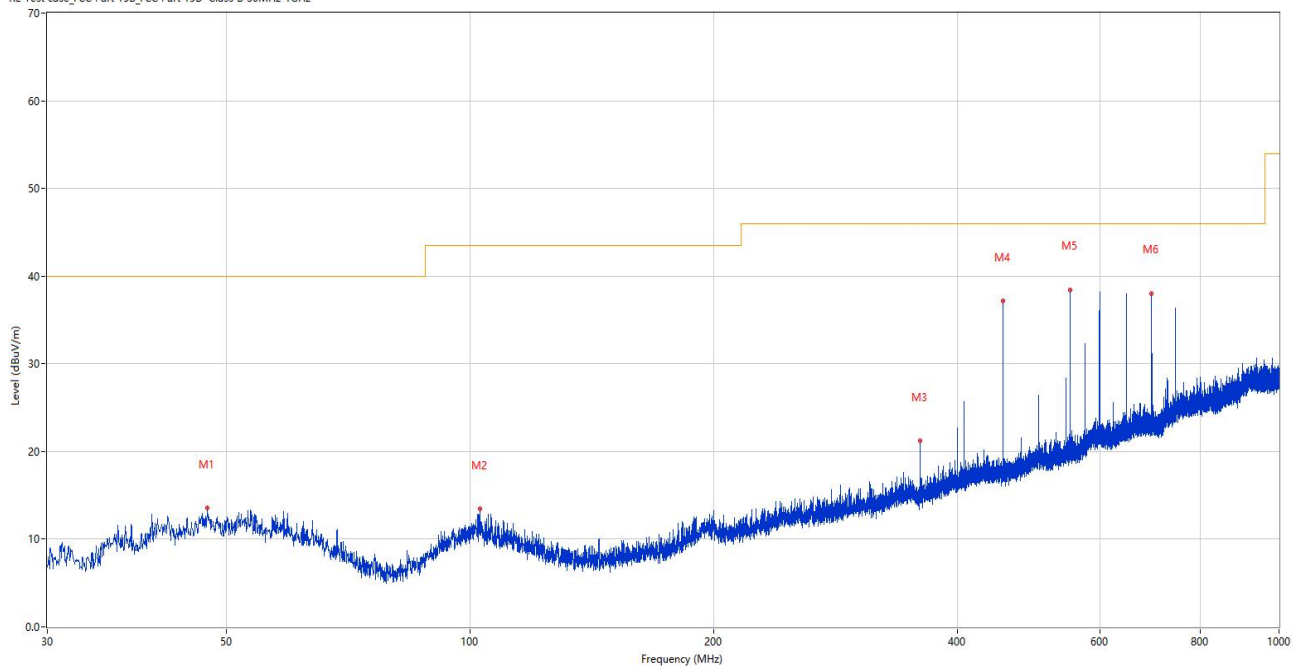


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.315	13.52	-25.78	40.0	26.48	Peak	4.00	200	Horizontal	Pass
2	102.896	13.44	-26.78	43.5	30.06	Peak	193.00	200	Horizontal	Pass
3	359.994	21.18	-22.52	46.0	24.82	Peak	273.00	100	Horizontal	Pass
4	456.024	37.19	-19.99	46.0	8.81	Peak	340.00	200	Horizontal	Pass
5	552.006	38.46	-17.59	46.0	7.54	Peak	267.00	100	Horizontal	Pass
6	696.002	38.01	-14.49	46.0	7.99	Peak	270.00	100	Horizontal	Pass

Test Mode 2

A.1.3 Test Antenna Vertical, 30 MHz – 1 GHz (FCC)


RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

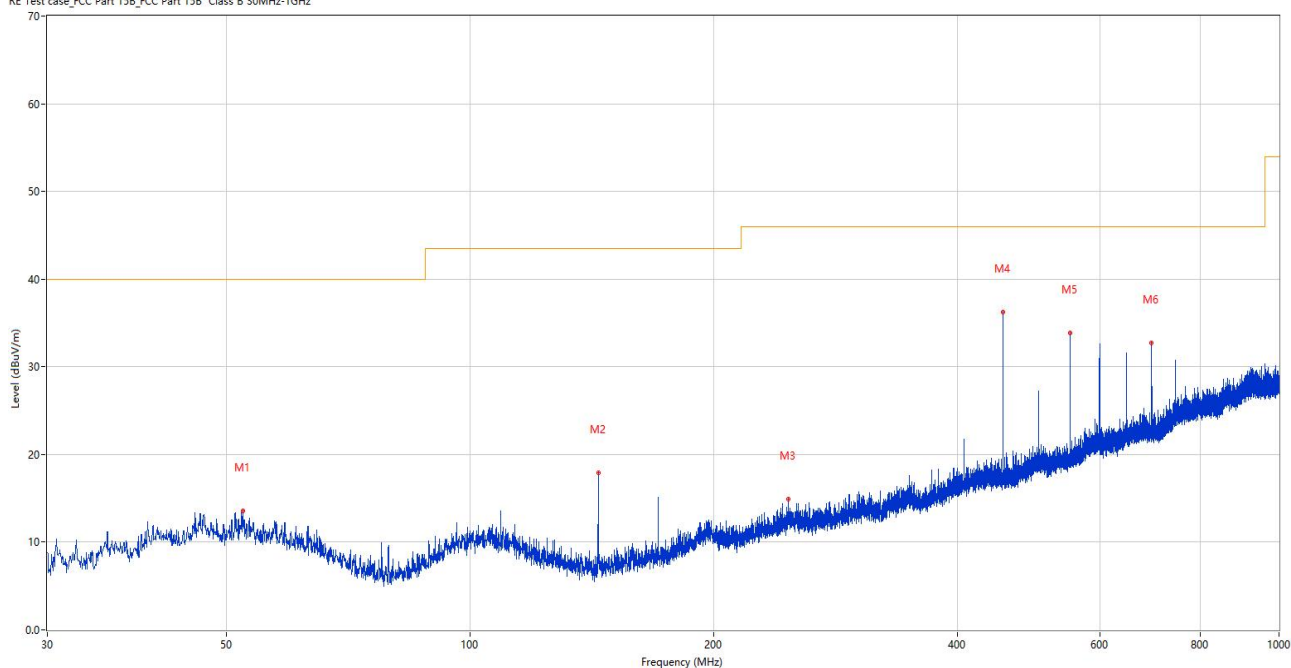

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	52.310	13.53	-25.75	40.0	26.47	Peak	99.00	200	Vertical	Pass
2	144.024	17.90	-30.28	43.5	25.60	Peak	147.00	100	Vertical	Pass
3	247.329	14.90	-24.91	46.0	31.10	Peak	43.00	100	Vertical	Pass
4	456.024	36.20	-19.99	46.0	9.80	Peak	188.00	100	Vertical	Pass
5	552.006	33.90	-17.59	46.0	12.10	Peak	9.00	200	Vertical	Pass
6	696.002	32.70	-14.49	46.0	13.30	Peak	244.00	100	Vertical	Pass

A.1.4 Test Antenna Horizontal, 30 MHz – 1 GHz (FCC)

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

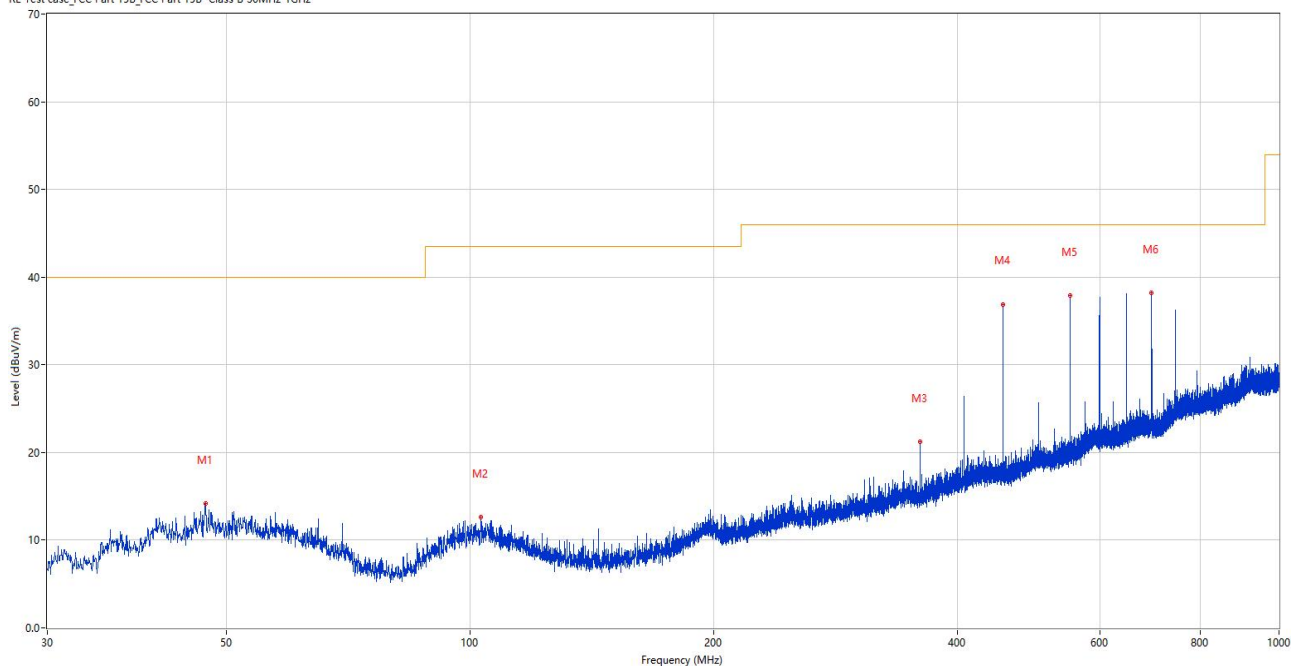

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.072	14.21	-25.80	40.0	25.79	Peak	43.00	200	Horizontal	Pass
2	102.944	12.60	-26.78	43.5	30.90	Peak	181.00	100	Horizontal	Pass
3	359.994	21.23	-22.52	46.0	24.77	Peak	250.00	100	Horizontal	Pass
4	456.024	36.90	-19.99	46.0	9.10	Peak	348.00	200	Horizontal	Pass
5	552.006	37.87	-17.59	46.0	8.13	Peak	122.00	100	Horizontal	Pass
6	696.002	38.19	-14.49	46.0	7.81	Peak	275.00	100	Horizontal	Pass


Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L127	2026.02.05	2027.02.04	☒
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	BH-EMC-L132	2024.03.11	2027.03.10	☒
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		☒

Sample No.	CC26020167-001-A07	Temperature	21.7°C
Humidity	51%RH	Test Voltage	DC 12V
Test Engineer	She Xihao	Test Date	2026.02.26

Test Mode 1

A.1.5 Test Antenna Vertical, 1 GHz – 18 GHz


RE Test case FCC Part 15B_FCC Part 15B Class B 1GHz-18GHz

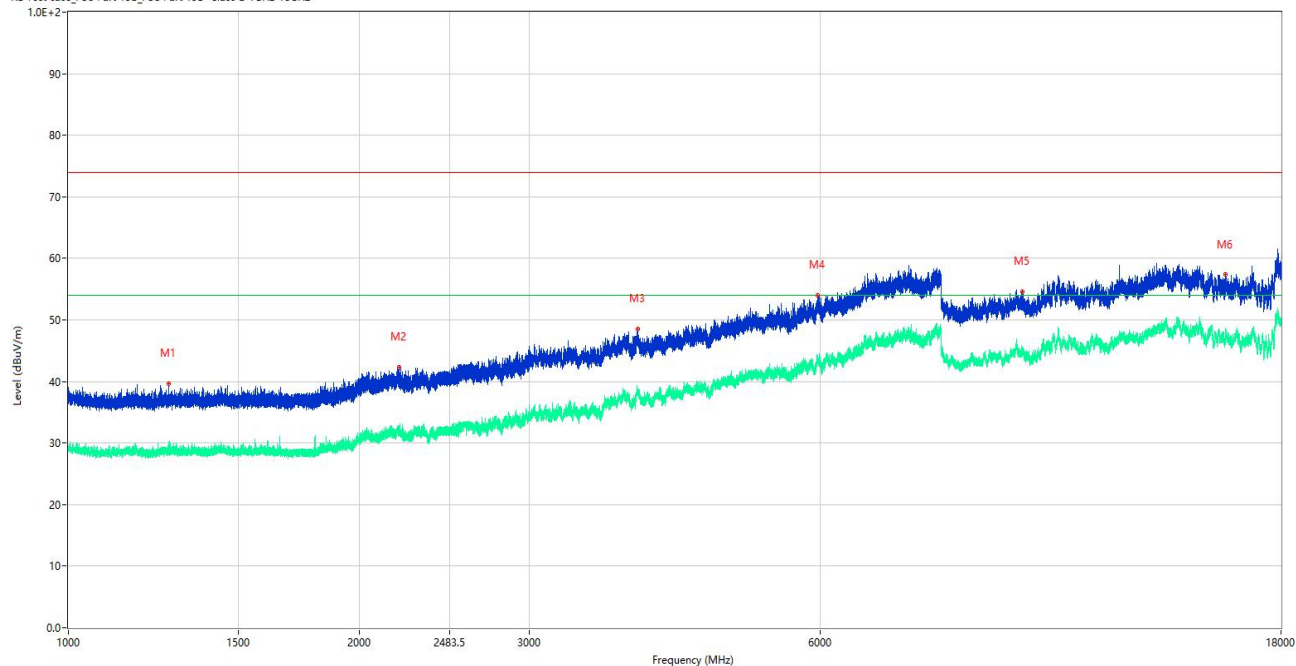

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1270.900	39.57	-15.90	74.0	34.43	Peak	311.00	100	Vertical	Pass
1**	1270.900	28.64	-15.90	54.0	25.36	AV	311.00	100	Vertical	Pass
2	2200.700	42.30	-12.75	74.0	31.70	Peak	11.00	100	Vertical	Pass
2**	2200.700	31.37	-12.75	54.0	22.63	AV	11.00	100	Vertical	Pass
3	3888.500	48.48	-3.03	74.0	25.52	Peak	344.00	100	Vertical	Pass
3**	3888.500	38.03	-3.03	54.0	15.97	AV	344.00	100	Vertical	Pass
4	5965.250	53.93	2.06	74.0	20.07	Peak	186.00	100	Vertical	Pass
4**	5965.250	43.52	2.06	54.0	10.48	AV	186.00	100	Vertical	Pass
5	9713.000	54.61	2.09	74.0	19.39	Peak	64.00	100	Vertical	Pass
5**	9713.000	44.59	2.09	54.0	9.41	AV	64.00	100	Vertical	Pass
6	15773.500	57.36	6.25	74.0	16.64	Peak	96.00	100	Vertical	Pass
6**	15773.500	48.00	6.25	54.0	6.00	AV	96.00	100	Vertical	Pass

A.1.6 Test Antenna Horizontal, 1 GHz – 18 GHz

RE Test case_FCC Part 15B_FCC Part 15B Class B 1GHz-18GHz

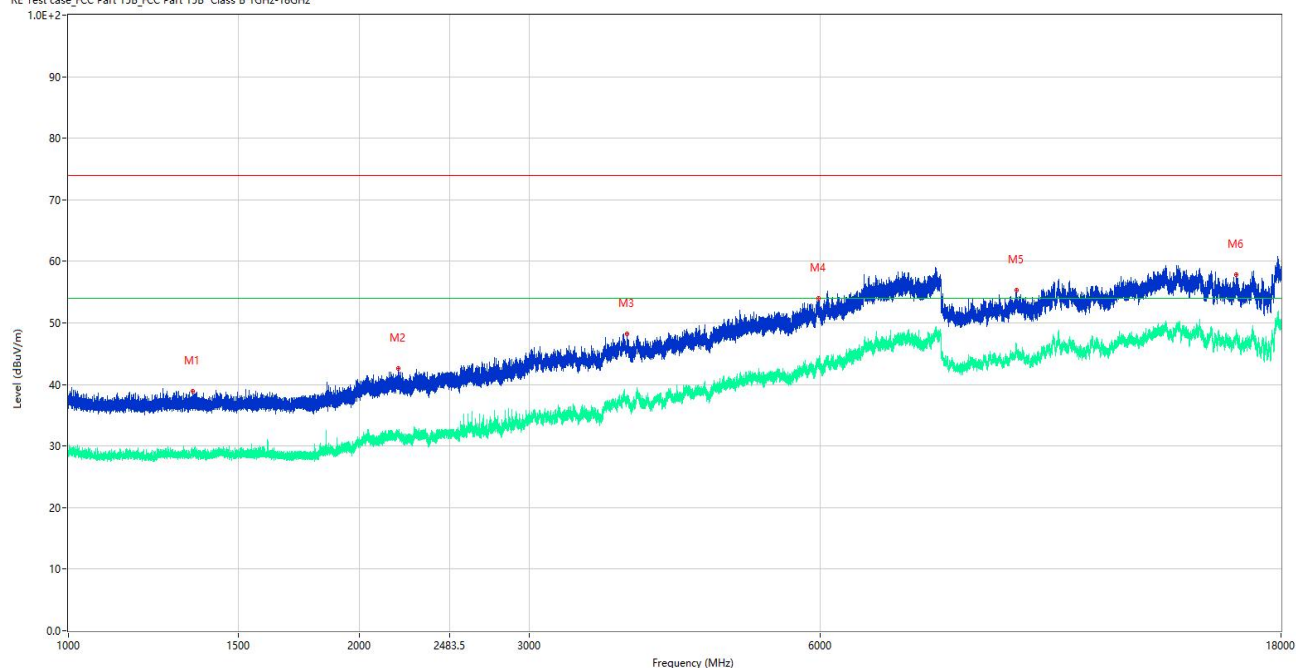


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1344.400	38.94	-15.92	74.0	35.06	Peak	285.00	100	Horizontal	Pass
1**	1344.400	29.07	-15.92	54.0	24.93	AV	285.00	100	Horizontal	Pass
2	2197.300	42.55	-12.74	74.0	31.45	Peak	264.00	100	Horizontal	Pass
2**	2197.300	32.17	-12.74	54.0	21.83	AV	264.00	100	Horizontal	Pass
3	3789.250	48.21	-3.88	74.0	25.79	Peak	106.00	100	Horizontal	Pass
3**	3789.250	37.42	-3.88	54.0	16.58	AV	106.00	100	Horizontal	Pass
4	5974.000	53.94	1.99	74.0	20.06	Peak	210.00	100	Horizontal	Pass
4**	5974.000	43.61	1.99	54.0	10.39	AV	210.00	100	Horizontal	Pass
5	9591.500	55.29	2.99	74.0	18.71	Peak	237.00	100	Horizontal	Pass
5**	9591.500	45.28	2.99	54.0	8.72	AV	237.00	100	Horizontal	Pass
6	16166.500	57.77	6.03	74.0	16.23	Peak	13.00	100	Horizontal	Pass
6**	16166.500	47.32	6.03	54.0	6.68	AV	13.00	100	Horizontal	Pass

Test Mode 2

A.1.7 Test Antenna Vertical, 1 GHz – 18 GHz


RE Test case_FCC Part 15B_FCC Part 15B Class B 1GHz-18GHz

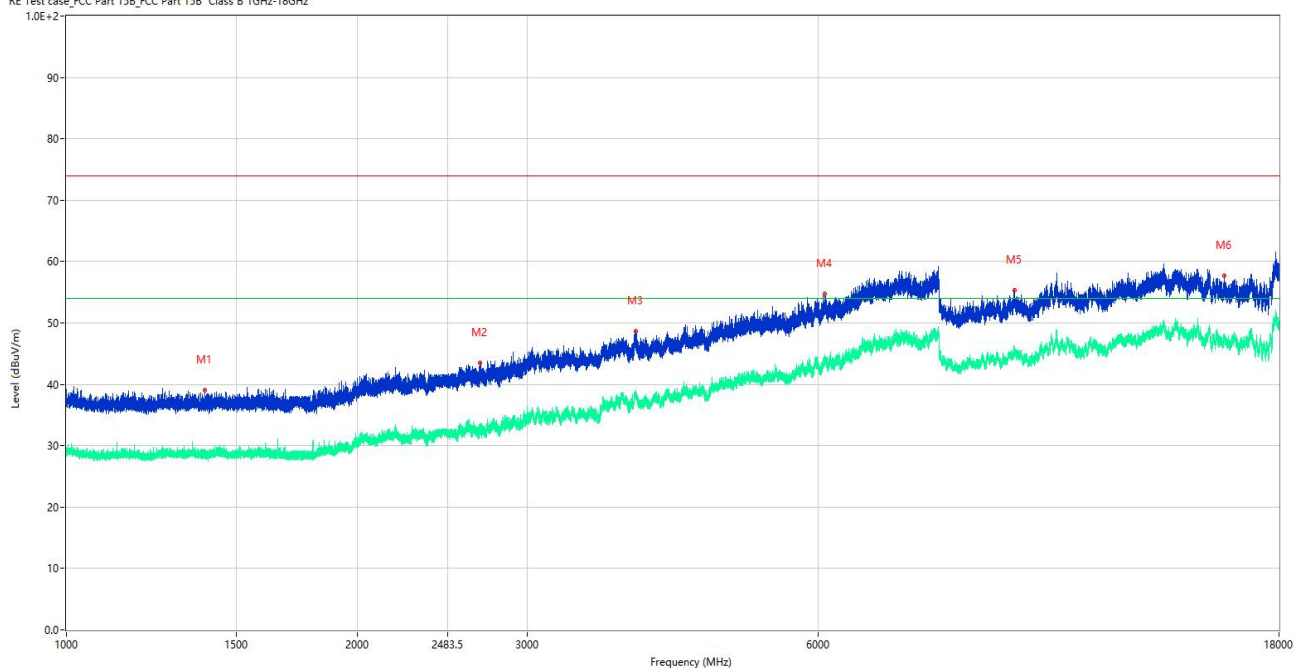

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1391.200	39.02	-16.27	74.0	34.98	Peak	248.00	100	Vertical	Pass
1**	1391.200	28.39	-16.27	54.0	25.61	AV	248.00	100	Vertical	Pass
2	2678.800	43.48	-10.13	74.0	30.52	Peak	169.00	100	Vertical	Pass
2**	2678.800	32.93	-10.13	54.0	21.07	AV	169.00	100	Vertical	Pass
3	3886.750	48.70	-2.94	74.0	25.30	Peak	270.00	100	Vertical	Pass
3**	3886.750	37.94	-2.94	54.0	16.06	AV	270.00	100	Vertical	Pass
4	6102.250	54.74	1.83	74.0	19.26	Peak	230.00	100	Vertical	Pass
4**	6102.250	44.87	1.83	54.0	9.13	AV	230.00	100	Vertical	Pass
5	9588.000	55.32	3.03	74.0	18.68	Peak	205.00	100	Vertical	Pass
5**	9588.000	45.16	3.03	54.0	8.84	AV	205.00	100	Vertical	Pass
6	15788.000	57.67	6.38	74.0	16.33	Peak	360.00	100	Vertical	Pass
6**	15788.000	47.76	6.38	54.0	6.24	AV	360.00	100	Vertical	Pass

A.1.8 Test Antenna Horizontal, 1 GHz – 18 GHz

RE Test case_FCC Part 15B_FCC Part 15B Class B 1GHz-18GHz

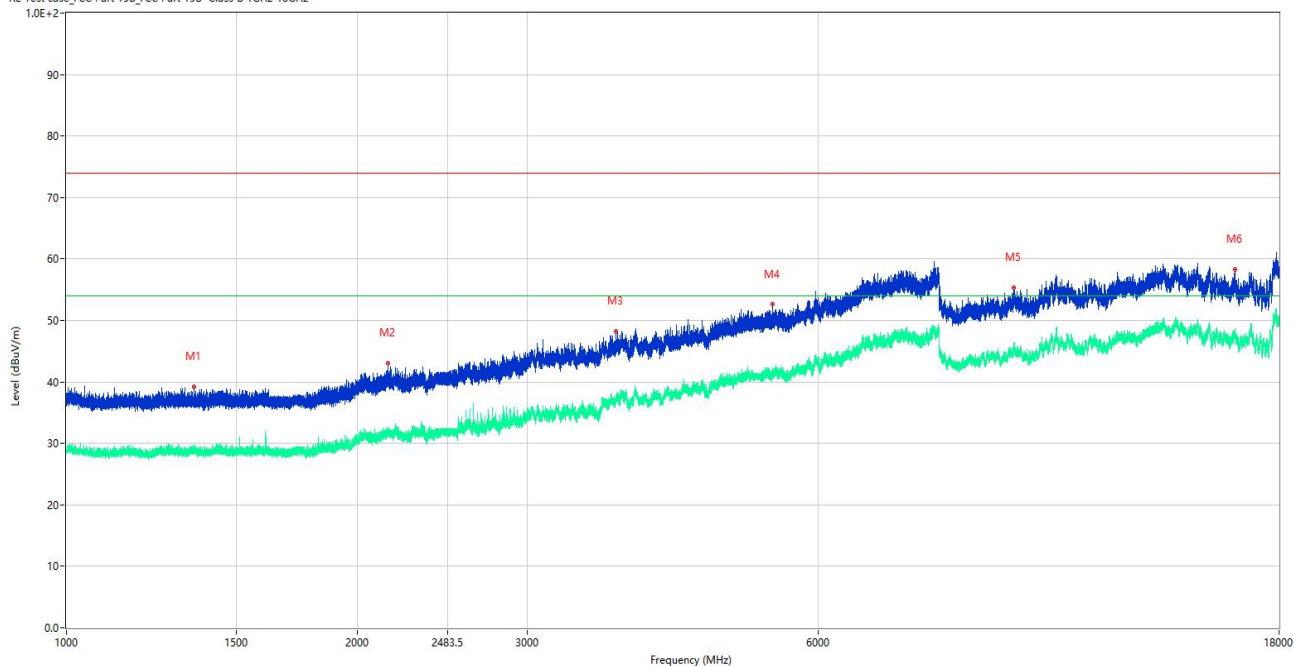

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1356.200	39.19	-15.87	74.0	34.81	Peak	49.00	100	Horizontal	Pass
1**	1356.200	29.08	-15.87	54.0	24.92	AV	49.00	100	Horizontal	Pass
2	2150.600	43.10	-13.02	74.0	30.90	Peak	145.00	100	Horizontal	Pass
2**	2150.600	31.78	-13.02	54.0	22.22	AV	145.00	100	Horizontal	Pass
3	3706.000	48.20	-4.01	74.0	25.80	Peak	323.00	100	Horizontal	Pass
3**	3706.000	37.47	-4.01	54.0	16.53	AV	323.00	100	Horizontal	Pass
4	5387.500	52.65	-0.15	74.0	21.35	Peak	111.00	100	Horizontal	Pass
4**	5387.500	40.88	-0.15	54.0	13.12	AV	111.00	100	Horizontal	Pass
5	9567.500	55.30	3.19	74.0	18.70	Peak	63.00	100	Horizontal	Pass
5**	9567.500	45.66	3.19	54.0	8.34	AV	63.00	100	Horizontal	Pass
6	16201.500	58.33	6.39	74.0	15.67	Peak	243.00	100	Horizontal	Pass
6**	16201.500	47.52	6.39	54.0	6.48	AV	243.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L127	2026.02.05	2027.02.04	☒
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	BH-EMC-L111	2024.03.11	2027.03.10	☒
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		☒


A.2 Conducted emission

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Sample No.	CC26020167-001-A07	Temperature	21.0°C
Humidity	49%RH	Test Voltage	AC 120V/60Hz
Test Engineer	She Xihao	Test Date	2026.02.26

Test Mode 3


A.2.1 AC ports - L Phase

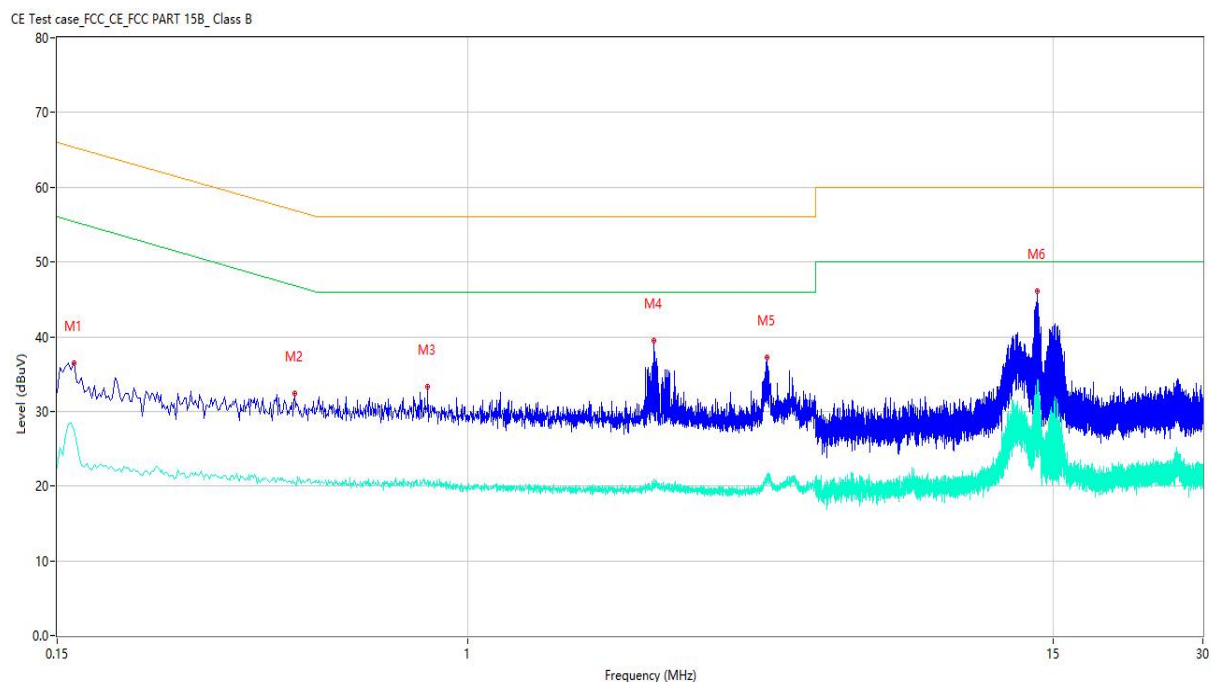

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.162	36.47	10.07	65.36	28.89	Peak	L	Pass
1**	0.162	27.64	10.07	55.36	27.72	AV	L	Pass
2	0.450	32.38	10.14	56.88	24.50	Peak	L	Pass
2**	0.450	20.49	10.14	46.88	26.39	AV	L	Pass
3	0.832	33.22	10.21	56.00	22.78	Peak	L	Pass
3**	0.832	20.74	10.21	46.00	25.26	AV	L	Pass
4	2.368	39.41	10.37	56.00	16.59	Peak	L	Pass
4**	2.368	20.91	10.37	46.00	25.09	AV	L	Pass
5	4.002	37.17	10.42	56.00	18.83	Peak	L	Pass
5**	4.002	21.58	10.42	46.00	24.42	AV	L	Pass
6	13.960	46.13	11.13	60.00	13.87	Peak	L	Pass
6**	13.960	33.96	11.13	50.00	16.04	AV	L	Pass

A.2.2 AC ports - N Phase


CE Test case_FCC_CE_FCC PART 15B_Class B

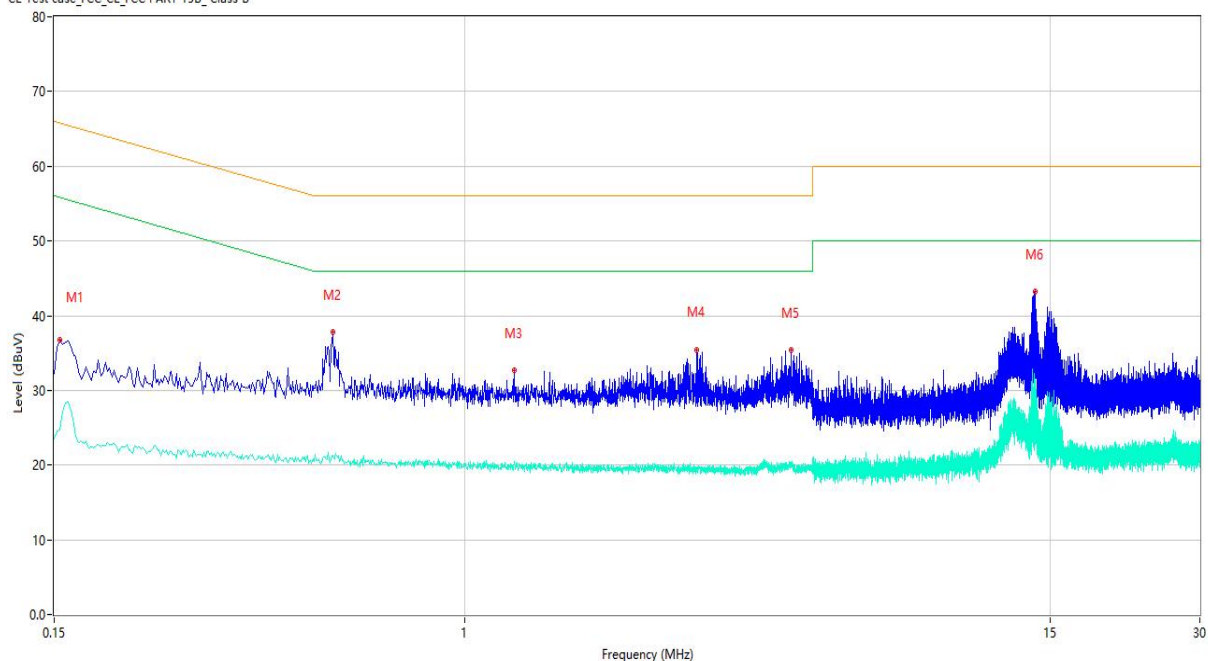

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	36.75	10.15	65.78	29.03	Peak	N	Pass
1**	0.154	24.76	10.15	55.78	31.02	AV	N	Pass
2	0.544	37.84	10.18	56.00	18.16	Peak	N	Pass
2**	0.544	21.26	10.18	46.00	24.74	AV	N	Pass
3	1.262	32.74	10.25	56.00	23.26	Peak	N	Pass
3**	1.262	20.47	10.25	46.00	25.53	AV	N	Pass
4	2.924	35.46	10.30	56.00	20.54	Peak	N	Pass
4**	2.924	19.75	10.30	46.00	26.25	AV	N	Pass
5	4.526	35.42	10.41	56.00	20.58	Peak	N	Pass
5**	4.526	19.99	10.41	46.00	26.01	AV	N	Pass
6	13.986	43.21	11.09	60.00	16.79	Peak	N	Pass
6**	13.986	30.06	11.09	50.00	19.94	AV	N	Pass

Test Mode 4


A.2.3 AC ports - L Phase

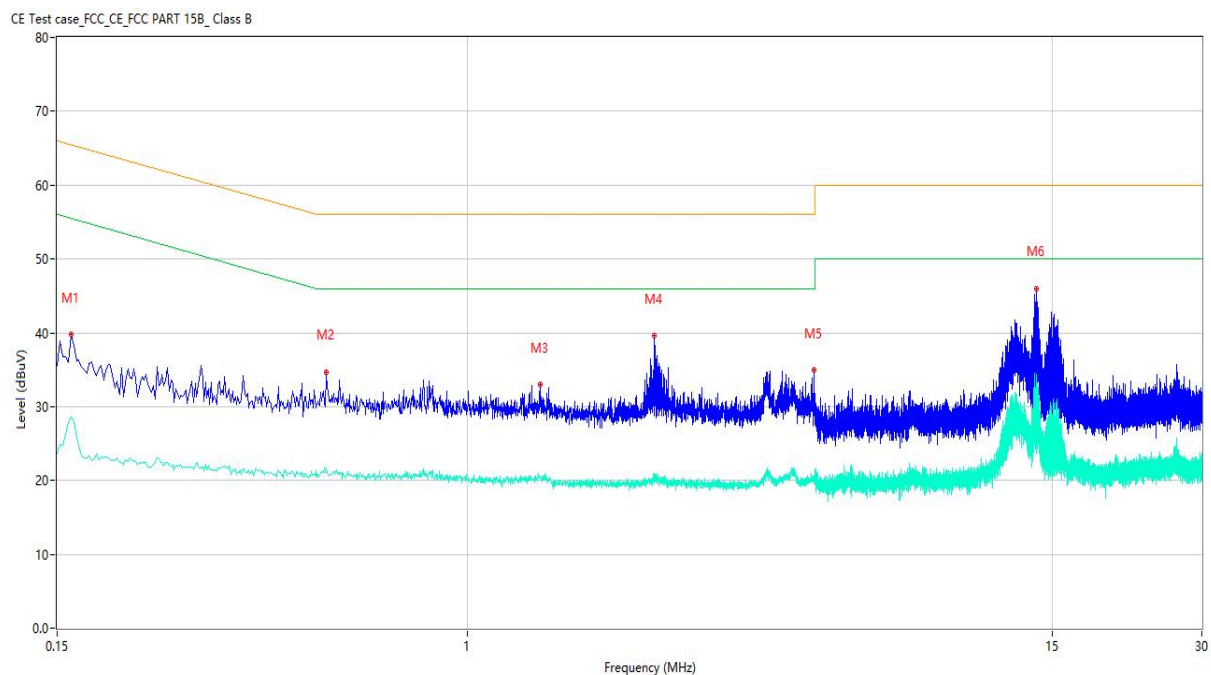

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.160	39.78	10.07	65.46	25.68	Peak	L	Pass
1**	0.160	28.66	10.07	55.46	26.80	AV	L	Pass
2	0.522	34.71	10.16	56.00	21.29	Peak	L	Pass
2**	0.522	21.64	10.16	46.00	24.36	AV	L	Pass
3	1.406	32.96	10.25	56.00	23.04	Peak	L	Pass
3**	1.406	20.38	10.25	46.00	25.62	AV	L	Pass
4	2.382	39.63	10.37	56.00	16.37	Peak	L	Pass
4**	2.382	20.27	10.37	46.00	25.73	AV	L	Pass
5	4.976	34.88	10.44	56.00	21.12	Peak	L	Pass
5**	4.976	19.91	10.44	46.00	26.09	AV	L	Pass
6	13.962	46.01	11.13	60.00	13.99	Peak	L	Pass
6**	13.962	34.35	11.13	50.00	15.65	AV	L	Pass

A.2.4 AC ports - N Phase

CE Test case_FCC_CE_FCC PART 15B_Class B

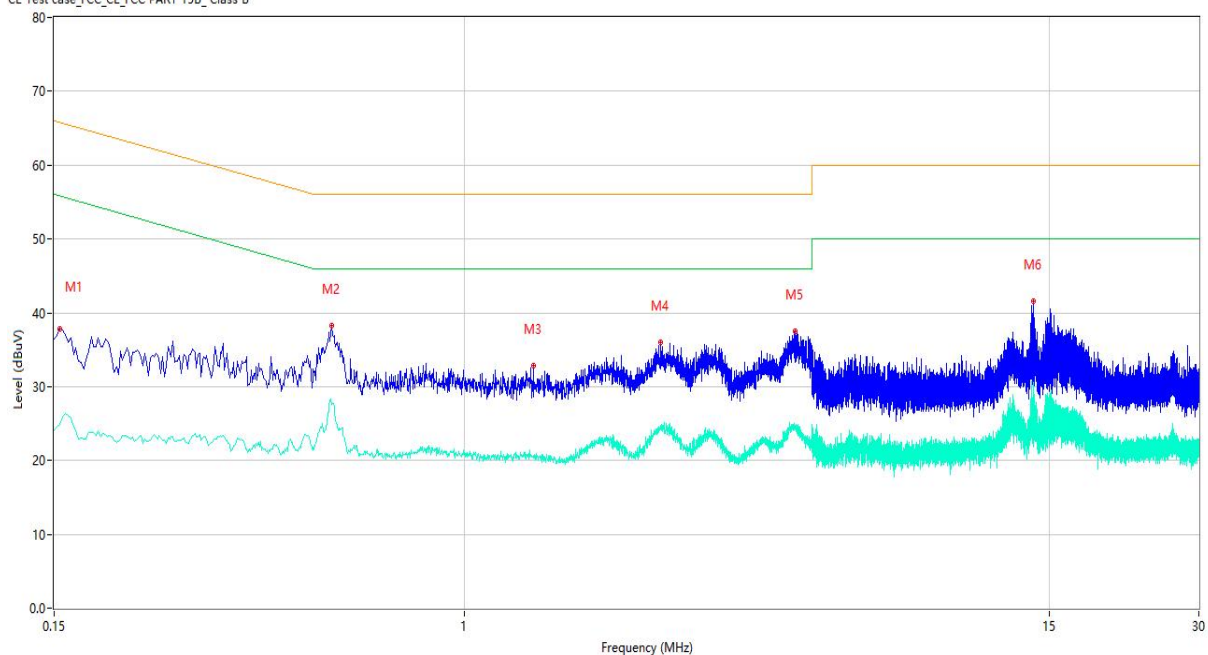

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	37.83	10.15	65.78	27.95	Peak	N	Pass
1**	0.154	24.81	10.15	55.78	30.97	AV	N	Pass
2	0.542	38.26	10.18	56.00	17.74	Peak	N	Pass
2**	0.542	27.60	10.18	46.00	18.40	AV	N	Pass
3	1.380	32.88	10.24	56.00	23.12	Peak	N	Pass
3**	1.380	20.69	10.24	46.00	25.31	AV	N	Pass
4	2.482	35.94	10.28	56.00	20.06	Peak	N	Pass
4**	2.482	24.26	10.28	46.00	21.74	AV	N	Pass
5	4.638	37.54	10.41	56.00	18.46	Peak	N	Pass
5**	4.638	24.49	10.41	46.00	21.51	AV	N	Pass
6	13.954	41.53	11.09	60.00	18.47	Peak	N	Pass
6**	13.954	30.57	11.09	50.00	19.43	AV	N	Pass

Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	TJEMC144	2026.02.04	2027.02.03	☒
LISN	SCHWARZBECK	NSLK 8127	BH-EMC-L011	2026.02.04	2027.02.03	☒
10dB Limiter	SCHWARZBECK	VTSD 9561-F	BH-EMC-L014	2026.02.04	2027.02.03	☒
Shielded Room	YiHeng	4.1m*4.0m*3.2m	BH-EMC-L006	2024.02.22	2027.02.21	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “Ti-CC26020184-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “Ti-CC26020184-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “Ti-CC26020184-AI.PDF”.

Statement

1. The Testing Center guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with Accreditation Symbol, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the Testing Center.
6. Any objection shall be raised to the Testing Center within 30 days after receiving the report.

--END OF REPORT--