

TEST REPORT

Report No.: 8432EU012723W2

Applicant: QUEST USA CORP

Address: 495 Flatbush Ave, Brooklyn, NY 11225, USA

Product Name: KLAZZO MULTI FUNCTIONAL CAR CHARGER

Model No.: IJ10821-DT

Trademark: IJOY

FCC ID: 2AJQ7KLAZZOMULTI

Test Standard(s): 47 CFR Part 15.239

Test Result: Pass

Date of Receipt: Aug. 26, 2026

Test Date: Aug. 26, 2026 - Sep. 21, 2026

Date of Issue: Sep. 22, 2026

ISSUED BY:

SHENZHEN EU TESTING LABORATORY LIMITED



Prepared by:

Peach Zheng

Peach Zheng/ Engineer

Reviewed and Approved by:

Sally Zhang

Sally Zhang/ Manager

Revision Record

Report Version	Issued Date	Description	Status
V0	Sep. 22, 2026	Original	Valid



Table of Contents

1	COVER PAGE	1
2	GENERAL INFORMATION	4
2.1	APPLICANT INFORMATION	4
2.2	MANUFACTURER INFORMATION	4
2.3	FACTORY INFORMATION	4
2.4	GENERAL DESCRIPTION OF E.U.T.	4
2.5	TECHNICAL INFORMATION OF E.U.T.....	5
3	TEST SUMMARY	6
3.1	TEST STANDARD	6
3.2	TEST VERDICT.....	6
3.3	TEST LABORATORY	6
4	TEST CONFIGURATION	7
4.1	TEST ENVIRONMENT	7
4.2	TEST EQUIPMENT	7
4.3	DESCRIPTION OF SUPPORT UNIT	9
4.4	TEST MODE	9
4.5	DESCRIPTION OF CALCULATION	9
4.5.1	Field Strength Calculation	9
4.5.2	Disturbance Calculation	9
4.6	MEASUREMENT UNCERTAINTY	10
4.7	DEVIATION FROM STANDARDS.....	10
4.8	ABNORMALITIES FROM STANDARD CONDITION.....	10
5	EVALUATION RESULTS (EVALUATION).....	11
5.1	ANTENNA REQUIREMENT.....	11
5.1.1	Test Specification	11
5.1.2	Test Data	11
6	RADIO SPECTRUM MATTER TEST RESULTS (RF).....	12
6.1	20dB BANDWIDTH.....	12
6.1.1	Test Specification	12
6.1.2	E.U.T. Operation.....	12
6.1.3	Test Setup Diagram.....	13
6.1.4	Test Data	13
6.2	FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND RADIATED SPURIOUS EMISSION	16
6.2.1	Test Specification	16
6.2.2	E.U.T. Operation.....	17
6.2.3	Test Setup Diagram.....	17
6.2.4	Test Data	18
ANNEX A	TEST SETUP PHOTOS	36
ANNEX B	EXTERNAL PHOTOS	36
ANNEX C	INTERNAL PHOTOS	36

2 General Information

2.1 Applicant Information

Applicant	QUEST USA CORP
Address	495 Flatbush Ave, Brooklyn, NY 11225, USA

2.2 Manufacturer Information

Manufacturer	NINGBO COMAX IMP.&EXP. CO.,LTD.
Address	No.933, Tiantong North Road, A608, Hebang Tower,Yinzhou District, Ningbo, China

2.3 Factory Information

Factory	NINGBO COMAX IMP.&EXP. CO.,LTD.
Address	No.933, Tiantong North Road, A608, Hebang Tower,Yinzhou District, Ningbo, China

2.4 General Description of E.U.T.

Product Name	KLAZZO MULTI FUNCTIONAL CAR CHARGER
Model No. Under Test	IJ10821-DT
List Model No.	N/A
Description of Model differentiation	N/A
Rating(s)	Input: 12-24VDC USB Output 1: 5VDC, 2.4A USB Output 2: 5VDC, 1A
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Test Sample No.	8432EU012723W-1/2(Normal),8432EU012723W-2/2(Engineering)
Hardware Version	N/A
Software Version	N/A
Remark	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.5 Technical Information of E.U.T.

Network and Wireless Connectivity	Bluetooth (BDR+EDR) FM Transmission
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Operating Frequency	88.1MHz to 107.9MHz
Modulation Type	FM
Number of Channels	199
Test Channels	88.1MHz; 98.0MHz; 107.9MHz
Antenna Type	Wire Antenna
Antenna Gain(Peak)	-13.10 dBi
Remark	The above information are declared by the applicant, EU-LAB is not responsible for the information accuracy provided by the applicant.

All channels were listed on the following table:

Channel	Frequency (MHz)
0	88.1
1	88.2
~	~
100	98.0
~	~
198	107.8
199	107.9

3 Test Summary

3.1 Test Standard

The tests were performed according to following standards:

47 CFR Part 15.231: Operation in the band 88–108 MHz

Remark:

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

3.2 Test Verdict

Test Items	Standard	Method	Requirement	Results
Antenna requirement	47 CFR Part 15.231	---	47 CFR 15.203	Pass
20 dB Bandwidth	47 CFR Part 15, Subpart C	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 6.9.2 (20 dB bandwidth)	47 CFR 15.239(a)	Pass
Radiated Spurious Emissions / Band Edge	47 CFR Part 15, Subpart C	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 6.3–6.6 and 6.10	47 CFR 15.205, 15.209 and 15.239(c)	Pass
Field Strength of Fundamental Emission	47 CFR Part 15, Subpart C	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 6.3 and 6.5	47 CFR 15.239(b) and 15.35	Pass
Note: (1) "N/A" denotes test is not applicable in this Test Report.				

3.3 Test Laboratory

Test Laboratory	Shenzhen EU Testing Laboratory Limited
Address	101, Building B1, Fuqiao Fourth Area, Qiaotou Community, Fuhai Subdistrict, Baoan District, Shenzhen, Guangdong, China
Designation Number	CN1368
Test Firm Registration Number	952583

4 Test Configuration

4.1 Test Environment

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	30% to 60%	
Atmospheric Pressure	86 kPa to 106 kPa	
Temperature	NT (Normal Temperature)	+15°C to +35°C
Working Voltage of the EUT	NV (Normal Voltage)	12VDC

4.2 Test Equipment

Bandwidth					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
MXA Signal Analyzer	Agilent	N9020A	EE-011	2026-04-07	2027-04-06
MXG RF Vector Signal Generator	Agilent	N5182A	EE-012	2026-04-07	2027-04-06
MIMO Power Measurement Module	TSTPASS	TSPS 2023R	EE-016	2026-04-11	2027-04-10
MXG RF Analog Signal Generator	Agilent	N5181A	EE-406	2026-02-13	2027-02-12
Power Meter	Anritsu	ML2495A	EE-416	2026-02-13	2027-02-12
Constant Temperature Humidity Chamber	Guangxin	GXP-401	ES-002	2026-07-14	2027-07-13
RF Test Software	TSTPASS	TS32893 V2.0	EE-017	/	/
Band-Stop Filter	COM-MW	ZBSF8-L2400-2483.5-1016	EE-025	2026-04-07	2027-04-06
Band-Stop Filter	COM-MW	K6-5150-5850-250S5020-001	EE-026	2026-04-07	2027-04-06
Filter	COM-MW	ZHPF6-M3000-18000-174	EE-027	2026-04-07	2027-04-06
Filter	COM-MW	ZHPF6-M1300-18000-5356	EE-028	2026-04-07	2027-04-06
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	EE-030	2026-04-07	2027-04-06

Band edge emissions (Radiated) Emissions in frequency bands (above 1GHz)					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESPI	EE-006	2026-04-08	2027-04-07
Double Ridged Horn Antenna	A-INFOMW	LB-10180-NF	EE-008	2026-04-12	2027-04-11
Pre-amplifier	Agilent	8449B	EE-010	2026-04-07	2027-04-06
MXG RF Vector Signal Generator	Agilent	N5182A	EE-012	2026-04-07	2027-04-06
Test Software	Farad	EZ-EMC	EE-015	/	/
Band-Stop Filter	COM-MW	ZBSF8-L2400-2483.5-1016	EE-025	2026-04-07	2027-04-06
Band-Stop Filter	COM-MW	K6-5150-5850-250S5020-001	EE-026	2026-04-07	2027-04-06
Filter	COM-MW	ZHPF6-M3000-18000-174	EE-027	2026-04-07	2027-04-06
Filter	COM-MW	ZHPF6-M1300-18000-5356	EE-028	2026-04-07	2027-04-06
Spectrum Analyzer	ROHDE & SCHWARZ	FSV40-N	EE-029	2026-04-07	2027-04-06
40G Horn Antenna	HCT	HA-018040L	EE-031	2026-04-12	2027-04-11
40G Pre-amplifier	HCT	HC180400-50G25	EE-032	2026-04-07	2027-04-06

Emissions in frequency bands (below 1GHz)					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESPI	EE-006	2026-04-08	2027-04-07
Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	EE-007	2026-04-12	2027-04-11
Pre-amplifier	Agilent	8447D	EE-009	2026-04-08	2027-04-07
MXA Signal Analyzer	Agilent	N9020A	EE-011	2026-04-07	2027-04-06
Test Software	Farad	EZ-EMC	EE-015	/	/
Loop Antenna	SCHWARZBECK	FMZB 1519-60	EE-022	2026-04-12	2027-04-11
Band-Stop Filter	COM-MW	ZBSF6-C902-928-2389	EE-023	2026-04-07	2027-04-06
Band-Stop Filter	COM-MW	ZBSF6-C855-880-5938	EE-024	2026-04-07	2027-04-06

4.3 Description of Support Unit

No.	Title	Manufacturer	Model No.	Serial No.
1	12V Battery	CHILWEE	6-DZF-12.2	EMC-PJ-031
2	Pink Notebook	ADOL	ADOL13F	EMC-PJ-030

4.4 Test Mode

No.	Test Modes	Description
TM1	88.1MHz--TX Mode	Keep the EUT operating in continuous transmit mode at 88.1 MHz.
TM2	98.0MHz--TX Mode	Keep the EUT operating in continuous transmit mode at 98.0 MHz.
TM3	107.9MHz--TX Mode	Keep the EUT operating in continuous transmit mode at 107.9 MHz.

4.5 Description of Calculation

4.5.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

4.5.2 Disturbance Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBuV)} = RA \text{ (dBuV)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

4.6 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Test Item	Measurement Uncertainty
Occupied Channel Bandwidth	69 kHz
RF output power, conducted	1.07 dB
Time of Occupancy (Dwell Time)	1.8 %
Unwanted Emissions, conducted	2.73 dB
Radiated Emission (1GHz- 18GHz)	Ur = 3.58 dB (Horizontal) Ur = 3.58 dB (Vertical)
Radiated Emission (9kHz- 30MHz)	Ur = 3.06 dB
Radiated Emission (30MHz- 1GHz)	Ur = 2.76 dB (Horizontal) Ur = 2.76 dB (Vertical)
Radiated Emission (18GHz- 40GHz)	Ur = 5.29 dB (Horizontal) Ur = 5.21 dB (Vertical)

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Condition

None

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

5.1.1 Test Specification

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Test Method:	---

5.1.2 Test Data

PASS.

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna-design is used.

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

6 Radio Spectrum Matter Test Results (RF)

6.1 20dB Bandwidth


6.1.1 Test Specification

Test Requirement:	47 CFR § 15.239(a)
Test Limit:	Emissions from the intentional radiator shall be confined within a 200 kHz band centered on the operating frequency, and the entire 200 kHz band shall lie within 88–108 MHz.
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 6.9.2 for 20 dB bandwidth.
Procedure:	1. Configure the EUT for continuous transmission using the normal or worst-case FM modulation condition applicable to the product. 2. Set the spectrum analyzer center frequency to the nominal transmit frequency. Select a span sufficient to display the complete emission; for the dBc bandwidth measurement, use a span of approximately 2 to 5 times the occupied bandwidth. 3. Select an RBW approximately 1% to 5% of the occupied bandwidth and set VBW to at least 3 times the RBW, unless a different setting is required by the measurement procedure. 4. Use peak detection and max-hold as appropriate, allow the trace to stabilize, and determine the reference level at the highest point of the emission envelope. 5. Determine the frequencies at which the emission envelope is 20 dB below the reference level. The frequency difference is the 20 dB bandwidth. 6. Verify that the emission is contained within the 200 kHz band centered on the operating frequency and that this band lies wholly within 88–108 MHz. Record the spectral plot and bandwidth result.

6.1.2 E.U.T. Operation

Pre test mode:	TM1, TM2, TM3
Final test mode:	TM1, TM2, TM3

6.1.3 Test Setup Diagram

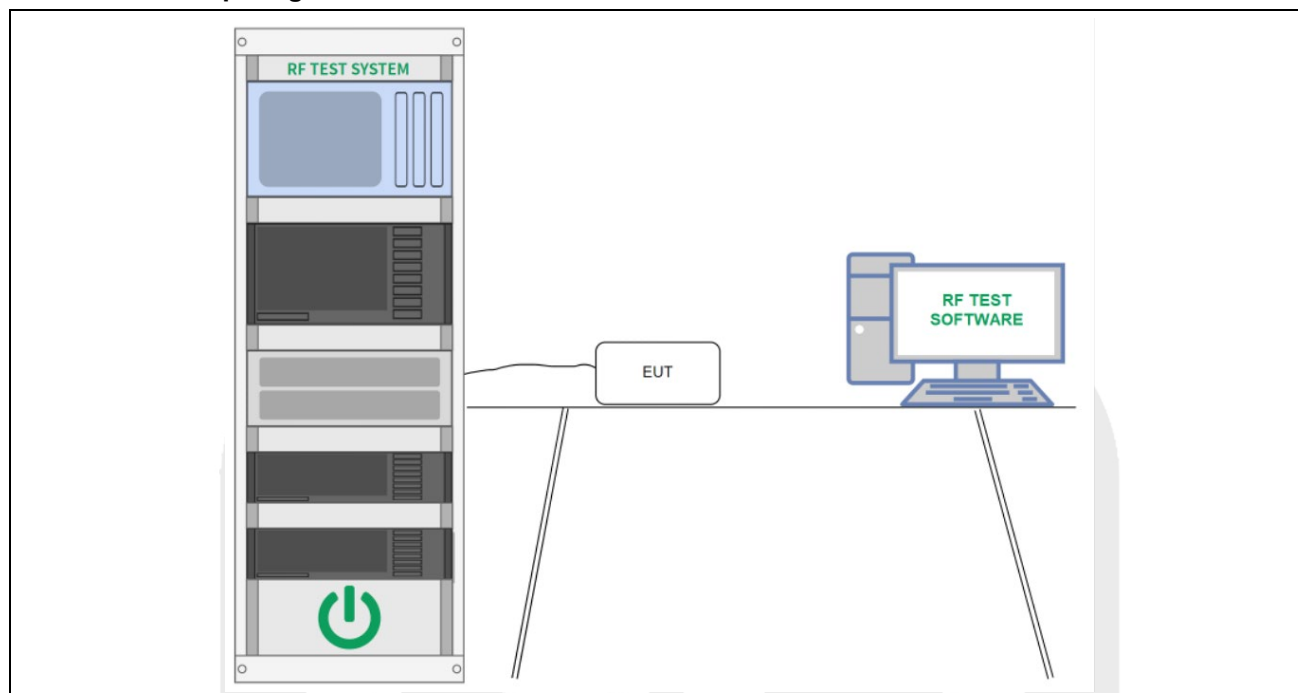


6.1.4 Test Data

PASS.


Please refer to the following pages.


TM	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)	Limit (kHz)	Verdict
TM1	88.1	0.247	0.209	≤200	Pass
TM2	98.0	0.248	0.210	≤200	Pass
TM3	107.9	0.250	0.213	≤200	Pass

TM1

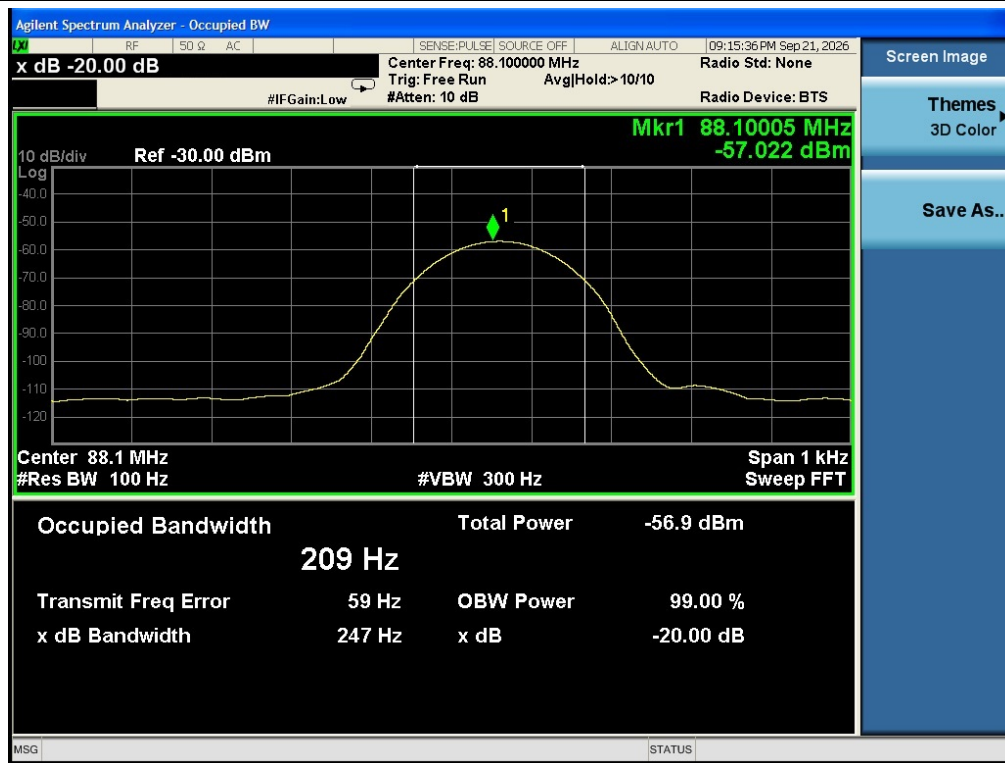

TM2

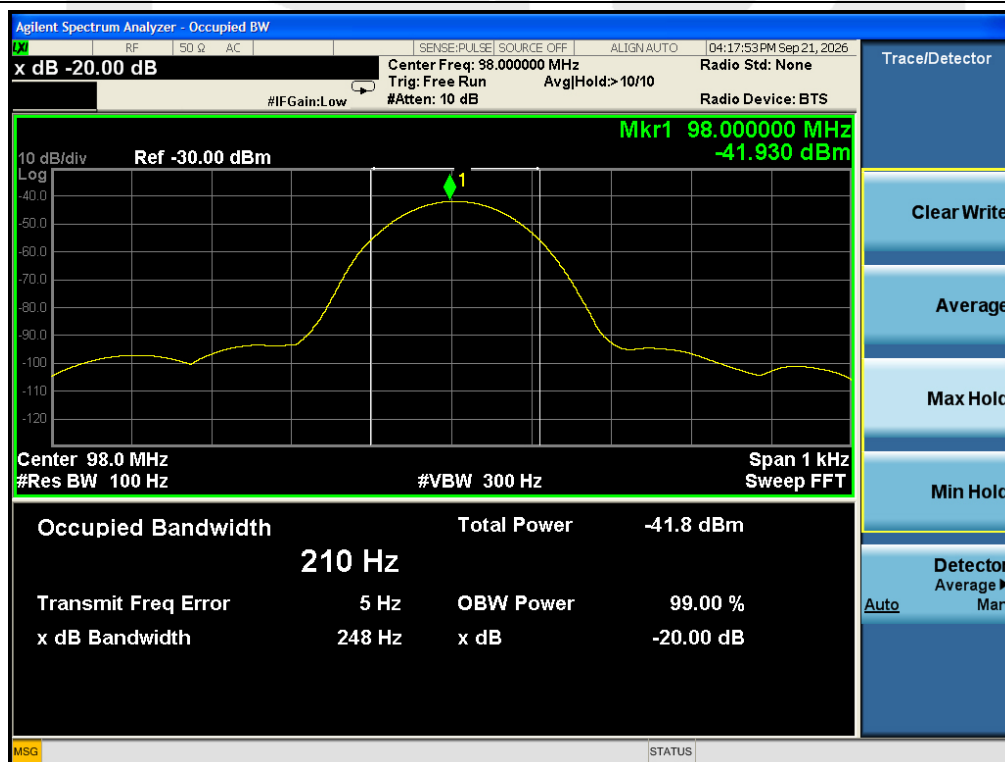

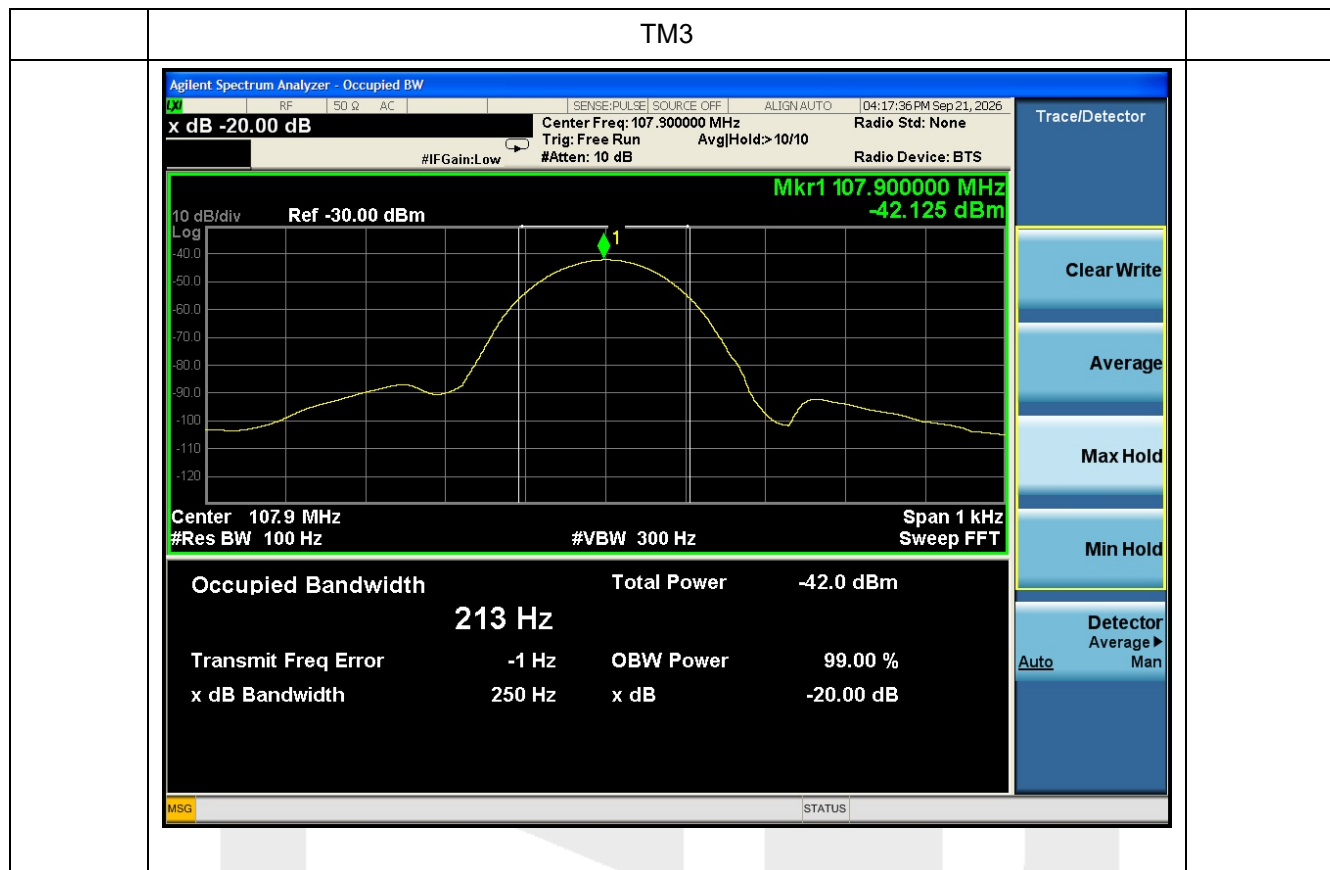

6.2 Field Strength of Fundamental Emissions and Radiated Spurious Emission

6.2.1 Test Specification


Test Requirement:	47 CFR § 15.239(a), (b) and (c), together with §§ 15.209 and 15.35. Section 15.205 applies to emissions falling within restricted bands.				
Test Limit:	Permitted 200 kHz Band / Fundamental Emission:				
	Operating Frequency Range (MHz)	Field Strength – Average (µV/m)	Field Strength – Average (dBµV/m)	Field Strength – Peak (dBµV/m)	Measurement Distance (meters)
	88–108	250	47.96	67.96	3
	The field strength of any emission within the permitted 200 kHz band shall not exceed the limits specified above. The average limit is 250 µV/m at 3 m. In accordance with § 15.35, the peak field strength shall not exceed 20 dB above the applicable average limit.				
	Emissions outside the permitted 200 kHz band:				
	Such emissions shall comply with the general radiated emission limits of § 15.209, based on the frequency of the unwanted emission:				
	Frequency (MHz)	Field strength (microvolts/meter)			Measurement distance (meters)
	0.009-0.490	2400/F(kHz)			300
	0.490-1.705	24000/F(kHz)			30
	1.705-30.0	30			30
30-88	100 **			3	
88-216	150 **			3	
216-960	200 **			3	
Above 960	500			3	
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.					
In the emission table above, the tighter limit applies at the band edges.					
The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.					
Where an average radiated emission limit applies, the peak emission shall not exceed 20 dB above the applicable average limit, in accordance with § 15.35(b).					
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 6.3–6.6 for radiated emissions and Clause 6.10 for band-edge measurements, as applicable, in accordance with 47 CFR § 15.31(a)(3).				
Procedure:	1. Operate the EUT in continuous transmit mode with the modulation and configuration that produce the maximum expected emission level under normal operation. 2. Perform radiated measurements using a calibrated test site and the applicable antenna for each frequency range. Rotate the EUT through 360° and vary antenna polarization/height as required to maximize the measured field strength.				

	3. For measurements below 30 MHz, use the loop-antenna procedures of ANSI C63.10-2020 Clause 6.4. If measurements are made at a distance closer than the distance specified in § 15.209, extrapolate the result to the specified distance in accordance with 47 CFR § 15.31(f)(2) (40 dB/decade unless an appropriate measured extrapolation factor is established). For 30 MHz to 1 GHz, use Clauses 6.3 and 6.5. For measurements above 1 GHz, use Clause 6.6. 4. Measure the field strength within the permitted 200 kHz band using the average detector required by § 15.239(b); also verify the applicable peak limit in accordance with § 15.35. 5. Evaluate emissions outside the permitted 200 kHz band against § 15.209 using the detector function applicable to the measured frequency. Use ANSI C63.10-2020 Clause 6.10 for band-edge measurements. 6. Investigate the radiated spectrum over the frequency range required by § 15.33. For an intentional radiator operating below 10 GHz, measurements extend at least to the tenth harmonic of the highest fundamental frequency (or 40 GHz, whichever is lower), subject to any higher range required by an incorporated digital device. 7. Where the device operates over more than 10 MHz of tuning range, select frequencies near the bottom, middle and top of the operating range in accordance with § 15.31(m). 8. For an intentional radiator, verify the variation of the input power or radiated fundamental level with the supply voltage varied from 85% to 115% of the nominal rated supply voltage, as applicable, in accordance with § 15.31(e); battery-operated equipment is tested using a new battery.
--	---

6.2.2 E.U.T. Operation

Pre test mode:	TM1, TM2, TM3
Final test mode:	TM1, TM2, TM3

6.2.3 Test Setup Diagram

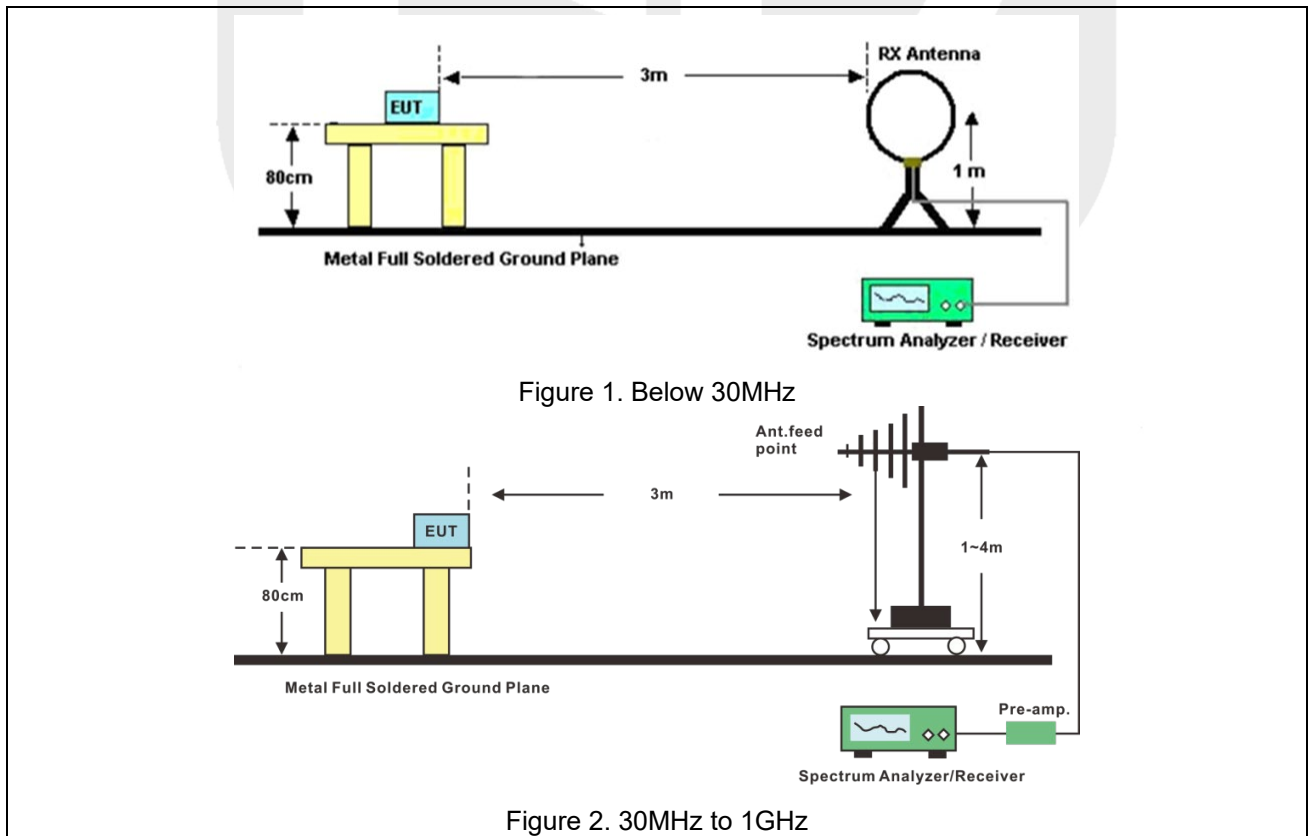


6.2.4 Test Data

PASS.


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.




Fundamental E-Field strength Test Data

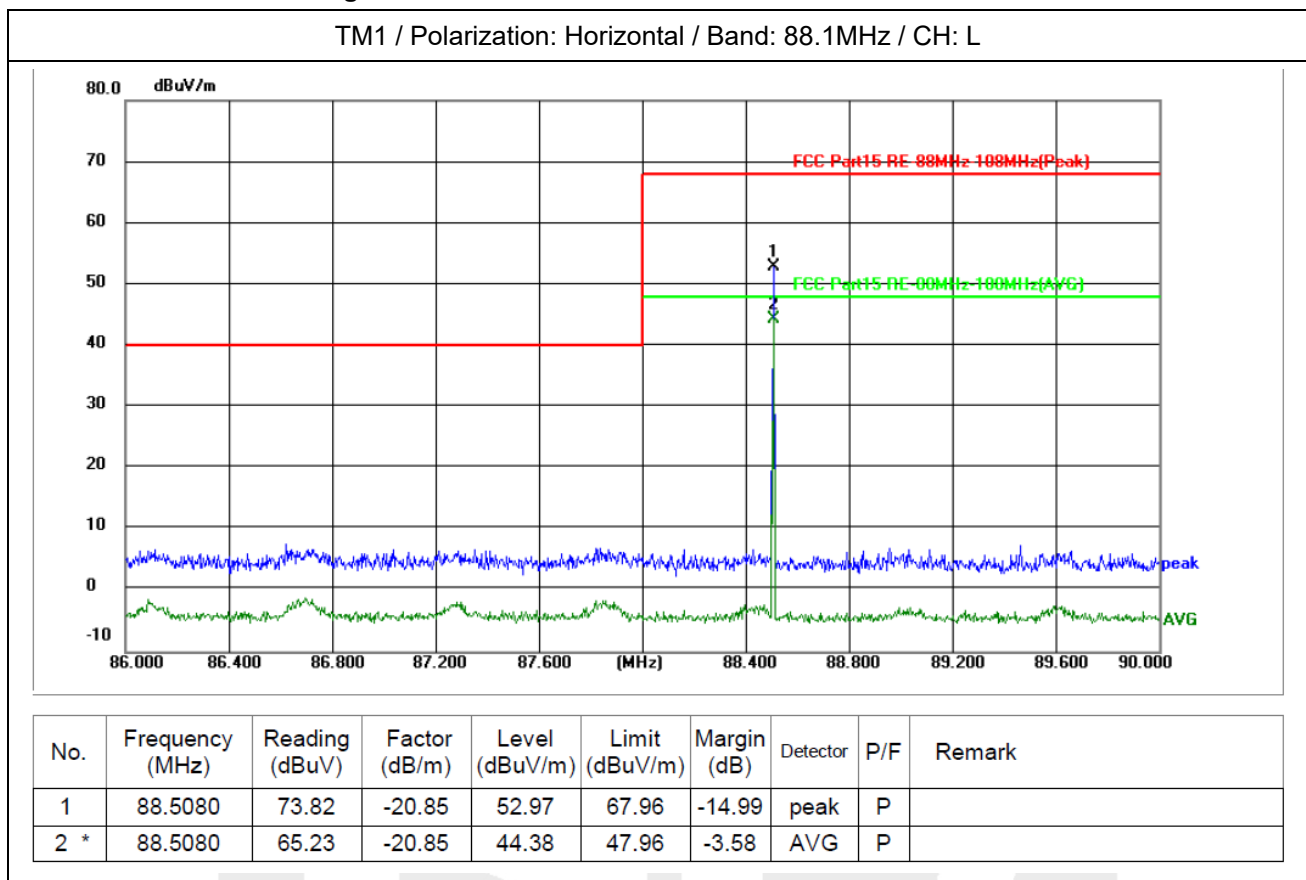


Fundamental E-Field strength Test Data

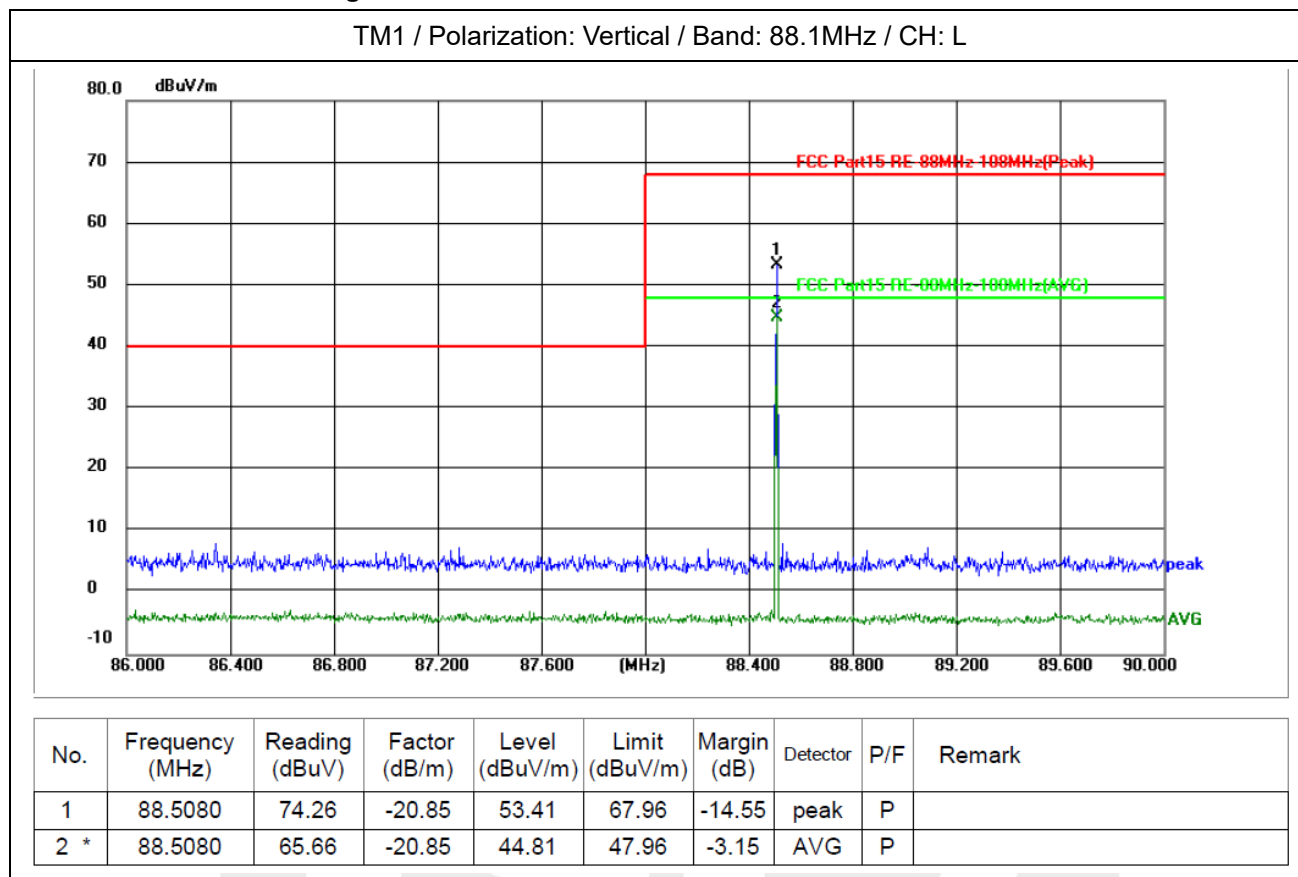


Fundamental E-Field strength Test Data

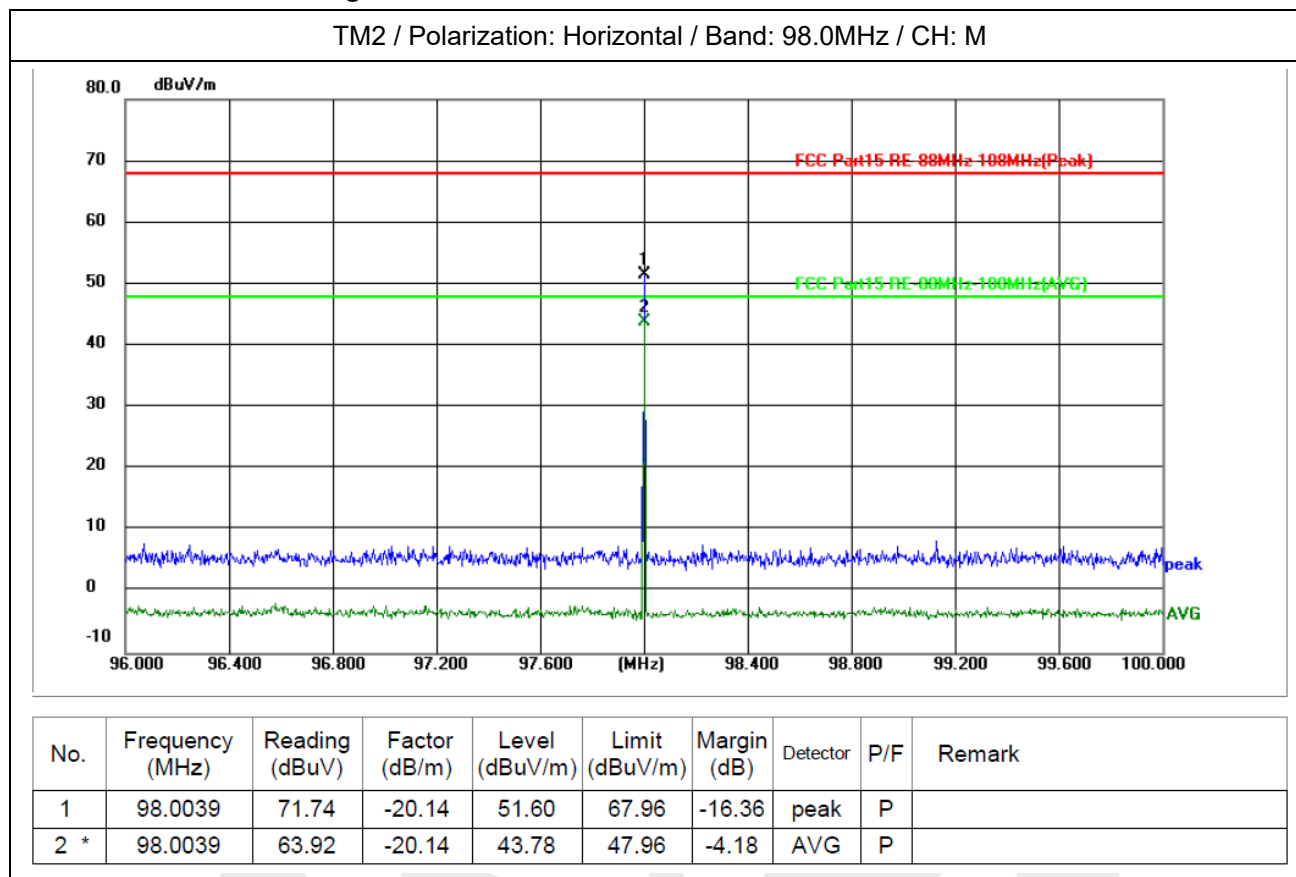


Fundamental E-Field strength Test Data

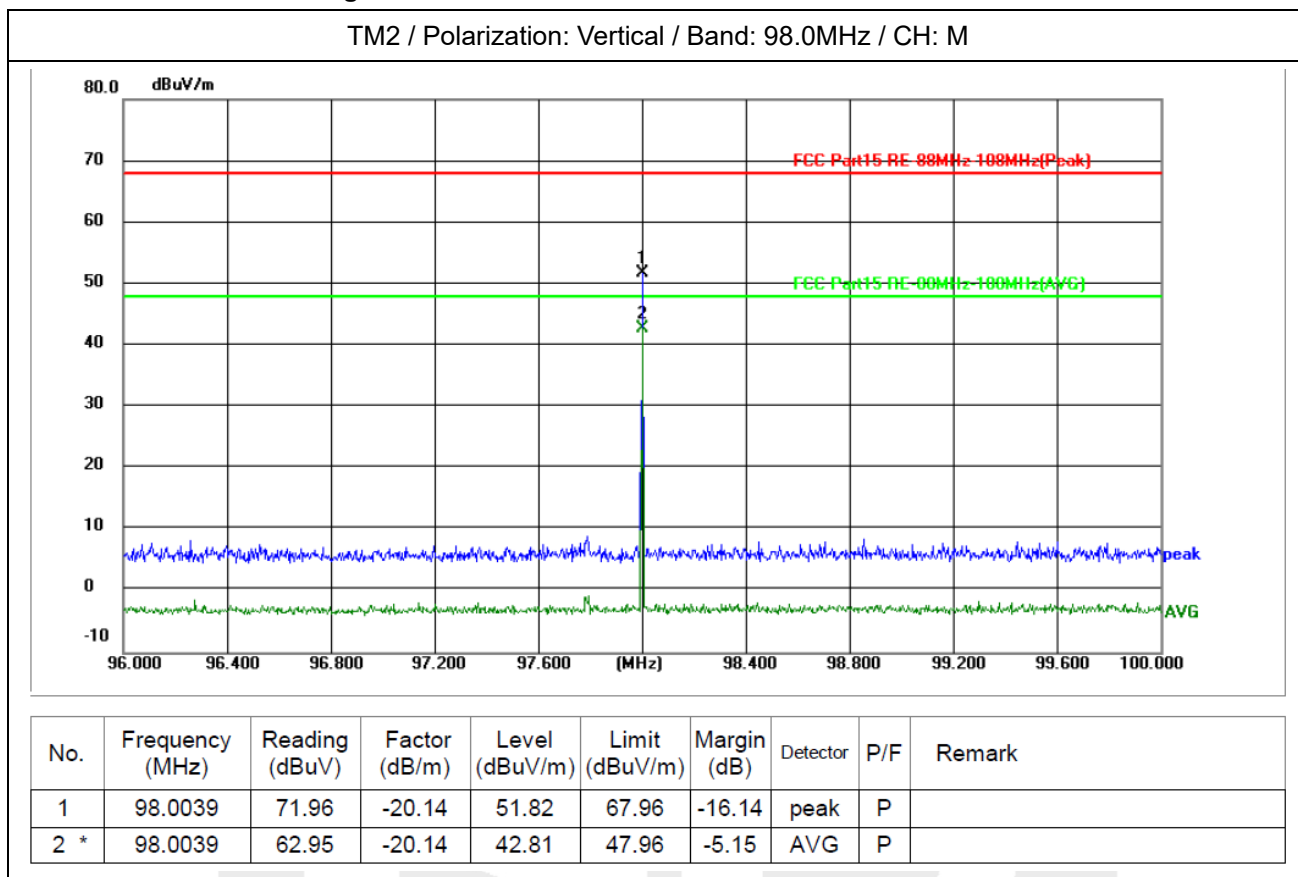

Fundamental E-Field strength Test Data

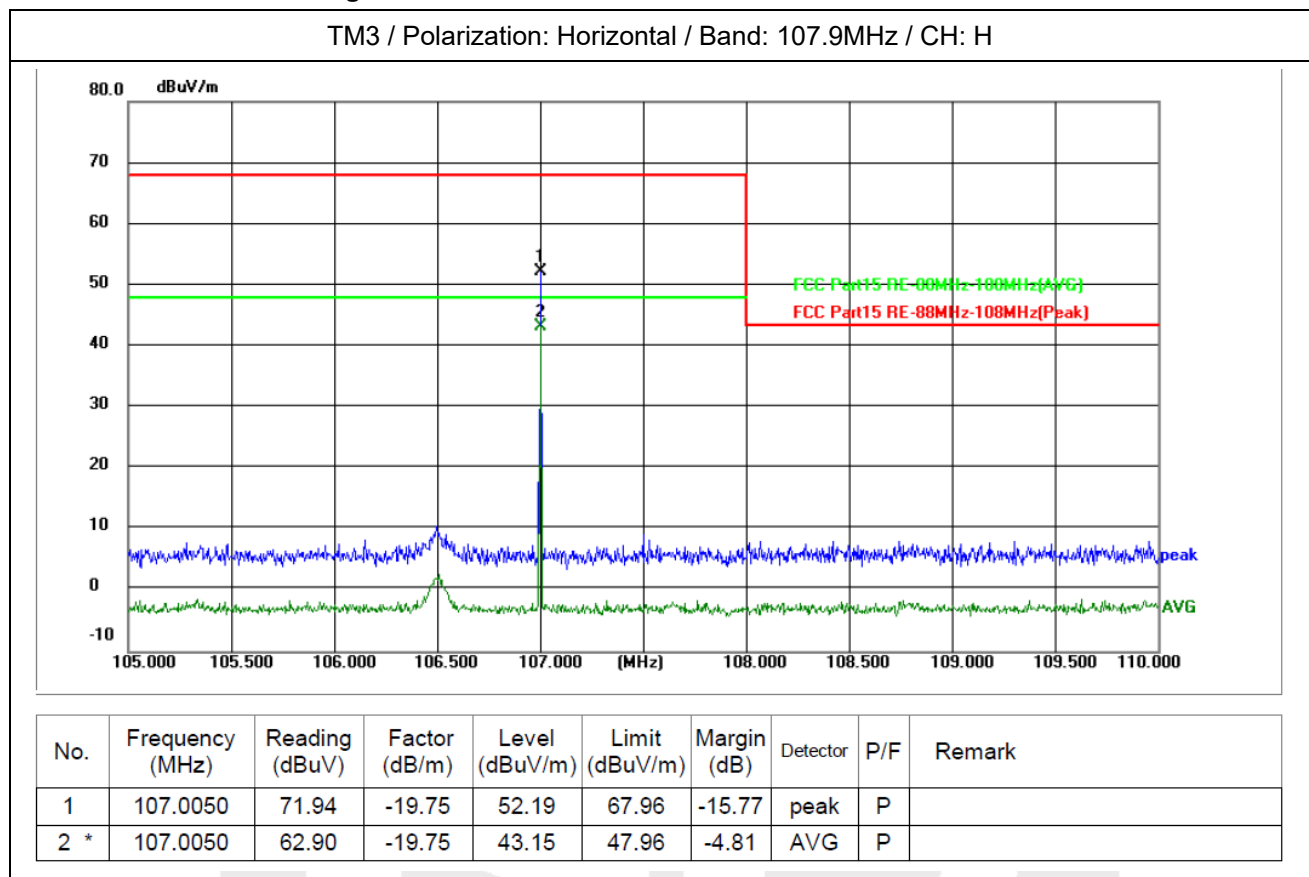


Fundamental E-Field strength Test Data

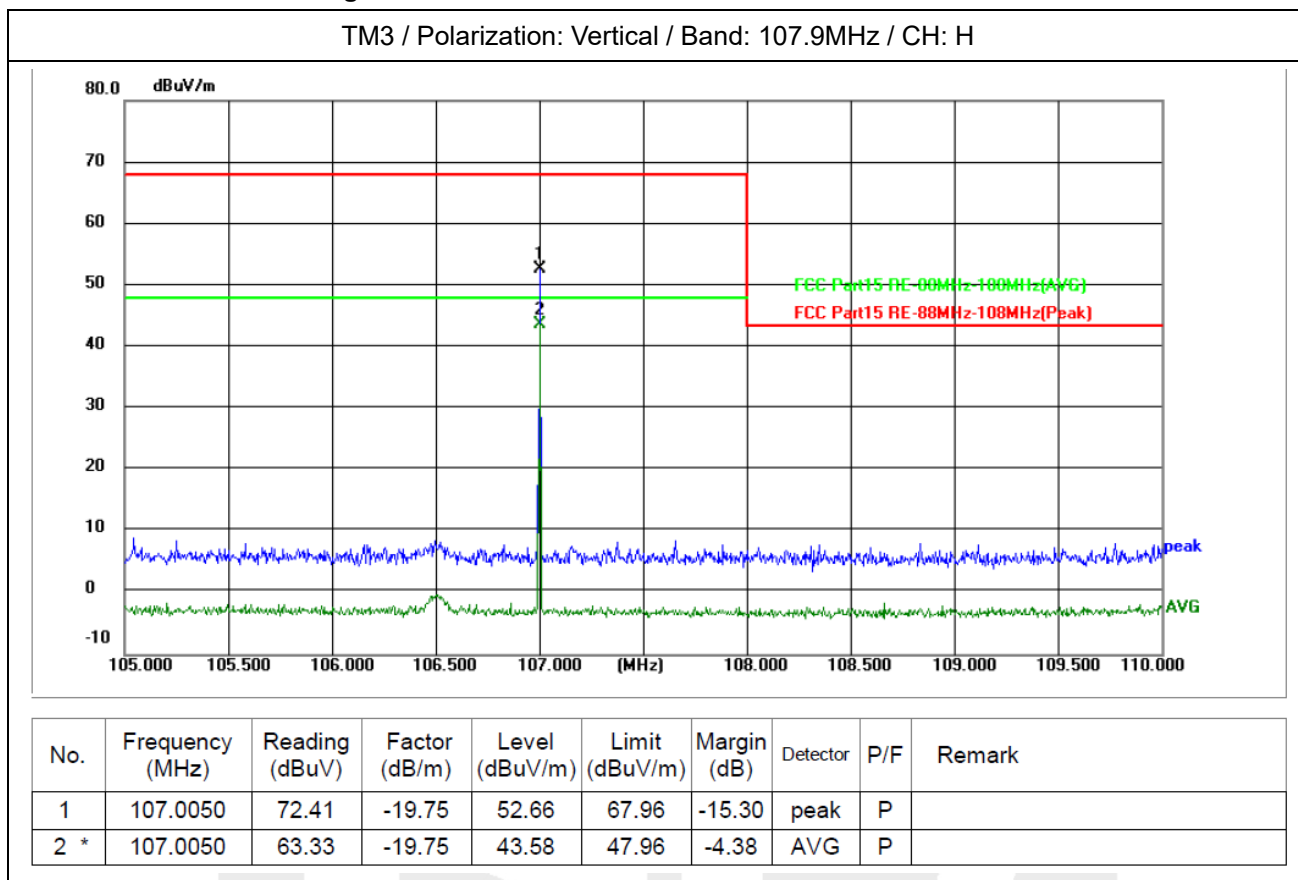

Emissions in frequency bands (9kHz -150kHz) Test Data


TM1 / Polarization: Coaxial / Band: 88.1 MHz / BW: 1

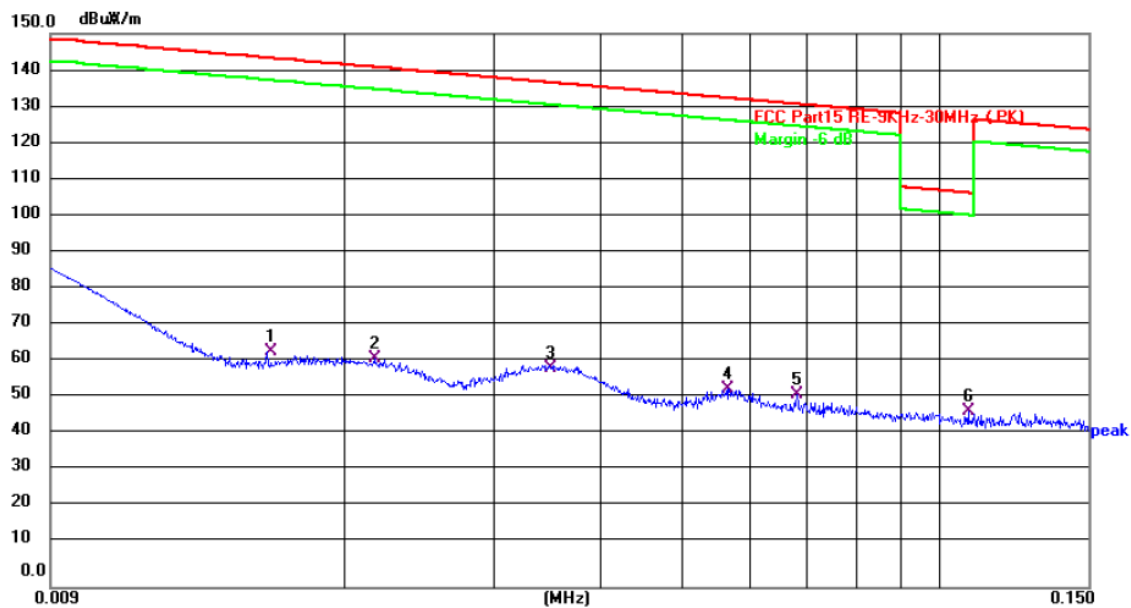

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.0161	42.83	21.12	63.95	143.47	-79.52	QP	P	
2	0.0216	41.02	21.12	62.14	140.92	-78.78	QP	P	
3	0.0350	38.25	21.03	59.28	136.72	-77.44	QP	P	
4	0.0565	32.77	20.88	53.65	132.56	-78.91	QP	P	
5	0.0680	31.16	21.15	52.31	130.95	-78.64	QP	P	
6 *	0.1082	26.32	21.43	47.75	106.92	-59.17	QP	P	

Emissions in frequency bands (9kHz -150kHz) Test Data


TM1 / Polarization: Coplanar / Band: 88.1 MHz / BW: 1

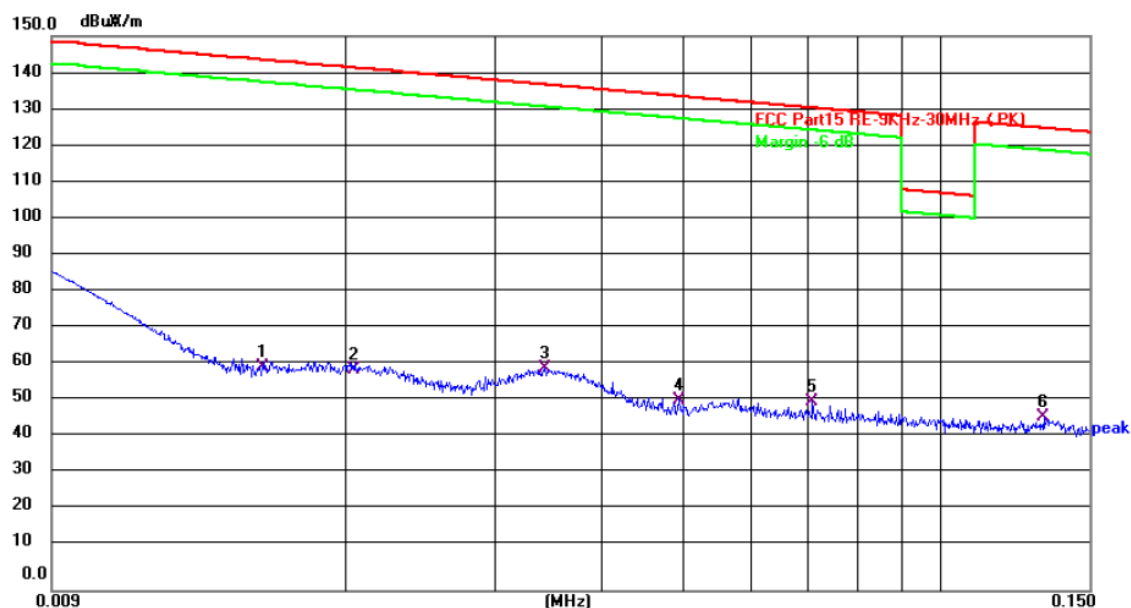

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.0160	39.46	21.11	60.57	143.52	-82.95	QP	P	
2	0.0204	38.55	21.12	59.67	141.41	-81.74	QP	P	
3 *	0.0342	39.21	21.04	60.25	136.92	-76.67	QP	P	
4	0.0492	30.65	20.75	51.40	133.77	-82.37	QP	P	
5	0.0704	29.86	21.21	51.07	130.65	-79.58	QP	P	
6	0.1324	25.62	21.47	47.09	125.17	-78.08	QP	P	

Emissions in frequency bands (150kHz - 30MHz) Test Data


TM1 / Polarization: Coaxial / Band: 88.1 MHz / BW: 1

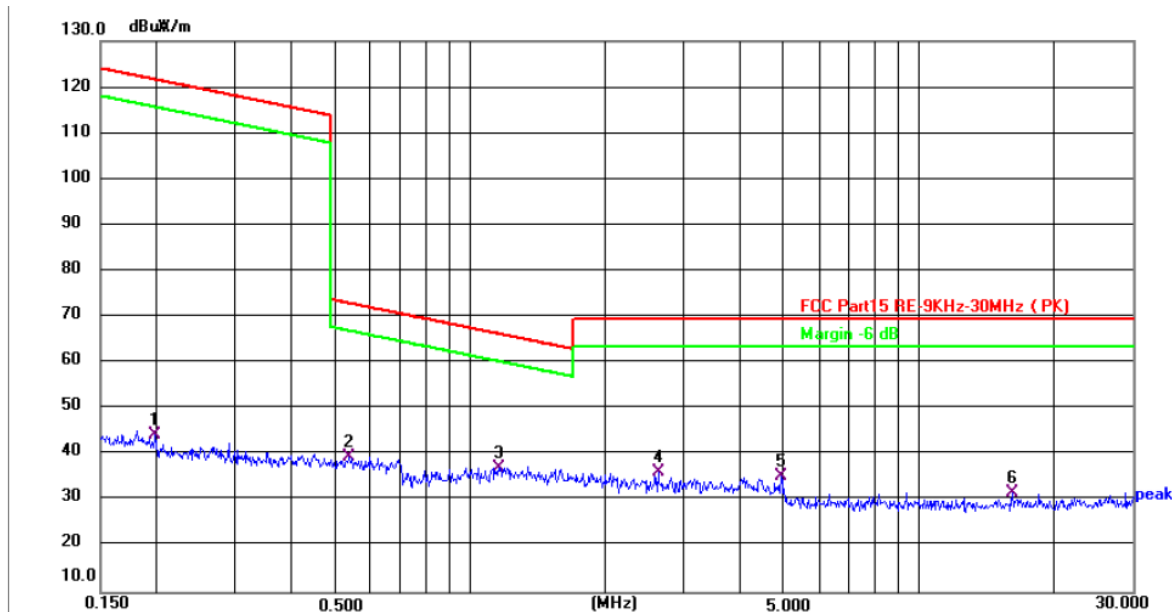

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.1985	22.78	21.53	44.31	121.65	-77.34	QP	P	
2	0.5376	18.17	21.31	39.48	72.99	-33.51	QP	P	
3 *	1.1593	15.75	21.34	37.09	66.32	-29.23	QP	P	
4	2.6220	14.25	22.10	36.35	69.54	-33.19	QP	P	
5	4.9256	13.68	21.69	35.37	69.54	-34.17	QP	P	
6	16.1398	10.79	20.85	31.64	69.54	-37.90	QP	P	


Emissions in frequency bands (150kHz - 30MHz) Test Data

TM1 / Polarization: Coplanar / Band: 88.1 MHz / BW: 1

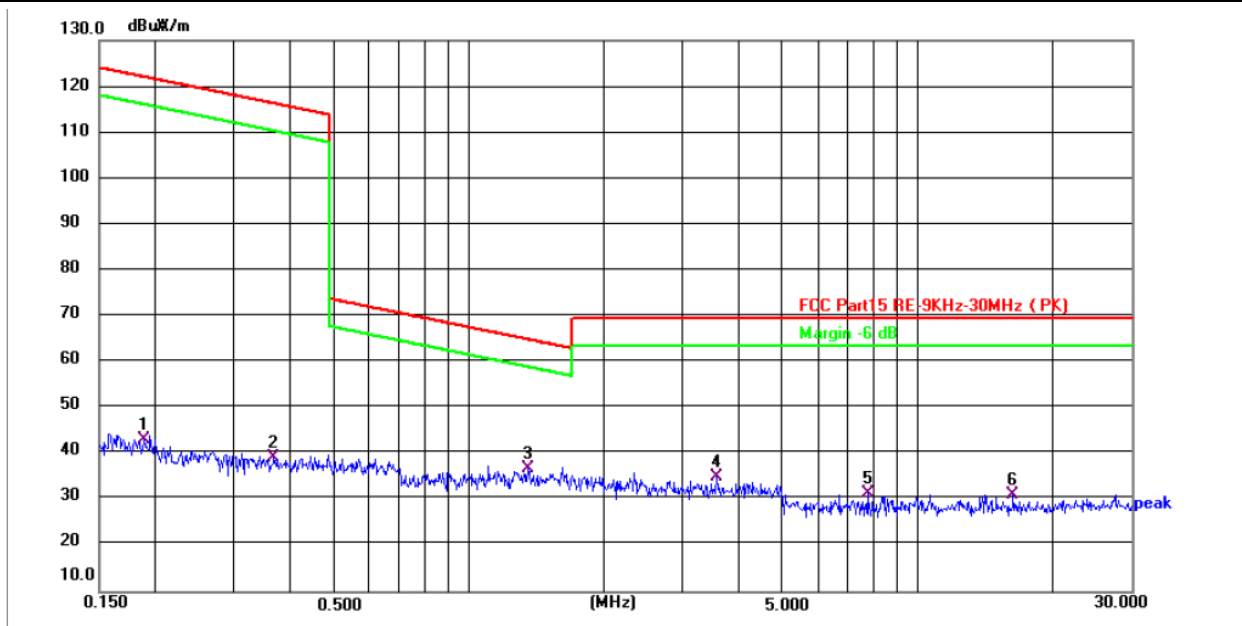


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.1882	21.66	21.52	43.18	122.11	-78.93	QP	P	
2	0.3672	17.66	21.55	39.21	116.31	-77.10	QP	P	
3 *	1.3521	15.39	21.52	36.91	64.98	-28.07	QP	P	
4	3.5653	12.95	22.11	35.06	69.54	-34.48	QP	P	
5	7.7278	10.19	21.21	31.40	69.54	-38.14	QP	P	
6	16.3118	10.34	20.85	31.19	69.54	-38.35	QP	P	

Emissions in frequency bands (30MHz – 1000MHz) Test Data

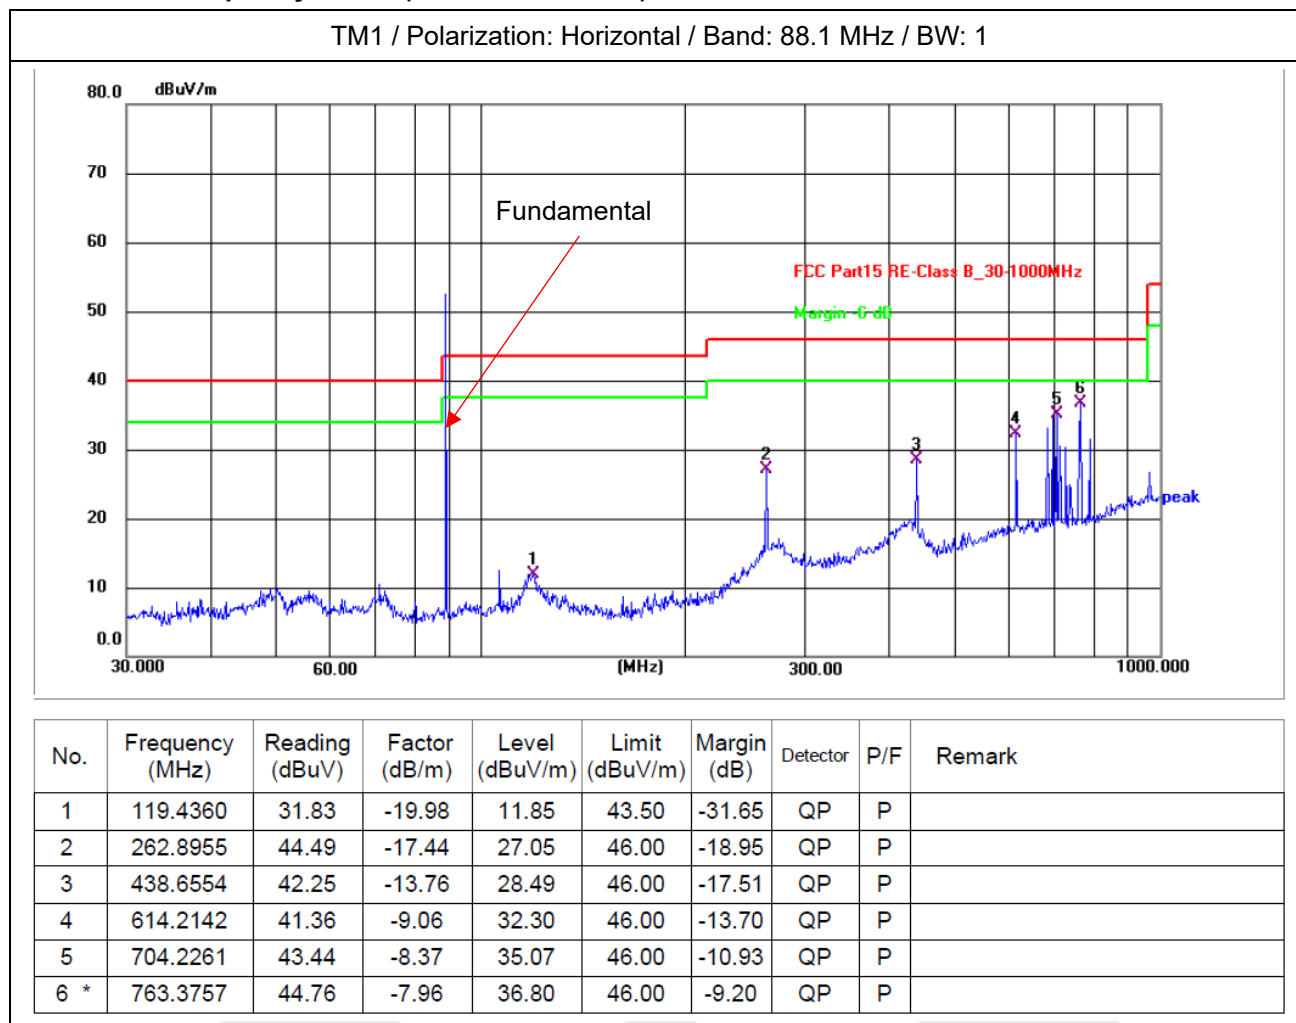


Emissions in frequency bands (30MHz – 1000MHz) Test Data

TM1 / Polarization: Coplanar / Band: 88.1 MHz / BW: 1

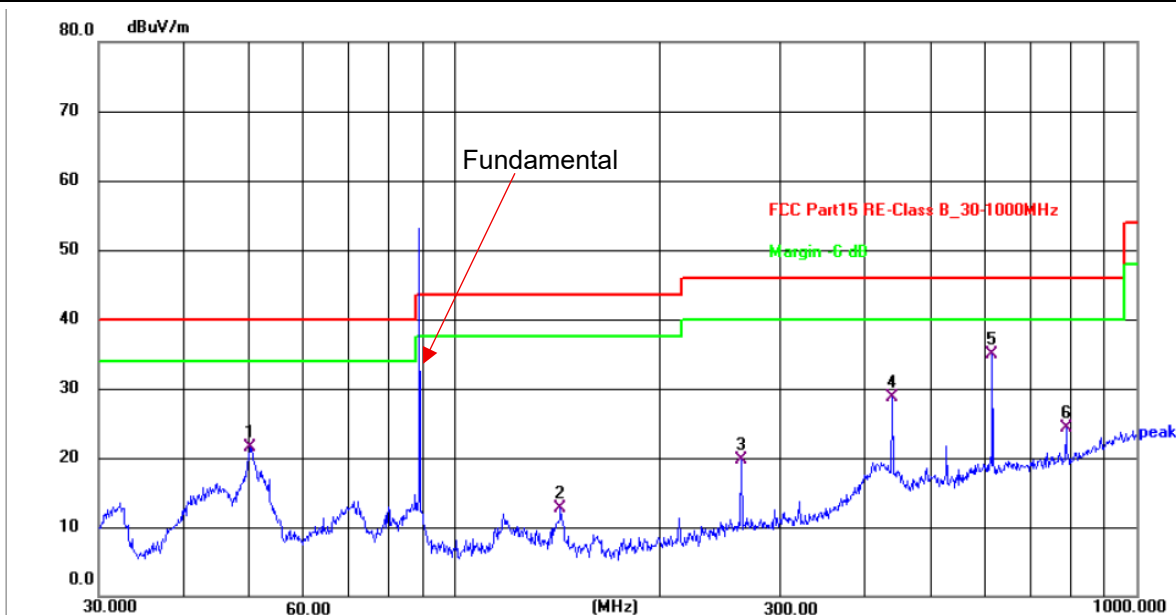


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	50.0566	40.15	-18.65	21.50	40.00	-18.50	QP	P	
2	142.8243	34.24	-21.48	12.76	43.50	-30.74	QP	P	
3	262.8955	37.07	-17.44	19.63	46.00	-26.37	QP	P	
4	438.6554	42.48	-13.76	28.72	46.00	-17.28	QP	P	
5 *	614.2142	44.04	-9.06	34.98	46.00	-11.02	QP	P	
6	787.8510	32.15	-7.80	24.35	46.00	-21.65	QP	P	


Band Edge Emissions (Restricted frequency bands) Test Data

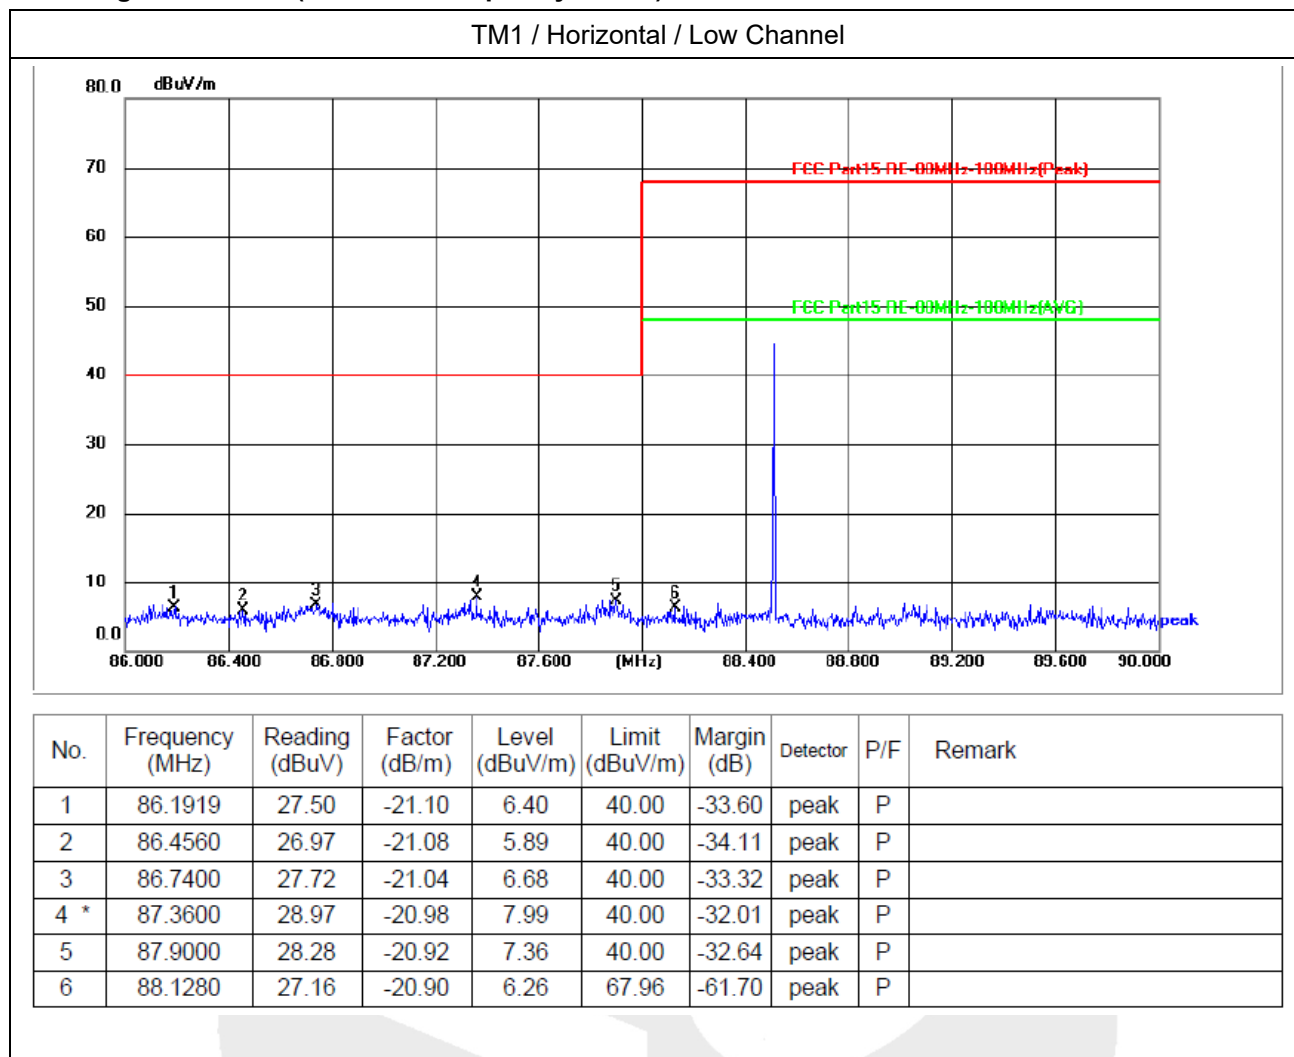


Band Edge Emissions (Restricted frequency bands) Test Data

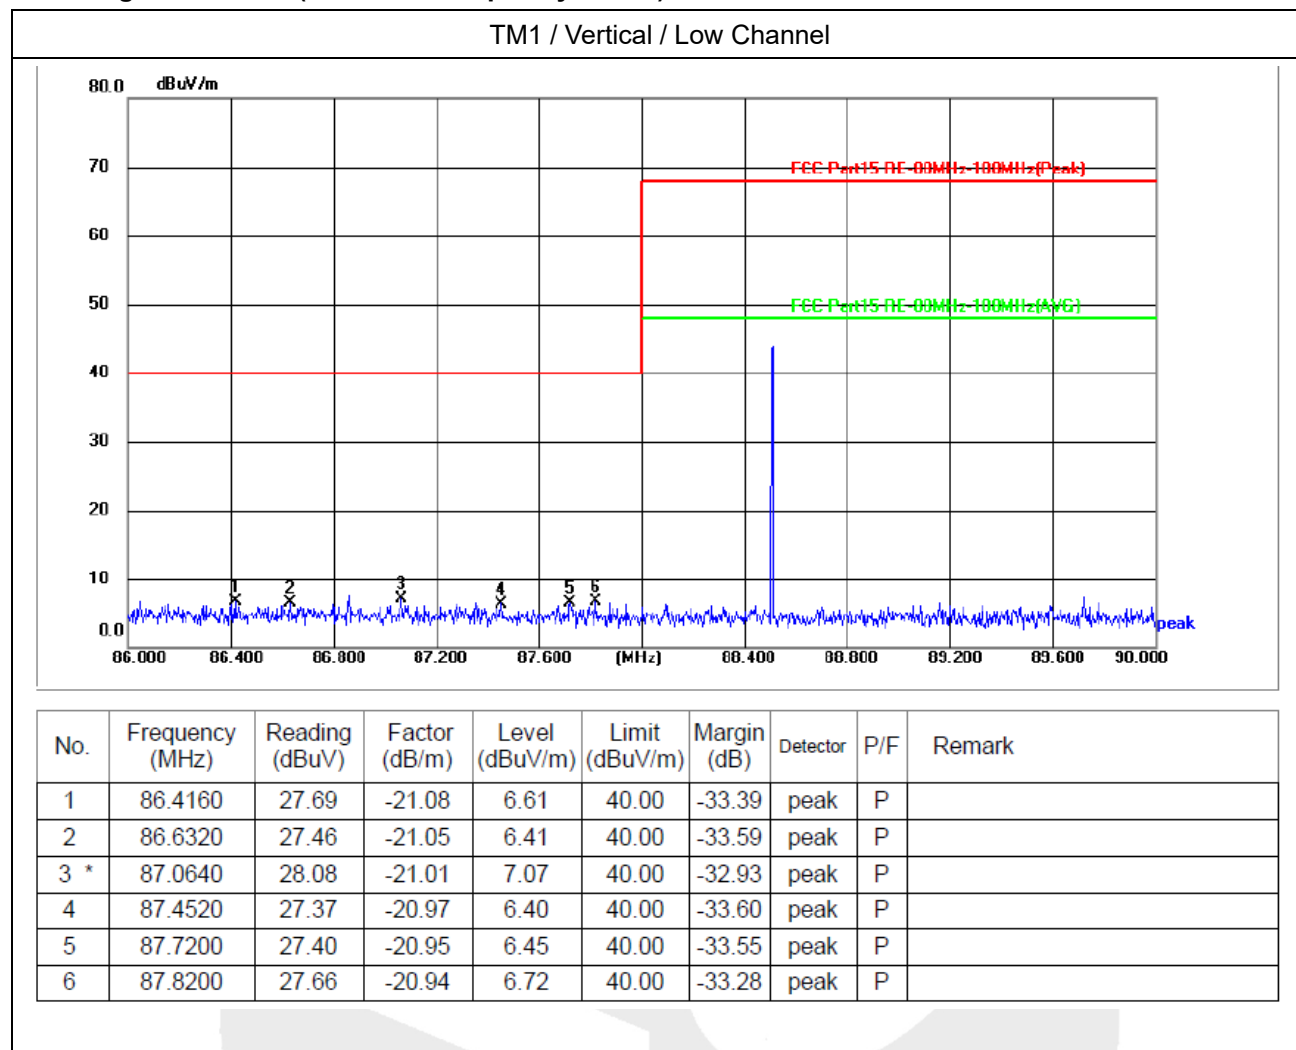

Band Edge Emissions (Restricted frequency bands) Test Data

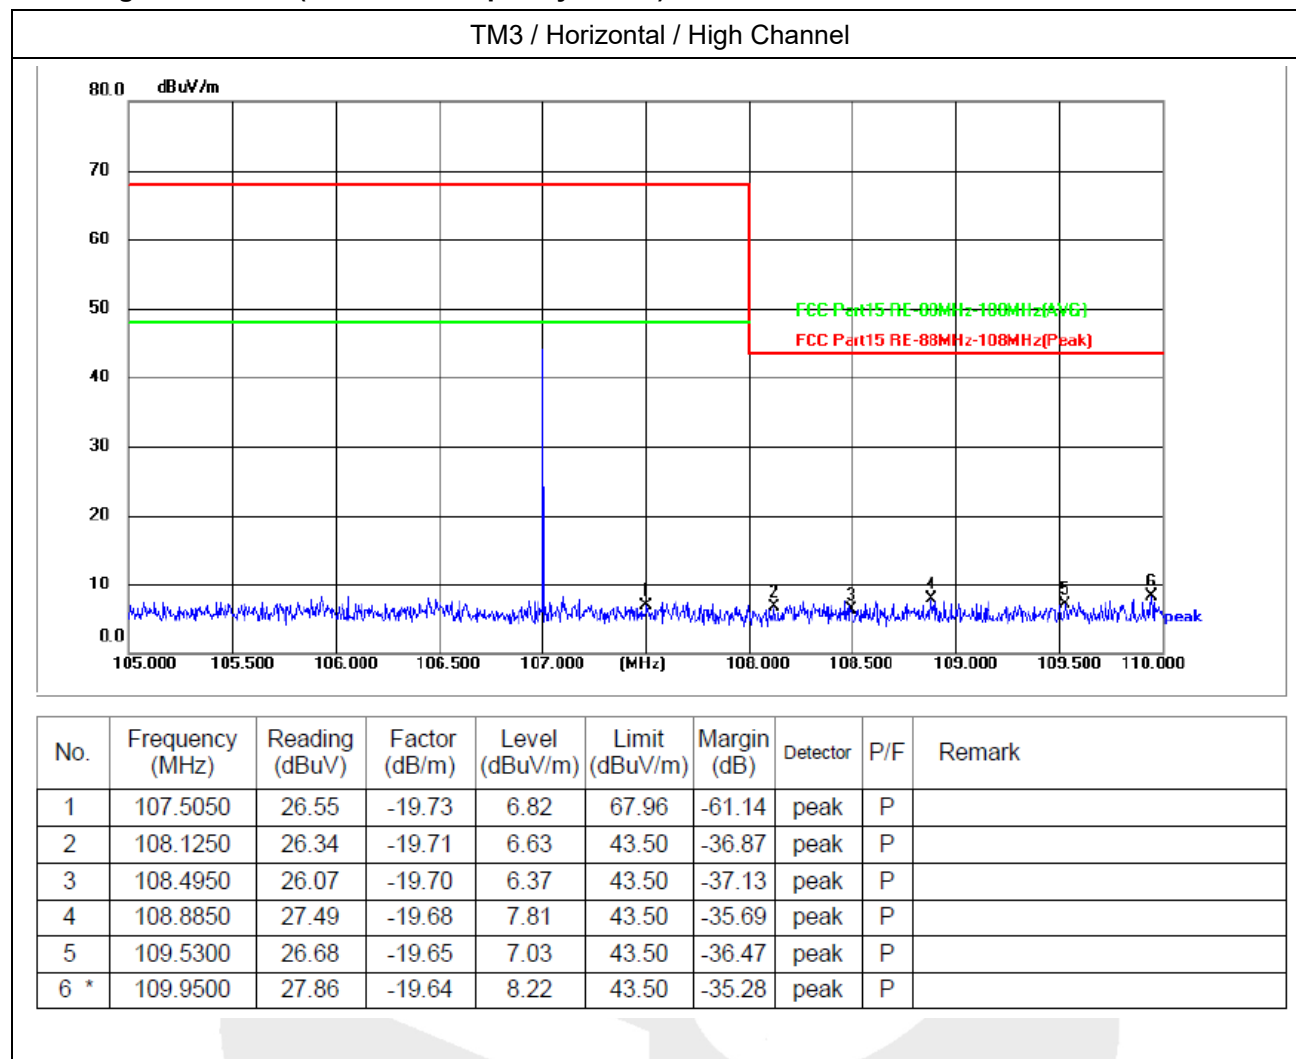

Band Edge Emissions (Restricted frequency bands) Test Data

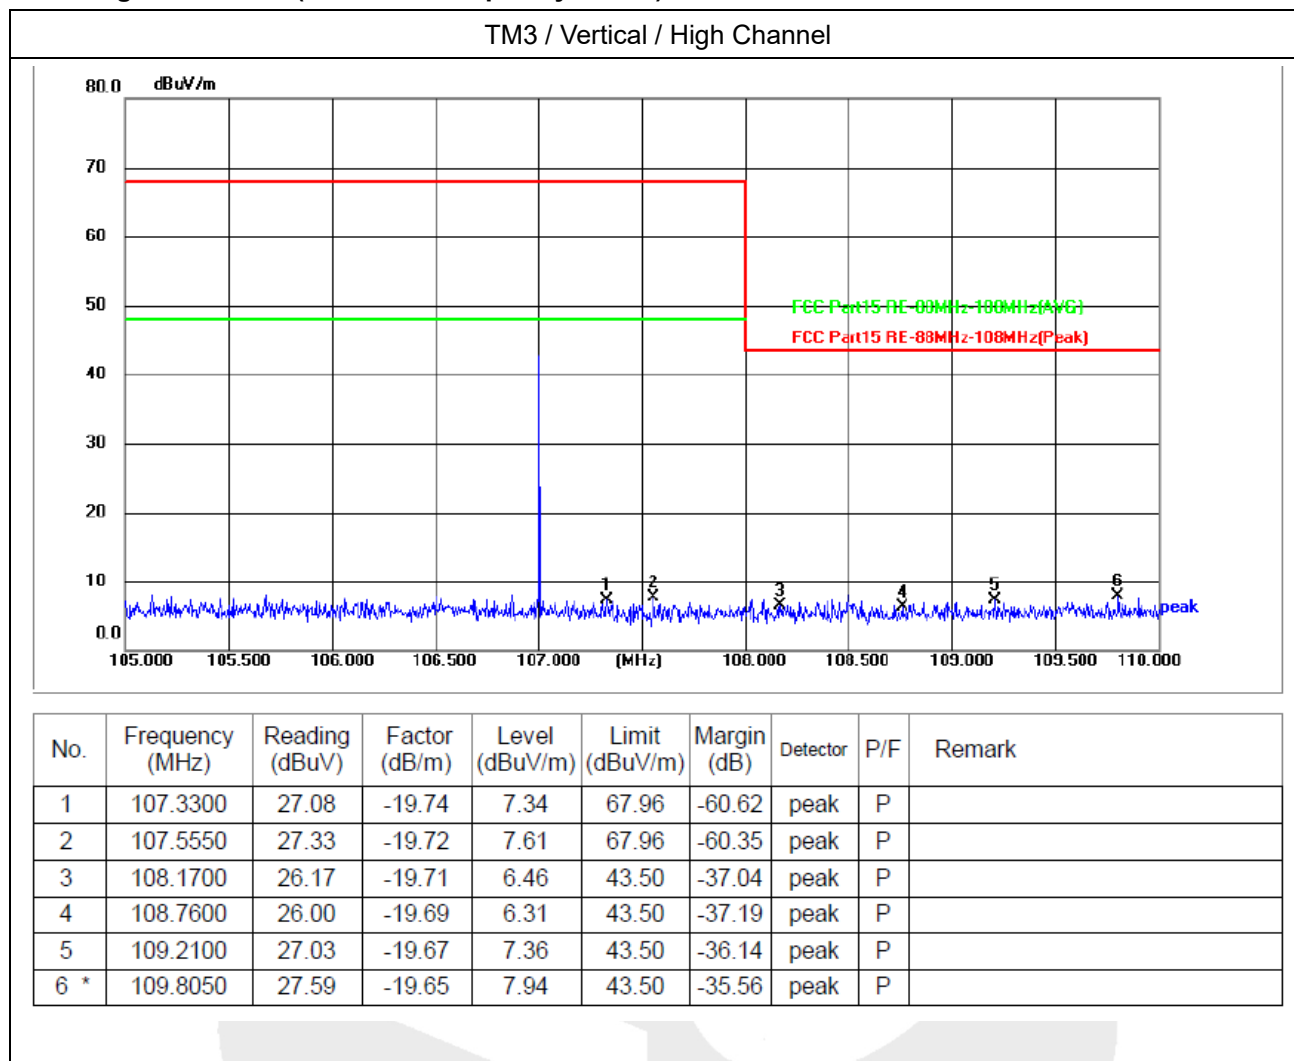

Radiated Spurious Emission Test Data (Above 1GHz)

Pol.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type	Result
High Channel								
H	1079.0*	41.63	4.92	46.55	54.00	-7.45	PK	PASS
V	1079.0*	34.15	9.83	43.98	54.00	-10.02	PK	PASS

Remark:

Level = Reading + Factor, Margin= Level – Limit.



ANNEX A TEST SETUP PHOTOS

Please refer to the document "8432EU012723W-ANNEX A.PDF"

ANNEX B EXTERNAL PHOTOS

Please refer to the document "8432EU012723W-ANNEX B.PDF"

ANNEX C INTERNAL PHOTOS

Please refer to the document "8432EU012723W-ANNEX C.PDF"



STATEMENT

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--- End of Report ---