

NORTHWEST EMC

Walt Disney Parks and Resorts US, Inc.


TPv2 (DAP 2)

FCC 15.207:2016

FCC 15.247:2016

2.4 GHz DTS Radio

Report # SYNA0194.6 Rev.1

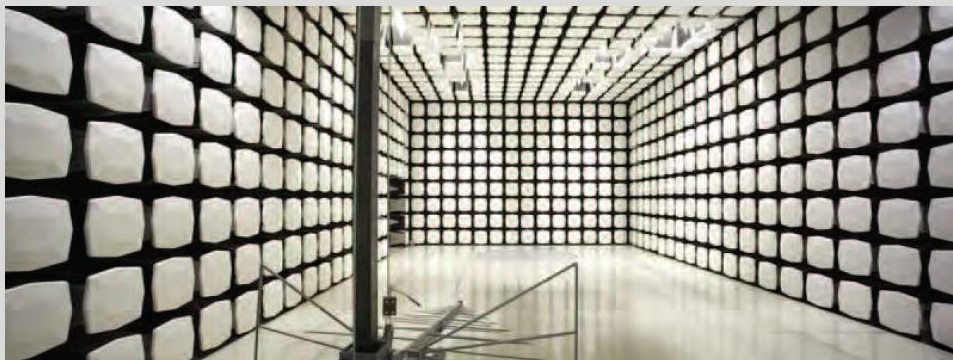

NVLAP Lab Code: 200630-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report may only be duplicated in its entirety

CERTIFICATE OF TEST

Last Date of Test: November 10, 2016
Walt Disney Parks and Resorts US, Inc.
Model: TPv2 (DAP 2)

Radio Equipment Testing

Standards

Specification	Method
FCC 15.207:2016	ANSI C63.10:2013
FCC 15.247:2016	

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	AC - Powerline Conducted Emissions	Yes	Pass	
6.5, 6.6, 11.12.1, 11.13.2	Spurious Radiated Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	Pass	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:



Rod Munro, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY

Revision Number	Description	Date	Page Number
01	Updated configuration with antenna information	11/17/16	8
01	A new Spurious Radiated Emissions (SYNA0208) was added to the report.	11/17/16	21-28

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Validated by the European Commission as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>
<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY

Measurement Uncertainty


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty ($K=2$) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.


The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

FACILITIES

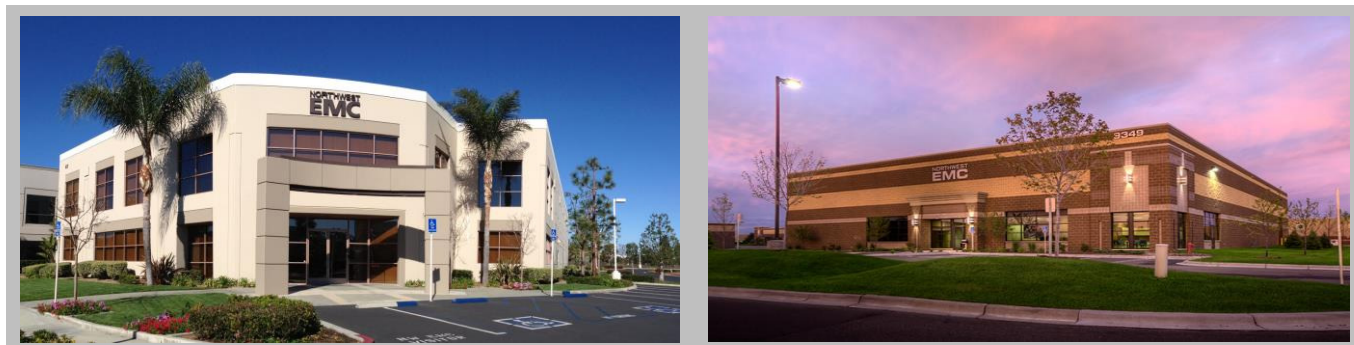

California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

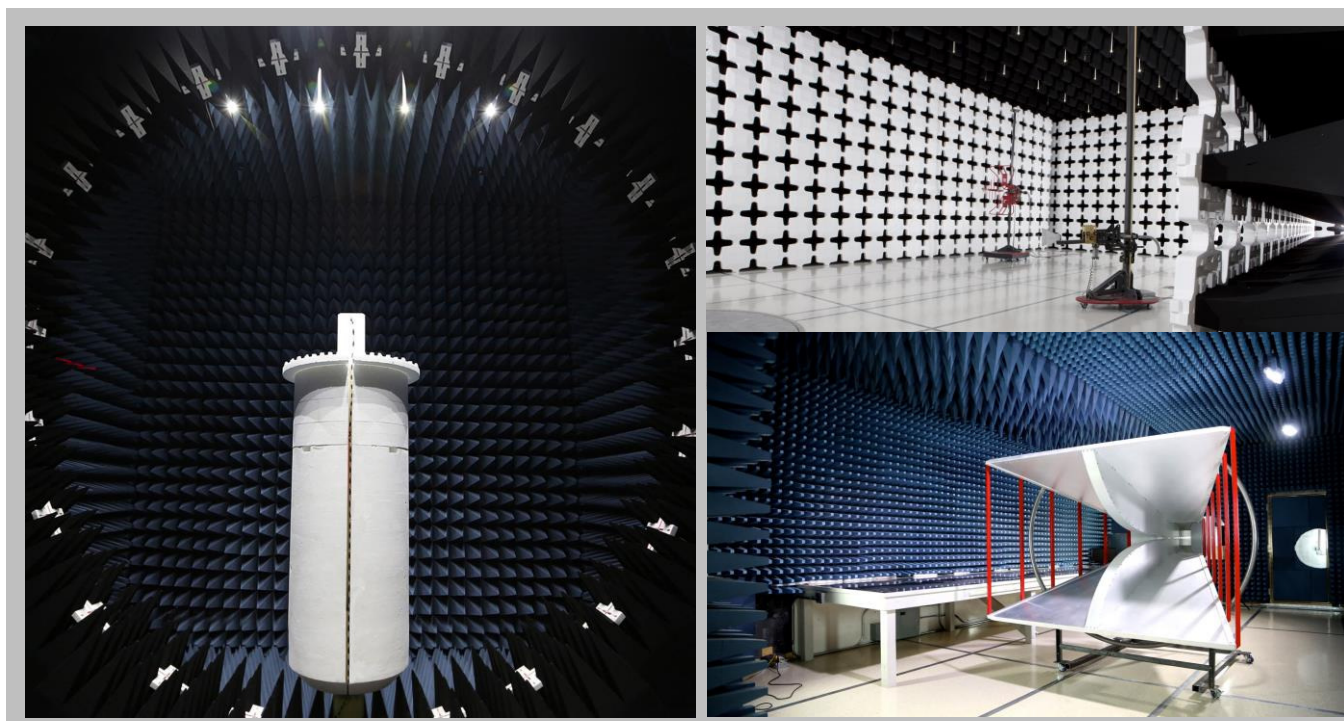

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Walt Disney Parks and Resorts US, Inc.
Address:	PO Box 10000
City, State, Zip:	Lake Buena Vista, FL 32830
Test Requested By:	Brian Piquette of Synapse Product Development LLC
Model:	TPv2 (DAP 2)
First Date of Test:	September 01, 2016
Last Date of Test:	November 10, 2016
Receipt Date of Samples:	August 31, 2016
Equipment Design Stage:	Production
Equipment Condition:	No Damage

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
Multi-ticket media reader with Ethernet network interface Device containing an HF RFID reader (ISO 14443), UHF RFID Reader (ISO 18000), BT/BLE Radio, and proprietary 2.4GHz DTS radio.
Testing Objective:
To demonstrate compliance of the 2.4 GHz DTS radio to FCC 15.247 requirements.

CONFIGURATIONS

Configuration SYNA0194- 1

Software/Firmware Running during test					
Description			Version		
LRR Firmware (2.4 GHz)			0.10F		
EUT					
Description	Manufacturer		Model/Part Number	Serial Number	
Access Point	Walt Disney Parks and Resorts US, Inc.		TPv2	850-1631035	
Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Power Cable	No	.5m	No	Access Point	DC Power Supply

Configuration SYNA0194- 6

Software/Firmware Running during test					
Description		Version			
LRR Firmware (2.4 GHz)		0.10F			
EUT					
Description	Manufacturer	Model/Part Number	Serial Number		
Internal Antenna	Disney/Synapse	TPv2	None		
Access Point	Walt Disney Parks and Resorts US, Inc.	TPv2	850-1631028		
Peripherals in test setup boundary					
Description	Manufacturer	Model/Part Number	Serial Number		
Access Point Fixture	Walt Disney Parks and Resorts US, Inc.	310-019778-Rev-01	No		
Scanner	Zebra	SE4710	Unknown		
Remote Equipment Outside of Test Setup Boundary					
Description	Manufacturer	Model/Part Number	Serial Number		
POE Injector	Unknown	Unknown	Unknown		
Laptop	Apple	Macbook Air	C02NP2WDG5RQ		
Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Ethernet Cable	No	6m	No	Access Point	POE Injector
USB Cable	Yes	1m	No	Access Point	Scanner
Ethernet Cable	No	1m	No	POE Injector	Laptop

CONFIGURATIONS

Configuration SYNA0208- 1

Software/Firmware Running during test	
Description	Version
LRR Firmware (2.4 GHz)	0.10F

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Access Point	Synapse	Zoot Pre Production	850-1631004
External Antenna	Disney/Synapse	300-001220	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Access Point Fixture	Synapse	310-019778-Rev-01	No
Scanner	Zebra	SE4710	Unknown

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
POE Injector	Unknown	Unknown	Unknown
DC Power Supply	Topward Electronics	TPS-2000	TPD

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Power Cable	No	.5m	No	Access Point	DC Power Supply
Ethernet Cable	No	6m	No	Access Point	POE Injector
USB Cable	Yes	1m	No	Access Point	Scanner
Ethernet Cable	No	1m	No	POE Injector	Laptop
AC Power	No	2.5m	No	DC Power Supply	AC mains
RF Cable (SMA)	Yes	3m	No	Access Point	50 Ohm Terminator

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	9/1/2016	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	9/1/2016	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	9/1/2016	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	9/1/2016	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	9/1/2016	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	9/1/2016	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
7	9/8/2016	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
8	9/12/2016	AC – Powerline Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
9	11/10/2016	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

AC – POWERLINE CONDUCTED EMISSIONS

TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Per the standard, an insulating material was also added to ground plane between the EUT's power and remote I/O cables. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50ohm measuring port is terminated by a 50ohm EMI meter or a 50ohm resistive load. All 50ohm measuring ports of the LISN are terminated by 50ohm. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable - Conducted Cable Assembly	Northwest EMC	EVG, HHD, RKA	EVGA	5/10/2016	5/10/2017
LISN	Solar Electronics	9252-50-R-24-BNC	LIP	1/27/2015	1/27/2017
Receiver	Rohde & Schwarz	ESCI	ARH	3/21/2016	3/21/2017
Power Supply - DC	Topward	TPS-2000	TPD	NCR	NCR

MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	2.4 dB	-2.4 dB

CONFIGURATIONS INVESTIGATED

SYNA0194-6

MODES INVESTIGATED

Transmit, LRR Radio. 2482 MHz.

AC – POWERLINE CONDUCTED EMISSIONS

EUT:	TPv2 (DAP 2)	Work Order:	SYNA0194
Serial Number:	850-1631004	Date:	09/12/2016
Customer:	Walt Disney Parks and Resorts US, Inc.	Temperature:	23.3°C
Attendees:	None	Relative Humidity:	40.5%
Customer Project:	None	Bar. Pressure:	1022 mb
Tested By:	Jared Ison	Job Site:	EV07
Power:	24 VDC	Configuration:	SYNA0194-6

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2016	ANSI C63.10:2013

TEST PARAMETERS

Run #:	7	Line:	High Line	Add. Ext. Attenuation (dB):	0
--------	---	-------	-----------	-----------------------------	---

COMMENTS



face plate # 3691-3605.

EUT OPERATING MODES

Transmit, LRR Radio. 2482 MHz.

DEVIATIONS FROM TEST STANDARD

None.

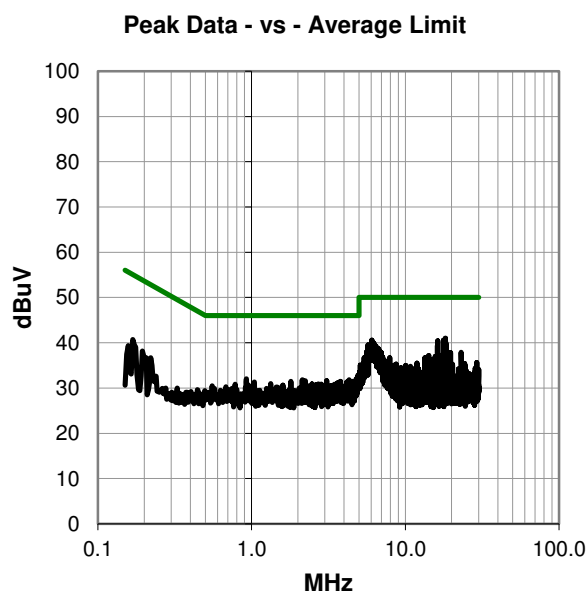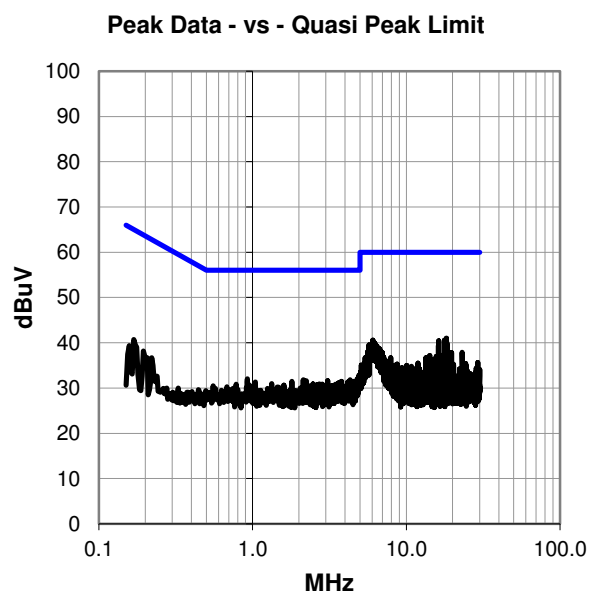

AC – POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #7

Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
18.241	20.4	20.6	41.0	60.0	-19.0
6.056	20.5	20.1	40.6	60.0	-19.4
17.692	20.0	20.6	40.6	60.0	-19.4
16.226	20.0	20.4	40.4	60.0	-19.6
6.153	20.1	20.1	40.2	60.0	-19.8
18.304	19.5	20.6	40.1	60.0	-19.9
6.239	19.7	20.1	39.8	60.0	-20.2
6.007	19.6	20.1	39.7	60.0	-20.3
18.364	19.0	20.7	39.7	60.0	-20.3
5.724	19.4	20.1	39.5	60.0	-20.5
16.166	19.0	20.4	39.4	60.0	-20.6
6.343	19.1	20.1	39.2	60.0	-20.8
6.455	19.1	20.1	39.2	60.0	-20.8
6.537	18.6	20.1	38.7	60.0	-21.3
6.709	18.6	20.1	38.7	60.0	-21.3
17.938	17.5	20.6	38.1	60.0	-21.9
18.487	17.4	20.7	38.1	60.0	-21.9
5.608	18.0	20.0	38.0	60.0	-22.0
6.813	17.8	20.1	37.9	60.0	-22.1
23.128	17.1	20.8	37.9	60.0	-22.1
6.996	17.7	20.1	37.8	60.0	-22.2
19.711	17.1	20.7	37.8	60.0	-22.2
18.912	17.0	20.7	37.7	60.0	-22.3
5.698	17.4	20.1	37.5	60.0	-22.5
16.472	16.8	20.5	37.3	60.0	-22.7
6.936	17.1	20.1	37.2	60.0	-22.8

Peak Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
18.241	20.4	20.6	41.0	50.0	-9.0
6.056	20.5	20.1	40.6	50.0	-9.4
17.692	20.0	20.6	40.6	50.0	-9.4
16.226	20.0	20.4	40.4	50.0	-9.6
6.153	20.1	20.1	40.2	50.0	-9.8
18.304	19.5	20.6	40.1	50.0	-9.9
6.239	19.7	20.1	39.8	50.0	-10.2
6.007	19.6	20.1	39.7	50.0	-10.3
18.364	19.0	20.7	39.7	50.0	-10.3
5.724	19.4	20.1	39.5	50.0	-10.5
16.166	19.0	20.4	39.4	50.0	-10.6
6.343	19.1	20.1	39.2	50.0	-10.8
6.455	19.1	20.1	39.2	50.0	-10.8
6.537	18.6	20.1	38.7	50.0	-11.3
6.709	18.6	20.1	38.7	50.0	-11.3
17.938	17.5	20.6	38.1	50.0	-11.9
18.487	17.4	20.7	38.1	50.0	-11.9
5.608	18.0	20.0	38.0	50.0	-12.0
6.813	17.8	20.1	37.9	50.0	-12.1
23.128	17.1	20.8	37.9	50.0	-12.1
6.996	17.7	20.1	37.8	50.0	-12.2
19.711	17.1	20.7	37.8	50.0	-12.2
18.912	17.0	20.7	37.7	50.0	-12.3
5.698	17.4	20.1	37.5	50.0	-12.5
16.472	16.8	20.5	37.3	50.0	-12.7
6.936	17.1	20.1	37.2	50.0	-12.8

CONCLUSION

Pass



Tested By

AC – POWERLINE CONDUCTED EMISSIONS

EUT:	TPv2 (DAP 2)	Work Order:	SYNA0194
Serial Number:	850-1631004	Date:	09/12/2016
Customer:	Walt Disney Parks and Resorts US, Inc.	Temperature:	23.3°C
Attendees:	None	Relative Humidity:	40.5%
Customer Project:	None	Bar. Pressure:	1022 mb
Tested By:	Jared Ison	Job Site:	EV07
Power:	24 VDC	Configuration:	SYNA0194-6

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2016	ANSI C63.10:2013

TEST PARAMETERS

Run #:	8	Line:	Neutral	Add. Ext. Attenuation (dB):	0
--------	---	-------	---------	-----------------------------	---

COMMENTS



face plate # 3691-3605.

EUT OPERATING MODES

Transmit, LRR Radio. 2482 MHz.

DEVIATIONS FROM TEST STANDARD

None.

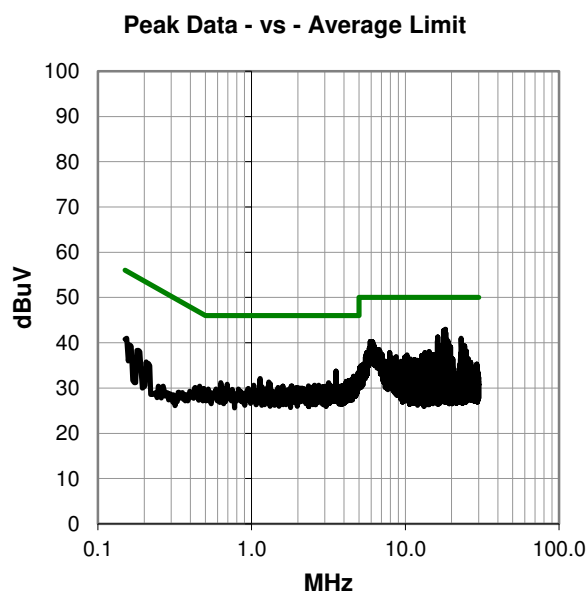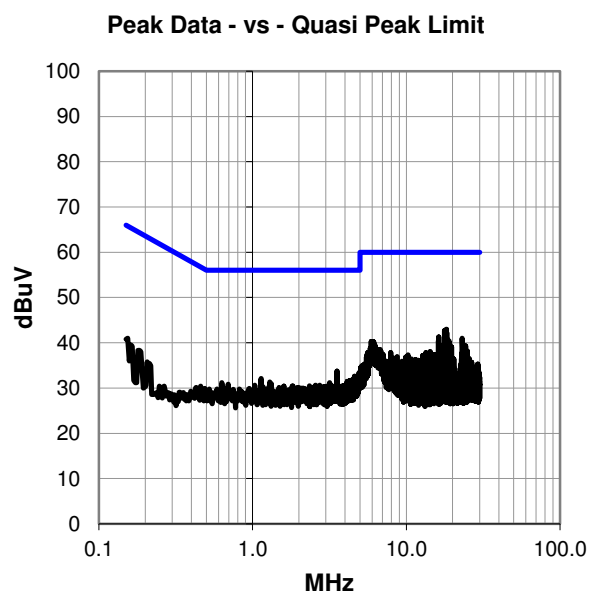

AC – POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #8

Peak Data - vs - Quasi Peak Limit


Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
18.241	22.4	20.6	43.0	60.0	-17.0
17.692	22.1	20.6	42.7	60.0	-17.3
18.304	21.6	20.6	42.2	60.0	-17.8
16.226	20.9	20.4	41.3	60.0	-18.7
18.364	20.3	20.7	41.0	60.0	-19.0
23.124	20.2	20.8	41.0	60.0	-19.0
16.166	20.0	20.4	40.4	60.0	-19.6
18.912	19.7	20.7	40.4	60.0	-19.6
5.907	20.2	20.1	40.3	60.0	-19.7
6.078	20.2	20.1	40.3	60.0	-19.7
6.157	20.0	20.1	40.1	60.0	-19.9
6.000	19.8	20.1	39.9	60.0	-20.1
6.127	19.4	20.1	39.5	60.0	-20.5
16.897	18.8	20.6	39.4	60.0	-20.6
24.348	18.3	21.0	39.3	60.0	-20.7
6.295	19.1	20.1	39.2	60.0	-20.8
17.938	18.6	20.6	39.2	60.0	-20.8
18.487	18.5	20.7	39.2	60.0	-20.8
19.707	18.4	20.7	39.1	60.0	-20.9
6.388	18.5	20.1	38.6	60.0	-21.4
6.750	18.4	20.1	38.5	60.0	-21.5
6.563	18.3	20.1	38.4	60.0	-21.6
6.597	18.3	20.1	38.4	60.0	-21.6
16.838	17.7	20.6	38.3	60.0	-21.7
6.821	18.1	20.1	38.2	60.0	-21.8
17.569	17.6	20.6	38.2	60.0	-21.8

Peak Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
18.241	22.4	20.6	43.0	50.0	-7.0
17.692	22.1	20.6	42.7	50.0	-7.3
18.304	21.6	20.6	42.2	50.0	-7.8
16.226	20.9	20.4	41.3	50.0	-8.7
18.364	20.3	20.7	41.0	50.0	-9.0
23.124	20.2	20.8	41.0	50.0	-9.0
16.166	20.0	20.4	40.4	50.0	-9.6
18.912	19.7	20.7	40.4	50.0	-9.6
5.907	20.2	20.1	40.3	50.0	-9.7
6.078	20.2	20.1	40.3	50.0	-9.7
6.157	20.0	20.1	40.1	50.0	-9.9
6.000	19.8	20.1	39.9	50.0	-10.1
6.127	19.4	20.1	39.5	50.0	-10.5
16.897	18.8	20.6	39.4	50.0	-10.6
24.348	18.3	21.0	39.3	50.0	-10.7
6.295	19.1	20.1	39.2	50.0	-10.8
17.938	18.6	20.6	39.2	50.0	-10.8
18.487	18.5	20.7	39.2	50.0	-10.8
19.707	18.4	20.7	39.1	50.0	-10.9
6.388	18.5	20.1	38.6	50.0	-11.4
6.750	18.4	20.1	38.5	50.0	-11.5
6.563	18.3	20.1	38.4	50.0	-11.6
6.597	18.3	20.1	38.4	50.0	-11.6
16.838	17.7	20.6	38.3	50.0	-11.7
6.821	18.1	20.1	38.2	50.0	-11.8
17.569	17.6	20.6	38.2	50.0	-11.8

CONCLUSION

Pass



Tested By

SPURIOUS RADIATED EMISSIONS - INTERNAL ANTENNA

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

2482 MHz transmit channel. GFSK modulation.

POWER SETTINGS INVESTIGATED

24 VDC

POE

CONFIGURATIONS INVESTIGATED

SYNA0194 - 6

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26 GHz
-----------------	--------	----------------	--------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Amplifier - Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AVU	11/4/2015	12 mo
Cable	ESM Cable Corp.	KMKM-72	EVY	11/4/2015	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AIV	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVD	3/11/2016	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AHV	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVC	3/11/2016	12 mo
Cable	None	Standard Gain Horns Cable	EVF	3/11/2016	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AHU	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	PAG	3/11/2016	12 mo
Cable	N/A	Double Ridge Horn Cables	EVB	3/11/2016	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AIZ	2/3/2016	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AOL	3/11/2016	12 mo
Cable	N/A	Bilog Cables	EVA	3/11/2016	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AXR	6/30/2016	24 mo
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAQ	4/22/2016	12 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization. A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

SPURIOUS RADIATED EMISSIONS - INTERNAL ANTENNA


**NORTHWEST
EMC**

PSA-ESCI 2016.07.22
EmiR5 2016.07.22.1

Work Order:	SYNA0194	Date:	09/08/16	
Project:	None	Temperature:	23.7 °C	
Job Site:	EV01	Humidity:	44.6% RH	
Serial Number:	850-1631004	Barometric Pres.:	1027 mbar	
EUT:		TPv2 (DAP 2)		
Configuration:		6		
Customer:		Walt Disney Parks and Resorts US, Inc.		
Attendees:		None		
EUT Power:		24 VDC		
Operating Mode:		Transmit.		
Deviations:		None		
Comments:		face plate # 3691-3605.		

Test Specifications	Test Method
FCC 15.247:2016	ANSI C63.10:2013

Run #	64	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

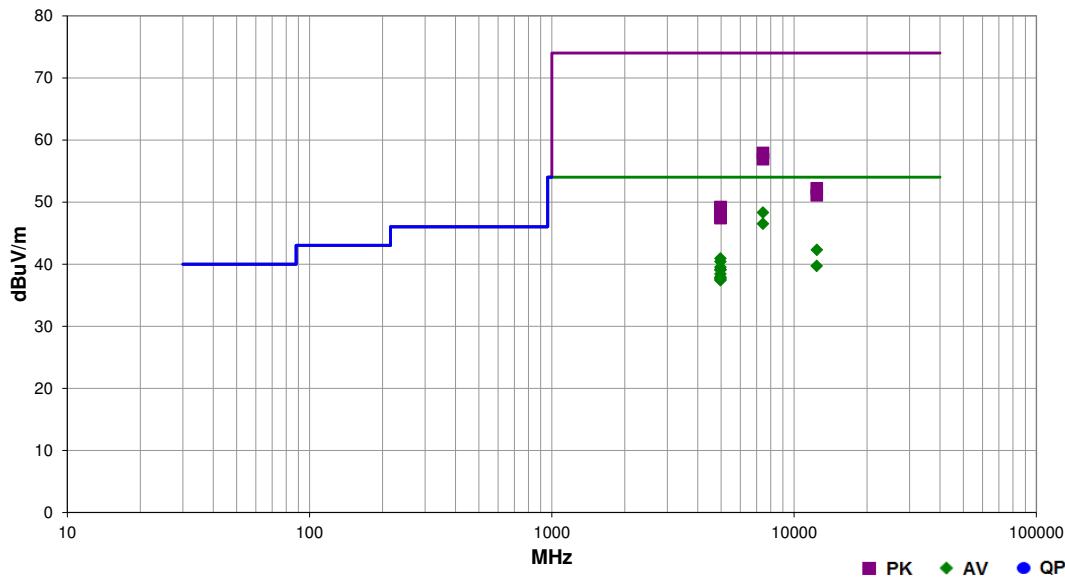

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7445.875	29.8	18.5	1.0	180.0	3.0	0.0	Vert	AV	0.0	48.3	54.0	-5.7	High Ch. 2482 MHz, 24 VDC, EUT Vert
7446.042	28.0	18.5	1.0	188.0	3.0	0.0	Horz	AV	0.0	46.5	54.0	-7.5	High Ch. 2482 MHz, 24 VDC, EUT Horz
12410.410	30.0	12.3	3.2	174.0	3.0	0.0	Horz	AV	0.0	42.3	54.0	-11.7	High Ch. 2482 MHz, 24 VDC, EUT Horz
4963.950	31.5	9.4	1.5	192.0	3.0	0.0	Horz	AV	0.0	40.9	54.0	-13.1	High Ch. 2482 MHz, 24 VDC, EUT Horz
4963.858	31.0	9.4	2.3	241.0	3.0	0.0	Horz	AV	0.0	40.4	54.0	-13.6	High Ch. 2482 MHz, POE, EUT Horz
12410.070	27.4	12.3	1.0	159.0	3.0	0.0	Vert	AV	0.0	39.7	54.0	-14.3	High Ch. 2482 MHz, 24 VDC, EUT Vert
4963.908	30.1	9.4	1.8	165.0	3.0	0.0	Horz	AV	0.0	39.5	54.0	-14.5	High Ch. 2482 MHz, 24 VDC, EUT On Side
4963.842	29.7	9.4	1.0	194.0	3.0	0.0	Horz	AV	0.0	39.1	54.0	-14.9	High Ch. 2482 MHz, 24 VDC, EUT Vert
4963.792	29.7	9.4	1.8	167.0	3.0	0.0	Horz	AV	0.0	39.1	54.0	-14.9	High Ch. 2482 MHz, POE, EUT On Side
4963.917	29.7	9.4	1.0	157.0	3.0	0.0	Horz	AV	0.0	39.1	54.0	-14.9	High Ch. 2482 MHz, POE, EUT Vert
4963.933	29.0	9.4	1.2	142.0	3.0	0.0	Vert	AV	0.0	38.4	54.0	-15.6	High Ch. 2482 MHz, POE, EUT Vert
4963.958	28.5	9.4	1.0	194.0	3.0	0.0	Vert	AV	0.0	37.9	54.0	-16.1	High Ch. 2482 MHz, 24 VDC, EUT Vert
7445.883	39.4	18.5	1.0	180.0	3.0	0.0	Vert	PK	0.0	57.9	74.0	-16.1	High Ch. 2482 MHz, 24 VDC, EUT Vert
4963.800	28.4	9.4	1.0	257.0	3.0	0.0	Vert	AV	0.0	37.8	54.0	-16.2	High Ch. 2482 MHz, 24 VDC, EUT Vert
4963.900	28.3	9.4	1.0	160.0	3.0	0.0	Vert	AV	0.0	37.7	54.0	-16.3	High Ch. 2482 MHz, 24 VDC, EUT Horz
4963.858	28.1	9.4	1.0	260.0	3.0	0.0	Vert	AV	0.0	37.5	54.0	-16.5	High Ch. 2482 MHz, POE, EUT On Side
4963.958	28.0	9.4	1.0	270.0	3.0	0.0	Vert	AV	0.0	37.4	54.0	-16.6	High Ch. 2482 MHz, 24 VDC, EUT On Side
7446.158	38.4	18.5	1.0	188.0	3.0	0.0	Horz	PK	0.0	56.9	74.0	-17.1	High Ch. 2482 MHz, 24 VDC, EUT Horz
12409.660	39.9	12.3	3.2	174.0	3.0	0.0	Horz	PK	0.0	52.2	74.0	-21.8	High Ch. 2482 MHz, 24 VDC, EUT Horz
12409.100	38.8	12.3	1.0	159.0	3.0	0.0	Vert	PK	0.0	51.1	74.0	-22.9	High Ch. 2482 MHz, 24 VDC, EUT Vert
4963.592	39.8	9.4	1.5	192.0	3.0	0.0	Horz	PK	0.0	49.2	74.0	-24.8	High Ch. 2482 MHz, 24 VDC, EUT Horz
4964.175	39.7	9.4	2.3	241.0	3.0	0.0	Horz	PK	0.0	49.1	74.0	-24.9	High Ch. 2482 MHz, POE, EUT Horz
4964.083	39.3	9.4	1.0	194.0	3.0	0.0	Horz	PK	0.0	48.7	74.0	-25.3	High Ch. 2482 MHz, POE, EUT Vert
4964.192	39.3	9.4	1.0	157.0	3.0	0.0	Horz	PK	0.0	48.7	74.0	-25.3	High Ch. 2482 MHz, POE, EUT Vert
4963.508	39.1	9.4	1.8	165.0	3.0	0.0	Horz	PK	0.0	48.5	74.0	-25.5	High Ch. 2482 MHz, 24 VDC, EUT On Side
4965.292	38.9	9.4	1.0	257.0	3.0	0.0	Vert	PK	0.0	48.3	74.0	-25.7	High Ch. 2482 MHz, POE, EUT Horz
4963.600	38.8	9.4	1.2	142.0	3.0	0.0	Vert	PK	0.0	48.2	74.0	-25.8	High Ch. 2482 MHz, POE, EUT Vert
4963.817	38.7	9.4	1.8	167.0	3.0	0.0	Horz	PK	0.0	48.1	74.0	-25.9	High Ch. 2482 MHz, POE, EUT On Side
4963.850	38.5	9.4	1.0	160.0	3.0	0.0	Vert	PK	0.0	47.9	74.0	-26.1	High Ch. 2482 MHz, 24 VDC, EUT Horz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4962.658	38.5	9.4	1.0	194.0	3.0	0.0	Vert	PK	0.0	47.9	74.0	-26.1	High Ch. 2482 MHz, 24 VDC, EUT Vert
4963.233	38.2	9.4	1.0	270.0	3.0	0.0	Vert	PK	0.0	47.6	74.0	-26.4	High Ch. 2482 MHz, 24 VDC, EUT On Side
4964.000	38.0	9.4	1.0	260.0	3.0	0.0	Vert	PK	0.0	47.4	74.0	-26.6	High Ch. 2482 MHz, POE, EUT On Side

SPURIOUS RADIATED EMISSIONS - INTERNAL ANTENNA




PSA-ESCI 2016.07.22
EmiRS 2016.07.22.1

Emirs 2016.07.22

Work Order:	SYNA0194	Date:	09/08/16		
Project:	None	Temperature:	22.3 °C		
Job Site:	EV01	Humidity:	43.3% RH		
Serial Number:	850-1631004	Barometric Pres.:	1029 mbar	Tested by:	Jared Ison
EUT:	TPv2 (DAP 2)				
Configuration:	6				
Customer:	Walt Disney Parks and Resorts US, Inc.				
Attendees:	None				
EUT Power:	24 VDC				
Operating Mode:	Transmit.				
Deviations:	None				
Comments:	face plate # 3691-3605.				

Test Specifications	Test Method
FCC 15.247:2016	ANSI C63.10:2013

Run #	66	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

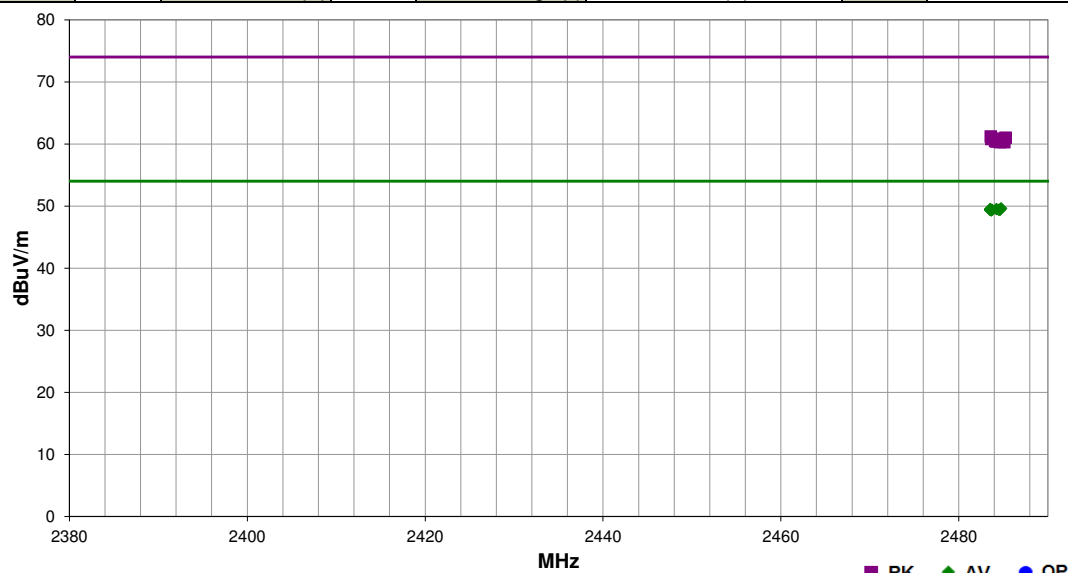

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2484.760	30.7	-1.1	1.0	266.0	3.0	20.0	Horz	AV	0.0	49.6	54.0	-4.4	High Ch. 2482 MHz, 24 VDC, EUT Horz
2484.233	30.6	-1.1	1.0	336.0	3.0	20.0	Vert	AV	0.0	49.5	54.0	-4.5	High Ch. 2482 MHz, 24 VDC, EUT Horz
2483.537	30.6	-1.1	1.0	252.0	3.0	20.0	Horz	AV	0.0	49.5	54.0	-4.5	High Ch. 2482 MHz, POE, EUT Vert
2483.537	30.5	-1.1	1.0	297.0	3.0	20.0	Horz	AV	0.0	49.4	54.0	-4.6	High Ch. 2482 MHz, 24 VDC, EUT Vert
2484.507	30.5	-1.1	1.0	300.0	3.0	20.0	Vert	AV	0.0	49.4	54.0	-4.6	High Ch. 2482 MHz, 24 VDC, EUT Vert
2483.567	30.5	-1.1	1.0	290.0	3.0	20.0	Vert	AV	0.0	49.4	54.0	-4.6	High Ch. 2482 MHz, POE, EUT Vert
2483.577	30.5	-1.1	1.0	114.0	3.0	20.0	Horz	AV	0.0	49.4	54.0	-4.6	High Ch. 2482 MHz, POE, EUT On Side
2484.653	30.5	-1.1	1.0	200.0	3.0	20.0	Vert	AV	0.0	49.4	54.0	-4.6	High Ch. 2482 MHz, POE, EUT On Side
2483.540	30.5	-1.1	2.3	282.0	3.0	20.0	Horz	AV	0.0	49.4	54.0	-4.6	High Ch. 2482 MHz, POE, EUT Horz
2483.727	30.5	-1.1	1.0	87.0	3.0	20.0	Vert	AV	0.0	49.4	54.0	-4.6	High Ch. 2482 MHz, POE, EUT Horz
2483.650	30.4	-1.1	2.4	312.0	3.0	20.0	Horz	AV	0.0	49.3	54.0	-4.7	High Ch. 2482 MHz, 24 VDC, EUT On Side
2483.690	30.4	-1.1	1.0	67.0	3.0	20.0	Vert	AV	0.0	49.3	54.0	-4.7	High Ch. 2482 MHz, 24 VDC, EUT On Side
2483.603	42.3	-1.1	1.0	87.0	3.0	20.0	Vert	PK	0.0	61.2	74.0	-12.8	High Ch. 2482 MHz, POE, EUT Horz
2485.253	42.1	-1.1	1.0	336.0	3.0	20.0	Vert	PK	0.0	61.0	74.0	-13.0	High Ch. 2482 MHz, 24 VDC, EUT Horz
2483.663	41.9	-1.1	1.0	67.0	3.0	20.0	Vert	PK	0.0	60.8	74.0	-13.2	High Ch. 2482 MHz, 24 VDC, EUT On Side
2484.203	41.9	-1.1	1.0	114.0	3.0	20.0	Horz	PK	0.0	60.8	74.0	-13.2	High Ch. 2482 MHz, POE, EUT On Side
2484.260	41.9	-1.1	2.3	282.0	3.0	20.0	Horz	PK	0.0	60.8	74.0	-13.2	High Ch. 2482 MHz, POE, EUT Horz
2484.650	41.8	-1.1	1.0	200.0	3.0	20.0	Vert	PK	0.0	60.7	74.0	-13.3	High Ch. 2482 MHz, POE, EUT On Side
2484.093	41.6	-1.1	1.0	297.0	3.0	20.0	Horz	PK	0.0	60.5	74.0	-13.5	High Ch. 2482 MHz, 24 VDC, EUT Vert
2484.937	41.6	-1.1	1.0	252.0	3.0	20.0	Horz	PK	0.0	60.5	74.0	-13.5	High Ch. 2482 MHz, POE, EUT Vert
2484.210	41.5	-1.1	1.0	266.0	3.0	20.0	Horz	PK	0.0	60.4	74.0	-13.6	High Ch. 2482 MHz, 24 VDC, EUT Horz
2484.453	41.5	-1.1	1.0	290.0	3.0	20.0	Vert	PK	0.0	60.4	74.0	-13.6	High Ch. 2482 MHz, POE, EUT Vert
2485.110	41.4	-1.1	1.0	300.0	3.0	20.0	Vert	PK	0.0	60.3	74.0	-13.7	High Ch. 2482 MHz, 24 VDC, EUT Vert
2484.650	41.4	-1.1	2.4	312.0	3.0	20.0	Horz	PK	0.0	60.3	74.0	-13.7	High Ch. 2482 MHz, 24 VDC, EUT On Side

SPURIOUS RADIATED EMISSIONS - EXTERNAL ANTENNA

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

2482 Mhz Transmit channel, GFSK modulation

POWER SETTINGS INVESTIGATED

POE

24VDC

CONFIGURATIONS INVESTIGATED

SYNA0208 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26500 MHz
-----------------	--------	----------------	-----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAQ	4/22/2016	12 mo
Cable	ESM Cable Corp.	KMKM-72	EVY	10/17/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AVU	10/17/2016	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AIV	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVD	3/11/2016	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AHV	NCR	0 mo
Cable	None	Standard Gain Horns Cable	EVF	3/11/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVC	3/11/2016	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AHU	NCR	0 mo
Filter - High Pass	Micro-Tronics	HPM50111	HFO	3/22/2016	12 mo
Attenuator	Coaxicom	3910-20	AXZ	5/18/2016	12 mo
Cable	N/A	Double Ridge Horn Cables	EVB	3/11/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	PAG	3/11/2016	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AIZ	2/3/2016	24 mo
Filter - Low Pass	Micro-Tronics	LPM50004	LFD	5/18/2016	12 mo
Cable	N/A	Bilog Cables	EVA	3/11/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AOL	3/11/2016	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AXR	6/30/2016	24 mo

TEST DESCRIPTION

The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization. A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

SPURIOUS RADIATED EMISSIONS - EXTERNAL ANTENNA




PSA-ESCI 2016.07.22
EmiR5 2016.08.22

Work Order:	SYNA0208	Date:	11/10/16		
Project:	None	Temperature:	21.7 °C		
Job Site:	EV01	Humidity:	49.6% RH		
Serial Number:	850-1631004	Barometric Pres.:	1021 mbar	Tested by:	Brandon Hobbs
EUT:	TPv2 (DAP2)				
Configuration:	1				
Customer:	Walt Disney Parks and Resorts US, Inc.				
Attendees:	None				
EUT Power:	Reference Data Comments				
Operating Mode:	2482 Mhz Transmit channel, GFSK modulation				
Deviations:	None				
Comments:	face plate # 3691-3605 External Antenna. There are only two possible antenna orientations due to symmetry. Please reference the data comments for EUT orientation and power applied.				

Test Specifications	Test Method
FCC 15.247:2016	ANSI C63.10:2013

Run #	4	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	---	-------------------	---	-------------------	-----------	---------	------

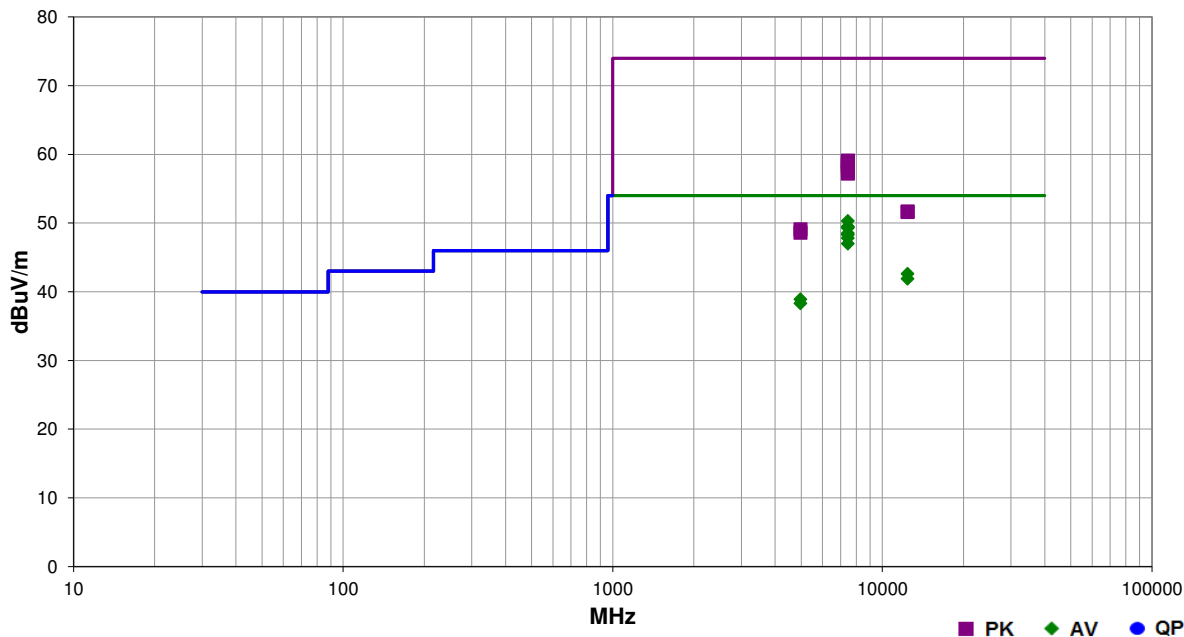

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7445.895	31.8	18.5	1.0	187.0	3.0	0.0	Vert	AV	0.0	50.3	54.0	-3.7	24VDC, EUT Vertical
7446.070	31.0	18.5	1.0	189.0	3.0	0.0	Vert	AV	0.0	49.5	54.0	-4.5	24VDC, EUT Vertical
7445.920	30.9	18.5	3.2	200.0	3.0	0.0	Vert	AV	0.0	49.4	54.0	-4.6	POE, EUT Horizontal
7445.835	30.8	18.5	1.0	190.0	3.0	0.0	Vert	AV	0.0	49.3	54.0	-4.7	POE, EUT Vertical
7446.180	30.0	18.5	1.7	180.0	3.0	0.0	Horz	AV	0.0	48.5	54.0	-5.5	24VDC, EUT Horizontal
7445.960	29.8	18.5	4.0	147.0	3.0	0.0	Horz	AV	0.0	48.3	54.0	-5.7	POE, EUT Horizontal
7445.875	29.3	18.5	2.4	179.0	3.0	0.0	Horz	AV	0.0	47.8	54.0	-6.2	POE, EUT Vertical
7445.700	28.5	18.5	1.0	258.0	3.0	0.0	Horz	AV	0.0	47.0	54.0	-7.0	24VDC, EUT Vertical
12410.360	30.3	12.3	1.4	193.0	3.0	0.0	Horz	AV	0.0	42.6	54.0	-11.4	24VDC, EUT Horizontal
12409.460	29.6	12.3	1.3	205.0	3.0	0.0	Vert	AV	0.0	41.9	54.0	-12.1	24VDC, EUT Vertical
7446.605	40.6	18.5	1.0	189.0	3.0	0.0	Vert	PK	0.0	59.1	74.0	-14.9	24VDC, EUT Vertical
7446.945	40.4	18.5	1.0	190.0	3.0	0.0	Vert	PK	0.0	58.9	74.0	-15.1	POE, EUT Vertical
7446.670	40.4	18.5	3.2	200.0	3.0	0.0	Vert	PK	0.0	58.9	74.0	-15.1	POE, EUT Horizontal
4963.825	29.5	9.4	1.0	23.0	3.0	0.0	Vert	AV	0.0	38.9	54.0	-15.1	24VDC, EUT Vertical
7445.920	40.1	18.5	1.0	187.0	3.0	0.0	Vert	PK	0.0	58.6	74.0	-15.4	24VDC, EUT Horizontal
7445.730	40.0	18.5	4.0	147.0	3.0	0.0	Horz	PK	0.0	58.5	74.0	-15.5	POE, EUT Horizontal
4963.940	28.9	9.4	2.0	301.0	3.0	0.0	Horz	AV	0.0	38.3	54.0	-15.7	24VDC, EUT Horizontal
7447.375	39.6	18.5	1.0	173.0	3.0	0.0	Horz	PK	0.0	58.1	74.0	-15.9	24VDC, EUT Horizontal

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7446.565	39.2	18.5	2.4	179.0	3.0	0.0	Horz	PK	0.0	57.7	74.0	-16.3	POE, EUT Vertical
7446.315	38.7	18.5	1.0	258.0	3.0	0.0	Horz	PK	0.0	57.2	74.0	-16.8	24VDC, EUT Vertical
12410.420	39.4	12.3	1.4	193.0	3.0	0.0	Horz	PK	0.0	51.7	74.0	-22.3	24VDC, EUT Horizontal
12409.940	39.3	12.3	1.3	205.0	3.0	0.0	Vert	PK	0.0	51.6	74.0	-22.4	24VDC, EUT Vertical
4964.245	39.7	9.4	1.0	23.0	3.0	0.0	Vert	PK	0.0	49.1	74.0	-24.9	24VDC, EUT Vertical
4963.740	39.2	9.4	2.0	301.0	3.0	0.0	Horz	PK	0.0	48.6	74.0	-25.4	24VDC, EUT Horizontal

SPURIOUS RADIATED EMISSIONS - EXTERNAL ANTENNA




PSA-ESCI 2016.07.22
EmiR5 2016.08.26

Work Order:	SYNA0208	Date:	11/10/16	
Project:	None	Temperature:	21.7 °C	
Job Site:	EV01	Humidity:	49.6% RH	
Serial Number:	850-1631004	Barometric Pres.:	1021 mbar	
EUT: TPv2 (DAP2)				Tested by: Brandon Hobbs
Configuration:	1			
Customer:	Walt Disney Parks and Resorts US, Inc.			
Attendees:	None			
EUT Power:	Reference Data Comments			
Operating Mode:	2482 Mhz Transmit channel, GFSK modulation			
Deviations:	None			
Comments:	face plate # 3691-3605 External Antenna. There are only two possible antenna orientations due to symmetry. Please reference the data comments for EUT orientation and power applied.			

Test Specifications	Test Method
FCC 15.247:2016	ANSI C63.10:2013

Run #	6	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	---	-------------------	---	-------------------	-----------	---------	------

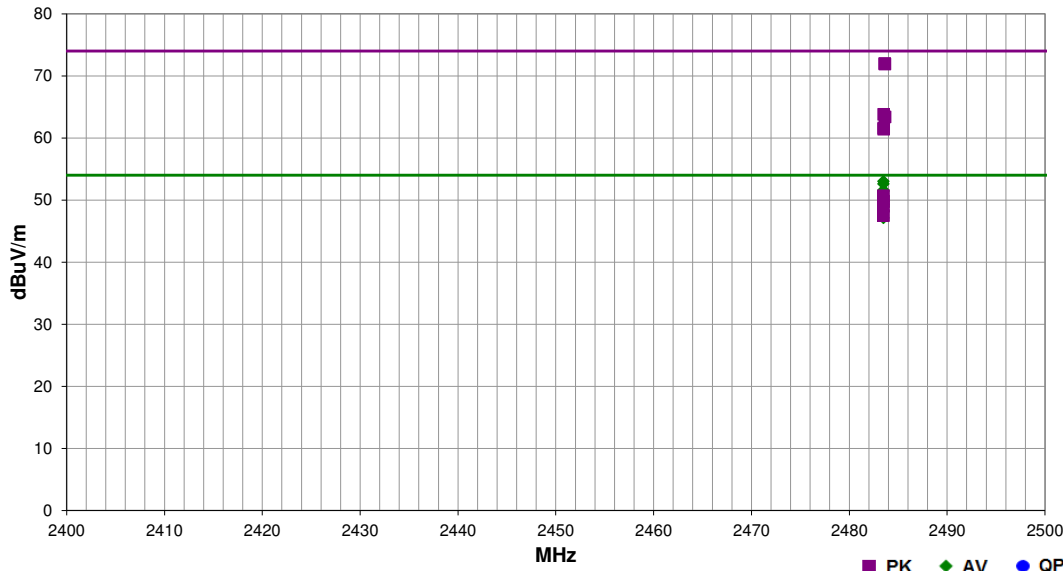


Freq (MHz)	Calculated Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Marker Delta Comments
2483.500	34.1	-1.1	1.0	120.0	3.0	20.0	Vert	AV	0.0	53.0	54.0	-1.0	POE, EUT Horizontal
2483.500	33.7	-1.1	1.0	124.0	3.0	20.0	Vert	AV	0.0	52.6	54.0	-1.4	24VDC, EUT Horizontal
2483.613	53.1	-1.1	1.0	30.0	3.0	20.0	Vert	PK	0.0	72.0	74.0	-2.0	POE, EUT Vertical
2483.640	53.0	-1.1	1.0	15.0	3.0	20.0	Vert	PK	0.0	71.9	74.0	-2.1	24VDC, EUT Vertical
2483.500	32.7	-1.1	1.0	188.0	3.0	20.0	Horz	AV	0.0	51.6	54.0	-2.4	24VDC, EUT Horizontal
2483.500	32.5	-1.1	1.0	194.0	3.0	20.0	Horz	AV	0.0	51.4	54.0	-2.6	POE, EUT Horizontal
2483.500	31.8	-1.2	1.0	21.0	3.0	20.0	Horz	AV	0.0	50.6	54.0	-3.4	24VDC, EUT Vertical: Fund 76.2dBuV + -44.4dBc = 31.8dBuV (calc. amp.)
2483.500	30.5	-1.2	1.0	22.0	3.0	20.0	Vert	AV	0.0	49.3	54.0	-4.7	24VAC, EUT Vertical: Fund 72.2dBuV + -41.7dBc = 30.5dBuV (calc. amp.)
2483.500	30.0	-1.2	1.0	25.0	3.0	20.0	Horz	AV	0.0	48.8	54.0	-5.2	POE, EUT Vertical: Fund 75.6dBuV + -45.6dBc = 30.0dBuV (calc. amp.)
2483.500	28.3	-1.2	1.0	26.0	3.0	20.0	Vert	AV	0.0	47.1	54.0	-6.9	POE, EUT Vertical: Fund 71.2dBuV + -42.9dBc = 28.3dBuV (calc. amp.)
2483.513	44.9	-1.1	1.0	120.0	3.0	20.0	Vert	PK	0.0	63.8	74.0	-10.2	POE, EUT Horizontal
2483.653	44.5	-1.1	1.0	124.0	3.0	20.0	Vert	PK	0.0	63.4	74.0	-10.6	24VDC, EUT Horizontal
2483.507	42.7	-1.1	1.0	194.0	3.0	20.0	Horz	PK	0.0	61.6	74.0	-12.4	POE, EUT Horizontal
2483.507	42.5	-1.1	1.0	188.0	3.0	20.0	Horz	PK	0.0	61.4	74.0	-12.6	24VDC, EUT Horizontal
2483.500	31.9	-1.2	1.0	21.0	3.0	20.0	Horz	PK	0.0	50.7	74.0	-23.3	24VDC, EUT Vertical: Fund 76.3dBuV + -44.4dBc = 31.9dBuV (calc. amp.)
2483.500	31.0	-1.2	1.0	22.0	3.0	20.0	Vert	PK	0.0	49.8	74.0	-24.2	24VAC, EUT Vertical: Fund 72.7dBuV + -41.7dBc = 31.0dBuV (calc. amp.)
2483.500	30.2	-1.2	1.0	25.0	3.0	20.0	Horz	PK	0.0	49.0	74.0	-25.0	POE, EUT Vertical: Fund 75.8dBuV + -45.6dBc = 30.2dBuV (calc. amp.)
2483.500	28.7	-1.2	1.0	26.0	3.0	20.0	Vert	PK	0.0	47.5	74.0	-26.5	POE, EUT Vertical: Fund 71.6dBuV + -42.9dBc = 28.7dBuV (calc. amp.)

SPURIOUS RADIATED EMISSIONS - EXTERNAL ANTENNA

**NORTHWEST
EMC**

PSA-ESCI 2016.07.22
EmiR5 2016.08.26

Work Order:	SYNA0208	Date:	11/10/16	
Project:	None	Temperature:	21.7 °C	
Job Site:	EV01	Humidity:	49.6% RH	
Serial Number:	850-1631004	Barometric Pres.:	1021 mbar	
EUT:	TPv2 (DAP2)			
Configuration:	1			
Customer:	Walt Disney Parks and Resorts US, Inc.			
Attendees:	None			
EUT Power:	24VDC			
Operating Mode:	2482 Mhz Transmit channel, GFSK modulation			
Deviations:	None			
Comments:	Receive Antenna Horizontal, EUT Vertical			
Test Specifications		Test Method		
FCC 15.247:2016		ANSI C63.10:2013		

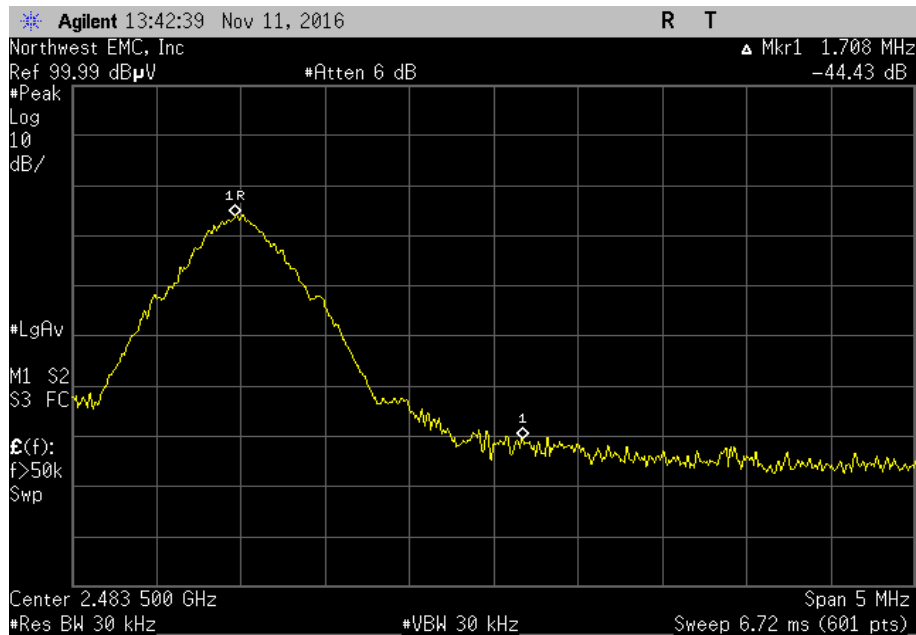


SPURIOUS RADIATED EMISSIONS - EXTERNAL ANTENNA

**NORTHWEST
EMC**

PSA-ESCI 2016.07.22
EmiR5 2016.08.26

Work Order:	SYNA0208	Date:	11/10/16	
Project:	None	Temperature:	21.7 °C	
Job Site:	EV01	Humidity:	49.6% RH	
Serial Number:	850-1631004	Barometric Pres.:	1021 mbar	
EUT:	TPv2 (DAP2)			
Configuration:	1			
Customer:	Walt Disney Parks and Resorts US, Inc.			
Attendees:	None			
EUT Power:	24VDC			
Operating Mode:	2482 Mhz Transmit channel, GFSK modulation			
Deviations:	None			
Comments:	Receive Antenna Vertical, EUT Vertical			
Test Specifications		Test Method		
FCC 15.247:2016		ANSI C63.10:2013		

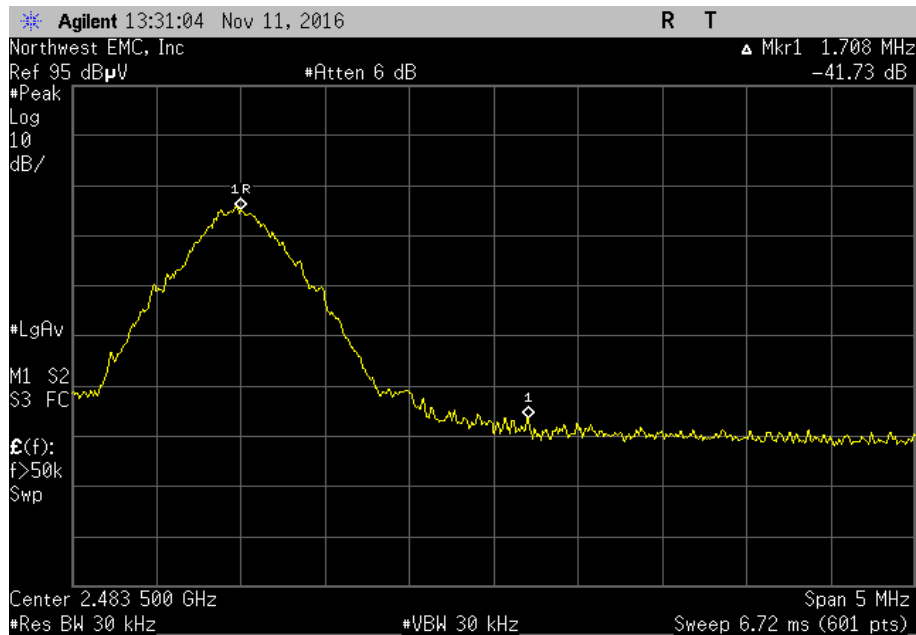


SPURIOUS RADIATED EMISSIONS - EXTERNAL ANTENNA

**NORTHWEST
EMC**

PSA-ESCI 2016.07.22
EmiR5 2016.08.26

Work Order:	SYNA0208	Date:	11/10/16	
Project:	None	Temperature:	21.7 °C	
Job Site:	EV01	Humidity:	49.6% RH	
Serial Number:	850-1631004	Barometric Pres.:	1021 mbar	
EUT:	TPv2 (DAP2)			
Configuration:	1			
Customer:	Walt Disney Parks and Resorts US, Inc.			
Attendees:	None			
EUT Power:	POE			
Operating Mode:	2482 Mhz Transmit channel, GFSK modulation			
Deviations:	None			
Comments:	Receive Antenna Horizontal, EUT Vertical			
Test Specifications				
FCC 15.247:2016		Test Method		
		ANSI C63.10:2013		

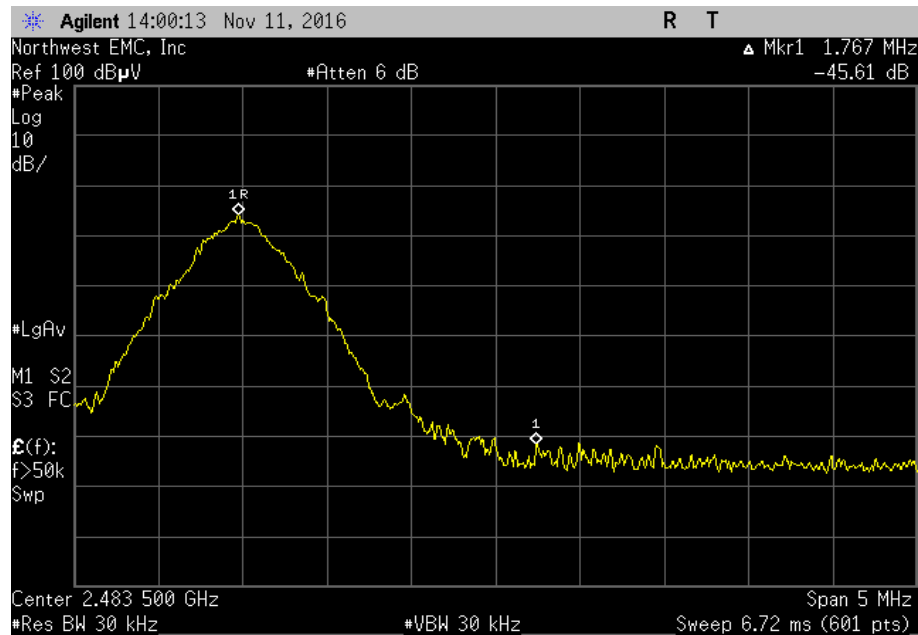


SPURIOUS RADIATED EMISSIONS - EXTERNAL ANTENNA

**NORTHWEST
EMC**

PSA-ESCI 2016.07.22
EmiR5 2016.08.26

Work Order:	SYNA0208	Date:	11/10/16	
Project:	None	Temperature:	21.7 °C	
Job Site:	EV01	Humidity:	49.6% RH	
Serial Number:	850-1631004	Barometric Pres.:	1021 mbar	
EUT:	TPv2 (DAP2)			
Configuration:	1			
Customer:	Walt Disney Parks and Resorts US, Inc.			
Attendees:	None			
EUT Power:	POE			
Operating Mode:	2482 Mhz Transmit channel, GFSK modulation			
Deviations:	None			
Comments:	Receive Antenna Vertical, EUT Vertical			
Test Specifications		Test Method		
FCC 15.247:2016		ANSI C63.10:2013		

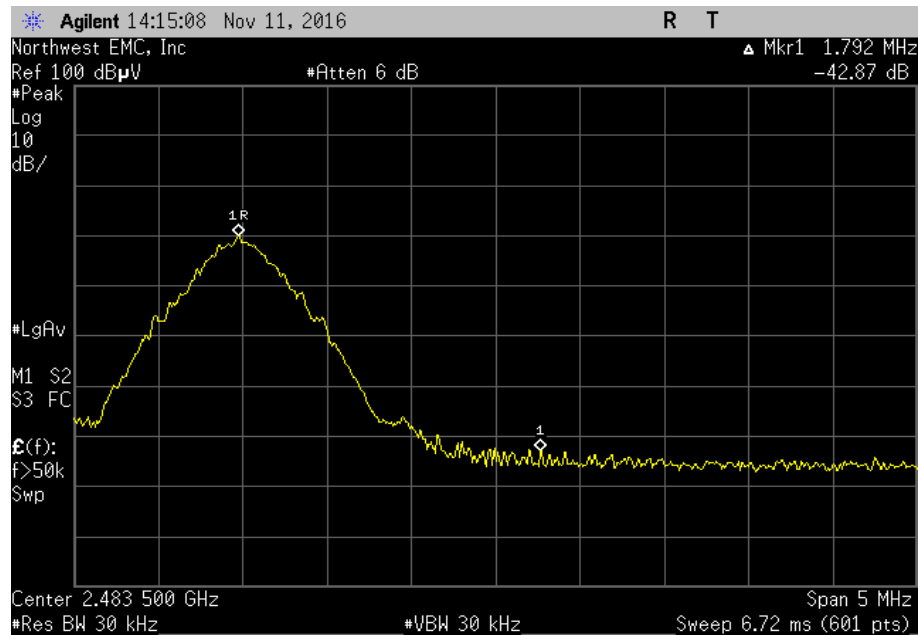

DUTY CYCLE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Meter - Multimeter	Tektronix	DMM912	MMH	2/17/2016	2/17/2019
Power Supply - DC	Topward	TPS-2000	TPD	NCR	NCR
Generator - Signal	Keysight	N5182B	TFU	10/27/2015	10/27/2018
Cable	ESM Cable Corp.	TT	EV1	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	AUY	6/27/2016	6/27/2017
Block - DC	Pasternack	PE8210	AME	10/1/2015	10/1/2016
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	8/10/2016	8/10/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.


DUTY CYCLE

EUT: TPv2 (DAP 2)		Work Order: SYNA0194	
Serial Number: 850-1631035		Date: 09/01/16	
Customer: Walt Disney Parks and Resorts US, Inc.		Temperature: 22.4 °C	
Attendees: Hattie Spetla		Humidity: 45% RH	
Project: None		Barometric Pres.: 1021 mbar	
Tested by: Jared Ison	Power: 24 VDC	Job Site: EV06	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature 	
		Pulse Width	Period
		Number of Pulses	Value (%)
		Limit (%)	Results
2400 MHz - 2483.5 MHz Band			
GFSK			
	2482 MHz transmit channel	10.196 ms	10.653 ms
	2482 MHz transmit channel	N/A	N/A
		1	95.7
		5	N/A
			N/A
			N/A


**NORTHWEST
EMC**

XMit 2016.05.06

2400 MHz - 2483.5 MHz Band, GFSK, 2482 MHz transmit channel						
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
	10.196 ms	10.653 ms	1	95.7	N/A	N/A

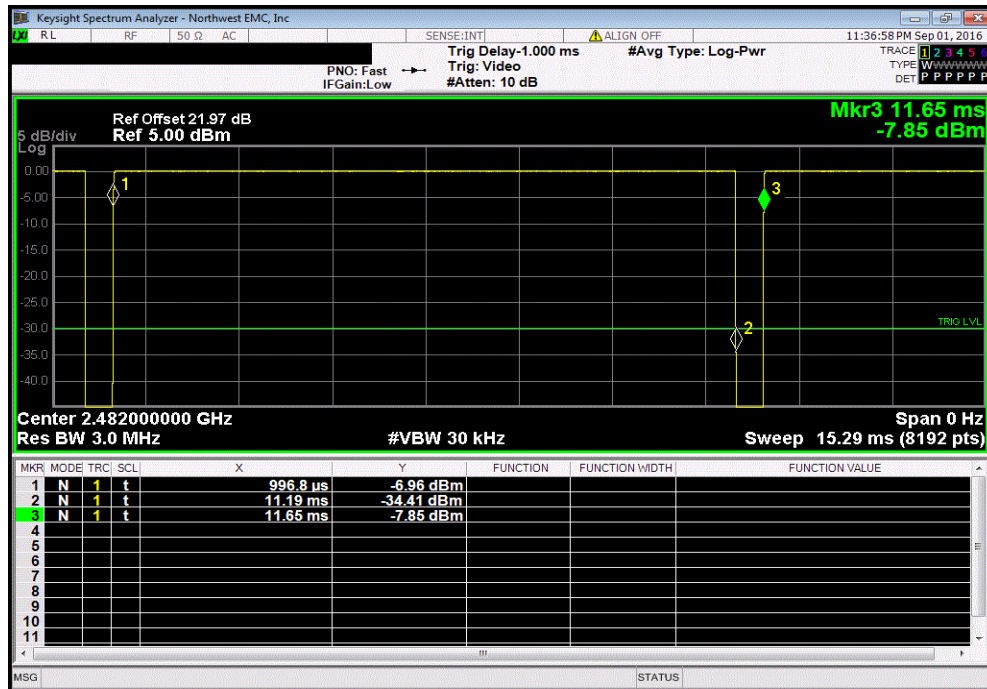

2400 MHz - 2483.5 MHz Band, GFSK, 2482 MHz transmit channel						
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
	N/A	N/A	5	N/A	N/A	N/A

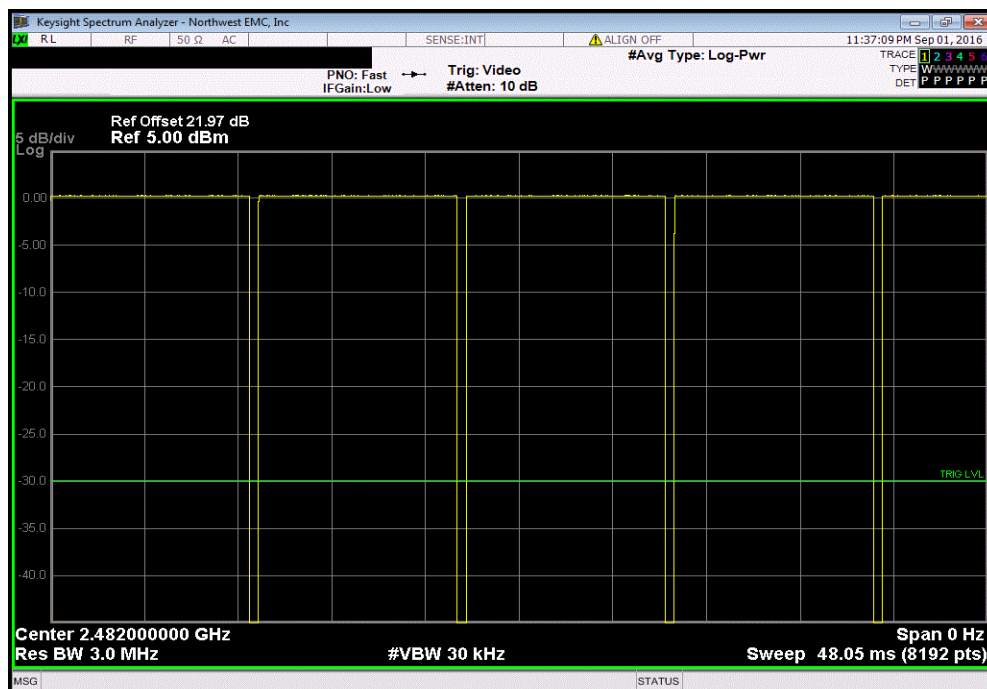

OCCUPIED BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Keysight	N5182B	TFU	10/27/2015	10/27/2018
Power Supply - DC	Topward	TPS-2000	TPD	NCR	NCR
Meter - Multimeter	Tektronix	DMM912	MMH	2/17/2016	2/17/2019
Cable	ESM Cable Corp.	TT	EV1	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	AUY	6/27/2016	6/27/2017
Block - DC	Pasternack	PE8210	AME	10/1/2015	10/1/2016
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	8/10/2016	8/10/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.


The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

OCCUPIED BANDWIDTH

EUT: TPv2 (DAP 2)		Work Order: SYNA0194	
Serial Number: 850-1631035		Date: 09/01/16	
Customer: Walt Disney Parks and Resorts US, Inc.		Temperature: 22.3 °C	
Attendees: Hattie Spetla		Humidity: 44.9% RH	
Project: None		Barometric Pres.: 1021 mbar	
Tested by: Jared Ison	Power: 24 VDC	Job Site: EV06	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature 	
		Value	Limit (>) Result
2400 MHz - 2483.5 MHz Band			
GFSK			
2482 MHz transmit channel		702.663 kHz	500 kHz Pass

OCCUPIED BANDWIDTH

2400 MHz - 2483.5 MHz Band, GFSK, 2482 MHz transmit channel						
	Value	Limit	Result			
	702.663 kHz	(> 500 kHz	Pass			

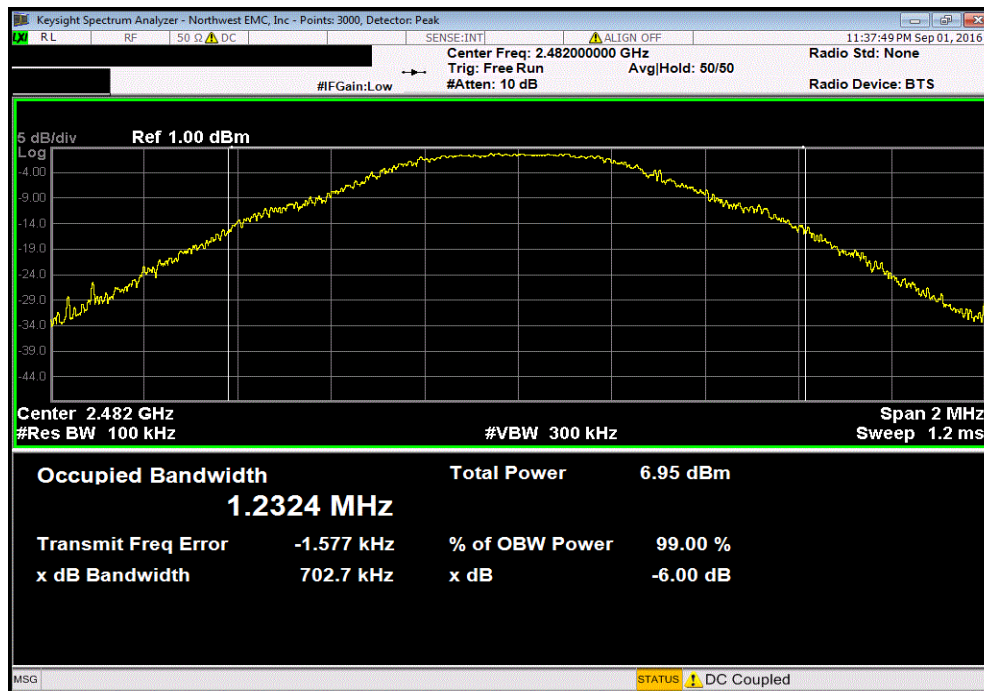

OUTPUT POWER

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Keysight	N5182B	TFU	10/27/2015	10/27/2018
Meter - Multimeter	Tektronix	DMM912	MMH	2/17/2016	2/17/2019
Power Supply - DC	Topward	TPS-2000	TPD	NCR	NCR
Cable	ESM Cable Corp.	TT	EV1	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	AUY	6/27/2016	6/27/2017
Block - DC	Pasternack	PE8210	AME	10/1/2015	10/1/2016
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	8/10/2016	8/10/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) and the transmission pulse duration (T) were measured. Both are required to determine the method of measuring Maximum Conducted Output Power. The transmission pulse duration (T) was measured using a zero span on the spectrum analyzer to see the pulses in the time domain.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.


De Facto EIRP Limit: The EUT meets the de facto EIRP limit of +36 dBm.

OUTPUT POWER

EUT: TPv2 (DAP 2)		Work Order: SYNA0194	
Serial Number: 850-1631035		Date: 09/01/16	
Customer: Walt Disney Parks and Resorts US, Inc.		Temperature: 22.4 °C	
Attendees: Hattie Spetla		Humidity: 45% RH	
Project: None		Barometric Pres.: 1021 mbar	
Tested by: Jared Ison	Power: 24 VDC	Job Site: EV06	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature 	
		Value	Limit (<)
2400 MHz - 2483.5 MHz Band			
GFSK			
2482 MHz transmit channel		1.091 mW	1 W
			Pass

OUTPUT POWER

2400 MHz - 2483.5 MHz Band, GFSK, 2482 MHz transmit channel						
Value				Limit	Result	
1.091 mW				1 W	Pass	

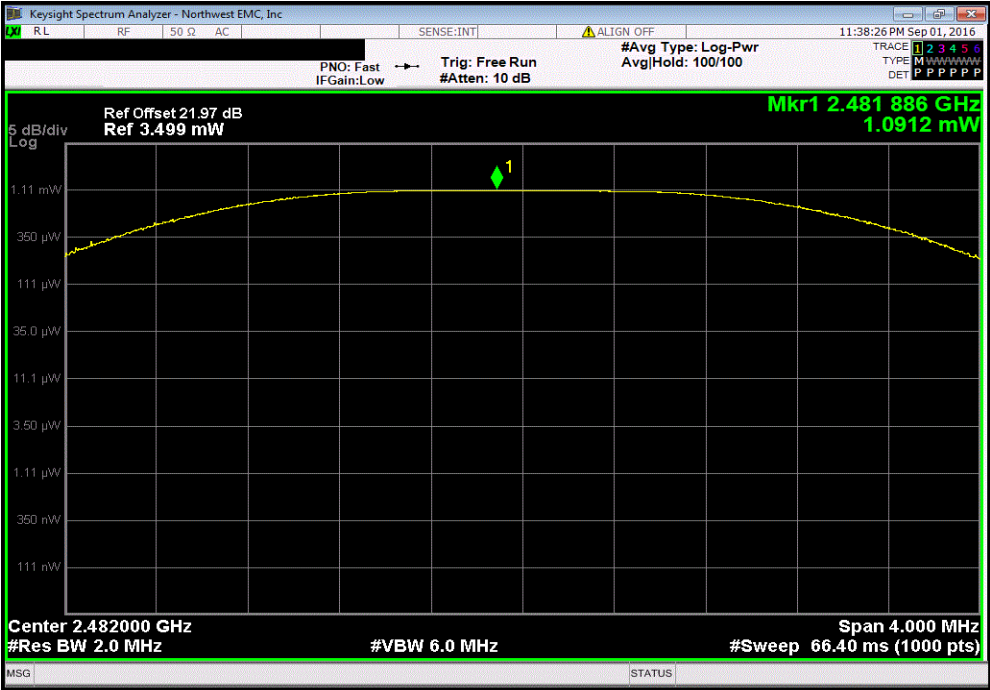

POWER SPECTRAL DENSITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Keysight	N5182B	TFU	10/27/2015	10/27/2018
Meter - Multimeter	Tektronix	DMM912	MMH	2/17/2016	2/17/2019
Power Supply - DC	Topward	TPS-2000	TPD	NCR	NCR
Cable	ESM Cable Corp.	TT	EV1	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	AUY	6/27/2016	6/27/2017
Block - DC	Pasternack	PE8210	AME	10/1/2015	10/1/2016
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	8/10/2016	8/10/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.


Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY

EUT: TPv2 (DAP 2)		Work Order: SYNA0194	
Serial Number: 850-1631035		Date: 09/01/16	
Customer: Walt Disney Parks and Resorts US, Inc.		Temperature: 22.4 °C	
Attendees: Hattie Spetla		Humidity: 45% RH	
Project: None		Barometric Pres.: 1021 mbar	
Tested by: Jared Ison	Power: 24 VDC	Job Site: EV06	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature 	
		Value dBm/3kHz	Limit < dBm/3kHz
2400 MHz - 2483.5 MHz Band			
GFSK			
2482 MHz transmit channel		-9.961	8
			Pass

POWER SPECTRAL DENSITY

2400 MHz - 2483.5 MHz Band, GFSK, 2482 MHz transmit channel						
				Value dBm/3kHz	Limit < dBm/3kHz	Results
				-9.961	8	Pass

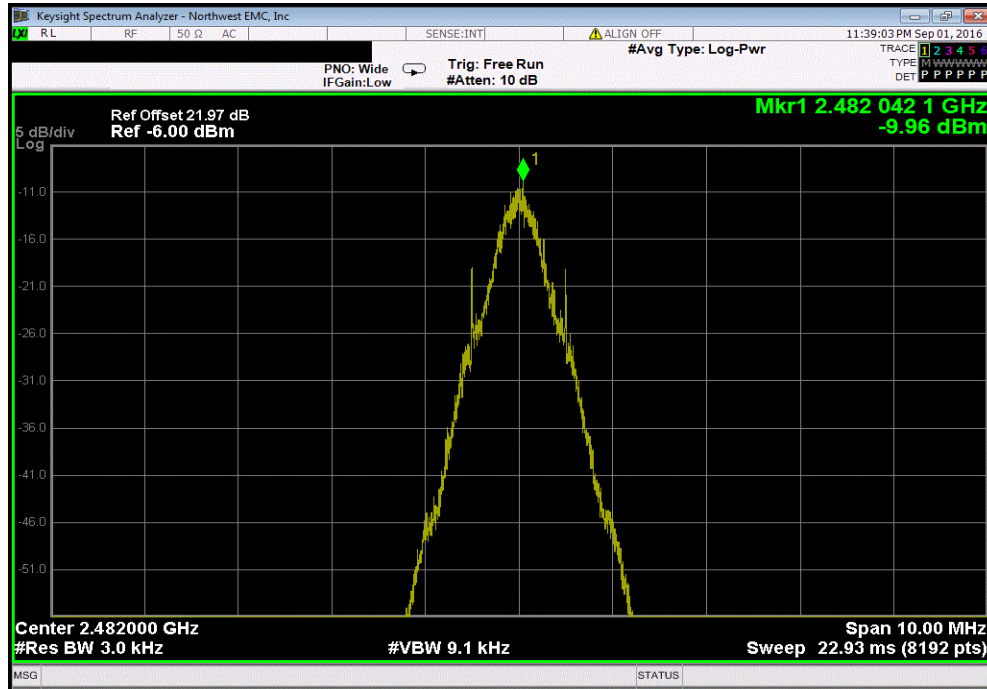

BAND EDGE COMPLIANCE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	ESM Cable Corp.	TT	EV1	NCR	NCR
Block - DC	Pasternack	PE8210	AME	10/1/2015	10/1/2016
Attenuator	S.M. Electronics	SA26B-20	AUY	6/27/2016	6/27/2017
Generator - Signal	Keysight	N5182B	TFU	10/27/2015	10/27/2018
Power Supply - DC	Topward	TPS-2000	TPD	NCR	NCR
Meter - Multimeter	Tektronix	DMM912	MMH	2/17/2016	2/17/2019
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	8/10/2016	8/10/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to high transmit frequency in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.


The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE

EUT: TPv2 (DAP 2)		Work Order: SYNA0194	
Serial Number: 850-1631035		Date: 09/01/16	
Customer: Walt Disney Parks and Resorts US, Inc.		Temperature: 22.3 °C	
Attendees: Hattie Spetla		Humidity: 45.1% RH	
Project: None		Barometric Pres.: 1021 mbar	
Tested by: Jared Ison	Power: 24 VDC	Job Site: EV06	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature 	
		Value (dBc)	Limit ≤ (dBc) Result
2400 MHz - 2483.5 MHz Band			
GFSK			
2482 MHz transmit channel		-34.76	-20 Pass

BAND EDGE COMPLIANCE

2400 MHz - 2483.5 MHz Band, GFSK, 2482 MHz transmit channel						
				Value (dBc)	Limit ≤ (dBc)	Result
				-34.76	-20	Pass

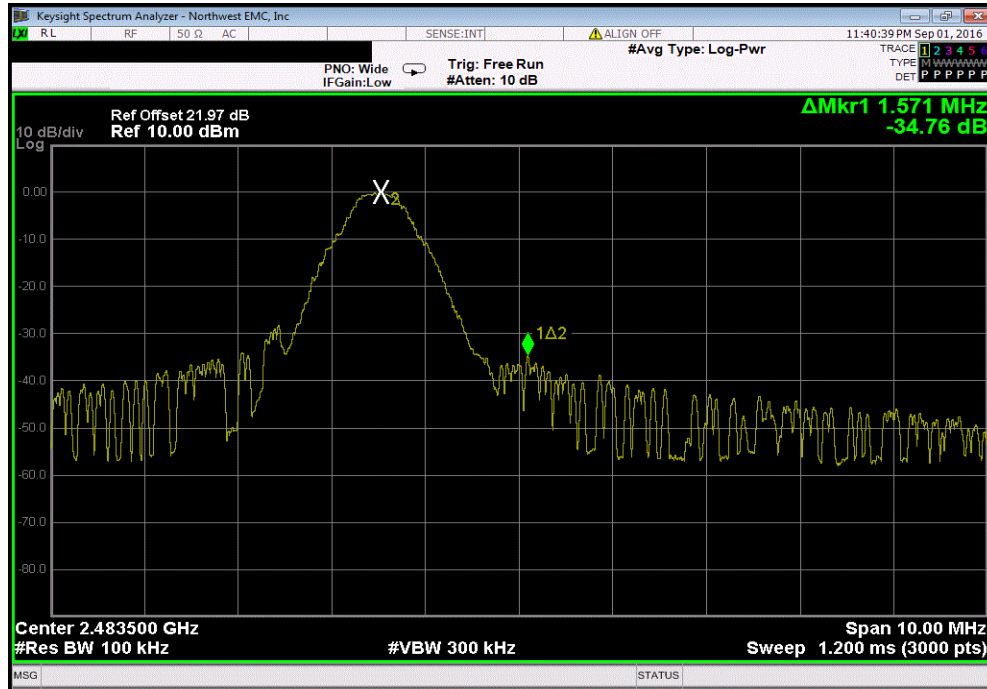

SPURIOUS CONDUCTED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Keysight	N5182B	TFU	10/27/2015	10/27/2018
Meter - Multimeter	Tektronix	DMM912	MMH	2/17/2016	2/17/2019
Power Supply - DC	Topward	TPS-2000	TPD	NCR	NCR
Cable	ESM Cable Corp.	TT	EV1	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	AUY	6/27/2016	6/27/2017
Block - DC	Pasternack	PE8210	AME	10/1/2015	10/1/2016
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	8/10/2016	8/10/2017

TEST DESCRIPTION


The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS


EUT: TPv2 (DAP 2)		Work Order: SYNA0194	
Serial Number: 850-1631035		Date: 09/01/16	
Customer: Walt Disney Parks and Resorts US, Inc.		Temperature: 22.4 °C	
Attendees: Hattie Spetla		Humidity: 45% RH	
Project: None		Barometric Pres.: 1021 mbar	
Tested by: Jared Ison	Power: 24 VDC	Job Site: EV06	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature 	
		Frequency Range	Max Value (dBc) Limit ≤ (dBc) Result
2400 MHz - 2483.5 MHz Band			
GFSK			
2482 MHz transmit channel		Fundamental	N/A N/A N/A
2482 MHz transmit channel		30 MHz - 12.5 GHz	-38.95 -20 Pass
2482 MHz transmit channel		12.5 GHz - 25 GHz	-37.36 -20 Pass

SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, GFSK, 2482 MHz transmit channel						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
Fundamental		N/A		N/A	N/A	

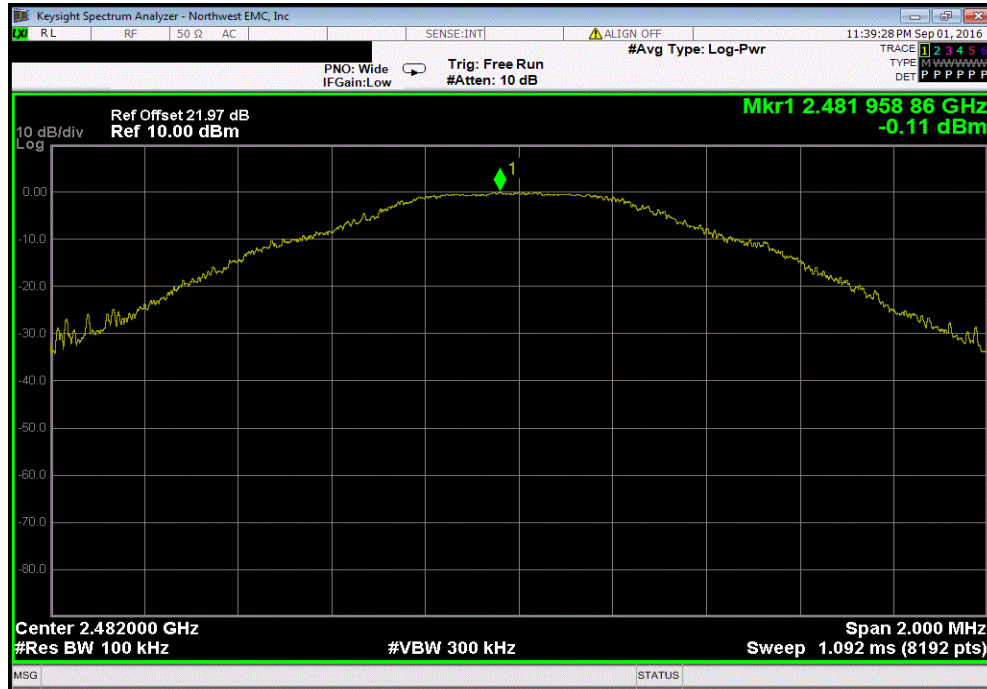

2400 MHz - 2483.5 MHz Band, GFSK, 2482 MHz transmit channel						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz		-38.95		-20	Pass	

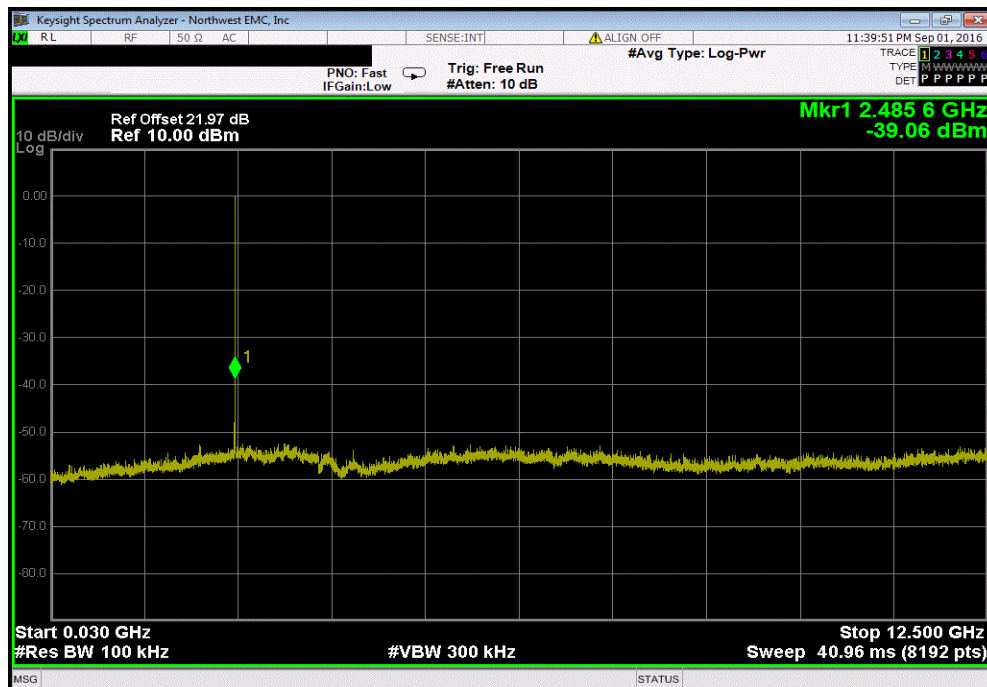

SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, GFSK, 2482 MHz transmit channel				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-37.36	-20	Pass	

