Quick Start Guide

PACKAGE CONTENTS



HiMirror Enterprise Pro



Power Adapter

Quick Start Guide

Stylus pen (Optional)

Wall anchor x 2

Screw x 2



Wall Hook



Grooved Plate Hook

OVERVIEW

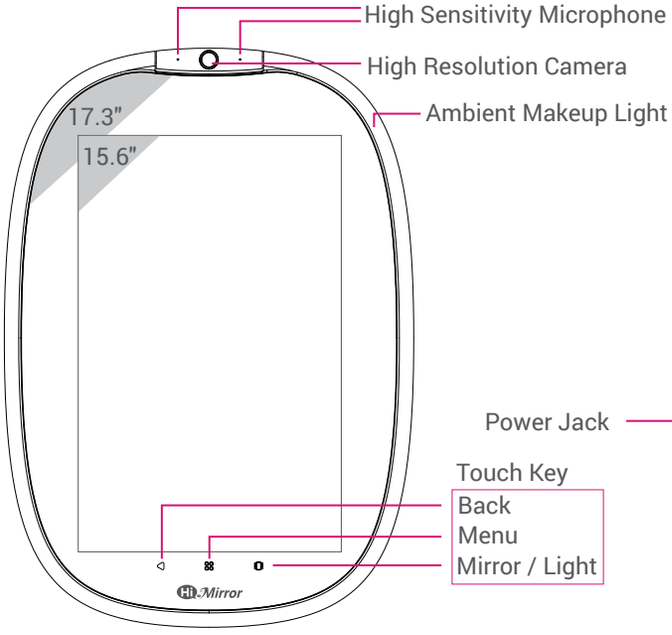

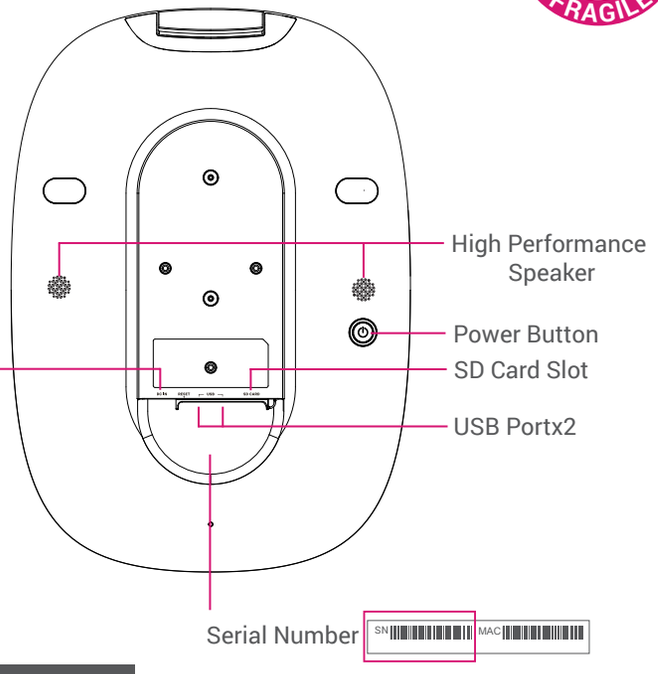

• 17.3" mirror size with 15.6" TFT LCD touch panel

Touch Key	Functions
Back	Back to previous page
Menu	Bring up the menu
Mirror / Light	Switch between Mirror mode and ambient makeup light

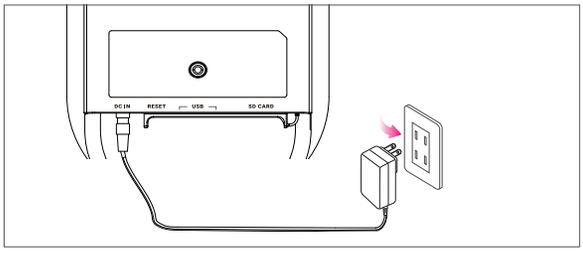

Power Jack –
Connect HiMirror Mini to a power outlet using the provided power adapter.

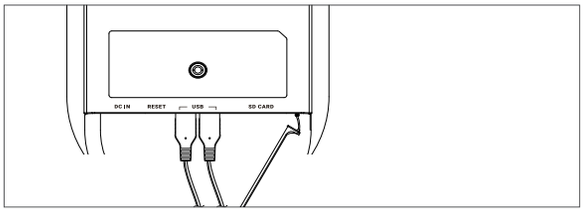

USB Port –
Connect with HiMirror Mini supported peripheral devices.

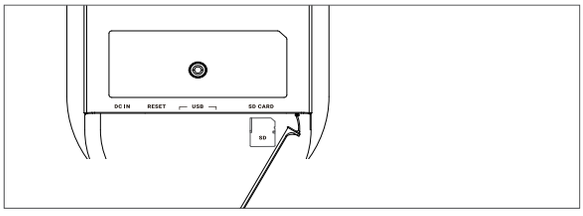

SD Card Slot –
Insert an SD card for additional storage space.

BEFORE YOU START

Note:

1. Children under the age of 13 are not permitted to create a HiMirror account.
2. Please ensure HiMirror Mini is placed on a flat and even surface.

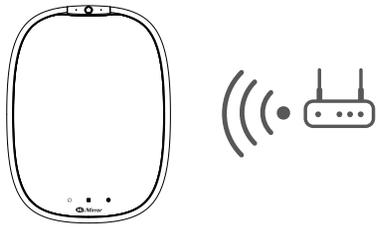

HiMirror Mini must be within range of your WiFi network

You must have a WiFi network available and have your HiMirror Mini installed within its range.

GETTING STARTED

1. Connect HiMirror Mini to a power outlet using the power adapter.*
2. Push and hold the power button for at least 3 sec. to turn on HiMirror Mini.
3. Push to open the camera cover.
4. Follow the on-screen instructions to complete setup.

*Note: HiMirror Mini must be plugged into a power outlet at all times.

Temperature / Humidity	Operation: 41°~95°F(5°~35°C); 30~80% RH Storage & Transportation: -4°~140°F(-20°~60°C); 0~95% RH
Power Consumption	Power Input: 100-240V~50/60Hz, 1.0A Power Adapter: 12V, 36W

WALL HOOK ASSEMBLE

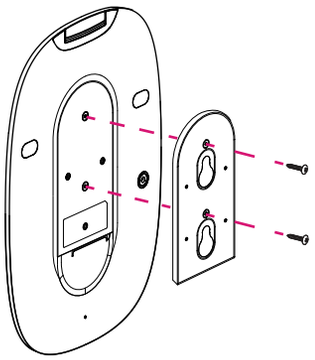

a. Put the Hook on the back of HiMirror Pro

b. Tighten the screws into the holes as marked in picture to fix the hook on HiMirror Pro.

MOUNTING INSTRUCTION



Mirror Mounting

a. Before using make sure the adhesive area and the desired surface are dry and clean.

b. Remove the blue protective film from the wall hook, and hold in the desired position for 1 minute to ensure a strong bond.

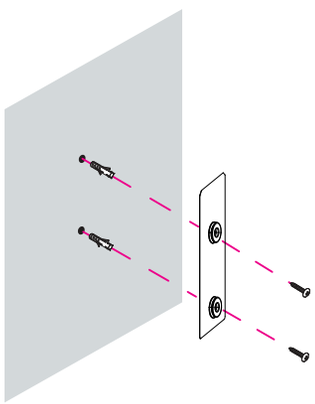

Wall Mounting

1. Concrete

a. Drill the mounting holes, insert the wall anchors.

b. Screw the wall hook into the concrete wall.

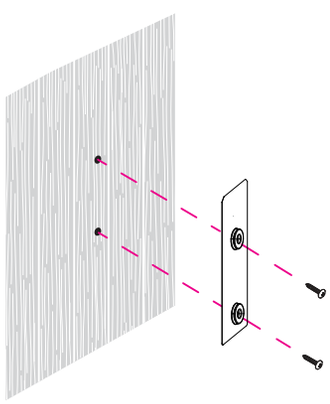

1. Wood/ Drywall

a. Screw the wall hook directly into the wall using the supplied screws.

*Note: Electric Drill Torque: 8.68 lbf/fn (10 kgf/cm)

Smart Mirror, Smarter Beauty

Address: 20191 Windrow Dr., Suite B Lake Forest, CA 92630, USA
Toll-free Number: +1-855-999-3348

HiMirror www.himirror.com

HDBM668xxxx