

BLE1M


DUT:GD300X

Communication System: BLE 1M ; Frequency: 2402 MHz;Duty Cycle: 1:1.1792  
Medium: H2450 Medium parameters used: f = 2402 MHz;  $\sigma = 1.731 \text{ S/m}$ ;  $\epsilon_r = 40.598$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature : 22.2 °C; Liquid Temperature : 22.0°C

- DASY5Configuration:
- Probe: EX3DV4 - SN3970; ConvF(7.91, 7.91, 7.91); Calibrated: 2022/4/18;
  - Sensor-Surface: 4mm (Mechanical SurfaceDetection)
  - Electronics: DAE4 Sn1418; Calibrated:2022/3/24
  - Phantom: ELI v5.0; Type: QDOVA002AA; Serial:TP:1231
  - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

**Top-BLE 1M Low/Area Scan (6x12x1):** Measurement grid: dx=10mm,dy=10mmMaximum  
value of SAR (measured) = 0.0115W/kg

**Top-BLE 1M Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,  
dy=5mm,dz=5mmReference Value = 2.475 V/m; Power Drift = -0.19dB  
Peak SAR (extrapolated) = 0.0240W/kg  
**SAR(1 g) = 0.0187 W/kg; SAR(10 g) = 0.0058W/kg**  
Maximum value of SAR (measured) = 0.0106W/kg

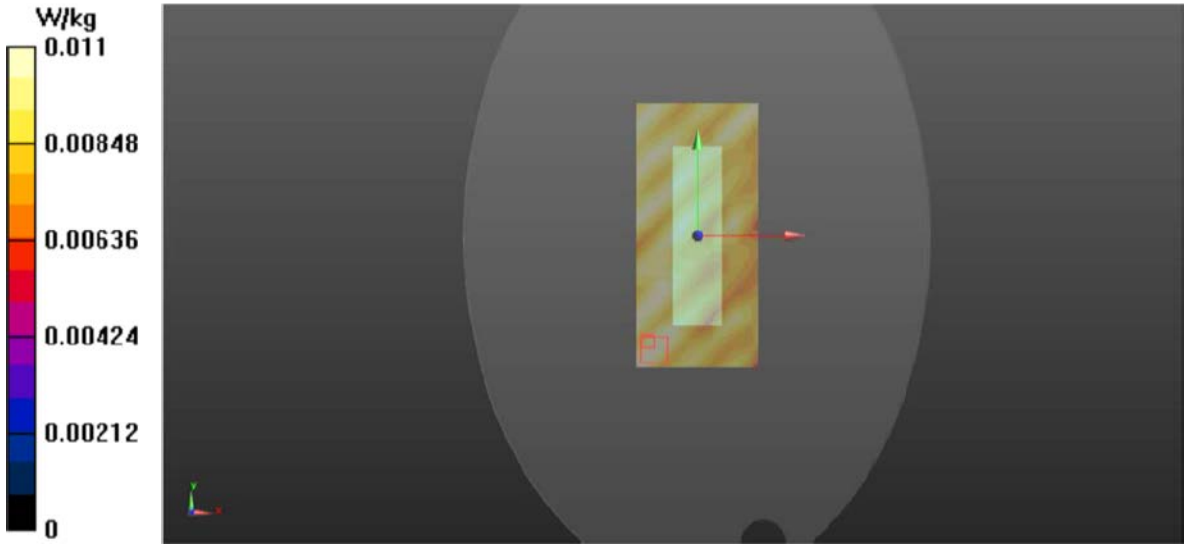

BLE2M

DUT:GD300X

Communication System: BLE 2M; Frequency: 2402 MHz;Duty Cycle: 1:1.1682  
Medium: H2450 Medium parameters used: f = 2402 MHz;  $\sigma = 1.731 \text{ S/m}$ ;  $\epsilon_r = 40.598$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature : 22.2 °C; Liquid Temperature : 22.0°C

- DASY5Configuration:
- Probe: EX3DV4 - SN3970; ConvF(7.91, 7.91, 7.91); Calibrated: 2022/4/18;
  - Sensor-Surface: 4mm (Mechanical SurfaceDetection)
  - Electronics: DAE4 Sn1418; Calibrated:2022/3/24
  - Phantom: ELI v5.0; Type: QDOVA002AA; Serial:TP:1231
  - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

**Top-BLE 2M Low/Area Scan (6x12x1):** Measurement grid: dx=10mm,dy=10mmMaximum  
value of SAR (measured) = 0.0117W/kg

**Top-BLE 2M Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,  
dy=5mm,dz=5mmReference Value = 1.855 V/m; Power Drift = -0.06dB  
Peak SAR (extrapolated) = 0.0180W/kg  
**SAR(1 g) = 0.0176 W/kg; SAR(10 g) = 0.0056W/kg**  
Maximum value of SAR (measured) = 0.0111W/kg

---

2.4G1M


DUT:GD300X

Communication System: 2.4G 1M ; Frequency: 2402 MHz;Duty Cycle: 1:1  
Medium: H2450 Medium parameters used:  $f = 2402\text{ MHz}$ ;  $\sigma = 1.731\text{ S/m}$ ;  $\epsilon_r = 40.598$ ;  $\rho = 1000\text{ kg/m}^3$   
Ambient Temperature :  $22.2\text{ }^{\circ}\text{C}$ ; Liquid Temperature :  $22.0^{\circ}\text{C}$

- DASY5Configuration:
- Probe: EX3DV4 - SN3970; ConvF(7.91, 7.91, 7.91); Calibrated: 2022/4/18;
  - Sensor-Surface: 4mm (Mechanical SurfaceDetection)
  - Electronics: DAE4 Sn1418; Calibrated:2022/3/24
  - Phantom: ELI v5.0; Type: QDOVA002AA; Serial:TP:1231
  - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

**Top-2.4G 1M Low/Area Scan (6x12x1):** Measurement grid:  $dx=10\text{mm}, dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.0101\text{W/kg}$

**Top-2.4G 1M Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}, dy=5\text{mm}, dz=5\text{mm}$ Reference Value =  $2.135\text{ V/m}$ ; Power Drift =  $-0.04\text{dB}$   
Peak SAR (extrapolated) =  $0.0210\text{W/kg}$   
**SAR(1 g) =  $0.0129\text{ W/kg}$ ; SAR(10 g) =  $0.0033\text{W/kg}$**   
Maximum value of SAR (measured) =  $0.0105\text{W/kg}$

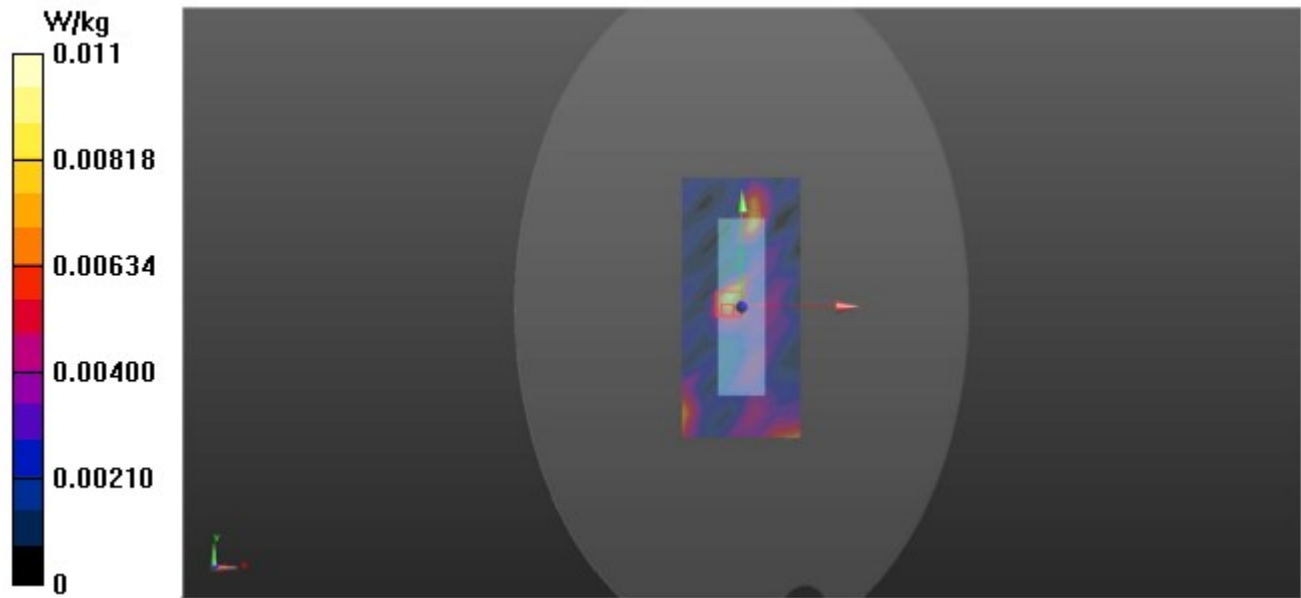

2.4G2M

DUT:GD300X

Communication System: 2.4G 2M; Frequency: 2402 MHz;Duty Cycle: 1:1  
Medium: H2450 Medium parameters used:  $f = 2402\text{ MHz}$ ;  $\sigma = 1.731\text{ S/m}$ ;  $\epsilon_r = 40.598$ ;  $\rho = 1000\text{ kg/m}^3$   
Ambient Temperature : 22.2 °C; Liquid Temperature : 22.0°C

- DASY5Configuration:
- Probe: EX3DV4 - SN3970; ConvF(7.91, 7.91, 7.91); Calibrated: 2022/4/18;
  - Sensor-Surface: 4mm (Mechanical SurfaceDetection)
  - Electronics: DAE4 Sn1418; Calibrated:2022/3/24
  - Phantom: ELI v5.0; Type: QDOVA002AA; Serial:TP:1231
  - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Top-2.4G 2M Low/Area Scan (6x12x1): Measurement grid: dx=10mm,dy=10mmMaximum

value of SAR (measured) = 0.0101W/kg

Top-2.4G 2M Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,dz=5mmReference  
Value = 1.655 V/m; Power Drift = -0.14dB  
Peak SAR (extrapolated) = 0.0159W/kg  
**SAR(1 g) = 0.0115 W/kg; SAR(10 g) = 0.0030W/kg**  
Maximum value of SAR (measured) = 0.00930W/kg

---